



FCC CFR 47 Part 90 Test Report

| | |
|-----------------------------|--|
| APPLICANT | TPL SYSTEMES |
| ADDRESS | ZAE du Perigord Noir Sarlat 24200 FRANCE |
| FCC ID | 2ATEXDM3G40GPS |
| MODEL NUMBER | DM3G40GPS |
| PRODUCT DESCRIPTION | PLMR RADIO |
| DATE SAMPLE RECEIVED | 7/11/2019 |
| FINAL TEST DATE | 08/02/2019 |
| TESTED BY | Franklin Rose |
| APPROVED BY | Tim Royer |
| TEST RESULTS | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

| Report Number | Report Version | Description | Issue Date |
|-----------------------|----------------|---|------------|
| 1774AUT19_TestReport_ | Rev1 | Initial Issue | 08/02/2019 |
| | Rev2 | Revised setup photo | 11/01/2019 |
| | Rev3 | Updated General Information per Customer request | 12/2/2019 |

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL REMARKS | 2 |
| GENERAL INFORMATION | 3 |
| RESULTS SUMMARY | 4 |
| RF POWER OUTPUT..... | 5 |
| TEST DATA: POWER MEASUREMENT TABLE..... | 5 |
| PART 2.1033 (c)(8) DC INPUT INTO FINAL AMPLIFIER..... | 5 |
| MODULATION CHARACTERISTICS | 6 |
| AUDIO FREQUENCY RESPONSE..... | 7 |
| <i>Test Data: Audio Frequency Response.....</i> | 7 |
| LOW PASS FILTER RESPONSE..... | 8 |
| <i>Test Data: Low Pass Filter Response.....</i> | 8 |
| MODULATION LIMITING..... | 9 |
| <i>Test Data: Modulation Limiting.....</i> | 9 |
| OCCUPIED BANDWIDTH & EMISSION MASK..... | 10 |
| TEST DATA: 41.5 MHz | 11 |
| TEST DATA: 41.5 MHz | 12 |
| SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED) | 13 |
| FIELD STRENGTH OF SPURIOUS EMISSIONS..... | 15 |
| TEST DATA: 33.02 MHz | 16 |
| TEST DATA: 41.5 MHz | 17 |
| TEST DATA: 41.5 MHz | 18 |
| FREQUENCY STABILITY | 19 |
| TEST DATA: FREQUENCY ERROR MEASUREMENT TABLE..... | 19 |
| TEST DATA: FREQUENCY ERROR MEASUREMENT PLOT | 20 |
| STATEMENT OF MEASUREMENT UNCERTAINTY..... | 21 |
| EMC EQUIPMENT LIST | 22 |

GENERAL REMARKS

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title Franklin Rose, Project Manager / EMC Specialist

Date 08/02/2019

Reviewed and Approved by:



Name and Title Tim Royer, Project Manager / EMC Testing Engineer

Date 08/05/2019

GENERAL INFORMATION

| | |
|---------------------------------|--|
| EUT Description | PLMR RADIO WITH BT |
| FCC ID | 2ATEXDM3G40GPS |
| Model Number | DM3G40GPS |
| Operating Frequency Band | 33.02 – 49.58 MHz |
| Test Frequencies | 33.02, 41.5 ,49.58 MHz |
| Type of Emission | 16KOF3E (Wideband Analog FM Voice) |
| Modulation | FM |
| EUT Power Source | <input type="checkbox"/> 110–120Vac/50– 60Hz |
| | <input checked="" type="checkbox"/> DC Power (13.8 V) |
| | <input type="checkbox"/> Battery Operated Exclusively |
| Test Item | <input type="checkbox"/> Prototype |
| | <input checked="" type="checkbox"/> Pre-Production |
| | <input type="checkbox"/> Production |
| Type of Equipment | <input type="checkbox"/> Fixed |
| | <input checked="" type="checkbox"/> Mobile |
| | <input type="checkbox"/> Portable |
| Antenna Connector | BNC Connector |
| Test Conditions | The temperature was 26°C Relative humidity of 50%. |
| Modification to the EUT | An audio input was connected to a audio interface box. |
| Test Exercise | The EUT was operated normally |
| Applicable Standards | ANSI/TIA 603-E:2016, ANSI C63.26, FCC CFR 47 Part 2, Part 90 |
| Test Facility | Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070 |

RESULTS SUMMARY


| Rule Part | Test Item | Results |
|--|--|-------------|
| 2.1046(a), 90.205(b) | RF Power Output | PASS |
| 2.1033(c)(4), 90.207(c), 90.209(a), (b) | Modulation Characteristics | PASS |
| 2.1047(a) | Audio Frequency Response and Low Pass Filter Response | PASS |
| 2.1047(b) | Modulation Limiting | PASS |
| 2.1049 (c), 90.210(b) | Occupied Bandwidth & Emission Masks | PASS |
| 2.1051(a), 90.210(b)(3) | Spurious Emissions at Antenna Terminals | PASS |
| 2.1053(a), 90.210(b)(3) | Field Strength of Spurious Emissions | PASS |
| 2.1055(a)(2), 90.213 | Frequency Stability | PASS |

RF POWER OUTPUT

Rule Part: FCC Part 2.1046(a), 90.205(b)

(b) 25-50 MHz. The maximum transmitter output power is 300 watts.

Method of Measurement: TIA-603-E, 2.2.1

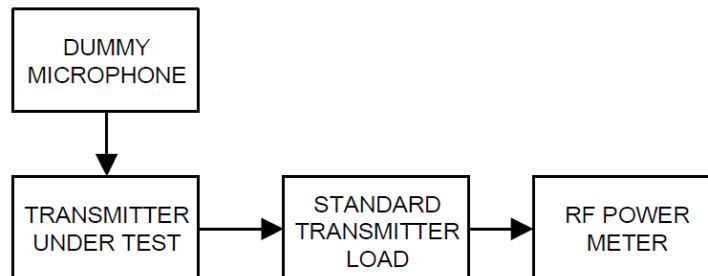

Test Data: Power Measurement Table

| Frequency | Measurement (dBm) | Measurement (W) | Limit ERP (W) | Margin (W) |
|-----------|-------------------|-----------------|---------------|------------|
| 33.02 | 46.83 | 48.19 | 300.00 | 251.81 |
| 41.50 | 46.43 | 43.95 | 300.00 | 256.05 |
| 49.58 | 46.36 | 43.25 | 300.00 | 256.75 |

Part 2.1033 (c)(8) DC Input into Final Amplifier

INPUT POWER: (13.8 V) (8.25 A) = **114 Watts**

MODULATION CHARACTERISTICS

Rule Part: Part 2.1033(c)(4), 90.207(c), 90.209(a), (b)

§90.207 Types of emissions.

(c) The use of F3E or G3E emission in these services will be authorized only on frequencies above 25 MHz.

§90.209 Bandwidth limitations.

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

(b) The maximum authorized single channel bandwidth of emission corresponding to the type of emission specified in §90.207 is as follows:

STANDARD CHANNEL SPACING/BANDWIDTH

| Frequency band (MHz) | Channel spacing (kHz) | Authorized bandwidth (kHz) |
|----------------------|-----------------------|----------------------------|
| 25-50 | 20 | 20 |

| Emission Designator | Description | Modulation Type | M (modulation Freq., kHz) | R (rate, baud) | D (deviation, kHz) | K (numeric constant) | S (symbols) | Bandwidth Calculation | Necessary Bandwidth |
|---------------------|--------------------------|-----------------|------------------------------|-------------------|-----------------------|-------------------------|----------------|-----------------------|---------------------|
| 16K0F3E | Wideband Analog FM Voice | FM | 3.0 | - | 5.0 | 1.0 | - | $B_n = 2M + 2DK$ | 16.00 |


AUDIO FREQUENCY RESPONSE

Rule Part: 2.1047(a)


Requirements:

(a) *Voice modulated communication equipment.* A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Test Procedure: TIA 603-E, 2.2.6

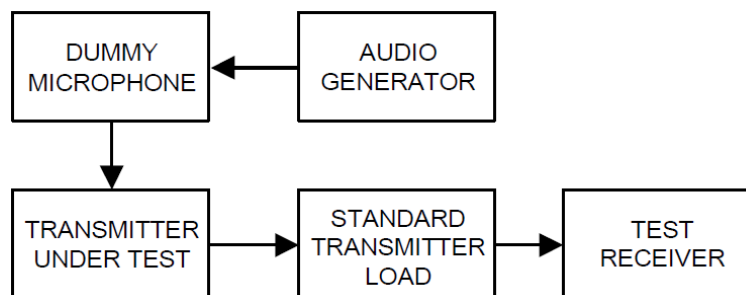

Test Data: Audio Frequency Response

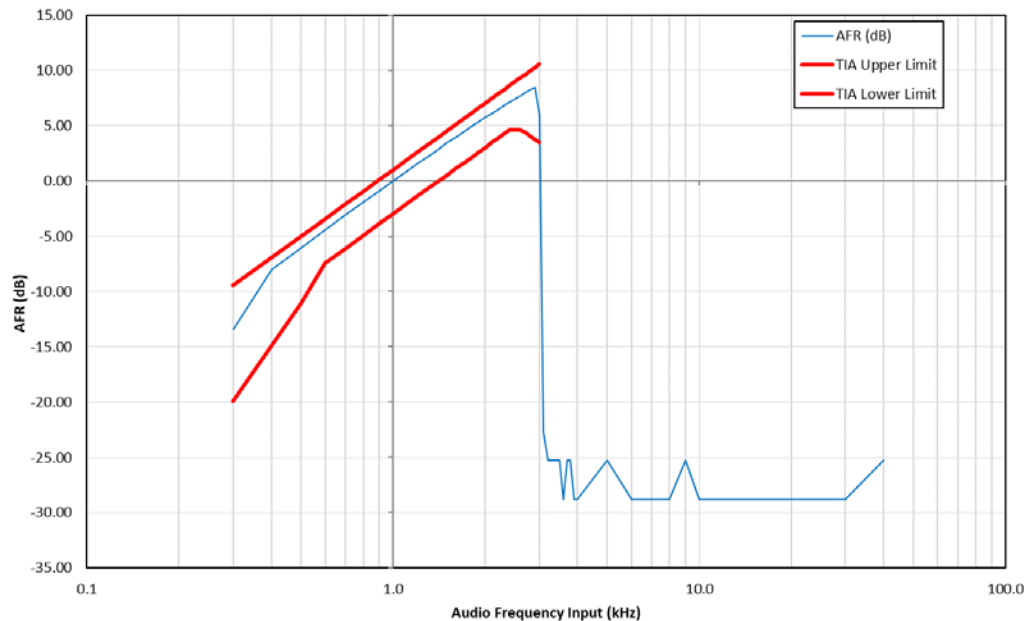


LOW PASS FILTER RESPONSE

Rule Part: 2.1047(a)


Requirements:

(a) *Voice modulated communication equipment.* A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Test Procedure: TIA 603-E, 2.2.6.2.2, 2.2.15 (Using the Test Setup from section 2.2.6).

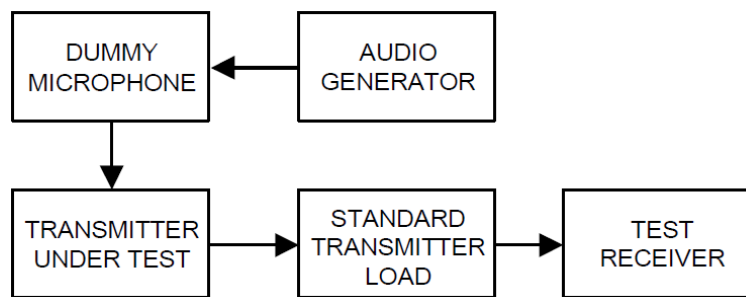

Test Data: Low Pass Filter Response

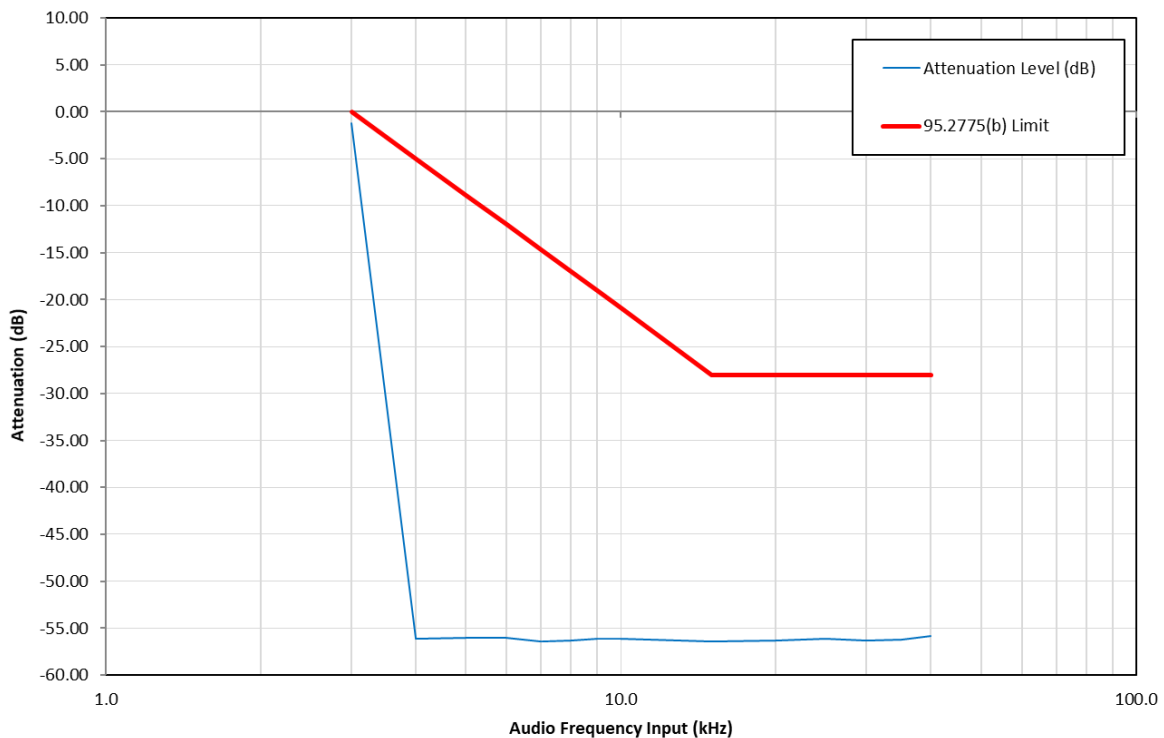

MODULATION LIMITING


Rule Part: 2.1047(b)

Requirements:


(b) *Equipment which employs modulation limiting.* A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Test Procedure: TIA 603-E, 2.2.3

Note: The test method is not sufficient to meet the standard of FCC Pt. 2.1047 alone. Deviation (kHz), as recorded from test equipment, has been converted into percentage as required above.

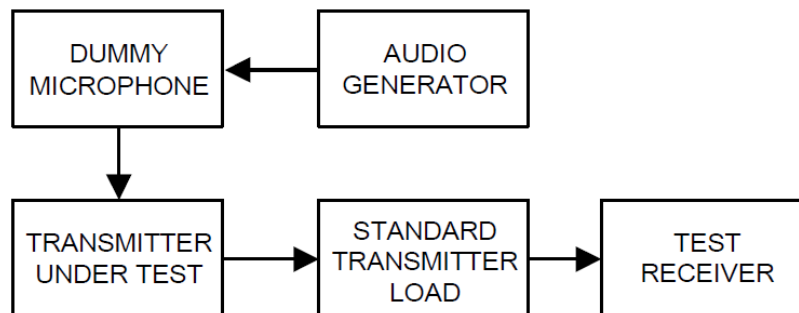

Test Data: Modulation Limiting

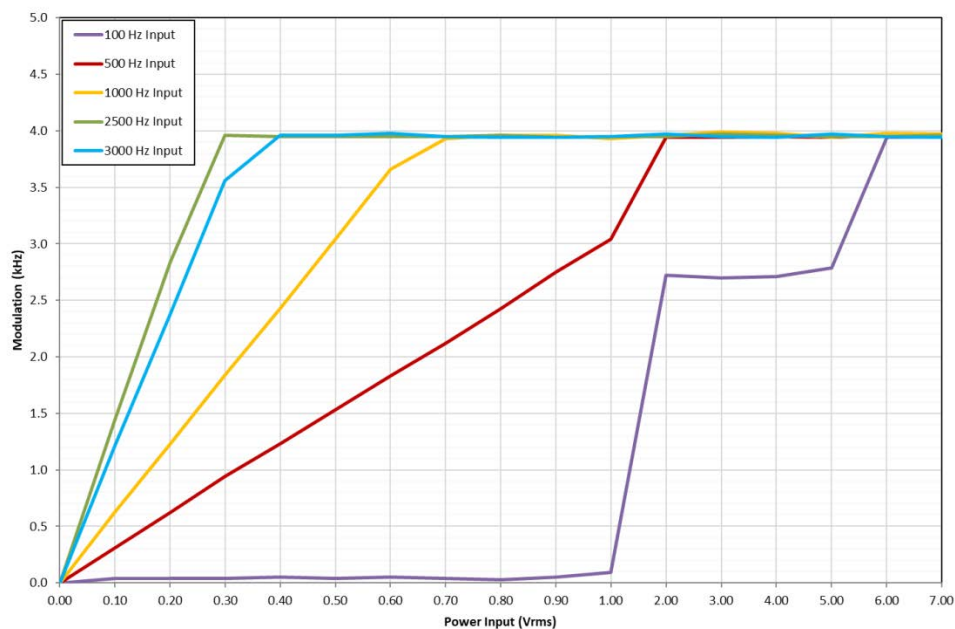

OCCUPIED BANDWIDTH & EMISSION MASK

Rule Part: 2.1049 (c), 90.210(b)

(c) Radiotelephone transmitters equipped with a device to limit modulation or peak envelope power shall be modulated as follows. For single sideband and independent sideband transmitters, the input level of the modulating signal shall be 10 dB greater than that necessary to produce rated peak envelope power.

(1) Other than single sideband or independent sideband transmitters—when modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.

§90.210 Emission masks.

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (o) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating under this part.

APPLICABLE EMISSION MASKS

| Frequency band (MHz) | Mask for equipment with audio low pass filter | Mask for equipment without audio low pass filter |
|----------------------|---|--|
| 25-50 | B | C |

(b) *Emission Mask B.* For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:


(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Method of Measurement: TIA 603-E 2.2.11


Note: The receiver's automatic 99% Occupied Bandwidth function was used. The function is identical in operation to ANSI C63.26, 5.4.4, Step e).

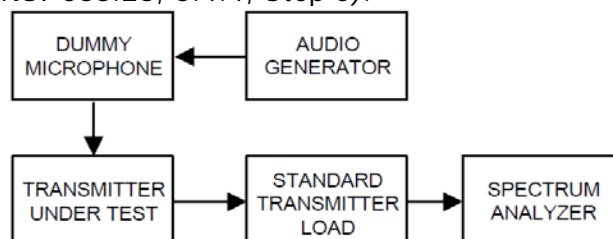

Applicant: TPL SYSTEMES
 FCC ID: 2ATEXDM3G40GPS
 Report: 1774AUT19_TestReport_Rev2

99% OCCUPIED BANDWIDTH & EMISSION MASK


Test Data: 41.5 MHz

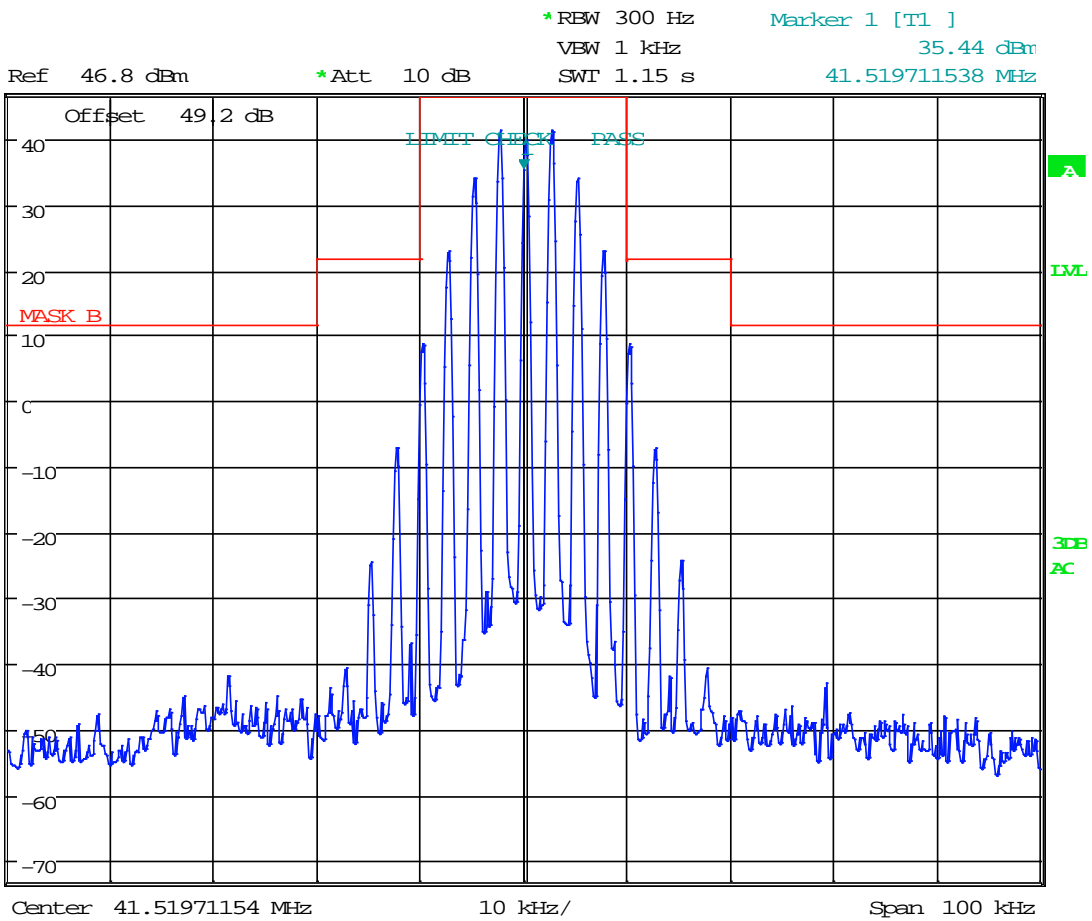

Date: 2.AUG.2019 15:47:47

99% OCCUPIED BANDWIDTH & EMISSION MASK

Test Data: 41.5 MHz

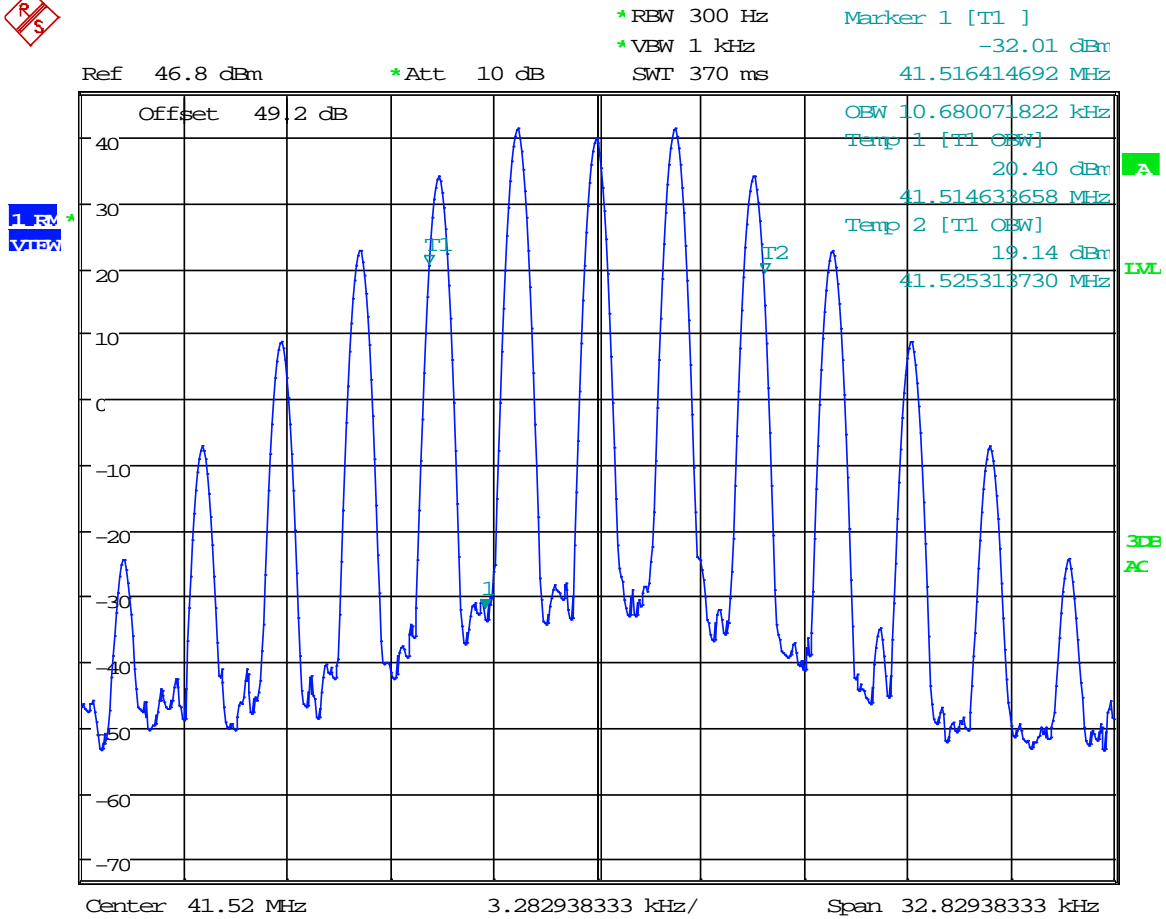

Date: 2.AUG.2019 15:53:41

99% OBW = 10.68 kHz

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part: FCC Part 2.1051(a), 90.210(b)(3)

Requirements:

§90.210 Emission masks.

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (o) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating under this part.

APPLICABLE EMISSION MASKS

| Frequency band (MHz) | Mask for equipment with audio low pass filter | Mask for equipment without audio low pass filter |
|----------------------|---|--|
| 25-50 | B | C |


(b) *Emission Mask B.* For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.

(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure: TIA 603-E, 2.2.13

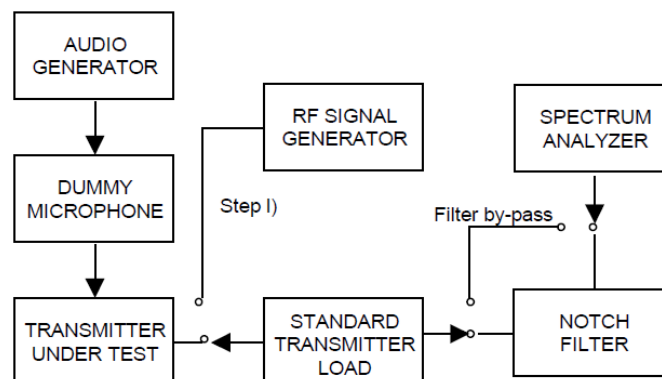

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

| Emission Frequency (MHz) | Power Output (dBm) | Antenna Gain (dB) | Antenna Loss (dB) | ERP (dBm) | Limit (dBc) | Limit (dBm) | Margin (dB) |
|--------------------------|--------------------|-------------------|-------------------|-----------|-------------|-------------|-------------|
| 33.02 | 46.83 | 0.00 | 0.59 | 46.24 | n/a | n/a | n/a |
| 66.04 | -42.37 | 0.00 | 52.86 | -95.23 | 59.83 | -13.00 | 82.23 |
| 99.06 | -28.61 | 0.00 | 42.39 | -71.00 | 59.83 | -13.00 | 58.00 |
| 132.08 | -56.01 | 0.00 | 45.76 | -101.77 | 59.83 | -13.00 | 88.77 |
| 165.10 | -49.56 | 0.00 | 53.16 | -102.72 | 59.83 | -13.00 | 89.72 |
| 198.12 | -11.40 | 0.00 | 41.69 | -53.09 | 59.83 | -13.00 | 40.09 |
| 231.14 | -21.45 | 0.00 | 43.35 | -64.80 | 59.83 | -13.00 | 51.80 |
| 264.16 | -20.59 | 0.00 | 30.66 | -51.25 | 59.83 | -13.00 | 38.25 |
| 297.18 | -17.33 | 0.00 | 31.23 | -48.56 | 59.83 | -13.00 | 35.56 |
| 330.20 | -27.77 | 0.00 | 17.91 | -45.68 | 59.83 | -13.00 | 32.68 |
| Emission Frequency (MHz) | Power Output (dBm) | Antenna Gain (dB) | Antenna Loss (dB) | ERP (dBm) | Limit (dBc) | Limit (dBm) | Margin (dB) |
| 41.50 | 46.43 | 0.00 | 0.59 | 45.84 | n/a | n/a | n/a |
| 83.00 | -32.79 | 0.00 | 52.86 | -85.65 | 59.43 | -13.00 | 72.65 |
| 124.50 | -32.13 | 0.00 | 42.39 | -74.52 | 59.43 | -13.00 | 61.52 |
| 166.00 | -56.42 | 0.00 | 45.76 | -102.18 | 59.43 | -13.00 | 89.18 |
| 207.50 | -18.68 | 0.00 | 53.16 | -71.84 | 59.43 | -13.00 | 58.84 |
| 249.00 | -22.48 | 0.00 | 41.69 | -64.17 | 59.43 | -13.00 | 51.17 |
| 290.50 | -34.83 | 0.00 | 43.35 | -78.18 | 59.43 | -13.00 | 65.18 |
| 332.00 | -28.65 | 0.00 | 30.66 | -59.31 | 59.43 | -13.00 | 46.31 |
| 373.50 | -36.51 | 0.00 | 31.23 | -67.74 | 59.43 | -13.00 | 54.74 |
| 415.00 | -38.57 | 0.00 | 17.91 | -56.48 | 59.43 | -13.00 | 43.48 |
| Emission Frequency (MHz) | Power Output (dBm) | Antenna Gain (dB) | Antenna Loss (dB) | ERP (dBm) | Limit (dBc) | Limit (dBm) | Margin (dB) |
| 49.58 | 46.36 | 0.00 | 0.00 | 46.36 | n/a | n/a | n/a |
| 99.16 | -43.42 | 0.00 | 54.42 | -97.84 | 59.36 | -13.00 | 84.84 |
| 148.74 | -29.47 | 0.00 | 44.10 | -73.57 | 59.36 | -13.00 | 60.57 |
| 198.32 | -20.89 | 0.00 | 41.76 | -62.65 | 59.36 | -13.00 | 49.65 |
| 247.90 | -15.98 | 0.00 | 49.47 | -65.45 | 59.36 | -13.00 | 52.45 |
| 297.48 | -21.64 | 0.00 | 32.08 | -53.72 | 59.36 | -13.00 | 40.72 |
| 347.06 | -24.04 | 0.00 | 35.62 | -59.66 | 59.36 | -13.00 | 46.66 |
| 396.64 | -26.84 | 0.00 | 29.73 | -56.57 | 59.36 | -13.00 | 43.57 |
| 446.22 | -34.59 | 0.00 | 18.39 | -52.98 | 59.36 | -13.00 | 39.98 |
| 495.80 | -32.16 | 0.00 | 14.80 | -46.96 | 59.36 | -13.00 | 33.96 |


Note: Blue highlighted rows indicate the fundamental transmit test frequencies of the EUT.

FIELD STRENGTH OF SPURIOUS EMISSIONS


Rule Part: FCC Part 2.1053(a), 90.210(d)(3)

Method of Measurement: ANSI C63.26, 5.5.4

Test Site Setup:

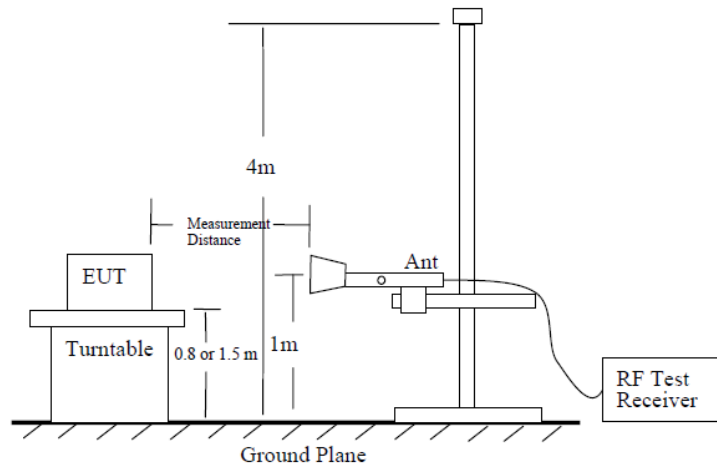

EUT Orientation(s):

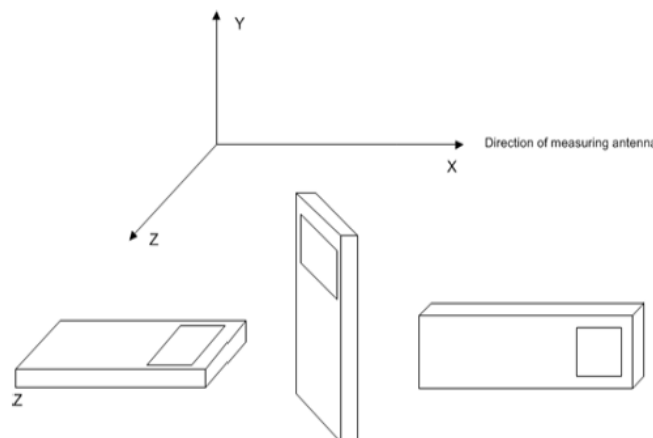

Note: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from the lowest frequency generated internally to at least the tenth harmonic of the fundamental. This test was conducted in accordance with the standard listed above using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669. The measurements below represent the worst case of all the frequencies tested.

Note: The six (6) highest emissions or more of each worst-case operational modes of the EUT are represented below. Emissions 20 dB below the limit are not required to be reported.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 33.02 MHz

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Detector | Meter Reading (dBµV) | Antenna Polarity | Coax Loss (dB) | Correction Factor (dB/m) | Distance (m) | Field Strength (dBµV/m) | ERP (dBm) | Limit (dBm) | Margin (dBm) |
|-----------------------|--------------------------|----------|----------------------|------------------|----------------|--------------------------|--------------|-------------------------|-----------|-------------|--------------|
| 33.02 | 66.00 | PK | 16.38 | H | 0.96 | 6.10 | 3.00 | 23.44 | -73.94 | -13.00 | 60.94 |
| 33.02 | 66.00 | PK | 8.57 | V | 0.96 | 6.10 | 3.00 | 15.63 | -81.75 | -13.00 | 68.75 |
| 33.02 | 66.00 | PK | 16.38 | H | 0.96 | 6.10 | 3.00 | 23.44 | -73.94 | -13.00 | 60.94 |
| 33.02 | 66.00 | PK | 8.57 | V | 0.96 | 6.10 | 3.00 | 15.63 | -81.75 | -13.00 | 68.75 |
| 33.02 | 99.10 | PK | 11.26 | H | 1.16 | 10.89 | 3.00 | 23.31 | -74.07 | -13.00 | 61.07 |
| 33.02 | 99.10 | PK | 12.88 | V | 1.16 | 10.89 | 3.00 | 24.93 | -72.45 | -13.00 | 59.45 |
| 33.02 | 99.10 | PK | 11.26 | H | 1.16 | 10.89 | 3.00 | 23.31 | -74.07 | -13.00 | 61.07 |
| 33.02 | 99.10 | PK | 12.88 | V | 1.16 | 10.89 | 3.00 | 24.93 | -72.45 | -13.00 | 59.45 |
| 33.02 | 132.10 | PK | 3.73 | H | 1.30 | 13.53 | 3.00 | 18.56 | -78.82 | -13.00 | 65.82 |
| 33.02 | 132.10 | PK | 3.41 | V | 1.30 | 13.53 | 3.00 | 18.24 | -79.14 | -13.00 | 66.14 |
| 33.02 | 132.10 | PK | 3.73 | H | 1.30 | 13.53 | 3.00 | 18.56 | -78.82 | -13.00 | 65.82 |
| 33.02 | 132.10 | PK | 3.41 | V | 1.30 | 13.53 | 3.00 | 18.24 | -79.14 | -13.00 | 66.14 |
| 33.02 | 165.10 | PK | 10.87 | H | 1.49 | 15.89 | 3.00 | 28.25 | -69.13 | -13.00 | 56.13 |
| 33.02 | 165.10 | PK | 10.83 | V | 1.49 | 15.89 | 3.00 | 28.21 | -69.17 | -13.00 | 56.17 |
| 33.02 | 165.10 | PK | 10.87 | H | 1.49 | 15.89 | 3.00 | 28.25 | -69.13 | -13.00 | 56.13 |
| 33.02 | 165.10 | PK | 10.83 | V | 1.49 | 15.89 | 3.00 | 28.21 | -69.17 | -13.00 | 56.17 |
| 33.02 | 198.10 | PK | 0.83 | H | 1.61 | 16.03 | 3.00 | 18.47 | -78.90 | -13.00 | 65.90 |
| 33.02 | 198.10 | PK | 2.05 | V | 1.61 | 16.03 | 3.00 | 19.69 | -77.68 | -13.00 | 64.68 |
| 33.02 | 198.10 | PK | 0.83 | H | 1.61 | 16.03 | 3.00 | 18.47 | -78.90 | -13.00 | 65.90 |
| 33.02 | 198.10 | PK | 2.05 | V | 1.61 | 16.03 | 3.00 | 19.69 | -77.68 | -13.00 | 64.68 |
| 33.02 | 231.10 | PK | 12.28 | V | 1.74 | 10.32 | 3.00 | 24.34 | -73.03 | -13.00 | 60.03 |
| 33.02 | 231.10 | PK | 16.24 | H | 1.74 | 10.32 | 3.00 | 28.30 | -69.07 | -13.00 | 56.07 |
| 33.02 | 264.20 | PK | 3.55 | V | 2.04 | 11.88 | 3.00 | 17.47 | -79.91 | -13.00 | 66.91 |
| 33.02 | 264.20 | PK | 6.41 | H | 2.04 | 11.88 | 3.00 | 20.33 | -77.05 | -13.00 | 64.05 |
| 33.02 | 297.20 | PK | 13.11 | V | 2.08 | 13.23 | 3.00 | 28.42 | -68.96 | -13.00 | 55.96 |
| 33.02 | 297.20 | PK | 22.43 | H | 2.08 | 13.23 | 3.00 | 37.74 | -59.64 | -13.00 | 46.64 |
| 33.02 | 330.20 | PK | 27.64 | V | 2.09 | 13.70 | 3.00 | 43.43 | -53.95 | -13.00 | 40.95 |
| 33.02 | 330.20 | PK | 35.14 | H | 2.09 | 13.70 | 3.00 | 50.93 | -46.45 | -13.00 | 33.45 |

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 41.5 MHz

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Detector | Meter Reading (dBμV) | Antenna Polarity | Coax Loss (dB) | Correction Factor (dB/m) | Distance (m) | Field Strength (dBμV/m) | ERP (dBm) | Limit (dBm) | Margin (dBm) |
|-----------------------|--------------------------|----------|----------------------|------------------|----------------|--------------------------|--------------|-------------------------|-----------|-------------|--------------|
| 41.50 | 83.00 | PK | 1.82 | H | 1.10 | 9.30 | 3.00 | 12.22 | -85.16 | -13.00 | 72.16 |
| 41.50 | 83.00 | PK | 5.77 | V | 1.10 | 9.30 | 3.00 | 16.17 | -81.21 | -13.00 | 68.21 |
| 41.50 | 83.00 | PK | 1.82 | H | 1.10 | 9.30 | 3.00 | 12.22 | -85.16 | -13.00 | 72.16 |
| 41.50 | 83.00 | PK | 5.77 | V | 1.10 | 9.30 | 3.00 | 16.17 | -81.21 | -13.00 | 68.21 |
| 41.50 | 124.50 | PK | 11.17 | H | 1.27 | 11.60 | 3.00 | 24.04 | -73.34 | -13.00 | 60.34 |
| 41.50 | 124.50 | PK | 14.81 | V | 1.27 | 11.60 | 3.00 | 27.68 | -69.70 | -13.00 | 56.70 |
| 41.50 | 124.50 | PK | 11.17 | H | 1.27 | 11.60 | 3.00 | 24.04 | -73.34 | -13.00 | 60.34 |
| 41.50 | 124.50 | PK | 14.81 | V | 1.27 | 11.60 | 3.00 | 27.68 | -69.70 | -13.00 | 56.70 |
| 41.50 | 165.88 | PK | 9.49 | H | 1.49 | 15.81 | 3.00 | 26.79 | -70.59 | -13.00 | 57.59 |
| 41.50 | 165.88 | PK | 7.81 | V | 1.49 | 15.81 | 3.00 | 25.11 | -72.27 | -13.00 | 59.27 |
| 41.50 | 165.88 | PK | 9.49 | H | 1.49 | 15.81 | 3.00 | 26.79 | -70.59 | -13.00 | 57.59 |
| 41.50 | 165.88 | PK | 7.81 | V | 1.49 | 15.81 | 3.00 | 25.11 | -72.27 | -13.00 | 59.27 |
| 41.50 | 166.00 | PK | 14.58 | H | 1.49 | 15.80 | 3.00 | 31.87 | -65.51 | -13.00 | 52.51 |
| 41.50 | 166.00 | PK | 13.67 | V | 1.49 | 15.80 | 3.00 | 30.96 | -66.42 | -13.00 | 53.42 |
| 41.50 | 166.00 | PK | 14.58 | H | 1.49 | 15.80 | 3.00 | 31.87 | -65.51 | -13.00 | 52.51 |
| 41.50 | 166.00 | PK | 13.67 | V | 1.49 | 15.80 | 3.00 | 30.96 | -66.42 | -13.00 | 53.42 |
| 41.50 | 207.50 | PK | 4.98 | V | 1.63 | 10.60 | 3.00 | 17.21 | -80.17 | -13.00 | 67.17 |
| 41.50 | 207.50 | PK | 8.14 | H | 1.63 | 10.60 | 3.00 | 20.37 | -77.01 | -13.00 | 64.01 |
| 41.50 | 249.00 | PK | 3.07 | V | 1.88 | 11.12 | 3.00 | 16.07 | -81.31 | -13.00 | 68.31 |
| 41.50 | 249.00 | PK | 4.03 | H | 1.88 | 11.12 | 3.00 | 17.03 | -80.35 | -13.00 | 67.35 |
| 41.50 | 290.50 | PK | 10.63 | V | 2.08 | 13.19 | 3.00 | 25.90 | -71.48 | -13.00 | 58.48 |
| 41.50 | 290.50 | PK | 23.47 | H | 2.08 | 13.19 | 3.00 | 38.74 | -58.64 | -13.00 | 45.64 |
| 41.50 | 331.76 | PK | 6.74 | H | 2.10 | 13.70 | 3.00 | 22.54 | -74.84 | -13.00 | 61.84 |
| 41.50 | 332.00 | PK | 27.84 | V | 2.10 | 13.70 | 3.00 | 43.64 | -53.74 | -13.00 | 40.74 |
| 41.50 | 332.00 | PK | 41.06 | H | 2.10 | 13.70 | 3.00 | 56.86 | -40.52 | -13.00 | 27.52 |
| 41.50 | 373.50 | PK | 31.44 | V | 2.22 | 14.24 | 3.00 | 47.90 | -49.48 | -13.00 | 36.48 |
| 41.50 | 373.50 | PK | 30.92 | H | 2.22 | 14.24 | 3.00 | 47.38 | -50.00 | -13.00 | 37.00 |
| 41.50 | 415.00 | PK | 13.33 | V | 2.33 | 15.00 | 3.00 | 30.66 | -66.72 | -13.00 | 53.72 |
| 41.50 | 415.00 | PK | 10.01 | H | 2.33 | 15.00 | 3.00 | 27.34 | -70.04 | -13.00 | 57.04 |

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 41.5 MHz

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Detector | Meter Reading (dBμV) | Antenna Polarity | Coax Loss (dB) | Correction Factor (dB/m) | Distance (m) | Field Strength (dBμV/m) | ERP (dBm) | Limit (dBm) | Margin (dBm) |
|-----------------------|--------------------------|----------|----------------------|------------------|----------------|--------------------------|--------------|-------------------------|-----------|-------------|--------------|
| 49.58 | 99.20 | PK | 10.90 | V | 1.16 | 10.88 | 3.00 | 22.94 | -74.44 | -13.00 | 61.44 |
| 49.58 | 99.20 | PK | 4.70 | H | 1.16 | 10.88 | 3.00 | 16.74 | -80.64 | -13.00 | 67.64 |
| 49.58 | 99.20 | PK | 10.90 | V | 1.16 | 10.88 | 3.00 | 22.94 | -74.44 | -13.00 | 61.44 |
| 49.58 | 99.20 | PK | 4.70 | H | 1.16 | 10.88 | 3.00 | 16.74 | -80.64 | -13.00 | 67.64 |
| 49.58 | 148.70 | PK | 6.44 | V | 1.39 | 16.37 | 3.00 | 24.20 | -73.18 | -13.00 | 60.18 |
| 49.58 | 148.70 | PK | 14.73 | H | 1.39 | 16.37 | 3.00 | 32.49 | -64.89 | -13.00 | 51.89 |
| 49.58 | 148.70 | PK | 6.44 | V | 1.39 | 16.37 | 3.00 | 24.20 | -73.18 | -13.00 | 60.18 |
| 49.58 | 148.70 | PK | 14.73 | H | 1.39 | 16.37 | 3.00 | 32.49 | -64.89 | -13.00 | 51.89 |
| 49.58 | 198.30 | PK | 3.88 | V | 1.61 | 16.09 | 3.00 | 21.58 | -75.79 | -13.00 | 62.79 |
| 49.58 | 198.30 | PK | 4.97 | H | 1.61 | 16.09 | 3.00 | 22.67 | -74.70 | -13.00 | 61.70 |
| 49.58 | 198.30 | PK | 3.88 | V | 1.61 | 16.09 | 3.00 | 21.58 | -75.79 | -13.00 | 62.79 |
| 49.58 | 198.30 | PK | 4.97 | H | 1.61 | 16.09 | 3.00 | 22.67 | -74.70 | -13.00 | 61.70 |
| 49.58 | 247.90 | PK | 16.03 | H | 1.86 | 11.03 | 3.00 | 28.92 | -68.45 | -13.00 | 55.45 |
| 49.58 | 247.90 | PK | 10.76 | V | 1.86 | 11.03 | 3.00 | 23.65 | -73.72 | -13.00 | 60.72 |
| 49.58 | 297.50 | PK | 25.99 | H | 2.08 | 13.25 | 3.00 | 41.32 | -56.06 | -13.00 | 43.06 |
| 49.58 | 297.50 | PK | 16.65 | V | 2.08 | 13.25 | 3.00 | 31.98 | -65.40 | -13.00 | 52.40 |
| 49.58 | 347.10 | PK | 38.62 | H | 2.11 | 13.83 | 3.00 | 54.56 | -42.81 | -13.00 | 29.81 |
| 49.58 | 347.10 | PK | 33.03 | V | 2.11 | 13.83 | 3.00 | 48.97 | -48.40 | -13.00 | 35.40 |
| 49.58 | 396.60 | PK | 22.10 | H | 2.28 | 14.63 | 3.00 | 39.01 | -58.37 | -13.00 | 45.37 |
| 49.58 | 396.60 | PK | 3.34 | V | 2.28 | 14.63 | 3.00 | 20.25 | -77.13 | -13.00 | 64.13 |
| 49.58 | 446.20 | PK | 7.83 | H | 2.44 | 15.85 | 3.00 | 26.12 | -71.26 | -13.00 | 58.26 |
| 49.58 | 446.20 | PK | 11.46 | V | 2.44 | 15.85 | 3.00 | 29.75 | -67.63 | -13.00 | 54.63 |
| 49.58 | 495.80 | PK | 17.98 | H | 2.64 | 17.23 | 3.00 | 37.85 | -59.53 | -13.00 | 46.53 |
| 49.58 | 495.80 | PK | 14.65 | V | 2.64 | 17.23 | 3.00 | 34.52 | -62.86 | -13.00 | 49.86 |

FREQUENCY STABILITY

Rule Part: FCC Part 2.1055(a)(2), 90.213

§90.213 Frequency stability.


(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

MINIMUM FREQUENCY STABILITY

[Parts per million (ppm)]

| Frequency range (MHz) | Fixed and base stations | Mobile stations | |
|-----------------------|-------------------------|---------------------------|------------------------------|
| | | Over 2 watts output power | 2 watts or less output power |
| 25-50 | 20 | 20 | 50 |

Method of Measurements: TIA 603-E, 2.2.2

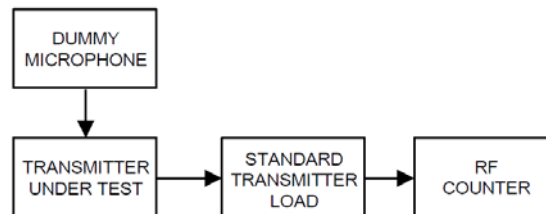


Test Data: Frequency Error Measurement Table

| FCC Part 90 Limit | 20.0 | ppm |
|---------------------------------|----------------------|--|
| Strictest Combined Limit, as Hz | 991.599 | Hz |
| Lower Limit | 49.578958 | MHz |
| Upper Limit | 49.580942 | MHz |
| Rated Supply Voltage | 13.8 | <input type="radio"/> AC <input checked="" type="radio"/> DC |
| Temperature / Voltage Variation | | |
| Temperature (°C) | Supplied Voltage (V) | Frequency (MHz) |
| -30 | 13.8 | 49.579960 |
| -20 | 13.8 | 49.579960 |
| -10 | 13.8 | 49.579962 |
| 0 | 13.8 | 49.579963 |
| +10 | 13.8 | 49.579963 |
| +20 (reference) | 13.8 | 49.579950 |
| +20 | 11.7 | 49.579950 |
| +20 | 15.9 | 49.579964 |
| +30 | 13.8 | 49.579969 |
| +40 | 13.8 | 49.579969 |
| +50 | 13.8 | 49.579970 |
| | | Deviation (kHz) |
| | | -0.010 |
| | | -0.012 |
| | | -0.013 |
| | | -0.013 |
| | | 0.000 |
| | | 0.000 |
| | | -0.014 |
| | | -0.019 |
| | | -0.019 |
| | | -0.020 |

FREQUENCY STABILITY

Test Data: Frequency Error Measurement Plot

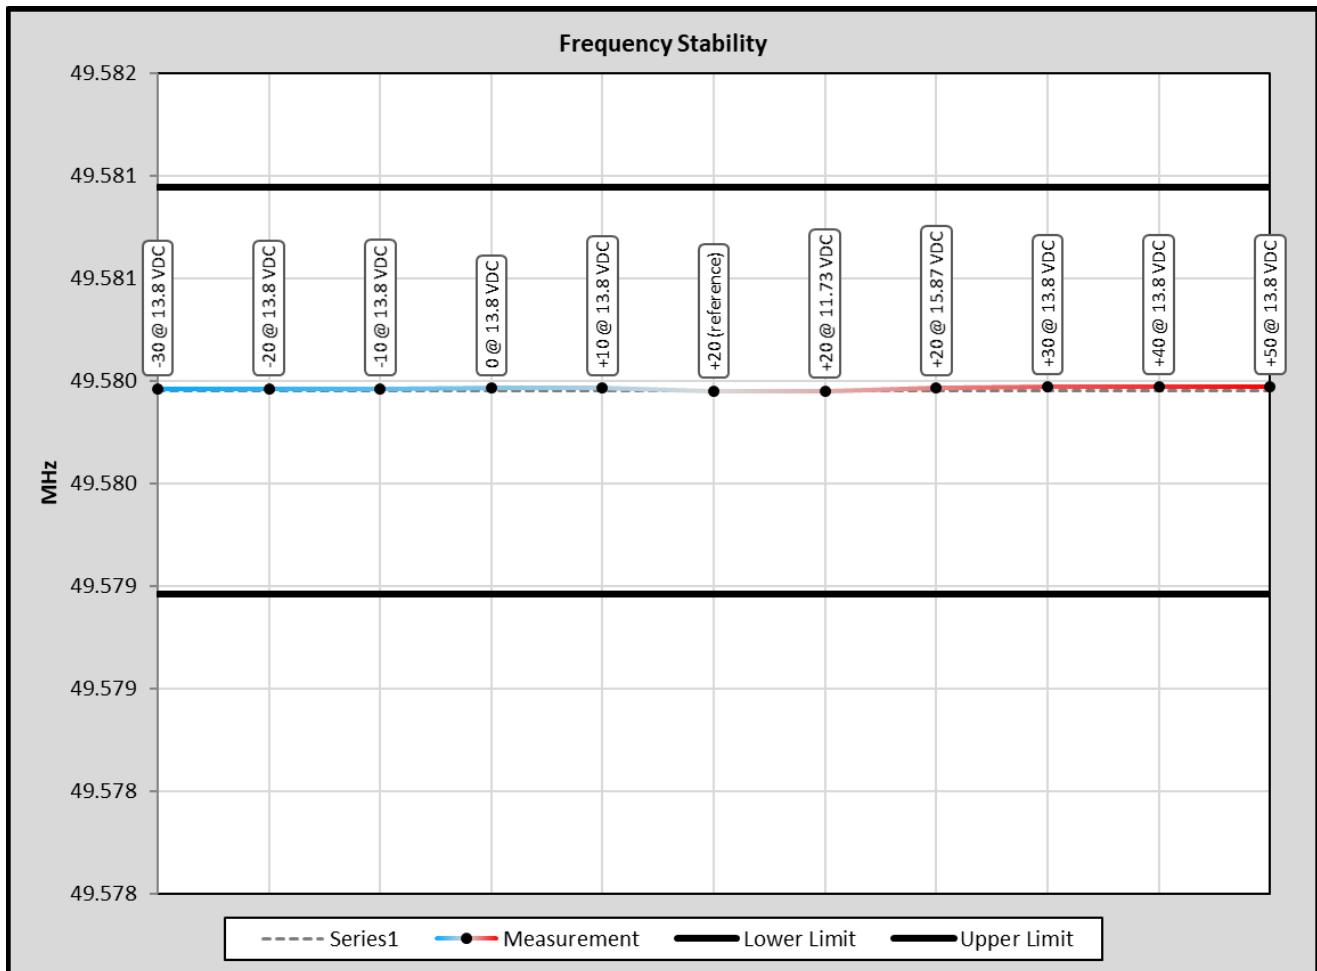

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

| Test Items | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| RF Frequency Accuracy | ± 49.5 Hz | (1) |
| RF Conducted Power | ±0.93dB | (1) |
| Conducted spurious emission of transmitter valid up to 40GHz | ±1.86dB | |
| Occupied Bandwidth | ±2.65% | |
| Audio Frequency Response | ±1.86dB | |
| Modulation limiting | ±1.88% | |
| Radiated RF Power | ±1.4dB | |
| Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq. | ±1.88% | |
| Within 6kHz and 25kHz of audio Freq. | ±2.04% | |
| Rad Emissions Sub Meth up to 26.5GHz | ±2.14dB | |
| Adjacent channel power | ±1.47dB | (1) |
| Transient Frequency Response | ±1.88% | |
| Temperature | ±1.0°C | (1) |
| Humidity | ±5.0% | |

Notes: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

EMC EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|--|--------------------|------------------------------|--|---------------|----------|
| CHAMBER | Panashield | 3M | N/A | 03/15/19 | 03/15/21 |
| Antenna: Active Loop | ETS-Lindgren | 6502 | 00062529 | 12/11/17 | 12/11/19 |
| Antenna: Biconical 1057 | Eaton | 94455-1 | 1057 | 12/13/17 | 12/13/19 |
| Antenna: Log-Periodic 1243 | Eaton | 96005 | 1243 | 04/20/18 | 04/20/21 |
| Coaxial Cable - Chamber 3 cable set (backup) | Micro-Coax | Chamber 3 cable set (backup) | KMKM-0244-02 KMKM-0670-01 KFKF-0197-00 | 02/27/19 | 02/27/21 |
| Software: Field Strength Program | Timco | N/A | Version 4.10.7.0 | N/A | N/A |
| EMI Test Receiver R & S ESU 40 | Rohde & Schwarz | ESU 40 | 100320 | 08/28/18 | 08/28/20 |
| Comb Generator | Com-Power Corp | CGO-515 | 291728 | NA | NA |
| Function Generator | Standford | DS340 | 25200 | 02/21/18 | 02/21/20 |
| Modulation Analyzer | HP | 8901A | 3050A05856 | 04/13/17 | 04/13/20 |
| Audio Analyzer | HP | 8903B | 3011A13084 | 02/20/18 | 02/20/20 |
| Audio Load | Heathkit | ID-5252 | 00714 | NA | NA |
| DC Power Supply | HP | 6286A | 1744A03842 | NA | NA |
| Digital Multimeter | Fluke | 77 | 35053830 | 11/06/17 | 11/06/19 |
| Temperature Chamber LARGE | Tenney Engineering | TTRC | 11717-7 | NA | NA |
| Type K J Thermometer | Martel | 303 | 080504494 | 11/06/17 | 11/06/19 |
| Frequency Counter Small Chamber | HP | 5385A | 3242A07460 | 08/22/17 | 08/22/19 |
| DC Power Supply | HP | 6264B | 2032A04119 | NA | NA |
| Attenuator N 30dB 100W DC-6G | Pasternack | PE7214-30 | #109 | 04/15/19 | 04/15/21 |
| Tunable Notch Filter 30-75 MHz | Eagle | TNF-200 | 30-75 MHz (#18) | 11/19/17 | 11/19/19 |
| Coaxial Cable - BMBM-0122-01 RG400 | Pasternack | PE3582LF-48 | BMBM-0122-01 | 04/15/19 | 04/15/21 |
| Coaxial Cable - BMBM-0122-02 RG400 | Pasternack | PE3582LF-48 | BMBM-0122-02 | 04/15/19 | 04/15/21 |
| Coaxial Cable - BMBM-0122-03 RG400 | Pasternack | PE3582LF-48 | BMBM-0122-03 | 04/15/19 | 04/15/21 |
| Coaxial Cable - BMBM-0122-04 RG400 | Pasternack | PE3582LF-48 | BMBM-0122-04 | 04/15/19 | 04/15/21 |

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT