

# TEST REPORT FOR RF TESTING

---

Report No.: SRTC2019-9004(F)-19052401(E)

Product Name: Automatic Cleaning Machine

Product Model: A00000101A01

Applicant: SoftBank Robotics Corp.

Manufacturer: SoftBank Robotics Corp.

Specification: FCC Part 15, Subpart C (2019)

FCC ID: 2ATI9- A00000101A01

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>2</b>
1.1 NOTES OF THE TEST REPORT .....	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY .....	2
1.3 APPLICANT’S DETAILS .....	2
1.4 MANUFACTURER’S DETAILS .....	2
1.5 TEST ENVIRONMENT .....	3
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST .....</b>	<b>4</b>
2.1 FINAL EQUIPMENT BUILD STATUS .....	4
2.2 DESCRIPTION OF TEST MODES .....	5
2.3 DUTY CYCLE OF TEST SIGNAL .....	5
2.4 EUT OPERATING CONDITIONS .....	6
2.5 SUPPORT EQUIPMENT .....	6
<b>3 REFERENCE SPECIFICATION .....</b>	<b>7</b>
<b>4 KEY TO NOTES AND RESULT CODES .....</b>	<b>7</b>
<b>5 RESULT SUMMARY .....</b>	<b>8</b>
<b>6 TEST RESULT .....</b>	<b>9</b>
6.1 OCCUPIED BANDWIDTH .....	9
6.2 PEAK POWER OUTPUT .....	10
6.3 TRANSMITTER POWER SPECTRAL DENSITY .....	11
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .....	12
6.5 BAND-EDGE MEASUREMENT .....	13
6.6 SPURIOUS RADIATED EMISSIONS .....	14
6.7 AC POWER LINE CONDUCTED EMISSION .....	19
<b>7 MEASUREMENT UNCERTAINTIES .....</b>	<b>21</b>
<b>8 TEST EQUIPMENTS .....</b>	<b>22</b>
<b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....</b>	<b>23</b>
<b>APPENDIX B – TEST DATA OF RADIATED EMISSION .....</b>	<b>27</b>

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiuf@srtc.org.cn

### **1.3 Applicant's details**

Company:	SoftBank Robotics Corp.
Address:	1-9-2 Higashi-shimbashi, Minato-ku, Tokyo
City:	Tokyo
Country or Region:	Japan
Contacted person:	Huijun Wang
Tel:	+81-3-6889-2450
Fax:	---
Email:	huijun.wang@g.softbank.co.jp

### **1.4 Manufacturer's details**

Company:	SoftBank Robotics Corp.
Address:	1-9-2 Higashi-shimbashi, Minato-ku, Tokyo
City:	Tokyo
Country or Region:	Japan
Contacted person:	Huijun Wang
Tel:	+81-3-6889-2450
Fax:	---
Email:	huijun.wang@g.softbank.co.jp

### 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2019-05-24
Testing Start Date:	2019-05-24
Testing End Date:	2019-09-05

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30

Normal Supply Voltage (V d.c.):	25.2
---------------------------------	------

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Frequency Range	902~928MHz
Number of Channel	51
Modulation Type	LoRaTM
Power Supply	Battery/Charger
HW Version	V 1.0.0
SW Version	V 1.0.X
SN	Sample1: 1#
Antenna type	Refer to Note
Antenna connector	Refer to Note

**Note:**

The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connecter Type
N/A	N/A	2.15dBi	902MHz~928MHz	Spring antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance.

## 2.2 Description of Test Modes

51 channels are provided to this EUT:


CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	902.5	15	909.5	29	916.5	43	923.5
2	903.0	16	910.0	30	917.0	44	924.0
3	903.5	17	910.5	31	917.5	45	924.5
4	904.0	18	911.0	32	918.0	46	925.0
5	904.5	19	911.5	33	918.5	47	925.5
6	905.0	20	912.0	34	919.0	48	926.0
7	905.5	21	912.5	35	919.5	49	926.5
8	906.0	22	913.0	36	920.0	50	927.0
9	906.5	23	913.5	37	920.5	51	927.5
10	907.0	24	914.0	38	921.0		
11	907.5	25	914.5	39	921.5		
12	908.0	26	915.0	40	922.0		
13	908.5	27	915.5	41	922.5		
14	909.0	28	916.0	42	923.0		

## 2.3 Duty Cycle of Test Signal

Duty cycle of test signal is <98 %, duty factor shall be considered.

Duty cycle = 1.44%

Note: We tested at 100% duty cycle.

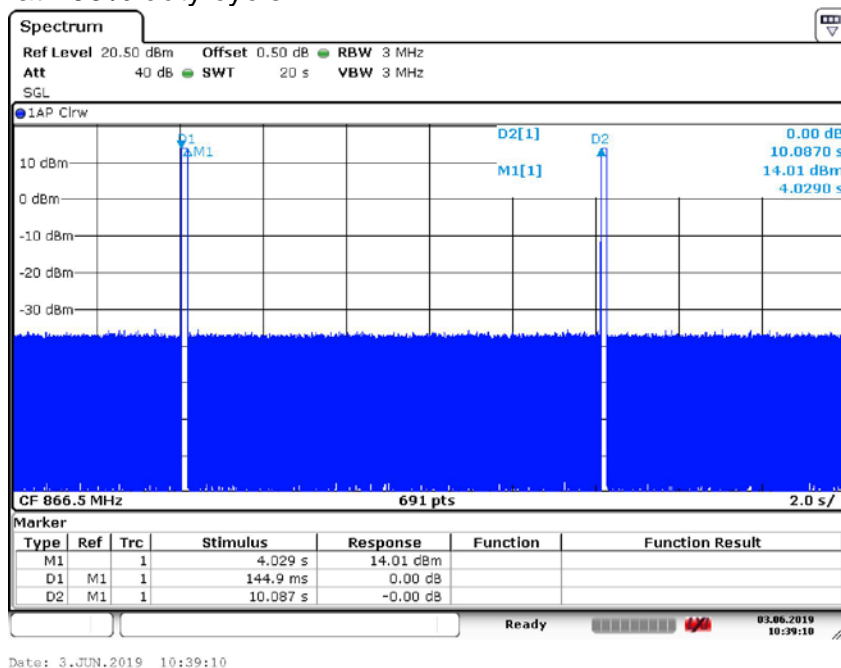

## 2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery1
Manufacturer	TOCAD ENERGY Co., Ltd.
Model Number	P00000201A01
Serial Number	---

Equipment	Battery2
Manufacturer	TOCAD ENERGY Co., Ltd.
Model Number	10BK150AA
Serial Number	---

### **3 REFERENCE SPECIFICATION**

Specification	Version	Title
15.35	2019	Measurement detector functions and bandwidths.
15.209	2019	Radiated emission limits; general requirements.
15.247	2019	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz.
15.203	2019	Antenna requirement
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05r02	April 2, 2019	GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247




### **4 KEY TO NOTES AND RESULT CODES**

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.
NTC	Nominal voltage, Normal Temperature
HV	High voltage, Normal Temperature
LV	Low voltage, Normal Temperature
HTHV	high voltage, High Temperature
LTHV	High voltage, Low Temperature
HTLV	Low voltage, High Temperature
LTLV	Low voltage, Low Temperature



## 5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Occupied Bandwidth	15.247(a)(2)	Pass
2	Peak Power Output	15.247(b)(3) )	Pass
3	Transmitter Power Spectral Density	15.247(e) )	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band-edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
7	AC Power line Conducted Emission	15.207	NT
8	Antenna requirement	15.203	Pass ( refer to section 2.1 )

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date:  20190905

## **6 TEST RESULT**

### **6.1 Occupied Bandwidth**

#### **6.1.1 Ambient condition**

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

#### **6.1.2 Test Description**

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss. Which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **6.1.3 Test limit**

Part15.247 (a)(2)

The minimum permissible 6dB bandwidth is 500 kHz

#### **6.1.4 Test Procedure Used**


KDB 558074 D01 DTS Meas Guidance v05r02–Section 8.1 Option 1

#### **6.1.5 Test Settings**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **6.1.6 Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



#### **6.1.7 Test result**

The test results are shown in Appendix A .

## 6.2 Peak Power Output

### 6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.2.2 Test Description

The transmitter antenna terminal of the EUT is connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

### 6.2.3 Test limit

Part15.247(b)(3)

The maximum permissible conducted output power is 1 Watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30.0 dBm

### 6.2.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v05r02 – Section 9.1.3

### 6.2.5 Test Settings

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 6.2.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.2.7 Test result

The test results are shown in Appendix A .

## 6.3 Transmitter Power Spectral Density

### 6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.3.2 Test Description

The peak power density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss connected to the antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies.

### 6.3.3 Test limit

Part15.247(e)

The maximum permissible power spectral density is 8.0 dBm in any 3 kHz band.

### 6.3.4 Test Procedure Used


KDB 558074 D01 DTS Meas Guidance v05r02 Section 10.2.

### 6.3.5 Test Settings

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.3.7 Test result

The test results are shown in Appendix A.

## 6.4 Conducted Out of band emission measurement

### 6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.4.2 Test Description

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

### 6.4.3 Test limit

Part 15.247(d) The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.4.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02 Section 11.3,11.2

### 6.4.5 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  MHz
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$ kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

### 6.4.6 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW  $\geq 300$ kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

### 6.4.8 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.4.9 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A .

## 6.5 Band-edge measurement

### 6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.5.2 Test Description

For the following out of band conducted spurious emissions plots, the EUT was set to transmit at maximum power with the largest packet size available. The worst case spurious emissions were found in this configuration.

### 6.5.3 Test limit

Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.5.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02 Section 11.2

### 6.5.5 Reference level measurement Settings

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to  $\geq 1.5$  MHz
- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$ kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.


### 6.5.6 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100kHz.
- Set the VBW  $\geq 300$ kHz.
- Detector = peak.

- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

### 6.5.8 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



### 6.5.9 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A .

## 6.6 Spurious Radiated Emissions

### 6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section. The measurements shall be repeated with orthogonal polarization of the test antenna. The results shall be showed the worst case of the three orthogonal axes of EUT.

### 6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.

Frequency [MHz]	Field strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**Radiated Limits**

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

**Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)**

Frequency [MHz]	Detector	Unit (dB $\mu$ V/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

**Conversion Radiated limits**

### 6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02 – Section 12.2.7

#### For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.



- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### **For the radiated emission test above 1GHz:**

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### **6.6.5 Test Settings**

##### **Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = average
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

### Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.6.6 Test Setup


#### For Radiated emission below 30MHz

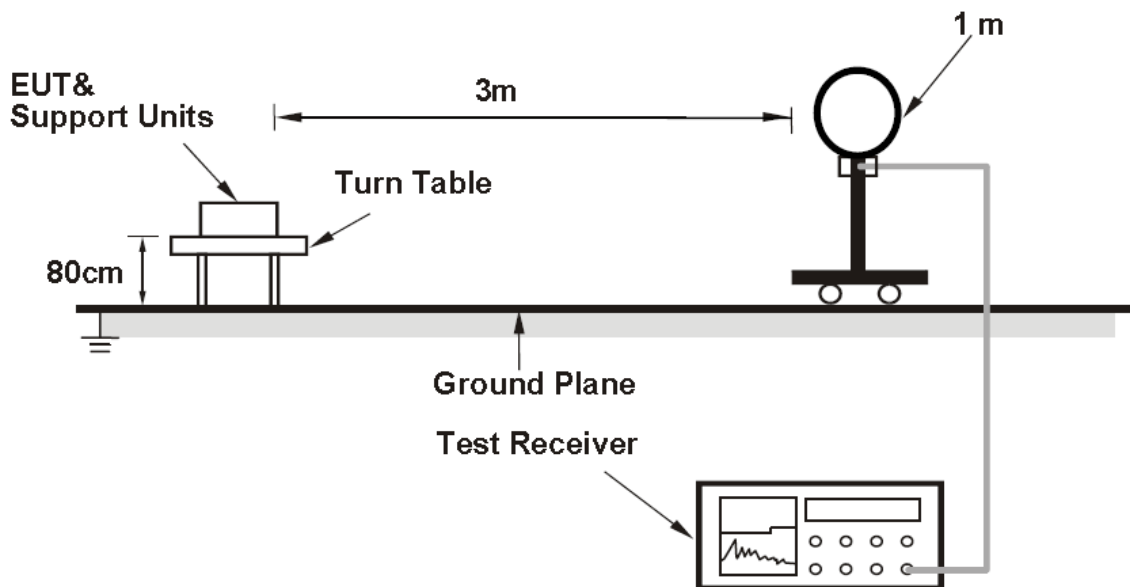

**For Radiated emission 30MHz to 1GHz**

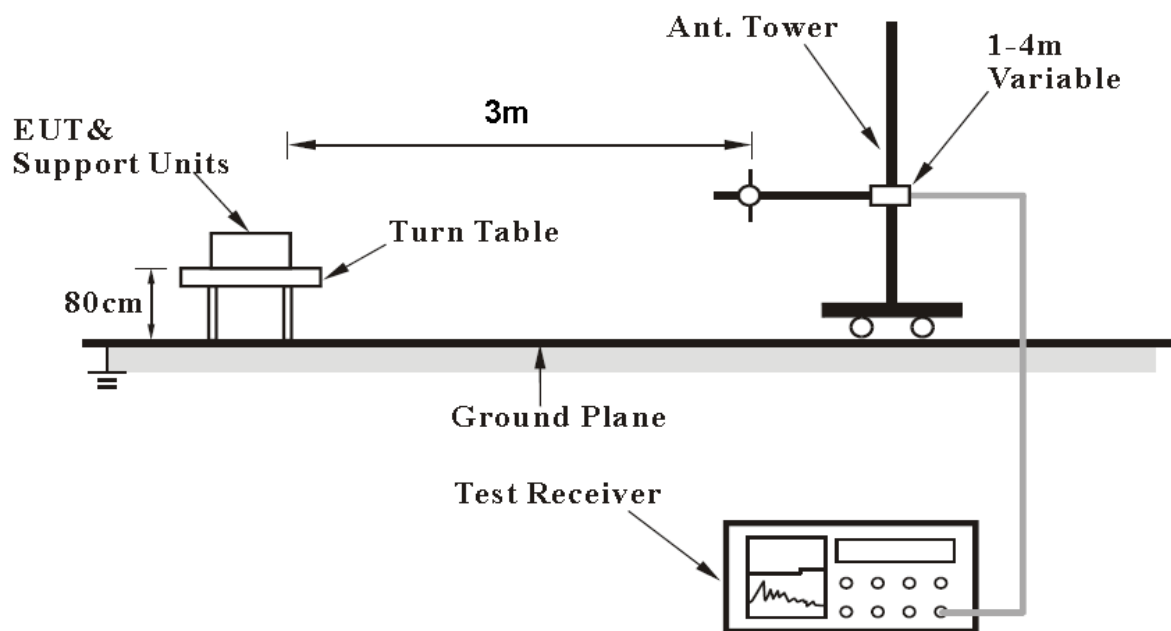

**For Radiated emission above 1GHz**

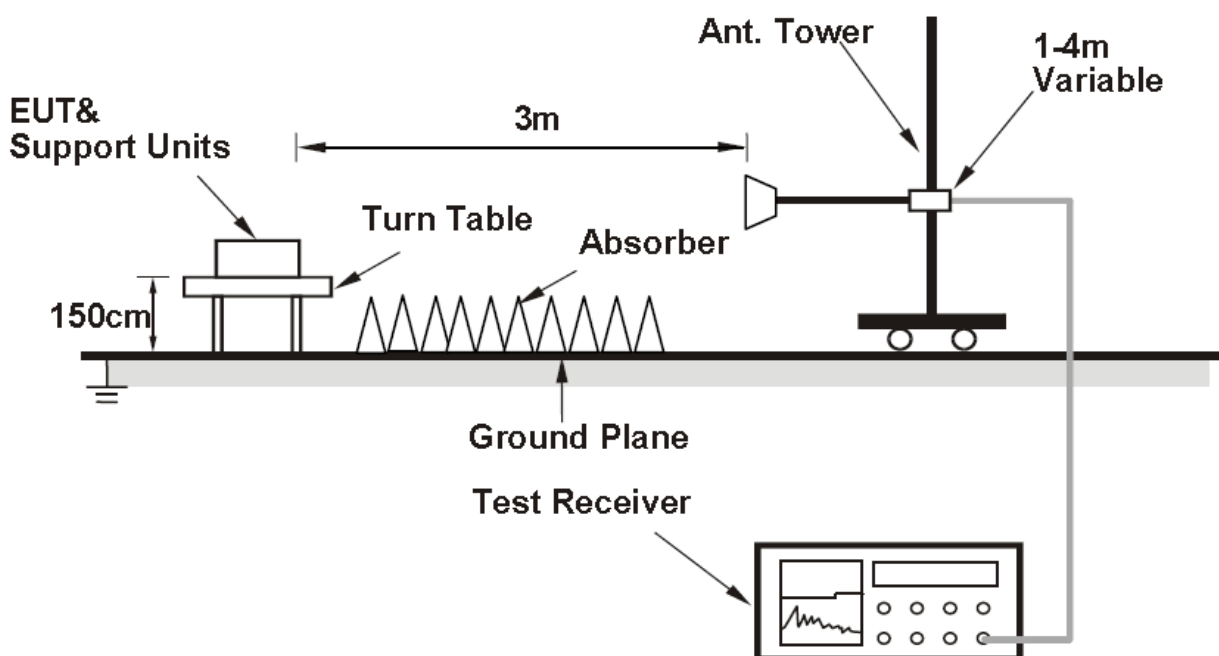

**6.6.7 Test result**

The test results are shown in Appendix B.

## 6.7 AC Power line Conducted Emission

### 6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

### 6.7.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

### 6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

### 6.7.4 Test Setup

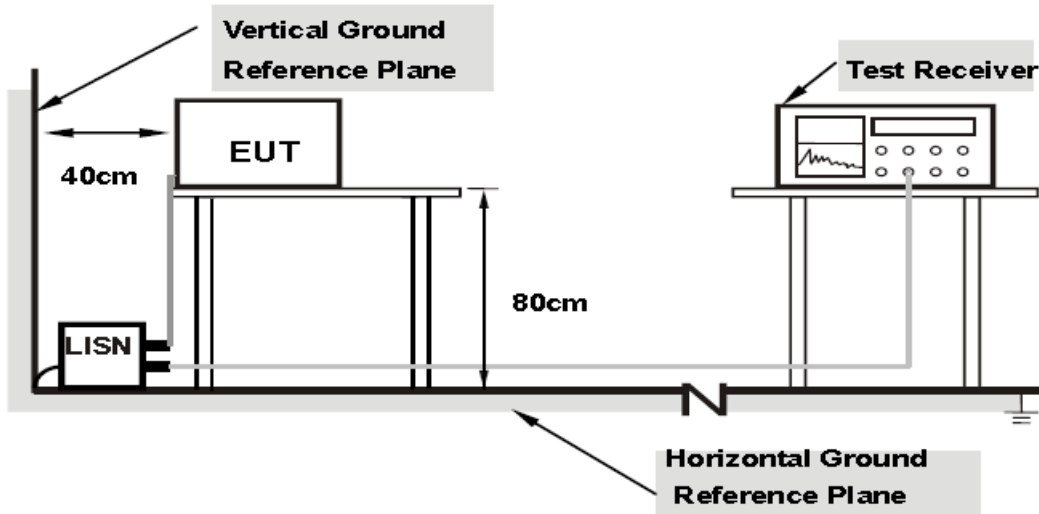

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.5 Test result

The test results are shown in Appendix B.

## **7 MEASUREMENT UNCERTAINTIES**

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

## **8 TEST EQUIPMENTS**


No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer N9020A	Agilent	MY48010771	2019.08.20	2020.08.19
2.	Power Meter E4416A	Agilent	MY52370013	2019.03.01	2020.02.28
3.	Power Sensor E9327A	Agilent	MY52420006	2019.03.01	2020.02.28
4.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
5.	Turn table Diameter:5m	FRANKONIA	----	----	----
6.	Antenna master SAC(MA4.0)	MATURO	----	----	----
7.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
8.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2019.08.20	2020.08.19
9.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2019.08.20	2020.08.19
10.	ESI 40 EMI test receiver	R&S	100015	2019.08.20	2020.08.19
11.	ESCS30 EMI test receiver	R&S	100029	2019.08.20	2020.08.19
12.	HL562 Receive antenna	R&S	100167	2019.08.20	2020.08.19
13.	ENV216 AMN	R&S	3560.6550.12	2019.08.20	2020.08.19

## APPENDIX A – TEST DATA OF CONDUCTED EMISSION

### Occupied Bandwidth

Offset 0.5dB = Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(kHz)	99% bandwidth(kHz)
902.5	Low	771.7	811.62
915.0	Middle	763.0	789.01
927.5	High	768.0	796.06

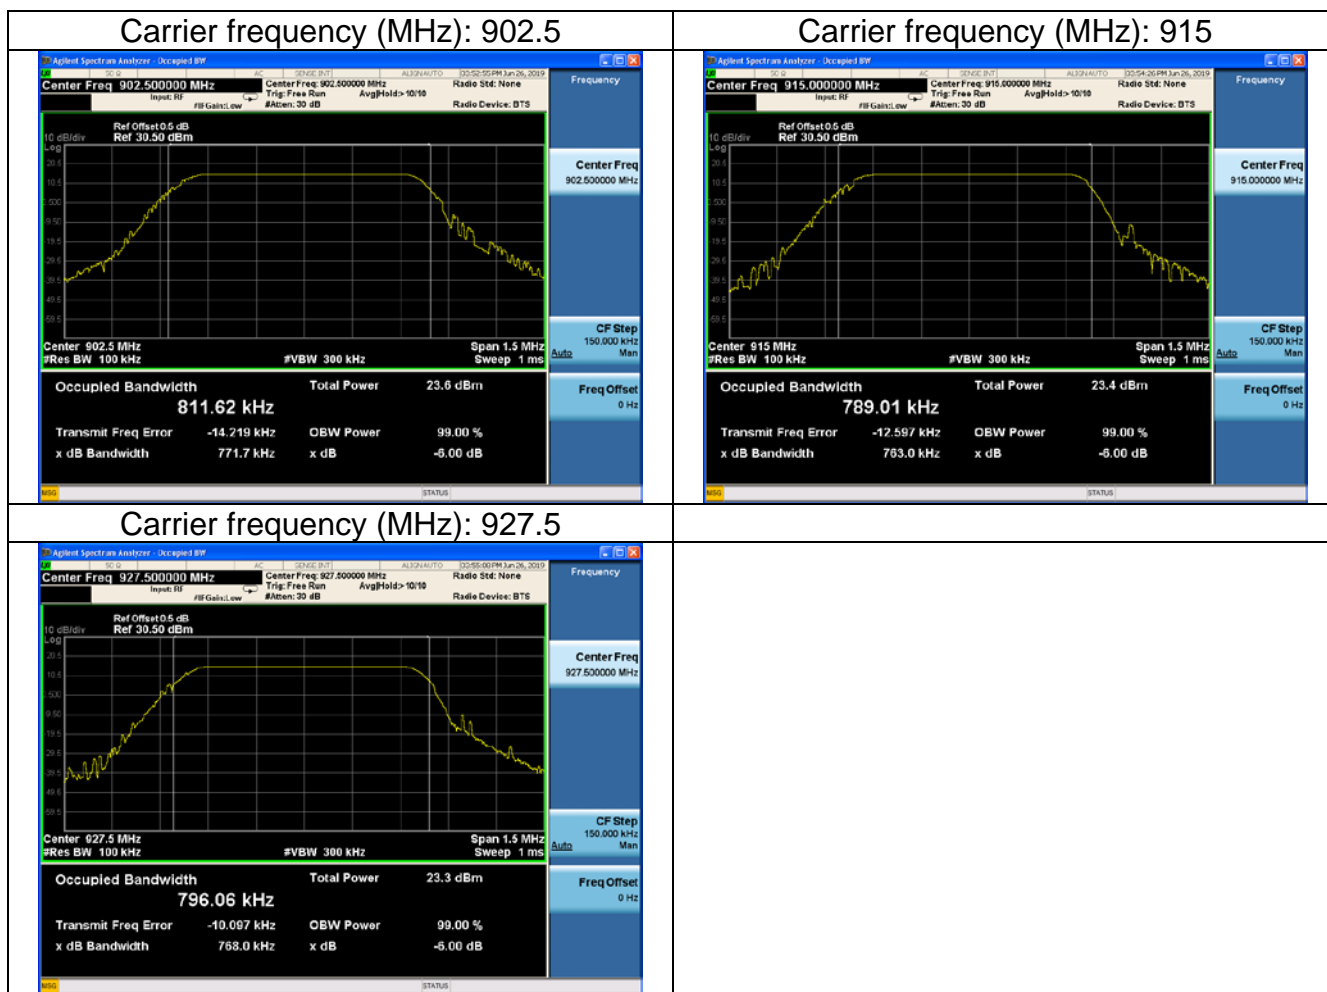

### Peak Power Output

Modulation type	902.5MHz	915.0MHz	927.5MHz
Peak Power Output (dBm)	15.35	15.34	15.27


Modulation type	902.5MHz	915.0MHz	927.5MHz
Average Power Output (dBm)	15.35	15.34	15.27



### Transmitter Power Spectral Density

Offset 0.5dB = Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB


Carrier frequency (MHz)	Channel No.	Power Density( dBm/3kHz)
902.5	Low	-2.827
915.0	Middle	-2.078
927.5	High	-2.821

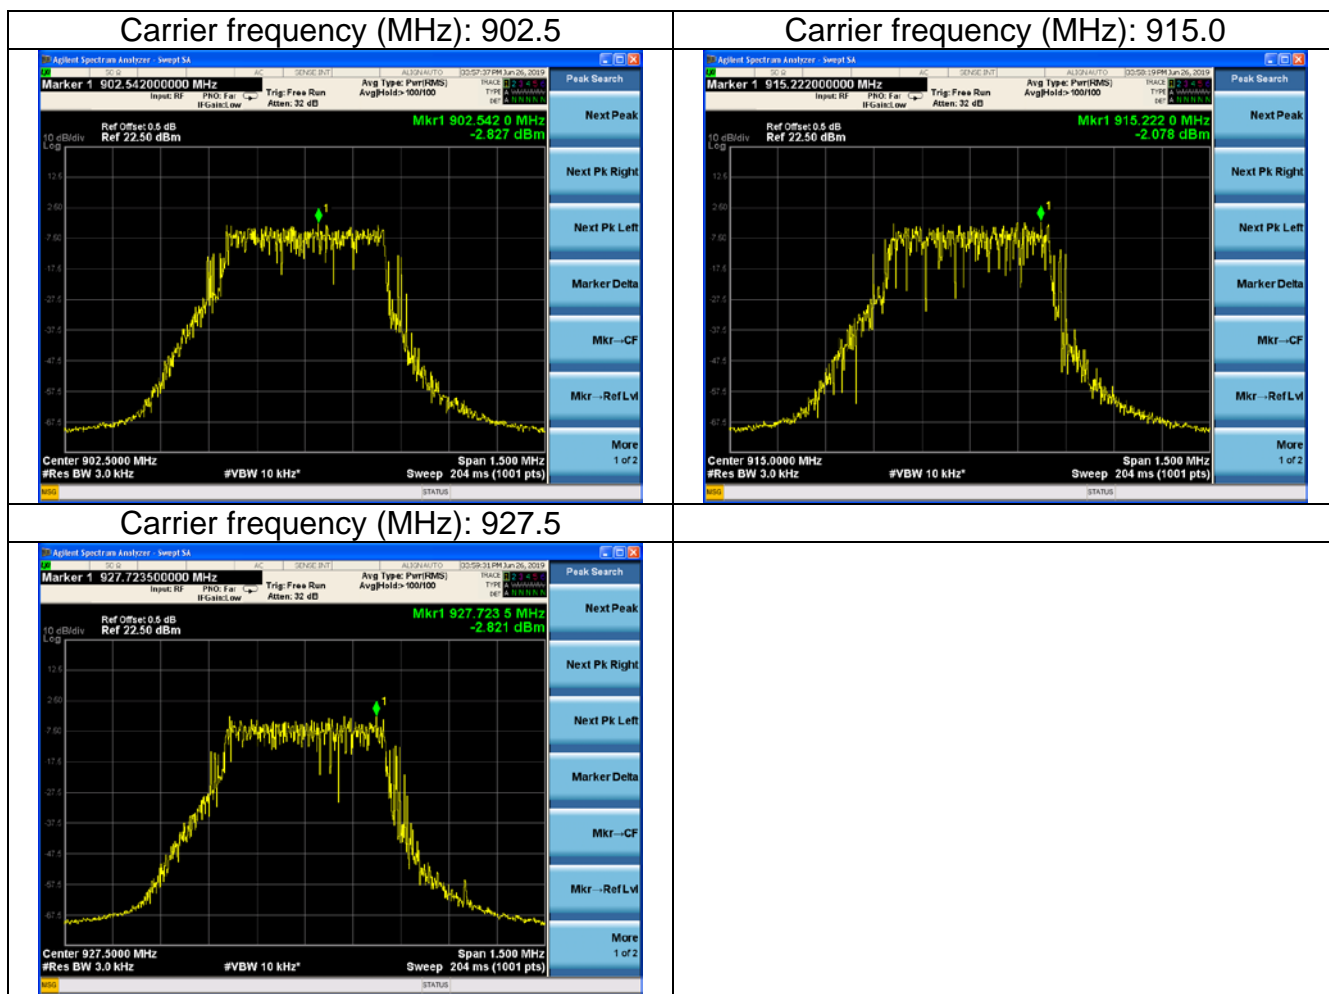


**Conducted Out of band emission measurement**

Offset 0.5dB = Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB


Carrier frequency (MHz): 902.5

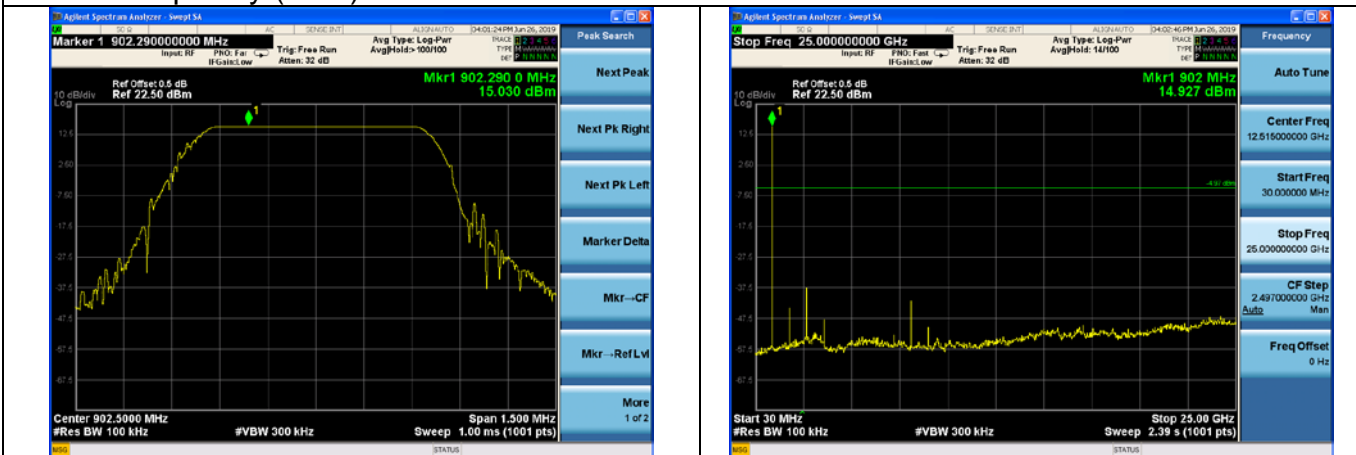

Carrier frequency (MHz): 915.0

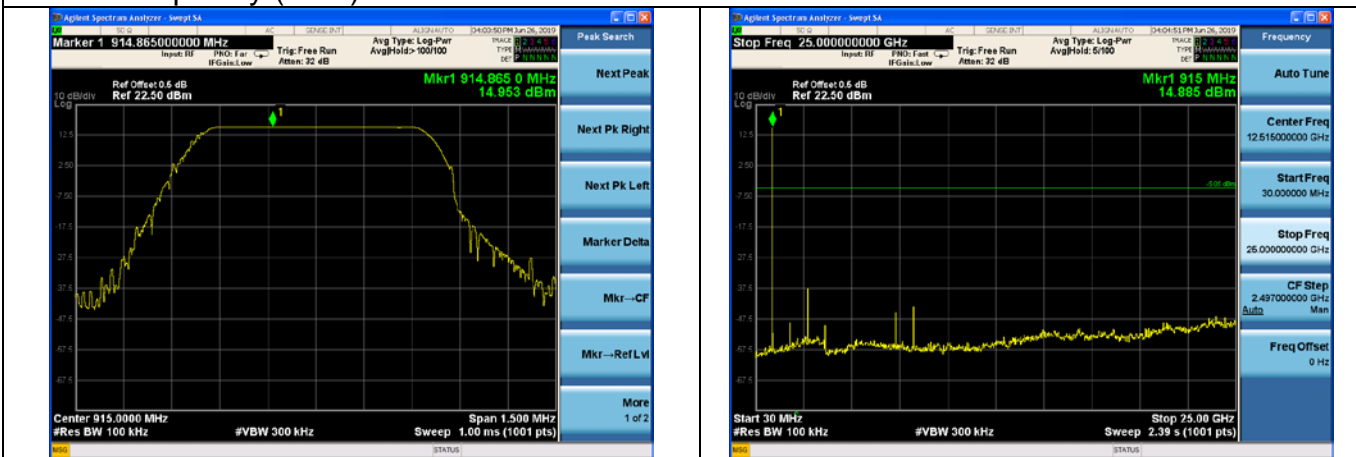

Carrier frequency (MHz): 927.5

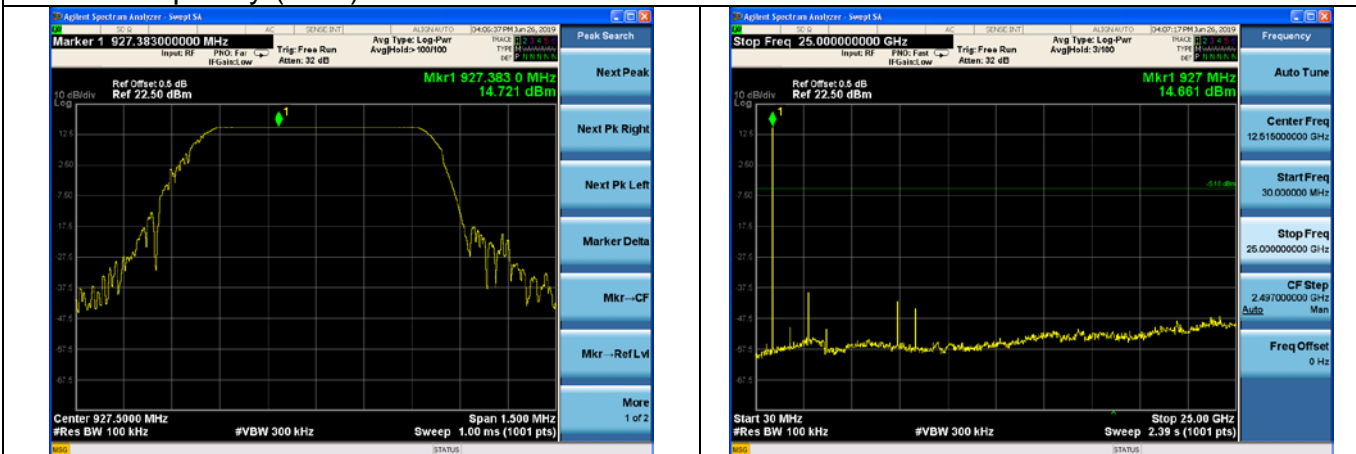


**Band edge measurement (RF Conducted measurement)**

Offset 0.5dB = Temporary antenna connector loss 0.2dB+ Cable loss 0.3dB

Carrier frequency (MHz): 902.5



Carrier frequency (MHz): 927.5

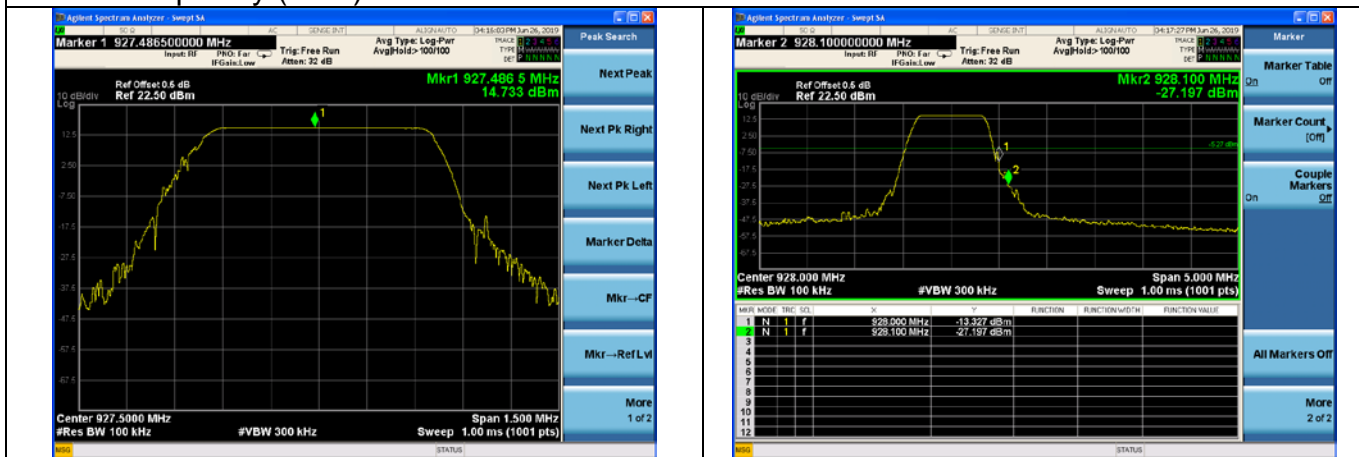

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Emission Band Edge**

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (96.84dBuV/m) = (68.34dB $\mu$ V) + (6.40dB) + (22.10dB), the corresponding frequency is 902.5MHz.

Carrier frequency (MHz): 902.5

Polarity: Vertical

Detector: quasi-peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	902.5	96.84	68.34	N/A	N/A	6.40	22.10
2	902	32.17	3.67	-13.83	46.00	6.40	22.10

Carrier frequency (MHz): 902.5

Polarity: Horizontal

Detector: quasi-peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	902.5	94.18	65.68	N/A	N/A	6.40	22.10
2	902	32.36	3.86	-13.64	46.00	6.40	22.10

Carrier frequency (MHz): 927.5

Polarity: Vertical

Detector: quasi-peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	927.5	97.39	68.89	N/A	N/A	6.40	22.10
2	928	28.58	0.08	-17.42	46.00	6.40	22.10

Carrier frequency (MHz): 927.5

Polarity: Horizontal

Detector: quasi-peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	927.5	94.57	66.07	N/A	N/A	6.40	22.10
2	928	27.88	-0.62	-18.12	46.00	6.40	22.10

### Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result=  $P_{mea} + A_{Rpl}$

Sample calculation:  $(21.77 \text{ dB}\mu\text{V/m}) = (31.07 \text{ dB}\mu\text{V}) + (-9.3 \text{ dB/m})$ , the corresponding frequency is 499.985000MHz.

For transmit mode: 902.5MHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
499.985000	21.77	-9.3	31.07	Vertical	46.00
590.488500	13.28	-6.9	20.18	Vertical	46.00
595.538500	13.48	-6.7	20.18	Vertical	46.00
600.000500	18.19	-6.6	24.79	Vertical	46.00
604.214000	13.27	-6.6	19.87	Vertical	46.00
640.980500	13.56	-6.1	19.66	Vertical	46.00

For transmit mode: 915MHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
211.672000	5.57	-18.0	23.57	Vertical	43.50
499.993500	21.83	-9.3	31.13	Vertical	46.00
546.956000	12.86	-8.0	20.86	Vertical	46.00
600.000500	18.16	-6.6	24.76	Vertical	46.00
623.825000	13.37	-6.4	19.77	Vertical	46.00
640.010500	14.99	-6.2	21.19	Vertical	46.00

For transmit mode: 927.5MHz


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
499.985000	21.78	-9.3	31.08	Vertical	46.00
570.344000	12.98	-7.4	20.38	Vertical	46.00
577.859000	13.29	-7.2	20.49	Vertical	46.00
597.221500	13.35	-6.7	20.05	Vertical	46.00
599.992000	18.26	-6.6	24.86	Vertical	46.00
602.220500	13.42	-6.6	20.02	Vertical	46.00

For receive mode

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
65.701500	19.40	-20.3	39.7	Vertical	40.00
69.801000	19.47	-21.6	41.07	Vertical	40.00
82.731000	24.22	-23.0	47.22	Vertical	40.00
82.996500	24.25	-22.9	47.15	Vertical	40.00
83.070500	24.33	-22.9	47.23	Vertical	40.00
83.535000	24.07	-22.7	46.77	Vertical	40.00

Carrier frequency (MHz): 902.5


Full Spectrum

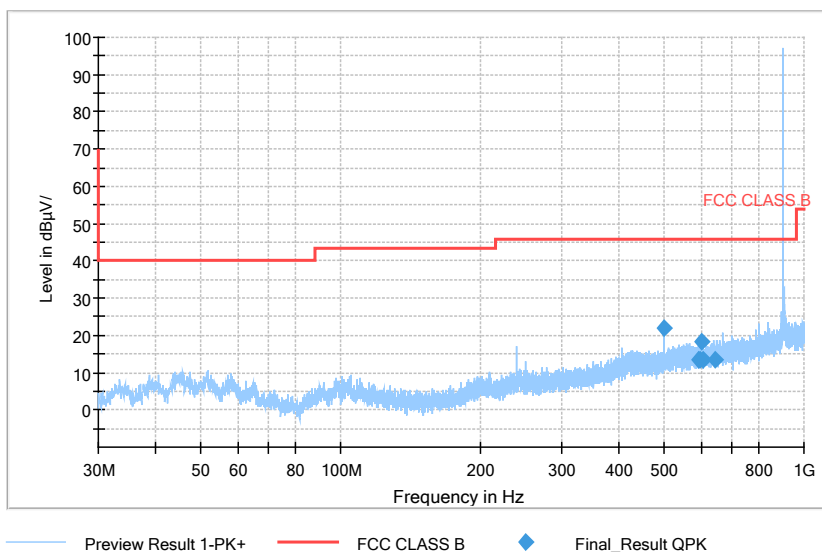

Comment

Frequency Range: 30MHz -1GHz  
Detector: QP mode


Full Spectrum

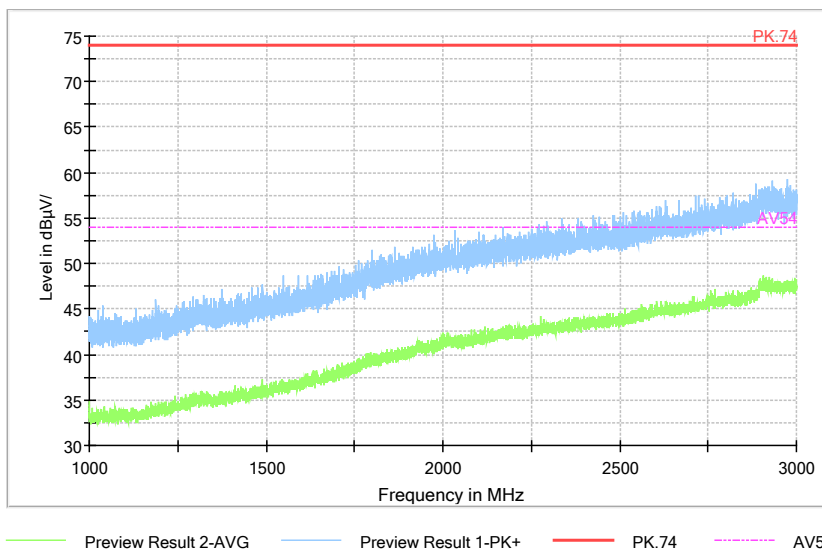

Comment

Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode

Full Spectrum

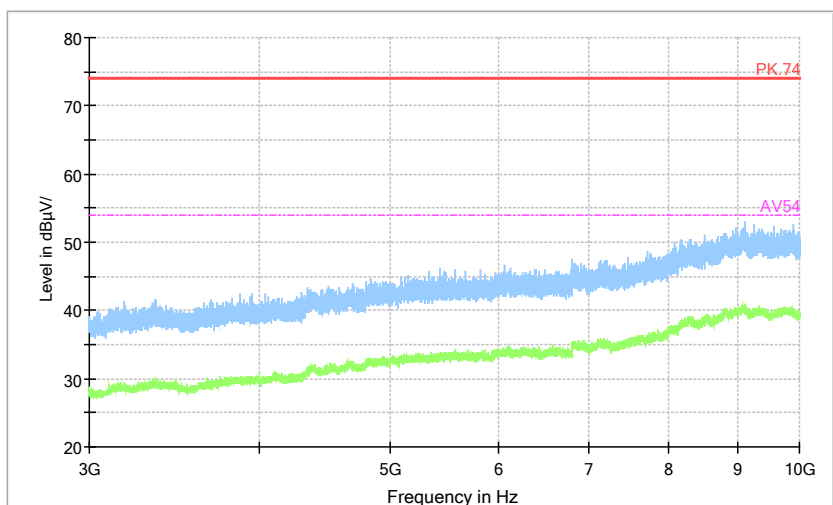


Preview Result 2-AVG    Preview Result 1-PK+    PK.74    AV54

Comment

Frequency Range: 3GHz -10GHz  
Detector: AV mode and PK mode

Carrier frequency (MHz): 915

Full Spectrum

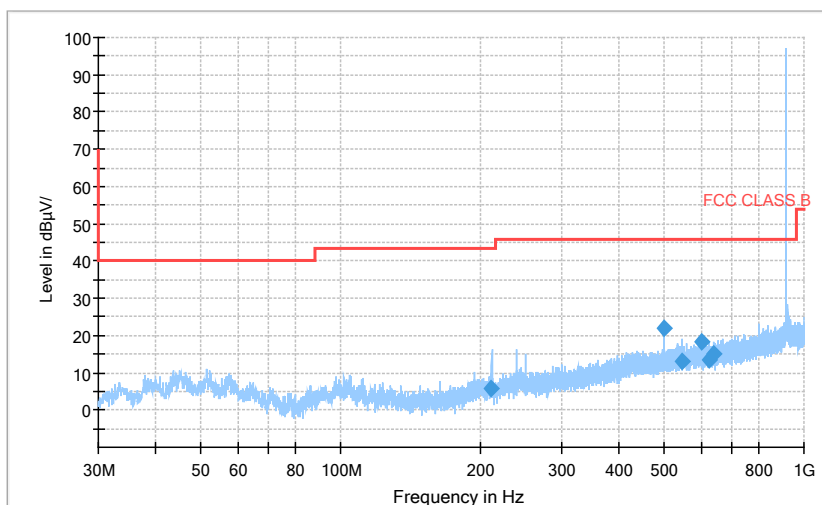


Preview Result 1-PK+    FCC CLASS B    Final\_Result QPK

Comment

Frequency Range: 30MHz -1GHz  
Detector: QP mode


Full Spectrum

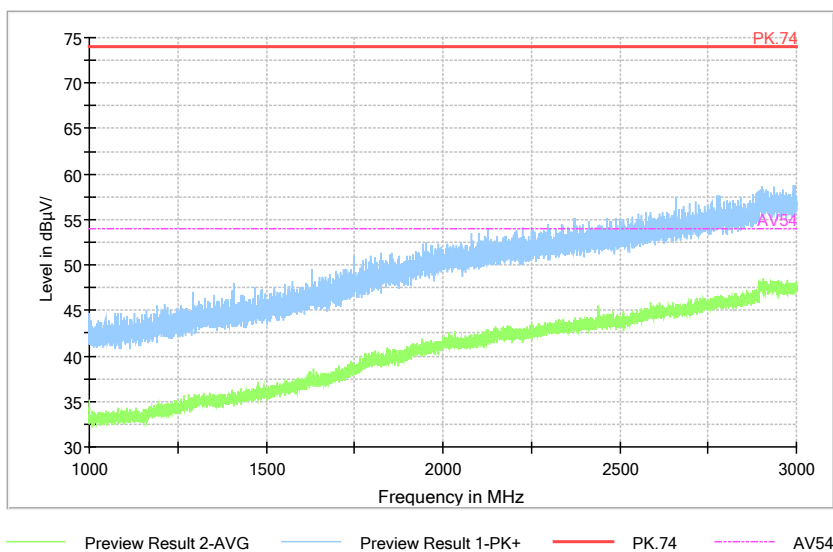

Comment

Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode

Full Spectrum

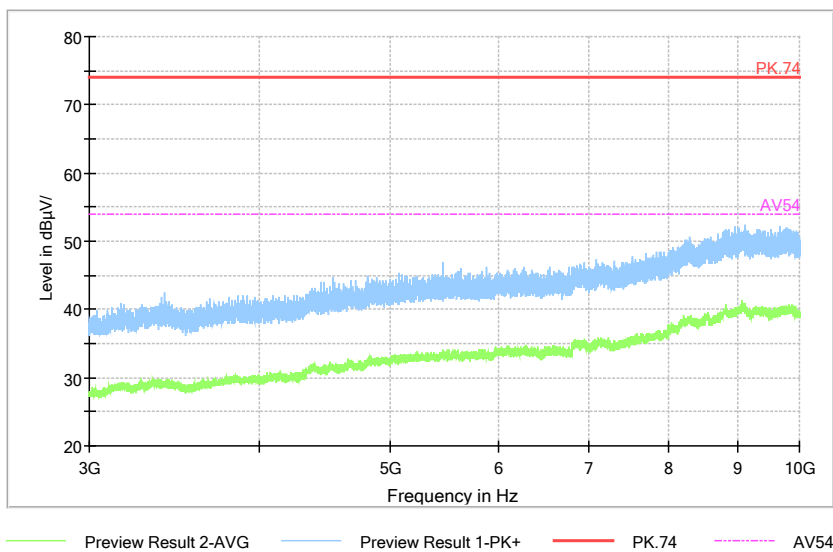


Comment

Frequency Range: 3GHz -10GHz  
Detector: AV mode and PK mode



Carrier frequency (MHz): 927.5


Full Spectrum

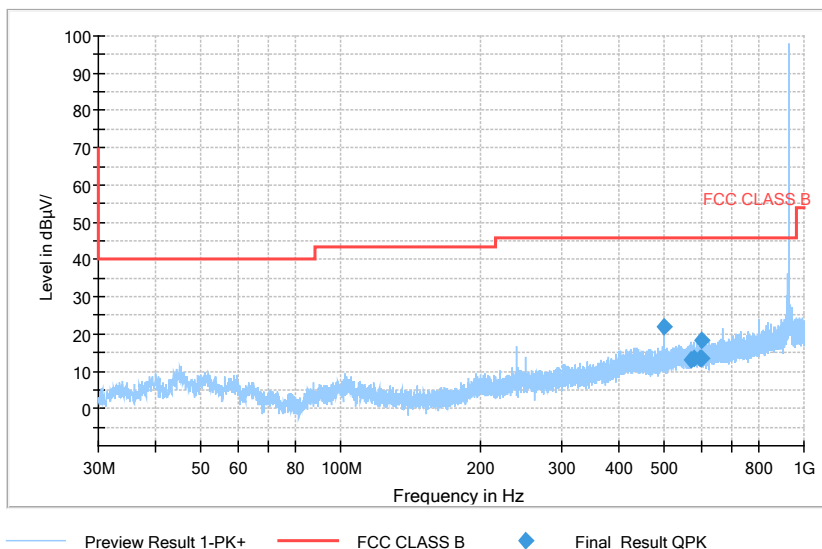

Comment

Frequency Range: 30MHz -1GHz  
Detector: QP mode


Full Spectrum

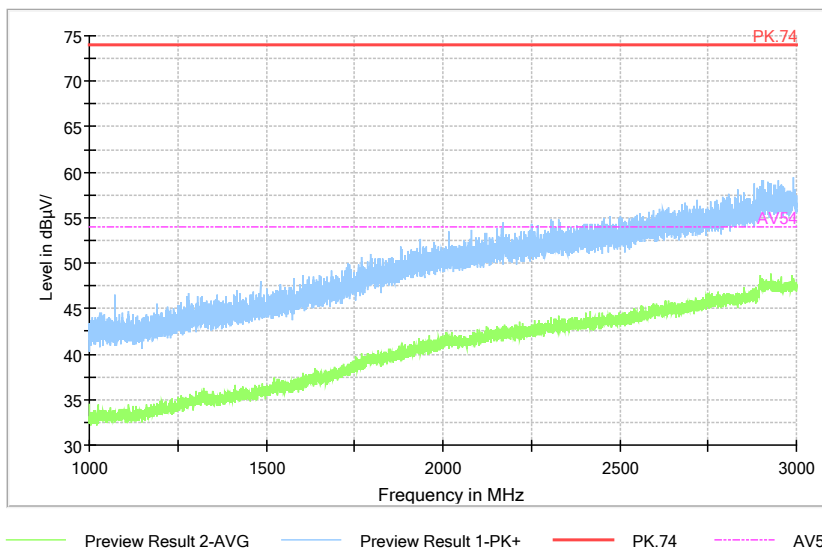

Comment

Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode

Full Spectrum

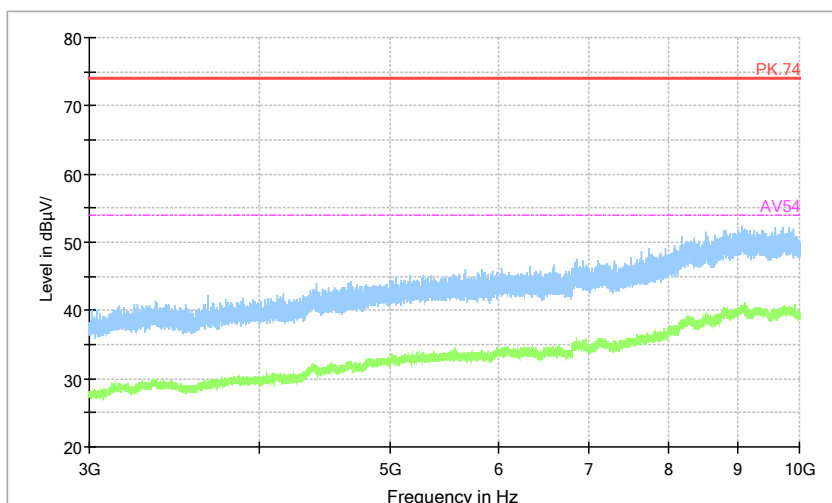


Preview Result 2-AVG    Preview Result 1-PK+    PK.74    AV54

Comment

Frequency Range: 3GHz -10GHz  
Detector: AV mode and PK mode

For receive mode:

Full Spectrum

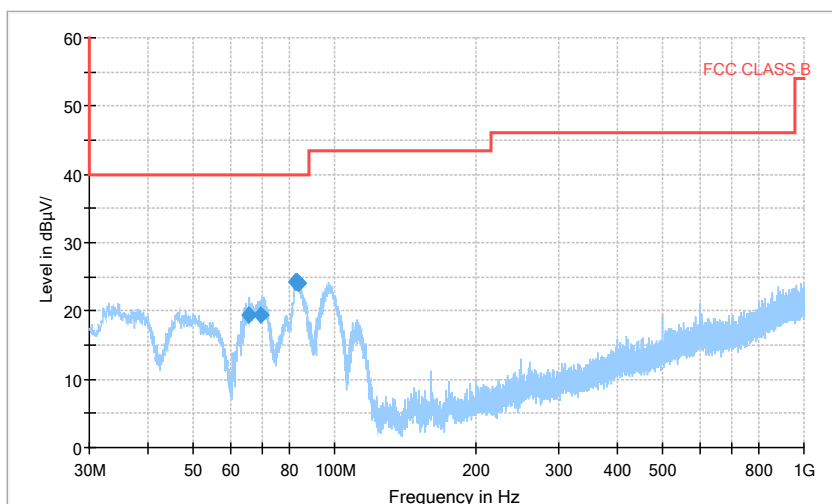


Preview Result 1-PK+    FCC CLASS B    Final\_Result QPK

Comment

Frequency Range: 30MHz -1GHz  
Detector: QP mode

Full Spectrum

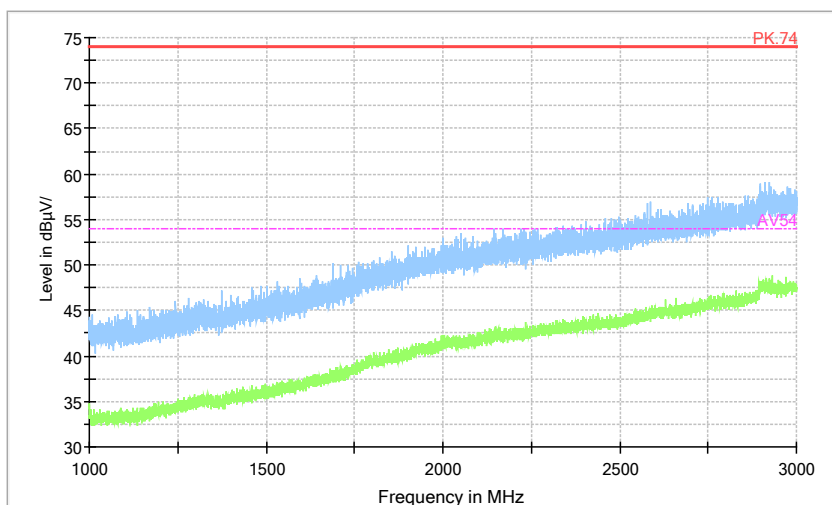


Preview Result 2-AVG    Preview Result 1-PK+    PK.74    AV54

Comment

Frequency Range: 1GHz -3GHz  
Detector: AV mode and PK mode

Full Spectrum

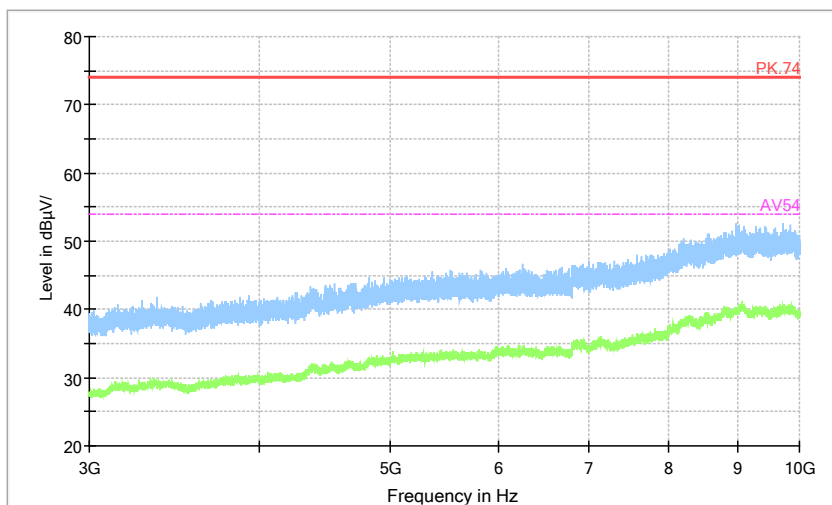

Preview Result 2-AVG    Preview Result 1-PK+    PK.74    AV54

Comment

Frequency Range: 3GHz -10GHz  
Detector: AV mode and PK mode

---End of Test Report---