

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Report No.:** RFBDKX-WTW-P23090081-4  
**FCC ID:** 2ATIO5  
**Product:** Home IOT Gateway  
**Brand:** Level  
**Model No.:** H5  
**Series Model:** H2  
**Received Date:** 2023/9/5  
**Test Date:** 2023/9/13 ~ 2023/11/29  
**Issued Date:** 2023/12/8

**Applicant:** Level Home Inc.  
**Address:** 935 Main Street, Redwood City, California 94063, United States of America  
**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories  
**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
**Test Location:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /** 198487 / TW2021  
**Designation Number:**

**Approved by:** Jeremy Lin, **Date:** 2023/12/8  
Jeremy Lin / Project Engineer

This test report consists of 38 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	9
3.3 Channel List .....	9
3.4 Test Mode Applicability and Tested Channel Detail .....	10
3.5 Duty Cycle of Test Signal .....	10
3.6 Test Program Used and Operation Descriptions .....	11
3.7 Connection Diagram of EUT and Peripheral Devices .....	11
3.8 Configuration of Peripheral Devices and Cable Connections .....	11
<b>4 Test Instruments</b> .....	<b>12</b>
4.1 RF Output Power .....	12
4.2 Power Spectral Density .....	12
4.3 6 dB Bandwidth .....	12
4.4 Conducted Out of Band Emissions .....	12
4.5 AC Power Conducted Emissions .....	13
4.6 Unwanted Emissions below 1 GHz .....	14
4.7 Unwanted Emissions above 1 GHz .....	15
<b>5 Limits of Test Items</b> .....	<b>16</b>
5.1 RF Output Power .....	16
5.2 Power Spectral Density .....	16
5.3 6 dB Bandwidth .....	16
5.4 Conducted Out of Band Emissions .....	16
5.5 AC Power Conducted Emissions .....	16
5.6 Unwanted Emissions below 1 GHz .....	16
5.7 Unwanted Emissions above 1 GHz .....	17
<b>6 Test Arrangements</b> .....	<b>18</b>
6.1 RF Output Power .....	18
6.1.1 Test Setup .....	18
6.1.2 Test Procedure .....	18
6.2 Power Spectral Density .....	18
6.2.1 Test Setup .....	18
6.2.2 Test Procedure .....	18
6.3 6 dB Bandwidth .....	19
6.3.1 Test Setup .....	19
6.3.2 Test Procedure .....	19
6.4 Conducted Out of Band Emissions .....	19
6.4.1 Test Setup .....	19
6.4.2 Test Procedure .....	19
6.5 AC Power Conducted Emissions .....	20
6.5.1 Test Setup .....	20
6.5.2 Test Procedure .....	20
6.6 Unwanted Emissions below 1 GHz .....	21
6.6.1 Test Setup .....	21
6.6.2 Test Procedure .....	22
6.7 Unwanted Emissions above 1 GHz .....	23
6.7.1 Test Setup .....	23
6.7.2 Test Procedure .....	23
<b>7 Test Results of Test Item</b> .....	<b>24</b>



7.1	RF Output Power .....	24
7.2	Power Spectral Density .....	25
7.3	6 dB Bandwidth .....	26
7.4	Conducted Out of Band Emissions .....	27
7.5	AC Power Conducted Emissions .....	28
7.6	Unwanted Emissions below 1 GHz .....	30
7.7	Unwanted Emissions above 1 GHz.....	32
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>37</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>38</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBDKX-WTW-P23090081-4	Original release.	2023/12/8

## 1 Certificate

**Product:** Home IOT Gateway  
**Brand:** Level  
**Test Model:** H5  
**Series Model:** H2  
**Sample Status:** Engineering sample  
**Applicant:** Level Home Inc.  
**Test Date:** 2023/9/13 ~ 2023/11/29  
**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
**Measurement procedure:** ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -1.98 dB at 0.49168 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -2.3 dB at 308.00 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -3.1 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.2 dB
6 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.63 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.38 dB
	30 MHz ~ 1 GHz	5.7 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	4.83 dB
	6 GHz ~ 18 GHz	5.37 dB
	18 GHz ~ 40 GHz	5.24 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	Home IOT Gateway
Brand	Level
Test Model	H5
Series Model	H2
Model Difference	Refer to Note as below
Status of EUT	Engineering sample
Power Supply Rating	3.6Vdc from battery or 5Vdc from Adapter
Modulation Type	O-QPSK
Transfer Rate	250kb/s
Operating Frequency	2.405 GHz ~ 2.475 GHz
Number of Channel	15
Output Power	65.917 mW (18.19 dBm)

Note:

1. All models are listed as below.

RF Radio List	Radio ID	Technology List	H5	H2
1	LTE	WWAN (LTE + WCDMA)	V	V
2	Z-Wave	Z-Wave	V	X
	Thread 900M	Thread 900M	V(Optional)	V
3	Thread	Thread	V(Optional)	V
	Zigbee	Zigbee	V	X
	BLE	BTLE	V	V
4	WiFi	WLAN(2.4G)	V	X
	BLE-SOM	BLE	V	V

2. There are WWAN, WLAN (2.4 GHz), Bluetooth LE, Zigbee, Thread, Z-Wave technology used for the EUT.

3. Simultaneously transmission condition.

Condition	Technology			
	Radio 1	Radio 2	Radio 3	Radio 4
1	WWAN	Z-Wave	Zigbee	BTLE
2	WWAN	Z-Wave	Thread	BTLE
3	WWAN	Z-Wave	BTLE	BTLE
4	WWAN	Thread 900M	Zigbee	BTLE
5	WWAN	Thread 900M	Thread	BTLE
6	WWAN	Thread 900M	BTLE	BTLE
7	-	Z-Wave	Zigbee	WLAN
8	-	Z-Wave	Thread	WLAN
9	-	Z-Wave	BTLE	WLAN
10	-	Thread 900M	Zigbee	WLAN
11	-	Thread 900M	Thread	WLAN
12	-	Thread 900M	BTLE	WLAN

4. The EUT uses following accessories.

Item	Brand	Model	Specification
AC Adapter	CUI INC	SWH15-5B-N	AC Input : 100-240Vac 50/60Hz 0.5A Max DC Output : 5.0Vdc 3.0A DC Output Cable : Non-shielded without core, 1.8m
LAN Cable	-	-	Non-shielded without core, 1.0m

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 Antenna Description of EUT

The antenna information is listed as below.

Antenna Type	Gain (dBi)	Connector Type
PIFA	4.06	None

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

### 3.3 Channel List

15 channels are provided to this EUT:

Channel	Frequency	Channel	Frequency
11	2405MHz	19	2445MHz
12	2410MHz	20	2450MHz
13	2415MHz	21	2455MHz
14	2420MHz	22	2460MHz
15	2425MHz	23	2465MHz
16	2430MHz	24	2470MHz
17	2435MHz	25	2475MHz
18	2440MHz		

### 3.4 Test Mode Applicability and Tested Channel Detail


Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	Zigbee	11, 18, 25	O-QPSK	250kb/s
6 dB Bandwidth / Conducted Out of Band Emissions	Zigbee	11, 18, 25	O-QPSK	250kb/s
AC Power Conducted Emissions	Zigbee	25	O-QPSK	250kb/s
Unwanted Emissions below 1 GHz	Zigbee	25	O-QPSK	250kb/s
Unwanted Emissions above 1 GHz	Zigbee	11, 18, 25	O-QPSK	250kb/s

Note: Radio 3

### 3.5 Duty Cycle of Test Signal


**Zigbee:** Duty cycle = 100 ms / 100 ms x 100% = 100.0%

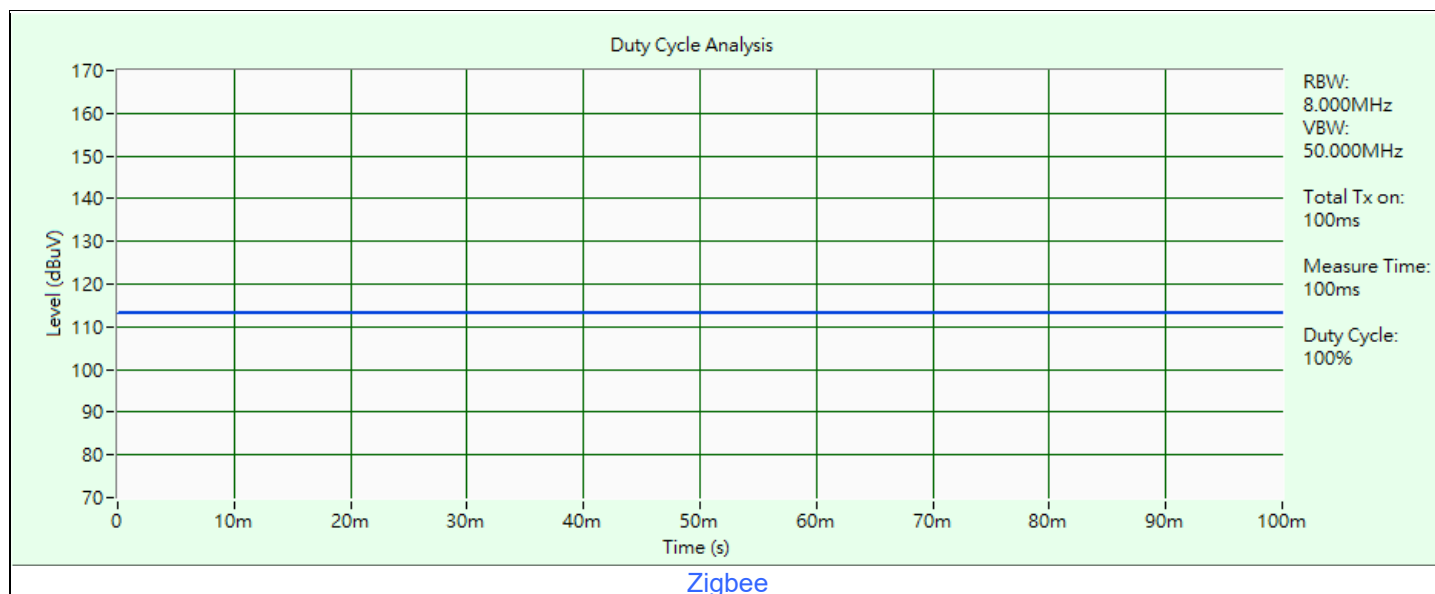

### 3.6 Test Program Used and Operation Descriptions

Controlling software (teraterm v4.8) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

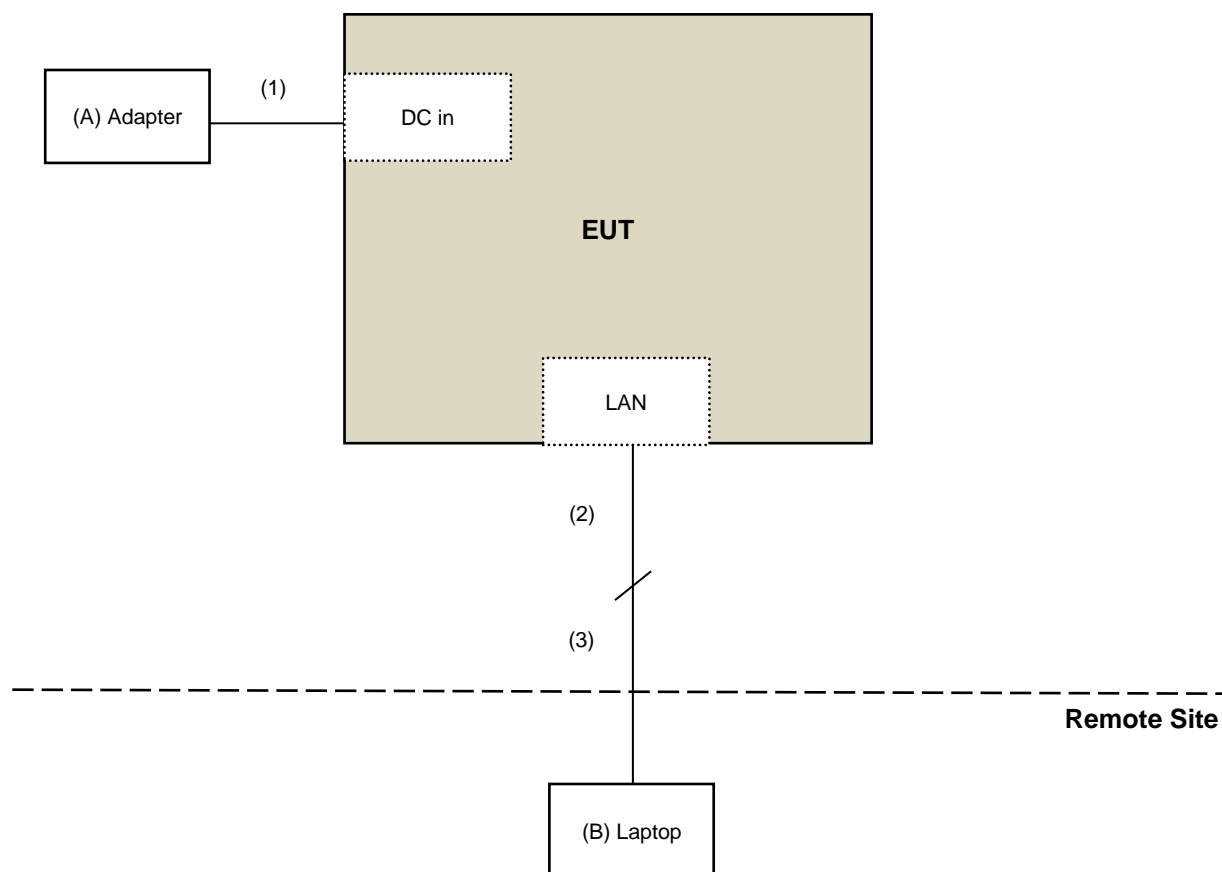

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	CUI INC	SWH15-5B-N	N/A	N/A	Supplied by applicant
B	Laptop	Lenovo	81A4	YD02TWDP	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC cable	1	1.8	N	0	Supplied by applicant
2	LAN cable	1	1	N	0	Supplied by applicant
3	LAN cable	1	10	N	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Power Meter Anritsu	ML2495A	0842014	2023/5/5	2024/5/4
Pulse Power Sensor Anritsu	MA2411B	0738404	2023/5/5	2024/5/4
USB Wideband Power Sensor Keysight	U2021XA	U2021XA_001	2023/6/6	2024/6/5

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2023/11/29

### 4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY54490260	2023/7/13	2024/7/12
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
		101544	2023/5/9	2024/5/8
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2023/11/29

### 4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.

#### 4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-01-305	2023/2/13	2024/2/12
		E1-011285	2022/9/19	2023/9/18
		E1-011286	2022/9/19	2023/9/18
EMI Test Receiver R&S	ESCS 30	100276	2023/4/20	2024/4/19
	ESR3	102412	2022/12/21	2023/12/20
Fixed Attenuator STI	STI02-2200-10	NO.4	2023/9/1	2024/8/31
High Voltage Probe Schwarzbeck	TK9420	00982	2022/12/14	2023/12/13
LISN R&S	ENV216	101197	2023/7/12	2024/7/11
LISN Schwarzbeck	NNLK 8121	8121-731	2023/6/9	2024/6/8
		8121-808	2023/5/2	2024/5/1
	NNLK 8129	8129229	2023/6/27	2024/6/26
	NSLK 8128	8128-244	2022/11/8	2023/11/7
RF Coaxial Cable PEWC	5D-FB	Cable-CO5-01	2023/1/19	2024/1/18
Software BVADT	Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 5.
2. Tested Date: 2023/9/13

#### 4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2022/10/21	2023/10/20
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2023/5/25	2024/5/24
	CDNE-M3	00091	2023/5/25	2024/5/24
Loop Antenna EMCI	LPA600	270	2023/9/4	2024/9/3
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Preamplifier EMCI	EMC001340	980269	2023/6/27	2024/6/26
Preamplifier HP	8447D	2432A03504	2023/2/16	2024/2/15
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2023/6/27	2024/6/26
Signal Analyzer R&S	FSV40	101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2023/9/13

#### 4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Band Pass Filter Micro-Tronics	BRM17690	005	2023/5/25	2024/5/24
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2023/5/25	2024/5/24
Horn Antenna EMCO	3115	00028257	2022/11/13	2023/11/12
Horn Antenna ETS-Lindgren	3117-PA	00215857	2022/11/13	2023/11/12
Horn Antenna Schwarzbeck	BBHA 9170	212	2022/10/20	2023/10/19
		BBHA9170241	2022/10/20	2023/10/19
MXE EMI Receiver Agilent	N9038A	MY51210129	2023/3/24	2024/3/23
		MY51210137	2023/6/5	2024/6/4
Notch Filter Micro-Tronics	BRC50703-01	010	2023/5/25	2024/5/24
Preamplifier EMCI	EMC0126545 EMC184045B	980076	2023/2/16	2024/2/15
		980175	2023/9/2	2024/9/1
		980235	2023/2/16	2024/2/15
Preamplifier HP	8449B	3008A01201	2023/2/16	2024/2/15
RF Coaxial Cable EMCI	EMC102-KM-KM-1000 EMC104	200310	2023/3/12	2024/3/11
		190801	2023/9/13	2024/9/12
		190804	2023/9/13	2024/9/12
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2023/9/13	2024/9/12
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
		101544	2023/5/9	2024/5/8
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2023/9/13 ~ 2023/9/14

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).



## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


### Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup



#### 6.1.2 Test Procedure

##### Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

##### Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup

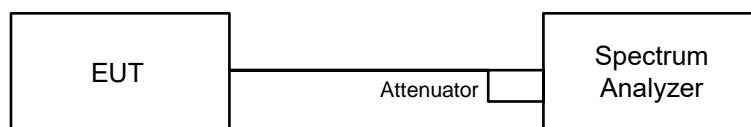


#### 6.2.2 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: 3 kHz.
- d. Set the VBW  $\geq 3 \times$  RBW.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup

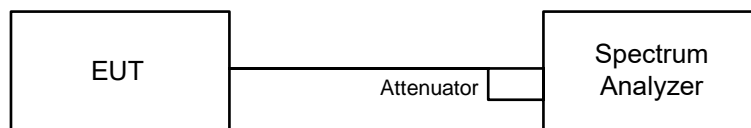


#### 6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup

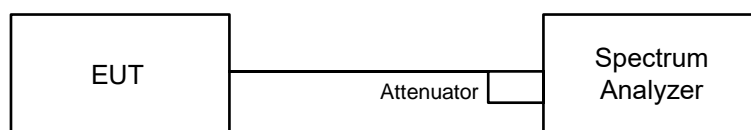

#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

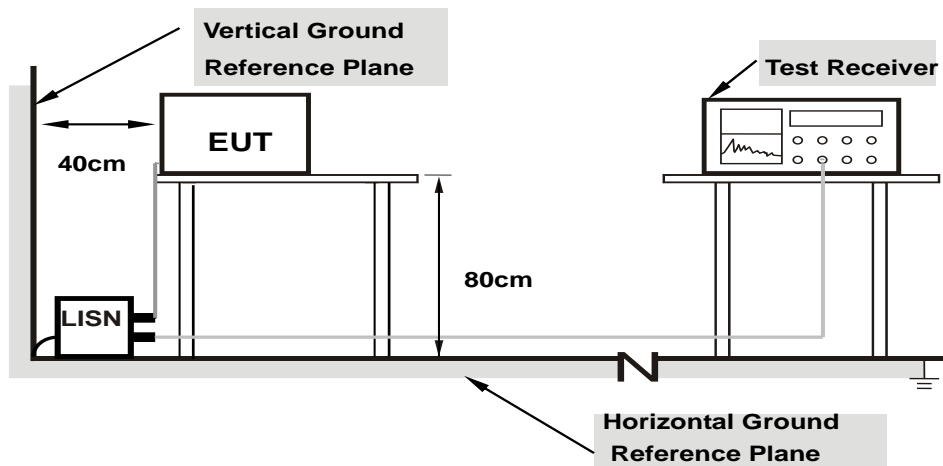

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

#### For Radiated emission below 30 MHz

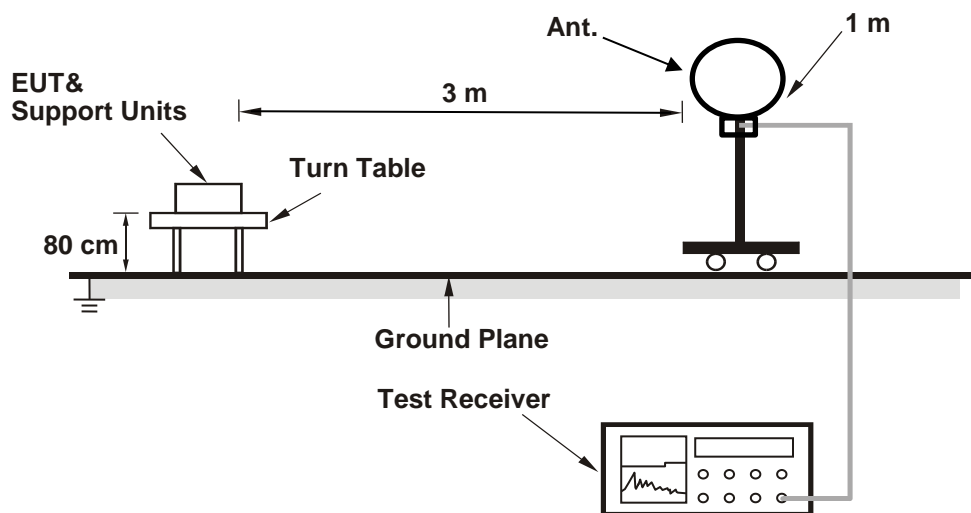

#### For Radiated emission above 30 MHz

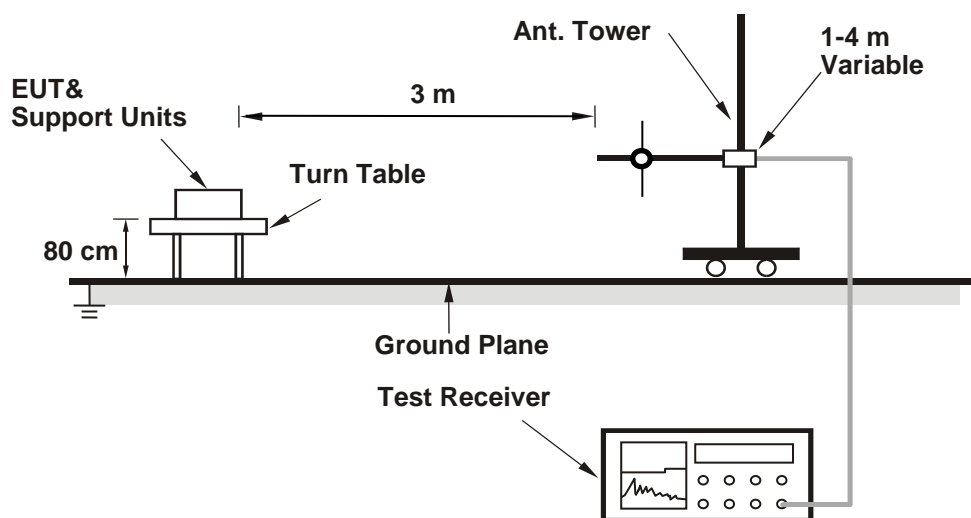

For the actual test configuration, please refer to the attached file (Test Setup Photo).

## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

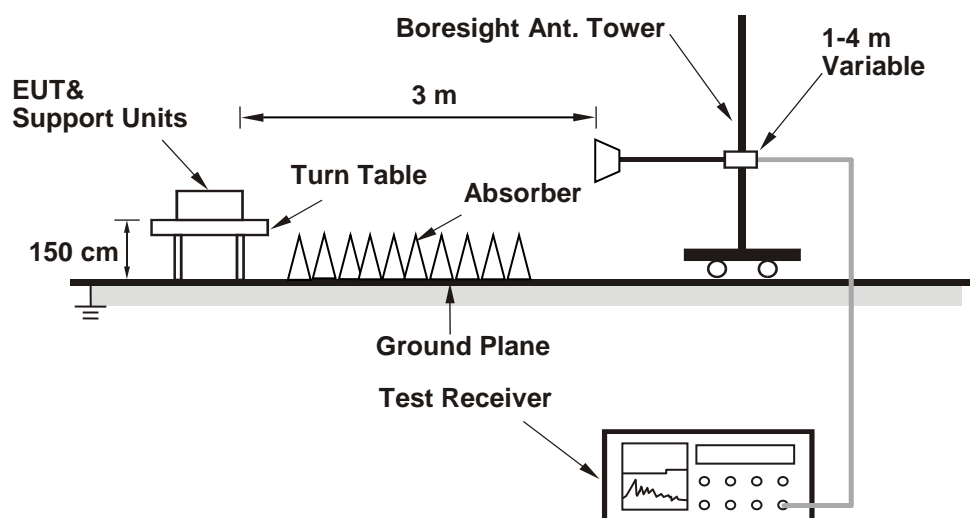

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver/spectrum analyzer was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

#### For Peak Power

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
11	2405	44.978	16.53	30	Pass
18	2440	65.464	18.16	30	Pass
25	2475	65.917	18.19	30	Pass

Note: The antenna gain is 4.06 dBi < 6 dBi, so the output power limit shall not be reduced.

#### For Average Power

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
11	2405	44.259	16.46
18	2440	65.013	18.13
25	2475	65.464	18.16




## 7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
11	2405	3.19	8	Pass
18	2440	3.51	8	Pass
25	2475	2.33	8	Pass


Note: The antenna gain is 4.06 dBi < 6 dBi, so the power density limit shall not be reduced.

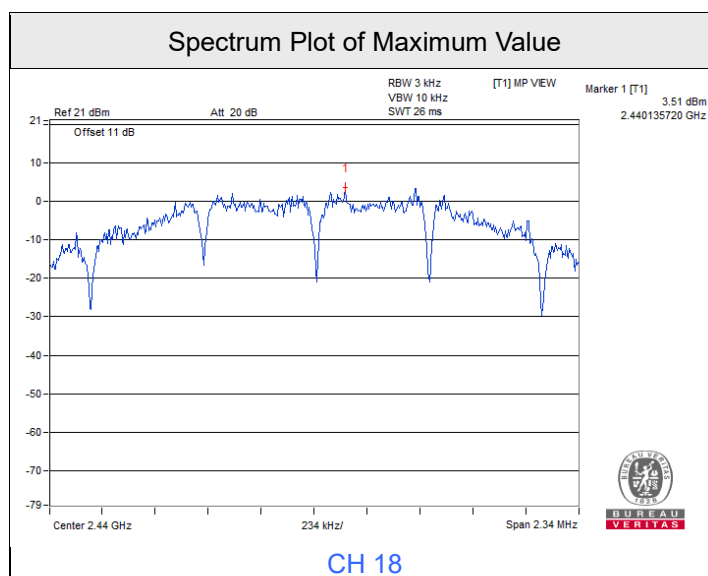

### 7.3 6 dB Bandwidth


Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
11	2405	1.54	0.5	Pass
18	2440	1.56	0.5	Pass
25	2475	1.57	0.5	Pass

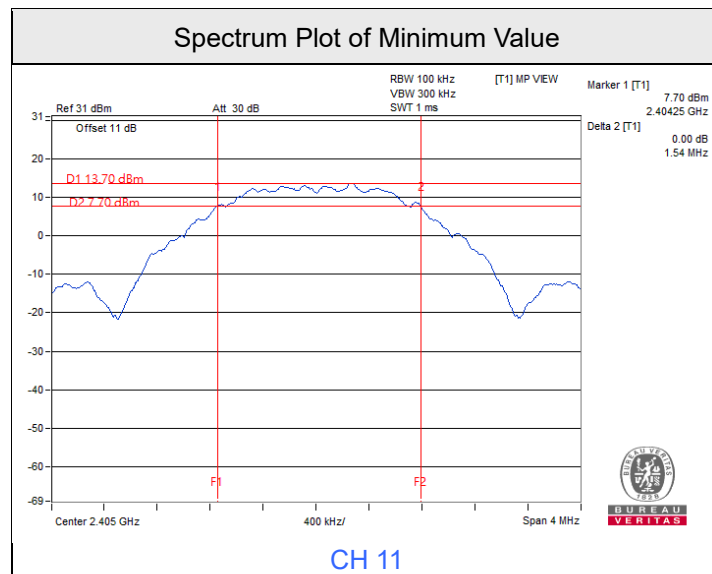

### 7.4 Conducted Out of Band Emissions

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

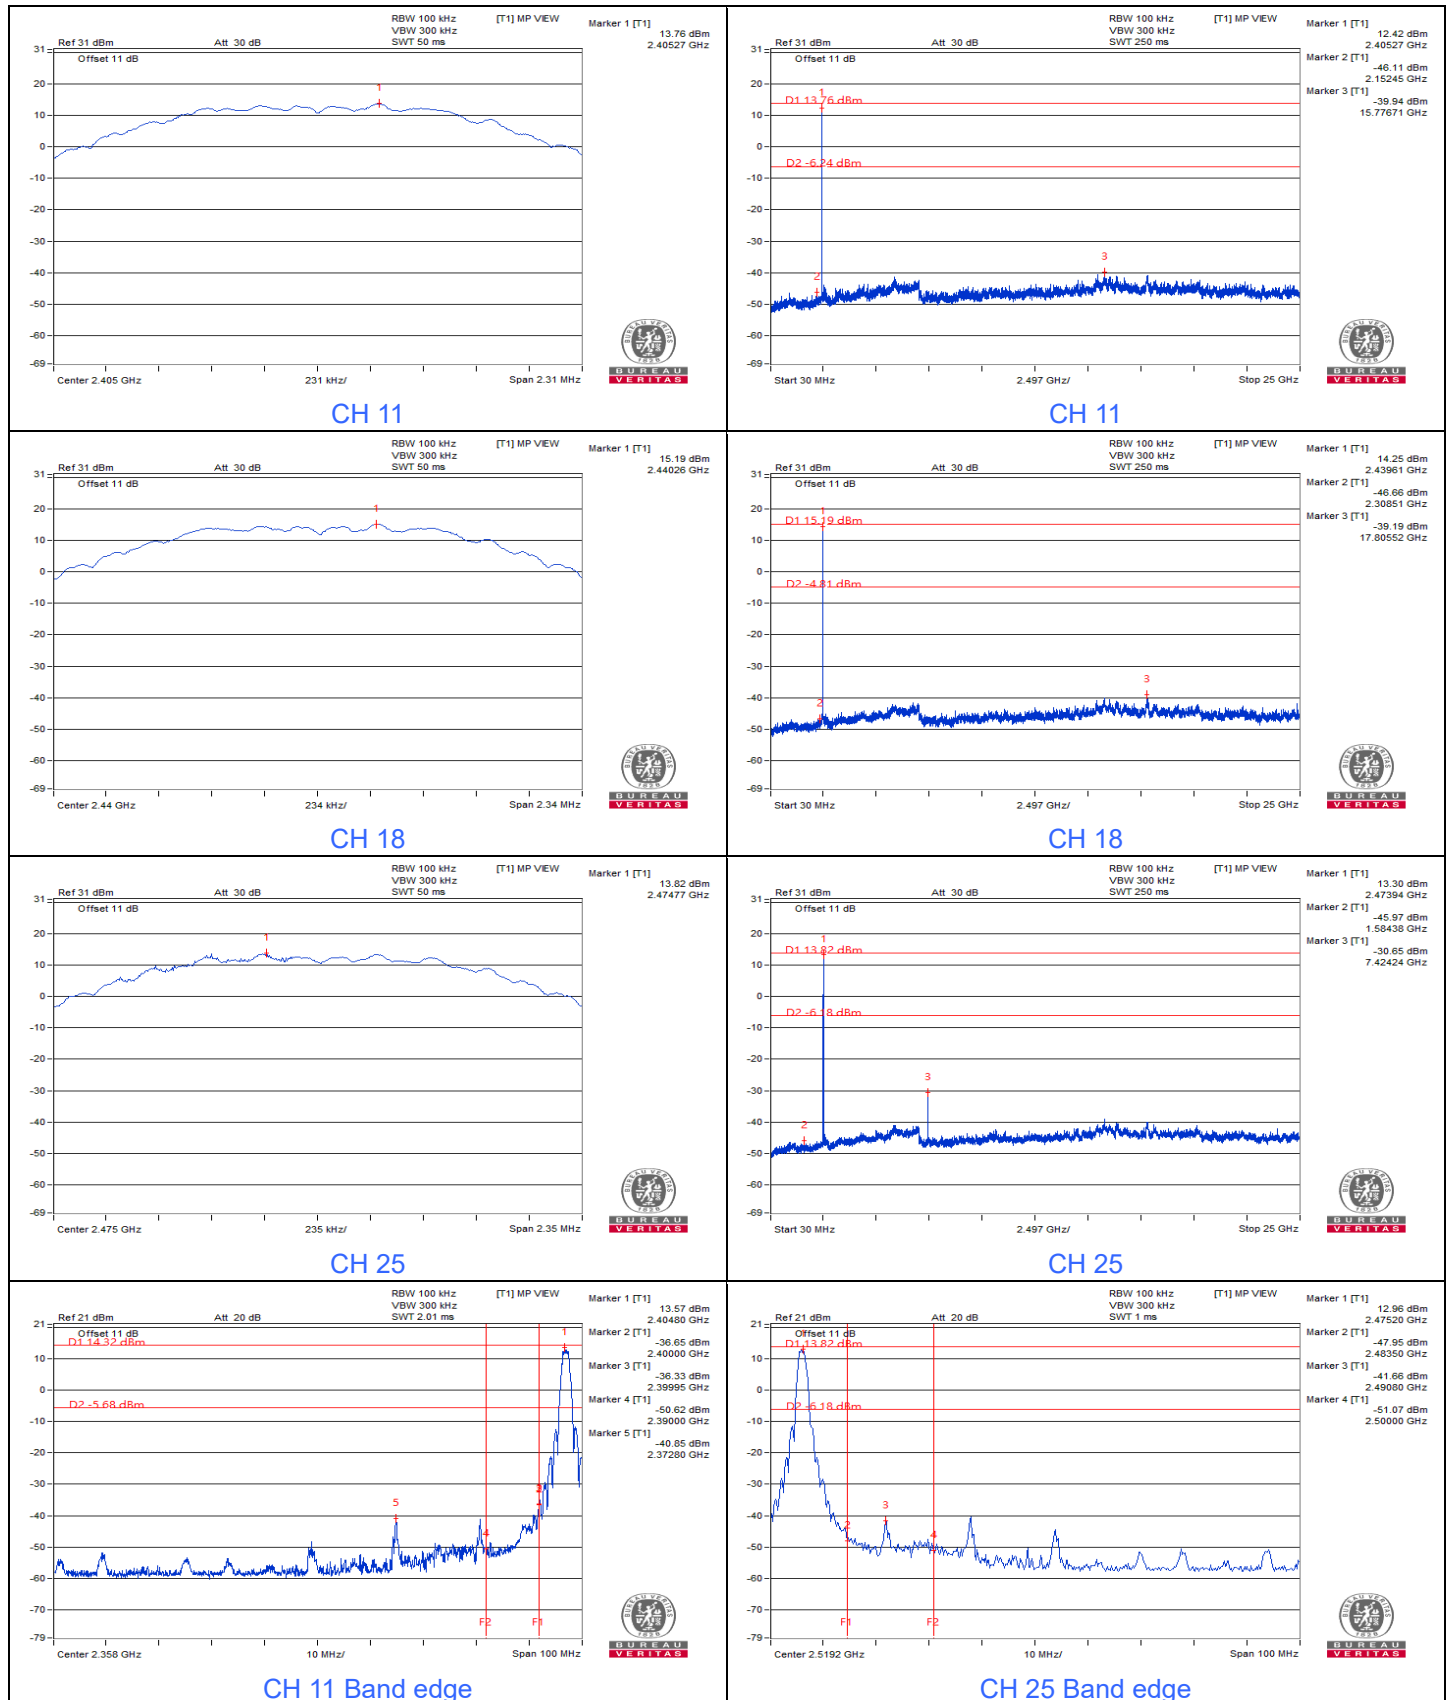


## 7.5 AC Power Conducted Emissions

RF Mode	Zigbee	Channel	CH 25 : 2475 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.40650	10.23	41.23	28.85	51.46	39.08	57.72	47.72	-6.26	-8.64
2	0.44700	10.24	42.93	33.94	53.17	44.18	56.93	46.93	-3.76	-2.75
<b>3</b>	<b>0.49168</b>	<b>10.25</b>	<b>43.91</b>	<b>30.29</b>	<b>54.16</b>	<b>40.54</b>	<b>56.14</b>	<b>46.14</b>	<b>-1.98</b>	<b>-5.60</b>
4	0.54600	10.26	36.52	24.79	46.78	35.05	56.00	46.00	-9.22	-10.95
5	0.90375	10.35	37.29	24.14	47.64	34.49	56.00	46.00	-8.36	-11.51
6	0.99506	10.37	37.36	17.69	47.73	28.06	56.00	46.00	-8.27	-17.94

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

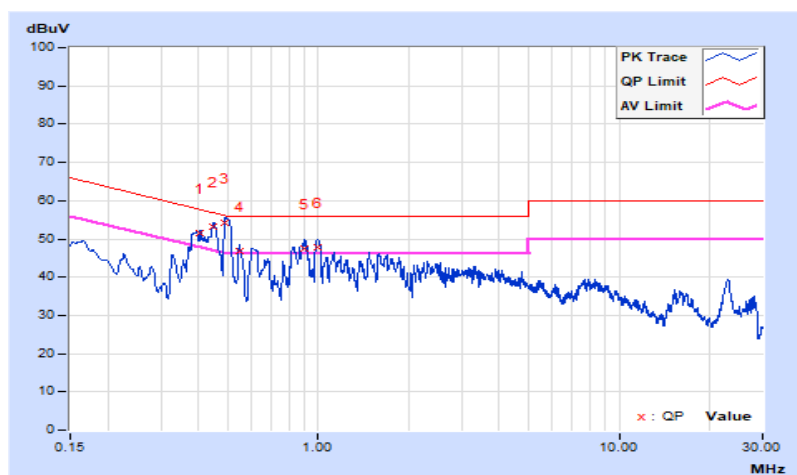


<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 25 : 2475 MHz
<b>Frequency Range</b>	150 kHz ~ 30 MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.39284	10.17	38.90	22.15	49.07	32.32	58.00	48.00	-8.93	-15.68
2	0.43316	10.17	40.47	21.91	50.64	32.08	57.19	47.19	-6.55	-15.11
3	0.51155	10.18	41.71	28.60	51.89	38.78	56.00	46.00	-4.11	-7.22
4	0.90375	10.24	35.83	19.03	46.07	29.27	56.00	46.00	-9.93	-16.73
5	1.14000	10.25	31.56	15.46	41.81	25.71	56.00	46.00	-14.19	-20.29
6	1.68225	10.26	30.27	15.30	40.53	25.56	56.00	46.00	-15.47	-20.44

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

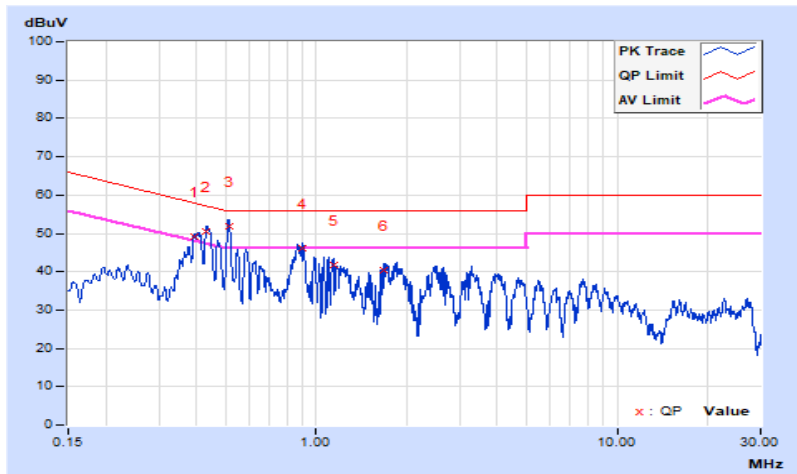


### 7.6 Unwanted Emissions below 1 GHz

<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 25 : 2475 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.00	27.4 QP	40.0	-12.6	1.85 H	31	37.7	-10.3
2	66.40	25.8 QP	40.0	-14.2	1.54 H	75	35.9	-10.1
3	150.90	25.6 QP	43.5	-17.9	1.27 H	246	33.7	-8.1
4	264.00	27.6 QP	46.0	-18.4	1.36 H	224	35.1	-7.5
<b>5</b>	<b>308.00</b>	<b>43.7 QP</b>	<b>46.0</b>	<b>-2.3</b>	<b>1.67 H</b>	<b>151</b>	<b>49.5</b>	<b>-5.8</b>
6	400.00	28.2 QP	46.0	-17.8	1.42 H	111	32.3	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

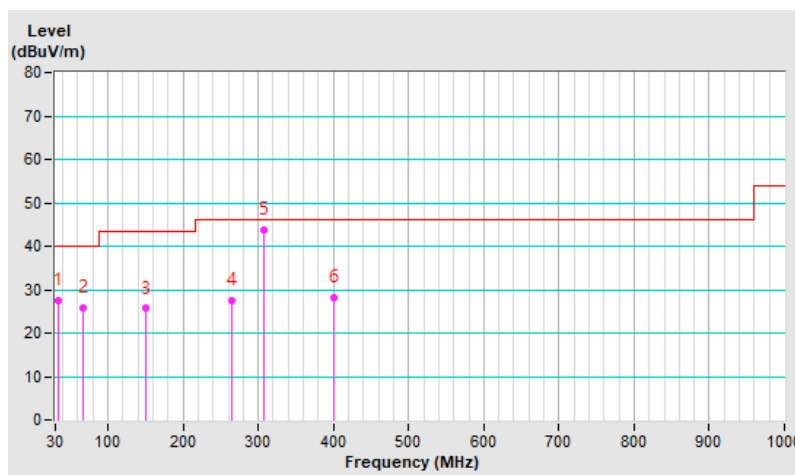


<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 25 : 2475 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	QP: RB=120kHz, DET=Quasi-Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 75% RH
<b>Tested By</b>	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.60	31.1 QP	40.0	-8.9	1.73 V	217	41.2	-10.1
2	95.90	25.5 QP	43.5	-18.0	1.52 V	195	39.1	-13.6
3	171.00	25.8 QP	43.5	-17.7	1.34 V	360	34.4	-8.6
4	250.00	27.3 QP	46.0	-18.7	1.98 V	360	35.6	-8.3
5	308.00	35.9 QP	46.0	-10.1	1.69 V	99	41.7	-5.8
6	380.20	26.1 QP	46.0	-19.9	1.03 V	32	30.5	-4.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

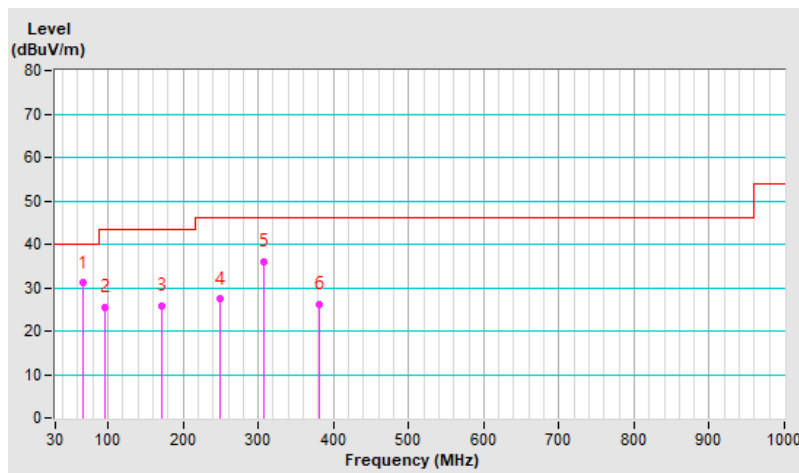

## 7.7 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 11 : 2405 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 62% RH
<b>Tested By</b>	William Su		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.01 H	234	68.5	-1.1
2	2390.00	45.0 AV	54.0	-9.0	1.01 H	234	46.1	-1.1
3	*2405.00	116.4 PK			1.01 H	234	117.5	-1.1
4	*2405.00	114.4 AV			1.01 H	234	115.5	-1.1
5	4810.00	56.7 PK	74.0	-17.3	1.50 H	37	49.1	7.6
6	4810.00	45.4 AV	54.0	-8.6	1.50 H	37	37.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	1.85 V	150	63.8	-1.1
2	2390.00	41.7 AV	54.0	-12.3	1.85 V	150	42.8	-1.1
3	*2405.00	111.7 PK			1.85 V	150	112.8	-1.1
4	*2405.00	109.7 AV			1.85 V	150	110.8	-1.1
5	4810.00	56.7 PK	74.0	-17.3	1.02 V	15	49.1	7.6
6	4810.00	46.5 AV	54.0	-7.5	1.02 V	15	38.9	7.6

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.





<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 18 : 2440 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 62% RH
<b>Tested By</b>	William Su		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	116.6 PK			1.50 H	303	117.6	-1.0
2	*2440.00	114.5 AV			1.50 H	303	115.5	-1.0
3	4880.00	56.1 PK	74.0	-17.9	3.66 H	348	48.1	8.0
4	4880.00	45.8 AV	54.0	-8.2	3.66 H	348	37.8	8.0
5	7320.00	57.6 PK	74.0	-16.4	3.73 H	30	45.2	12.4
6	7320.00	46.6 AV	54.0	-7.4	3.73 H	30	34.2	12.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	112.8 PK			2.69 V	245	113.8	-1.0
2	*2440.00	110.9 AV			2.69 V	245	111.9	-1.0
3	4880.00	57.3 PK	74.0	-16.7	3.80 V	119	49.3	8.0
4	4880.00	47.2 AV	54.0	-6.8	3.80 V	119	39.2	8.0
5	7320.00	58.2 PK	74.0	-15.8	1.02 V	85	45.8	12.4
6	7320.00	47.7 AV	54.0	-6.3	1.02 V	85	35.3	12.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.



<b>RF Mode</b>	Zigbee	<b>Channel</b>	CH 25 : 2475 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	25°C, 62% RH
<b>Tested By</b>	William Su		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2475.00	116.1 PK			2.00 H	302	117.1	-1.0
2	*2475.00	114.1 AV			2.00 H	302	115.1	-1.0
3	2483.50	68.7 PK	74.0	-5.3	2.00 H	302	69.6	-0.9
<b>4</b>	<b>2483.50</b>	<b>50.9 AV</b>	<b>54.0</b>	<b>-3.1</b>	<b>2.00 H</b>	<b>302</b>	<b>51.8</b>	<b>-0.9</b>
5	4950.00	55.6 PK	74.0	-18.4	1.50 H	185	47.7	7.9
6	4950.00	42.9 AV	54.0	-11.1	1.50 H	185	35.0	7.9
7	7425.00	57.2 PK	74.0	-16.8	1.65 H	251	44.5	12.7
8	7425.00	45.5 AV	54.0	-8.5	1.65 H	251	32.8	12.7

**Antenna Polarity & Test Distance : Vertical at 3 m**


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2475.00	113.1 PK			3.24 V	272	114.1	-1.0
2	*2475.00	111.0 AV			3.24 V	272	112.0	-1.0
3	2483.50	66.7 PK	74.0	-7.3	3.24 V	272	67.6	-0.9
4	2483.50	48.5 AV	54.0	-5.5	3.24 V	272	49.4	-0.9
5	4950.00	55.2 PK	74.0	-18.8	2.04 V	115	47.3	7.9
6	4950.00	43.8 AV	54.0	-10.2	2.04 V	115	35.9	7.9
7	7425.00	59.9 PK	74.0	-14.1	2.56 V	286	47.2	12.7
8	7425.00	49.0 AV	54.0	-5.0	2.56 V	286	36.3	12.7

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

### Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

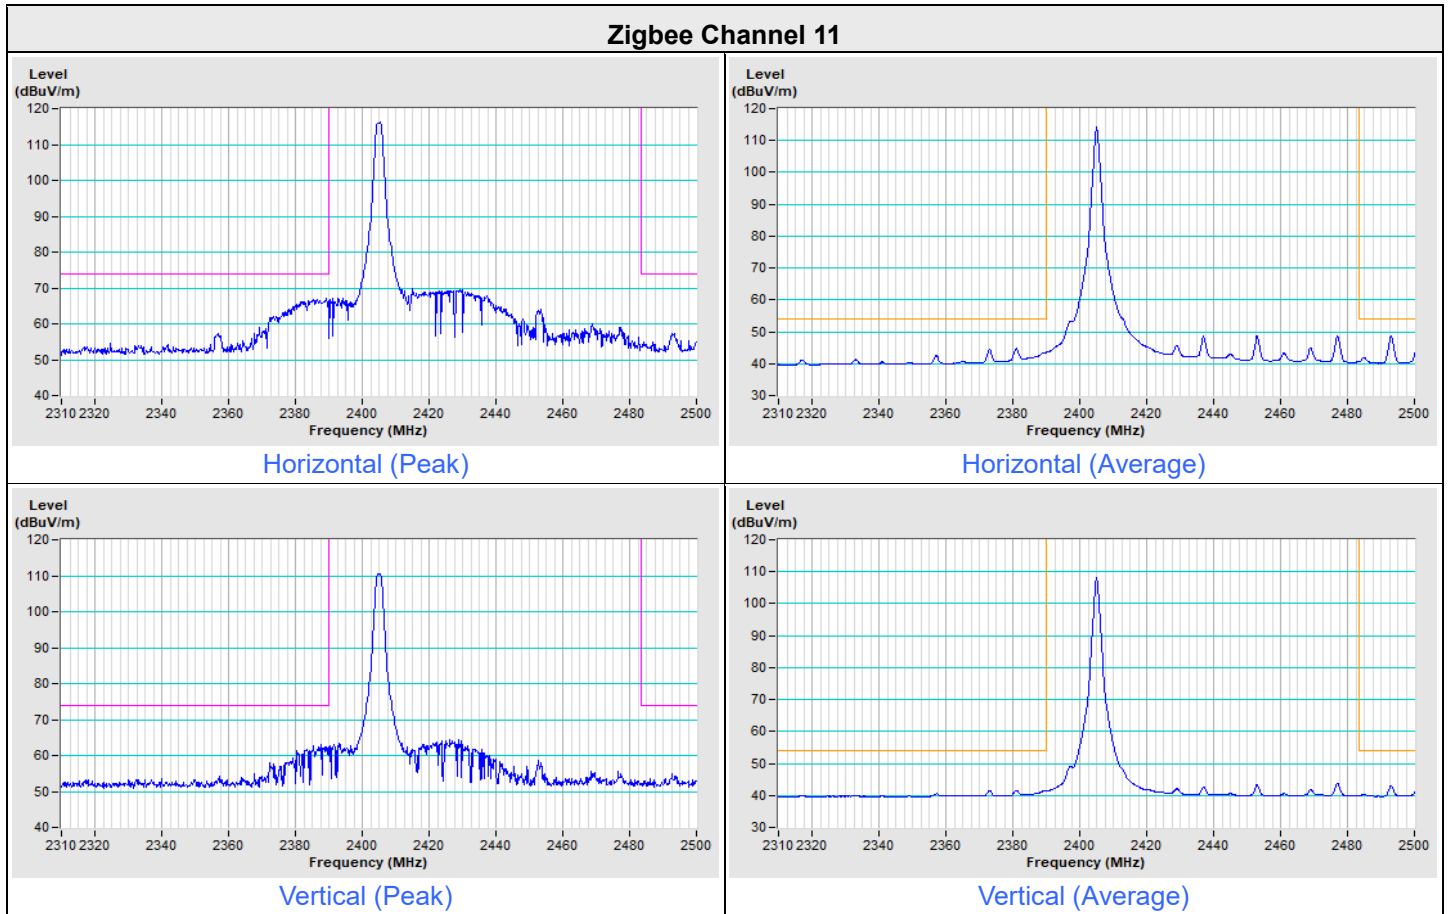


### Zigbee Channel 25

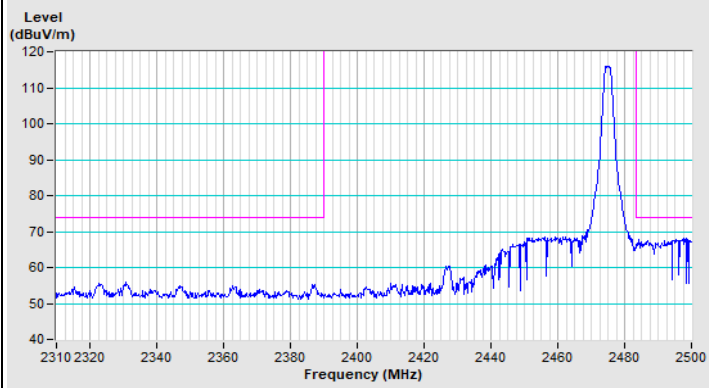


Horizontal (Peak)

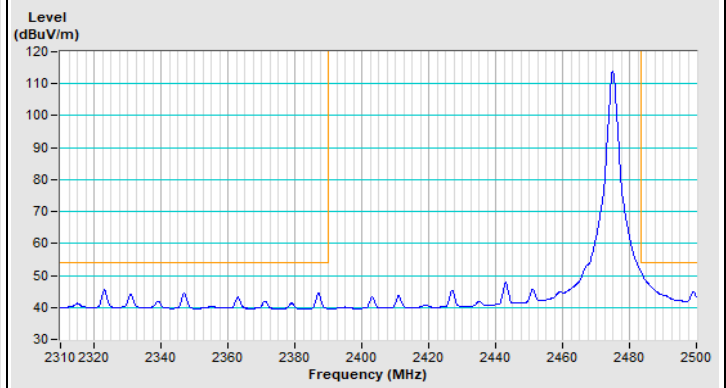

Horizontal (Average)

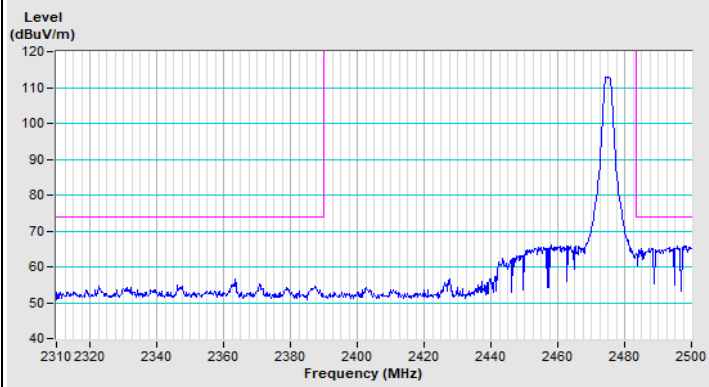

Vertical (Peak)

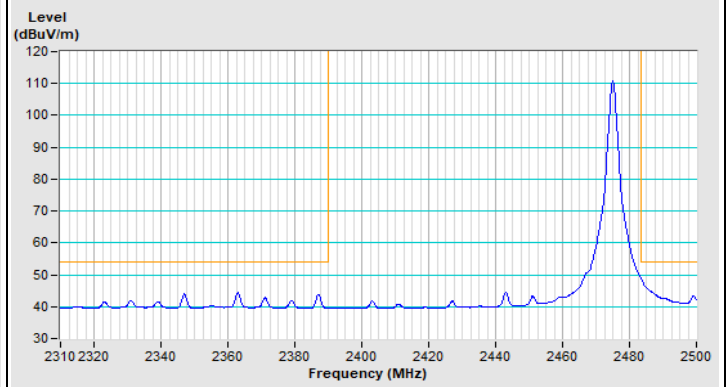

Vertical (Average)

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---