

Test Report

Electromagnetic Compatibility

Product	Network Controller		
Name and address of the applicant	InCoax Networks AB Utmarksvägen 4 80291 Gävle, Sweden		
Name and address of the manufacturer	InCoax Networks AB Utmarksvägen 4 80291 Gävle, Sweden		
Model	In:xtnd control C254		
Rating	12VDC, 5A Max		
Trademark	In:xtnd		
Serial number	84:93:0c:00:7d:ae		
Additional information	/		
Tested according to	FCC CFR 47 Subpart 15B ICES-003, Issue 6		
Order number	382051		
Tested in period	2019-11-07 to 2019-12-10		
Issue date	2020-01-22		
Name and address of the testing laboratory	Nemko Group Nemko AS Philip Pedersens vei 11, 1366 Lysaker, Norway	TEL: +47 22 96 03 30 FAX: +47 22 96 05 50	 
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [Thanh Tran]		 Approved by [Tore Løvlien]	
<p>This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.</p>			

Nemko Group

 Nemko AS, Philip Pedersens vei 11, P.O. Box 91, 1366 Lysaker, Norway
 TEL +47 22 96 03 30 FAX +47 22 96 05 50 EMAIL info@nemko.com

REPORT REVISIONS

Revision #	Date	Order #	Description
00	2020-01-13	382051	First issued
01	2020-01-22	382051	Correction the photo of marking label.



THIS REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATION(S) TESTED.

It is the manufacturer's responsibility to assure the additional production units of this product are manufactured with identical electrical and mechanical components. The manufacturer is responsible to the authorities for any modifications made to the product, which result in non-compliance to the relevant regulations.

Nemko authorizes the above named Customer to reproduce this report provided it is reproduced in its entirety. Any reproduction of parts of this report requires approval in writing from Nemko.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

Opinions expressed within this report regarding general assessments and qualifications for PASS or FAIL to the standards limits and requirements, are not part of the current accreditation. Neither is opinions expressed regarding model variants covered by the testing performed in this report.

Deviations from, additions to, or exclusions from the test specifications are described in "Testing Report Summary".

DESCRIPTION OF TESTED ITEM(S)

Product description.....:	Network Controller. EUT uses the free capacity in coaxial network to enable high speed internet access, IPTV, VoIP and Web services without the need to pull new cables. It works for all coaxial cable networks used for TV signal distribution.
Model/type.....:	In:xtnd control C254
Serial number.....:	84:93:0c:00:7d:ae
Operating voltage.....:	12VDC, 5A Max Test performed with use an adaptor Inventus Power, model IPD5012 (Input: 100-240V AC, 50-60Hz, 1.5A; Output: 12VDC, 4.2A).
Maximum power/current.....:	60W / 5A
Insulation class.....:	III
Highest clock frequency.....:	10.3125GHz
Hardware version.....:	V1.0
Software version.....:	1.6.1

Mounting position.....:	<input checked="" type="checkbox"/> Table top equipment <input checked="" type="checkbox"/> Wall/ceiling mounted equipment <input type="checkbox"/> Floor standing equipment <input type="checkbox"/> Handheld equipment <input checked="" type="checkbox"/> Rack mounted equipment <input type="checkbox"/> Console equipment <input type="checkbox"/> Other:
-------------------------	--

CRITICAL MODULES/PARTS

Description	Manufacturer	Type
Copper Ethernet Transceiver	MikroTik	S+RJ10 SFP+10GBASE

INPUT/OUTPUT PORTS

Port name and description	Cable		
	> 3m	Attached during test	Shielded
AC mains supply (AC/DC adaptor)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4x Coax	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2x Ethernet (MGT port and TRUNK port)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

OPERATING MODES

No.	Description	Applied for testing	
		Emissions	Immunity
1	Networks connection	<input checked="" type="checkbox"/>	<input type="checkbox"/>

ACCESSORIES USED DURING TEST

Description	Manufacturer	Type
Switch 1	Netgear	GS110EMX
Switch 2	Netgear	GS110EMX
Router	MicroTic	RB750Gr3
4x Incoax In:xtnd modem	Incoax	MA 2.5

MODEL VARIANTS

The following model variants have been inspected and are confirmed to be identical or believed to be less disposed with regard to electromagnetic compatibility.


Model/type	Comment	Tested
In:xtnd Control C254	Tested model	<input checked="" type="checkbox"/>
In:xtnd Control C251	Not tested variant The different is only one coax port on In:xtnd Control C251	<input type="checkbox"/>

PHOTOS AND DRAWINGS

Copy of marking label test item...:	<p>in:xtnd™</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.</p> <p>In:xtnd Control C254 ver. 1.0 Power ratings: Nom. 12VDC, 5A Max Convection cooled. Do not cover! Keep away from direct sunlight CAN ICES- 3(A)/NMB- 3(A) FCC ID: 2ATQM1000-0375</p> <p>INCOAX Networks AB Utmarksvägen 4, SE 802 91 Gävle, Sweden</p>
-------------------------------------	---

Photo of the test item.....:	
------------------------------	--



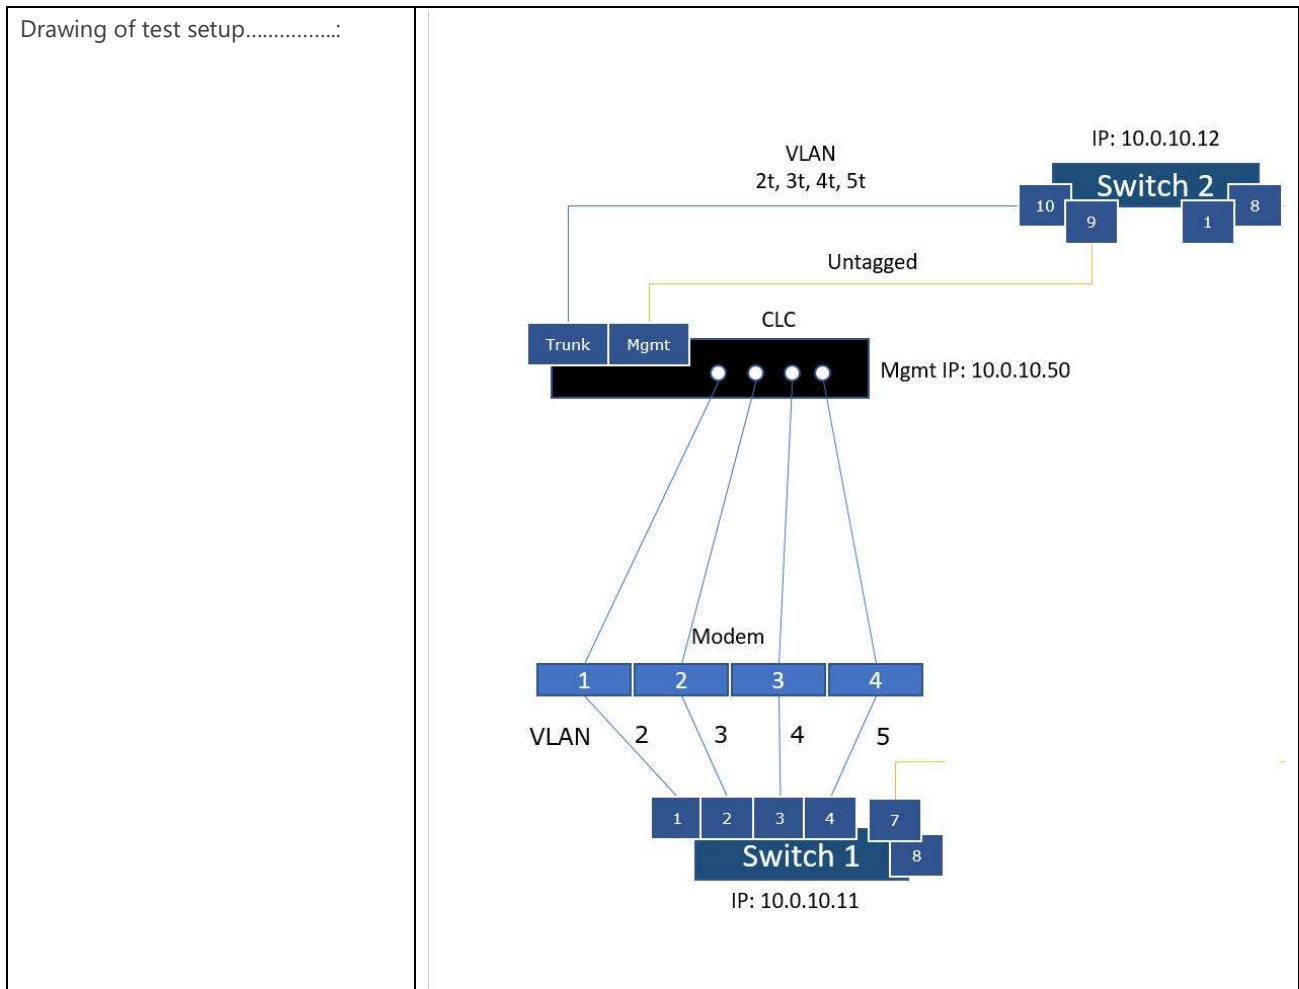

OTHER INFORMATION

Modifications to the test item.....:	None
Additional information.....:	During radiated emission tests the network controller In: xtnd C254 is powered by using an adaptor Inventus Power, model IPD5012 (Input: 100-240V AC, 50-60Hz, 1.5A; Output: 12VDC, 4.2A).

Note: This equipment has been tested with certain cable types and cable configurations. Any changes to these parameters when installed may influence on the EMC properties of this equipment

TEST REPORT SUMMARY

APPLIED STANDARDS

Standards	Titles
FCC CFR 47 Subpart 15B	<i>Digital devices - Unintentional radiators, Class B Digital Device</i>
ICES-003, Issue 6	<i>Spectrum Management and Telecommunications Policy. Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus - Limits and Methods of Measurement (Issue 6, June 2016)</i>

TEST SUMMARY

Requirements – Tests	Reference standards	Verdict
Conducted Emissions	FCC Part 15.107 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS
Radiated Emissions (Below 1GHz)	FCC Part 15.109 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS
Radiated Emissions (Above 1GHz)	FCC Part 15.109 ICES-003, Issue 6, Clause 6.2 ANSI C63.4-2014	PASS

- PASS : Tested and complied with the requirements
- FAIL : Tested and failed the requirements
- N/A : Test not relevant to this specimen (evaluated by the test laboratory)
- : Test not performed (instructed by the applicant)
- * : An asterisk (*) placed after the verdict in the Result column indicates test items that are not within Nemko's scope of accreditation
- # : A grid (#) placed after the verdict in the Result column indicates test items that are only partly covered by Nemko's scope of accreditation. Further information is detailed in the test section

NOTES

Note 1: Product standards with dated references to basic standards may have been performed by Nemko AS according to the newest edition of the basic standard. This may impact the compliance criteria or technical performance of the test, still this is considered to be adequate as long as the test is expected to confirm compliance to the intention of the product standard. The table above lists the actual editions of the basic standards which have been used during testing.

Note 2: The choice of immunity test levels could be higher than those specified by the reference standards when we take into account the nature of the specimen and its intended use, or based on customer requests.

Test Results

CONDUCTED EMISSIONS

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

The measurement was performed at the power supply terminal of the specimen. Nominal supply voltage was provided.

The specimen was energized and in normal operating mode during the measurement.

- The specimen and its cables were elevated 10 cm above a ground plane.
 - The specimen and its cables were elevated 40 cm above a ground plane.
 - The specimen and its cables were placed 40 cm from a vertical ground plane, 80 cm over ground plane.
 - The specimen was mounted directly on, and bonded to a ground plane. Cables and auxiliary equipment were elevated by 1 cm
-
- The specimen was connected to an Artificial Mains Network (AMN) by its power supply cable, which was adjusted to 100cm length by folding.
 - The specimen was connected to an Artificial Mains Network (AMN) by a 0.8 m shielded power supply cable directly connected to the AMN

Conditions

- Frequency range was 9kHz – 30MHz.
- Frequency range was 10kHz – 30MHz.
- Frequency range was 150kHz – 30MHz.

The measuring bandwidth is 200Hz in the frequency range 9 kHz – 150 kHz. Measurement was made with a 100 Hz step size and 100 ms dwell time.

The measuring bandwidth is 9 kHz in the frequency range 150 kHz – 30 MHz. Measurement was made with a 4.5 kHz step size and 20 ms dwell time.

Measurement uncertainty: ± 3.7 dB (9 kHz – 150 kHz); ± 3.3 dB (150 kHz – 30 MHz)

Instruments used during measurement

Instrument list: AMN: R&S / ESH2-Z5 (N-4097) (03/2020)
 EMI Receiver: R&S / ESCI 3 (N-4259) (10/2021)

Conformity

Verdict:


PASS

Test engineer:

Thanh Tran

EMISSION SPECTRUM AND MEASUREMENT DATA

Full Spectrum

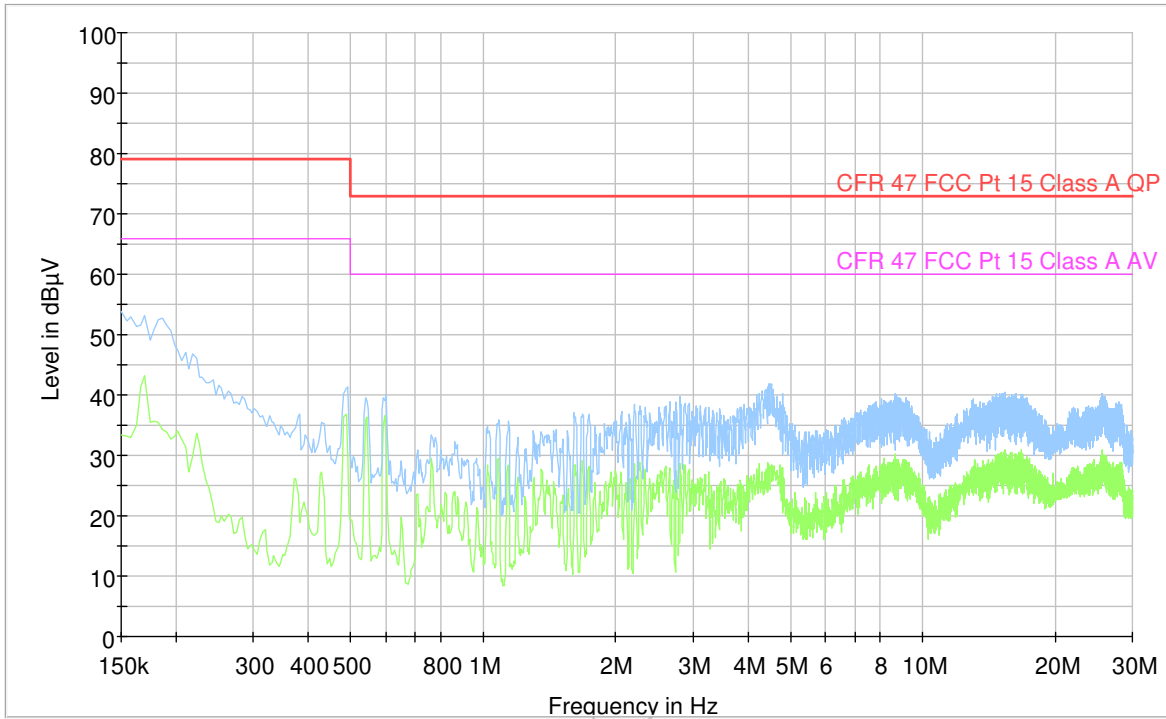

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
---	---	---	---	---	---	---	---	---	---

RADIATED EMISSIONS (BELOW 1GHZ)

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

The measurements were performed in a semi-anechoic chamber (SAC). Nominal supply voltage was provided. The specimen was energized and in normal operating mode during the measurement.

- The specimen and its cables were elevated 10 cm above the site ground plane and placed in the centre of the turntable.
- The specimen and its cables were placed on a table 80 cm above the site ground plane and placed in the centre of the turntable.
- Ferrite clamps type CMAD were applied to cables leaving the test volume.
- A CDNE was applied to the power supply cable.

Antenna type = Hybrid bilog antenna

Antenna elevation = 100-400 cm above the ground reference plane.

Specimen rotation = 0-360°.

Frequency range:

- 30-300MHz
- 30-1000MHz
- Other:

Measurement distance:

- 3m
- 5m
- 10m

Conditions

The measuring bandwidth is 120 kHz in the frequency range 30 MHz – 1000 MHz. Frequency sweeps with RBW = 120 kHz and VBW = 1 MHz was applied with a sweep time of 20 ms (step size resolution < 60 kHz).

Measurement uncertainty: ± 4.9 dB (3m distance in SAC10); ± 4.6 dB (3m distance in SAC3); ± 4.6 dB (10m distance in SAC10)

Instruments used during measurement

Instrument list: Antenna, bilog: Sunol / JB3 (N-4525) (11/2019)
EMI Receiver: R&S / ESU40 (LR-1639) (01/2020)
Preamplifier: Sonoma / 310N (LR-1686) (07/2020)

Conformity

Verdict:


PASS

Test engineer:

Thanh Tran

EMISSION SPECTRUM AND MEASUREMENTS DATA

Full Spectrum

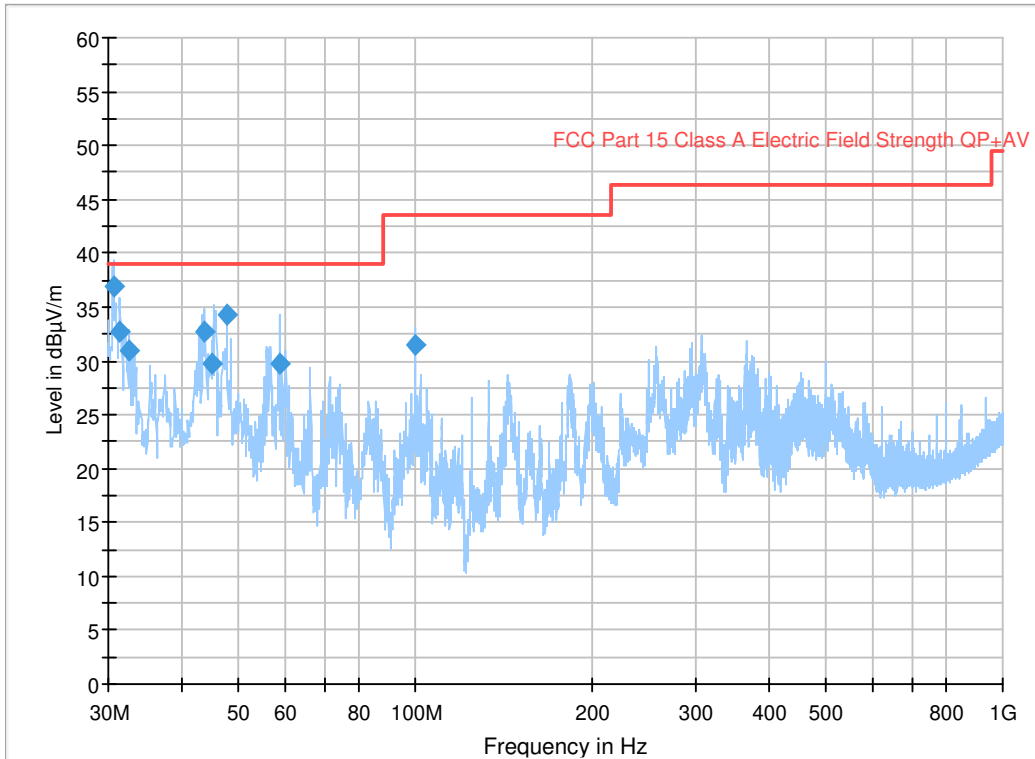

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.640028	36.86	39.00	2.14	1000.0	120.000	100.0	V	121.0	-10.9
31.433472	32.78	39.00	6.22	1000.0	120.000	103.0	V	322.0	-11.6
32.593867	31.03	39.00	7.97	1000.0	120.000	103.0	V	316.0	-12.5
43.769506	32.78	39.00	6.22	1000.0	120.000	358.0	V	0.0	-19.3
45.051256	29.78	39.00	9.22	1000.0	120.000	384.0	V	326.0	-19.7
47.799433	34.33	39.00	4.67	1000.0	120.000	388.0	V	346.0	-20.6
58.791778	29.67	39.00	9.33	1000.0	120.000	241.0	V	109.0	-23.6
100.005467	31.45	43.50	12.05	1000.0	120.000	112.0	V	85.0	-20.8

RADIATED EMISSIONS (ABOVE 1GHZ)

TEST DESCRIPTION

Method

The reference method for this test is listed in the table under clause TEST SUMMARY.

Set-up

Nominal supply voltage was provided. The specimen was energized and in normal operating mode during the measurement.

- The measurements were performed in a semi-anechoic chamber (SAC3) (calibrated volume: D=2.0m / H=2.0m).
- The measurements were performed in a semi-anechoic chamber (SAC10) (calibrated volume: D=1.5m / H=2.0m).
- The measurements were performed in a fully anechoic room (FAR) (calibrated volume: D=1.2m / H=2.0m).

The specimen and its cables were elevated 10 cm above the site ground plane, and placed in the centre of the turntable.

The specimen and its cables were placed on a table 80 cm above the site ground plane, and placed in the centre of the turntable.

The reference ground plane was covered with ferrite absorbers in the reflecting area between the specimen and the measuring antenna.

Measurement distance = 3m.

Antenna elevation = fixed at centre of specimen height.

Specimen rotation = 0-360°.

Measurements were performed with a double-ridged guide horn antenna.

Frequency range:

- 1-2 GHz
- 1-5 GHz
- 1-6 GHz
- 1-40 GHz

Highest internal frequency of specimen:

- Below 108MHz
- Between 108MHz and 500MHz
- Between 500MHz and 1000MHz
- Above 1000MHz

The measuring bandwidth is 1 MHz in the above frequency range. Frequency sweeps with RBW = 1 MHz and VBW = 1 MHz was applied with a sweep time of 100 ms (proper segmentation of the frequency range was applied to obtain step size resolution < 500 kHz).

Measurement uncertainty: ± 5.1 dB

Instruments used during measurement


Instrument list: Antenna Horn: ETS / 3117-PA (LR-1717) (12/2019)
EMI Receiver: R&S / ESU40 (LR-1639) (01/2020)
Preamplifier: HP / 8449B (LR-1322) (N/A)
Antenna Horn: Narda / 638 (LR-1480) (N/A)
Antenna Horn: Narda / V4607 (LR-099) (N/A)
EMI Receiver: R&S / FSW43 (LR-1690) (01/2020)
Preamplifier: Miteq / JS4 (LR-1591) (07/2020)

Conformity

Verdict:	PASS
Test engineer:	Thanh Tran Gnanamanikan Suhanthakumar


EMISSION SPECTRUM (HORIZONTAL POLARIZATION) AND MEASUREMENTS DATA

1-18GHz, Horizontal Polarization:

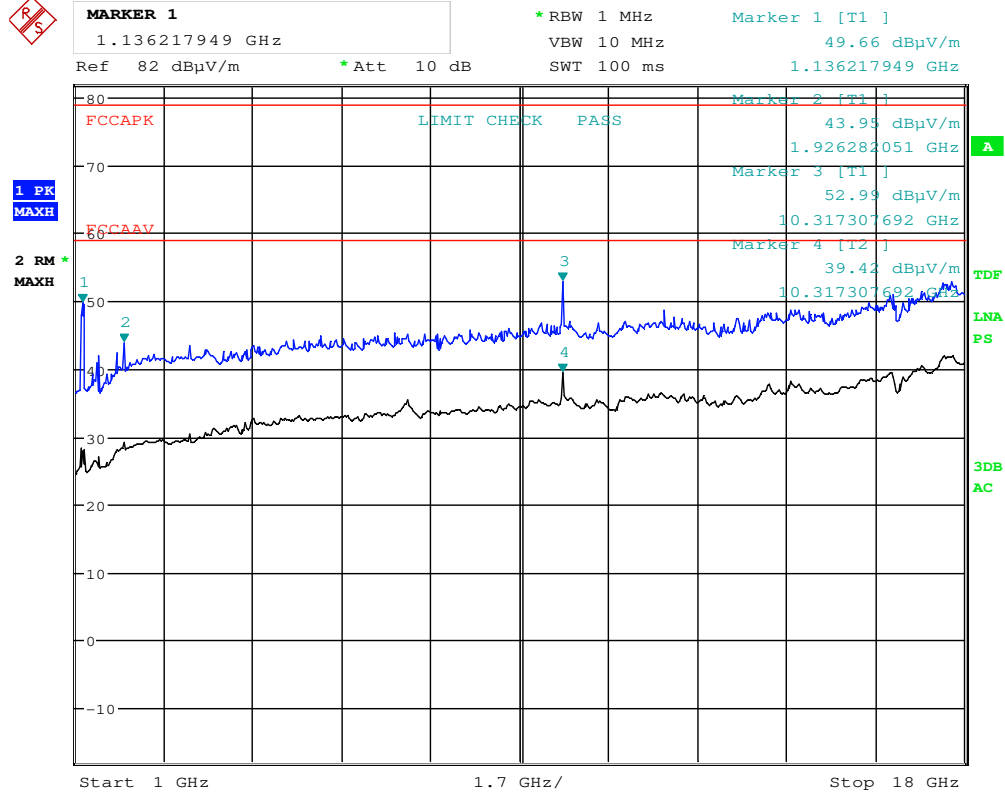


Date: 7.NOV.2019 16:05:08

18-26GHz, Horizontal Polarization:

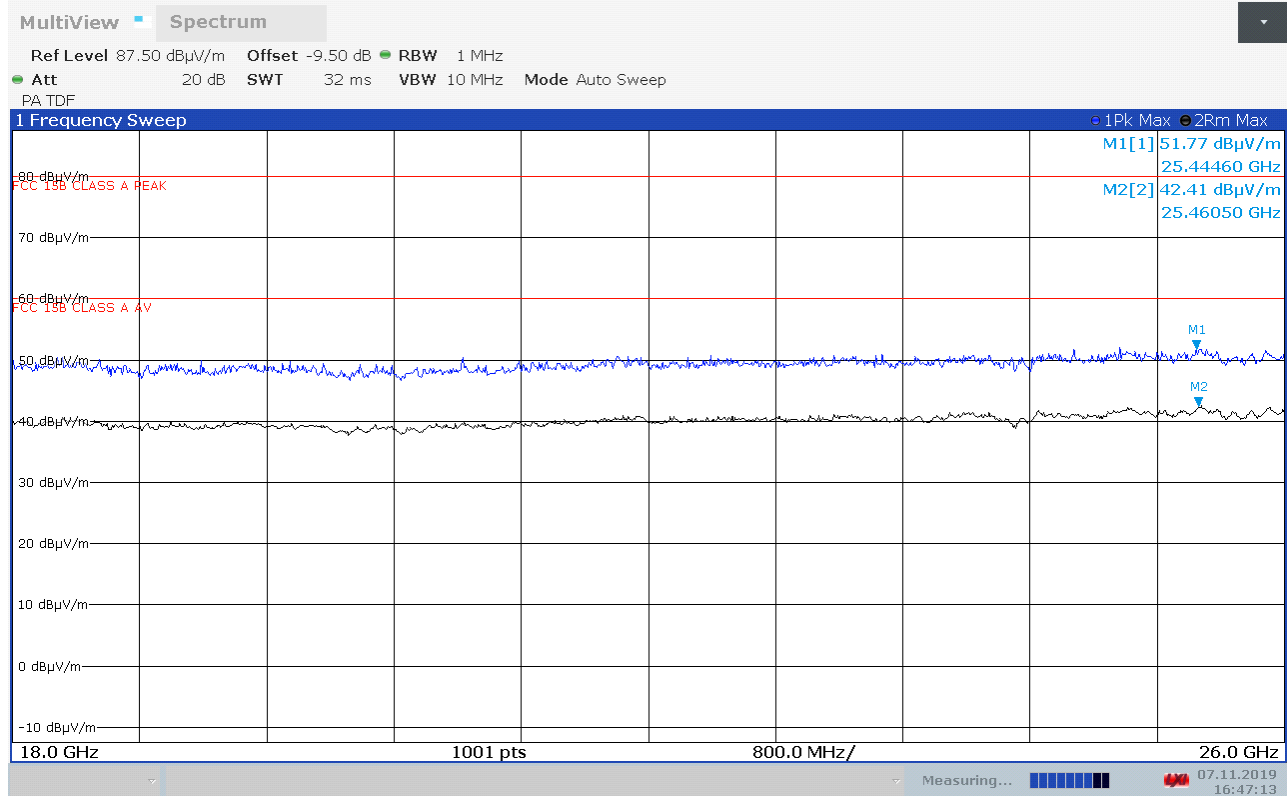


26-40GHz, Horizontal Polarization:

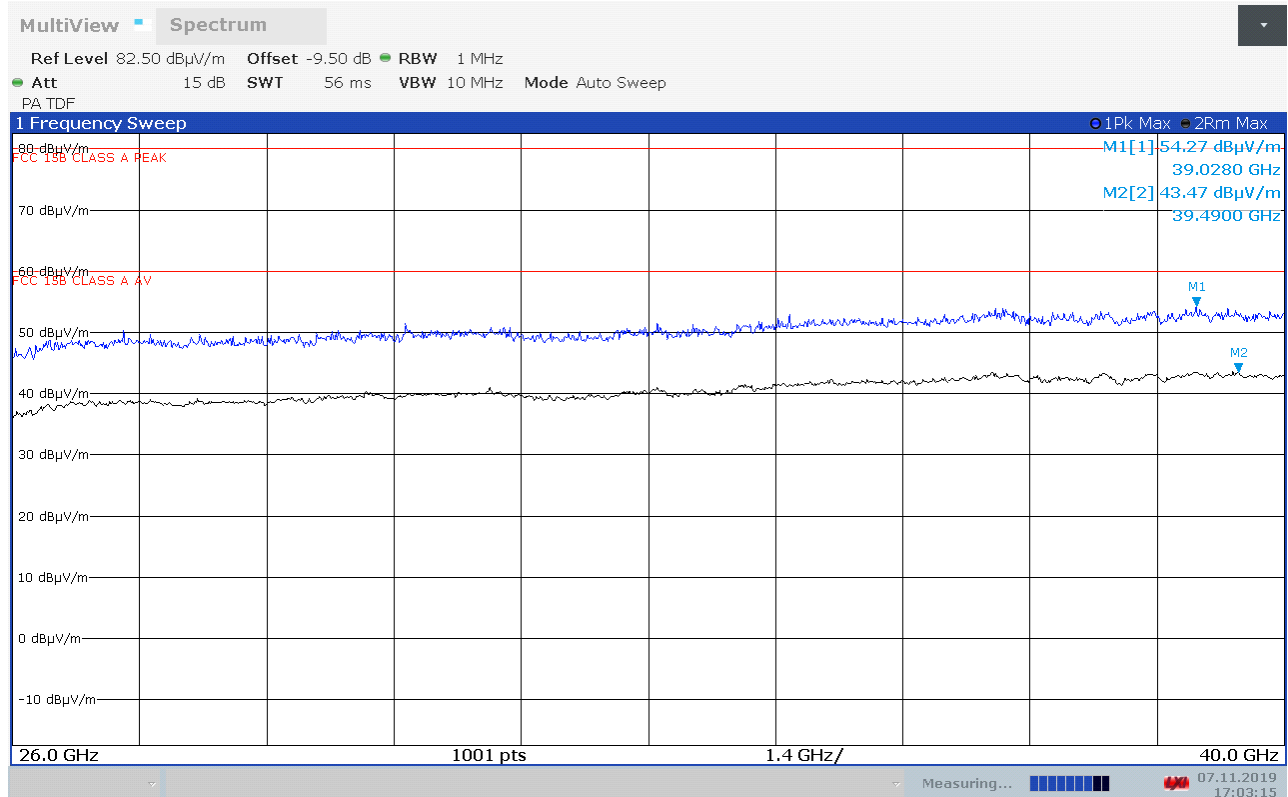


EMISSION SPECTRUM (VERTICAL POLARIZATION) AND MEASUREMENTS DATA

1-18GHz, Vertical Polarization:

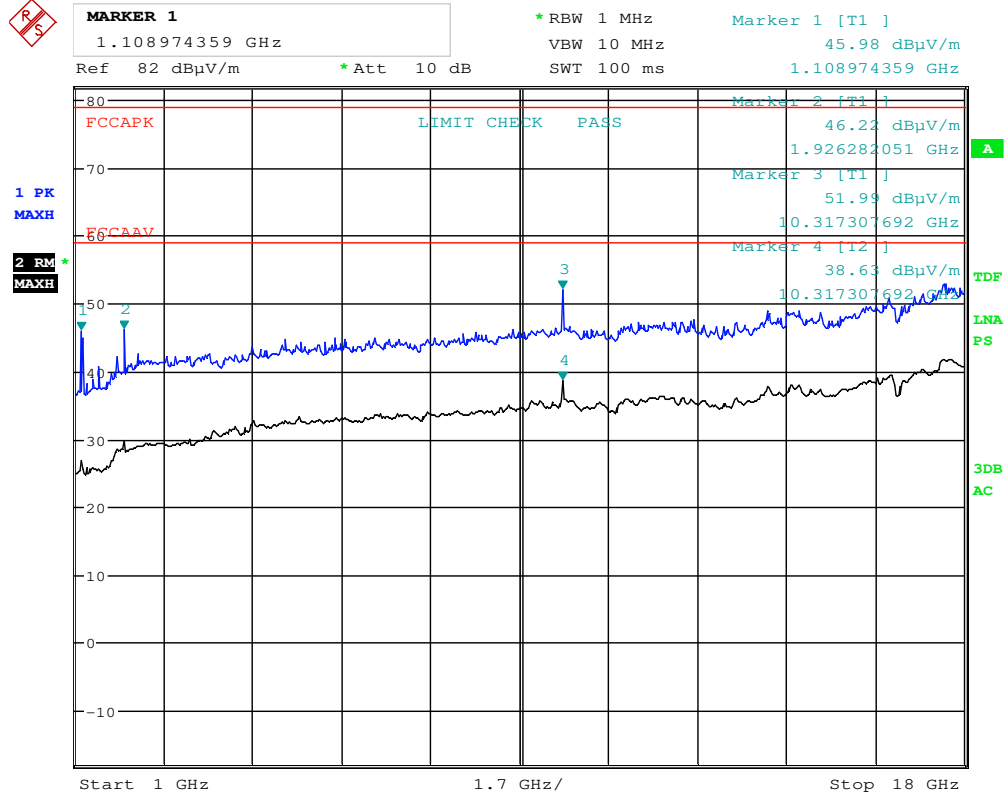


Date: 7.NOV.2019 15:56:27

18-26GHz, Vertical Polarization:

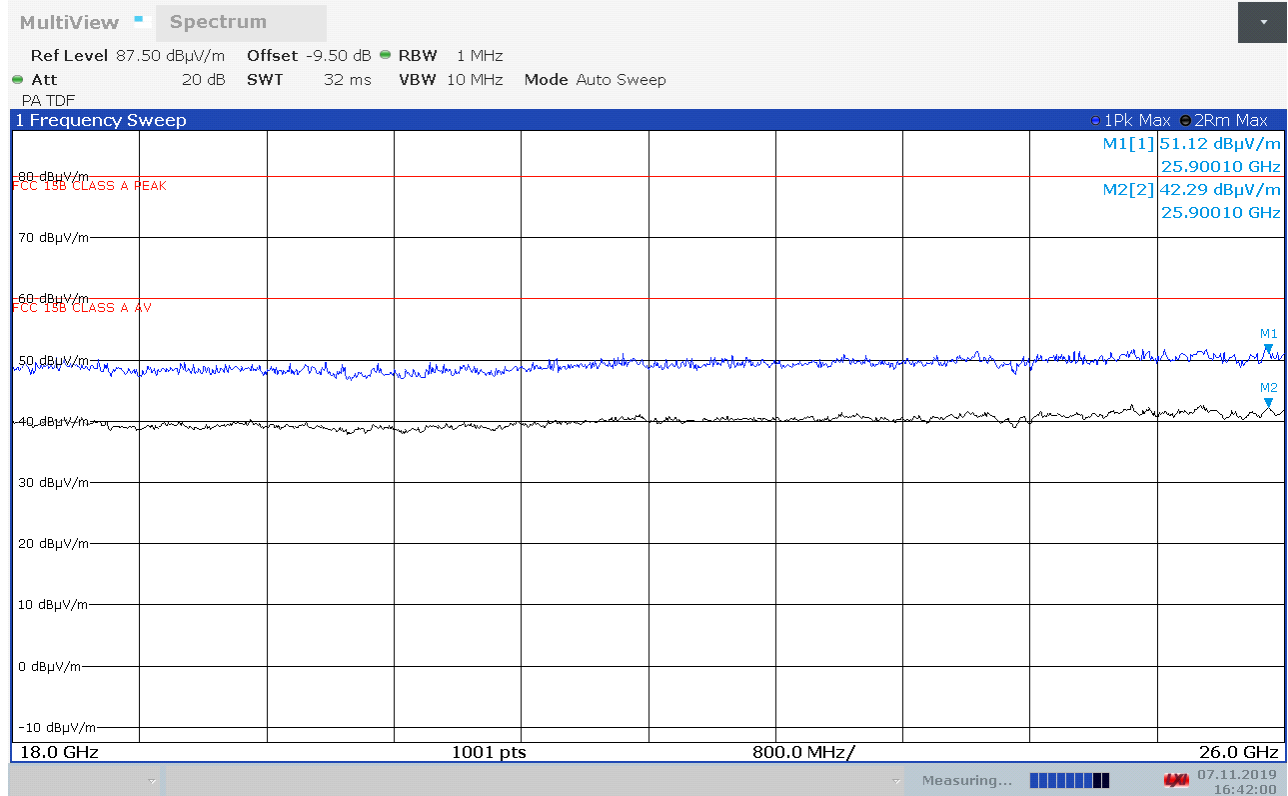

26-40GHz, Vertical Polarization:

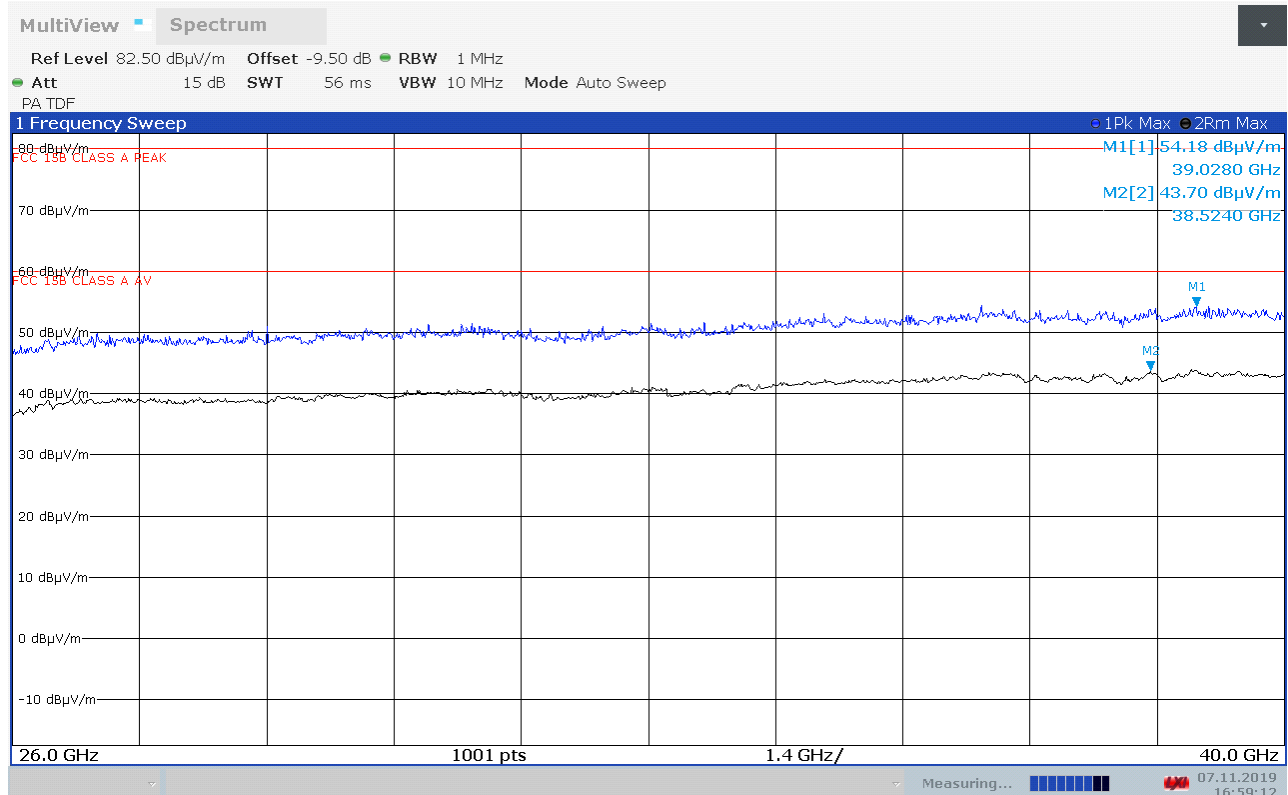

Annexes

PHOTOS

Test set-up for EMC emissions measurements

