



## **FCC TEST REPORT**

**FCC ID: 2ATQZ-W900**

On Behalf of

Shenzhen Mooer Audio Co.,Ltd

Electric Guitar

Model No.: See Annex for details

Prepared for : Shenzhen Mooer Audio Co.,Ltd  
Address : 6F, Unit D, Jinghang Building, Liuxian 3rd Road, Baoan 71 District,  
Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2211206-C01-R01  
Date of Receipt : December 7, 2022  
Date of Test : December 7, 2022-December 26, 2022  
Date of Report : December 26, 2022  
Version Number : V0

## TABLE OF CONTENTS

| <b>Description</b>  | <b>Page</b> |
|---|-------------|
| <b>1. Summary Of Standards And Results.....</b>                   | <b>6</b>    |
| 1.1. Description of Standards and Results .....                   | 6           |
| <b>2. General Information.....</b>                                | <b>7</b>    |
| 2.1. Description of Device (EUT) .....                            | 7           |
| 2.2. Accessories of Device (EUT) .....                            | 8           |
| 2.3. Tested Supporting System Details .....                       | 8           |
| 2.4. Block Diagram of connection between EUT and simulators ..... | 8           |
| 2.5. Test Mode Description .....                                  | 8           |
| 2.6. Test Conditions .....  | 9           |
| 2.7. Test Facility.....   | 9           |
| 2.8. Measurement Uncertainty .....                                | 9           |
| 2.9. Test Equipment List .....                                    | 10          |
| <b>3. Maximum Peak Output Power .....</b>                         | <b>12</b>   |
| 3.1. Limit .....  | 12          |
| 3.2. Test Procedure .....   | 12          |
| 3.3. Test Setup.....  | 12          |
| 3.4. Test Result.....   | 12          |
| <b>4. Bandwidth .....</b>   | <b>13</b>   |
| 4.1. Limit .....  | 13          |
| 4.2. Test Procedure .....   | 13          |
| 4.3. Test Result.....   | 13          |
| <b>5. Carrier Frequency Separation .....</b>                      | <b>20</b>   |
| 5.1. Limit .....  | 20          |
| 5.2. Test Procedure .....   | 20          |
| 5.3. Test Result.....   | 20          |
| <b>6. Number Of Hopping Channel .....</b>                         | <b>22</b>   |
| 6.1. Limit .....  | 22          |
| 6.2. Test Procedure .....   | 22          |
| 6.3. Test Result.....   | 22          |
| <b>7. Dwell Time .....</b>  | <b>24</b>   |
| 7.1. Test limit.....  | 24          |
| 7.2. Test Procedure .....   | 24          |
| 7.3. Test Result.....   | 24          |
| <b>8. Radiated Emissions.....</b>                                 | <b>32</b>   |
| 8.1. Limit .....  | 32          |
| 8.2. Block Diagram of Test setup.....                             | 33          |
| 8.3. Test Procedure .....   | 34          |
| 8.4. Test Result.....   | 34          |
| <b>9. Band Edge Compliance .....</b>                              | <b>42</b>   |

---

|  |           |
|--|-----------|
| 9.1. Block Diagram of Test Setup .....         | 42        |
| 9.2. Limit .....                               | 42        |
| 9.3. Test Procedure .....                      | 42        |
| 9.4. Test Result.....                          | 42        |
| <b>10. Power Line Conducted Emissions.....</b> | <b>49</b> |
| 10.1. Block Diagram of Test Setup .....        | 49        |
| 10.2. Limit .....                              | 49        |
| 10.3. Test Procedure .....                     | 49        |
| 10.4. Test Result.....                         | 50        |
| <b>11. Antenna Requirements .....</b>          | <b>53</b> |
| 11.1. Limit .....                              | 53        |
| 11.2. Result .....                             | 53        |
| <b>12. Test Setup Photo .....</b>              | <b>54</b> |
| 12.1. Photos of Radiated emission.....         | 54        |
| 12.2. Photos of Conducted Emission test .....  | 55        |
| <b>13. EUT Photo .....</b>                     | <b>56</b> |
| <b>14. Annex.....</b>                          | <b>69</b> |



### Revision History

| Revision | Issue Date        | Revisions              | Revised By |
|----------|-------------------|------------------------|------------|
| V0       | December 26, 2022 | Initial released Issue | Yannis Wen |

## 1. Summary Of Standards And Results

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

| Test Item                      | Standards Paragraph   | Result |
|--------------------------------|---|--------|
| Maximum Peak Output Power      | FCC Part 15: 15.247(b)(1)   | P      |
| Bandwidth                      | FCC Part 15: 15.215   | P      |
| Carrier Frequency Separation   | FCC Part 15: 15.247(a)(1)   | P      |
| Number Of Hopping Channel      | FCC Part 15: 15.247(a)(1)   | P      |
| Dwell Time                     | FCC Part 15: 15.247(a)(1)   | P      |
| Radiated Emission              | FCC Part 15: 15.209<br>FCC Part 15: 15.247(d)   | P      |
| Band Edge Compliance           | FCC Part 15: 15.247(d)  | P      |
| Power Line Conducted Emissions | FCC Part 15: 15.207   | P      |
| Antenna requirement            | FCC Part 15: 15.203   | P      |
| Note:                          | 1. P is an abbreviation for Pass.<br>2. F is an abbreviation for Fail.<br>3. N/A is an abbreviation for Not Applicable. |        |


## 2. General Information

### 2.1. Description of Device (EUT)

Description/PMN : Electric Guitar

Model :  
Number/HVIN(s) : See Annex for details

Diff. : There is no difference except the name of the model. All tests are made with the W900 model.

Trademark : 

Test Voltage : DC 3.8V by battery, DC 5V from USB

Radio Technology : Bluetooth(BDR, EDR)

Operation : 2402MHz-2480MHz  
frequency

Modulation : GFSK,  $\pi/4$ -DQPSK

Channel No. : 79 Channels for EDR

Channel Separation : 1MHz

Antenna Type : Chip Antenna, max gain 1.5dBi.  
(Antenna information is provided by applicant.)

Software version : V3.0.0

Hardware version : V02

Remark:

1. The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for Bluetooth EDR function, and there is no other transmitter involved.

2. EUT has two BT antennas, one of them is PIFA Antenna, max. gain -0.58dBi, the other one is chip antenna, max. gain 1.5dBi, So this report evaluates the one with the largest antenna gain, that is the worst data.


## 2.2. Accessories of Device (EUT)

|              |     |
|--------------|-----|
| Accessories  | : / |
| Manufacturer | : / |
| Model        | : / |
| Input        | : / |
| Output       | : / |

## 2.3. Tested Supporting System Details

| No. | Description              | Manufacturer | Model        | Serial Number | Certification or SDOC |
|-----|--------------------------|--------------|--------------|---------------|-----------------------|
| 1.  | Adapter                  | Huoniu       | HNFCQC3024UU | --            | --                    |
| 2.  | Speaker                  | Mooer        | --           | --            | --                    |
| 3.  | GTRS Wireless Footswitch | Mooer        | GWF4         | --            | --                    |

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Test Mode Description

The test software “FCC\_assist\_1.0.1.2.app” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

| Tested mode, channel, and data rate information  |             |                 |
|--|-------------|-----------------|
| Mode   | Channel     | Frequency (MHz) |
| Carrier Tx Mode                                  | CH0         | 2402            |
|  | CH39        | 2441            |
|  | CH78        | 2480            |
| GFSK/ $\pi/4$ -DQPSK hopping on Tx Mode          | CH0 to CH78 | 2402 to 2480    |
| GFSK/ $\pi/4$ -DQPSK hopping hopping off Tx Mode | CH0         | 2402            |
|  | CH39        | 2441            |
|  | CH78        | 2480            |

| Setting output power (Max) |                |           |
|----------------------------|----------------|-----------|
| GFSK                       | $\pi/4$ -DQPSK | 8DPSK     |
| $0 \pm 1$                  | $0 \pm 1$      | $0 \pm 1$ |



## 2.6. Test Conditions

| Items              | Required  | Actual |
|--------------------|-----------|--------|
| Temperature range: | 15-35°C   | 25°C   |
| Humidity range:    | 25-75%    | 56%    |
| Pressure range:    | 86-106kPa | 98kPa  |

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

| Item   | Uncertainty               |
|--|---------------------------|
| Uncertainty for Power point Conducted Emissions Test                     | 1.63dB                    |
| Uncertainty for Radiation Emission test in 3m chamber<br>(below 30MHz)   | 3.5dB                     |
| Uncertainty for Radiation Emission test in 3m chamber<br>(30MHz to 1GHz) | 3.74dB(Polarize: V)       |
|  | 3.76dB(Polarize: H)       |
| Uncertainty for Radiation Emission test in 3m chamber<br>(1GHz to 25GHz) | 3.77dB(Polarize: V)       |
|  | 3.80dB(Polarize: H)       |
| Uncertainty for radio frequency  | $5.06 \times 10^{-8}$ GHz |
| Uncertainty for conducted RF Power                                       | 0.40dB                    |
| Uncertainty for temperature  | 0.2°C                     |
| Uncertainty for humidity   | 1%                        |
| Uncertainty for DC and low frequency voltages                            | 0.06%                     |

## 2.9. Test Equipment List

| Equipment                   | Manufacture   | Model No.            | Firmware version | Serial No.                 | Last cal.  | Cal Interval |
|-----------------------------|---------------|----------------------|------------------|----------------------------|------------|--------------|
| 9*6*6 anechoic chamber      | CHENYU        | 9*6*6                | /                | N/A                        | 2022.05.17 | 3Year        |
| Spectrum analyzer           | ROHDE&SCHWARZ | FSV40-N              | 2.3              | 102137                     | 2022.08.22 | 1Year        |
| Spectrum analyzer           | Agilent       | N9020A               | A.14.16          | MY499100060                | 2022.08.22 | 1Year        |
| Receiver                    | ROHDE&SCHWARZ | ESR                  | 2.28 SP1         | 1316.3003K03-10<br>2082-Wa | 2022.08.22 | 1Year        |
| Receiver                    | R&S           | ESCI                 | 4.42 SP1         | 101165                     | 2022.08.22 | 1Year        |
| Bilog Antenna               | Schwarzbeck   | VULB 9168            | /                | VULB 9168#627              | 2021.08.30 | 2Year        |
| Horn Antenna                | SCHWARZBECK   | BBHA 9120<br>D       | /                | 2106                       | 2021.08.30 | 2Year        |
| Active Loop Antenna         | SCHWARZBECK   | FMZB<br>1519B        | /                | 00059                      | 2021.08.30 | 2Year        |
| RF Cable                    | Resenberger   | Cable 1              | /                | RE1                        | 2022.08.22 | 1Year        |
| RF Cable                    | Resenberger   | Cable 2              | /                | RE2                        | 2022.08.22 | 1Year        |
| RF Cable                    | Resenberger   | Cable 3              | /                | CE1                        | 2022.08.22 | 1Year        |
| Pre-amplifier               | HP            | HP8347A              | /                | 2834A00455                 | 2022.08.22 | 1Year        |
| Pre-amplifier               | Agilent       | 8449B                | /                | 3008A02664                 | 2022.08.22 | 1Year        |
| L.I.S.N.#1                  | Schwarzbeck   | NSLK8126             | /                | 8126-466                   | 2022.08.22 | 1Year        |
| L.I.S.N.#2                  | ROHDE&SCHWARZ | ENV216               | /                | 101043                     | 2022.08.23 | 1 Year       |
| Horn Antenna                | SCHWARZBECK   | BBHA9170             | /                | 00946                      | 2021.08.30 | 2 Year       |
| Preamplifier                | SKET          | LNPA_1840<br>-50     | /                | SK2018101801               | 2022.08.22 | 1 Year       |
| Power Meter                 | Agilent       | E9300A               | /                | MY41496628                 | 2022.08.22 | 1 Year       |
| Power Sensor                | DARE          | RPR3006W             | /                | 15100041SNO91              | 2022.08.22 | 1 Year       |
| Temp. & Humid. Chamber      | Weihuang      | WHTH-1000<br>-40-880 | /                | 100631                     | 2022.08.22 | 1 Year       |
| Switching Mode Power Supply | JUNKE         | JK12010S             | /                | 20140927-6                 | 2022.08.22 | 1 Year       |
| Adjustable attenuator       | MWRfTest      | N/A                  | /                | N/A                        | N/A        | N/A          |
| 10dB Attenuator             | Mini-Circuits | DC-6G                | /                | N/A                        | N/A        | N/A          |

| <b>Software Information</b> |               |              |           |
|-----------------------------|---------------|--------------|-----------|
| Test Item                   | Software Name | Manufacturer | Version   |
| RE                          | EZ-EMC        | EZ           | Alpha-3A1 |
| CE                          | EZ-EMC        | EZ           | Alpha-3A1 |
| RF-CE                       | MTS 8310      | MW           | V2.0.0.0  |

### 3. Maximum Peak Output Power

#### 3.1. Limit


Please refer FCC part 15.247...

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

#### 3.3. Test Setup



#### 3.4. Test Result

| Mode             | Freq (MHz) | PK Output Power (dBm) | Limit (dBm) | Result |
|------------------|------------|-----------------------|-------------|--------|
| GFSK             | 2402       | -1.848                | 21          | Pass   |
|                  | 2441       | -1.274                | 21          | Pass   |
|                  | 2480       | -2.728                | 21          | Pass   |
| $\pi$ /4-DQPSK   | 2402       | -1.585                | 21          | Pass   |
|                  | 2441       | -1.492                | 21          | Pass   |
|                  | 2480       | -2.705                | 21          | Pass   |
| Conclusion: PASS |            |                       |             |        |

## 4. Bandwidth

### 4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### 4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3. Test Result


| Condition | Mode  | Frequency (MHz) | Antenna | 99% OBW (MHz) | -20 dB Bandwidth (MHz) | Limit -20 dB Bandwidth (MHz) | Verdict |
|-----------|-------|-----------------|---------|---------------|------------------------|------------------------------|---------|
| NVNT      | 1-DH1 | 2402            | Ant 1   | 0.823         | 0.87                   | /                            | Pass    |
| NVNT      | 1-DH1 | 2441            | Ant 1   | 0.829         | 0.848                  | /                            | Pass    |
| NVNT      | 1-DH1 | 2480            | Ant 1   | 0.831         | 0.844                  | /                            | Pass    |
| NVNT      | 2-DH1 | 2402            | Ant 1   | 1.175         | 1.198                  | /                            | Pass    |
| NVNT      | 2-DH1 | 2441            | Ant 1   | 1.165         | 1.214                  | /                            | Pass    |
| NVNT      | 2-DH1 | 2480            | Ant 1   | 1.145         | 1.262                  | /                            | Pass    |

OBW NVNT 1-DH1 2402MHz Ant1

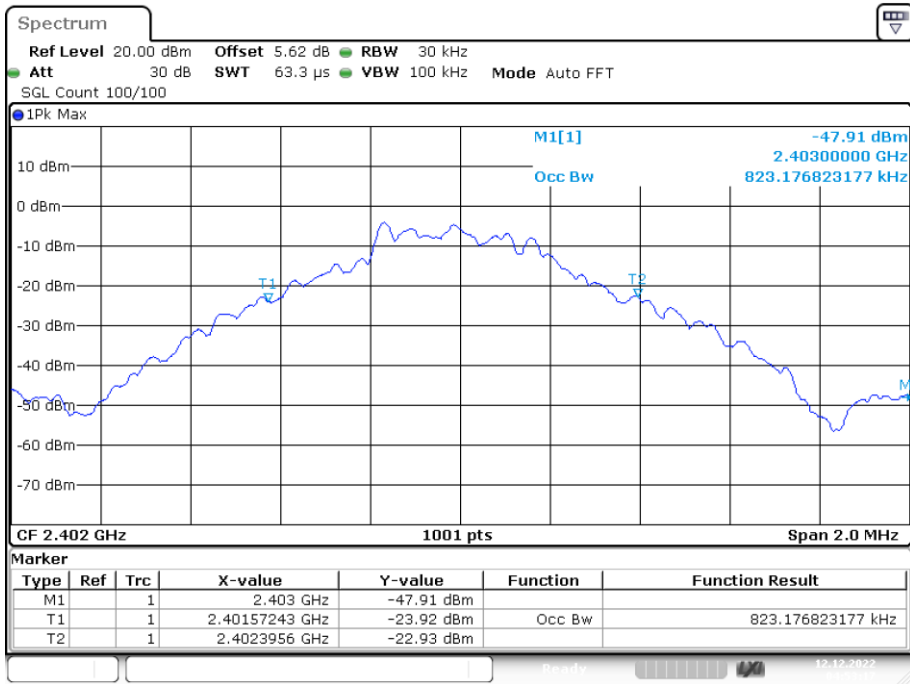


Date: 12.DEC.2022 04:53:16

-20 dB BW NVNT 1-DH1 2402MHz Ant1

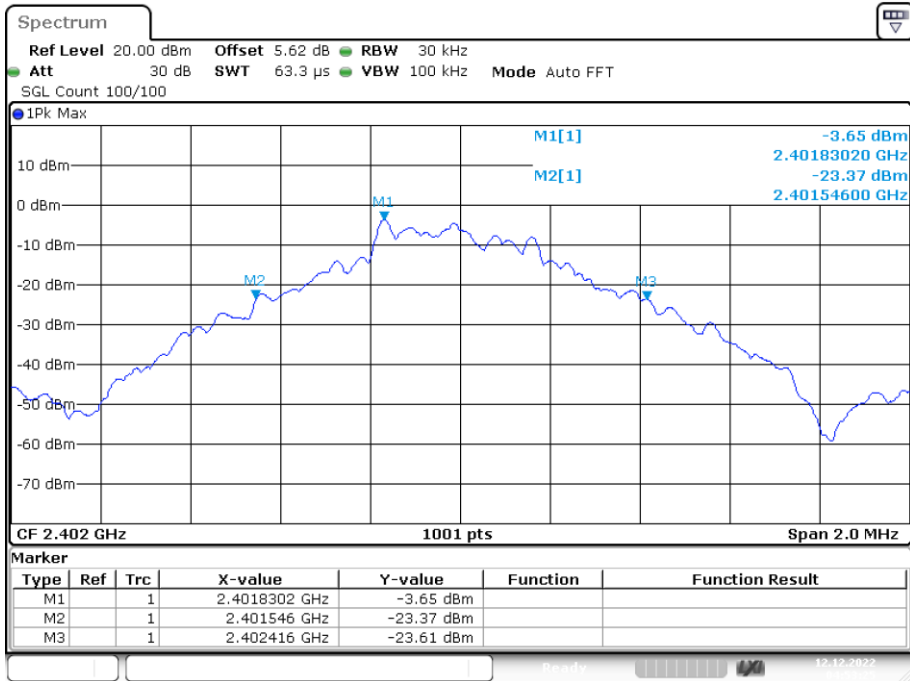


Date: 12.DEC.2022 04:53:25

OBW NVNT 1-DH1 2441MHz Ant1

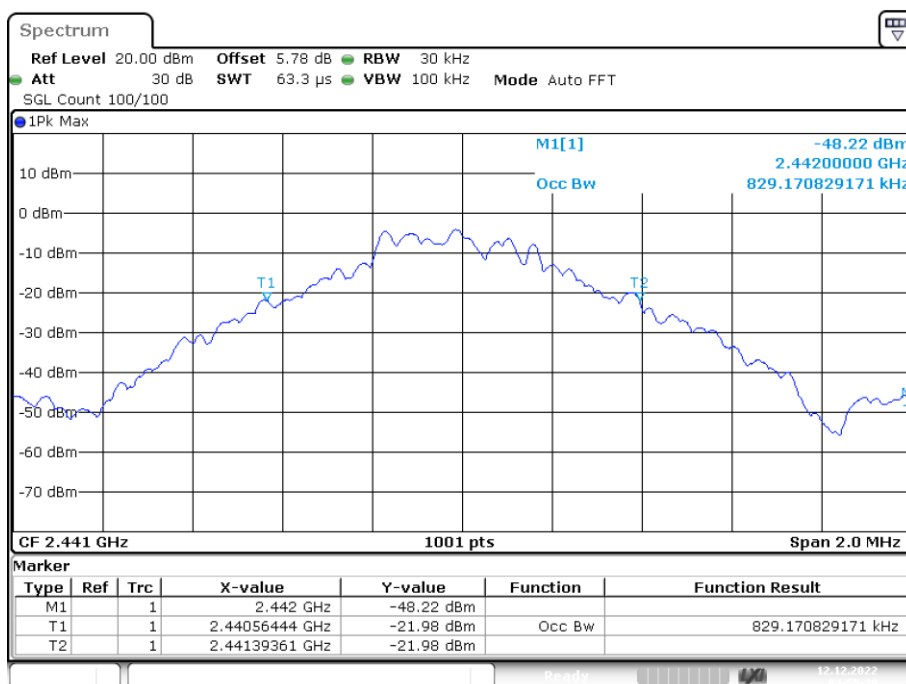


Date: 12.DEC.2022 04:55:38

-20 dB BW NVNT 1-DH1 2441MHz Ant1

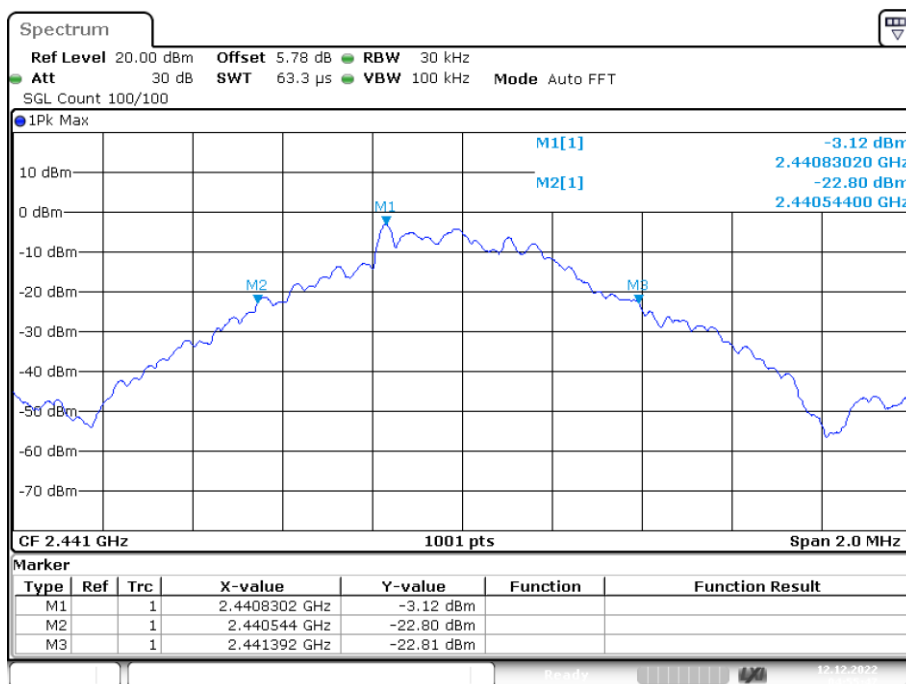


Date: 12.DEC.2022 04:55:47

OBW NVNT 1-DH1 2480MHz Ant1

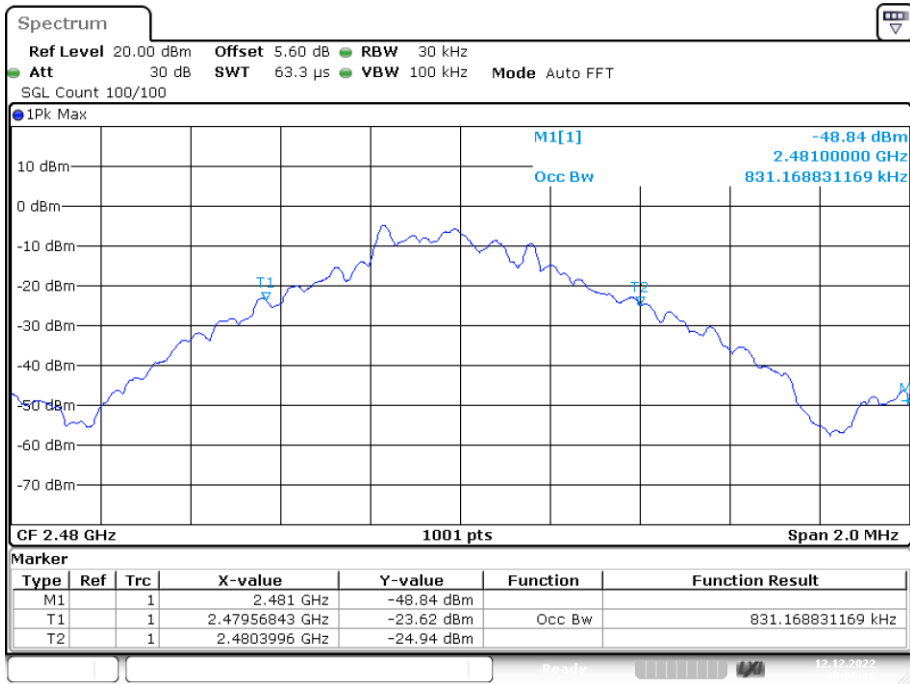

Date: 12.DEC.2022 05:05:17


-20 dB BW NVNT 1-DH1 2480MHz Ant1

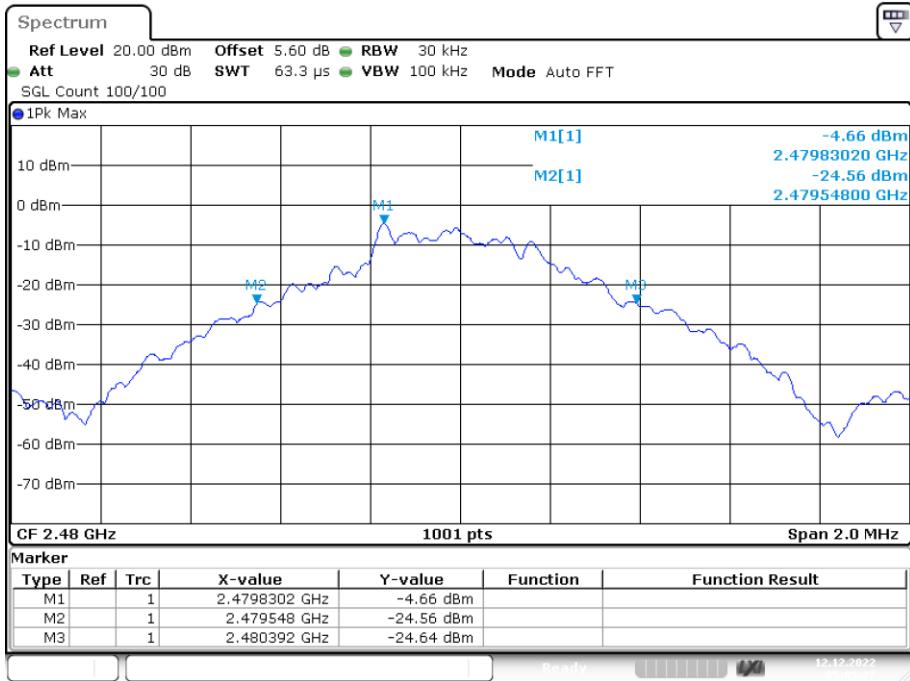

Date: 12.DEC.2022 05:05:27




OBW NVNT 2-DH1 2402MHz Ant1

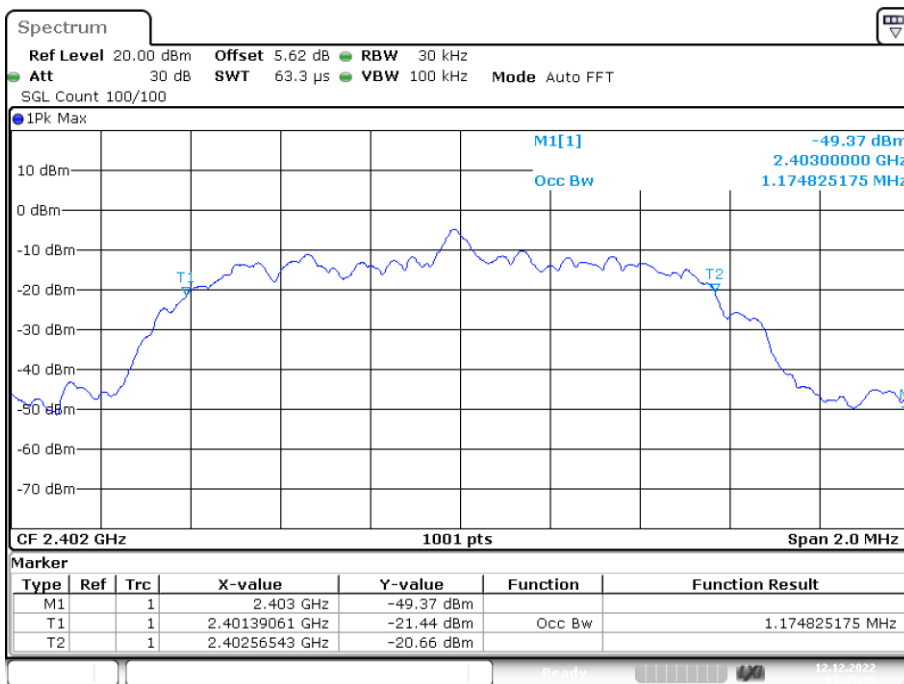


Date: 12.DEC.2022 05:34:59

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

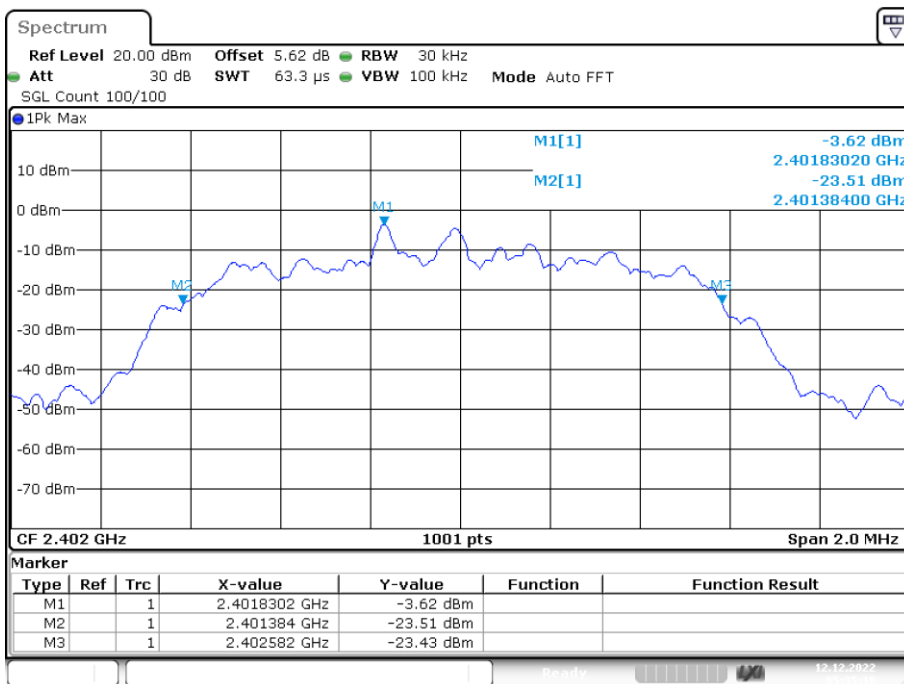


Date: 12.DEC.2022 05:35:10

OBW NVNT 2-DH1 2441MHz Ant1

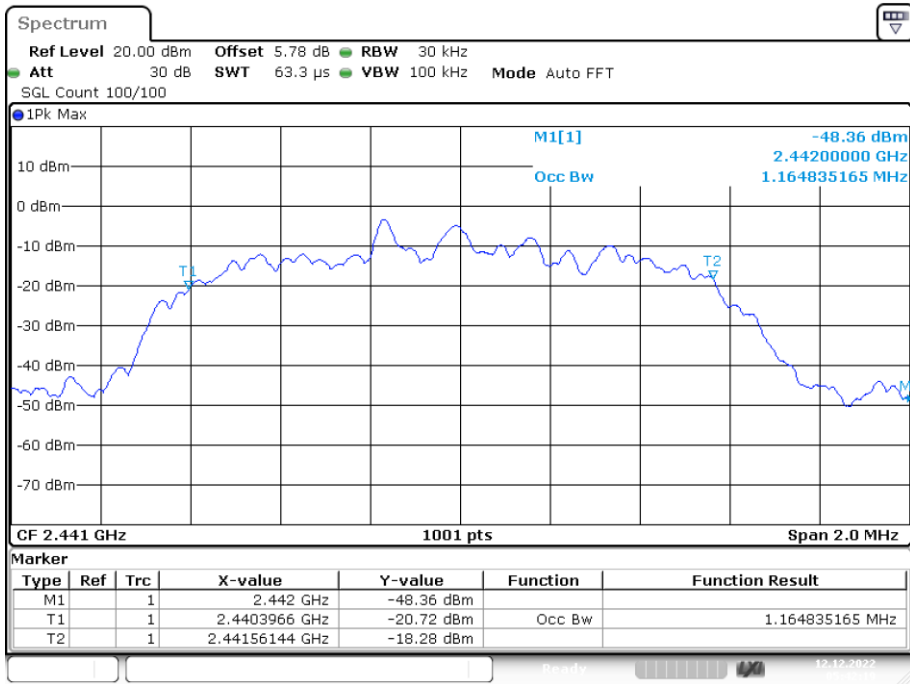


Date: 12.DEC.2022 05:42:18

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

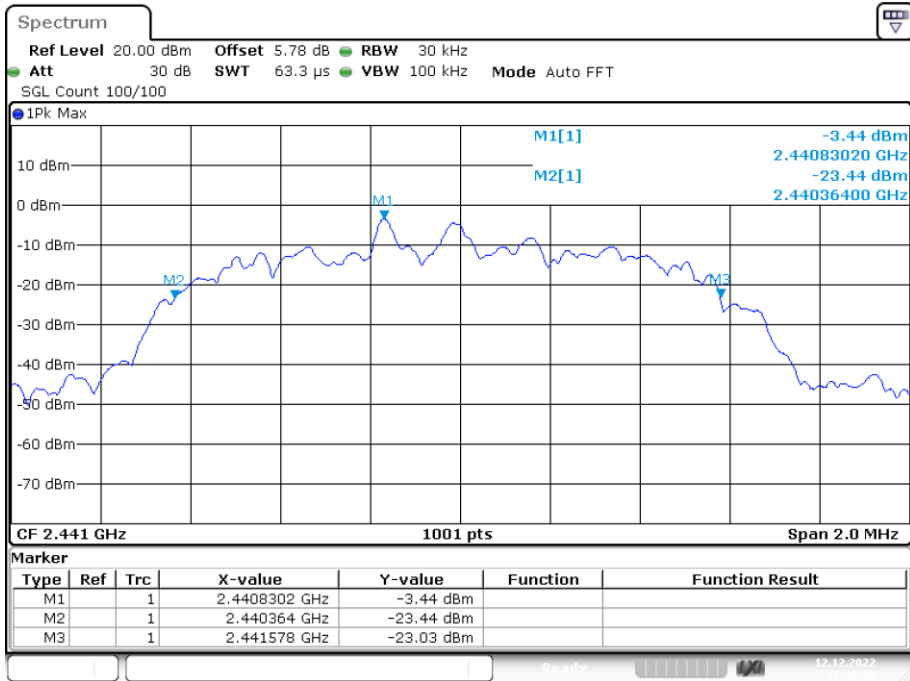


Date: 12.DEC.2022 05:42:29

OBW NVNT 2-DH1 2480MHz Ant1

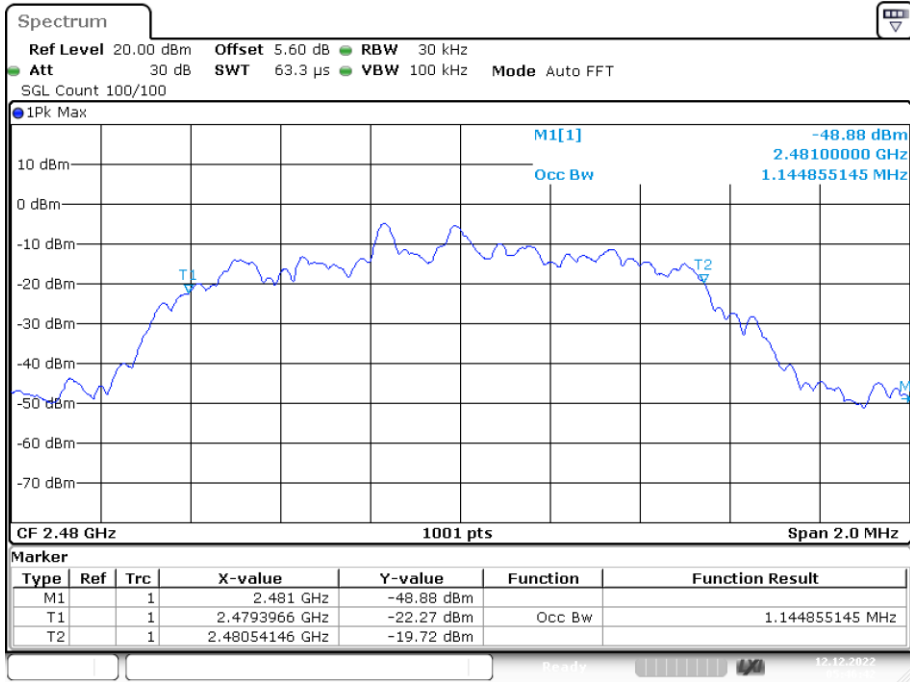

Date: 12.DEC.2022 05:46:42

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

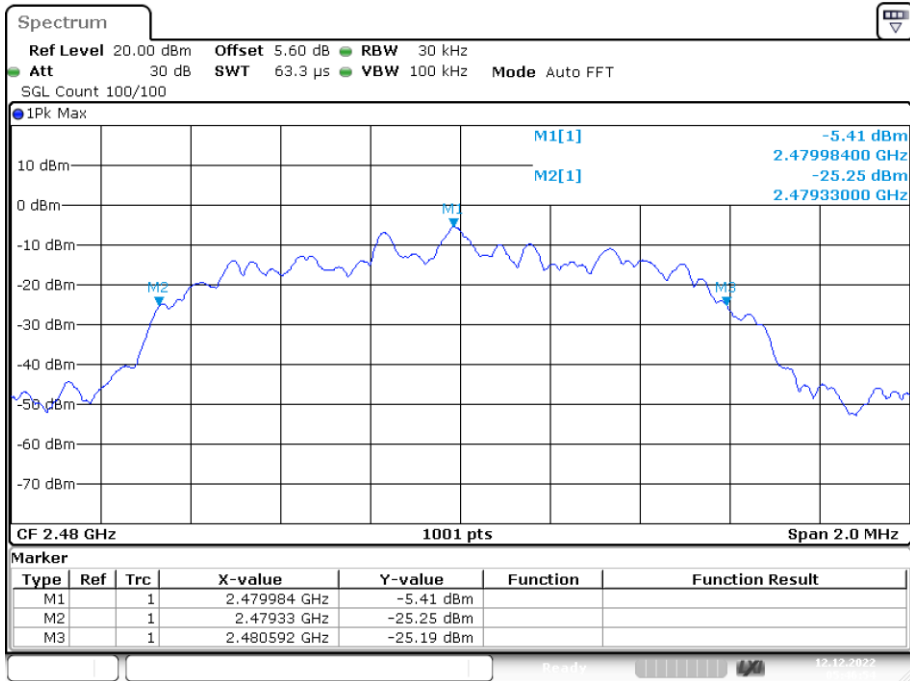

Date: 12.DEC.2022 05:46:54

## 5. Carrier Frequency Separation

### 5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


### 5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

### 5.3. Test Result


| Condition | Mode  | Antenna | Hopping Freq1 (MHz) | Hopping Freq2 (MHz) | HFS (MHz) | Limit (MHz) | Verdict |
|-----------|-------|---------|---------------------|---------------------|-----------|-------------|---------|
| NVNT      | 1-DH1 | Ant1    | 2441.006            | 2442.006            | 1         | 0.565       | Pass    |
| NVNT      | 2-DH1 | Ant1    | 2440.83             | 2441.83             | 1         | 0.809       | Pass    |

CFS NVNT 1-DH1 2441MHz Ant1

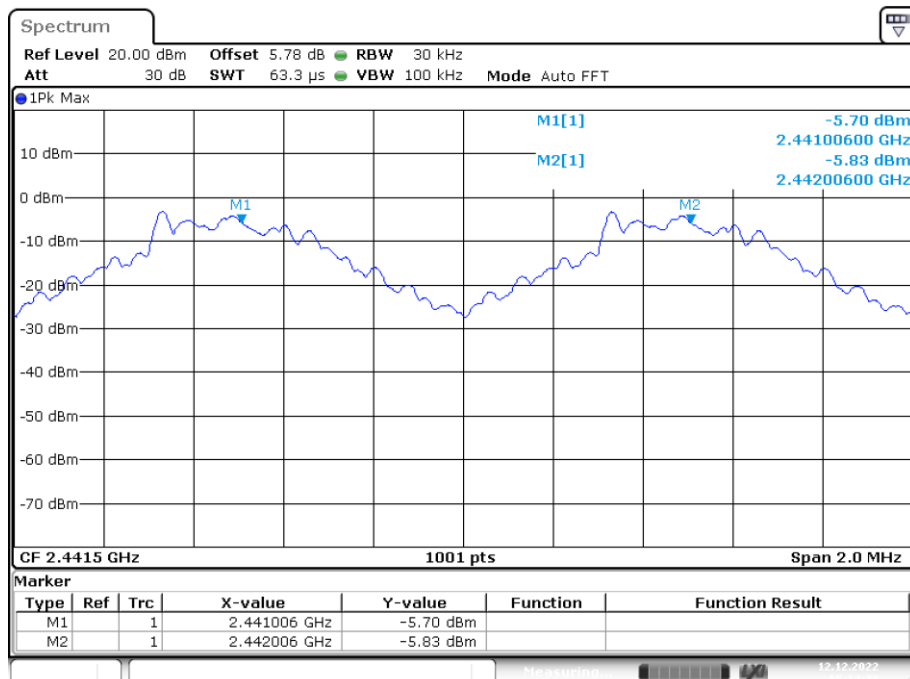

Date: 12.DEC.2022 05:14:29

CFS NVNT 2-DH1 2441MHz Ant1

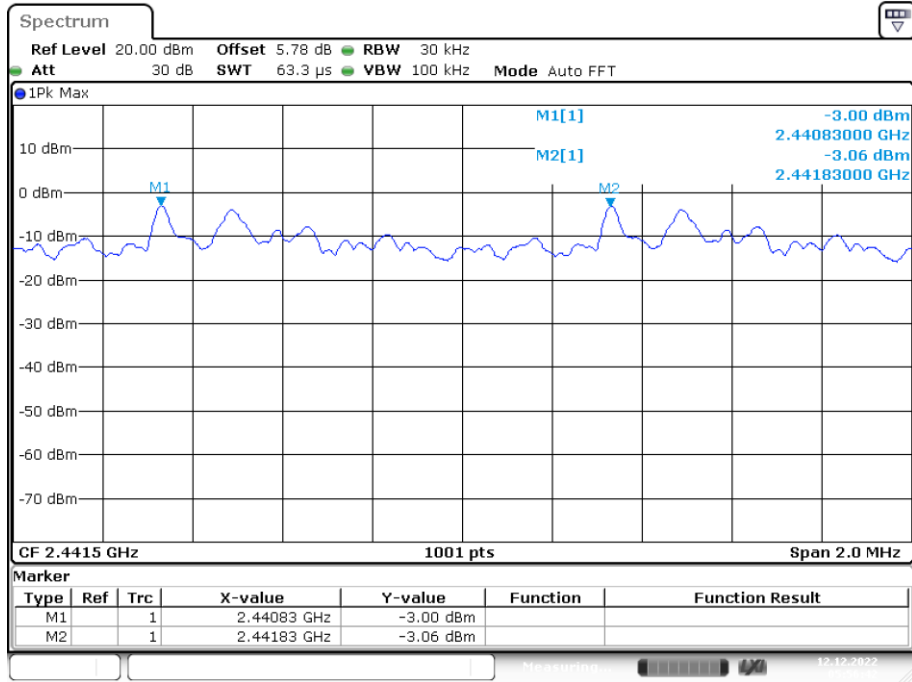

Date: 12.DEC.2022 05:56:42

## 6. Number Of Hopping Channel

### 6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


### 6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

### 6.3. Test Result


| Condition | Mode  | Hopping Number | Limit | Verdict |
|-----------|-------|----------------|-------|---------|
| NVNT      | 1-DH1 | 79             | 15    | Pass    |
| NVNT      | 2-DH1 | 79             | 15    | Pass    |

Hopping No. NVNT 1-DH1 2441MHz Ant1

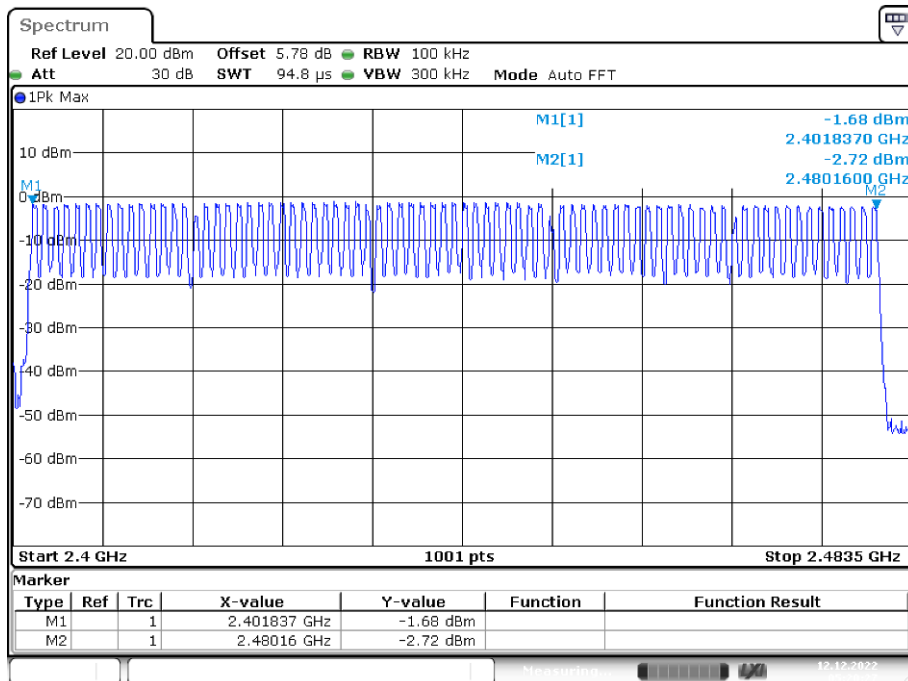

Date: 12.DEC.2022 05:20:27

Hopping No. NVNT 2-DH1 2441MHz Ant1

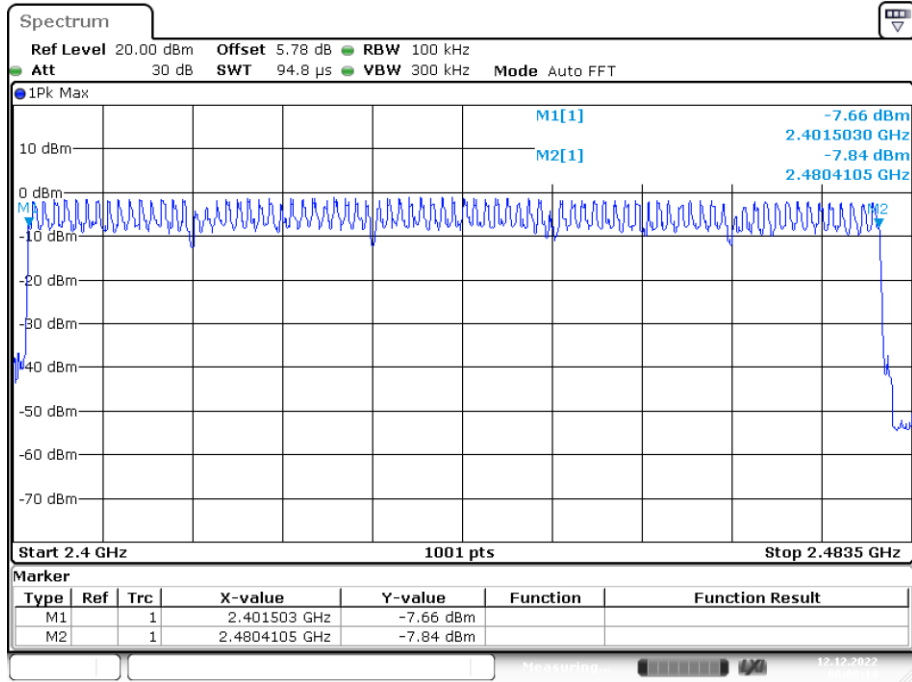

Date: 12.DEC.2022 06:00:14

## 7. Dwell Time

### 7.1. Test limit

Please refer FCC part 15.247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

### 7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result

PASS.

Detailed information please see the following page.



| Condition | Mode  | Frequency (MHz) | Antenna | Pulse Time (ms) | Total Dwell Time (ms) | Period Time (ms) | Limit (ms) | Verdict |
|-----------|-------|-----------------|---------|-----------------|-----------------------|------------------|------------|---------|
| NVNT      | 1-DH1 | 2441            | Ant1    | 0.377           | 120.640               | 31600            | 400        | Pass    |
| NVNT      | 1-DH3 | 2441            | Ant1    | 1.631           | 260.960               | 31600            | 400        | Pass    |
| NVNT      | 1-DH5 | 2441            | Ant1    | 2.881           | 307.307               | 31600            | 400        | Pass    |
| NVNT      | 2-DH1 | 2441            | Ant1    | 0.386           | 123.520               | 31600            | 400        | Pass    |
| NVNT      | 2-DH3 | 2441            | Ant1    | 1.638           | 262.080               | 31600            | 400        | Pass    |
| NVNT      | 2-DH5 | 2441            | Ant1    | 2.885           | 307.733               | 31600            | 400        | Pass    |


Note: 1. A period time = 0.4 (s) \* 79 = 31.6(s)

2. DH1 Dwell Timet = Pulse Time \* (1600/(2\*79)) \* A period time

DH3 Dwell Time = Pulse Time \* (1600/(4\*79)) \* A period time


DH5 Dwell Time = Pulse Time \* (1600/(6\*79)) \* A period time

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

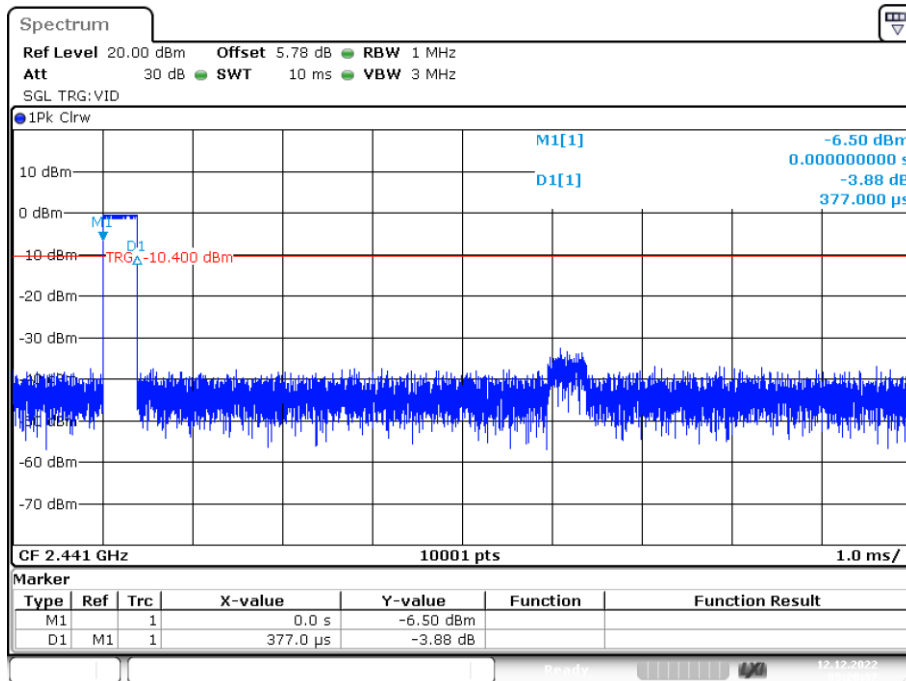


Date: 12.DEC.2022 05:20:37

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

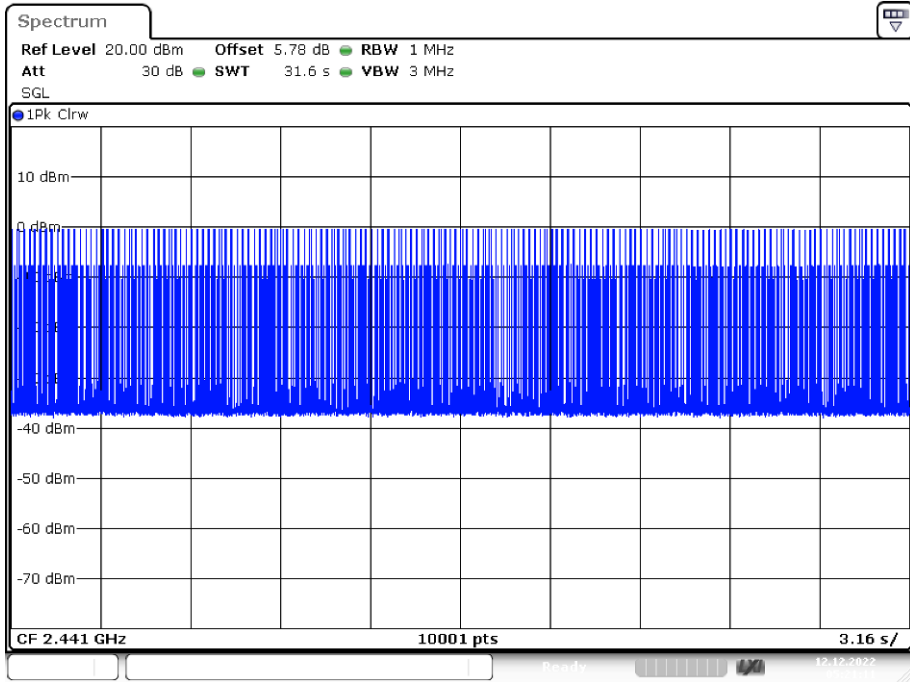


Date: 12.DEC.2022 05:21:11

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

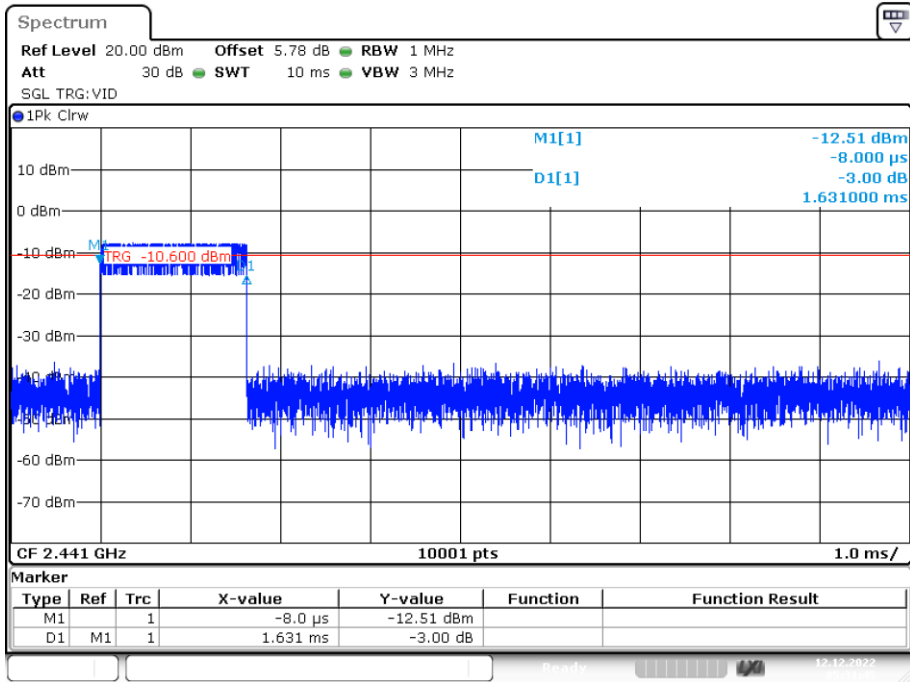


Date: 12.DEC.2022 05:31:45

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

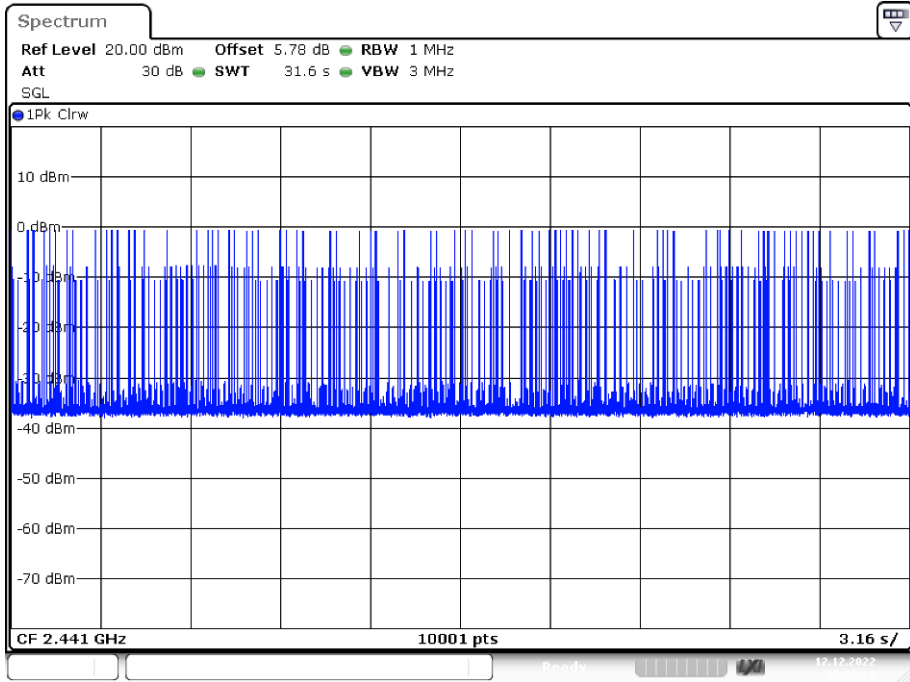


Date: 12.DEC.2022 05:32:20

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

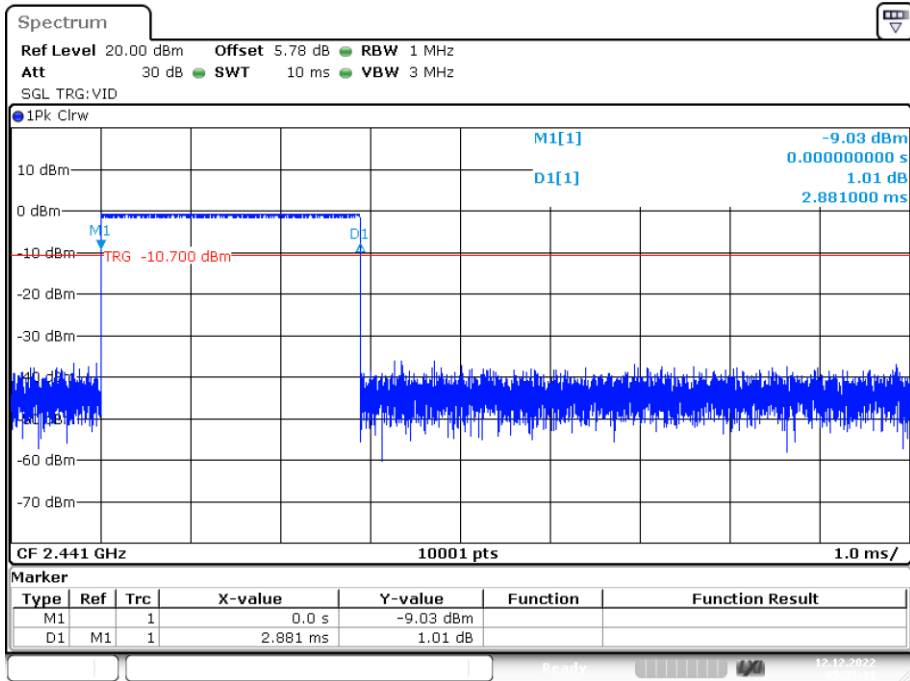


Date: 12.DEC.2022 05:33:11

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

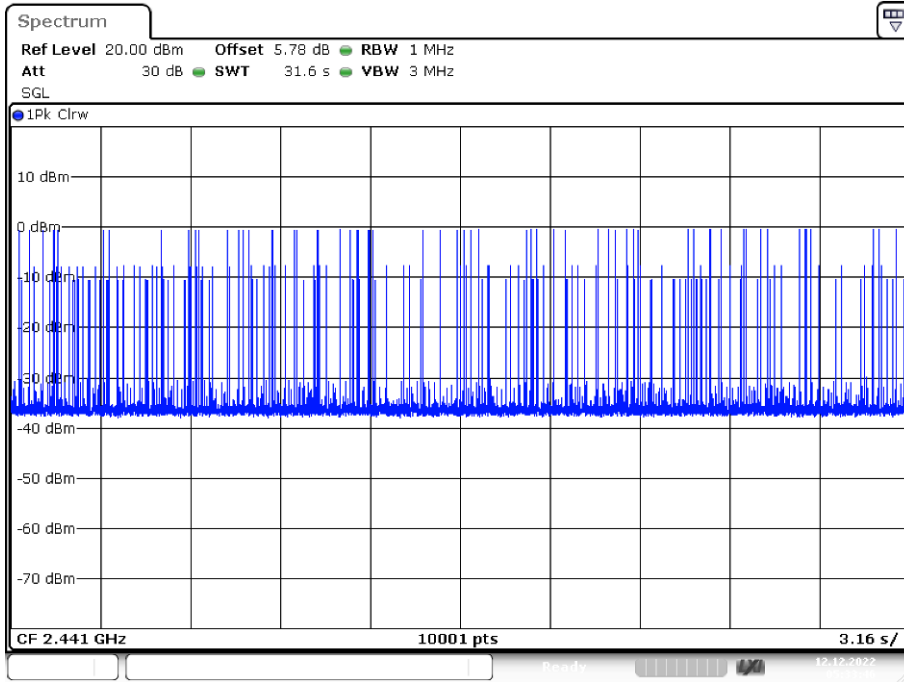


Date: 12.DEC.2022 05:33:46

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

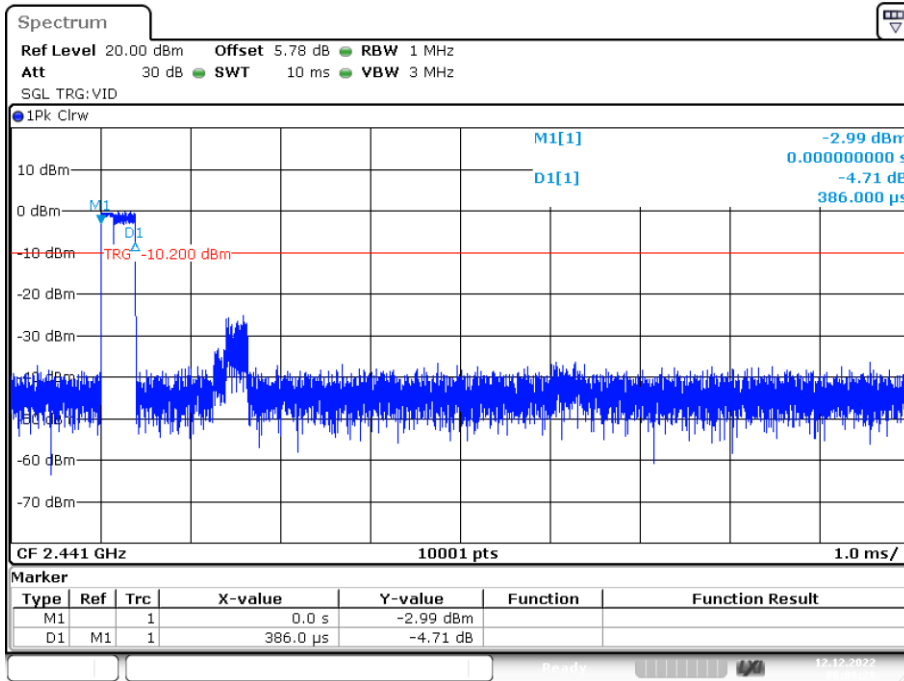


Date: 12.DEC.2022 06:06:28

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

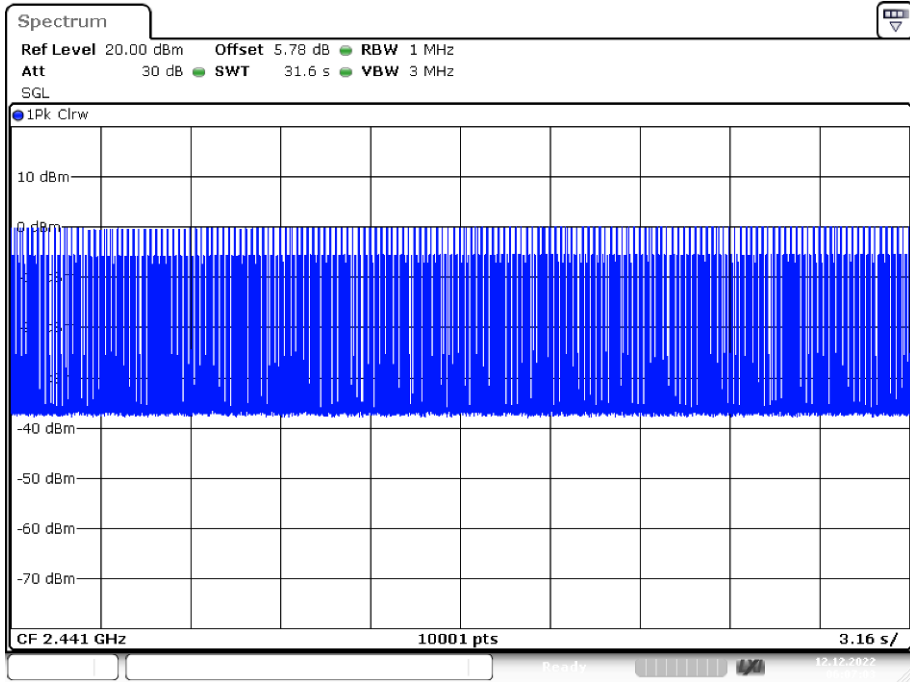


Date: 12.DEC.2022 06:07:03

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

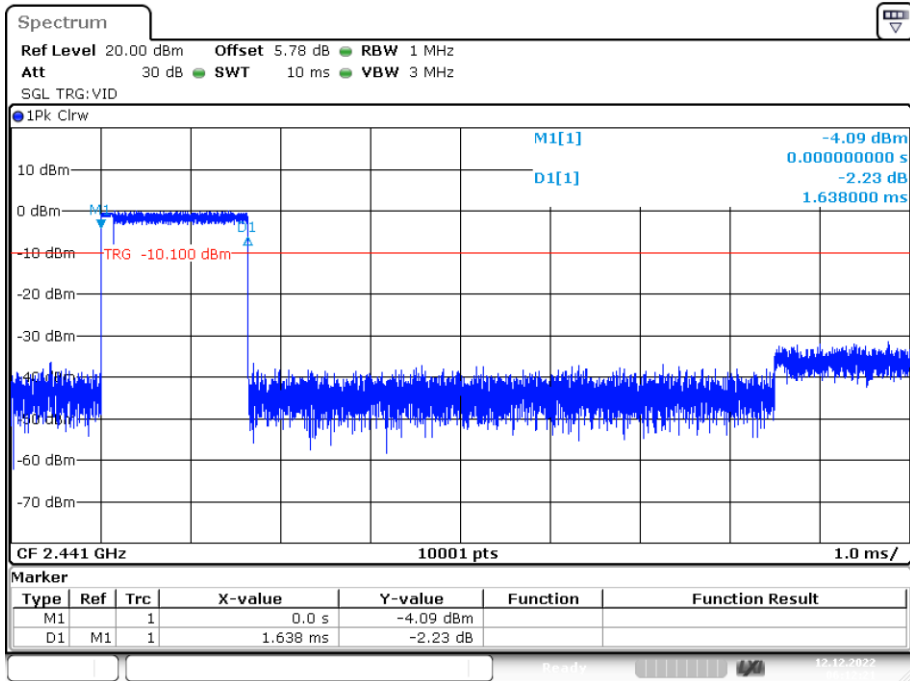


Date: 12.DEC.2022 06:12:21

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

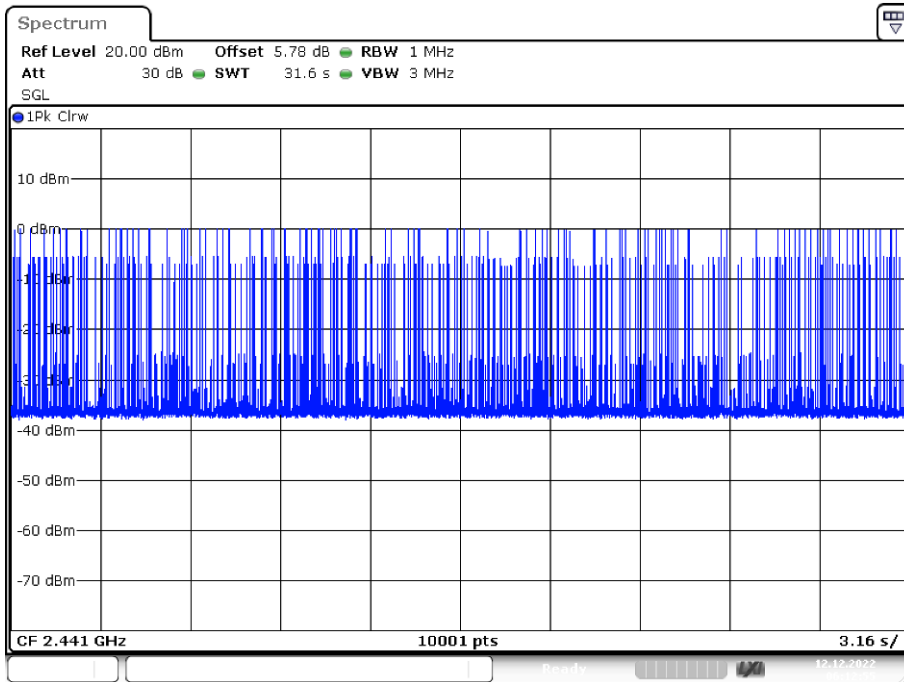


Date: 12.DEC.2022 06:12:55

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

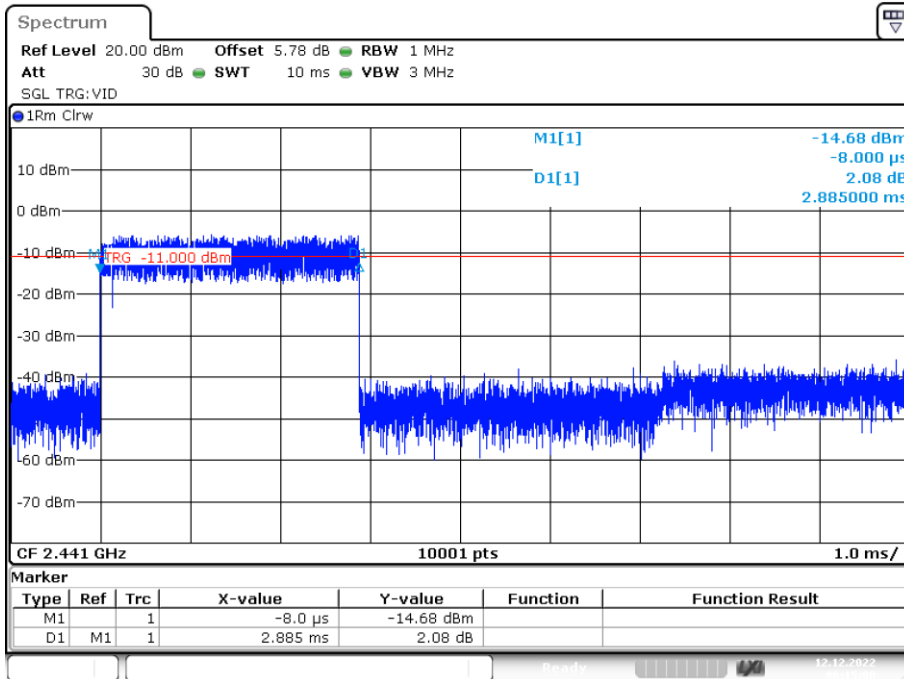

Date: 12.DEC.2022 06:15:01

### Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

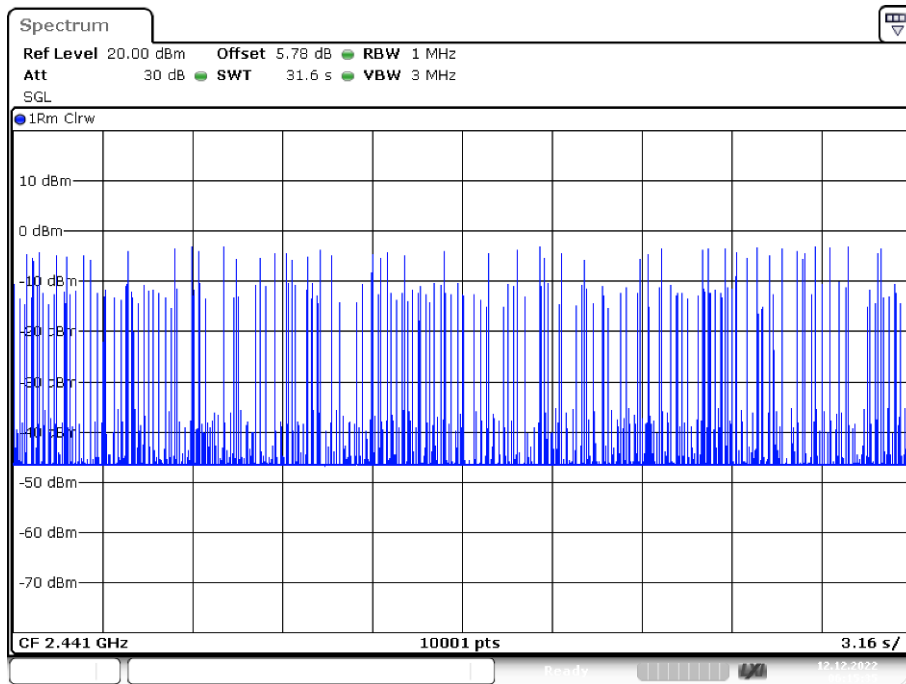

Date: 12.DEC.2022 06:15:35

## 8. Radiated Emissions

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

#### 15.209 Limit


| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT   |                                   |
|------------------|--------------------|---|-----------------------------------|
|                  |                    | $\mu\text{V}/\text{m}$  | $\text{dB}(\mu\text{V})/\text{m}$ |
| 0.009-0.490      | 300                | $2400/\text{F}(\text{KHz})$   | /                                 |
| 0.490-1.705      | 30                 | $24000/\text{F}(\text{KHz})$  | /                                 |
| 1.705-30         | 30                 | 30  | 29.5                              |
| 30 ~ 88          | 3                  | 100   | 40.0                              |
| 88 ~ 216         | 3                  | 150   | 43.5                              |
| 216 ~ 960        | 3                  | 200   | 46.0                              |
| 960 ~ 1000       | 3                  | 500   | 54.0                              |
| Above            | 1000               | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak)<br>54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) |                                   |

Note: The peak limit is 20 dB higher than the average limit




## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

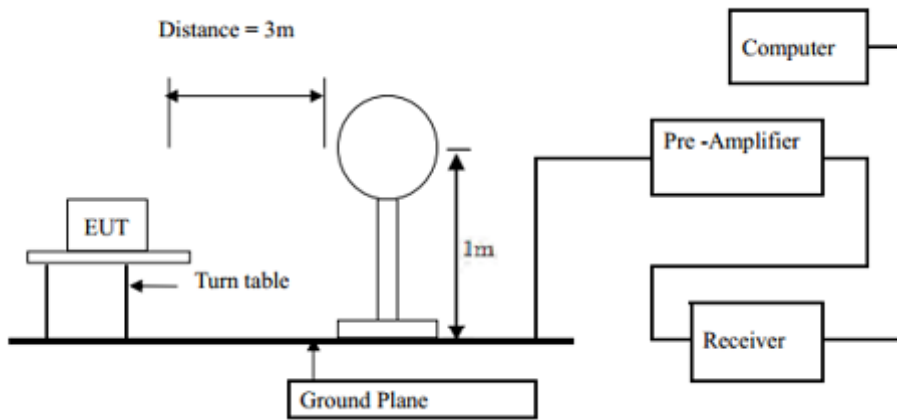

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

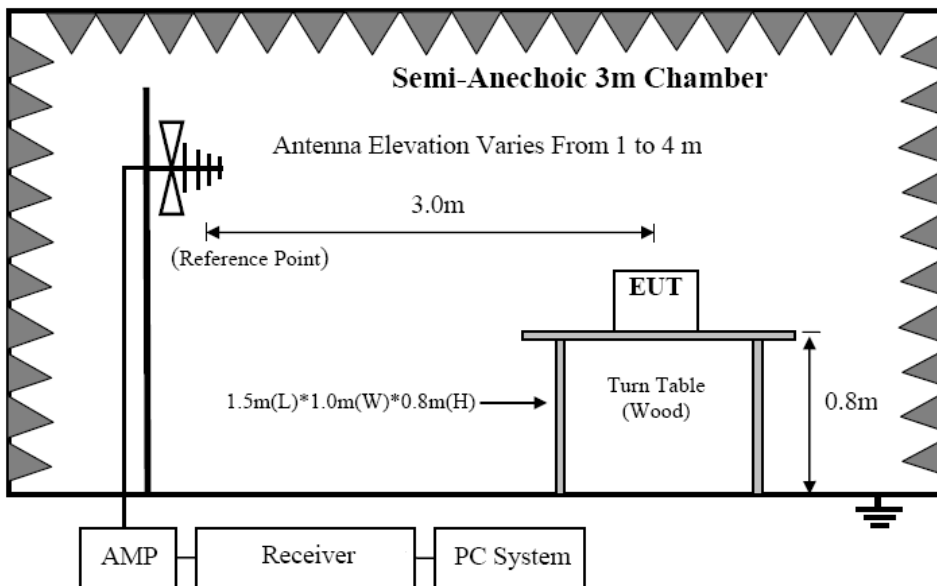

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

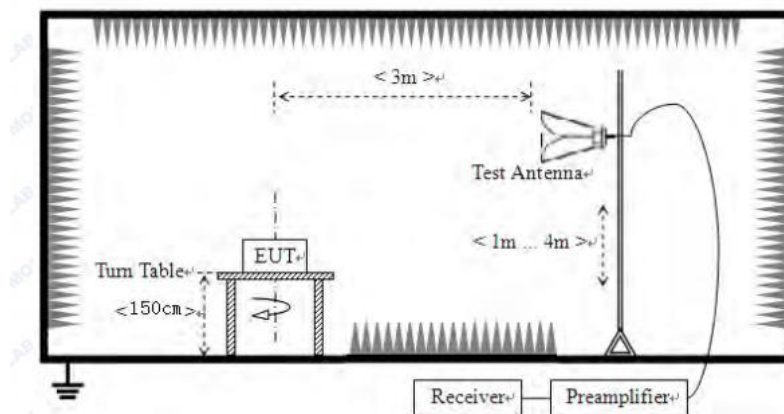

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

### 8.4. Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.  
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

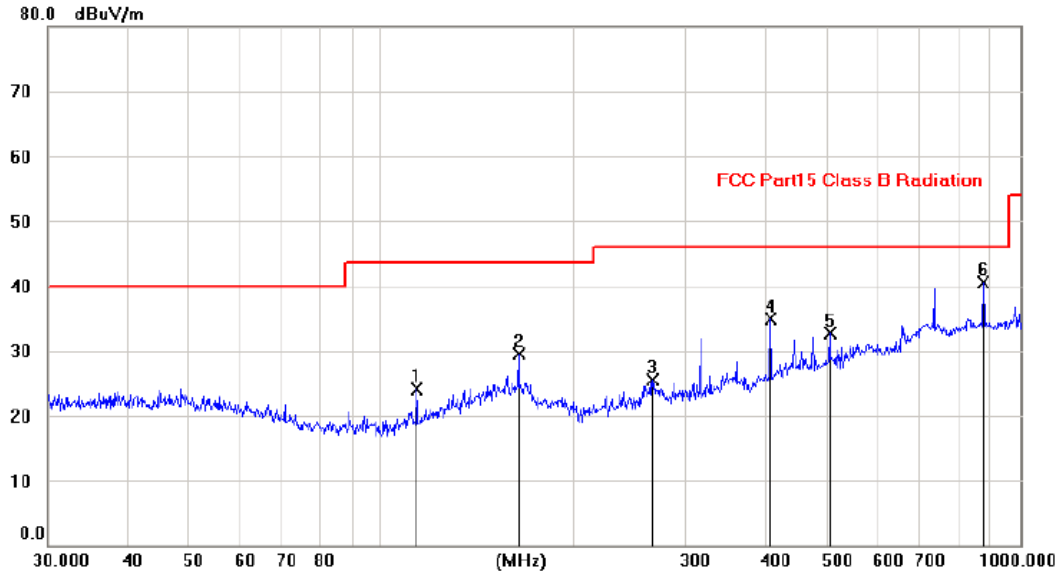


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Antenna<br>Height<br>cm | Table<br>Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|-------------------------|-----------------|---------|
| 1   |     | 113.5947     | 11.74                    | 12.27                   | 24.01                      | 43.50           | -19.49       | peak                    |                 |         |
| 2   |     | 163.8694     | 14.86                    | 14.67                   | 29.53                      | 43.50           | -13.97       | peak                    |                 |         |
| 3   |     | 266.5776     | 12.29                    | 13.18                   | 25.47                      | 46.00           | -20.53       | peak                    |                 |         |
| 4   |     | 406.1354     | 18.50                    | 16.39                   | 34.89                      | 46.00           | -11.11       | peak                    |                 |         |
| 5   |     | 504.0577     | 14.38                    | 18.28                   | 32.66                      | 46.00           | -13.34       | peak                    |                 |         |
| 6   | *   | 877.0901     | 16.77                    | 23.74                   | 40.51                      | 46.00           | -5.49        | peak                    |                 |         |

Note: 1. \*: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

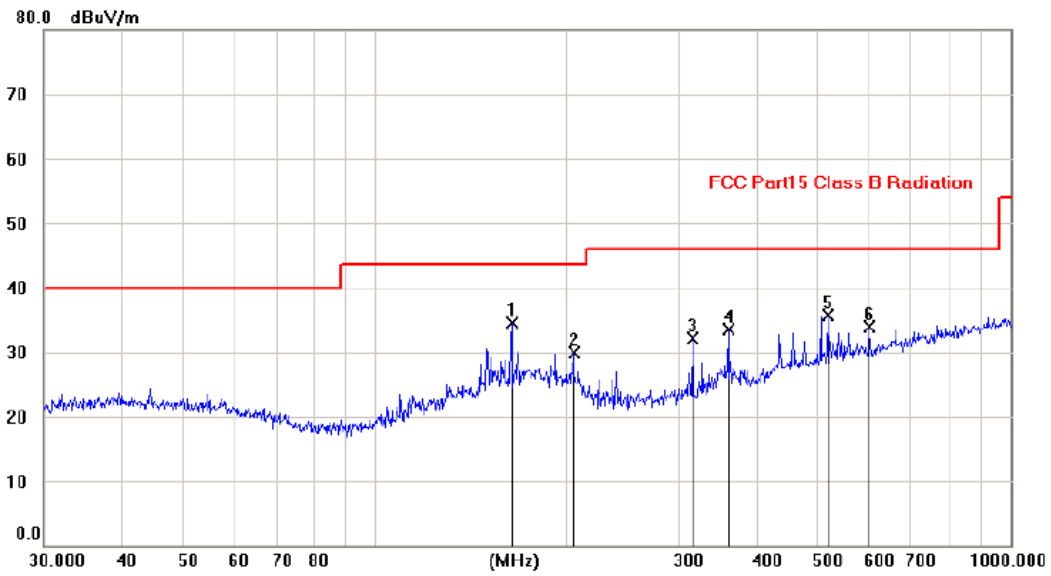

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | *   | 163.8505 | 19.74         | 14.67          | 34.41       | 43.50  | -9.09  |                |              | peak    |
| 2   |     | 205.0988 | 18.99         | 10.99          | 29.98       | 43.50  | -13.52 |                |              | peak    |
| 3   |     | 316.1082 | 17.52         | 14.52          | 32.04       | 46.00  | -13.96 |                |              | peak    |
| 4   |     | 360.0264 | 18.00         | 15.43          | 33.43       | 46.00  | -12.57 |                |              | peak    |
| 5   |     | 516.0402 | 17.25         | 18.51          | 35.76       | 46.00  | -10.24 |                |              | peak    |
| 6   |     | 600.0221 | 13.64         | 20.22          | 33.86       | 46.00  | -12.14 |                |              | peak    |

Note:1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2441MHz was listed in this report.


From 1G-25GHz

| Test Mode: GFSK TX Low  |                     |             |                       |                |                 |                 |                |             |        |
|---|---------------------|-------------|-----------------------|----------------|-----------------|-----------------|----------------|-------------|--------|
| Freq (MHz)  | Read Level (dBuV/m) | Polar (H/V) | Antenna Factor (dB/m) | Cable loss(dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 4804  | 47.01               | V           | 33.95                 | 10.18          | 34.26           | 56.88           | 74             | -17.12      | PK     |
| 4804  | 36.00               | V           | 33.95                 | 10.18          | 34.26           | 45.87           | 54             | -8.13       | AV     |
| 7206  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9608  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4804  | 47.97               | H           | 33.95                 | 10.18          | 34.26           | 57.84           | 74             | -16.16      | PK     |
| 4804  | 35.03               | H           | 33.95                 | 10.18          | 34.26           | 44.90           | 54             | -9.10       | AV     |
| 7206  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9608  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Test Mode: GFSK TX Mid  |                     |             |                       |                |                 |                 |                |             |        |
| 4882  | 43.07               | V           | 33.93                 | 10.2           | 34.29           | 52.91           | 74             | -21.09      | PK     |
| 4882  | 35.85               | V           | 33.93                 | 10.2           | 34.29           | 45.69           | 54             | -8.31       | AV     |
| 7323  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9764  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4882  | 45.48               | H           | 33.93                 | 10.2           | 34.29           | 55.32           | 74             | -18.68      | PK     |
| 4882  | 35.48               | H           | 33.93                 | 10.2           | 34.29           | 45.32           | 54             | -8.68       | AV     |
| 7323  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9764  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Test Mode: GFSK TX High   |                     |             |                       |                |                 |                 |                |             |        |
| 4960  | 43.58               | V           | 33.98                 | 10.22          | 34.25           | 53.53           | 74             | -20.47      | PK     |
| 4960  | 34.03               | V           | 33.98                 | 10.22          | 34.25           | 43.98           | 54             | -10.02      | AV     |
| 7440  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9920  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4960  | 45.11               | H           | 33.98                 | 10.22          | 34.25           | 55.06           | 74             | -18.94      | PK     |
| 4960  | 32.71               | H           | 33.98                 | 10.22          | 34.25           | 42.66           | 54             | -11.34      | AV     |
| 7440  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9920  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Note:   |                     |             |                       |                |                 |                 |                |             |        |
| 1, Result = Read level + Antenna factor + cable loss-Amp factor                                   |                     |             |                       |                |                 |                 |                |             |        |
| 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit. |                     |             |                       |                |                 |                 |                |             |        |


| Test Mode: $\pi$ /4-DQPSK TX Low  |                     |             |                       |                |                 |                 |                |             |        |
|---|---------------------|-------------|-----------------------|----------------|-----------------|-----------------|----------------|-------------|--------|
| Freq (MHz)  | Read Level (dBuV/m) | Polar (H/V) | Antenna Factor (dB/m) | Cable loss(dB) | Amp Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
| 4804  | 47.48               | V           | 33.95                 | 10.18          | 34.26           | 57.35           | 74             | -16.65      | PK     |
| 4804  | 36.06               | V           | 33.95                 | 10.18          | 34.26           | 45.93           | 54             | -8.07       | AV     |
| 7206  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9608  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4804  | 47.75               | H           | 33.95                 | 10.18          | 34.26           | 57.62           | 74             | -16.38      | PK     |
| 4804  | 35.45               | H           | 33.95                 | 10.18          | 34.26           | 45.32           | 54             | -8.68       | AV     |
| 7206  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9608  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Test Mode: $\pi$ /4-DQPSK TX Mid  |                     |             |                       |                |                 |                 |                |             |        |
| 4882  | 42.91               | V           | 33.93                 | 10.2           | 34.29           | 52.75           | 74             | -21.25      | PK     |
| 4882  | 33.78               | V           | 33.93                 | 10.2           | 34.29           | 43.62           | 54             | -10.38      | AV     |
| 7323  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9764  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4882  | 43.81               | H           | 33.93                 | 10.2           | 34.29           | 53.65           | 74             | -20.35      | PK     |
| 4882  | 35.36               | H           | 33.93                 | 10.2           | 34.29           | 45.20           | 54             | -8.80       | AV     |
| 7323  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9764  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Test Mode: $\pi$ /4-DQPSK TX High   |                     |             |                       |                |                 |                 |                |             |        |
| 4960  | 46.21               | V           | 33.98                 | 10.22          | 34.25           | 56.16           | 74             | -17.84      | PK     |
| 4960  | 35.59               | V           | 33.98                 | 10.22          | 34.25           | 45.54           | 54             | -8.46       | AV     |
| 7440  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9920  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 4960  | 43.95               | H           | 33.98                 | 10.22          | 34.25           | 53.90           | 74             | -20.10      | PK     |
| 4960  | 34.85               | H           | 33.98                 | 10.22          | 34.25           | 44.80           | 54             | -9.20       | AV     |
| 7440  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| 9920  | /                   | /           | /                     | /              | /               | /               | /              | /           | /      |
| Note:   |                     |             |                       |                |                 |                 |                |             |        |
| 1, Result = Read level + Antenna factor + cable loss-Amp factor                                   |                     |             |                       |                |                 |                 |                |             |        |
| 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit. |                     |             |                       |                |                 |                 |                |             |        |

**Conducted RF Spurious Emission**


**Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission**

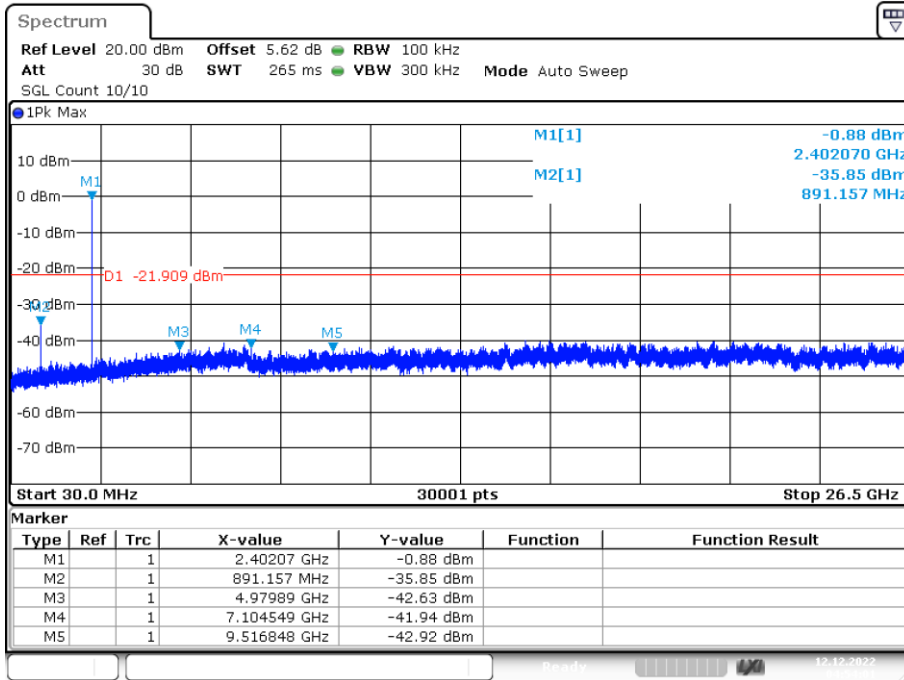

**Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission**

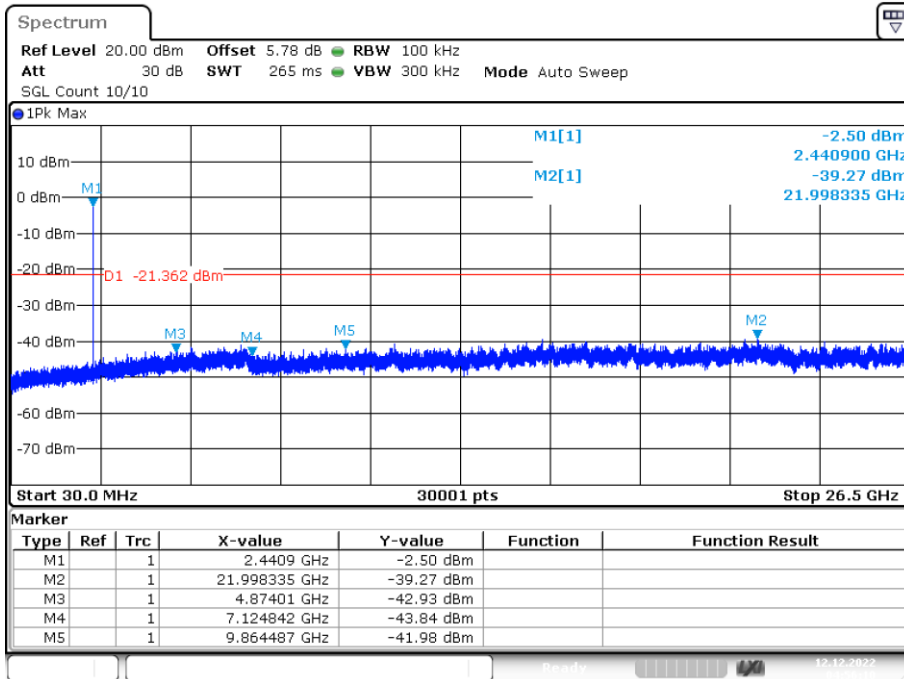


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

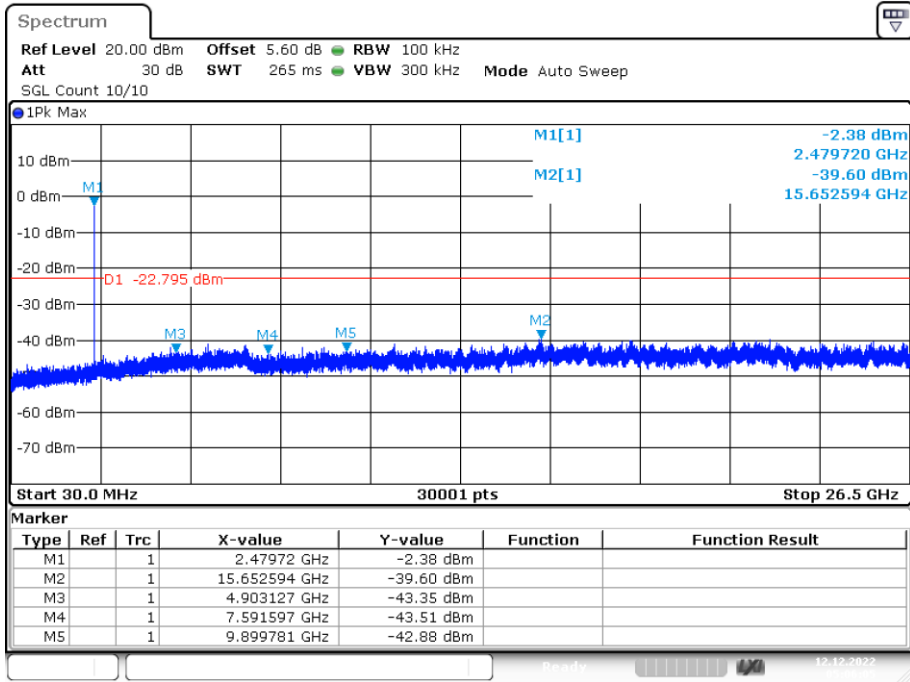

Date: 12.DEC.2022 05:06:04


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

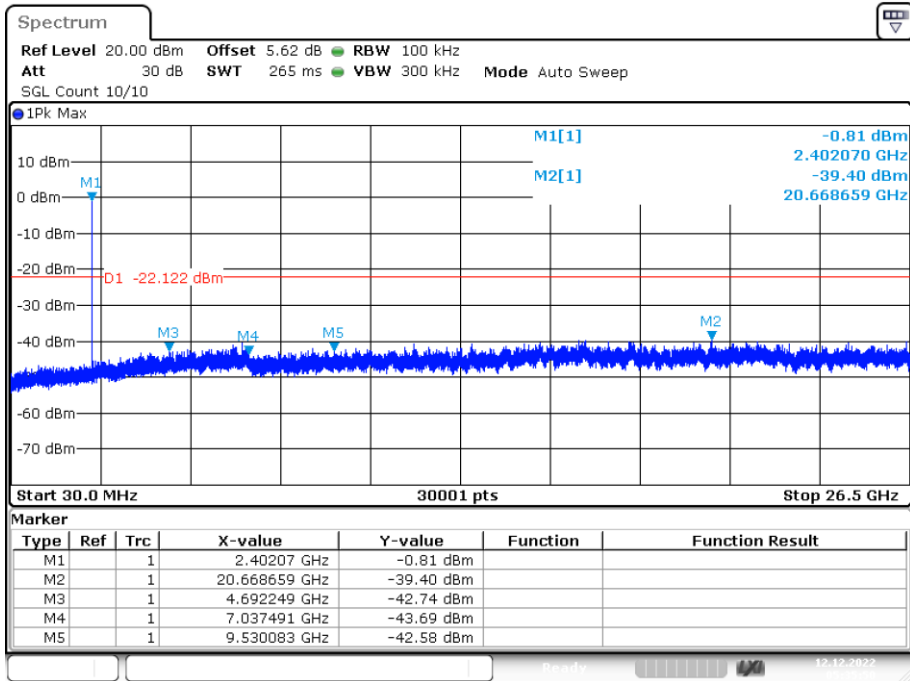

Date: 12.DEC.2022 05:35:50




Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

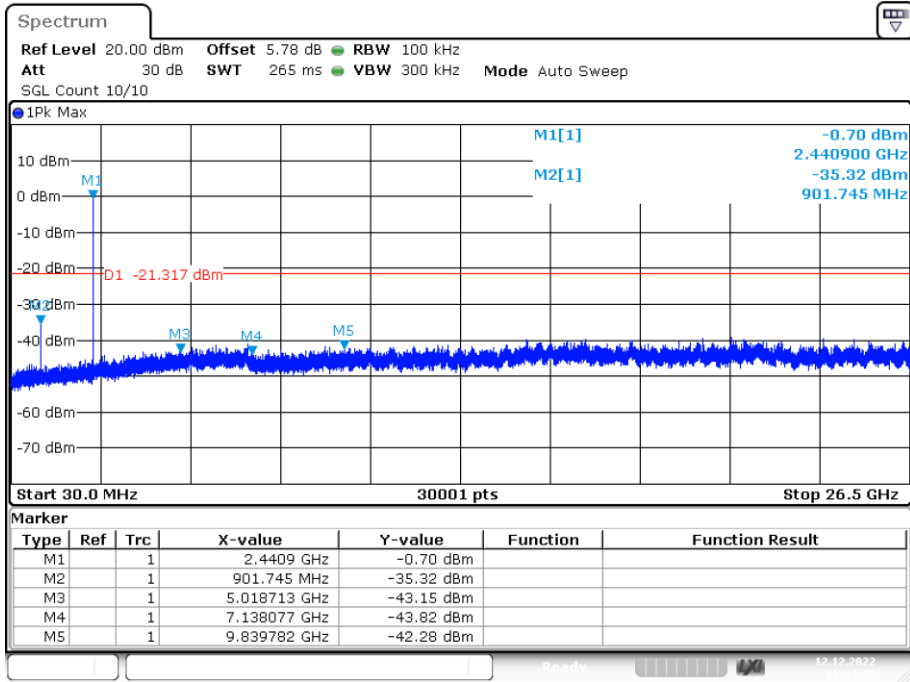

Date: 12.DEC.2022 05:42:56


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

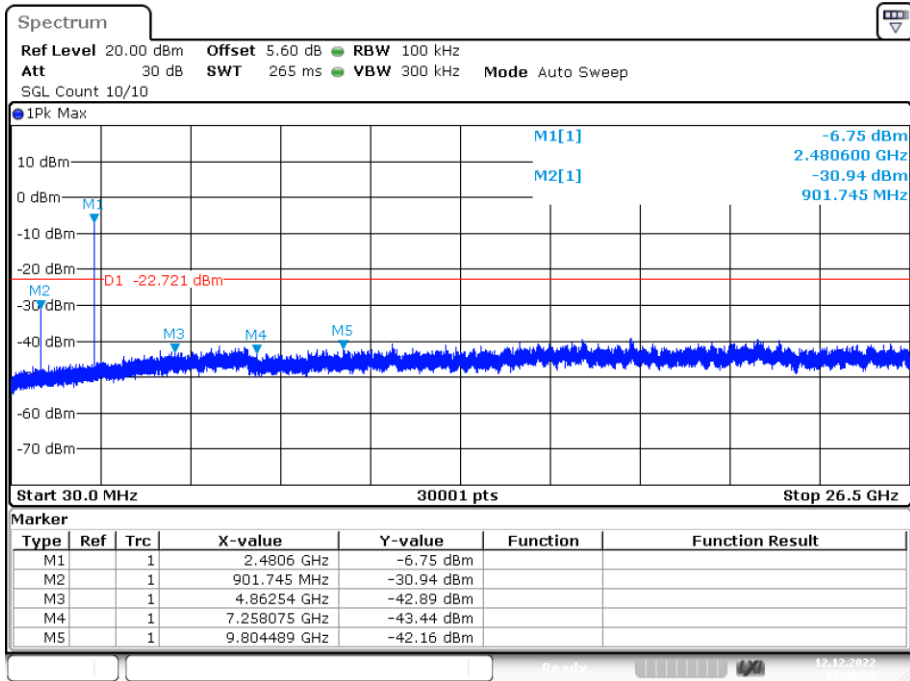

Date: 12.DEC.2022 05:48:51

## 9. Band Edge Compliance

### 9.1. Block Diagram of Test Setup

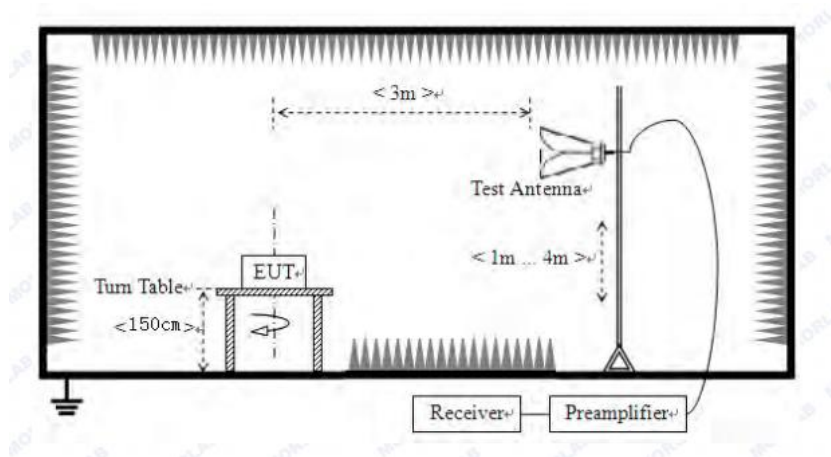

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 limits.

### 9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.


All restriction band and non- restriction band have been tested, only worse case is reported.

### 9.4. Test Result


PASS. (See below detailed test data)

Radiated Method:

Test Mode: GFSK-Low


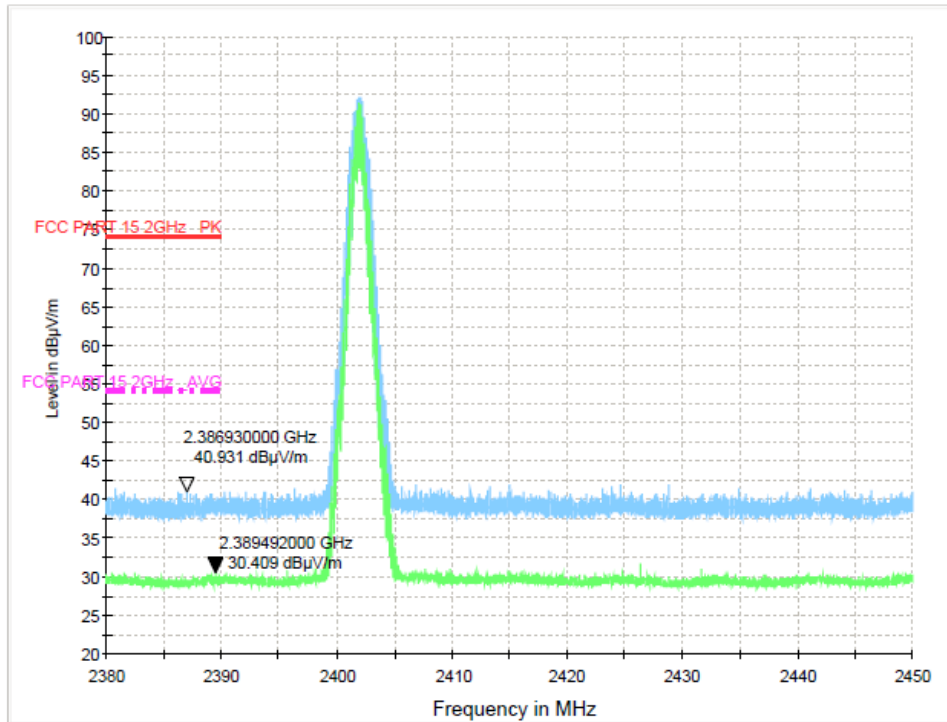


hopping-off

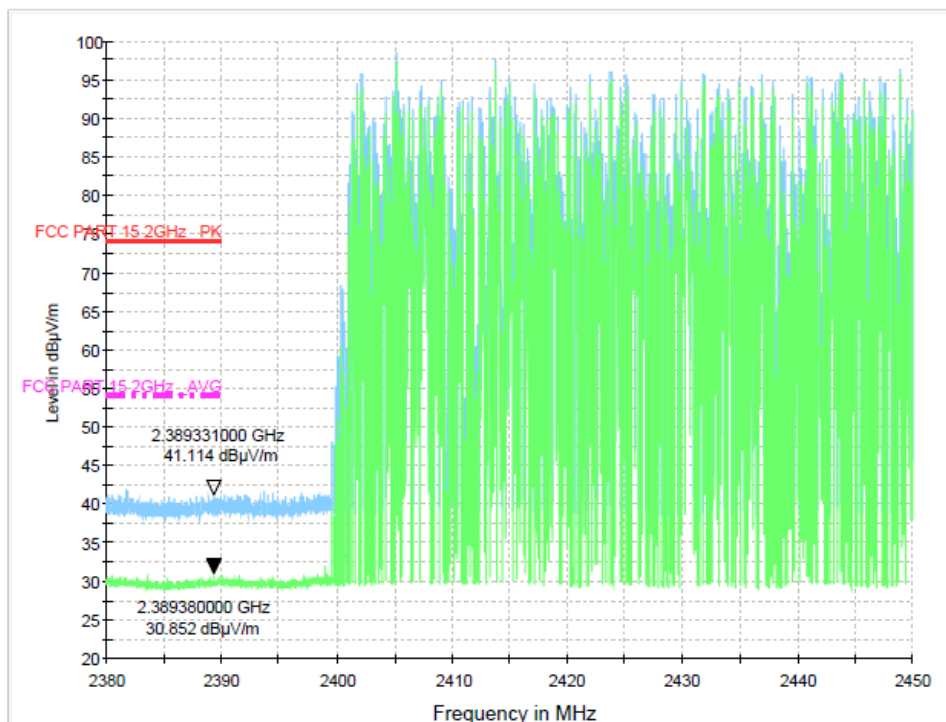


hopping-on


Test Mode: GFSK-High

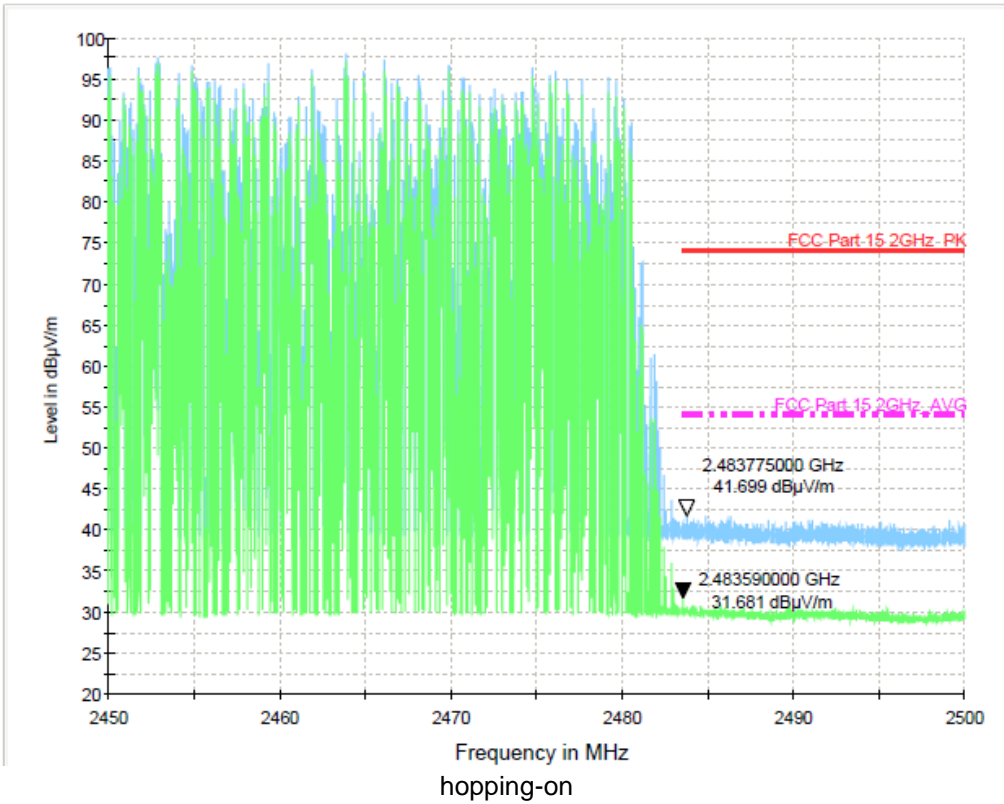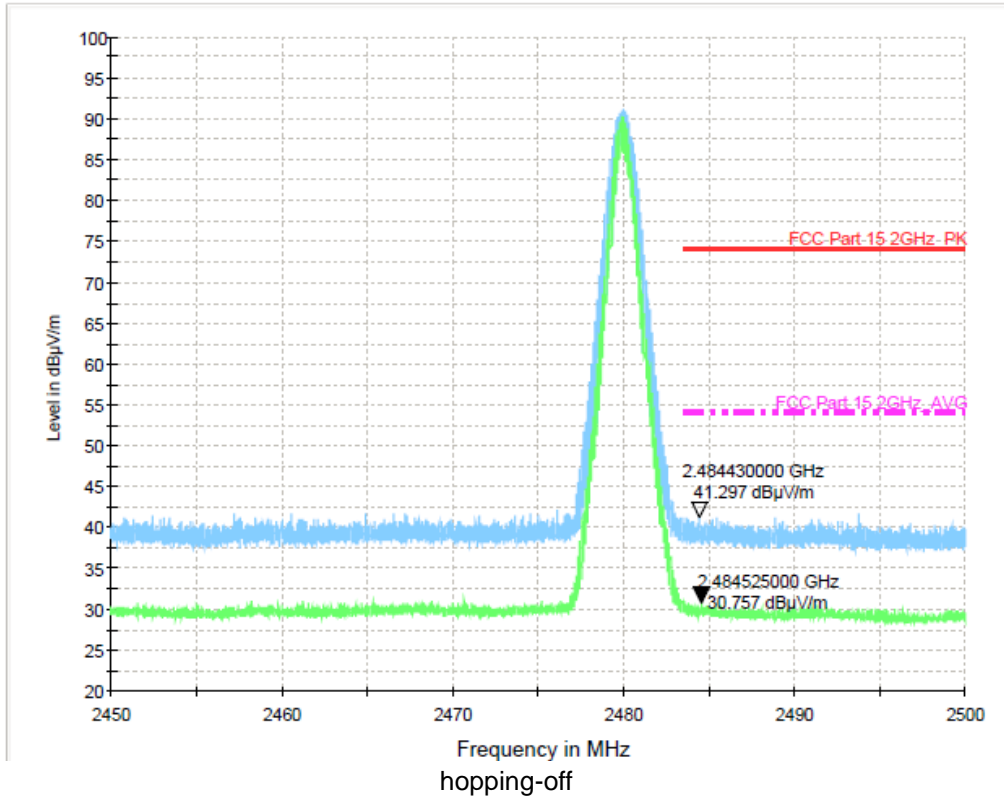

Test Mode:  $\pi/4$ -DQPSK-Low


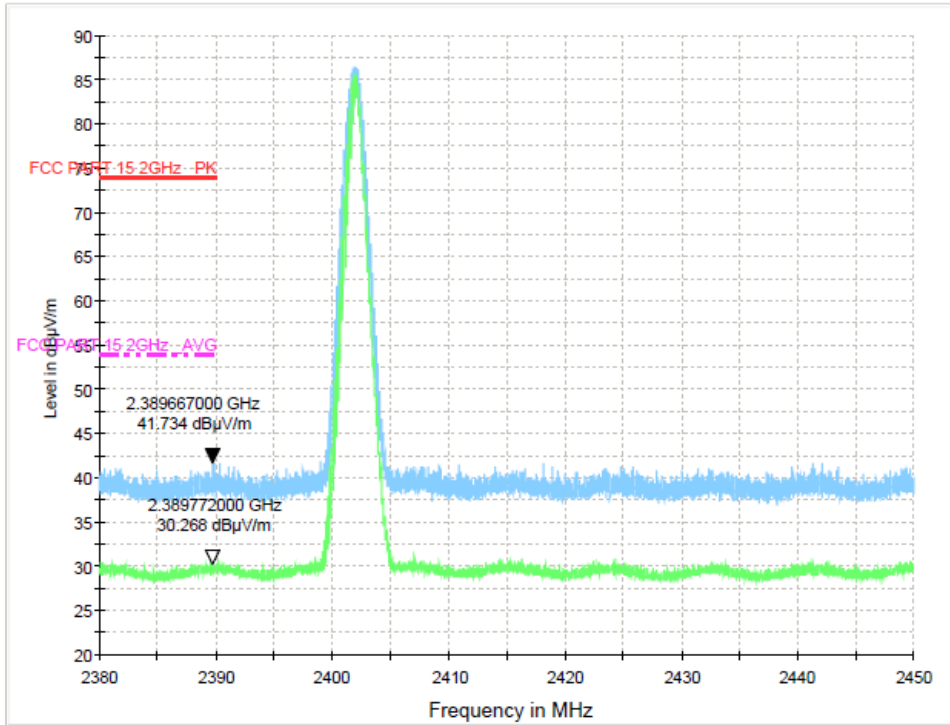


hopping-off

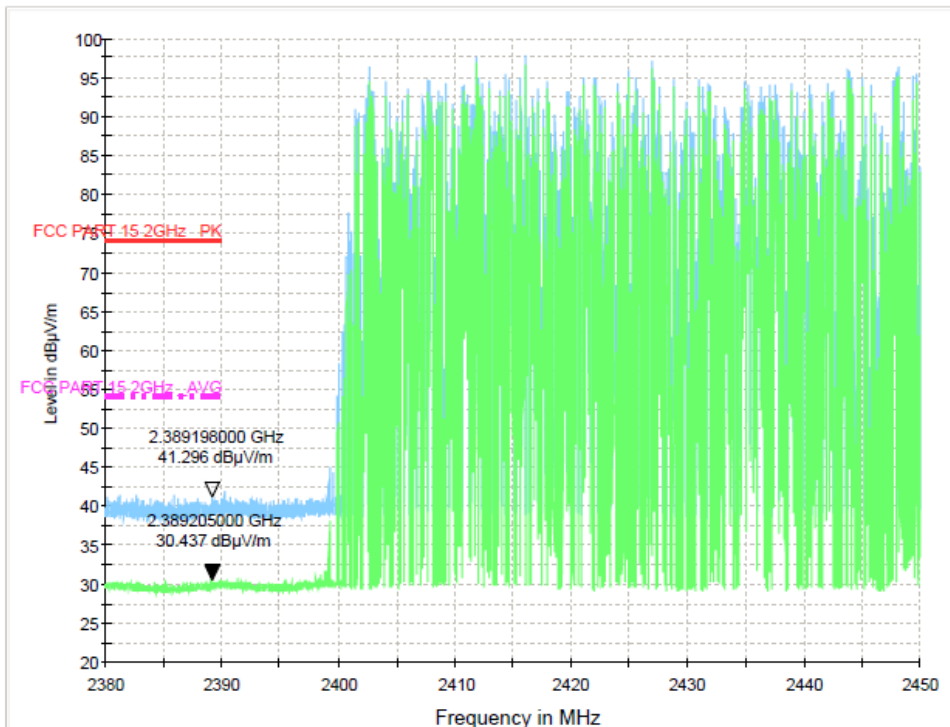

hopping-on

Test Mode:  $\pi$  /4-DQPSK-High

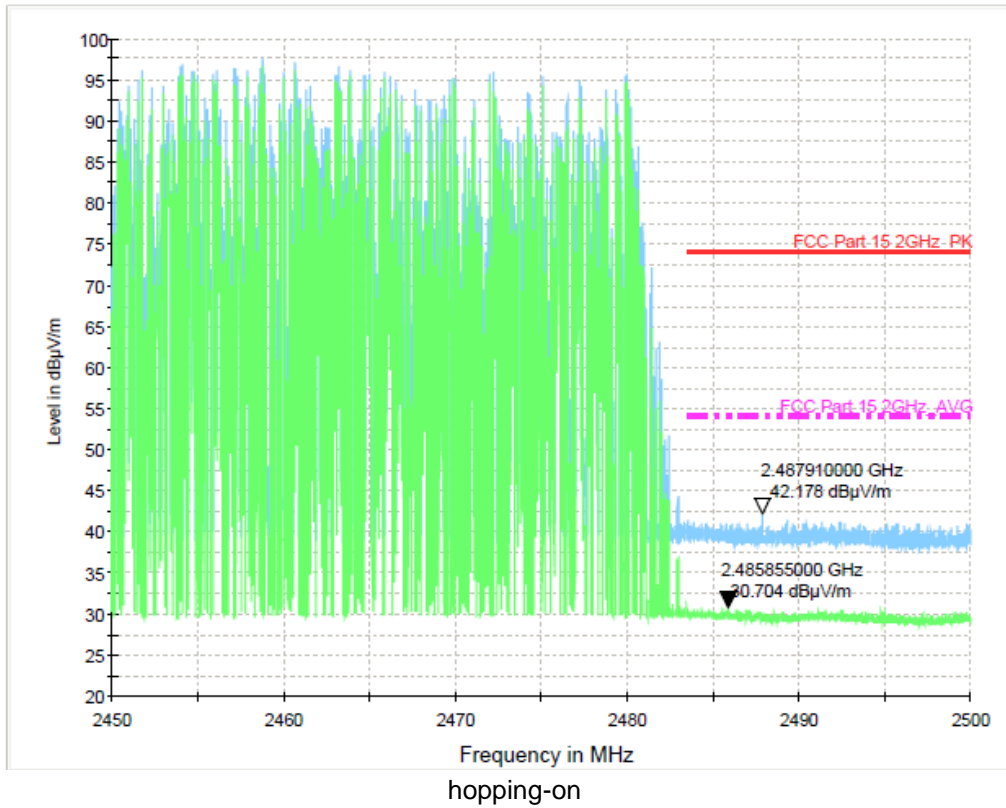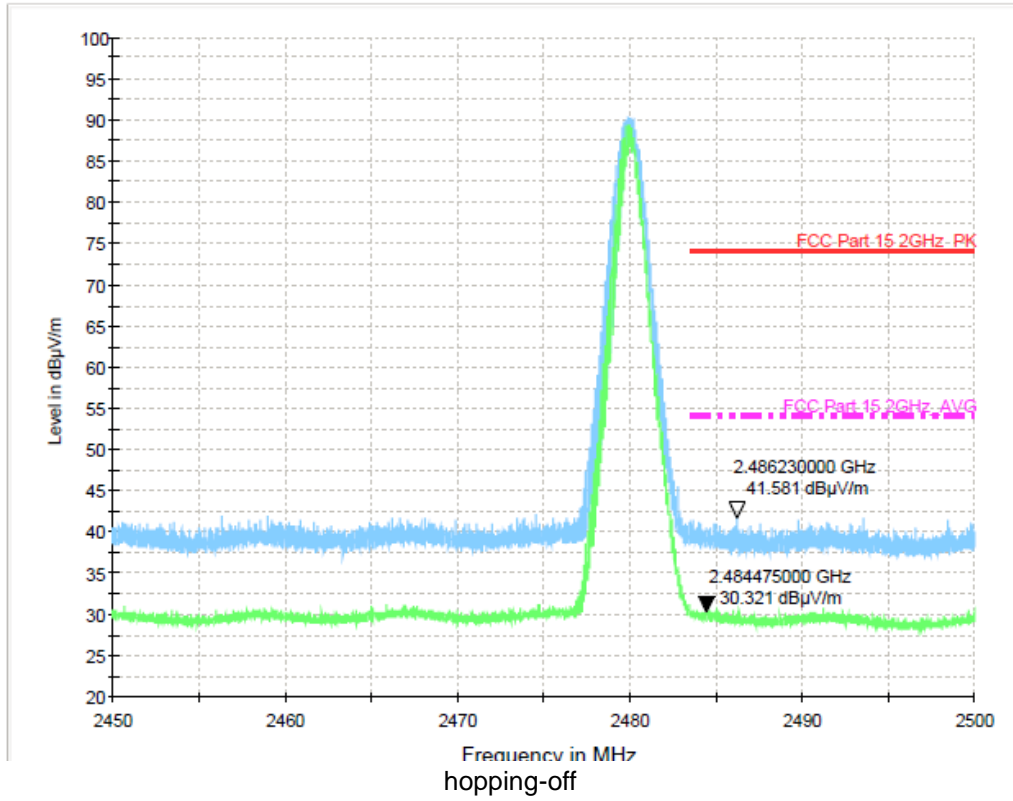


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

GFSK Mode:

Test channel: Lowest channel

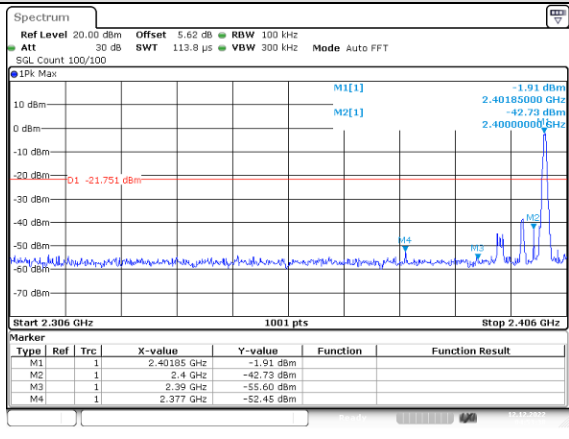


No-hopping mode

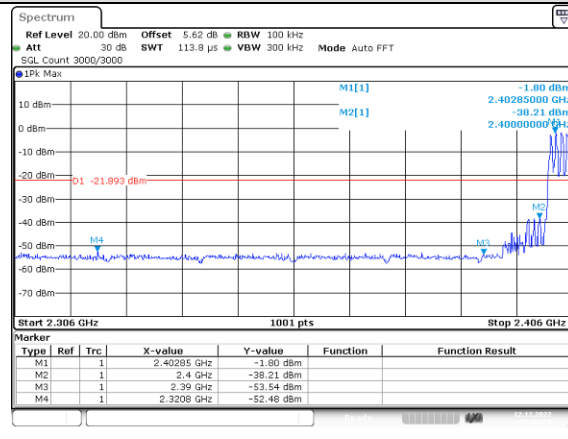


Hopping mode

Test channel: Highest channel

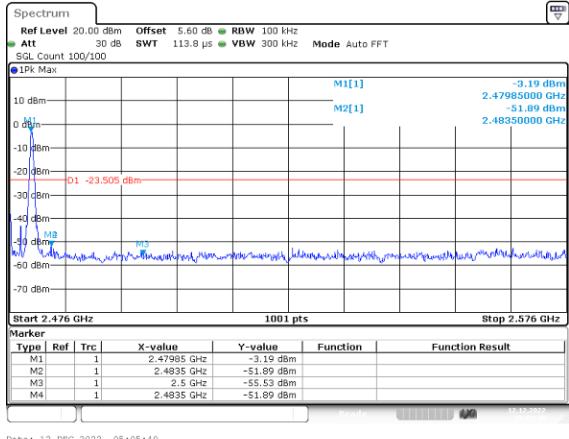


No-hopping mode

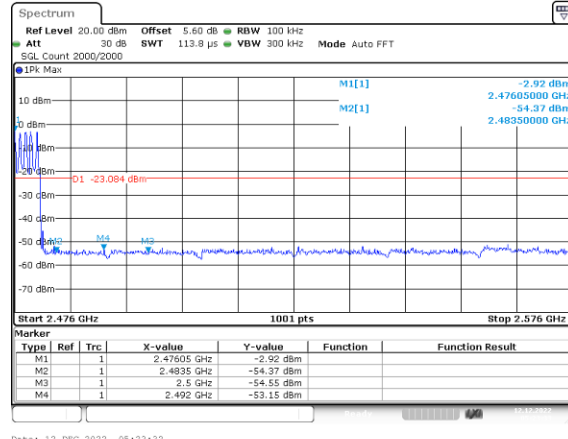

Hopping mode


$\pi/4$ -DQPSK Mode:

Test channel: Lowest channel

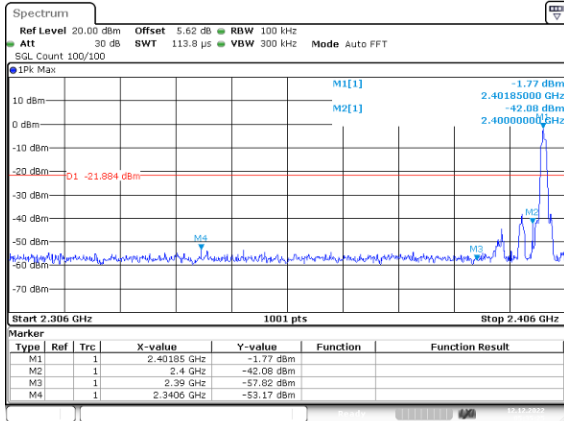

Date: 12.DEC.2022 05:13:25


No-hopping mode

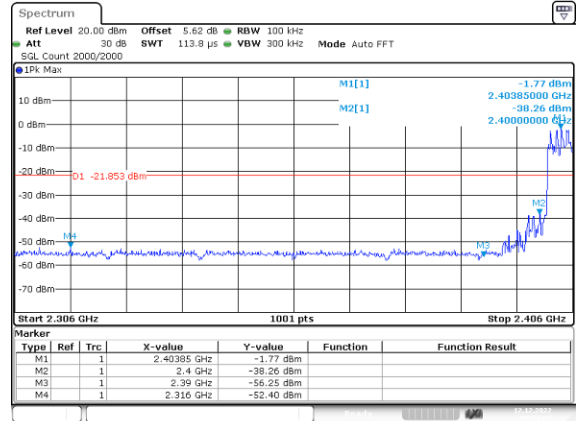

Date: 12.DEC.2022 05:15:47


Hopping mode

Test channel: Highest channel

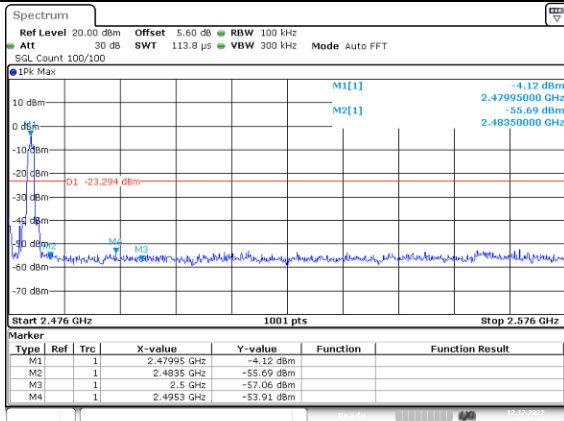

Date: 12.DEC.2022 05:47:10

No-hopping mode

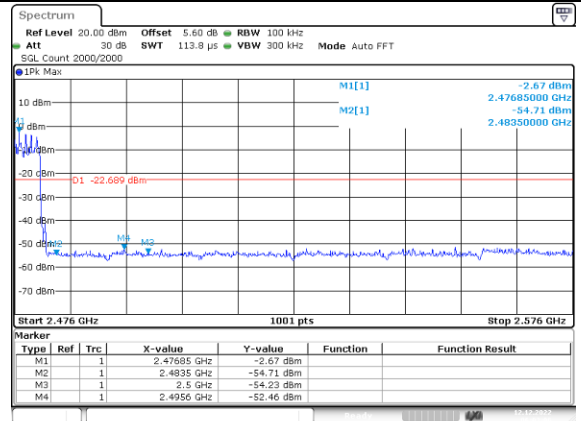


Date: 12.DEC.2022 06:03:06

Hopping mode



## 10. Power Line Conducted Emissions

### 10.1. Block Diagram of Test Setup

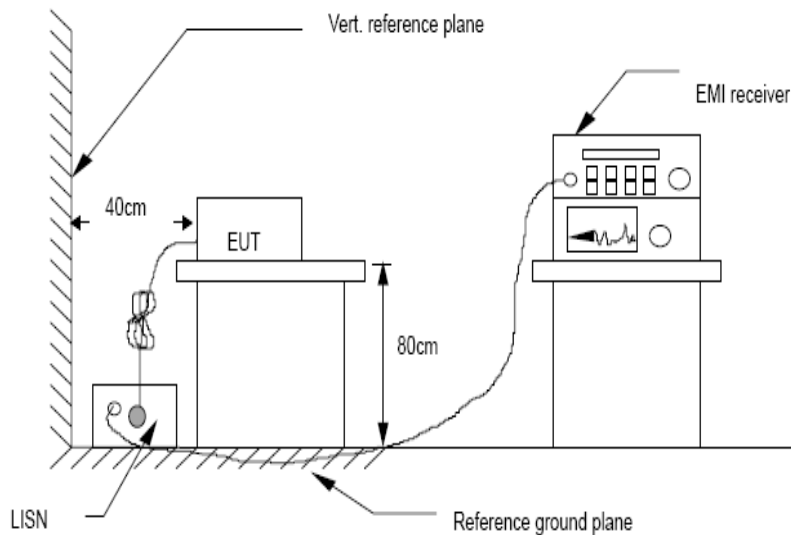

### 10.2. Limit

| Frequency       | Maximum RF Line Voltage          |                               |
|-----------------|----------------------------------|-------------------------------|
|                 | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
| 150kHz ~ 500kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500kHz ~ 5MHz   | 56                               | 46                            |
| 5MHz ~ 30MHz    | 60                               | 50                            |

- Notes: 1. \* Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

#### 10.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

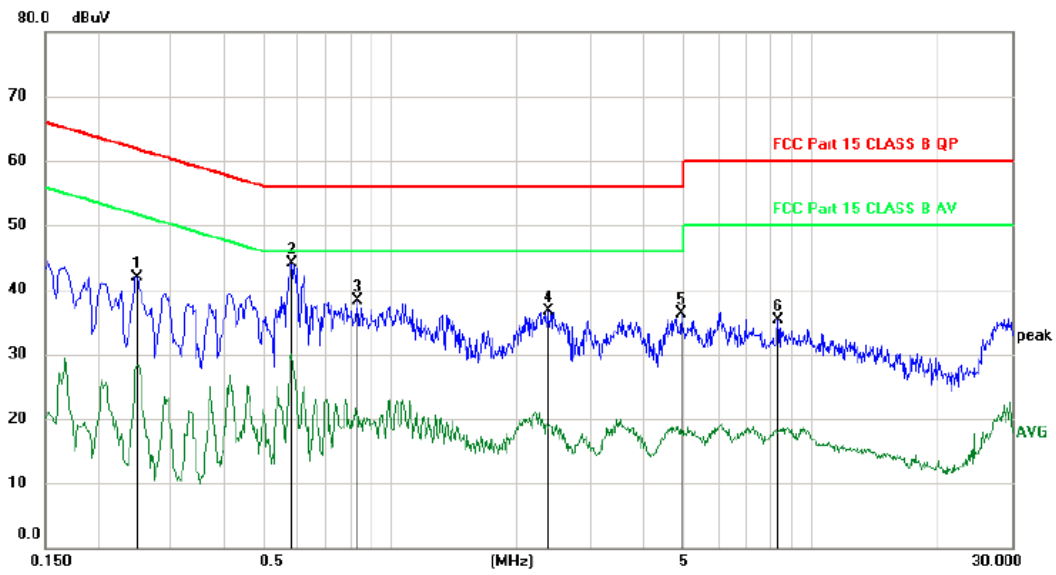


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.2489       | 31.92                    | 9.97                    | 41.89                    | 61.79         | -19.90       | peak     |         |
| 2   | *   | 0.5818       | 34.17                    | 9.93                    | 44.10                    | 56.00         | -11.90       | peak     |         |
| 3   |     | 0.8308       | 28.33                    | 9.95                    | 38.28                    | 56.00         | -17.72       | peak     |         |
| 4   |     | 2.3639       | 26.83                    | 9.90                    | 36.73                    | 56.00         | -19.27       | peak     |         |
| 5   |     | 4.9200       | 26.35                    | 10.04                   | 36.39                    | 56.00         | -19.61       | peak     |         |
| 6   |     | 8.3610       | 25.18                    | 10.16                   | 35.34                    | 60.00         | -24.66       | peak     |         |

\*:Maximum data x:Over limit !:over margin

(Reference Only

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

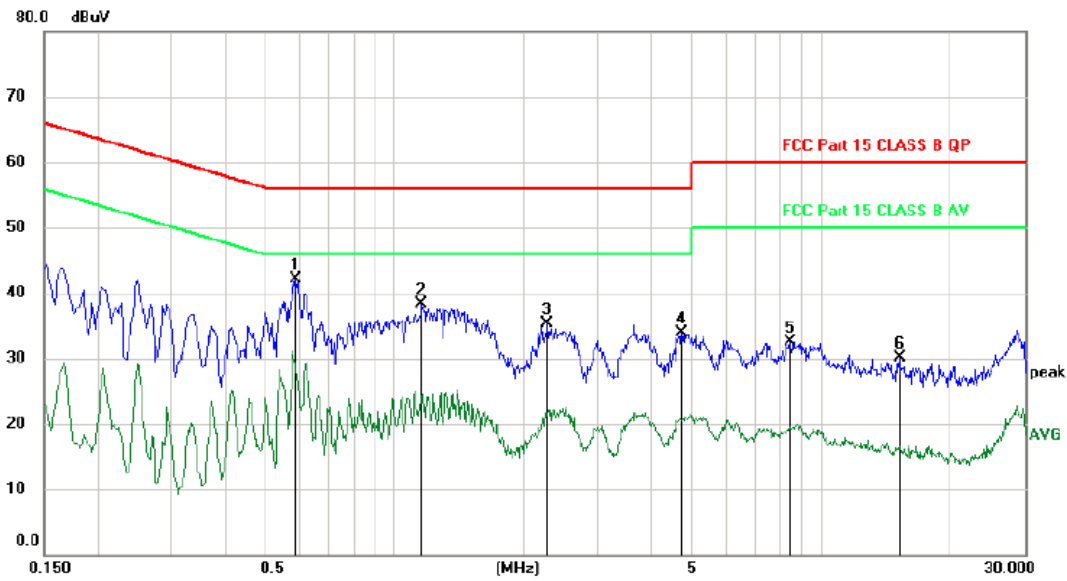

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   | *   | 0.5878       | 32.10                    | 9.92                    | 42.02                    | 56.00         | -13.98       | peak     |         |
| 2   |     | 1.1549       | 28.46                    | 9.89                    | 38.35                    | 56.00         | -17.65       | peak     |         |
| 3   |     | 2.2829       | 25.31                    | 9.90                    | 35.21                    | 56.00         | -20.79       | peak     |         |
| 4   |     | 4.7130       | 23.85                    | 10.02                   | 33.87                    | 56.00         | -22.13       | peak     |         |
| 5   |     | 8.4450       | 22.40                    | 10.16                   | 32.56                    | 60.00         | -27.44       | peak     |         |
| 6   |     | 15.2608      | 19.85                    | 10.34                   | 30.19                    | 60.00         | -29.81       | peak     |         |

\*:Maximum data x:Over limit !:over margin (Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK 2441MHz was listed in this report.

## **11. Antenna Requirements**

### **11.1. Limit**


For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2. Result**

The EUT antenna is PCB Antenna. It complies with the standard requirement.

## 12. Test Setup Photo

### 12.1. Photos of Radiated emission

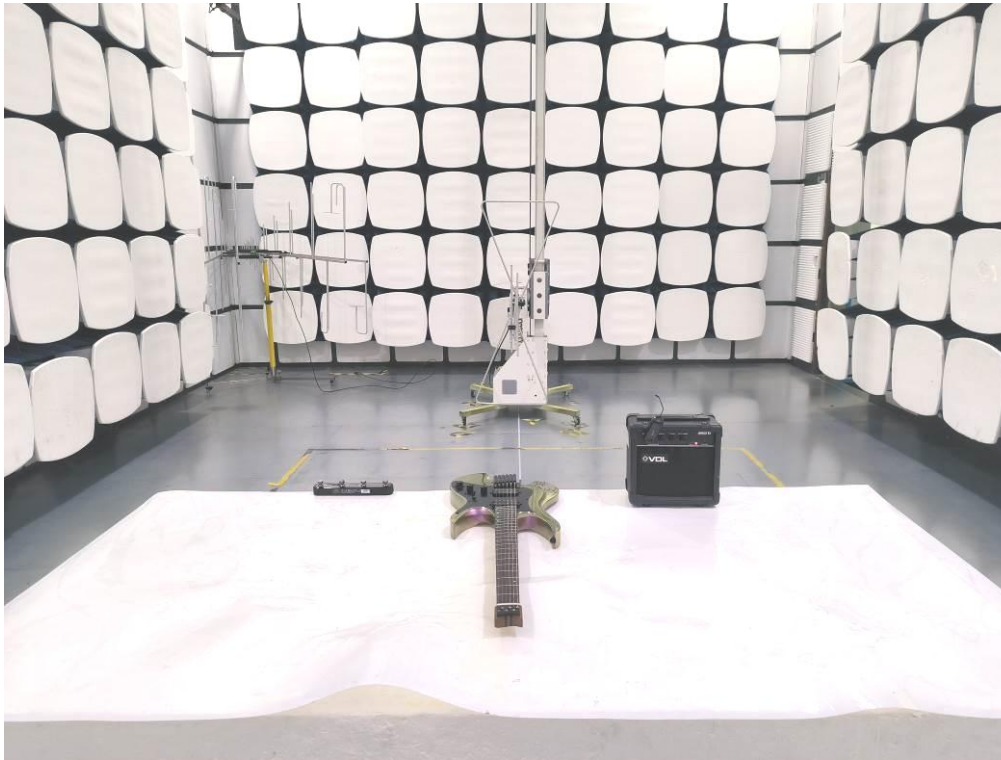

12.2.Photos of Conducted Emission test

