


TEST REPORT

Applicant Name : SHENZHEN COBAN ELECTRONICS CO., LTD
 Address : 5/F, Block 22, Wisdomland Business Park, Guankou 2nd Road,
 Nantou, Nanshan District, Shenzhen, Guangdong, China.518052
 Report Number: RA230705-38627E-RF
 FCC ID: 2ATUK-BN-408

Test Standard (s)

FCC PART 27; FCC PART 22H; FCC PART 24E

Sample Description

Product Type: GPS TRACKER
 Model No.: 408, 408AB, 408A, 408B, GPS-408, GPS-408AB,
 GPS-408A, GPS-408B, BN-408, BN-408AB, BN-408A, BN-408B
 Trade Mark: BAANOOL, 
 Date Received: 2023-07-05
 Date of Test: 2023-07-08 to 2023-07-11
 Report Date: 2023-07-14

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Amanda Wei

Amanda Wei
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect testresults are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
 Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
SUPPORT CABLE DESCRIPTION	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307 (B) – RF EXPOSURE.....	11
FCC§2.1047 - MODULATION CHARACTERISTIC	14
FCC § 2.1046, § 22.913 (A)(D)& § 24.232 (C)(D); §27.50(A)(D)(H)- RF OUTPUT POWER.....	15
APPLICABLE STANDARD	15
TEST PROCEDURE	15
TEST DATA	15
FCC §2.1049, §22.917, §22.905 & §24.238&§27.53 - OCCUPIED BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
FCC §2.1051, §22.917(A) & §24.238(A)& §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS...44	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 - SPURIOUS RADIATED EMISSIONS.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC§ 22.917 (A); § 24.238 (A); §27.53 - BAND EDGES	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST DATA	51
FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST DATA	53

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230705-38627E-RF	Original Report	2023-07-14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Type	GPS TRACKER	
Tested Model	408	
Multiple Model	408AB, 408A, 408B, GPS-408, GPS-408AB, GPS-408A, GPS-408B, BN-408, BN-408AB, BN-408A, BN-408B	
Model difference	Please refer to DOS letter	
Frequency Range	GSM 850: 824-849MHz(TX); 869-894MHz(RX) PCS 1900: 1850-1910MHz(TX); 1930-1990MHz(RX) WCDMA Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX) WCDMA Band 5: 824-849MHz(TX); 869-894MHz(RX) LTE Band 2: 1850-1910MHz(TX); 1930-1990MHz(RX) LTE Band 4: 1710-1755MHz(TX); 2110-2155MHz(RX) LTE Band 5: 824-849MHz(TX); 869-894MHz(RX) LTE Band 7: 2500-2570MHz(TX); 2620-2690MHz(RX) LTE Band 40: 2305-2315MHz(TX/RX); 2350-2360MHz(TX/RX)	
Maximum Average Conducted Output Power	GSM 850: 32.51dBm (GMSK) 26.52dBm (8PSK)	PCS 1900: 29.58dBm (GMSK) 25.52dBm (8PSK)
	WCDMA B2: 22.77dBm	WCDMA B5: 22.42dBm
	LTE B2: 23.16dBm	LTE B4: 22.95dBm
	LTE B5: 23.36dBm	LTE B7: 23.40dBm
	LTE B40(2305-2315MHz): 21.89dBm	LTE B40(2350-2360MHz): 22.01dBm
Modulation Technique	2G: GMSK, 8PSK 3G: BPSK, QPSK, 16QAM 4G: QPSK, 16QAM	
Antenna Specification*	Internal Antenna (Antenna Gain provided by the applicant)	
	GSM850: -0.04dBi	PCS1900: 0.59dBi
	WCDMA B2: 0.59dBi	WCDMA B5: -0.04dBi
	LTE B2: 0.59dBi	LTE B4: -0.84dBi
	LTE B5: -0.04dBi	LTE B7: 0.62dBi
	LTE B40: 0.62dBi	
Voltage Range	DC 12-24V from Car Power DC 5V from USB port DC 3.7V from built-in battery	
Sample number	27US-1 (RF Radiated Test), 27US-2 (RF Conducted Test) (Assigned by ATC, Shenzhen)	
Sample/EUT Status	Good condition	
Normal/Extreme Condition	L.V.: Low Voltage: 3.5V _{DC} N.V.: Normal Voltage: 3.7V _{DC} H.V.: High Voltage: 4.2V _{DC}	

Objective

This test report is in accordance with Part 2-Subpart J, Part 22-Subpart H, Part24-Subpart E, and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
 Part 24 Subpart E - Personal Communication Services
 Part 27 - Miscellaneous Wireless Communications Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.

Test was performed as below table:

Frequency band	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM850	0.25	824.2	836.4	848.8
PCS1900	0.25	1850.2	1880.0	1909.8
WCDMA B2	4.2	1852.4	1880.0	1907.6
WCDMA B5	4.2	826.4	836.4	846.6
LTE B2	1.4	1850.7	1880.0	1909.3
	3	1851.5	1880.0	1908.5
	5	1852.5	1880.0	1907.5
	10	1855	1880.0	1905.0
	15	1857.5	1880.0	1902.5
	20	1860.0	1880.0	1900.0
LTE B4	1.4	1710.7	1732.5	1754.3
	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715.0	1732.5	1750.0
	15	1717.5	1732.5	1747.5
	20	1720.0	1732.5	1745.0
LTE B5	1.4	824.7	836.5	848.3
	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829.0	836.5	844.0
LTE B7	5	2502.5	2535.0	2567.5
	10	2505.0	2535.0	2565.0
	15	2507.5	2535.0	2562.5
	20	2510.0	2535.0	2560.0
LTE B40 (2305MHz-2315MHz)	5	2307.5	2310	2312.5
	10	/	2310	/
LTE B40 (2350MHz-2360MHz)	5	2352.5	2355	2357.5
	10	/	2355.0	/

Note1: The path loss (cable loss, splitter inset loss and 10dB Attenuator) is 17dB in the GSM tests.

Note2: The path loss (cable loss, splitter inset loss) is 7dB in the WCDMA<E tests.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606
TECNO	Adapter	U180TSA	CY07018472B26

Support Cable Description

Cable Description	Length (m)	From / Port	To
Unshielded Un-detachable AC cable	1.2	AC Power	CMW500
Unshielded detachable USB cable	1.25	Adapter	EUT

Block Diagram of Test Setup

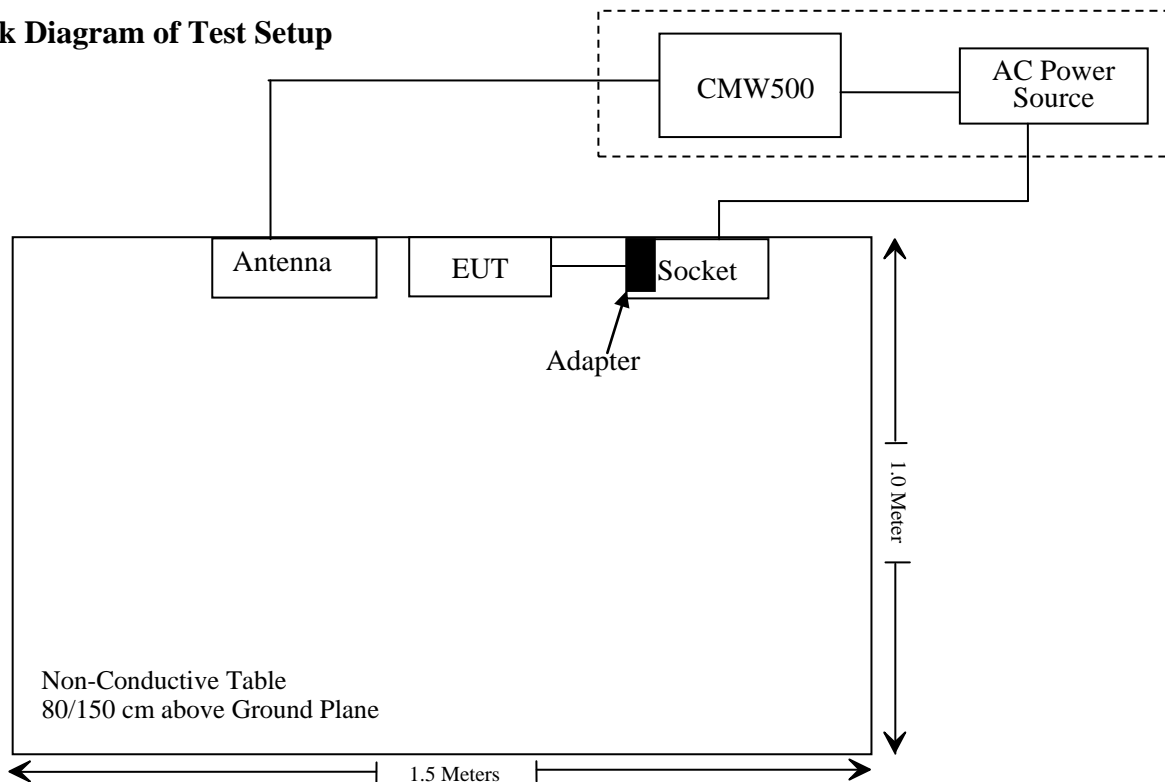

Note: The support table edge was flush with the center of turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b); §2.1091	RF Exposure	Compliant
§2.1046; § 22.913 (a)(d); § 24.232 (c)(d); §27.50 (a) (d) (h)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
§ 2.1051; §22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a); § 24.238 (a); §27.53	Band Edge	Compliant
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2022/12/26	2025/12/25
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	Band Reject Filter	MSF824-862MS-1147	ATCE-141	2022/11/25	2023/11/24
Unknown	Band Reject Filter	MSF1850-1910MS-1148	ATCE-142	2022/11/25	2023/11/24
Unknown	Band Reject Filter	MSF2495-2570MS-1152	ATCE-146	2022/11/25	2023/11/24
PASTERNAK	Horn Antenn	PE9852/2F-20	1120 (ATC-BA-024-1)	2023/01/04	2026/01/03
PASTERNAK	Horn Antenn	PE9852/2F-20	1120 (ATC-BA-025-1)	2023/01/04	2026/01/03
Agilent	Signal Generator	N5183A	MY51040755	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2022/11/25	2023/11/24
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2022/11/25	2023/11/24
WEINSCHL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Mini-Circuits	Power Splitter	DC-18000MHz	SF10944151S	2022/11/25	2023/11/24
REALE	Temp. & Humid. Chamber	RHP-800BT	R20170318310	2022/11/23	2023/11/22
Fluke	Desktop Multi Meter	45	7664009	2022/12/14	2023/12/13
UNI-T	DC Power Supply	UTP8305B	10584	NCR	NCR
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) – RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Test result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (mW)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(mW)		
GSM850	824-849	26.5	446.68	-0.04	-2.19	24.31	269.77	20	422
PCS1900	1850-1910	23.5	223.87	0.59	-1.56	21.94	156.31	20	768
WCDMA B2	1850-1910	23.0	199.53	0.59	-1.56	21.44	139.32	20	768
WCDMA B5	824-849	22.5	177.83	-0.04	-2.19	20.31	107.40	20	422
LTE B2	1850-1910	23.5	223.87	0.59	-1.56	21.94	156.31	20	768
LTE B4	1710-1755	23.0	199.53	-0.84	-2.99	20.01	100.23	20	768
LTE B5	824-849	23.5	223.87	-0.04	-2.19	21.31	135.21	20	422
LTE B7	2500-2570	23.5	223.87	0.62	-1.53	21.97	157.40	20	768
LTE B40	2305-2315	22.5	177.83	0.62	-1.53	20.97	125.03	20	768
	2350-2360	22.5	177.83	0.62	-1.53	20.97	125.03	20	768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: For GSM/GPRS/EDGE, the time base average power as below:

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB

GSM850:

Mode	Frequency (MHz)	Conducted Output Power (dBm)				Time based average power (dBm)			
		1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots
GSM	824.2	32.48	/	/	/	23.48	/	/	/
	836.6	32.44	/	/	/	23.44	/	/	/
	848.8	32.41	/	/	/	23.41	/	/	/
GPRS	824.2	32.51	31.44	30.00	28.84	23.51	25.44	25.75	25.84
	836.6	32.44	31.13	30.12	29.00	23.44	25.13	25.87	26.00
	848.8	32.37	31.11	30.15	29.08	23.37	25.11	25.90	26.08
EDGE	824.2	26.52	25.43	23.99	23.11	17.52	19.43	19.74	20.11
	836.6	26.38	25.39	23.93	23.03	17.38	19.39	19.68	20.03
	848.8	26.34	25.12	24.27	23.10	17.34	19.12	20.02	20.10

PCS1900:

Mode	Frequency (MHz)	Conducted Output Power (dBm)				Time based average power (dBm)			
		1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots
GSM	1850.2	29.58	/	/	/	20.58	/	/	/
	1880.0	29.36	/	/	/	20.36	/	/	/
	1909.8	29.25	/	/	/	20.25	/	/	/
GPRS	1850.2	29.38	28.23	27.22	26.15	20.38	22.23	22.97	23.15
	1880.0	29.19	28.09	27.18	26.17	20.19	22.09	22.93	23.17
	1909.8	29.08	28.19	26.76	25.74	20.08	22.19	22.51	22.74
EDGE	1850.2	25.52	24.49	23.21	22.21	16.52	18.49	18.96	19.21
	1880.0	25.37	24.03	22.73	21.59	16.37	18.03	18.48	18.59
	1909.8	25.32	23.98	22.72	21.82	16.32	17.98	18.47	18.82

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC§2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H,24E&27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046,§ 22.913 (a)(d)&§ 24.232 (c)(d); §27.50(a)(d)(h)- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c)(d), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(a), for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.


According to §27.50(d), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2496-2690MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500 through sufficient attenuation.



Note: the path loss (cable loss and attenuator) has including in result.

ANSI C63.26-2015 Section 5.5.

Test Data

Environmental Conditions

Temperature:	26-27°C
Relative Humidity:	39-57%
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang from 2023-07-08 to 2023-07-11.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	ERP(dBm)	Limit (dBm)
GSM	128	824.2	32.48	30.29	38.45
	190	836.6	32.44	30.25	38.45
	251	848.8	32.41	30.22	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.51	31.44	30.00	28.84	30.32	29.25	27.81	26.65	38.45
	190	836.6	32.44	31.13	30.12	29.00	30.25	28.94	27.93	26.81	38.45
	251	848.8	32.37	31.11	30.15	29.08	30.18	28.92	27.96	26.89	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.52	25.43	23.99	23.11	24.33	23.24	21.80	20.92	38.45
	190	836.6	26.38	25.39	23.93	23.03	24.19	23.20	21.74	20.84	38.45
	251	848.8	26.34	25.12	24.27	23.10	24.15	22.93	22.08	20.91	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 5)	RMC12.2k		21.87	22.77	22.27	19.68	20.58	20.08
	HSDPA	1	22.17	22.32	22.01	19.98	20.13	19.82
		2	20.94	20.20	20.38	18.75	18.01	18.19
		3	20.57	19.79	20.03	18.38	17.60	17.84
		4	20.53	19.79	20.03	18.34	17.60	17.84
	HSUPA	1	21.04	22.12	21.89	18.85	19.93	19.70
		2	21.38	21.56	21.31	19.19	19.37	19.12
		3	21.01	21.18	20.95	18.82	18.99	18.76
		4	20.97	21.09	20.85	18.78	18.90	18.66
		5	21.56	21.75	21.47	19.37	19.56	19.28

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)

For GSM850 / WCDMA Band5: Antenna Gain = -0.04dBi = -2.19dBd (0dBd=2.15dBi)

Limit: ERP≤38.45dBm

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	EIRP(dBm)	Limit (dBm)
GSM	512	1850.2	29.58	30.17	33
	661	1880.0	29.36	29.95	33
	810	1909.8	29.25	29.84	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.38	28.23	27.22	26.15	29.97	28.82	27.81	26.74	33
	661	1880.0	29.19	28.09	27.18	26.17	29.78	28.68	27.77	26.76	33
	810	1909.8	29.08	28.19	26.76	25.74	29.67	28.78	27.35	26.33	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.52	24.49	23.21	22.21	26.11	25.08	23.80	22.80	33
	661	1880.0	25.37	24.03	22.73	21.59	25.96	24.62	23.32	22.18	33
	810	1909.8	25.32	23.98	22.72	21.82	25.91	24.57	23.31	22.41	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
WCDMA (Band 2)	RMC12.2k		22.42	22.10	21.57	23.01	22.69	22.16
	HSDPA	1	21.33	22.23	21.38	21.92	22.82	21.97
		2	20.97	21.40	21.79	21.56	21.99	22.38
		3	20.52	21.03	21.41	21.11	21.62	22.00
		4	20.55	21.05	21.43	21.14	21.64	22.02
	HSUPA	1	21.32	21.64	21.36	21.91	22.23	21.95
		2	20.58	20.77	21.16	21.17	21.36	21.75
		3	20.19	20.41	20.77	20.78	21.00	21.36
		4	20.18	20.40	20.76	20.77	20.99	21.35
		5	20.79	20.99	21.31	21.38	21.58	21.90

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)
 For PCS1900 / WCDMA Band2: Antenna Gain = 0.59dBi
 Limit: EIRP≤33dBm

LTE Band 2

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	23.11	22.68	22.50	23.70	23.27	23.09
		RB1#3	23.05	22.65	22.41	23.64	23.24	23.00
		RB1#5	23.16	22.66	22.57	23.75	23.25	23.16
		RB3#0	22.99	22.62	22.32	23.58	23.21	22.91
		RB3#3	22.99	22.63	22.44	23.58	23.22	23.03
		RB6#0	22.06	21.69	21.45	22.65	22.28	22.04
	16QAM	RB1#0	22.03	21.70	21.63	22.62	22.29	22.22
		RB1#3	22.09	21.70	21.55	22.68	22.29	22.14
		RB1#5	22.23	21.73	21.74	22.82	22.32	22.33
		RB3#0	22.13	21.88	21.34	22.72	22.47	21.93
		RB3#3	22.14	21.89	21.48	22.73	22.48	22.07
		RB6#0	21.17	20.87	20.60	21.76	21.46	21.19
3.0	QPSK	RB1#0	22.76	22.45	22.01	23.35	23.04	22.60
		RB1#8	22.82	22.55	22.21	23.41	23.14	22.80
		RB1#14	22.85	22.45	22.35	23.44	23.04	22.94
		RB6#0	21.87	21.55	21.11	22.46	22.14	21.70
		RB6#9	21.90	21.57	21.35	22.49	22.16	21.94
		RB15#0	21.91	21.60	21.21	22.50	22.19	21.80
	16QAM	RB1#0	22.00	21.50	21.55	22.59	22.09	22.14
		RB1#8	22.06	21.63	21.78	22.65	22.22	22.37
		RB1#14	22.10	21.55	21.92	22.69	22.14	22.51
		RB6#0	21.09	20.67	20.34	21.68	21.26	20.93
		RB6#9	21.16	20.74	20.55	21.75	21.33	21.14
		RB15#0	21.11	20.81	20.49	21.70	21.40	21.08

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	22.61	22.25	21.85	23.20	22.84	22.44
		RB1#13	22.86	22.50	22.05	23.45	23.09	22.64
		RB1#24	22.84	22.35	22.22	23.43	22.94	22.81
		RB15#0	21.82	21.50	21.00	22.41	22.09	21.59
		RB15#10	21.94	21.53	21.14	22.53	22.12	21.73
		RB25#0	21.86	21.51	21.07	22.45	22.10	21.66
	16QAM	RB1#0	21.96	21.37	20.81	22.55	21.96	21.40
		RB1#13	22.20	21.65	21.02	22.79	22.24	21.61
		RB1#24	22.20	21.52	21.21	22.79	22.11	21.80
		RB15#0	21.02	20.69	20.20	21.61	21.28	20.79
		RB15#10	21.09	20.71	20.30	21.68	21.30	20.89
		RB25#0	21.07	20.71	20.31	21.66	21.30	20.90
10.0	QPSK	RB1#0	22.27	21.91	21.76	22.86	22.50	22.35
		RB1#25	22.72	22.29	21.69	23.31	22.88	22.28
		RB1#49	22.40	22.14	21.88	22.99	22.73	22.47
		RB25#0	21.56	21.12	20.67	22.15	21.71	21.26
		RB25#25	21.67	21.17	20.69	22.26	21.76	21.28
		RB50#0	21.62	21.26	20.71	22.21	21.85	21.30
	16QAM	RB1#0	21.47	20.91	21.31	22.06	21.50	21.90
		RB1#25	21.98	21.35	21.33	22.57	21.94	21.92
		RB1#49	21.65	21.20	21.47	22.24	21.79	22.06
		RB25#0	20.78	20.35	19.93	21.37	20.94	20.52
		RB25#25	20.95	20.45	19.98	21.54	21.04	20.57
		RB50#0	20.85	20.44	19.97	21.44	21.03	20.56

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	22.64	22.63	23.01	23.23	23.22	23.60
		RB1#38	22.99	22.83	22.25	23.58	23.42	22.84
		RB1#74	22.74	22.74	22.32	23.33	23.33	22.91
		RB36#0	21.91	21.69	21.60	22.50	22.28	22.19
		RB36#39	21.91	21.74	21.25	22.50	22.33	21.84
		RB75#0	21.75	21.83	21.41	22.34	22.42	22.00
	16QAM	RB1#0	22.00	21.69	22.34	22.59	22.28	22.93
		RB1#38	22.47	21.87	21.66	23.06	22.46	22.25
		RB1#74	22.21	21.85	21.73	22.80	22.44	22.32
		RB36#0	21.14	20.71	20.85	21.73	21.30	21.44
		RB36#39	21.35	20.88	20.39	21.94	21.47	20.98
		RB75#0	21.36	21.04	20.59	21.95	21.63	21.18
20.0	QPSK	RB1#0	22.67	22.30	22.70	23.26	22.89	23.29
		RB1#50	22.92	22.52	22.30	23.51	23.11	22.89
		RB1#99	22.52	22.61	22.21	23.11	23.20	22.80
		RB50#0	21.95	21.36	21.81	22.54	21.95	22.40
		RB50#50	21.78	21.56	21.09	22.37	22.15	21.68
		RB100#0	21.64	21.73	21.22	22.23	22.32	21.81
	16QAM	RB1#0	21.88	21.89	22.07	22.47	22.48	22.66
		RB1#50	22.24	22.15	21.72	22.83	22.74	22.31
		RB1#99	21.77	22.20	21.55	22.36	22.79	22.14
		RB50#0	21.14	20.46	21.03	21.73	21.05	21.62
		RB50#50	20.96	20.67	20.31	21.55	21.26	20.90
		RB100#0	20.67	20.90	20.48	21.26	21.49	21.07

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band2: Antenna Gain = 0.59dBi

Limit: EIRP ≤ 33dBm

LTE Band 4

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	22.87	22.57	22.12	22.03	21.73	21.28
		RB1#3	22.78	22.51	22.01	21.94	21.67	21.17
		RB1#5	22.95	22.64	22.09	22.11	21.80	21.25
		RB3#0	22.76	22.48	22.04	21.92	21.64	21.20
		RB3#3	22.78	22.53	22.01	21.94	21.69	21.17
		RB6#0	21.74	21.55	20.99	20.90	20.71	20.15
	16QAM	RB1#0	21.94	21.59	21.15	21.10	20.75	20.31
		RB1#3	21.88	21.53	21.08	21.04	20.69	20.24
		RB1#5	21.99	21.66	21.09	21.15	20.82	20.25
		RB3#0	21.69	21.59	21.24	20.85	20.75	20.40
		RB3#3	21.76	21.63	21.26	20.92	20.79	20.42
		RB6#0	20.75	20.49	20.04	19.91	19.65	19.20
3.0	QPSK	RB1#0	22.71	22.45	22.01	21.87	21.61	21.17
		RB1#8	22.79	22.59	22.02	21.95	21.75	21.18
		RB1#14	22.69	22.51	21.93	21.85	21.67	21.09
		RB6#0	21.72	21.54	21.12	20.88	20.70	20.28
		RB6#9	21.74	21.58	21.00	20.90	20.74	20.16
		RB15#0	21.78	21.57	21.09	20.94	20.73	20.25
	16QAM	RB1#0	21.76	21.46	21.64	20.92	20.62	20.80
		RB1#8	21.96	21.58	21.62	21.12	20.74	20.78
		RB1#14	21.83	21.60	21.53	20.99	20.76	20.69
		RB6#0	20.73	20.51	20.14	19.89	19.67	19.30
		RB6#9	20.81	20.54	20.10	19.97	19.70	19.26
		RB15#0	20.73	20.58	20.16	19.89	19.74	19.32

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	22.68	22.32	22.11	21.84	21.48	21.27
		RB1#13	22.90	22.60	22.11	22.06	21.76	21.27
		RB1#24	22.68	22.52	21.94	21.84	21.68	21.10
		RB15#0	21.77	21.54	21.10	20.93	20.70	20.26
		RB15#10	21.67	21.60	21.08	20.83	20.76	20.24
		RB25#0	21.70	21.53	21.12	20.86	20.69	20.28
	16QAM	RB1#0	21.95	21.42	21.01	21.11	20.58	20.17
		RB1#13	22.09	21.68	21.11	21.25	20.84	20.27
		RB1#24	21.91	21.60	20.84	21.07	20.76	20.00
		RB15#0	20.73	20.57	20.12	19.89	19.73	19.28
		RB15#10	20.62	20.62	20.11	19.78	19.78	19.27
		RB25#0	20.72	20.56	20.13	19.88	19.72	19.29
10.0	QPSK	RB1#0	22.50	21.93	22.07	21.66	21.09	21.23
		RB1#25	22.50	22.39	21.94	21.66	21.55	21.10
		RB1#49	21.86	22.27	21.65	21.02	21.43	20.81
		RB25#0	21.31	21.14	20.95	20.47	20.30	20.11
		RB25#25	21.02	21.34	20.77	20.18	20.50	19.93
		RB50#0	21.19	21.22	20.76	20.35	20.38	19.92
	16QAM	RB1#0	21.52	20.92	21.66	20.68	20.08	20.82
		RB1#25	21.58	21.37	21.51	20.74	20.53	20.67
		RB1#49	20.98	21.28	21.17	20.14	20.44	20.33
		RB25#0	20.31	20.23	19.97	19.47	19.39	19.13
		RB25#25	20.06	20.36	19.83	19.22	19.52	18.99
		RB50#0	20.21	20.25	19.76	19.37	19.41	18.92

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	22.63	21.99	22.33	21.79	21.15	21.49
		RB1#38	22.25	22.54	22.17	21.41	21.70	21.33
		RB1#74	22.04	22.51	21.91	21.20	21.67	21.07
		RB36#0	21.49	21.29	21.40	20.65	20.45	20.56
		RB36#39	21.07	21.62	21.08	20.23	20.78	20.24
		RB75#0	21.17	21.50	21.17	20.33	20.66	20.33
	16QAM	RB1#0	21.72	21.41	21.95	20.88	20.57	21.11
		RB1#38	21.38	21.92	21.81	20.54	21.08	20.97
		RB1#74	21.21	21.92	21.47	20.37	21.08	20.63
		RB36#0	20.53	20.30	20.35	19.69	19.46	19.51
		RB36#39	20.06	20.50	19.99	19.22	19.66	19.15
		RB75#0	20.21	20.39	20.13	19.37	19.55	19.29
20.0	QPSK	RB1#0	22.64	21.91	22.30	21.80	21.07	21.46
		RB1#50	22.16	22.50	22.48	21.32	21.66	21.64
		RB1#99	22.29	22.45	21.94	21.45	21.61	21.10
		RB50#0	21.28	21.19	21.37	20.44	20.35	20.53
		RB50#50	21.06	21.51	21.01	20.22	20.67	20.17
		RB100#0	21.05	21.45	21.20	20.21	20.61	20.36
	16QAM	RB1#0	21.76	21.47	21.62	20.92	20.63	20.78
		RB1#50	21.39	22.08	21.82	20.55	21.24	20.98
		RB1#99	21.44	21.98	21.18	20.60	21.14	20.34
		RB50#0	20.29	20.23	20.33	19.45	19.39	19.49
		RB50#50	20.05	20.46	19.95	19.21	19.62	19.11
		RB100#0	20.05	20.38	20.16	19.21	19.54	19.32

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band4: Antenna Gain = -0.84dBi

Limit: EIRP ≤ 30dBm

LTE Band 5

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
1.4	QPSK	RB1#0	23.32	23.16	23.12	21.13	20.97	20.93
		RB1#3	23.18	23.14	22.88	20.99	20.95	20.69
		RB1#5	23.36	23.19	22.93	21.17	21.00	20.74
		RB3#0	23.26	23.14	22.92	21.07	20.95	20.73
		RB3#3	23.21	23.14	22.87	21.02	20.95	20.68
		RB6#0	22.22	22.21	21.93	20.03	20.02	19.74
	16QAM	RB1#0	22.28	22.27	22.18	20.09	20.08	19.99
		RB1#3	22.20	22.23	22.01	20.01	20.04	19.82
		RB1#5	22.32	22.29	22.11	20.13	20.10	19.92
		RB3#0	22.29	22.43	21.98	20.10	20.24	19.79
		RB3#3	22.30	22.43	21.89	20.11	20.24	19.70
		RB6#0	21.20	21.30	21.07	19.01	19.11	18.88
3	QPSK	RB1#0	23.13	23.00	22.89	20.94	20.81	20.70
		RB1#8	23.17	23.13	22.90	20.98	20.94	20.71
		RB1#14	23.10	22.99	22.80	20.91	20.80	20.61
		RB6#0	22.11	22.15	21.95	19.92	19.96	19.76
		RB6#9	22.23	22.17	21.93	20.04	19.98	19.74
		RB15#0	22.17	22.20	21.93	19.98	20.01	19.74
	16QAM	RB1#0	22.21	22.09	22.45	20.02	19.90	20.26
		RB1#8	22.35	22.24	22.43	20.16	20.05	20.24
		RB1#14	22.28	22.12	22.31	20.09	19.93	20.12
		RB6#0	21.27	21.17	21.07	19.08	18.98	18.88
		RB6#9	21.31	21.19	21.09	19.12	19.00	18.90
		RB15#0	21.23	21.31	21.15	19.04	19.12	18.96

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			ERP(dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	RB1#0	23.12	22.90	22.97	20.93	20.71	20.78
		RB1#13	23.21	23.13	22.96	21.02	20.94	20.77
		RB1#24	23.08	22.94	22.78	20.89	20.75	20.59
		RB15#0	22.15	22.16	21.96	19.96	19.97	19.77
		RB15#10	22.17	22.15	21.94	19.98	19.96	19.75
		RB25#0	22.19	22.12	21.97	20.00	19.93	19.78
	16QAM	RB1#0	22.33	22.05	21.87	20.14	19.86	19.68
		RB1#13	22.48	22.30	21.90	20.29	20.11	19.71
		RB1#24	22.40	22.11	21.82	20.21	19.92	19.63
		RB15#0	21.22	21.24	21.12	19.03	19.05	18.93
		RB15#10	21.24	21.22	21.07	19.05	19.03	18.88
		RB25#0	21.25	21.22	21.09	19.06	19.03	18.90
10	QPSK	RB1#0	22.76	22.71	22.68	20.57	20.52	20.49
		RB1#25	22.90	22.87	22.68	20.71	20.68	20.49
		RB1#49	22.62	22.64	22.43	20.43	20.45	20.24
		RB25#0	21.78	21.75	21.69	19.59	19.56	19.50
		RB25#25	21.76	21.76	21.61	19.57	19.57	19.42
		RB50#0	21.78	21.75	21.60	19.59	19.56	19.41
	16QAM	RB1#0	21.82	21.69	22.25	19.63	19.50	20.06
		RB1#25	22.07	21.97	22.28	19.88	19.78	20.09
		RB1#49	21.85	21.71	22.01	19.66	19.52	19.82
		RB25#0	20.91	20.86	20.83	18.72	18.67	18.64
		RB25#25	20.89	20.96	20.73	18.70	18.77	18.54
		RB50#0	20.94	20.85	20.72	18.75	18.66	18.53

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)
For Band5: Antenna Gain = -0.04dBi = -2.19dBd (0dBd=2.15dBi)
Limit: ERP≤38.45dBm

LTE Band 7

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	23.01	23.18	22.15	23.63	23.80	22.77
		RB1#13	23.09	23.40	22.28	23.71	24.02	22.90
		RB1#24	23.05	23.26	22.30	23.67	23.88	22.92
		RB15#0	22.34	22.65	21.45	22.96	23.27	22.07
		RB15#10	22.59	22.67	21.63	23.21	23.29	22.25
		RB25#0	22.51	22.64	21.49	23.13	23.26	22.11
	16QAM	RB1#0	22.45	22.39	21.20	23.07	23.01	21.82
		RB1#13	22.66	22.65	21.36	23.28	23.27	21.98
		RB1#24	22.62	22.52	21.42	23.24	23.14	22.04
		RB15#0	21.54	21.74	20.67	22.16	22.36	21.29
		RB15#10	21.64	21.77	20.75	22.26	22.39	21.37
		RB25#0	21.59	21.75	20.75	22.21	22.37	21.37
10.0	QPSK	RB1#0	22.89	22.84	22.04	23.51	23.46	22.66
		RB1#25	23.26	23.22	22.06	23.88	23.84	22.68
		RB1#49	23.18	23.12	22.12	23.80	23.74	22.74
		RB25#0	22.26	22.22	21.24	22.88	22.84	21.86
		RB25#25	22.50	22.41	21.27	23.12	23.03	21.89
		RB50#0	22.45	22.40	21.30	23.07	23.02	21.92
	16QAM	RB1#0	22.00	22.45	21.38	22.62	23.07	22.00
		RB1#25	22.41	22.85	21.48	23.03	23.47	22.10
		RB1#49	22.34	22.75	21.49	22.96	23.37	22.11
		RB25#0	21.40	21.33	20.38	22.02	21.95	21.00
		RB25#25	21.65	21.44	20.47	22.27	22.06	21.09
		RB50#0	21.55	21.40	20.42	22.17	22.02	21.04

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
15.0	QPSK	RB1#0	22.94	22.95	22.56	23.56	23.57	23.18
		RB1#38	23.24	23.24	22.10	23.86	23.86	22.72
		RB1#74	23.19	23.22	22.21	23.81	23.84	22.83
		RB36#0	22.43	22.32	21.61	23.05	22.94	22.23
		RB36#39	22.68	22.56	21.35	23.30	23.18	21.97
		RB75#0	22.53	22.50	21.43	23.15	23.12	22.05
	16QAM	RB1#0	22.25	22.49	22.26	22.87	23.11	22.88
		RB1#38	22.65	22.72	21.83	23.27	23.34	22.45
		RB1#74	22.61	22.66	21.84	23.23	23.28	22.46
		RB36#0	21.52	21.36	20.78	22.14	21.98	21.40
		RB36#39	21.80	21.60	20.60	22.42	22.22	21.22
		RB75#0	21.67	21.55	20.65	22.29	22.17	21.27
20.0	QPSK	RB1#0	22.86	22.81	22.79	23.48	23.43	23.41
		RB1#50	23.24	23.20	22.21	23.86	23.82	22.83
		RB1#99	23.03	23.11	22.13	23.65	23.73	22.75
		RB50#0	22.49	22.27	21.99	23.11	22.89	22.61
		RB50#50	22.62	22.56	21.30	23.24	23.18	21.92
		RB100#0	22.60	22.51	21.51	23.22	23.13	22.13
	16QAM	RB1#0	22.23	22.50	22.28	22.85	23.12	22.90
		RB1#50	22.70	22.88	21.79	23.32	23.50	22.41
		RB1#99	22.39	22.76	21.61	23.01	23.38	22.23
		RB50#0	21.57	21.26	21.13	22.19	21.88	21.75
		RB50#50	21.62	21.60	20.49	22.24	22.22	21.11
		RB100#0	21.60	21.58	20.62	22.22	22.20	21.24

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band 7: Antenna Gain = 0.62dBi

Limit: EIRP ≤ 33dBm

LTE Band 40:

2305-2315MHz

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5.0	QPSK	RB1#0	21.78	21.71	21.75	22.40	22.33	22.37
		RB1#13	21.89	21.77	21.80	22.51	22.39	22.42
		RB1#24	21.80	21.67	21.60	22.42	22.29	22.22
		RB15#0	20.92	20.78	20.76	21.54	21.40	21.38
		RB15#10	20.82	20.75	20.71	21.44	21.37	21.33
		RB25#0	20.81	20.71	20.73	21.43	21.33	21.35
	16QAM	RB1#0	21.05	21.15	20.86	21.67	21.77	21.48
		RB1#13	21.13	21.13	20.88	21.75	21.75	21.50
		RB1#24	20.88	21.04	20.82	21.50	21.66	21.44
		RB15#0	19.89	19.81	19.69	20.51	20.43	20.31
		RB15#10	19.78	19.75	19.64	20.40	20.37	20.26
		RB25#0	19.90	19.68	19.74	20.52	20.30	20.36
10.0	QPSK	RB1#0	/	21.59	/	/	22.21	/
		RB1#25	/	21.66	/	/	22.28	/
		RB1#49	/	21.42	/	/	22.04	/
		RB25#0	/	20.62	/	/	21.24	/
		RB25#25	/	20.52	/	/	21.14	/
		RB50#0	/	20.49	/	/	21.11	/
	16QAM	RB1#0	/	20.72	/	/	21.34	/
		RB1#25	/	20.69	/	/	21.31	/
		RB1#49	/	20.49	/	/	21.11	/
		RB25#0	/	19.69	/	/	20.31	/
		RB25#25	/	19.55	/	/	20.17	/
		RB50#0	/	19.48	/	/	20.10	/

2350-2360MHz

Bandwidth (MHz)	Modulation	RB size/ RB Offset	Conducted Average Output Power (dBm)			EIRP(dBm)		
			Low	Mid	High	Low	Mid	High
5	QPSK	RB1#0	21.82	21.87	21.80	22.44	22.49	22.42
		RB1#13	22.01	22.00	21.90	22.63	22.62	22.52
		RB1#24	21.85	21.83	21.69	22.47	22.45	22.31
		RB15#0	21.03	21.07	20.98	21.65	21.69	21.60
		RB15#10	21.02	21.03	20.87	21.64	21.65	21.49
		RB25#0	20.99	21.01	20.96	21.61	21.63	21.58
	16QAM	RB1#0	21.27	21.05	21.09	21.89	21.67	21.71
		RB1#13	21.40	21.19	21.21	22.02	21.81	21.83
		RB1#24	21.20	20.92	20.94	21.82	21.54	21.56
		RB15#0	20.16	20.12	20.04	20.78	20.74	20.66
		RB15#10	20.11	20.03	20.00	20.73	20.65	20.62
		RB25#0	20.03	20.09	20.06	20.65	20.71	20.68
10	QPSK	RB1#0	/	21.66	/	/	22.28	/
		RB1#25	/	21.87	/	/	22.49	/
		RB1#49	/	21.51	/	/	22.13	/
		RB25#0	/	20.79	/	/	21.41	/
		RB25#25	/	20.74	/	/	21.36	/
		RB50#0	/	20.76	/	/	21.38	/
	16QAM	RB1#0	/	20.66	/	/	21.28	/
		RB1#25	/	20.98	/	/	21.60	/
		RB1#49	/	20.60	/	/	21.22	/
		RB25#0	/	19.94	/	/	20.56	/
		RB25#25	/	19.84	/	/	20.46	/
		RB50#0	/	19.84	/	/	20.46	/

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)

For Band 40: Antenna Gain = 0.62dBi

Limit: EIRP ≤ 24dBm/5MHz

For 5MHz bandwidth, the channel power is equal to the test result in dBm/5MHz..

For 10MHz bandwidth, the channel power is the sum power of 10MHz bandwidth, the result is less than 24dBm, so in any 5MHz bandwidth, it's will not exceed limit

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	9.71	13
	Middle	9.62	13
	High	9.48	13
GPRS	Low	9.59	13
	Middle	9.74	13
	High	9.74	13
EGPRS	Low	12.64	13
	Middle	12.72	13
	High	12.78	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.39	13
	Middle	2.99	13
	High	3.01	13
HSDPA (16QAM)	Low	4.99	13
	Middle	4.93	13
	High	5.01	13
HSUPA (QPSK)	Low	6.17	13
	Middle	6.06	13
	High	6.06	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	9.59	13
	Middle	9.48	13
	High	9.48	13
GPRS	Low	9.59	13
	Middle	9.91	13
	High	9.77	13
EGPRS	Low	12.55	13
	Middle	12.35	13
	High	12.61	13

Mode	Channel	PAR (dB)	Limit (dB)
RMC (BPSK)	Low	3.65	13
	Middle	3.19	13
	High	3.16	13
HSDPA (16QAM)	Low	4.96	13
	Middle	5.04	13
	High	4.99	13
HSUPA (QPSK)	Low	6.14	13
	Middle	6.29	13
	High	5.65	13

LTE Band: (pre-scan all bandwidth, the worst case as below)

LTE Band 2 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.3	4.99	5.19	13	Pass
QPSK (100RB Size)	4.09	4.17	4.2	13	Pass
16QAM (1RB Size)	5.83	6.41	5.04	13	Pass
16QAM (100RB Size)	5.88	5.83	5.88	13	Pass

LTE Band 4 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.01	5.8	4.81	13	Pass
QPSK (100RB Size)	4.14	3.94	4.06	13	Pass
16QAM (1RB Size)	6.12	6.67	4.58	13	Pass
16QAM (100RB Size)	5.86	5.65	5.77	13	Pass

LTE Band 5 10MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.04	5.8	5.22	13	Pass
QPSK (50RB Size)	5.28	5.07	5.13	13	Pass
16QAM (1RB Size)	6.96	6.78	5.8	13	Pass
16QAM (50RB Size)	6.2	6.17	6.14	13	Pass

LTE Band 7 20MHz Bandwidth

Modulation	Low channel (dB)	Middle channel (dB)	High channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.42	4	3.3	13	Pass
QPSK (100RB Size)	3.59	3.68	3.88	13	Pass
16QAM (1RB Size)	4.41	4.61	3.77	13	Pass
16QAM (100RB Size)	5.25	5.39	5.62	13	Pass

Duty Cycle:

LTE Band 40
2305-2315MHz


Test Modulation	Test Bandwidth	Ton (ms)	Total (ms)	Duty Cycle (%)	Limit (%)
QPSK	5M	2.998	10.003	29.971	38
	10M	2.995	10.003	29.941	
16-QAM	5M	2.998	10.003	29.971	
	10M	3.000	10.003	29.991	

2350-2360MHz


Test Modulation	Test Bandwidth	Ton (ms)	Total (ms)	Duty Cycle (%)	Limit (%)
QPSK	5M	2.998	10.003	29.971	38
	10M	2.998	10.003	29.971	
16-QAM	5M	2.995	10.003	29.941	
	10M	2.993	10.000	29.930	

2305-2315MHz:


LTE Band 40_5M_QPSK

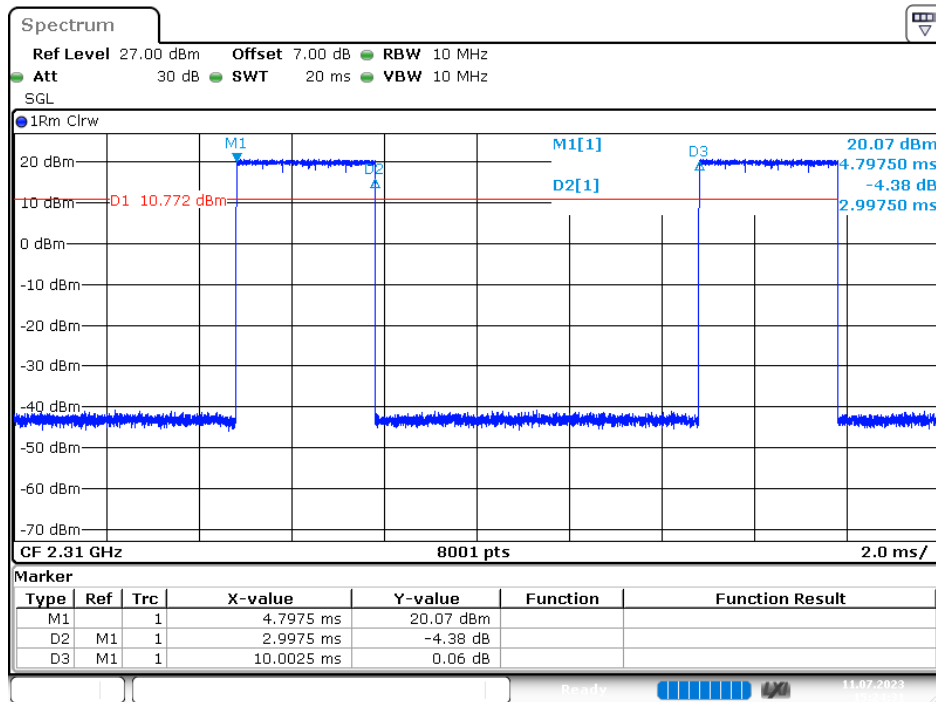

LTE Band 40_5M_16QAM

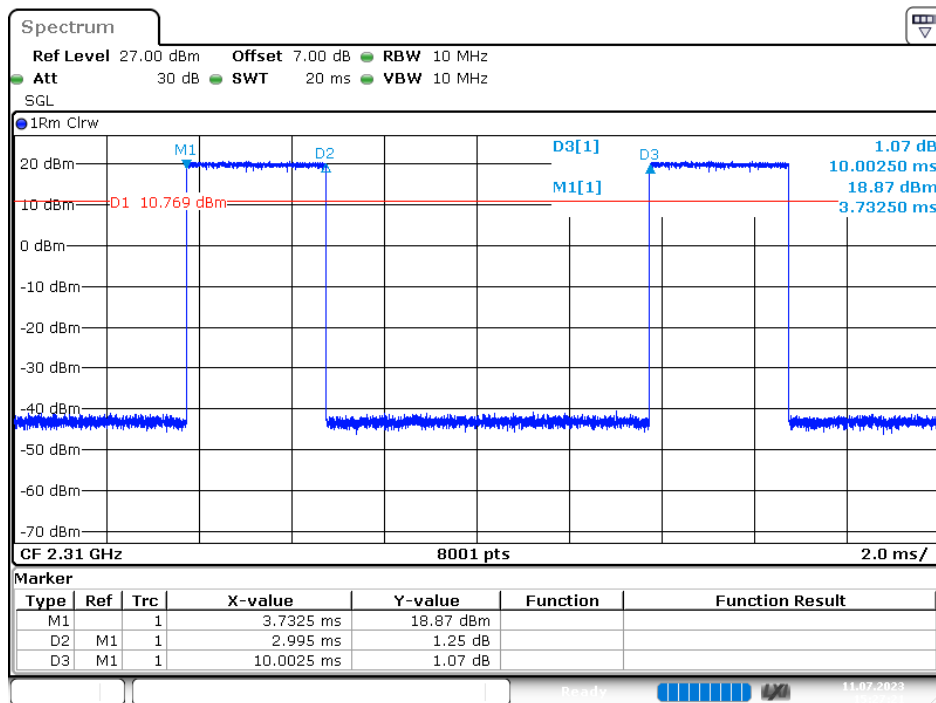


LTE Band 40_10M_QPSK

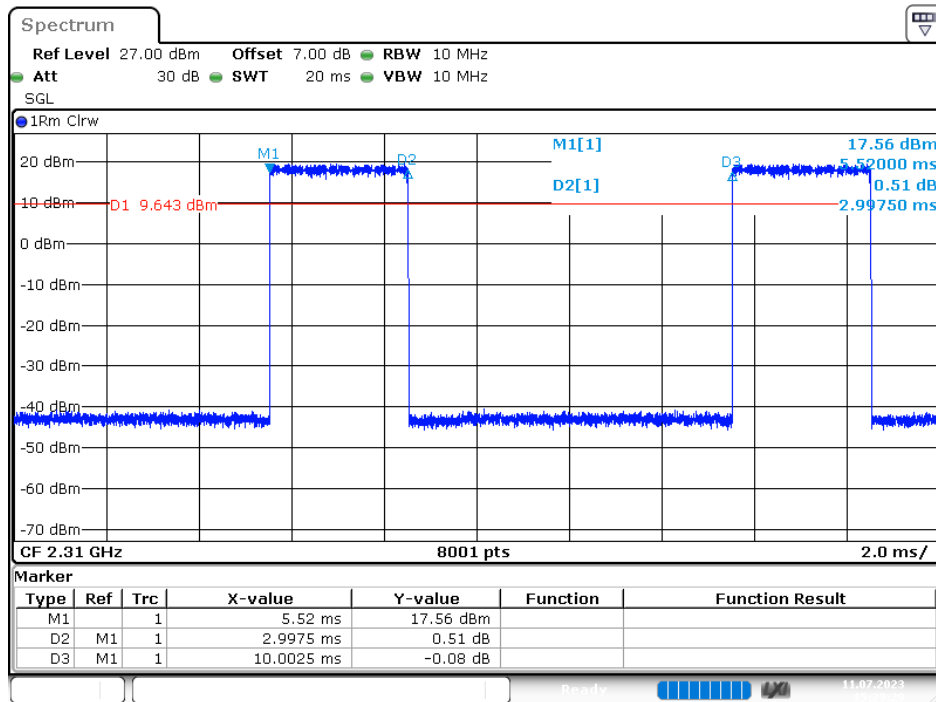

Date: 11.JUL.2023 15:29:30


LTE Band 40_10M_16QAM

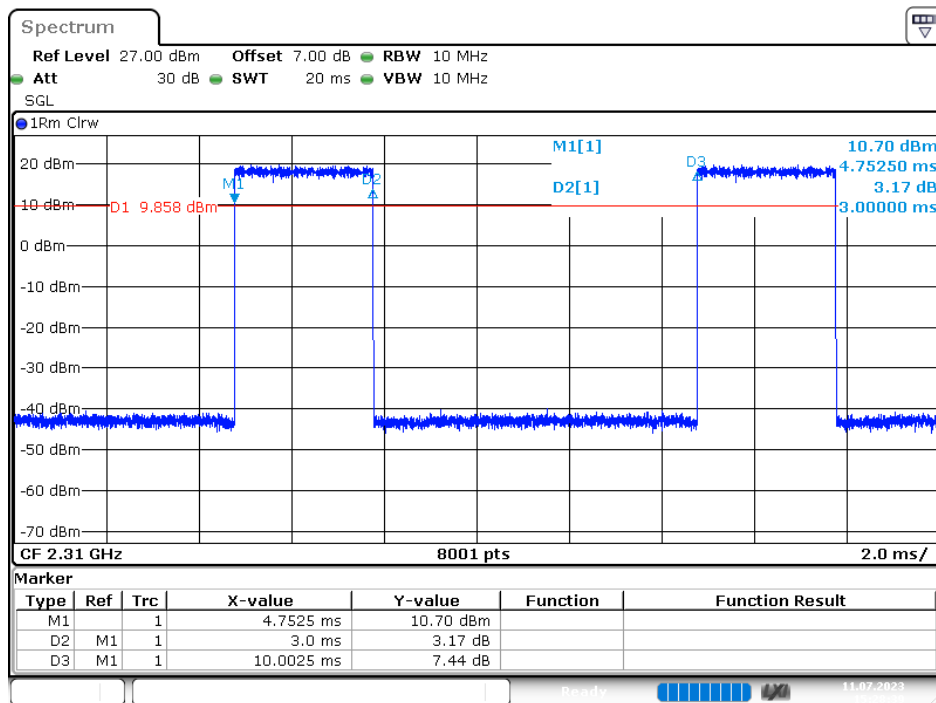

Date: 11.JUL.2023 15:28:39


2350-2360MHz:

LTE Band 40_5M_QPSK_

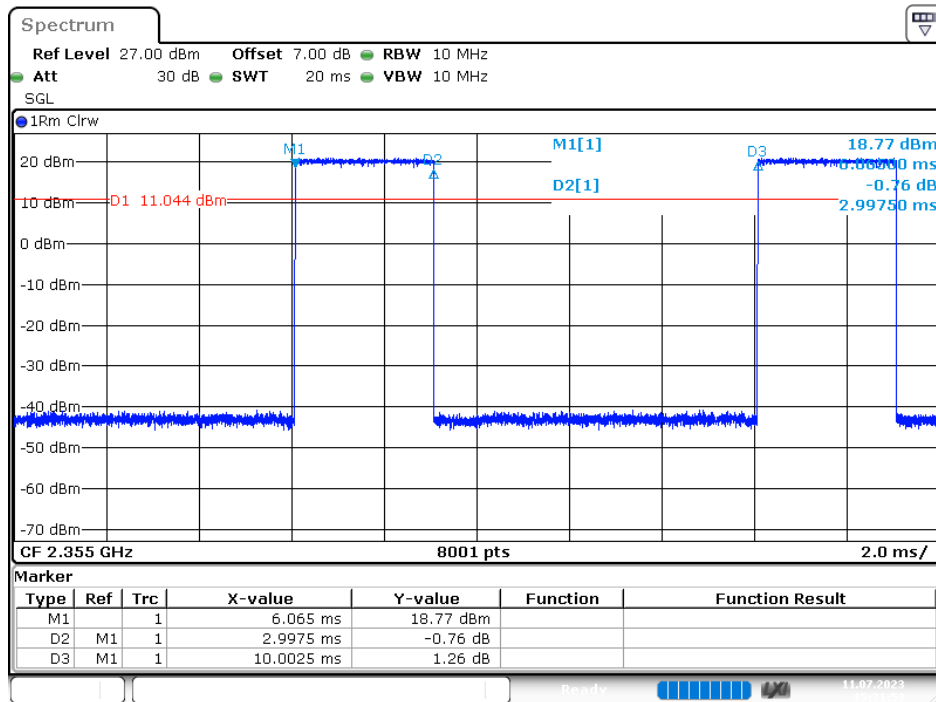


Date: 11.JUL.2023 15:31:54

LTE Band 40_5M_16QAM

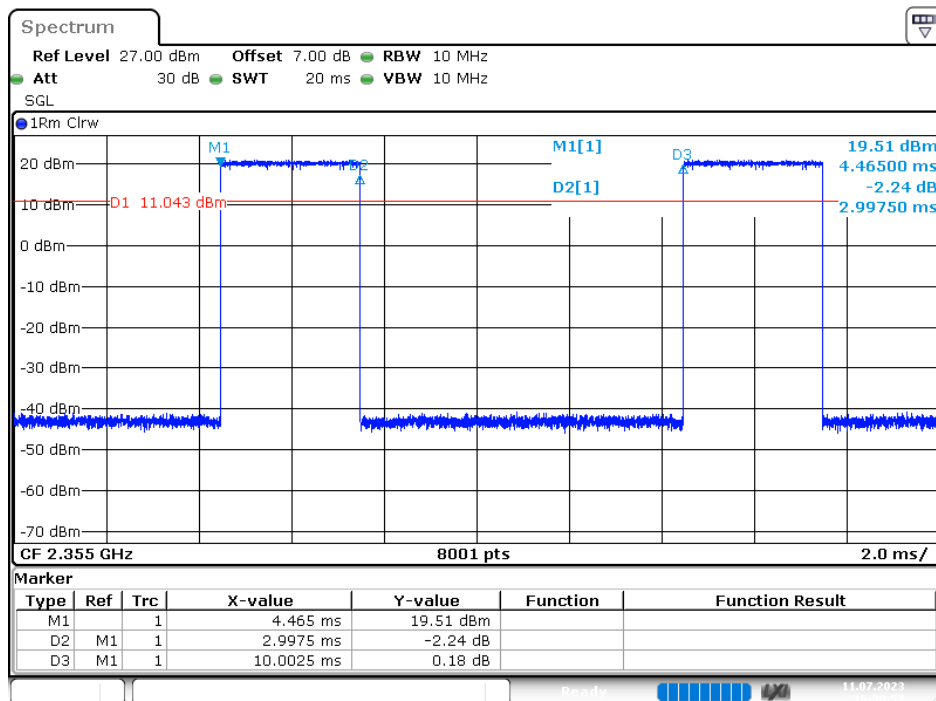


Date: 11.JUL.2023 15:30:57

LTE Band 40_10M_QPSK

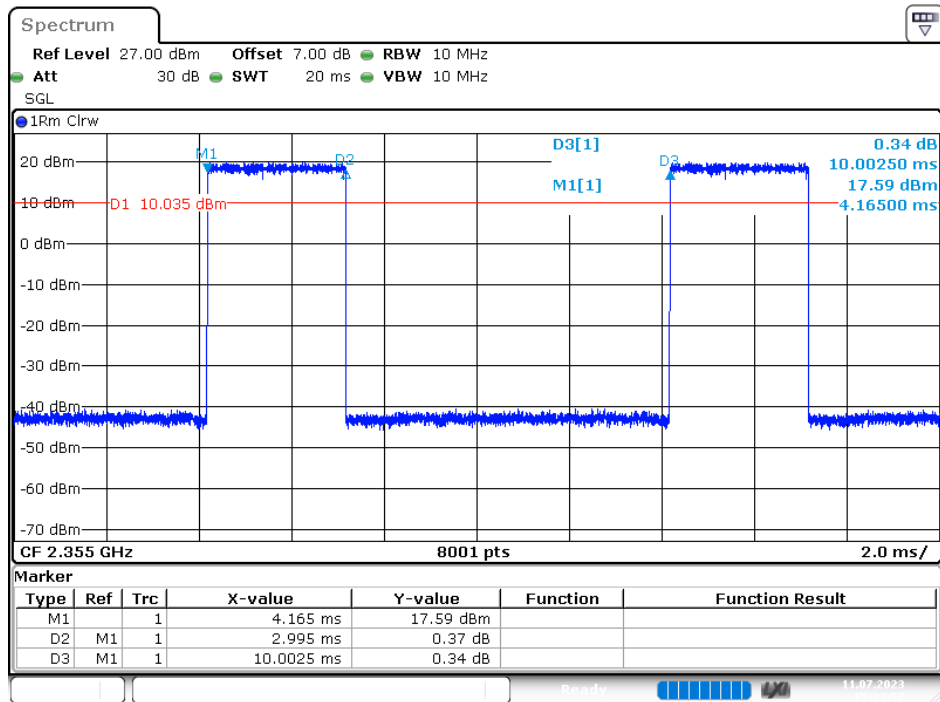

Date: 11.JUL.2023 15:33:58

LTE Band 40_10M_16QAM

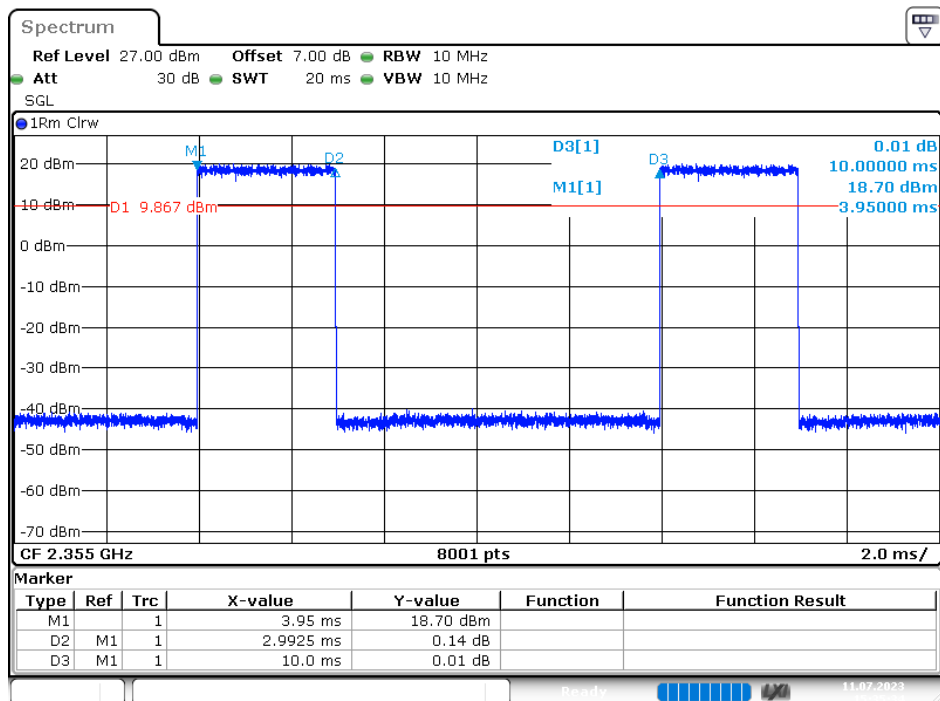

Date: 11.JUL.2023 15:35:34

FCC §2.1049, §22.917, §22.905 & §24.238&§27.53 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

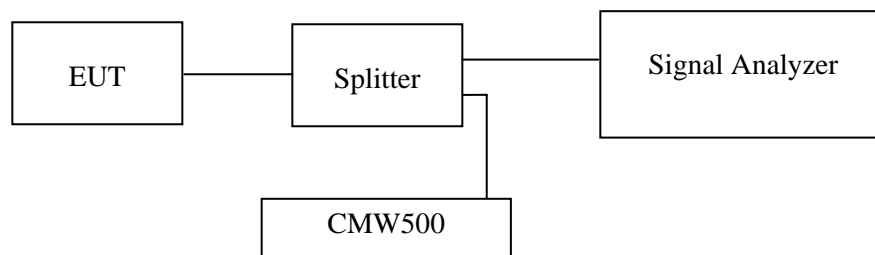

Note: the path loss (cable loss and splitter inset loss) among the test frequency range has including in test plot.

Test Data

Environmental Conditions

Temperature:	26-27°C
Relative Humidity:	39-57 %
ATM Pressure:	100.19 kPa

The testing was performed by Jacob Huang from 2023-07-08 to 2023-07-11.

EUT operation mode: Transmitting

Test Result: Pass. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	128	824.2	244.76	323
	190	836.6	244.76	322
	251	848.8	244.76	323
GPRS(GMSK)	128	824.2	241.76	323
	190	836.6	246.75	323
	251	848.8	247.75	325
EGPRS(8PSK)	128	824.2	247.75	317
	190	836.6	239.76	320
	251	848.8	242.76	307

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC	826.4	4.15	4.73
	836.4	4.15	4.74
	846.6	4.15	4.74
HSDPA	826.4	4.15	4.73
	836.4	4.17	4.74
	846.6	4.15	4.71
HSUPA	826.4	4.15	4.74
	836.4	4.17	4.73
	846.6	4.17	4.73

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	512	1850.2	241.76	315
	661	1880.0	241.76	321
	810	1909.8	242.76	312
GPRS(GMSK)	512	1850.2	243.76	324
	661	1880.0	243.76	324
	810	1909.8	243.76	325
EGPRS(8PSK)	512	1850.2	248.75	322
	661	1880.0	247.75	320
	810	1909.8	244.76	318

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC	1852.4	4.15	4.73
	1880.0	4.15	4.73
	1907.6	4.15	4.74
HSDPA	1852.4	4.15	4.71
	1880.0	4.15	4.71
	1907.6	4.14	4.73
HSUPA	1852.4	4.15	4.71
	1880.0	4.17	4.73
	1907.6	4.15	4.71

LTE Band 2:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.108	1.266	1.102	1.266	1.108	1.278
	16QAM	1.102	1.272	1.108	1.278	1.102	1.272
3 MHz	QPSK	2.695	2.892	2.683	2.892	2.695	2.880
	16QAM	2.683	2.904	2.683	2.904	2.695	2.892
5 MHz	QPSK	4.511	4.880	4.491	4.880	4.511	4.880
	16QAM	4.511	4.880	4.511	4.900	4.511	4.880
10 MHz	QPSK	8.942	9.560	8.942	9.600	8.942	9.600
	16QAM	8.942	9.520	8.942	9.560	8.942	9.520
15 MHz	QPSK	13.413	14.520	13.473	14.520	13.473	14.520
	16QAM	13.473	14.520	13.473	14.460	13.473	14.460
20 MHz	QPSK	17.964	19.440	18.044	19.680	17.964	19.280
	16QAM	17.884	19.280	17.964	19.360	17.964	19.520

LTE Band 4:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.102	1.278	1.108	1.266	1.102	1.272
	16QAM	1.102	1.272	1.102	1.266	1.108	1.278
3 MHz	QPSK	2.695	2.880	2.683	2.904	2.695	2.880
	16QAM	2.683	2.904	2.683	2.904	2.695	2.892
5 MHz	QPSK	4.511	4.880	4.491	4.860	4.511	4.880
	16QAM	4.511	4.880	4.511	4.880	4.511	4.860
10 MHz	QPSK	8.942	9.600	8.942	9.560	8.942	9.600
	16QAM	8.942	9.560	8.942	9.560	8.942	9.560
15 MHz	QPSK	13.413	14.460	13.473	14.520	13.473	14.520
	16QAM	13.473	14.520	13.473	14.460	13.533	14.520
20 MHz	QPSK	17.964	19.520	17.964	19.680	17.964	19.280
	16QAM	17.884	19.600	17.964	19.280	17.884	19.440

LTE Band 5:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
1.4 MHz	QPSK	1.108	1.266	1.102	1.272	1.102	1.272
	16QAM	1.102	1.266	1.114	1.278	1.102	1.266
3 MHz	QPSK	2.695	2.880	2.683	2.892	2.683	2.892
	16QAM	2.683	2.904	2.683	2.904	2.683	2.892
5 MHz	QPSK	4.511	4.880	4.491	4.860	4.511	4.880
	16QAM	4.511	4.880	4.511	4.880	4.491	4.880
10 MHz	QPSK	8.942	9.600	8.942	9.600	8.942	9.560
	16QAM	8.942	9.560	8.942	9.520	8.942	9.520

LTE Band 7:

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.511	5.060	4.511	4.900	4.531	4.940
	16QAM	4.531	4.880	4.531	4.900	4.511	4.900
10 MHz	QPSK	8.942	9.560	8.942	9.560	8.942	9.600
	16QAM	8.942	9.560	8.942	9.600	8.942	9.560
15 MHz	QPSK	13.413	14.460	13.533	14.580	13.473	14.520
	16QAM	13.533	14.520	13.533	14.520	13.473	14.520
20 MHz	QPSK	17.964	19.440	17.964	19.760	17.964	19.360
	16QAM	17.964	19.360	17.964	19.600	17.964	19.440

LTE Band 40**2305-2315MHz**

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.511	4.900	4.491	5.020	4.511	4.960
	16QAM	4.511	5.000	4.511	4.860	4.511	5.020
10 MHz	QPSK	/	/	8.942	9.600	/	/
	16QAM	/	/	8.942	9.520	/	/

2350-2360MHz

Bandwidth	Modulation	Low channel		Middle channel		High channel	
		OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)	OBW (MHz)	26dB EBW (MHz)
5 MHz	QPSK	4.511	4.900	4.511	4.940	4.491	5.000
	16QAM	4.511	4.900	4.511	4.980	4.511	4.920
10 MHz	QPSK	/	/	8.942	9.600	/	/
	16QAM	/	/	8.942	9.520	/	/

The test plots please refer to the Appendix A.

FCC §2.1051, §22.917(a) & §24.238(a)& §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) & §24.238(a)&§27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

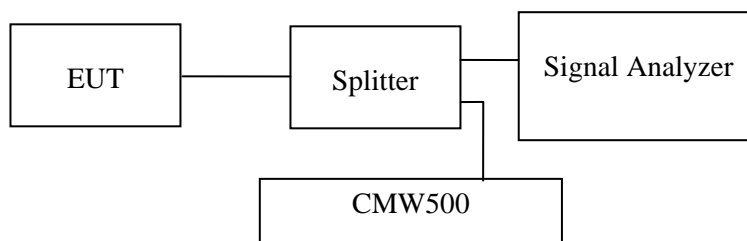

Note: the path loss (cable loss and splitter inset loss) among the test frequency range has including in test plot.

Test Data

Environmental Conditions

Temperature:	26-27 °C
Relative Humidity:	39-57 %
ATM Pressure:	100.19 kPa

The testing was performed by Jacob Huang from 2023-07-08 to 2023-07-11.

EUT operation mode: Transmitting

Test result: Pass.

The test plots please refer to the Appendix B.

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a)& § 24.238(a) & § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Temperature:	23-24 °C
Relative Humidity:	50-56 %
ATM Pressure:	100.19 kPa

The Below 1GHz testing was performed by Jason Liu on 2023-07-08.

The Above 1GHz testing was performed by Jimi Zheng on 2023-07-08.

EUT operation mode: Transmitting

(Pre-scan in the X, Y and Z axes of orientation, the worst case orientation was photo and recorded)

Cellular Band (Part 22H)

30MHz-10GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
GSM850, Low Channel									
66.01	-72.78	PK	178	1.0	H	0.52	-72.26	-13	-59.26
521.57	-78.92	PK	202	1.8	V	7.78	-71.14	-13	-58.14
1648.4	-54.06	PK	83	1.1	H	0.40	-53.66	-13	-40.66
1648.4	-56.89	PK	345	1.9	V	0.13	-56.76	-13	-43.76
GSM850, Middle Channel									
66.01	-72.38	PK	222	1.5	H	0.52	-71.86	-13	-58.86
521.57	-78.71	PK	265	1.9	V	7.78	-70.93	-13	-57.93
1673.2	-53.98	PK	19	2.1	H	0.45	-53.53	-13	-40.53
1673.2	-57.00	PK	153	2.0	V	0.51	-56.49	-13	-43.49
GSM850, High Channel									
66.01	-72.89	PK	219	1.4	H	0.52	-72.37	-13	-59.37
521.57	-78.53	PK	73	2.0	V	7.78	-70.75	-13	-57.75
1697.6	-53.09	PK	42	1.8	H	0.52	-52.57	-13	-39.57
1697.6	-56.44	PK	353	1.2	V	0.93	-55.51	-13	-42.51
WCDMA BAND5, Low Channel									
66.01	-72.41	PK	95	2.2	H	0.52	-71.89	-13	-58.89
521.57	-78.16	PK	223	2.2	V	7.78	-70.38	-13	-57.38
1652.8	-52.32	PK	252	1.6	H	0.40	-51.92	-13	-38.92
1652.8	-54.18	PK	281	1.2	V	0.16	-54.02	-13	-41.02
WCDMA BAND5, Middle Channel									
66.01	-72.19	PK	261	1.0	H	0.52	-71.67	-13	-58.67
521.57	-77.93	PK	82	1.4	V	7.78	-70.15	-13	-57.15
1673.2	-53.96	PK	8	1.7	H	0.45	-53.51	-13	-40.51
1673.2	-57.17	PK	196	1.6	V	0.51	-56.66	-13	-43.66
WCDMA BAND5, High Channel									
66.01	-72.87	PK	253	1.7	H	0.52	-72.35	-13	-59.35
521.57	-78.74	PK	70	1.7	V	7.78	-70.96	-13	-57.96
1693.2	-54.76	PK	89	2.1	H	0.51	-54.25	-13	-41.25
1693.2	-58.66	PK	256	1.1	V	0.85	-57.81	-13	-44.81

PCS Band (Part 24E)

30MHz-20GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
PCS1900, Low Channel									
66.01	-72.31	PK	149	1.1	H	0.52	-71.79	-13	-58.79
521.57	-77.96	PK	314	1.8	V	7.78	-70.18	-13	-57.18
3700.4	-44.22	PK	125	1.0	H	5.88	-38.34	-13	-25.34
3700.4	-41.50	PK	150	1.4	V	6.36	-35.14	-13	-22.14
PCS1900, Middle Channel									
66.01	-72.10	PK	26	1.7	H	0.52	-71.58	-13	-58.58
521.57	-77.82	PK	70	2.0	V	7.78	-70.04	-13	-57.04
3760	-43.26	PK	49	1.2	H	6.24	-37.02	-13	-24.02
3760	-41.55	PK	75	1.9	V	6.68	-34.87	-13	-21.87
PCS1900, High Channel									
66.01	-72.35	PK	166	1.2	H	0.52	-71.83	-13	-58.83
521.57	-78.46	PK	112	1.9	V	7.78	-70.68	-13	-57.68
3819.6	-42.63	PK	70	2.1	H	6.09	-36.54	-13	-23.54
3819.6	-40.32	PK	15	1.5	V	6.35	-33.97	-13	-20.97
WCDMA BAND2, Low Channel									
66.01	-72.83	PK	359	1.8	H	0.52	-72.31	-13	-59.31
521.57	-78.47	PK	117	1.1	V	7.78	-70.69	-13	-57.69
3704.8	-54.75	PK	69	2.1	H	5.91	-48.84	-13	-35.84
3704.8	-57.34	PK	86	1.5	V	6.40	-50.94	-13	-37.94
WCDMA BAND2, Middle Channel									
66.01	-72.98	PK	222	1.5	H	0.52	-72.46	-13	-59.46
521.57	-78.42	PK	299	2.1	V	7.78	-70.64	-13	-57.64
3760	-56.09	PK	256	2.0	H	6.24	-49.85	-13	-36.85
3760	-58.42	PK	68	2.2	V	6.68	-51.74	-13	-38.74
WCDMA BAND2, High Channel									
66.01	-72.04	PK	5	1.4	H	0.52	-71.52	-13	-58.52
521.57	-77.74	PK	81	2.1	V	7.78	-69.96	-13	-56.96
3815.2	-56.40	PK	211	2.1	H	6.18	-50.22	-13	-37.22
3815.2	-55.92	PK	289	1.3	V	6.38	-49.54	-13	-36.54

LTE Bands: (pre-scan all bandwidth/modulation, the worst case as below)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
LTE BAND2									
Test frequency range: 30MHz-20GHz									
1.4MHz bandwidth, QPSK, Low Channel									
66.01	-73.26	PK	223	1.3	H	0.52	-72.74	-13	-59.74
521.57	-79.34	PK	212	2.0	V	7.78	-71.56	-13	-58.56
3701.4	-56.03	PK	134	1.5	H	5.89	-50.14	-13	-37.14
3701.4	-57.88	PK	29	1.2	V	6.37	-51.51	-13	-38.51
1.4MHz bandwidth, QPSK, Middle Channel									
66.01	-72.66	PK	239	1.6	H	0.52	-72.14	-13	-59.14
521.57	-78.67	PK	252	1.9	V	7.78	-70.89	-13	-57.89
3760	-57.34	PK	287	1.5	H	6.24	-51.10	-13	-38.10
3760	-57.02	PK	75	1.8	V	6.68	-50.34	-13	-37.34
1.4MHz bandwidth, QPSK, High Channel									
66.01	-72.48	PK	158	1.9	H	0.52	-71.96	-13	-58.96
521.57	-78.59	PK	257	1.9	V	7.78	-70.81	-13	-57.81
3818.6	-58.46	PK	271	1.5	H	6.11	-52.35	-13	-39.35
3818.6	-57.19	PK	260	1.9	V	6.36	-50.83	-13	-37.83
LTE BAND4									
Test frequency range: 30MHz-20GHz									
1.4MHz bandwidth, QPSK, Low Channel									
66.01	-73.27	PK	86	1.1	H	0.52	-72.75	-13	-59.75
521.57	-79.24	PK	317	1.0	V	7.78	-71.46	-13	-58.46
3421.4	-56.78	PK	28	1.8	H	4.83	-51.95	-13	-38.95
3421.4	-57.64	PK	165	2.0	V	5.29	-52.35	-13	-39.35
1.4MHz bandwidth, QPSK, Middle Channel									
66.01	-72.30	PK	156	1.6	H	0.52	-71.78	-13	-58.78
521.57	-77.80	PK	2	1.9	V	7.78	-70.02	-13	-57.02
3465	-58.76	PK	187	1.2	H	5.34	-53.42	-13	-40.42
3465	-59.37	PK	328	1.2	V	5.50	-53.87	-13	-40.87
1.4MHz bandwidth, QPSK, High Channel									
66.01	-72.29	PK	246	1.6	H	0.52	-71.77	-13	-58.77
521.57	-78.26	PK	35	1.9	V	7.78	-70.48	-13	-57.48
3508.6	-59.31	PK	282	1.7	H	5.74	-53.57	-13	-40.57
3508.6	-59.89	PK	122	1.4	V	5.90	-53.99	-13	-40.99

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
LTE BAND5									
Test frequency range: 30MHz-10GHz									
1.4MHz bandwidth, QPSK, Low Channel									
66.01	-72.44	PK	76	2.0	H	0.52	-71.92	-13	-58.92
521.57	-77.99	PK	233	1.5	V	7.78	-70.21	-13	-57.21
1649.4	-55.92	PK	72	1.0	H	0.39	-55.53	-13	-42.53
1649.4	-52.46	PK	189	2.0	V	0.12	-52.34	-13	-39.34
1.4MHz bandwidth, QPSK, Middle Channel									
66.01	-72.91	PK	202	1.6	H	0.52	-72.39	-13	-59.39
521.57	-79.35	PK	32	1.9	V	7.78	-71.57	-13	-58.57
1673	-57.44	PK	157	1.6	H	0.45	-56.99	-13	-43.99
1673	-54.47	PK	224	1.1	V	0.51	-53.96	-13	-40.96
1.4MHz bandwidth, QPSK, High Channel									
66.01	-72.60	PK	330	1.3	H	0.52	-72.08	-13	-59.08
521.57	-78.14	PK	169	1.4	V	7.78	-70.36	-13	-57.36
1696.6	-57.66	PK	221	1.7	H	0.52	-57.14	-13	-44.14
1696.6	-55.46	PK	0	1.3	V	0.91	-54.55	-13	-41.55
LTE BAND7									
Test frequency range: 30MHz-26.5GHz									
10MHz bandwidth, QPSK, Low Channel									
66.01	-72.77	PK	76	2.0	H	0.52	-72.25	-25	-47.25
521.57	-78.31	PK	233	1.5	V	7.78	-70.53	-25	-45.53
5020	-53.81	PK	138	2.1	H	9.26	-44.55	-25	-19.55
5020	-52.86	PK	170	2.0	V	9.23	-43.63	-25	-18.63
10MHz bandwidth, QPSK, Middle Channel									
66.01	-73.37	PK	202	1.6	H	0.52	-72.85	-25	-47.85
521.57	-79.10	PK	32	1.9	V	7.78	-71.32	-25	-46.32
5070	-54.86	PK	254	1.8	H	9.06	-45.80	-25	-20.80
5070	-53.53	PK	222	1.7	V	9.29	-44.24	-25	-19.24
10MHz bandwidth, QPSK, High Channel									
66.01	-72.65	PK	330	1.3	H	0.52	-72.13	-25	-47.13
521.57	-77.80	PK	169	1.4	V	7.78	-70.02	-25	-45.02
5120	-54.86	PK	124	2.2	H	8.90	-45.96	-25	-20.96
5120	-54.36	PK	233	2.0	V	9.25	-45.11	-25	-20.11

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
LTE BAND 40 (2305-2315MHz)									
Test frequency range: 30MHz-26.5GHz									
5MHz bandwidth, QPSK, Low Channel									
66.01	-72.39	PK	82	1.4	H	0.52	-71.87	-40	-31.87
521.57	-78.32	PK	158	1.9	V	7.78	-70.54	-40	-30.54
4615	-57.13	PK	320	1.9	H	7.59	-49.54	-40	-9.54
4615	-58.13	PK	302	1.9	V	7.84	-50.29	-40	-10.29
5MHz bandwidth, QPSK, Middle Channel									
66.01	-71.77	PK	70	1.7	H	0.52	-71.25	-40	-31.25
521.57	-78.41	PK	86	1.1	V	7.78	-70.63	-40	-30.63
4620	-56.35	PK	132	1.5	H	6.99	-49.36	-40	-9.36
4620	-56.79	PK	359	1.3	V	7.41	-49.38	-40	-9.38
5MHz bandwidth, QPSK, High Channel									
66.01	-72.56	PK	51	1.5	H	0.52	-72.04	-40	-32.04
521.57	-78.71	PK	156	1.6	V	7.78	-70.93	-40	-30.93
4625	-57.1	PK	293	1.0	H	6.83	-50.27	-40	-10.27
4625	-58.91	PK	37	1.0	V	7.86	-51.05	-40	-11.05
LTE BAND 40 (2350-2360MHz)									
Test frequency range: 30MHz-26.5GHz									
5MHz bandwidth, QPSK, Low Channel									
66.01	-72.29	PK	279	2.1	H	0.52	-71.77	-40	-31.77
521.57	-78.11	PK	246	1.6	V	7.78	-70.33	-40	-30.33
4705	-56.96	PK	293	1.0	H	7.99	-48.97	-40	-8.97
4705	-57.58	PK	37	1.0	V	8.51	-49.07	-40	-9.07
5MHz bandwidth, QPSK, Middle Channel									
66.01	-72.97	PK	170	1.6	H	0.52	-72.45	-40	-32.45
521.57	-78.95	PK	76	2.0	V	7.78	-71.17	-40	-31.17
4710	-57.3	PK	13	1.6	H	8.04	-49.26	-40	-9.26
4710	-57.65	PK	208	2.1	V	8.51	-49.14	-40	-9.14
5MHz bandwidth, QPSK, High Channel									
66.01	-71.95	PK	36	1.2	H	0.52	-71.43	-40	-31.43
521.57	-78.23	PK	202	1.6	V	7.78	-70.45	-40	-30.45
4715	-57.96	PK	150	1.1	H	8.09	-49.87	-40	-9.87
4715	-57.99	PK	237	1.7	V	8.50	-49.49	-40	-9.49

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain

Margin = Absolute Level - Limit

The data which below the 20 dB limit was not recorded.

FCC§ 22.917 (a);§ 24.238 (a); §27.53 - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

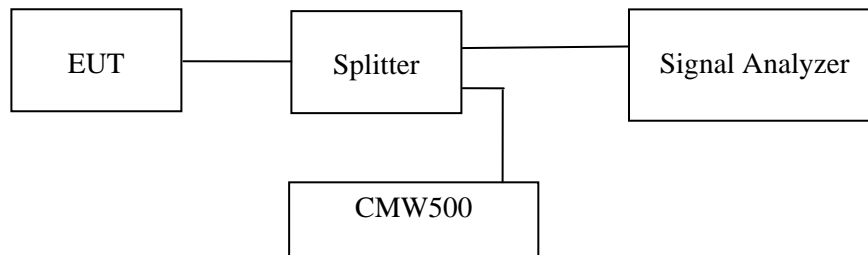

Note: the path loss (cable loss and splitter inset loss) among the test frequency range has including in test plot.

Test Data

Environmental Conditions

Temperature:	26-27°C
Relative Humidity:	39-57%
ATM Pressure:	100.19 kPa

The testing was performed by Jacob Huang from 2023-07-08 to 2023-07-11.

EUT operation mode: Transmitting (Worst case)

Test Result: Pass. The test plots please refer to the Appendix C.

FCC § 2.1055; § 22.355; § 24.235; §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235&§27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235&§27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The power leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

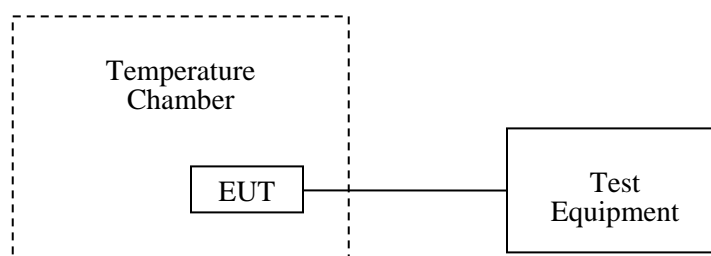

Test Data**Environmental Conditions**

Temperature:	26-27°C
Relative Humidity:	39-57%
ATM Pressure:	100.19 kPa

The testing was performed by Jacob Huang from 2023-07-08 to 2023-07-11.

EUT operation mode: Transmitting

Test Result: Pass. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0 = 836.4\text{MHz}$				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	-9.12	-0.0109	2.5
-20		-6.84	-0.0082	2.5
-10		-8.05	-0.0096	2.5
0		-5.69	-0.0068	2.5
10		-7.92	-0.0095	2.5
20		-15.23	-0.0182	2.5
30		-14.38	-0.0172	2.5
40		-11.61	-0.0139	2.5
50		-7.31	-0.0087	2.5
20	L.V.	-7.29	-0.0087	2.5
	H.V.	-6.50	-0.0078	2.5

EDGE Mode

Middle Channel, $f_0 = 836.4\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	3.08	0.0037	2.5
-20		3.40	0.0041	2.5
-10		-3.27	-0.0039	2.5
0		-2.48	-0.0030	2.5
10		-4.78	-0.0057	2.5
20		-5.23	-0.0063	2.5
30		-3.14	-0.0038	2.5
40		0.11	0.0001	2.5
50		-0.66	-0.0008	2.5
20		L.V.	-0.31	-0.0004
	H.V.	-0.04	-0.0001	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.4\text{MHz}$				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	0.28	0.0003	2.5
-20		-4.25	-0.0051	2.5
-10		1.34	0.0016	2.5
0		-3.01	-0.0036	2.5
10		-4.71	-0.0056	2.5
20		-8.19	-0.0098	2.5
30		-5.52	-0.0066	2.5
40		-2.14	-0.0026	2.5
50		-3.70	-0.0044	2.5
20		L.V.	-3.43	-0.0041
	H.V.	-3.06	-0.0037	2.5

PCS Band (Part 24E)**GSM Mode**

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1850.0278	1909.9654	1850	1910
-20		1850.0264	1909.9657	1850	1910
-10		1850.0283	1909.9715	1850	1910
0		1850.0275	1909.9679	1850	1910
10		1850.0248	1909.9669	1850	1910
20		1850.0296	1909.9717	1850	1910
30		1850.0286	1909.9643	1850	1910
40		1850.0283	1909.9701	1850	1910
50		1850.0244	1909.9680	1850	1910
20	L.V.	1850.0287	1909.9646	1850	1910
	H.V.	1850.0276	1909.9679	1850	1910

EDGE Mode

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1850.0222	1909.9739	1850	1910
-20		1850.0193	1909.9778	1850	1910
-10		1850.0243	1909.9728	1850	1910
0		1850.0204	1909.9755	1850	1910
10		1850.0214	1909.9754	1850	1910
20		1850.0186	1909.9783	1850	1910
30		1850.0248	1909.9744	1850	1910
40		1850.0252	1909.9757	1850	1910
50		1850.0248	1909.9733	1850	1910
20		L.V.	1850.0257	1909.9801	1850
	H.V.	1850.0233	1909.9770	1850	1910

WCDMA Mode

Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1850.0248	1909.9632	1850	1910
-20		1850.0260	1909.9670	1850	1910
-10		1850.0274	1909.9611	1850	1910
0		1850.0266	1909.9651	1850	1910
10		1850.0226	1909.9623	1850	1910
20		1850.0229	1909.9657	1850	1910
30		1850.0206	1909.9666	1850	1910
40		1850.0217	1909.9621	1850	1910
50		1850.0250	1909.9648	1850	1910
20	L.V.	1850.0217	1909.9633	1850	1910
	H.V.	1850.0236	1909.9632	1850	1910

LTE:**QPSK:****Band 2:**

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1850.0317	1909.9874	1850	1910
-20		1850.0372	1909.9818	1850	1910
-10		1850.0338	1909.9843	1850	1910
0		1850.0365	1909.9825	1850	1910
10		1850.0327	1909.9844	1850	1910
20		1850.0307	1909.9884	1850	1910
30		1850.0375	1909.9870	1850	1910
40		1850.0328	1909.9856	1850	1910
50		1850.0326	1909.9818	1850	1910
20	L.V.	1850.0331	1909.9892	1850	1910
	H.V.	1850.0370	1909.9817	1850	1910

Band 4:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1710.0411	1754.9752	1710	1755
-20		1710.0355	1754.9750	1710	1755
-10		1710.0360	1754.9727	1710	1755
0		1710.0364	1754.9747	1710	1755
10		1710.0362	1754.9746	1710	1755
20		1710.0359	1754.9774	1710	1755
30		1710.0376	1754.9757	1710	1755
40		1710.0341	1754.9756	1710	1755
50		1710.0358	1754.9765	1710	1755
20		L.V.	1710.0398	1754.9740	1710
	H.V.	1710.0409	1754.9739	1710	1755

Band 5:

10.0 MHz Middle Channel, f ₀ = 836.5MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	1.17	0.0014	2.5
-20		-6.72	-0.0080	2.5
-10		-2.47	-0.0030	2.5
0		-5.18	-0.0062	2.5
10		-3.99	-0.0048	2.5
20		-7.39	-0.0088	2.5
30		-2.25	-0.0027	2.5
40		-1.31	-0.0016	2.5
50		-6.39	-0.0076	2.5
20		L.V.	-6.00	-0.0072
	H.V.	-5.65	-0.0067	2.5

Band 7:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2500.0339	2569.9708	2500	2570
-20		2500.0400	2569.9663	2500	2570
-10		2500.0362	2569.9670	2500	2570
0		2500.0339	2569.9659	2500	2570
10		2500.0367	2569.9660	2500	2570
20		2500.0358	2569.9637	2500	2570
30		2500.0383	2569.9706	2500	2570
40		2500.0366	2569.9670	2500	2570
50		2500.0385	2569.9696	2500	2570
20		L.V.	2500.0344	2569.9699	2500
	H.V.	2500.0395	2569.9662	2500	2570

Band 40 (2305-2315MHz):

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2305.0260	2314.9790	2305	2315
-20		2305.0274	2314.9782	2305	2315
-10		2305.0236	2314.9795	2305	2315
0		2305.0296	2314.9805	2305	2315
10		2305.0263	2314.9812	2305	2315
20		2305.0296	2314.9795	2305	2315
30		2305.0298	2314.9841	2305	2315
40		2305.0264	2314.9794	2305	2315
50		2305.0246	2314.9791	2305	2315
20		L.V.	2305.0236	2314.9818	2305
	H.V.	2305.0267	2314.9855	2305	2315

Band 40 (2350-2360MHz):

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2350.0318	2359.9829	2350	2360
-20		2350.0326	2359.9835	2350	2360
-10		2350.0372	2359.9881	2350	2360
0		2350.0382	2359.9840	2350	2360
10		2350.0343	2359.9840	2350	2360
20		2350.0364	2359.9847	2350	2360
30		2350.0330	2359.9812	2350	2360
40		2350.0386	2359.9864	2350	2360
50		2350.0385	2359.9841	2350	2360
20		L.V.	2350.0361	2359.9849	2350
	H.V.	2350.0347	2359.9865	2350	2360

16QAM:**Band 2:**

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1850.0255	1909.9666	1850	1910
-20		1850.0242	1909.9641	1850	1910
-10		1850.0218	1909.9621	1850	1910
0		1850.0226	1909.9598	1850	1910
10		1850.0231	1909.9617	1850	1910
20		1850.0256	1909.9588	1850	1910
30		1850.0223	1909.9587	1850	1910
40		1850.0258	1909.9614	1850	1910
50		1850.0269	1909.9601	1850	1910
20		L.V.	1850.0211	1909.9609	1850
	H.V.	1850.0248	1909.9657	1850	1910

Band 4:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	1710.0286	1754.9741	1710	1755
-20		1710.0264	1754.9771	1710	1755
-10		1710.0240	1754.9785	1710	1755
0		1710.0234	1754.9787	1710	1755
10		1710.0253	1754.9762	1710	1755
20		1710.0234	1754.9758	1710	1755
30		1710.0291	1754.9802	1710	1755
40		1710.0225	1754.9760	1710	1755
50		1710.0267	1754.9791	1710	1755
20		L.V.	1710.0233	1754.9758	1710
	H.V.	1710.0264	1754.9753	1710	1755

Band 5:

10.0 MHz Middle Channel, f ₀ = 836.5MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	N.V.	13.73	0.0164	2.5
-20		13.01	0.0156	2.5
-10		14.53	0.0174	2.5
0		11.03	0.0132	2.5
10		13.86	0.0166	2.5
20		6.43	0.0077	2.5
30		11.51	0.0138	2.5
40		14.55	0.0174	2.5
50		12.38	0.0148	2.5
20		L.V.	12.67	0.0151
	H.V.	13.31	0.0159	2.5

Band 7:

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2500.0229	2569.9623	2500	2570
-20		2500.0218	2569.9640	2500	2570
-10		2500.0183	2569.9622	2500	2570
0		2500.0216	2569.9627	2500	2570
10		2500.0212	2569.9629	2500	2570
20		2500.0217	2569.9677	2500	2570
30		2500.0239	2569.9622	2500	2570
40		2500.0237	2569.9659	2500	2570
50		2500.0259	2569.9673	2500	2570
20		L.V.	2500.0216	2569.9652	2500
	H.V.	2500.0258	2569.9678	2500	2570

Band 40 (2305-2315MHz):

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V _{DC})	F _L (MHz)	F _H (MHz)	F _L Limit (MHz)	F _H Limit (MHz)
-30	N.V.	2305.0314	2314.9675	2305	2315
-20		2305.0373	2314.9667	2305	2315
-10		2305.0317	2314.9720	2305	2315
0		2305.0301	2314.9683	2305	2315
10		2305.0329	2314.9693	2305	2315
20		2305.0305	2314.9718	2305	2315
30		2305.0310	2314.9668	2305	2315
40		2305.0341	2314.9738	2305	2315
50		2305.0341	2314.9684	2305	2315
20		L.V.	2305.0335	2314.9664	2305
	H.V.	2305.0352	2314.9719	2305	2315

Band 40 (2350-2360MHz):

10 MHz Bandwidth					
Temperature (°C)	Power Supplied (V_{DC})	F_L (MHz)	F_H (MHz)	F_L Limit (MHz)	F_H Limit (MHz)
-30	N.V.	2350.0366	2359.9802	2350	2360
-20		2350.0380	2359.9779	2350	2360
-10		2350.0326	2359.9827	2350	2360
0		2350.0341	2359.9815	2350	2360
10		2350.0349	2359.9800	2350	2360
20		2350.0331	2359.9801	2350	2360
30		2350.0391	2359.9830	2350	2360
40		2350.0396	2359.9809	2350	2360
50		2350.0390	2359.9800	2350	2360
20		L.V.	2350.0333	2359.9778	2350
	H.V.	2350.0324	2359.9846	2350	2360

***** END OF REPORT *****