

# TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.  
 Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China  
 Report Number : SZNS211213-64419E-SAA  
 FCC ID: 2ATZ4-A13P5

## Test Standard (s)

FCC Part 2.1093

## Sample Description

Product Type: Smart Phone  
 Model No.: A13 Pro 5G  
 Multiple Model(s) No.: A13 Pro Max 5G(Please refer to DOS for Model difference)  
 Trade Mark: UMIDIGI  
 Date Received: 2021/12/13  
 Date of Test: 2022/05/06-2022/05/12  
 Report Date: 2022/05/19

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:



Lance Li  
 EMC Engineer

## Approved By:



Candy Li  
 EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

### Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

Attestation of Test Results			
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM 850	1g Head SAR	0.23	1.6
	1g Body SAR	0.48	
PCS 1900	1g Head SAR	0.88	
	1g Body SAR	0.40	
WCDMA Band 2	1g Head SAR	0.70	
	1g Body SAR	0.24	
WCDMA Band 5	1g Head SAR	0.25	
	1g Body SAR	0.31	
LTE Band 2	1g Head SAR	0.53	
	1g Body SAR	0.22	
LTE Band 5	1g Head SAR	0.19	
	1g Body SAR	0.24	
LTE Band 12	1g Head SAR	0.13	
	1g Body SAR	0.24	
LTE Band 41	1g Head SAR	<b>1.42</b>	
	1g Body SAR	<b>0.80</b>	
5G NR n5	1g Head SAR	0.19	
	1g Body SAR	0.29	
2.4Gwifi	1g Head SAR	0.49	
	1g Body SAR	0.18	
5.2Gwifi	1g Head SAR	0.14	
	1g Body SAR	0.09	
5.8Gwifi	1g Head SAR	0.21	
	1g Body SAR	0.16	
Simultaneous	1g Head SAR	<b>1.58</b>	
	1g Body SAR	<b>0.95</b>	
	1g Body SAR	<b>0.95 (Hotspot)</b>	

<b>Applicable Standards</b>	<p><b>FCC 47 CFR part 2.1093</b> Radiofrequency radiation exposure evaluation: portable devices</p>
	<p><b>RF Exposure Procedures: TCB Workshop April 2019</b></p>
	<p><b>IEEE1528:2013</b> IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p>
	<p><b>IEC 62209-1:2016</b> Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)</p>
	<p><b>KDB procedures</b> KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 941225 D06 Hotspot Mode v02r01</p>
<p><b>Note:</b> This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in <b>FCC 47 CFR part 2.1093</b> and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. <b>The results and statements contained in this report pertain only to the device(s) evaluated.</b></p>	

## TABLE OF CONTENTS

<b>DOCUMENT REVISION HISTORY</b> .....	<b>5</b>
<b>EUT DESCRIPTION</b> .....	<b>6</b>
TECHNICAL SPECIFICATION .....	6
<b>REFERENCE, STANDARDS, AND GUIDELINES</b> .....	<b>7</b>
SAR LIMITS.....	8
<b>FACILITIES</b> .....	<b>9</b>
<b>DESCRIPTION OF TEST SYSTEM</b> .....	<b>10</b>
<b>EQUIPMENT LIST AND CALIBRATION</b> .....	<b>16</b>
EQUIPMENTS LIST & CALIBRATION INFORMATION.....	16
<b>SAR MEASUREMENT SYSTEM VERIFICATION</b> .....	<b>17</b>
LIQUID VERIFICATION .....	17
SYSTEM ACCURACY VERIFICATION.....	20
SAR SYSTEM VALIDATION DATA.....	21
<b>EUT TEST STRATEGY AND METHODOLOGY</b> .....	<b>29</b>
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR .....	29
CHEEK/TOUCH POSITION .....	30
EAR/TILT POSITION .....	30
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	31
TEST DISTANCE FOR SAR EVALUATION.....	31
SAR EVALUATION PROCEDURE .....	32
<b>CONDUCTED OUTPUT POWER MEASUREMENT</b> .....	<b>33</b>
TEST PROCEDURE.....	33
RADIO CONFIGURATION .....	33
MAXIMUM TARGET OUTPUT POWER .....	42
<b>STANDALONE SAR TEST EXCLUSION CONSIDERATIONS</b> .....	<b>68</b>
ANTENNA DISTANCE TO EDGE .....	69
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....	69
STANDALONE SAR ESTIMATION:.....	69
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT .....	70
<b>SAR MEASUREMENT RESULTS</b> .....	<b>71</b>
SAR TEST DATA .....	71
<b>SAR MEASUREMENT VARIABILITY</b> .....	<b>86</b>
<b>SAR SIMULTANEOUS TRANSMISSION DESCRIPTION</b> .....	<b>87</b>
<b>SAR PLOTS</b> .....	<b>96</b>
<b>APPENDIX A MEASUREMENT UNCERTAINTY</b> .....	<b>97</b>
<b>APPENDIX B EUT TEST POSITION PHOTOS</b> .....	<b>99</b>
<b>APPENDIX C PROBE CALIBRATION CERTIFICATES</b> .....	<b>100</b>
<b>APPENDIX D DIPOLE CALIBRATION CERTIFICATES</b> .....	<b>101</b>

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZNS211213-64419E-SAA	Original Report	2022-05-19

## EUT DESCRIPTION

This report has been prepared on behalf of *Shenzhen Youmi Intelligent Technology Co., Ltd.* and their product *Smart Phone*, Model: *A13 Pro 5G*, FCC ID: *2ATZ4-A13P5* or the EUT (Equipment under Test) as referred to in the rest of this report.

*Notes: This series products model: A13 Pro Max 5G and A13 Pro 5G are identical; Model A13 Pro 5G was selected for fully testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.*

## Technical Specification

<b>Device Type:</b>	Portable
<b>Exposure Category:</b>	Population / Uncontrolled
<b>Antenna Type(s):</b>	Internal Antenna
<b>Power Sensor</b>	None
<b>DTM Type:</b>	Class B
<b>Multi-slot Class:</b>	GPRS(Class 12)/ EGPRS(Class 12)
<b>Power Class</b>	LTE Band 41 for power class 3
<b>Body-Worn Accessories:</b>	Headset
<b>Face-Head Accessories:</b>	None
<b>Proximity Sensor:</b>	None
<b>Carrier Aggregation:</b>	None
<b>EN-DC Combinations:</b>	DC_2A_n5A (LTE anchor band(s) for NR n5 is LTE Band 2)
<b>Operation Mode :</b>	GSM Voice, GPRS Data, EGPRS Data, WCDMA( R99 (Voice+ Data), HSDPA/HSUPA/ HSPA+) FDD-LTE, TDD-LTE, 5G NR, Wi-Fi and Bluetooth
<b>Frequency Band:</b>	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 5: 824-849 MHz(TX) ; 869-894 MHz (RX) LTE Band 12: 698-716 MHz(TX) ; 729-746 MHz(RX) LTE Band 41: 2535-2655 MHz(TX); 2535-2655 MHz(RX) 5G NR n5: 824-849 MHz(TX) ; 869-894 MHz(RX) Wi-Fi 2.4G: 2412 -2472 MHz(TX&RX) Wi-Fi 5.2G:5150-5250MHz(TX&RX) Wi-Fi 5.8G:5725-5850MHz(TX&RX) Bluetooth: 2402 -2480 MHz(TX&RX) BLE: 2402 -2480 MHz(TX&RX)
<b>Power Source:</b>	Rechargeable Battery
<b>Normal Operation:</b>	Head and Body-worn

## REFERENCE, STANDARDS, AND GUIDELINES

---

### FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

### CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

**SAR Limits****FCC Limit(1g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	<b>1.60</b>	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

**CE Limit(10g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) applied to the EUT.



---

## **FACILITIES**

---

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

The test site has been registered with ISED Canada under ISED Canada Registration Number CN0016.


## DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

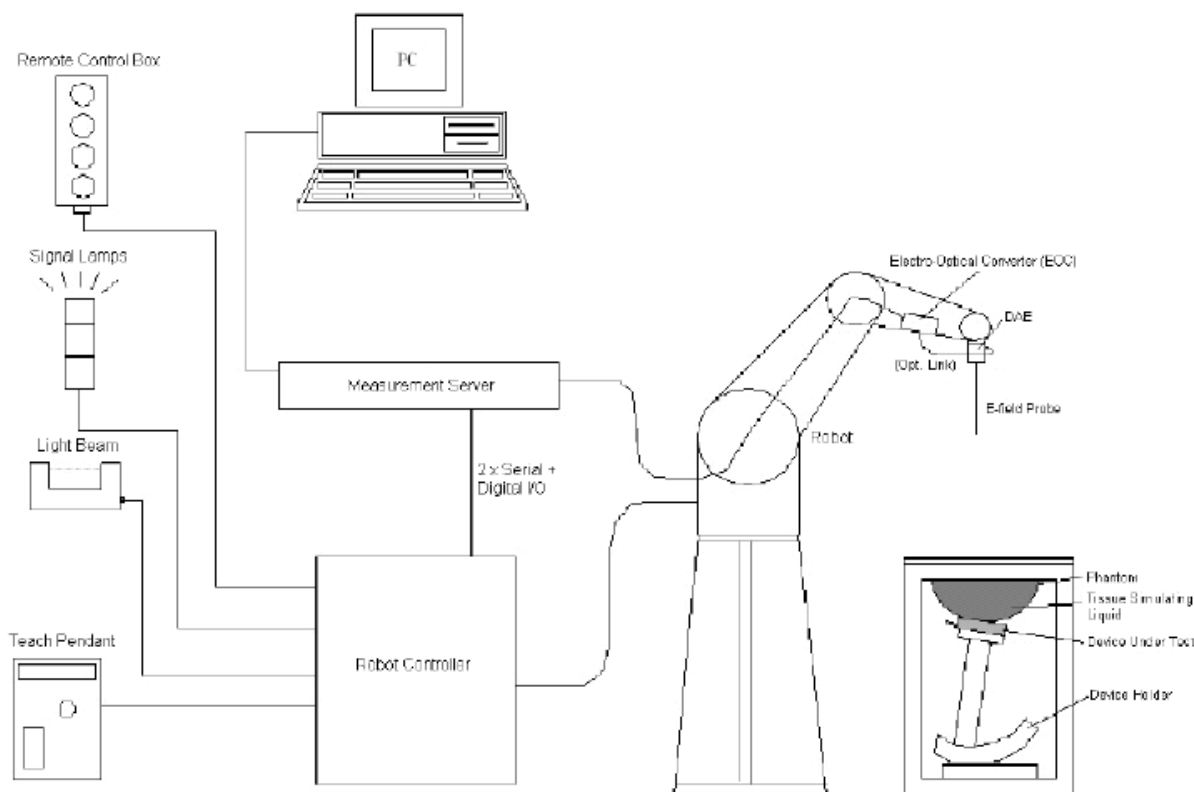

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**EX3DV4 E-Field Probes**

<b>Frequency</b>	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
<b>Compatibility</b>	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

**SAM Twin Phantom**

The SAM Twin Phantom (shown in front of DASY5) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm..

When the phantom is mounted inside allocated slot of the DASY5 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY5 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom.

Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.



## Calibration Frequency Points for EX3DV4 E-Field Probes SN: 3619 Calibrated: 2021/08/25

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
450 Head	350	550	8.89	8.89	8.89
600 Head	500	680	8.96	8.96	8.96
750 Head	680	810	8.63	8.63	8.63
835 Head	810	860	8.50	8.50	8.50
900 Head	860	1000	8.28	8.28	8.28
1750 Head	1650	1810	7.33	7.33	7.33
1900 Head	1810	2000	7.07	7.07	7.07
2450 Head	2350	2500	6.69	6.69	6.69
2600 Head	2500	2700	6.53	6.53	6.53
5250 Head	5140	5360	4.37	4.37	4.37
5600 Head	5490	5700	4.03	4.03	4.03
5800 Head	5700	5910	3.93	3.93	3.93

## Area Scans

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3$ GHz $< f \leq 10$ GHz
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface ( $z_{M1}$ in Figure 20 in mm)	$5 \pm 1$	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points in mm (see O.8.3.1) <sup>b</sup>	20, or half of the corresponding zoom scan length, whichever is smaller	$60/f_i$ , or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20) <sup>c</sup>	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Tolerance in the probe angle	1°	1°

<sup>a</sup>  $\delta$  is the penetration depth for a plane-wave incident normally on a planar half-space.

<sup>b</sup> See Clause O.8 on how  $\Delta x$  and  $\Delta y$  may be selected for individual area scan requirements.

<sup>c</sup> The probe angle relative to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.

**Zoom Scan (Cube Scan Averaging)**

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 10$ GHz
Maximum distance between the closest measured points and the phantom surface ( $z_{M1}$ in Figure 20 and Table 3, in mm)	5	$\delta \ln(2)/2$ <sup>a</sup>
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20)	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Maximum spacing between measured points in the $x$ - and $y$ -directions ( $\Delta x$ and $\Delta y$ , in mm)	8	$24/f$ <sup>b</sup>
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	5	$10/(f - 1)$
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	4	$12/f$
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ( $R_z = \Delta z_2/\Delta z_1$ in Figure 20)	1,5	1,5
Minimum edge length of the zoom scan volume in the $x$ - and $y$ -directions ( $L_z$ in O.8.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell ( $L_h$ in O.8.3.2 in mm)	30	22
Tolerance in the probe angle	1°	1°
<sup>a</sup> $\delta$ is the penetration depth for a plane-wave incident normally on a planar half-space.		
<sup>b</sup> This is the maximum spacing allowed, which might not work for all circumstances.		

## Tissue Dielectric Parameters for Head

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

### Recommended Tissue Dielectric Parameters for Head

**Table A.3 – Dielectric properties of the head tissue-equivalent liquid**

Frequency MHz	Relative permittivity $\epsilon_r$	Conductivity ( $\sigma$ ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

## EQUIPMENT LIST AND CALIBRATION


### Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.4	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1211	2022/03/01	2023/02/28
E-Field Probe	EX3DV4	3619	2021/08/25	2022/08/24
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V5.0	1744	NCR	NCR
Dipole,750MHz	D750V3	1194	2020/1/13	2023/1/12
Dipole,835MHz	D835V2	4d103	2021/10/27	2024/10/26
Dipole,1900MHz	D1900V2	5d128	2021/10/27	2024/10/26
Dipole,2450MHz	D2450V2	751	2020/10/13	2023/10/12
Dipole,2600MHz	D2600V2	1162	2019/10/2	2022/10/1
Dipole,5GHz	D5GHZV2	1301	2020/01/10	2023/01/09
Simulated Tissue Liquid Head(500-9500MHz)	HBBL600-10000V6	180622-2	Each Time	
Network Analyzer	8753D	3410A08288	2021/7/07	2022/7/06
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
Signal Generator	SMB100A	108362	2021/12/23	2022/12/22
USB wideband power sensor	U2021XA	MY52350001	2021/12/23	2022/12/22
Power Amplifier	CBA 1G-070	T44328	2021/12/23	2022/12/22
Linear Power Amplifier	AS0860-40/45	1060913	2021/12/23	2022/12/22
Directional Coupler	4223-20	3.113.277	2021/12/23	2022/12/22
6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2021/12/23	2022/12/22
Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
Wideband Radio Communication Tester	CMW500	143458	2022/03/02	2023/03/01
Radio Communication Test Station	Anritsu	MT8000A	2022/04/21	2023/04/20



# SAR MEASUREMENT SYSTEM VERIFICATION

## Liquid Verification

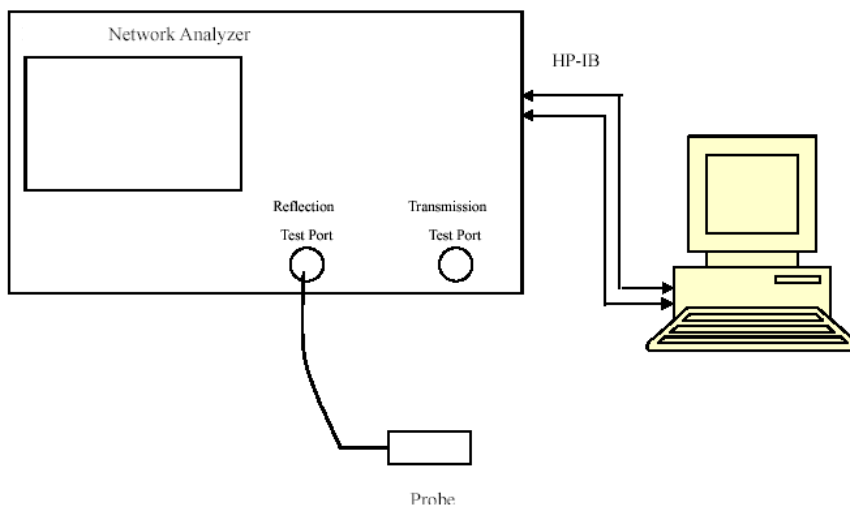

Liquid Verification Setup Block Diagram

## Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
704	Simulated Tissue Liquid Head	42.615	0.873	42.15	0.89	1.10	-1.91	$\pm 5$
707.5	Simulated Tissue Liquid Head	42.602	0.874	42.13	0.89	1.12	-1.80	$\pm 5$
711	Simulated Tissue Liquid Head	42.681	0.876	42.11	0.89	1.36	-1.57	$\pm 5$
750	Simulated Tissue Liquid Head	42.711	0.881	41.90	0.89	1.94	-1.01	$\pm 5$

\*Liquid Verification above was performed on 2022/05/07.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
824.2	Simulated Tissue Liquid Head	42.208	0.895	41.55	0.90	1.58	-0.56	$\pm 5$
834	Simulated Tissue Liquid Head	41.657	0.912	41.50	0.90	0.38	1.33	$\pm 5$
835	Simulated Tissue Liquid Head	41.649	0.912	41.50	0.90	0.36	1.33	$\pm 5$
836.5	Simulated Tissue Liquid Head	41.638	0.914	41.50	0.90	0.33	1.56	$\pm 5$
836.6	Simulated Tissue Liquid Head	42.232	0.904	41.50	0.90	1.76	0.44	$\pm 5$
839	Simulated Tissue Liquid Head	41.62	0.917	41.50	0.90	0.29	1.89	$\pm 5$
848.8	Simulated Tissue Liquid Head	42.268	0.898	41.50	0.91	1.85	-1.32	$\pm 5$

\*Liquid Verification above was performed on 2022/05/06.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
826.4	Simulated Tissue Liquid Head	42.088	0.892	41.54	0.90	1.32	-0.89	$\pm 5$
829	Simulated Tissue Liquid Head	42.034	0.897	41.53	0.90	1.21	-0.33	$\pm 5$
835	Simulated Tissue Liquid Head	42.026	0.905	41.50	0.90	1.27	0.56	$\pm 5$
836.5	Simulated Tissue Liquid Head	42.018	0.908	41.50	0.90	1.25	0.89	$\pm 5$
836.6	Simulated Tissue Liquid Head	42.022	0.905	41.50	0.90	1.26	0.56	$\pm 5$
844	Simulated Tissue Liquid Head	41.903	0.918	41.50	0.91	0.97	0.88	$\pm 5$
846.6	Simulated Tissue Liquid Head	41.988	0.916	41.50	0.91	1.18	0.66	$\pm 5$

\*Liquid Verification above was performed on 2022/05/08.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	40.998	1.379	40	1.4	2.49	-1.50	$\pm 5$
1852.4	Simulated Tissue Liquid Head	40.926	1.383	40	1.4	2.32	-1.21	$\pm 5$
1860	Simulated Tissue Liquid Head	40.795	1.392	40	1.4	1.99	-0.57	$\pm 5$
1880	Simulated Tissue Liquid Head	40.823	1.385	40	1.4	2.06	-1.07	$\pm 5$
1900	Simulated Tissue Liquid Head	40.865	1.414	40	1.4	2.16	1.00	$\pm 5$
1907.6	Simulated Tissue Liquid Head	40.724	1.407	40	1.4	1.81	0.50	$\pm 5$
1909.8	Simulated Tissue Liquid Head	40.783	1.413	40	1.4	1.96	0.93	$\pm 5$

\*Liquid Verification above was performed on 2022/05/09.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2412	Simulated Tissue Liquid Head	39.912	1.749	39.28	1.77	1.61	-1.19	$\pm 5$
2442	Simulated Tissue Liquid Head	39.865	1.765	39.22	1.79	1.64	-1.40	$\pm 5$
2450	Simulated Tissue Liquid Head	39.816	1.778	39.20	1.80	1.57	-1.22	$\pm 5$
2472	Simulated Tissue Liquid Head	39.729	1.793	39.17	1.82	1.43	-1.48	$\pm 5$

\*Liquid Verification above was performed on 2022/05/11.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2545	Simulated Tissue Liquid Head	39.531	1.916	39.07	1.90	1.18	0.84	$\pm 5$
2580	Simulated Tissue Liquid Head	39.547	1.952	39.03	1.94	1.32	0.62	$\pm 5$
2600	Simulated Tissue Liquid Head	39.466	1.987	39.00	1.96	1.19	1.38	$\pm 5$
2610	Simulated Tissue Liquid Head	39.454	1.994	38.99	1.97	1.19	1.22	$\pm 5$
2645	Simulated Tissue Liquid Head	39.405	2.031	38.94	2.01	1.19	1.04	$\pm 5$

\*Liquid Verification above was performed on 2022/05/10.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
5190	Simulated Tissue Liquid Head	35.672	4.733	36.01	4.65	-0.94	1.78	$\pm 5$
5230	Simulated Tissue Liquid Head	35.577	4.761	35.97	4.69	-1.09	1.51	$\pm 5$
5250	Simulated Tissue Liquid Head	35.483	4.772	35.95	4.71	-1.30	1.32	$\pm 5$
5755	Simulated Tissue Liquid Head	34.905	5.335	35.35	5.23	-1.26	2.01	$\pm 5$
5795	Simulated Tissue Liquid Head	34.923	5.368	35.31	5.27	-1.10	1.86	$\pm 5$
5800	Simulated Tissue Liquid Head	34.874	5.346	35.30	5.27	-1.21	1.44	$\pm 5$

\*Liquid Verification above was performed on 2022/05/12.


### System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a)  $s = 15 \text{ mm} \pm 0,2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1\ 000 \text{ MHz}$ ;
- b)  $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $1\ 000 \text{ MHz} < f \leq 3\ 000 \text{ MHz}$ ;
- c)  $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $3\ 000 \text{ MHz} < f \leq 6\ 000 \text{ MHz}$ .

### System Verification Setup Block Diagram

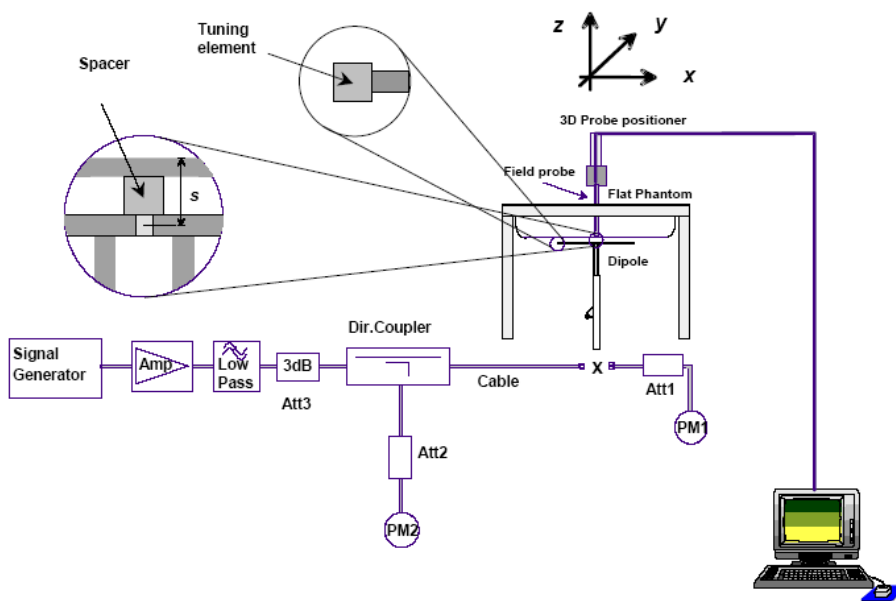

### System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2022/05/07	750 MHz	Head	100	1g	0.847	8.47	8.55	-0.936	$\pm 10$
2022/05/06	835 MHz	Head	100	1g	0.935	9.35	9.65	-3.109	$\pm 10$
2022/05/08	835 MHz	Head	100	1g	0.941	9.41	9.65	-2.487	$\pm 10$
2022/05/09	1900 MHz	Head	100	1g	3.85	38.5	40.0	-3.750	$\pm 10$
2022/05/11	2450 MHz	Head	100	1g	5.61	56.1	53.0	5.849	$\pm 10$
2022/05/10	2600 MHz	Head	100	1g	5.44	54.4	55.4	-1.805	$\pm 10$
2022/05/12	5250 MHz	Head	100	1g	7.75	77.5	80.7	-3.964	$\pm 10$
2022/05/12	5800 MHz	Head	100	1g	7.54	75.4	80.2	-5.985	$\pm 10$

\*The SAR values above are normalized to 1 Watt forward power.

**SAR SYSTEM VALIDATION DATA**

**System Performance 750 MHz**

**DUT: Dipole 750MHz; Type: D750V3; Serial: 1194**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.881 \text{ S/m}$ ;  $\epsilon_r = 42.711$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.63, 8.63, 8.63) @ 750 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Check at 750MHz/d=15mm, Pin=100mw/Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.904 W/kg


**System Performance Check at 750MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 30.84 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.552 W/kg**

Maximum value of SAR (measured) = 0.913 W/kg

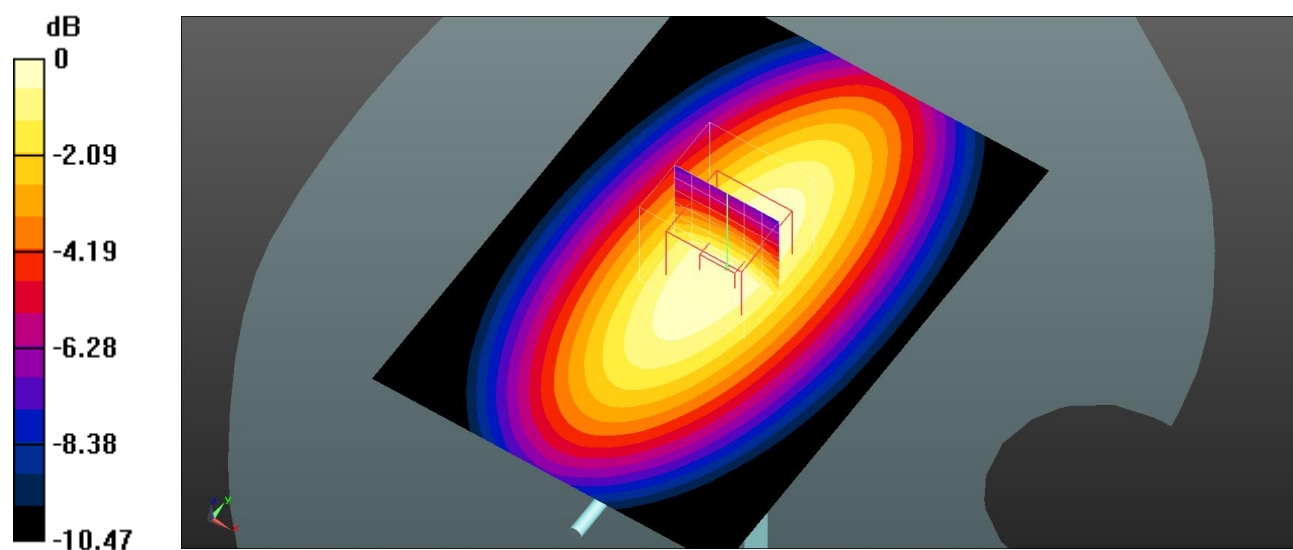

$0 \text{ dB} = 0.913 \text{ W/kg} = -0.40 \text{ dBW/kg}$

**System Performance 835 MHz (Date: 2022/05/06)****DUT: D835V3; Type: 835 MHz; Serial: 4d103**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.912 \text{ S/m}$ ;  $\epsilon_r = 41.649$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(8.5, 8.5, 8.5) @ 835 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Check at 835MHz/d=15mm, Pin=100mw/Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.982 W/kg


**System Performance Check at 835MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 33.84 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.604 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

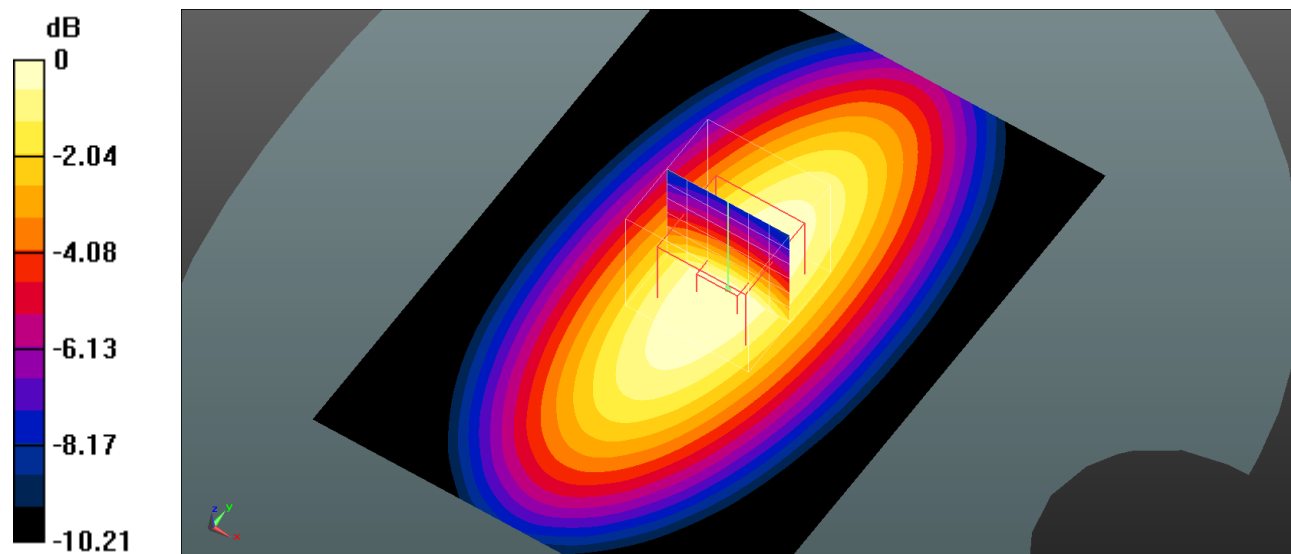

0 dB = 1.06 W/kg = 0.25 dBW/kg

**System Performance 835 MHz (Date: 2022/05/08)**

**DUT: D835V3; Type: 835 MHz; Serial: 4d103**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.905 \text{ S/m}$ ;  $\epsilon_r = 42.026$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN3619; ConvF(8.5, 8.5, 8.5) @ 835 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Check at 835MHz/d=15mm, Pin=100mw/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.996 W/kg


**System Performance Check at 835MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.611 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

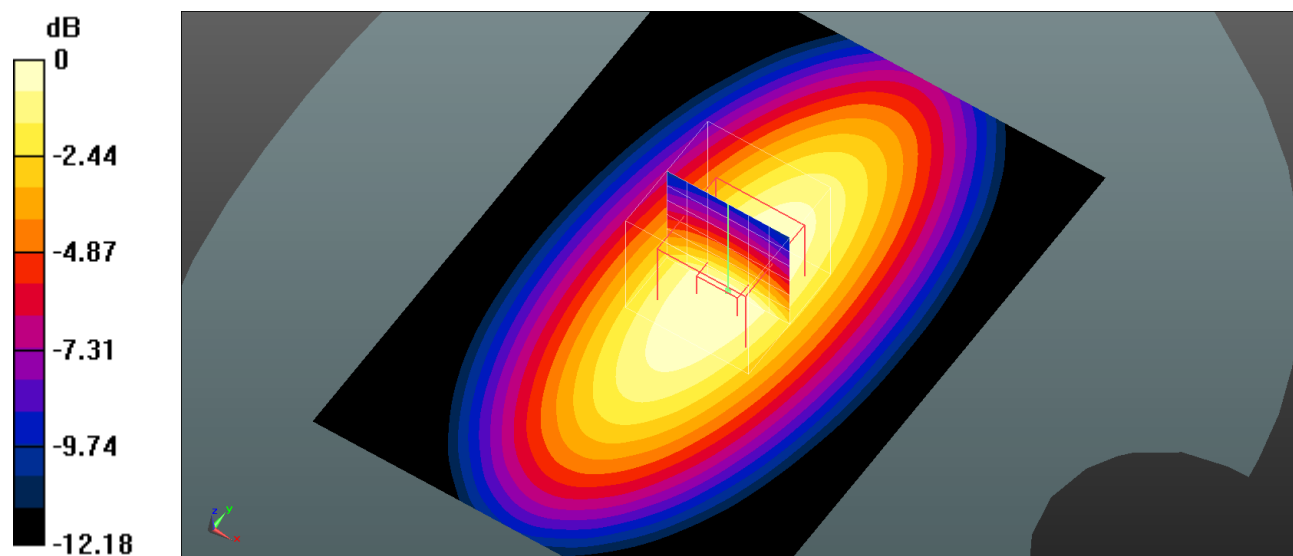

0 dB = 1.09 W/kg = 0.37 dBW/kg

**System Performance 1900MHz**

**DUT: D1900V2; Type: 1900 MHz; Serial: 5d128**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.414 \text{ S/m}$ ;  $\epsilon_r = 40.865$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07) @ 1900 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Cheek at 1900MHz/d=10mm, Pin=100mw/Area Scan (71x111x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 4.52 W/kg


**System Performance Cheek at 1900MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 52.62 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 6.95 W/kg

**SAR(1 g) = 3.85 W/kg; SAR(10 g) = 1.98 W/kg**

Maximum value of SAR (measured) = 4.16 W/kg

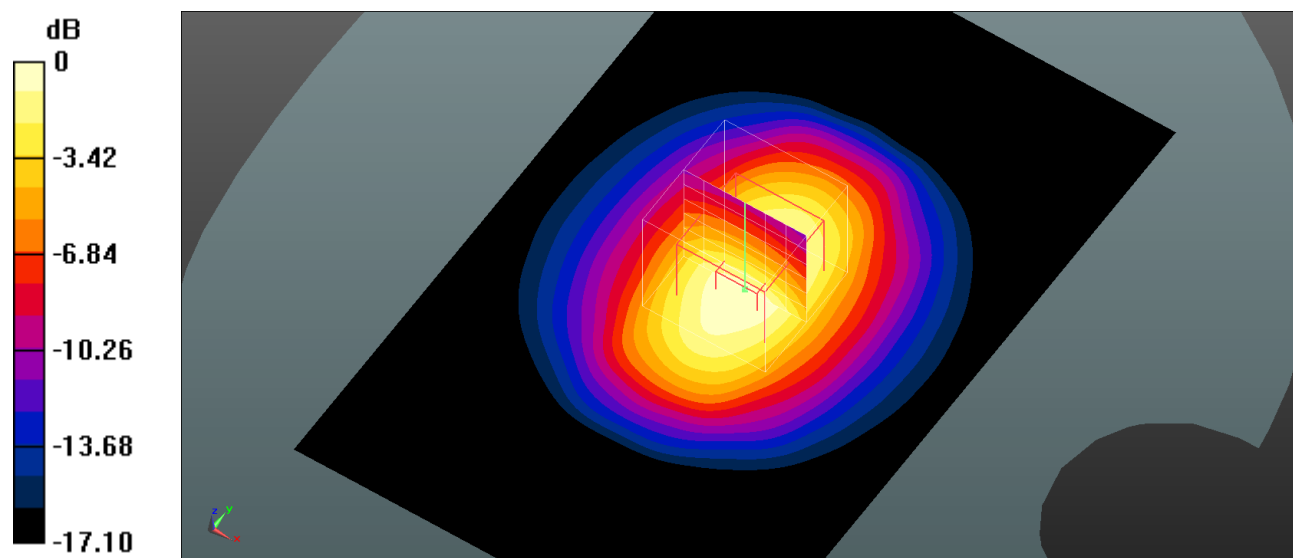

0 dB = 4.16 W/kg = 6.19 dBW/kg



**System Performance 2450MHz**

**DUT: D2450V2; Type: 2450 MHz; Serial: 751**


Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1  
 Medium parameters used: f = 2450 MHz;  $\sigma = 1.778$  S/m;  $\epsilon_r = 39.816$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) @ 2450 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Cheek at 2450MHz/d=10mm, Pin=100mw/Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 6.39 W/kg

**System Performance Cheek at 2450MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 58.17 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 11.6 W/kg  
**SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.59 W/kg**  
 Maximum value of SAR (measured) = 6.39 W/kg

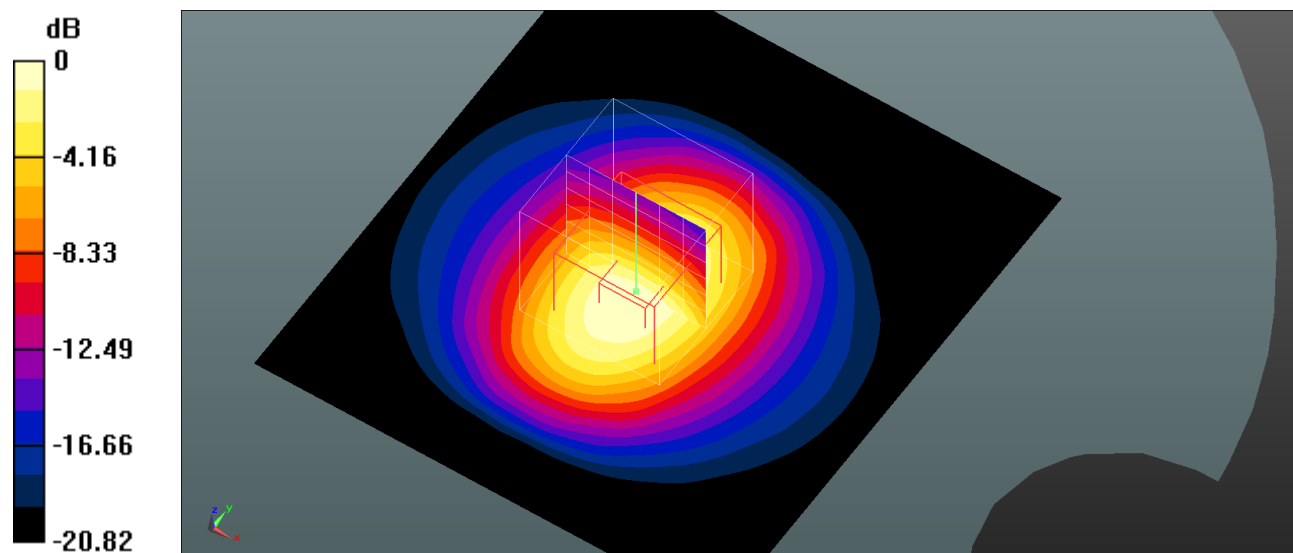

0 dB = 6.39 W/kg = 8.06 dBW/kg

**System Performance 2600MHz****DUT: D2600V2; Type: 2600 MHz; Serial: 1162**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.987$  S/m;  $\epsilon_r = 39.466$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53) @ 2600 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Check at 2600MHz/d=10mm, Pin=100mw/Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.47 W/kg


**System Performance Check at 2600MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.35 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 12.2 W/kg

**SAR(1 g) = 5.44 W/kg; SAR(10 g) = 2.43 W/kg**

Maximum value of SAR (measured) = 6.23 W/kg

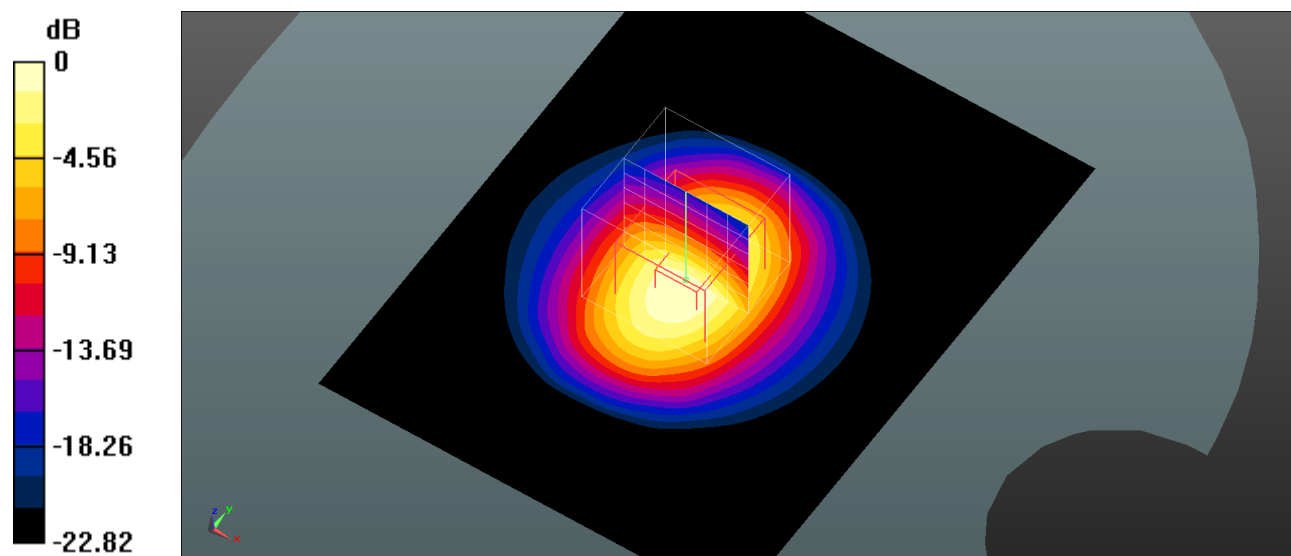

0 dB = 6.23 W/kg = 7.94 dBW/kg

### System Performance 5250 MHz

**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.772 \text{ S/m}$ ;  $\epsilon_r = 35.483$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5250 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Cheek at 5250MHz/d=10mm, Pin=100mw/Area Scan (61x81x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 19.4 W/kg


**System Performance Cheek at 5250MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 48.21 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 29.3 W/kg

**SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 18.9 W/kg

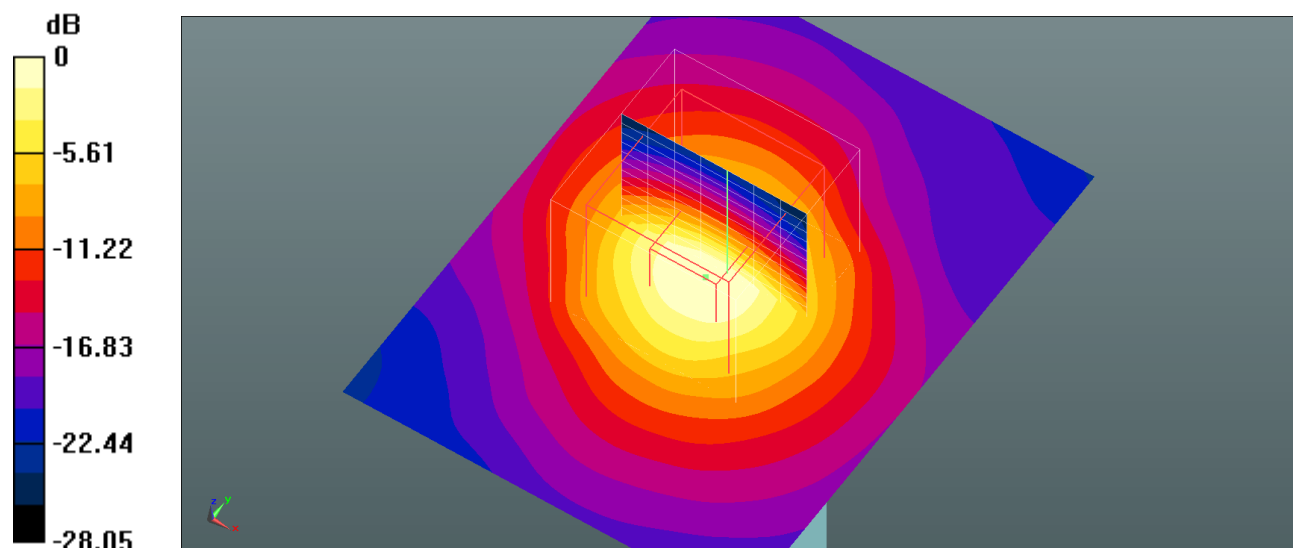

0 dB = 18.9 W/kg = 12.76 dBW/kg

**System Performance 5800 MHz**

**DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.346 \text{ S/m}$ ;  $\epsilon_r = 34.874$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5800 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (2);

**System Performance Check at 5800MHz/d=10mm, Pin=100mw/Area Scan (61x81x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 18.6 W/kg

**System Performance Check at 5800MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 50.08 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 27.8 W/kg  
**SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.21 W/kg**  
 Maximum value of SAR (measured) = 18.1 W/kg

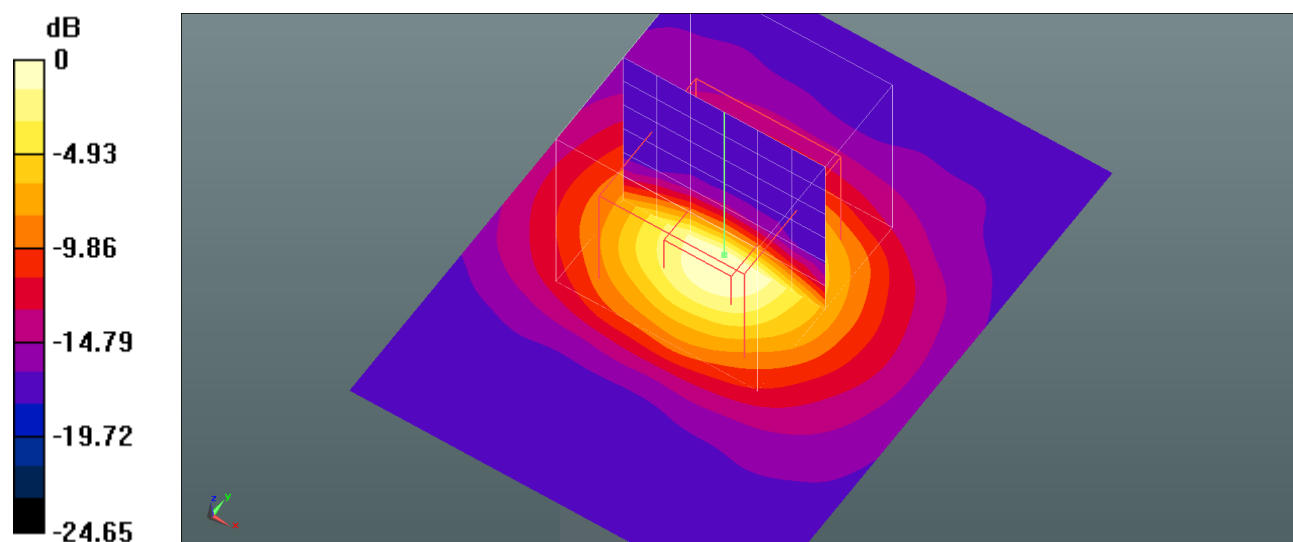


0 dB = 18.1 W/kg = 12.58 dBW/kg

## EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

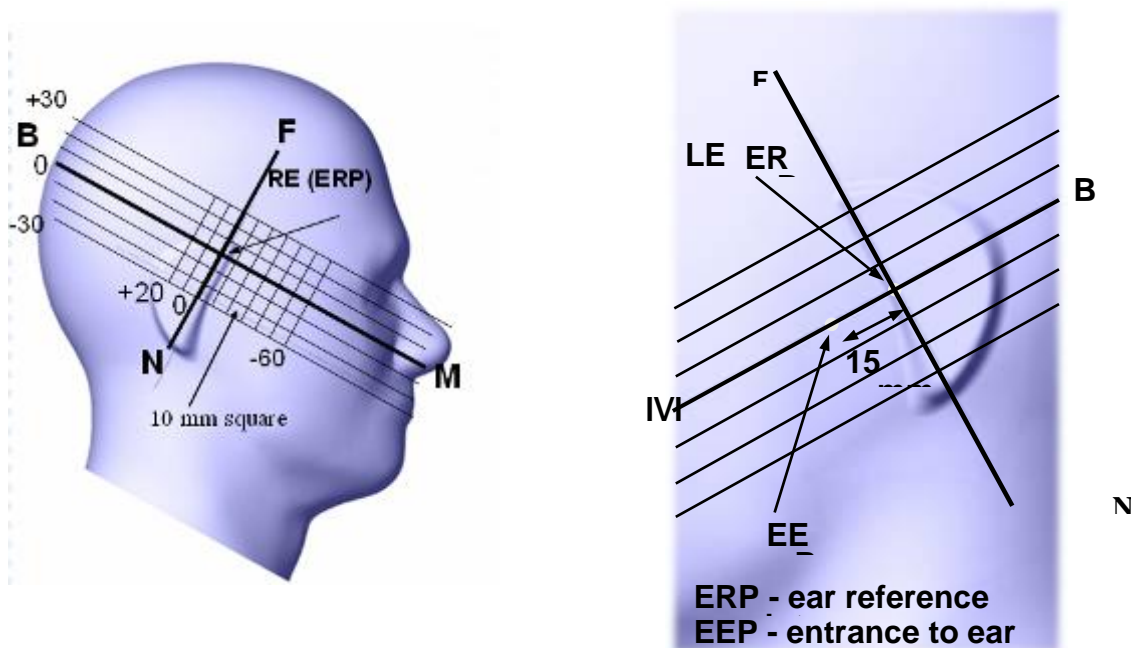

## Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

### Cheek /Touch Position

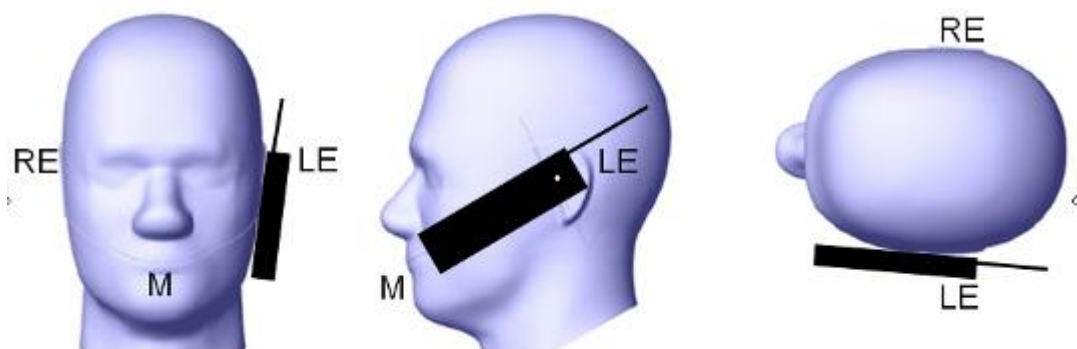

## Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by  $15^{\circ}$  to  $80^{\circ}$ . After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than  $15^{\circ}$  so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.


**Ear /Tilt 15° Position**

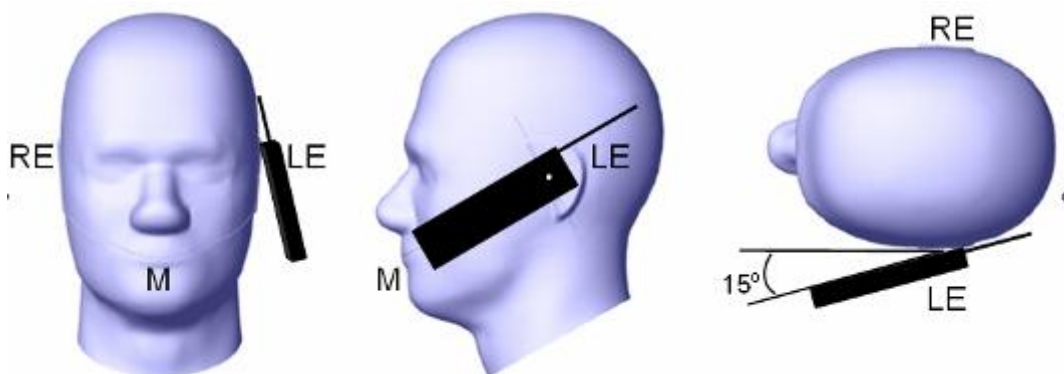

**Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

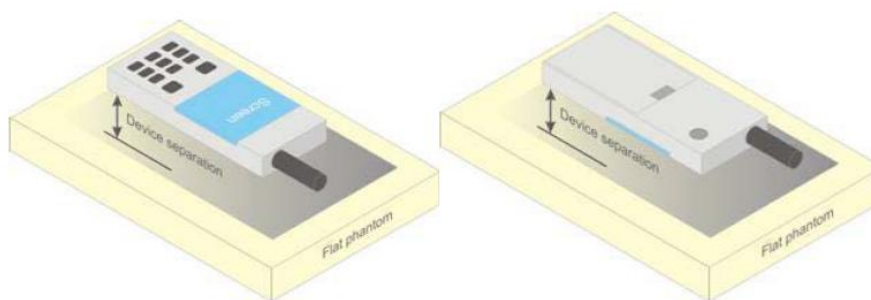

**Figure 5 – Test positions for body-worn devices**

**Test Distance for SAR Evaluation**

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

## SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.



## CONDUCTED OUTPUT POWER MEASUREMENT

### Test Procedure

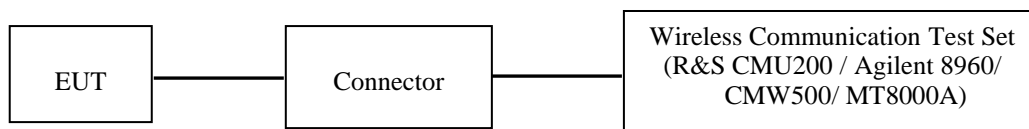

### GSM/WCDMA/LTE/5G NR

### Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

### GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

### WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR(dB)	0	0	0.5	0.5	
<b>HSDPA Specifi c Setting s</b>	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

**HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{cc}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c / \beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
CM(dB)	1.0	3.0	2.0	3.0	1.0	
MPR(dB)	0	2	1	2	0	
<b>HSDPA Specific Settings</b>	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
<b>HSUPA Specific Settings</b>	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCIs	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

**HSPA+**

Sub-test	$\beta_c$ (Note3)	$\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

**FDD-LTE**

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3**

Modulation	Channel bandwidth / Transmission bandwidth ( $N_{RB}$ )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4,10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	Table 6.2.4-4	
NS_06	6.6.2.2.3	12, 13, 14, 17	10,15,20	≥ 50	≤ 1
NS_07	6.6.2.2.3	13	10	Table 5.6-1	N/A
6.6.3.3.2					
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1				
	6.6.3.2				
NS_32	-	-	-	-	-

**TDD-LTE**

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Calculated Duty Cycle**

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.33% duty cycle.

**General 5G NR(FR1) SAR Test and Reporting Considerations:**

n5	SCS(KHz)	Frequency range:824-849MHz			
		Channel Bandwidth			
		20	15	10	5
Low	15	834	831.5	829	826.5
Mid	15	836.5	836.5	836.5	836.5
High	15	839	841.5	844	846.5

SCS	15KHz(n5)
A-MPR(Additional MPR)disabled for SAR testing?	YES
EN-DC Carrier Aggregation Possible Combinations	
LTE Anchor Bands for NR band n5	LTE Band 2

**Note:**

SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.

**Uplink RB allocations were used to Table 6.1-1 of the 3GPP TS 138.521-1:**

Channel Bandwidth	SCS(kHz)	OFDM	RB allocation					
			Outer_Full	Outer_1RB_Left	Outer_1RB_Right	Inner_Full	Inner_1RB_Left	Inner_1RB_Right
5MHz	15	DFT-s	25@0	1@0	1@24	12@6	1@1	1@23
		CP	25@0	1@0	1@24	13@6	1@1	1@23
	30	DFT-s	10@0	1@0	1@9	5@2	1@1	1@8
		CP	11@0	1@0	1@10	6@3	1@1	1@9
	60	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A
10MHz	15	DFT-s	50@0	1@0	1@49	25@12	1@1	1@48
		CP	52@0	1@0	1@51	26@13	1@1	1@50
	30	DFT-s	24@0	1@0	1@23	12@6	1@1	1@22
		CP	24@0	1@0	1@23	12@6	1@1	1@22
	60	DFT-s	10@0	1@0	1@9	5@2	1@1	1@8
		CP	11@0	1@0	1@10	6@3	1@1	1@9
15MHz	15	DFT-s	75@0	1@0	1@74	37@18	1@1	1@73
		CP	79@0	1@0	1@78	40@20	1@1	1@77
	30	DFT-s	36@0	1@0	1@35	18@9	1@1	1@34
		CP	38@0	1@0	1@37	19@9	1@1	1@36
	60	DFT-s	18@0	1@0	1@17	9@4	1@1	1@16
		CP	18@0	1@0	1@17	9@4	1@1	1@16
20MHz	15	DFT-s	100@0	1@0	1@99	50@25	1@1	1@98
		CP	106@0	1@0	1@105	53@26	1@1	1@104
	30	DFT-s	50@0	1@0	1@49	25@12	1@1	1@48
		CP	51@0	1@0	1@50	26@13	1@1	1@49
	60	DFT-s	24@0	1@0	1@23	12@6	1@1	1@22
		CP	24@0	1@0	1@23	12@6	1@1	1@22
25MHz	15	DFT-s	128@0	1@0	1@127	64@32	1@1	1@126
		CP	133@0	1@0	1@132	67@33	1@1	1@131
	30	DFT-s	64@0	1@0	1@63	32@16	1@1	1@62
		CP	65@0	1@0	1@64	33@16	1@1	1@63
	60	DFT-s	30@0	1@0	1@29	15@7	1@1	1@28
		CP	31@0	1@0	1@30	16@8	1@1	1@29
30MHz	15	DFT-s	160@0	1@0	1@159	80@40	1@1	1@158
		CP	160@0	1@0	1@159	80@40	1@1	1@158
	30	DFT-s	75@0	1@0	1@74	37@18	1@1	1@73
		CP	78@0	1@0	1@77	39@19	1@1	1@76
	60	DFT-s	36@0	1@0	1@35	18@9	1@1	1@34
		CP	38@0	1@0	1@37	19@10	1@1	1@36
40MHz	15	DFT-s	216@0	1@0	1@215	108@54	1@1	1@214
		CP	216@0	1@0	1@215	108@54	1@1	1@214
	30	DFT-s	100@0	1@0	1@99	50@25	1@1	1@98
		CP	106@0	1@0	1@105	53@26	1@1	1@104
	60	DFT-s	50@0	1@0	1@49	25@12	1@1	1@48
		CP	51@0	1@0	1@50	26@13	1@1	1@49
50MHz	15	DFT-s	270@0	1@0	1@269	135@67	1@1	1@268
		CP	270@0	1@0	1@269	135@67	1@1	1@268
	30	DFT-s	128@0	1@0	1@127	64@32	1@1	1@126
		CP	133@0	1@0	1@132	67@33	1@1	1@131
	60	DFT-s	64@0	1@0	1@63	32@16	1@1	1@62
		CP	65@0	1@0	1@64	33@16	1@1	1@63
60MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A
	30	DFT-s	162@0	1@0	1@161	81@40	1@1	1@160
		CP	162@0	1@0	1@161	81@40	1@1	1@160
	60	DFT-s	75@0	1@0	1@74	37@18	1@1	1@73
		CP	79@0	1@0	1@78	40@20	1@1	1@77
80MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A



	30	DFT-s	216@0	1@0	1@215	108@54	1@1	1@214
		CP	217@0	1@0	1@216	109@54	1@1	1@215
	60	DFT-s	100@0	1@0	1@99	50@25	1@1	1@98
		CP	107@0	1@0	1@106	54@27	1@1	1@105
90MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A
	30	DFT-s	240@0	1@0	1@239	120@60	1@1	1@238
		CP	245@0	1@0	1@244	122@61	1@1	1@243
	60	DFT-s	120@0	1@0	1@119	60@30	1@1	1@118
		CP	121@0	1@0	1@120	60@30	1@1	1@119
100MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A
	30	DFT-s	270@0	1@0	1@269	135@67	1@1	1@268
		CP	273@0	1@0	1@272	137@68	1@1	1@271
	60	DFT-s	135@0	1@0	1@134	68@34	1@1	1@133
		CP	135@0	1@0	1@134	68@34	1@1	1@133

**Maximum Target Output Power**

<b>Max Target Power(dBm)</b>			
<b>Mode/Band</b>	<b>Channel</b>		
	<b>Low</b>	<b>Middle</b>	<b>High</b>
GSM 850	33.0	33.0	33.0
GPRS 1 TX Slot	33.0	33.0	33.0
GPRS 2 TX Slot	32.5	32.5	32.5
GPRS 3 TX Slot	30.5	30.5	30.5
GPRS 4 TX Slot	29.5	29.5	29.5
EGPRS 1 TX Slot	27.0	27.0	27.0
EGPRS 2 TX Slot	26.0	26.0	26.0
EGPRS 3 TX Slot	23.5	23.5	23.5
EGPRS 4 TX Slot	22.0	22.0	22.0
PCS 1900	30.0	30.0	30.0
GPRS 1 TX Slot	30.0	30.0	30.0
GPRS 2 TX Slot	29.0	29.0	29.0
GPRS 3 TX Slot	27.5	27.5	27.5
GPRS 4 TX Slot	26.0	26.0	26.0
EGPRS 1 TX Slot	25.5	25.5	25.5
EGPRS 2 TX Slot	24.0	24.0	24.0
EGPRS 3 TX Slot	21.5	21.5	21.5
EGPRS 4 TX Slot	20.0	20.0	20.0
WCDMA Band 2	23.0	23.0	23.0
WCDMA Band 5	23.0	23.0	23.0
LTE Band 2	22.0	22.0	22.0
LTE Band 5	22.5	22.5	22.5
LTE Band 12	22.5	22.5	22.5
LTE Band 41	22.3	22.3	22.3
WLAN 2.4G	16.5	16.5	16.5
WLAN 5.2G	9.5	9.5	9.5
WLAN 5.8G	11.0	11.0	11.0
Bluetooth BDR/EDR	0.0	0.0	0.0
BLE	-2.0	-2.0	-2.0
5G NR Band n5	24.0	24.0	24.0

**Test Results:****GSM:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	32.6
	190	836.6	32.7
	251	848.8	32.6
PCS 1900	512	1850.2	29.5
	661	1880	29.6
	810	1909.8	29.4

**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	32.69	32.06	30.45	29.28
	190	836.6	32.75	32.02	30.43	29.30
	251	848.8	32.64	31.84	30.34	29.20
PCS 1900	512	1850.2	29.49	28.56	26.99	25.79
	661	1880	29.44	28.76	27.15	25.90
	810	1909.8	29.21	28.50	26.96	25.82

**EGPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	26.84	25.45	23.29	21.65
	190	836.6	26.83	25.45	23.32	21.65
	251	848.8	26.85	25.40	23.27	21.59
PCS 1900	512	1850.2	25.16	23.52	21.37	19.85
	661	1880	25.04	23.45	21.27	19.81
	810	1909.8	25.13	23.56	21.28	19.76

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

**The time based average power for GPRS**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	23.69	26.06	26.20	26.28
	190	836.6	23.75	26.02	26.18	<b>26.30</b>
	251	848.8	23.64	25.84	26.09	26.20
PCS 1900	512	1850.2	20.49	22.56	22.74	22.79
	661	1880	20.44	22.76	22.90	<b>22.90</b>
	810	1909.8	20.21	22.50	22.71	22.82

**The time based average power for EGPRS**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	17.84	19.45	19.04	18.65
	190	836.6	17.83	19.45	19.07	18.65
	251	848.8	17.85	19.40	19.02	18.59
PCS 1900	512	1850.2	16.16	17.52	17.12	16.85
	661	1880	16.04	17.45	17.02	16.81
	810	1909.8	16.13	17.56	17.03	16.76

**Note:**

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. For EGPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 6(850 MHz band) and 5(1900 MHz band).

**WCDMA Band 2:**

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.80	22.86	22.80
	HSDPA	1	21.74	21.67	21.60
		2	21.44	21.51	21.49
		3	21.52	21.45	21.34
		4	21.31	21.45	21.37
	HSUPA	1	21.38	21.47	21.29
		2	21.35	21.44	21.46
		3	21.44	21.48	21.49
		4	21.51	21.54	21.42
		5	21.41	21.47	21.58
	HSPA+	1	21.33	21.51	21.46

**WCDMA Band 5:**

Test Condition	Test Mode	3GPP Sub Test	Averaged Mean Power (dBm)		
			Low Frequency	Mid Frequency	High Frequency
Normal	RMC12.2k		22.66	22.61	22.57
	HSDPA	1	21.65	21.56	21.55
		2	21.50	21.32	21.61
		3	21.36	21.47	21.46
		4	21.39	21.38	21.40
	HSUPA	1	21.13	21.04	21.18
		2	21.20	21.02	21.19
		3	21.26	21.39	21.19
		4	21.23	21.24	21.26
		5	21.42	21.32	21.15
	HSPA+	1	21.26	21.46	21.17

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

**LTE Band 2:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	21.37	21.44	21.36
		RB1#3	0	0	21.21	21.35	21.38
		RB1#5	0	0	21.44	21.38	21.34
		RB3#0	1	1	21.35	21.37	21.33
		RB3#3	1	1	21.29	21.39	21.42
		RB6#0	1	1	20.38	20.43	20.31
	16-QAM	RB1#0	1	1	20.49	20.33	20.31
		RB1#3	1	1	20.44	20.48	20.37
		RB1#5	1	1	20.49	20.47	20.46
		RB3#0	2	2	20.24	20.38	20.49
		RB3#3	2	2	20.32	20.38	20.53
		RB6#0	2	2	19.26	19.33	19.26
3M	QPSK	RB1#0	0	0	21.34	21.32	21.47
		RB1#8	0	0	21.35	21.43	21.32
		RB1#14	0	0	21.33	21.48	21.39
		RB6#0	1	1	20.30	20.27	20.51
		RB6#9	1	1	20.41	20.32	20.38
		RB15#0	1	1	20.27	20.26	20.31
	16-QAM	RB1#0	1	1	20.88	20.49	20.44
		RB1#8	1	1	20.92	20.52	20.45
		RB1#14	1	1	20.80	20.48	20.44
		RB6#0	2	2	19.43	19.33	19.37
		RB6#9	2	2	19.36	19.34	19.24
		RB15#0	2	2	19.29	19.19	19.32
5M	QPSK	RB1#0	0	0	21.51	21.40	21.47
		RB1#13	0	0	21.52	21.54	21.41
		RB1#24	0	0	21.53	21.45	21.43
		RB15#0	1	1	20.34	20.35	20.52
		RB15#10	1	1	20.36	20.36	20.43
		RB25#0	1	1	20.28	20.44	20.39
	16-QAM	RB1#0	1	1	20.28	20.77	20.46
		RB1#13	1	1	20.23	20.75	20.45
		RB1#24	1	1	20.19	20.79	20.55
		RB15#0	2	2	19.35	19.31	19.32
		RB15#10	2	2	19.28	19.35	19.33
		RB25#0	2	2	19.32	19.34	19.32

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	21.37	21.44	21.37
		RB1#25	0	0	21.46	21.44	21.51
		RB1#49	0	0	21.38	21.50	21.44
		RB25#0	1	1	20.32	20.44	20.53
		RB25#25	1	1	20.37	20.48	20.47
		RB50#0	1	1	20.43	20.42	20.51
	16-QAM	RB1#0	1	1	20.98	20.57	20.32
		RB1#25	1	1	20.89	20.51	20.54
		RB1#49	1	1	20.91	20.53	20.52
		RB25#0	2	2	19.37	19.45	19.50
		RB25#25	2	2	19.38	19.50	19.59
15M	QPSK	RB1#0	0	0	21.28	21.28	21.26
		RB1#38	0	0	21.27	21.46	21.35
		RB1#74	0	0	21.27	21.32	21.37
		RB36#0	1	1	20.20	20.37	20.33
		RB36#39	1	1	20.22	20.36	20.33
		RB75#0	1	1	20.38	20.38	20.46
	16-QAM	RB1#0	1	1	20.93	20.36	20.68
		RB1#38	1	1	20.85	20.48	20.82
		RB1#74	1	1	20.87	20.38	20.75
		RB36#0	2	2	19.28	19.31	19.33
		RB36#39	2	2	19.35	19.39	19.37
20M	QPSK	RB1#0	0	0	21.31	21.28	21.19
		RB1#50	0	0	21.46	21.58	21.51
		RB1#99	0	0	21.28	21.29	21.41
		RB50#0	1	1	20.43	20.53	20.48
		RB50#50	1	1	20.34	20.34	20.41
		RB100#0	1	1	20.27	20.38	20.42
	16-QAM	RB1#0	1	1	20.52	20.57	20.70
		RB1#50	1	1	20.63	20.78	20.98
		RB1#99	1	1	20.48	20.50	20.93
		RB50#0	2	2	19.25	19.37	19.24
		RB50#50	2	2	19.28	19.38	19.01
RB100#0	2	2	19.24	19.28	19.21		

**LTE Band 5:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	21.79	21.81	21.66
		RB1#3	0	0	21.89	21.91	21.73
		RB1#5	0	0	21.91	21.81	21.76
		RB3#0	1	1	21.95	21.84	21.72
		RB3#3	1	1	21.95	21.88	21.72
		RB6#0	1	1	20.93	20.97	20.79
	16-QAM	RB1#0	1	1	20.84	20.93	20.76
		RB1#3	1	1	20.83	20.92	20.97
		RB1#5	1	1	20.86	20.84	20.88
		RB3#0	2	2	20.90	21.03	20.72
		RB3#3	2	2	21.01	21.09	20.67
		RB6#0	2	2	19.84	19.83	19.82
3M	QPSK	RB1#0	0	0	21.90	21.81	21.77
		RB1#8	0	0	21.70	21.74	21.73
		RB1#14	0	0	21.80	21.75	21.76
		RB6#0	1	1	20.94	20.91	20.73
		RB6#9	1	1	20.93	20.94	20.81
		RB15#0	1	1	20.90	20.83	20.70
	16-QAM	RB1#0	1	1	21.39	20.94	20.82
		RB1#8	1	1	21.36	20.95	20.81
		RB1#14	1	1	21.33	20.96	20.79
		RB6#0	2	2	19.91	19.85	19.78
		RB6#9	2	2	19.94	19.94	19.67
		RB15#0	2	2	19.99	19.77	19.83
5M	QPSK	RB1#0	0	0	21.92	21.87	21.78
		RB1#13	0	0	21.97	21.95	21.71
		RB1#24	0	0	21.85	21.94	21.83
		RB15#0	1	1	20.97	20.87	20.91
		RB15#10	1	1	20.85	20.83	20.69
		RB25#0	1	1	20.94	20.84	20.74
	16-QAM	RB1#0	1	1	20.76	21.07	20.79
		RB1#13	1	1	20.85	21.19	20.83
		RB1#24	1	1	20.69	21.15	20.76
		RB15#0	2	2	19.96	19.76	19.93
		RB15#10	2	2	19.86	19.89	19.65
		RB25#0	2	2	19.88	19.81	19.77



Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	21.82	21.81	21.96
		RB1#25	0	0	21.94	21.86	21.91
		RB1#49	0	0	21.95	21.86	21.80
		RB25#0	1	1	21.06	20.78	20.78
		RB25#25	1	1	20.89	21.02	20.80
		RB50#0	1	1	20.90	21.00	20.83
	16-QAM	RB1#0	1	1	21.40	21.07	20.91
		RB1#25	1	1	21.45	20.97	20.87
		RB1#49	1	1	21.40	20.93	20.76
		RB25#0	2	2	20.07	19.89	19.96
		RB25#25	2	2	19.95	20.05	19.82
		RB50#0	2	2	19.98	20.03	19.78

**LTE Band 12:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.22	22.12	22.29
		RB1#3	0	0	22.15	22.00	22.21
		RB1#5	0	0	22.22	22.10	22.20
		RB3#0	1	1	22.21	22.23	22.24
		RB3#3	1	1	22.15	22.08	22.42
		RB6#0	1	1	21.25	21.08	21.25
	16-QAM	RB1#0	1	1	21.26	21.38	21.41
		RB1#3	1	1	21.26	21.23	21.27
		RB1#5	1	1	21.30	21.20	21.37
		RB3#0	2	2	21.24	21.07	21.29
		RB3#3	2	2	21.29	21.05	21.36
		RB6#0	2	2	20.12	20.16	20.27
3M	QPSK	RB1#0	0	0	22.18	22.01	22.13
		RB1#8	0	0	22.06	22.03	22.26
		RB1#14	0	0	22.09	22.08	22.30
		RB6#0	1	1	21.10	21.21	21.17
		RB6#9	1	1	21.07	21.20	21.29
		RB15#0	1	1	21.18	21.13	21.22
	16-QAM	RB1#0	1	1	21.84	21.22	21.23
		RB1#8	1	1	21.69	21.30	21.27
		RB1#14	1	1	21.66	21.23	21.38
		RB6#0	2	2	20.21	20.12	20.21
		RB6#9	2	2	20.25	20.18	20.12
		RB15#0	2	2	20.21	20.01	20.27
5M	QPSK	RB1#0	0	0	22.31	22.12	22.17
		RB1#13	0	0	22.34	22.09	22.24
		RB1#24	0	0	22.37	22.25	22.36
		RB15#0	1	1	21.27	21.04	21.37
		RB15#10	1	1	21.18	21.13	21.27
		RB25#0	1	1	21.26	21.13	21.28
	16-QAM	RB1#0	1	1	21.21	21.49	21.20
		RB1#13	1	1	21.12	21.50	21.25
		RB1#24	1	1	21.09	21.45	21.29
		RB15#0	2	2	20.32	20.01	20.26
		RB15#10	2	2	20.18	20.21	20.26
		RB25#0	2	2	20.37	20.20	20.28

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.32	22.18	22.13
		RB1#25	0	0	22.12	22.15	22.15
		RB1#49	0	0	22.24	22.16	22.20
		RB25#0	1	1	21.07	20.98	21.24
		RB25#25	1	1	21.30	21.18	21.14
		RB50#0	1	1	21.18	21.11	21.19
	16-QAM	RB1#0	1	1	21.82	21.34	21.15
		RB1#25	1	1	21.76	21.23	21.26
		RB1#49	1	1	21.72	21.34	21.22
		RB25#0	2	2	20.19	20.07	20.34
		RB25#25	2	2	20.39	20.09	20.34
		RB50#0	2	2	20.14	20.04	20.15

**LTE Band 41:**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Low-Mid Channel (dBm)	Mid-High Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	21.53	21.70	21.77	21.73
		RB1#13	0	0	21.50	21.57	21.80	21.77
		RB1#24	0	0	21.36	21.63	21.87	21.91
		RB15#0	1	1	21.48	21.62	21.82	21.83
		RB15#10	1	1	21.43	21.58	21.73	21.85
		RB25#0	1	1	21.37	21.59	21.83	21.74
	16-QAM	RB1#0	1	1	21.63	21.58	21.93	21.89
		RB1#13	1	1	21.68	21.51	21.87	21.84
		RB1#24	1	1	21.58	21.57	21.86	21.87
		RB15#0	2	2	21.43	21.59	21.79	21.87
		RB15#10	2	2	21.41	21.40	21.81	21.83
		RB25#0	2	2	21.40	21.56	21.78	21.83
10M	QPSK	RB1#0	0	0	21.44	21.50	21.87	21.80
		RB1#25	0	0	21.45	21.64	21.74	21.86
		RB1#49	0	0	21.39	21.59	21.78	21.84
		RB25#0	1	1	21.48	21.54	21.89	21.80
		RB25#25	1	1	21.37	21.53	21.78	21.86
		RB50#0	1	1	21.38	21.57	21.86	21.84
	16-QAM	RB1#0	1	1	21.56	21.44	21.97	21.89
		RB1#25	1	1	21.65	21.51	22.04	21.91
		RB1#49	1	1	21.70	21.56	21.96	21.99
		RB25#0	2	2	21.40	21.59	21.76	21.81
		RB25#25	2	2	21.42	21.67	21.84	21.91
		RB50#0	2	2	21.43	21.50	21.84	21.76

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Low-Mid Channel (dBm)	Mid-High Channel (dBm)	High Channel (dBm)
15M	QPSK	RB1#0	0	0	21.31	21.44	21.74	21.75
		RB1#38	0	0	21.36	21.67	21.91	21.95
		RB1#74	0	0	21.28	21.44	21.76	21.75
		RB36#0	1	1	21.27	21.50	21.78	21.87
		RB36#39	1	1	21.31	21.63	21.83	21.72
		RB75#0	1	1	21.36	21.58	21.80	21.83
	16-QAM	RB1#0	1	1	21.44	21.44	21.90	22.02
		RB1#38	1	1	21.69	21.51	22.12	21.98
		RB1#74	1	1	21.47	21.45	21.91	21.93
		RB36#0	2	2	21.36	21.53	21.80	21.89
		RB36#39	2	2	21.23	21.47	21.82	21.89
		RB75#0	2	2	21.36	21.52	21.86	21.75
20M	QPSK	RB1#0	0	0	21.42	21.58	21.72	21.70
		RB1#50	0	0	21.60	21.80	22.15	22.19
		RB1#99	0	0	21.76	21.70	21.88	21.84
		RB50#0	1	1	21.72	21.82	21.79	21.76
		RB50#50	1	1	21.62	21.84	21.74	21.99
		RB100#0	1	1	21.66	21.72	21.81	21.92
	16-QAM	RB1#0	1	1	21.28	21.28	21.95	21.99
		RB1#50	1	1	21.44	21.62	22.06	22.14
		RB1#99	1	1	21.51	21.38	22.14	22.16
		RB50#0	2	2	21.45	21.65	21.91	21.93
		RB50#50	2	2	21.42	21.65	21.88	21.91
		RB100#0	2	2	21.41	21.53	21.80	21.85

The frequency range of LTE Band 41 is 2535 ~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate  $N_c$  is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.<sup>14</sup>

$$N_c = Round \left\{ \left[ 100 \left( \frac{f_{high} - f_{low}}{f_c} \right) \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- $N_c$  is the number of test channels, rounded to the nearest integer,
- $f_{high}$  and  $f_{low}$  are the highest and lowest channel frequencies within the transmission band,
- $f_c$  is the mid-band channel frequency,
- all frequencies are in MHz.

## 5G NR Band n5:

Mode	Conducted average power (dBm)
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.42
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM PI/2 BPSK_RB12@6	23.56
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@23	23.52
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM PI/2 BPSK_RB25@0	23.02
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM QPSK_RB1@1	23.44
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM QPSK_RB12@6	23.52
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM QPSK_RB1@23	23.46
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM QPSK_RB25@0	22.49
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM 16 QAM_RB25@0	21.64
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM 64 QAM_RB25@0	21.08
n5_5MHz_15kHz_826.5MHz_DFT-s-OFDM 256 QAM_RB25@0	19.04
n5_5MHz_15kHz_826.5MHz_CP-OFDM QPSK_RB1@1	21.92
n5_5MHz_15kHz_826.5MHz_CP-OFDM QPSK_RB13@6	21.94
n5_5MHz_15kHz_826.5MHz_CP-OFDM QPSK_RB1@23	21.82
n5_5MHz_15kHz_826.5MHz_CP-OFDM QPSK_RB25@0	20.46
n5_5MHz_15kHz_826.5MHz_CP-OFDM 16 QAM_RB25@0	20.55
n5_5MHz_15kHz_826.5MHz_CP-OFDM 64 QAM_RB25@0	19.96
n5_5MHz_15kHz_826.5MHz_CP-OFDM 256 QAM_RB25@0	16.95

n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.47
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB12@6	23.52
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@23	23.43
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB25@0	23.06
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@1	23.35
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB12@6	23.59
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@23	23.54
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB25@0	22.53
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM 16 QAM_RB25@0	21.53
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM 64 QAM_RB25@0	21.02
n5_5MHz_15kHz_836.5MHz_DFT-s-OFDM 256 QAM_RB25@0	19.05
n5_5MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@1	22.07
n5_5MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB13@6	22.08
n5_5MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@23	21.93
n5_5MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB25@0	20.45
n5_5MHz_15kHz_836.5MHz_CP-OFDM 16 QAM_RB25@0	20.53
n5_5MHz_15kHz_836.5MHz_CP-OFDM 64 QAM_RB25@0	19.89
n5_5MHz_15kHz_836.5MHz_CP-OFDM 256 QAM_RB25@0	17.04
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.54
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM PI/2 BPSK_RB12@6	23.45

n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@23	23.56
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM PI/2 BPSK_RB25@0	23.07
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM QPSK_RB1@1	23.34
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM QPSK_RB12@6	23.53
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM QPSK_RB1@23	23.47
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM QPSK_RB25@0	22.53
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM 16 QAM_RB25@0	21.56
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM 64 QAM_RB25@0	20.96
n5_5MHz_15kHz_846.5MHz_DFT-s-OFDM 256 QAM_RB25@0	19.02
n5_5MHz_15kHz_846.5MHz_CP-OFDM QPSK_RB1@1	21.95
n5_5MHz_15kHz_846.5MHz_CP-OFDM QPSK_RB13@6	22.06
n5_5MHz_15kHz_846.5MHz_CP-OFDM QPSK_RB1@23	21.91
n5_5MHz_15kHz_846.5MHz_CP-OFDM QPSK_RB25@0	20.44
n5_5MHz_15kHz_846.5MHz_CP-OFDM 16 QAM_RB25@0	20.55
n5_5MHz_15kHz_846.5MHz_CP-OFDM 64 QAM_RB25@0	19.93
n5_5MHz_15kHz_846.5MHz_CP-OFDM 256 QAM_RB25@0	17.07
n5_10MHz_15kHz_829MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.26
n5_10MHz_15kHz_829MHz_DFT-s-OFDM PI/2 BPSK_RB25@12	23.35
n5_10MHz_15kHz_829MHz_DFT-s-OFDM PI/2 BPSK_RB1@50	23.17
n5_10MHz_15kHz_829MHz_DFT-s-OFDM PI/2 BPSK_RB50@0	22.86



n5_10MHz_15kHz_829MHz_DFT-s-OFDM QPSK_RB1@1	23.15
n5_10MHz_15kHz_829MHz_DFT-s-OFDM QPSK_RB25@12	23.37
n5_10MHz_15kHz_829MHz_DFT-s-OFDM QPSK_RB1@50	23.16
n5_10MHz_15kHz_829MHz_DFT-s-OFDM QPSK_RB50@0	22.35
n5_10MHz_15kHz_829MHz_DFT-s-OFDM 16 QAM_RB50@0	21.24
n5_10MHz_15kHz_829MHz_DFT-s-OFDM 64 QAM_RB50@0	20.83
n5_10MHz_15kHz_829MHz_DFT-s-OFDM 256 QAM_RB50@0	18.79
n5_10MHz_15kHz_829MHz_CP-OFDM QPSK_RB1@1	21.64
n5_10MHz_15kHz_829MHz_CP-OFDM QPSK_RB26@13	21.88
n5_10MHz_15kHz_829MHz_CP-OFDM QPSK_RB1@50	21.76
n5_10MHz_15kHz_829MHz_CP-OFDM QPSK_RB52@0	20.24
n5_10MHz_15kHz_829MHz_CP-OFDM 16 QAM_RB52@0	20.37
n5_10MHz_15kHz_829MHz_CP-OFDM 64 QAM_RB52@0	19.75
n5_10MHz_15kHz_829MHz_CP-OFDM 256 QAM_RB52@0	16.86
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.13
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB25@12	23.32
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@50	23.36
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB50@0	22.75
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@1	23.13
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB25@12	23.36

n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@50	23.33
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB50@0	22.26
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM 16 QAM_RB50@0	21.24
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM 64 QAM_RB50@0	20.75
n5_10MHz_15kHz_836.5MHz_DFT-s-OFDM 256 QAM_RB50@0	18.63
n5_10MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@1	21.72
n5_10MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB26@13	21.88
n5_10MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@50	21.77
n5_10MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB52@0	20.26
n5_10MHz_15kHz_836.5MHz_CP-OFDM 16 QAM_RB52@0	20.25
n5_10MHz_15kHz_836.5MHz_CP-OFDM 64 QAM_RB52@0	19.75
n5_10MHz_15kHz_836.5MHz_CP-OFDM 256 QAM_RB52@0	16.76
n5_10MHz_15kHz_844MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.27
n5_10MHz_15kHz_844MHz_DFT-s-OFDM PI/2 BPSK_RB25@12	23.33
n5_10MHz_15kHz_844MHz_DFT-s-OFDM PI/2 BPSK_RB1@50	23.24
n5_10MHz_15kHz_844MHz_DFT-s-OFDM PI/2 BPSK_RB50@0	22.86
n5_10MHz_15kHz_844MHz_DFT-s-OFDM QPSK_RB1@1	23.25
n5_10MHz_15kHz_844MHz_DFT-s-OFDM QPSK_RB25@12	23.33
n5_10MHz_15kHz_844MHz_DFT-s-OFDM QPSK_RB1@50	23.17
n5_10MHz_15kHz_844MHz_DFT-s-OFDM QPSK_RB50@0	22.33

n5_10MHz_15kHz_844MHz_DFT-s-OFDM 16 QAM_RB50@0	21.25
n5_10MHz_15kHz_844MHz_DFT-s-OFDM 64 QAM_RB50@0	20.82
n5_10MHz_15kHz_844MHz_DFT-s-OFDM 256 QAM_RB50@0	18.76
n5_10MHz_15kHz_844MHz_CP-OFDM QPSK_RB1@1	21.64
n5_10MHz_15kHz_844MHz_CP-OFDM QPSK_RB26@13	21.85
n5_10MHz_15kHz_844MHz_CP-OFDM QPSK_RB1@50	21.73
n5_10MHz_15kHz_844MHz_CP-OFDM QPSK_RB52@0	20.33
n5_10MHz_15kHz_844MHz_CP-OFDM 16 QAM_RB52@0	20.36
n5_10MHz_15kHz_844MHz_CP-OFDM 64 QAM_RB52@0	19.75
n5_10MHz_15kHz_844MHz_CP-OFDM 256 QAM_RB52@0	16.84
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.23
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM PI/2 BPSK_RB36@18	23.45
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@77	23.38
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM PI/2 BPSK_RB75@0	22.91
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM QPSK_RB1@1	23.05
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM QPSK_RB36@18	23.36
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM QPSK_RB1@77	23.24
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM QPSK_RB75@0	22.45
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.46
n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM 64 QAM_RB75@0	20.82

n5_15MHz_15kHz_831.5MHz_DFT-s-OFDM 256 QAM_RB75@0	18.86
n5_15MHz_15kHz_831.5MHz_CP-OFDM QPSK_RB1@1	21.85
n5_15MHz_15kHz_831.5MHz_CP-OFDM QPSK_RB39@19	21.83
n5_15MHz_15kHz_831.5MHz_CP-OFDM QPSK_RB1@77	21.84
n5_15MHz_15kHz_831.5MHz_CP-OFDM QPSK_RB79@0	20.35
n5_15MHz_15kHz_831.5MHz_CP-OFDM 16 QAM_RB79@0	20.36
n5_15MHz_15kHz_831.5MHz_CP-OFDM 64 QAM_RB79@0	19.94
n5_15MHz_15kHz_831.5MHz_CP-OFDM 256 QAM_RB79@0	16.95
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.36
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB36@18	23.42
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@77	23.36
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB75@0	22.95
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@1	23.22
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB36@18	23.43
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@77	23.34
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB75@0	22.45
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.46
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM 64 QAM_RB75@0	20.82
n5_15MHz_15kHz_836.5MHz_DFT-s-OFDM 256 QAM_RB75@0	18.84
n5_15MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@1	21.86

n5_15MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB39@19	21.95
n5_15MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@77	21.73
n5_15MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB79@0	20.44
n5_15MHz_15kHz_836.5MHz_CP-OFDM 16 QAM_RB79@0	20.46
n5_15MHz_15kHz_836.5MHz_CP-OFDM 64 QAM_RB79@0	19.92
n5_15MHz_15kHz_836.5MHz_CP-OFDM 256 QAM_RB79@0	16.98
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.39
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM PI/2 BPSK_RB36@18	23.43
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@77	23.35
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM PI/2 BPSK_RB75@0	22.94
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM QPSK_RB1@1	23.22
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM QPSK_RB36@18	23.56
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM QPSK_RB1@77	23.34
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM QPSK_RB75@0	22.49
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM 16 QAM_RB75@0	21.43
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM 64 QAM_RB75@0	20.96
n5_15MHz_15kHz_841.5MHz_DFT-s-OFDM 256 QAM_RB75@0	18.98
n5_15MHz_15kHz_841.5MHz_CP-OFDM QPSK_RB1@1	21.62
n5_15MHz_15kHz_841.5MHz_CP-OFDM QPSK_RB39@19	21.97
n5_15MHz_15kHz_841.5MHz_CP-OFDM QPSK_RB1@77	21.92

n5_15MHz_15kHz_841.5MHz_CP-OFDM QPSK_RB79@0	20.46
n5_15MHz_15kHz_841.5MHz_CP-OFDM 16 QAM_RB79@0	20.45
n5_15MHz_15kHz_841.5MHz_CP-OFDM 64 QAM_RB79@0	19.85
n5_15MHz_15kHz_841.5MHz_CP-OFDM 256 QAM_RB79@0	16.89
n5_20MHz_15kHz_834MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.21
n5_20MHz_15kHz_834MHz_DFT-s-OFDM PI/2 BPSK_RB50@25	23.58
n5_20MHz_15kHz_834MHz_DFT-s-OFDM PI/2 BPSK_RB1@104	23.24
n5_20MHz_15kHz_834MHz_DFT-s-OFDM PI/2 BPSK_RB100@0	23.09
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB1@1	23.33
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB50@25	23.49
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB1@104	23.28
n5_20MHz_15kHz_834MHz_DFT-s-OFDM QPSK_RB100@0	22.41
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 16 QAM_RB100@0	21.46
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 64 QAM_RB100@0	21.08
n5_20MHz_15kHz_834MHz_DFT-s-OFDM 256 QAM_RB100@0	18.82
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB1@1	21.75
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB53@26	21.91
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB1@104	21.79
n5_20MHz_15kHz_834MHz_CP-OFDM QPSK_RB106@0	20.41
n5_20MHz_15kHz_834MHz_CP-OFDM 16 QAM_RB106@0	20.48

n5_20MHz_15kHz_834MHz_CP-OFDM 64 QAM_RB106@0	19.9
n5_20MHz_15kHz_834MHz_CP-OFDM 256 QAM_RB106@0	17.08
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.29
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB50@25	23.38
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB1@104	23.46
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM PI/2 BPSK_RB100@0	22.82
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@1	23.16
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB50@25	23.34
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB1@104	23.29
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM QPSK_RB100@0	22.42
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 16 QAM_RB100@0	21.48
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 64 QAM_RB100@0	20.82
n5_20MHz_15kHz_836.5MHz_DFT-s-OFDM 256 QAM_RB100@0	18.89
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@1	21.78
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB53@26	21.91
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB1@104	21.88
n5_20MHz_15kHz_836.5MHz_CP-OFDM QPSK_RB106@0	20.33
n5_20MHz_15kHz_836.5MHz_CP-OFDM 16 QAM_RB106@0	20.39
n5_20MHz_15kHz_836.5MHz_CP-OFDM 64 QAM_RB106@0	19.88
n5_20MHz_15kHz_836.5MHz_CP-OFDM 256 QAM_RB106@0	16.81

n5_20MHz_15kHz_839MHz_DFT-s-OFDM PI/2 BPSK_RB1@1	23.29
n5_20MHz_15kHz_839MHz_DFT-s-OFDM PI/2 BPSK_RB50@25	23.41
n5_20MHz_15kHz_839MHz_DFT-s-OFDM PI/2 BPSK_RB1@104	23.45
n5_20MHz_15kHz_839MHz_DFT-s-OFDM PI/2 BPSK_RB100@0	22.82
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB1@1	23.13
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB50@25	23.42
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB1@104	23.21
n5_20MHz_15kHz_839MHz_DFT-s-OFDM QPSK_RB100@0	22.34
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 16 QAM_RB100@0	21.3
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 64 QAM_RB100@0	20.89
n5_20MHz_15kHz_839MHz_DFT-s-OFDM 256 QAM_RB100@0	18.72
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB1@1	21.79
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB53@26	21.85
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB1@104	21.82
n5_20MHz_15kHz_839MHz_CP-OFDM QPSK_RB106@0	20.19
n5_20MHz_15kHz_839MHz_CP-OFDM 16 QAM_RB106@0	20.25
n5_20MHz_15kHz_839MHz_CP-OFDM 64 QAM_RB106@0	19.89
n5_20MHz_15kHz_839MHz_CP-OFDM 256 QAM_RB106@0	16.82

**Note:**

For EN-DC mode, MediaTek Smart Transmit algorithm, in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC&IC limit.



**Bluetooth:**

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	-3.66
	2441	-1.92
	2480	-0.84
EDR( $\pi/4$ -DQPSK)	2402	-1.87
	2441	-2.99
	2480	-2.01
EDR(8DPSK)	2402	-1.40
	2441	-0.33
	2480	-1.75
BLE(1M)	2402	-2.64
	2440	-2.59
	2480	-2.74
BLE(2M)	2402	-2.54
	2440	-2.58
	2480	-2.84

**Wi-Fi 2.4G:**


Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output
802.11b	2412	1Mbps	16.18
	2442		16.21
	2472		<b>16.26</b>
802.11g	2412	6Mbps	13.96
	2442		14.20
	2472		14.13
802.11n HT20	2412	MCS0	13.99
	2442		13.97
	2472		13.97

**WLAN 5G:**

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11a	5180	6Mbps	8.49
	5200		8.46
	5240		8.73
802.11n HT20	5180	MCS0	8.45
	5200		8.29
	5240		8.46
802.11n HT40	5190	MCS0	8.59
	5230		<b>9.09</b>
802.11AC20	5180	MCS0	8.32
	5200		8.73
	5240		9.02
802.11AC40	5190	MCS0	8.44
	5230		8.51
802.11AC80	5210	MCS0	8.52

**Note:**

1. Duty Cycle is 94.20% for 802.11n HT40 mode.

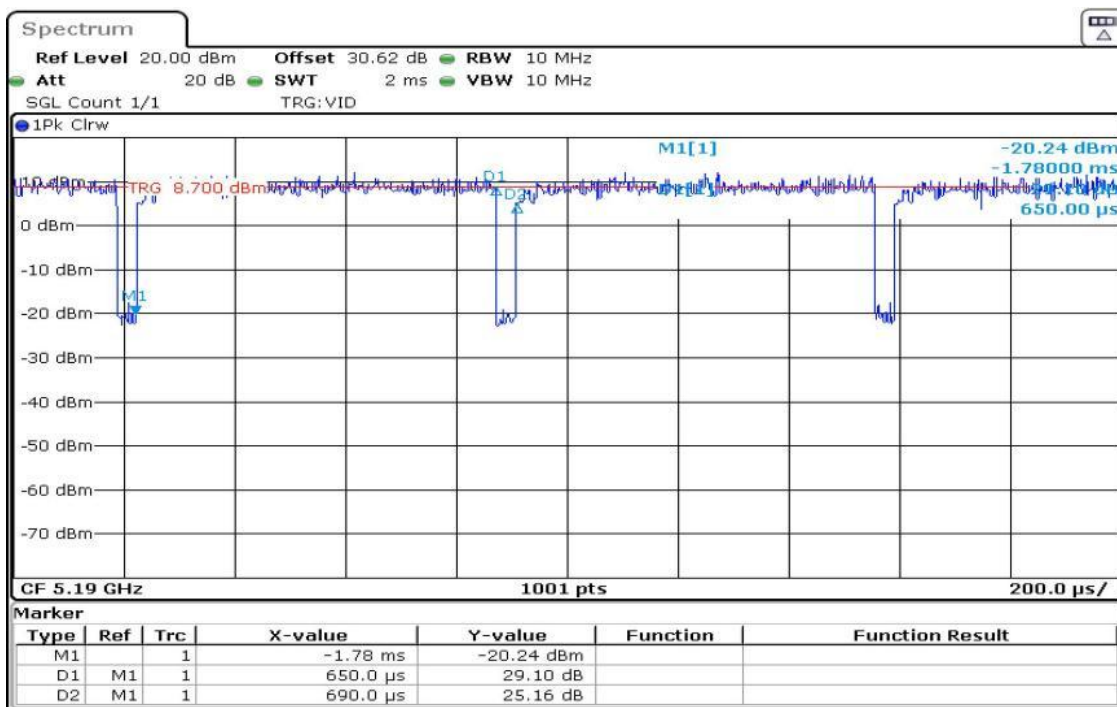


Date: 13.APR.2022 10:30:17

Mode	Channel frequency	Data Rate	RF Output Power(dBm)
802.11a	5745	6Mbps	10.48
	5785		10.39
	5825		10.01
802.11n HT20	5745	MCS0	10.38
	5785		10.16
	5825		9.69
802.11n HT40	5755	MCS0	<b>10.78</b>
	5795		10.56
802.11AC20	5745	MCS0	9.76
	5785		10.27
	5825		9.91
802.11AC40	5755	MCS0	9.91
	5795		10.16
802.11AC80	5775	MCS0	9.65

**Note:**


1. Duty Cycle is 94.20% for 802.11n HT40 mode.

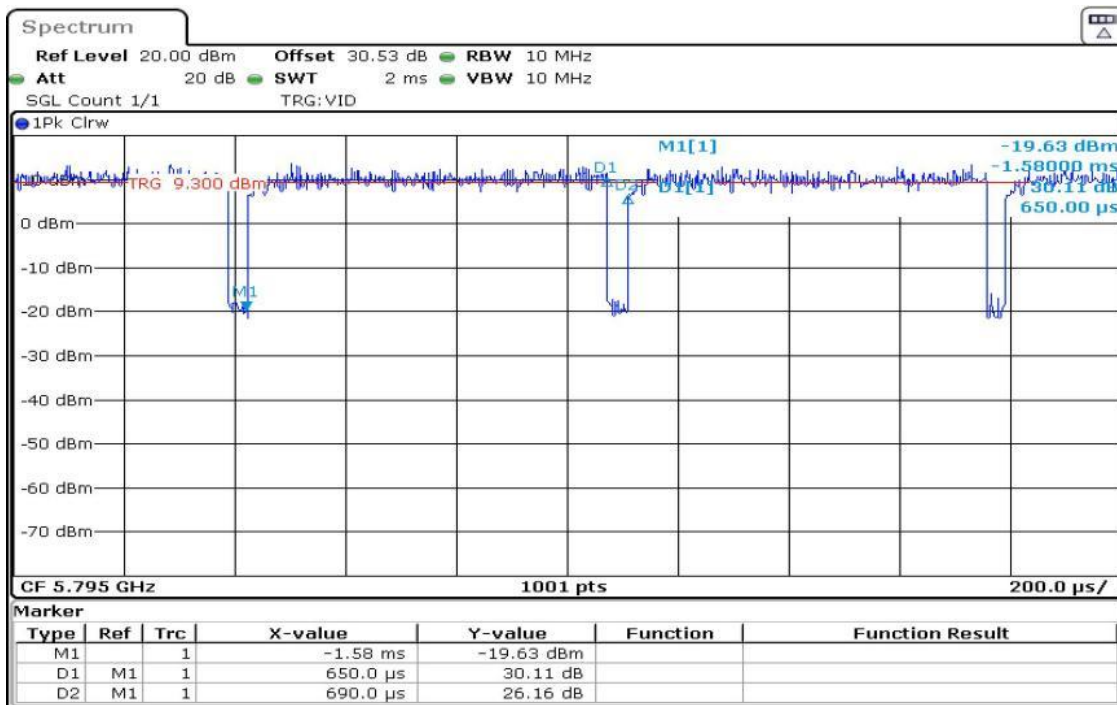

Date: 13.APR.2022 10:39:23

### Standalone SAR test exclusion considerations

**Antennas Location:**

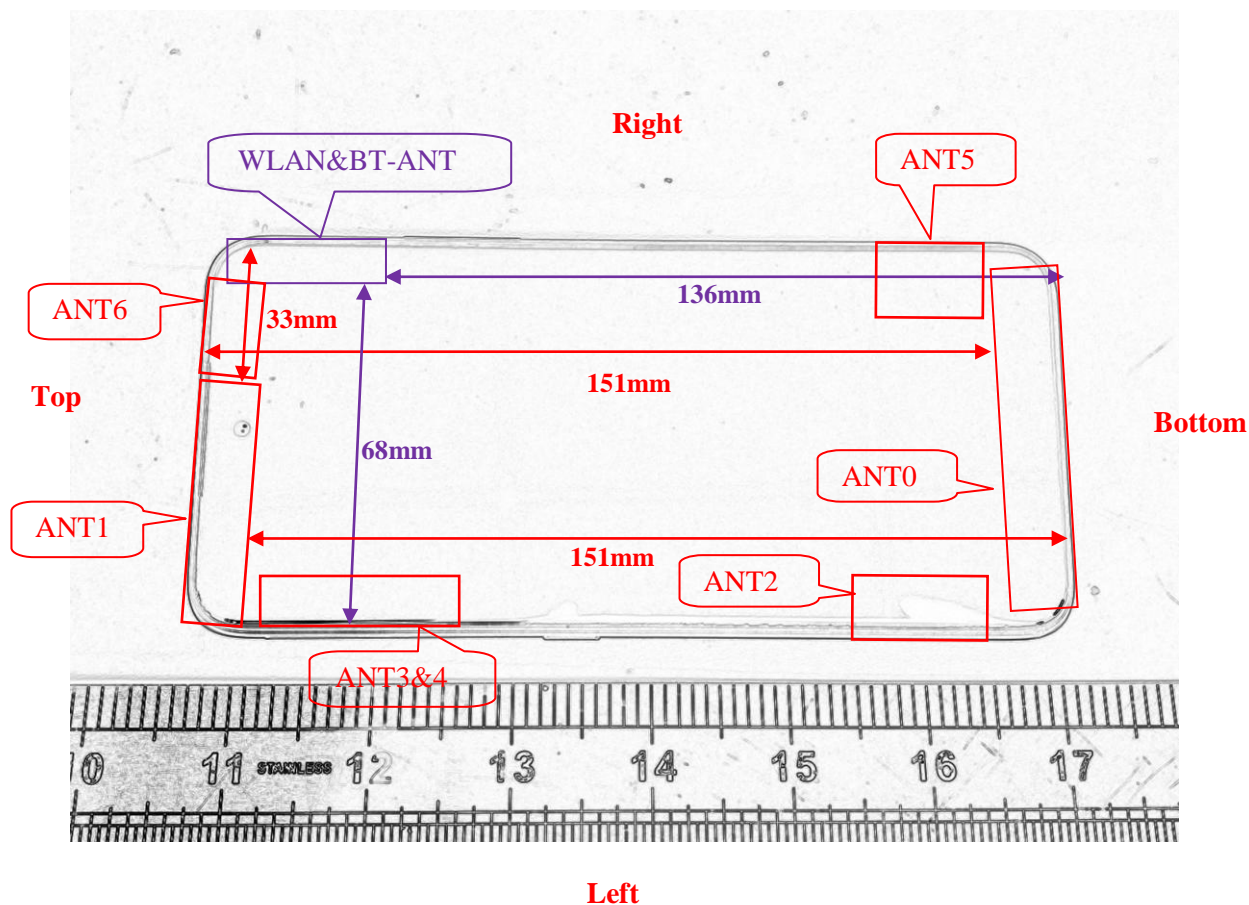

**EUT Front View**

ANT	Description
ANT0	GSM850, WCDMA B5, LTE B5/B12,NR n5(SA, NSA) Main Antenna LTE B2/41 Aux Antenna
ANT1	GSM 1900, WCDAM B2, LTE B2/B41, NR(NSA) DC-2A_n5A(LTE)Main Antenna LTE B5/12, NR n5(SA) Aux Antenna
ANT2	NR(NSA) DC-2A_n5A(LTE)Aux Antenna
ANT3&4	Other country antenna
ANT5	Other country antenna
ANT6	Other country antenna
WLAN&BT	2.4G&5G WIFI& BT -ANT

**Note:**

1. The device don't supports dynamic antenna tuning for same bands

**Antenna Distance To Edge**

Antenna Distance To Edge(mm)						
Antenna	Front	Back	Left	Right	Top	Bottom
WLAN/BT/BLE	< 5	< 5	68	< 5	< 5	136
ANT1	< 5	< 5	< 5	33	< 5	151
ANT0	< 5	< 5	< 5	< 5	151	< 5

**Standalone SAR test exclusion considerations**

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
Bluetooth	2480	0.0	1.0	0	0.3	3	YES
2.4G Wi-Fi	2472	16.5	44.67	0	14.0	3	No
5.2G Wi-Fi	5240	9.5	8.91	0	4.1	3	No
5.8G Wi-Fi	5825	11.0	12.59	0	6.1	3	No

*Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.*

**NOTE:**

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$$

$$[\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**Standalone SAR estimation:**

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
BT Head	2480	0.0	1.0	0	0.04
BT Body	2480	0.0	1.0	10	0.02

*Note: The Bluetooth based peak power for calculation.*

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$$

$$[\sqrt{f(\text{GHz})/x}]$$

W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

**SAR test exclusion for the EUT edge considerations Result**

<b>Antenna Distance To Edge(mm)</b>						
<b>Mode</b>	<b>Front</b>	<b>Back</b>	<b>Left</b>	<b>Right</b>	<b>Top</b>	<b>Bottom</b>
Bluetooth	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*
2.4GWi-Fi	<b>Required</b>	<b>Required</b>	Exclusion	<b>Required</b>	<b>Required</b>	Exclusion
5GWi-Fi	<b>Required</b>	<b>Required</b>	Exclusion	<b>Required</b>	<b>Required</b>	Exclusion
ANT0(GSM/WCDMA/LTE/NR)	<b>Required</b>	<b>Required</b>	<b>Required</b>	<b>Required</b>	Exclusion	<b>Required</b>
ANT1(GSM/WCDMA/LTE/NR)	<b>Required</b>	<b>Required</b>	<b>Required</b>	Exclusion	<b>Required</b>	Exclusion

**Note:**

**Required:** The distance to Edge is less than 25mm, testing is required.

**Exclusion\*:** SAR test exclusion evaluation has been done above.

**Exclusion:** The distance to Edge is more than 25 mm, testing is not required.

## SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

### SAR Test Data

#### Environmental Conditions

<b>Temperature:</b>	22.0-22.9℃	21.9-22.7℃	22.1-22.8℃	22.3-23.0℃	22.5-23.6℃	22.1-22.9℃
<b>Relative Humidity:</b>	40-55 %	41-54 %	37-45 %	44-56 %	47-55 %	38-52 %
<b>ATM Pressure:</b>	101.7 kPa	101.3 kPa	101.3 kPa	101.3 kPa	101.3 kPa	101.3 kPa
<b>Test Date:</b>	2022/05/06	2022/05/07	2022/05/08	2022/05/09	2022/05/10	2022/05/11

<b>Temperature:</b>	22.8-23.6℃
<b>Relative Humidity:</b>	40-55 %
<b>ATM Pressure:</b>	101.3 kPa
<b>Test Date:</b>	2022/05/12

*Testing was performed by Seven Liang, Jacky Yang, Fake ou.*

**GSM 850 :**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	32.7	33.0	1.072	0.146	0.16	1#
	848.8	GSM	/	/	/	/	/	/
Head Left Tilt	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	32.7	33.0	1.072	0.086	0.10	2#
	848.8	GSM	/	/	/	/	/	/
Head Right Cheek	824.2	GSM	32.6	33.0	1.096	0.138	0.16	3#
	836.6	GSM	32.7	33.0	1.072	0.174	0.19	4#
	848.8	GSM	32.6	33.0	1.096	0.206	<b>0.23</b>	5#
Head Right Tilt	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	32.7	33.0	1.072	0.085	0.10	6#
	848.8	GSM	/	/	/	/	/	/
Body Worn Back (10mm)	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	32.7	33.0	1.072	0.236	0.26	7#
	848.8	GSM	/	/	/	/	/	/
Body Front (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	29.30	29.5	1.047	0.239	0.26	8#
	848.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	824.2	GPRS	29.28	29.5	1.052	0.263	0.28	9#
	836.6	GPRS	29.30	29.5	1.047	0.353	0.37	10#
	848.8	GPRS	29.20	29.5	1.072	0.446	<b>0.48</b>	11#
Body Left (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	29.30	29.5	1.047	0.123	0.13	12#
	848.8	GPRS	/	/	/	/	/	/
Body Right (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	29.30	29.5	1.047	0.228	0.24	13#
	848.8	GPRS	/	/	/	/	/	/
Body Bottom (10mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	29.30	29.5	1.047	0.130	0.14	14#
	848.8	GPRS	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8W/Kg$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5$  dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.



## PCS 1900 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	29.6	30.0	1.096	0.528	0.58	15#
	1909.8	GSM	/	/	/	/	/	/
Head Left Tilt	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	29.6	30.0	1.096	0.716	0.79	16#
	1909.8	GSM	/	/	/	/	/	/
Head Right Cheek	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	29.6	30.0	1.096	0.512	0.57	17#
	1909.8	GSM	/	/	/	/	/	/
Head Right Tilt	1850.2	GSM	29.5	30.0	1.122	0.742	0.84	18#
	1880	GSM	29.6	30.0	1.096	0.798	<b>0.88</b>	19#
	1909.8	GSM	29.4	30.0	1.148	0.731	0.84	20#
Body Worn Back (10mm)	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	29.6	30.0	1.096	0.207	0.23	21#
	1909.8	GSM	/	/	/	/	/	/
Body Front (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	25.90	26.0	1.023	0.177	0.19	22#
	1909.8	GPRS	/	/	/	/	/	/
Body Back (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	25.90	26.0	1.023	0.200	0.21	23#
	1909.8	GPRS	/	/	/	/	/	/
Body Left (10mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	25.90	26.0	1.023	0.079	0.09	24#
	1909.8	GPRS	/	/	/	/	/	/
Body Top (10mm)	1850.2	GPRS	25.79	26.0	1.050	0.377	<b>0.40</b>	25#
	1880	GPRS	25.90	26.0	1.023	0.362	0.38	26#
	1909.8	GPRS	25.82	26.0	1.042	0.327	0.35	27#

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is  $> 0.5$  dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.

## WCDMA Band 2 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.374	0.39	28#
	1907.6	RMC	/	/	/	/	/	/
Head Left Tilt	1852.4	RMC	22.80	23.0	1.047	0.668	<b>0.70</b>	29#
	1880	RMC	22.86	23.0	1.033	0.474	0.49	30#
	1907.6	RMC	22.80	23.0	1.047	0.376	0.40	31#
Head Right Cheek	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.329	0.34	32#
	1907.6	RMC	/	/	/	/	/	/
Head Right Tilt	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.449	0.47	33#
	1907.6	RMC	/	/	/	/	/	/
Body Front (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.099	0.11	34#
	1907.6	RMC	/	/	/	/	/	/
Body Back (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.125	0.13	35#
	1907.6	RMC	/	/	/	/	/	/
Body Left (10mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.86	23.0	1.033	0.058	0.06	36#
	1907.6	RMC	/	/	/	/	/	/
Body Top (10mm)	1852.4	RMC	22.80	23.0	1.047	0.220	<b>0.24</b>	37#
	1880	RMC	22.86	23.0	1.033	0.181	0.19	38#
	1907.6	RMC	22.80	23.0	1.047	0.138	0.15	39#

**WCDMA Band 5 :**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.182	0.20	40#
	846.6	RMC	/	/	/	/	/	/
Head Left Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.138	0.16	41#
	846.6	RMC	/	/	/	/	/	/
Head Right Cheek	826.4	RMC	22.66	23.0	1.081	0.194	0.21	42#
	836.6	RMC	22.61	23.0	1.094	0.211	0.24	43#
	846.6	RMC	22.57	23.0	1.104	0.226	<b>0.25</b>	44#
Head Right Tilt	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.103	0.12	45#
	846.6	RMC	/	/	/	/	/	/
Body Front (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.178	0.20	46#
	846.6	RMC	/	/	/	/	/	/
Body Back (10mm)	826.4	RMC	22.66	23.0	1.081	0.237	0.26	47#
	836.6	RMC	22.61	23.0	1.094	0.270	0.30	48#
	846.6	RMC	22.57	23.0	1.104	0.273	<b>0.31</b>	49#
Body Left (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.089	0.10	50#
	846.6	RMC	/	/	/	/	/	/
Body Right (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.152	0.17	51#
	846.6	RMC	/	/	/	/	/	/
Body Bottom (10mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.61	23.0	1.094	0.097	0.11	52#
	846.6	RMC	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8W/Kg$ , testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

**LTE Band 2 :**

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.291	0.33	53#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.243	0.35	54#
Head Left Tilt	1860	20	1RB	21.46	22.0	1.132	0.466	<b>0.53</b>	55#
	1880	20	1RB	21.58	22.0	1.102	0.379	0.42	56#
	1900	20	1RB	21.51	22.0	1.119	0.320	0.36	57#
	1880	20	50%RB	20.53	22.0	1.403	0.317	0.45	58#
Head Right Cheek	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.313	0.35	59#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.259	0.37	60#
Head Right Tilt	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.321	0.36	61#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.259	0.37	62#
Body Front (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.079	0.09	63#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.066	0.10	64#
Body Back (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.087	0.10	65#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.075	0.11	66#
Body Left (10mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	21.58	22.0	1.102	0.043	0.05	67#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	20.53	22.0	1.403	0.036	0.06	68#
Body Top (10mm)	1860	20	1RB	21.46	22.0	1.132	0.186	<b>0.22</b>	69#
	1880	20	1RB	21.58	22.0	1.102	0.155	0.18	70#
	1900	20	1RB	21.51	22.0	1.119	0.115	0.13	71#
	1880	20	50%RB	20.53	22.0	1.403	0.129	0.19	72#

## LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.134	0.16	73#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.104	0.15	74#
Head Left Tilt	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.090	0.11	75#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.069	0.10	76#
Head Right Cheek	829	10	1RB	21.95	22.5	1.135	0.138	0.16	77#
	836.5	10	1RB	21.86	22.5	1.159	0.151	0.18	78#
	844	10	1RB	21.96	22.5	1.132	0.162	<b>0.19</b>	79#
	836.5	10	50%RB	21.02	22.5	1.406	0.119	0.17	80#
Head Right Tilt	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.081	0.10	81#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.067	0.10	82#
Body Front (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.142	0.17	83#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.113	0.16	84#
Body Back (10mm)	829	10	1RB	21.95	22.5	1.135	0.171	0.20	85#
	836.5	10	1RB	21.86	22.5	1.159	0.201	<b>0.24</b>	86#
	844	10	1RB	21.96	22.5	1.132	0.198	0.23	87#
	836.5	10	50%RB	21.02	22.5	1.406	0.163	0.23	88#
Body Left (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.081	0.10	89#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.063	0.09	90#
Body Right (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.126	0.15	91#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.100	0.15	92#
Body Bottom (10mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	21.86	22.5	1.159	0.083	0.10	93#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.02	22.5	1.406	0.068	0.10	94#

## LTE Band 12 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.112	0.13	95#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.091	0.13	96#
Head Left Tilt	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.064	0.07	97#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.053	0.08	98#
Head Right Cheek	704	10	1RB	22.32	22.5	1.042	0.108	0.12	99#
	707.5	10	1RB	22.18	22.5	1.076	0.115	<b>0.13</b>	100#
	711	10	1RB	22.20	22.5	1.072	0.115	0.13	101#
	707.5	10	50%RB	21.18	22.5	1.355	0.093	0.13	102#
Head Right Tilt	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.060	0.07	103#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.049	0.07	104#
Body Front (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.167	0.18	105#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.134	0.19	106#
Body Back (10mm)	704	10	1RB	22.32	22.5	1.042	0.176	0.19	107#
	707.5	10	1RB	22.18	22.5	1.076	0.213	0.23	108#
	711	10	1RB	22.20	22.5	1.072	0.181	0.20	109#
	707.5	10	50%RB	21.18	22.5	1.355	0.171	<b>0.24</b>	110#
Body Left (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.135	0.15	111#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.111	0.16	112#
Body Right (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.153	0.17	113#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.124	0.17	114#
Body Bottom (10mm)	704	10	1RB	/	/	/	/	/	/
	707.5	10	1RB	22.18	22.5	1.076	0.046	0.05	115#
	711	10	1RB	/	/	/	/	/	/
	707.5	10	50%RB	21.18	22.5	1.355	0.038	0.06	116#

## LTE Band 41 (Power Class 3) :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2545	20	1RB	/	/	/	/	/	/
	2580	20	1RB	/	/	/	/	/	/
	2610	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.19	22.3	1.026	0.475	0.49	117#
	2645	20	50%RB	21.99	22.3	1.074	0.477	0.52	118#
Head Left Tilt	2545	20	1RB	/	/	/	/	/	/
	2580	20	1RB	/	/	/	/	/	/
	2610	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.19	22.3	1.026	0.639	0.66	119#
	2645	20	50%RB	21.99	22.3	1.074	0.642	0.69	120#
Head Right Cheek	2545	20	1RB	21.76	22.3	1.132	1.170	1.33	121#
	2580	20	1RB	21.80	22.3	1.122	1.010	1.14	122#
	2610	20	1RB	22.15	22.3	1.035	1.150	1.20	123#
	2645	20	1RB	22.19	22.3	1.026	1.140	1.17	124#
	2545	20	50%RB	21.72	22.3	1.143	1.220	1.40	125#
	2580	20	50%RB	21.84	22.3	1.112	0.999	1.12	126#
	2610	20	50%RB	21.79	22.3	1.125	1.180	1.33	127#
	2645	20	50%RB	21.99	22.3	1.074	1.200	1.29	128#
	2645	20	100%RB	21.92	22.3	1.091	1.200	1.31	129#
Head Right Tilt	2545	20	1RB	21.76	22.3	1.132	1.230	1.40	130#
	2580	20	1RB	21.80	22.3	1.122	1.100	1.24	131#
	2610	20	1RB	22.15	22.3	1.035	1.230	1.28	132#
	2645	20	1RB	22.19	22.3	1.026	1.130	1.16	133#
	2545	20	50%RB	21.72	22.3	1.143	1.240	<b>1.42</b>	134#
	2580	20	50%RB	21.84	22.3	1.112	1.110	1.24	135#
	2610	20	50%RB	21.79	22.3	1.125	1.120	1.26	136#
	2645	20	50%RB	21.99	22.3	1.074	1.160	1.25	137#
	2645	20	100%RB	21.92	22.3	1.091	1.200	1.31	138#
Body Front (10mm)	2545	20	1RB	/	/	/	/	/	/
	2580	20	1RB	/	/	/	/	/	/
	2610	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.19	22.3	1.026	0.237	0.25	139#
	2645	20	50%RB	21.99	22.3	1.074	0.233	0.26	140#
Body Back (10mm)	2545	20	1RB	/	/	/	/	/	/
	2580	20	1RB	/	/	/	/	/	/
	2610	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.19	22.3	1.026	0.538	0.56	141#
	2645	20	50%RB	21.99	22.3	1.074	0.552	0.60	142#
Body Left (10mm)	2545	20	1RB	/	/	/	/	/	/
	2580	20	1RB	/	/	/	/	/	/

	2610	20	1RB	/	/	/	/	/	/
	2645	20	1RB	22.19	22.3	1.026	0.145	0.15	143#
	2645	20	50%RB	21.99	22.3	1.074	0.140	0.16	144#
Body Top (10mm)	2545	20	1RB	21.76	22.3	1.132	0.696	0.79	145#
	2580	20	1RB	21.80	22.3	1.122	0.713	<b>0.80</b>	146#
	2610	20	1RB	22.15	22.3	1.035	0.697	0.73	147#
	2645	20	1RB	22.19	22.3	1.026	0.733	0.76	148#
	2645	20	50%RB	21.99	22.3	1.074	0.725	0.78	149#

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 0.5$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is  $< 1.45$  W/kg, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> 0.5$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.
8. Worst case SAR for 50% RB allocation is selected to be tested.
9. KDB 648474 D04-When the peak SAR located in regions that probe is unable to access, a flat phantom is used for SAR measurement.
10. From May 2017 TCB Workshop, SAR tested were performed using Power Class 3 and maximum output power(Tune-up Limit) PC3 is higher from PC2.



**WLAN 2.4G:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Head Left Cheek	2412	802.11b	16.18	16.5	1.076	0.220	0.24	150#
	2442	802.11b	16.21	16.5	1.069	0.458	<b>0.49</b>	151#
	2472	802.11b	16.26	16.5	1.057	0.414	0.44	152#
Head Left Tilt	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.317	0.34	153#
	2472	802.11b	/	/	/	/	/	/
Head Right Cheek	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.092	0.10	154#
	2472	802.11b	/	/	/	/	/	/
Head Right Tilt	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.104	0.12	155#
	2472	802.11b	/	/	/	/	/	/
Body Front (10mm)	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.063	0.07	156#
	2472	802.11b	/	/	/	/	/	/
Body Back (10mm)	2412	802.11b	16.18	16.5	1.076	0.166	<b>0.18</b>	157#
	2442	802.11b	16.21	16.5	1.069	0.142	0.16	158#
	2472	802.11b	16.26	16.5	1.057	0.146	0.16	159#
Body Right (10mm)	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.063	0.07	160#
	2472	802.11b	/	/	/	/	/	/
Body Top (10mm)	2412	802.11b	/	/	/	/	/	/
	2442	802.11b	16.21	16.5	1.069	0.054	0.06	161#
	2472	802.11b	/	/	/	/	/	/

**Note:**

1. When the 1-g SAR is  $\leq 0.8$  W/Kg, testing for other channels are optional.
2. When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, OFDM SAR is not required.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11b/g/n mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

**WLAN 5G:**

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	duty cycle %	Duty cycle Scaled Factor	1g SAR (W/kg)		
								Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.071	0.09	162#
Head Left Tilt	5190	802.11n HT40	8.59	9.5	1.233	94.20	1.06	0.102	0.14	163#
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.112	0.14	164#
Head Right Cheek	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.078	0.10	165#
Head Right Tilt	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.082	0.10	166#
Body Front (10mm)	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.025	0.03	167#
Body Back (10mm)	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.025	0.03	168#
Body Right (10mm)	5190	802.11n HT40	/	/	/	/	/	/	/	/
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.039	0.05	169#
Body Top (10mm)	5190	802.11n HT40	8.59	9.5	1.233	94.20	1.06	0.063	0.09	170#
	/	/	/	/	/	/	/	/	/	/
	5230	802.11n HT40	9.09	9.5	1.099	94.20	1.06	0.064	0.08	171#

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	duty cycle %	Duty cycle Scaled Factor	1g SAR (W/kg)		
								Meas. SAR	Scaled SAR	Plot
Head Left Cheek	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.109	0.13	172#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Head Left Tilt	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.188	<b>0.21</b>	173#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	10.56	11.0	1.107	94.20	1.06	0.168	0.20	174#
Head Right Cheek	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.163	0.19	175#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Head Right Tilt	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.145	0.17	176#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Body Front (10mm)	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.020	0.03	177#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Body Back (10mm)	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.052	0.06	178#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Body Right (10mm)	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.060	0.07	179#
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	/	/	/	/	/	/	/	/
Body Top (10mm)	5755	802.11n HT40	10.78	11.0	1.052	94.20	1.06	0.138	<b>0.16</b>	180#/ /
	/	/	/	/	/	/	/	/	/	/
	5795	802.11n HT40	10.56	11.0	1.107	94.20	1.06	0.107	0.13	181#

**Note:**

1. When the SAR value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance
3. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11n HT40 signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to “1/( duty cycle)”.

5G NR Band n5:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Modulation	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			Plot
							Scaled Factor	Meas. SAR	Scaled SAR	
Head Left Cheek	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.131	0.15	182#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.14	0.16	183#
Head Left Tilt	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.081	0.10	184#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.083	0.10	185#
Head Right Cheek	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.099	0.12	186#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	834	20	DFT-s-OFDM	50%RB	23.58	24.0	1.102	0.165	0.18	187#
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.162	<b>0.19</b>	188#
	839	20	DFT-s-OFDM	50%RB	23.41	24.0	1.146	0.167	0.19	189#
Head Right Tilt	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.066	0.08	190#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.068	0.08	191#
Body Front (10mm)	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.13	0.15	192#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.134	0.15	193#
Body Back (10mm)	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.199	0.23	194#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	834	20	DFT-s-OFDM	50%RB	23.58	24.0	1.102	0.176	0.19	195#
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.252	<b>0.29</b>	196#
	839	20	DFT-s-OFDM	50%RB	23.41	24.0	1.146	0.192	0.22	197#
Body Left (10mm)	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.086	0.10	198#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.112	0.13	199#
Body Right (10mm)	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.04	0.05	200#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.044	0.05	201#
Body Bottom (10mm)	834	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	1RB	23.29	24.0	1.178	0.094	0.11	202#
	839	20	DFT-s-OFDM	1RB	/	/	/	/	/	/
	836.5	20	DFT-s-OFDM	50%RB	23.38	24.0	1.153	0.123	0.14	203#

**Note:**

1. SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SR testing for NR was performed using test mode software to establish the connection.
2. FR1 supported standalone.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is  $> 0.5$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is  $< 1.45$  W/kg, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> 0.5$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

*Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.*

### The Highest Measured SAR Configuration in Each Frequency Band

#### Head

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
2600MHZ (2500-2700MHZ)	LTE Band 41	2545	Head Right Cheek	1.22	1.19	1.03
2600MHZ (2500-2700MHZ)	LTE Band 41	2545	Head Right Tilt	1.24	1.22	1.02

#### Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
/	/	/	/	/	/	/

**Note:**

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

## SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE/5G NR) + Bluetooth	√	×
WWAN(GSM/WCDMA/LTE/5G NR) + 2.4G WLAN	√	√
WWAN(GSM/WCDMA/LTE/5G NR) + 5G WLAN	√	√
EN_DC+ Bluetooth	√	×
EN_DC+ 2.4G WLAN	√	√
EN_DC+ 5G WLAN	√	√
2.4G WLAN + Bluetooth	×	×
5G WLAN + Bluetooth	×	×

### Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		ΣSAR < 1.6W/kg
		MAX <sub>SAR1</sub>	MAX <sub>SAR2</sub>	
DC_B2_n5(Ant 1+Ant 0)	Head Left Cheek	0.35	0.16	0.51
DC_B2_n5(Ant 1+Ant 0)	Head Left Tilt	0.53	0.10	0.63
DC_B2_n5(Ant 1+Ant 0)	Head Right Cheek	0.37	0.19	0.56
DC_B2_n5(Ant 1+Ant 0)	Head Right Tilt	0.37	0.08	0.45
DC_B2_n5(Ant 1+Ant 0)	Body Front	0.10	0.15	0.25
DC_B2_n5(Ant 1+Ant 0)	Body Back	0.11	0.29	0.40
DC_B2_n5(Ant 1+Ant 0)	Body Left	0.06	0.13	0.19
DC_B2_n5(Ant 1+Ant 0)	Body Right	/	0.05	0.05
DC_B2_n5(Ant 1+Ant 0)	Body Top	0.22	/	0.22
DC_B2_n5(Ant 1+Ant 0)	Body Bottom	/	0.14	0.14

**Note:** SAR1 is the SAR value measured with EN-DC modes (LTE B2), which transmit by Ant1. SAR2 is the SAR value measured by 5G NR n5 transmitted by Ant 0

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Bluetooth	Head Left Cheek	0.16	0.04	0.20
	Head Left Tilt	0.10	0.04	0.14
	Head Right Cheek	0.23	0.04	0.27
	Head Right Tilt	0.10	0.04	0.14
	Body Worn Back	0.26	0.02	0.28
	Body Front	0.26	0.02	0.28
	Body Back	0.48	0.02	0.50
PCS 1900+ Bluetooth	Head Left Cheek	0.48	0.04	0.52
	Head Left Tilt	0.79	0.04	0.83
	Head Right Cheek	0.57	0.04	0.61
	Head Right Tilt	0.88	0.04	0.92
	Body Worn Back	0.23	0.02	0.25
	Body Front	0.19	0.02	0.21
	Body Back	0.21	0.02	0.23
WCDMA Band 2+ Bluetooth	Head Left Cheek	0.39	0.04	0.43
	Head Left Tilt	0.70	0.04	0.74
	Head Right Cheek	0.34	0.04	0.38
	Head Right Tilt	0.47	0.04	0.51
	Body Front	0.11	0.02	0.13
	Body Back	0.13	0.02	0.15
WCDMA Band 5+ Bluetooth	Head Left Cheek	0.20	0.04	0.24
	Head Left Tilt	0.16	0.04	0.20
	Head Right Cheek	0.25	0.04	0.29
	Head Right Tilt	0.12	0.04	0.16
	Body Front	0.20	0.02	0.22
	Body Back	0.31	0.02	0.33



Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Bluetooth	Head Left Cheek	0.35	0.04	0.39
	Head Left Tilt	0.53	0.04	0.57
	Head Right Cheek	0.37	0.04	0.41
	Head Right Tilt	0.37	0.04	0.41
	Body Front	0.10	0.02	0.12
	Body Back	0.11	0.02	0.13
LTE Band 5+ Bluetooth	Head Left Cheek	0.16	0.04	0.20
	Head Left Tilt	0.11	0.04	0.15
	Head Right Cheek	0.19	0.04	0.23
	Head Right Tilt	0.10	0.04	0.14
	Body Front	0.17	0.02	0.19
	Body Back	0.24	0.02	0.26
LTE Band 12+ Bluetooth	Head Left Cheek	0.13	0.04	0.17
	Head Left Tilt	0.08	0.04	0.12
	Head Right Cheek	0.13	0.04	0.17
	Head Right Tilt	0.07	0.04	0.11
	Body Front	0.18	0.02	0.20
	Body Back	0.24	0.02	0.26
LTE Band 41+ Bluetooth	Head Left Cheek	0.52	0.04	0.56
	Head Left Tilt	0.69	0.04	0.73
	Head Right Cheek	1.40	0.04	1.44
	Head Right Tilt	1.42	0.04	1.46
	Body Front	0.26	0.02	0.28
	Body Back	0.60	0.02	0.62
5G NR Band n5+ Bluetooth	Head Left Cheek	0.16	0.04	0.20
	Head Left Tilt	0.10	0.04	0.14
	Head Right Cheek	0.19	0.04	0.23
	Head Right Tilt	0.08	0.04	0.12
	Body Front	0.15	0.02	0.17
	Body Back	0.29	0.02	0.31
DC_B2_n5+ Bluetooth	Head Left Cheek	0.51	0.04	0.55
	Head Left Tilt	0.63	0.04	0.67
	Head Right Cheek	0.56	0.04	0.60
	Head Right Tilt	0.45	0.04	0.49
	Body Front	0.25	0.02	0.27
	Body Back	0.40	0.02	0.42

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 2.4G	Head Left Cheek	0.16	0.49	0.65
	Head Left Tilt	0.10	0.34	0.44
	Head Right Cheek	0.23	0.10	0.33
	Head Right Tilt	0.10	0.12	0.22
GSM 850+ Wi-Fi 2.4G (Hotspot)	Body Worn Back	0.26	0.18	0.44
	Body Front	0.26	0.07	0.33
	Body Back	0.48	0.18	0.66
	Body Left	0.13	/	0.13
	Body Right	0.24	0.07	0.31
	Body Top	/	0.06	0.06
	Body Bottom	0.14	/	0.14
PCS 1900+ Wi-Fi 2.4G	Head Left Cheek	0.48	0.49	0.97
	Head Left Tilt	0.79	0.34	1.13
	Head Right Cheek	0.57	0.10	0.67
	Head Right Tilt	0.88	0.12	1.00
PCS 1900+ Wi-Fi 2.4G (Hotspot)	Body Worn Back	0.23	0.18	0.41
	Body Front	0.19	0.07	0.26
	Body Back	0.21	0.18	0.39
	Body Left	0.09	/	0.09
	Body Right	/	0.07	0.07
	Body Top	0.40	0.06	0.46
	Body Bottom	/	/	/
WCDMA Band 2+ Wi-Fi 2.4G	Head Left Cheek	0.39	0.49	0.88
	Head Left Tilt	0.70	0.34	1.04
	Head Right Cheek	0.34	0.10	0.44
	Head Right Tilt	0.47	0.12	0.59
WCDMA Band 2+ Wi-Fi 2.4G (Hotspot)	Body Front	0.11	0.07	0.18
	Body Back	0.13	0.18	0.31
	Body Left	0.06	/	0.06
	Body Right	/	0.07	0.07
	Body Top	0.24	0.06	0.30
	Body Bottom	/	/	/
WCDMA Band 5+ Wi-Fi 2.4G	Head Left Cheek	0.20	0.49	0.69
	Head Left Tilt	0.16	0.34	0.50
	Head Right Cheek	0.25	0.10	0.35
	Head Right Tilt	0.12	0.12	0.24
WCDMA Band 5+ Wi-Fi 2.4G (Hotspot)	Body Front	0.20	0.07	0.27
	Body Back	0.31	0.18	0.49
	Body Left	0.10	/	0.10
	Body Right	0.17	0.07	0.24
	Body Top	/	0.06	0.06
	Body Bottom	0.11	/	0.11

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 2.4G	Head Left Cheek	0.35	0.49	0.84
	Head Left Tilt	0.53	0.34	0.87
	Head Right Cheek	0.37	0.10	0.47
	Head Right Tilt	0.37	0.12	0.49
LTE Band 2+ Wi-Fi 2.4G (Hotspot)	Body Front	0.10	0.07	0.17
	Body Back	0.11	0.18	0.29
	Body Left	0.06	/	0.06
	Body Right	/	0.07	0.07
	Body Top	0.22	0.06	0.28
	Body Bottom	/	/	/
LTE Band 5+ Wi-Fi 2.4G	Head Left Cheek	0.16	0.49	0.65
	Head Left Tilt	0.11	0.34	0.45
	Head Right Cheek	0.19	0.10	0.29
	Head Right Tilt	0.10	0.12	0.22
LTE Band 5+ Wi-Fi 2.4G (Hotspot)	Body Front	0.17	0.07	0.24
	Body Back	0.24	0.18	0.42
	Body Left	0.10	/	0.10
	Body Right	0.15	0.07	0.22
	Body Top	/	0.06	0.06
	Body Bottom	0.10	/	0.10
LTE Band 12+ Wi-Fi 2.4G	Head Left Cheek	0.13	0.49	0.62
	Head Left Tilt	0.08	0.34	0.42
	Head Right Cheek	0.13	0.10	0.23
	Head Right Tilt	0.07	0.12	0.19
LTE Band 12+ Wi-Fi 2.4G (Hotspot)	Body Front	0.18	0.07	0.25
	Body Back	0.24	0.18	0.42
	Body Left	0.16	/	0.16
	Body Right	0.17	0.07	0.24
	Body Top	/	0.06	0.06
	Body Bottom	0.06	/	0.06
LTE Band 41+ Wi-Fi 2.4G	Head Left Cheek	0.52	0.49	1.01
	Head Left Tilt	0.69	0.34	1.03
	Head Right Cheek	1.40	0.10	1.50
	Head Right Tilt	1.42	0.12	<b>1.54</b>
LTE Band 41+ Wi-Fi 2.4G (Hotspot)	Body Front	0.26	0.07	0.33
	Body Back	0.60	0.18	0.78
	Body Left	0.16	/	0.16
	Body Right	/	0.07	0.07
	Body Top	0.80	0.06	<b>0.86</b>
	Body Bottom	/	/	/

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
5G NR Band n5+ Wi-Fi 2.4G	Head Left Cheek	0.16	0.49	0.65
	Head Left Tilt	0.10	0.34	0.44
	Head Right Cheek	0.19	0.10	0.29
	Head Right Tilt	0.08	0.12	0.20
5G NR Band n5+ Wi-Fi 2.4G (Hotspot)	Body Front	0.15	0.07	0.22
	Body Back	0.29	0.18	0.47
	Body Left	0.13	/	0.13
	Body Right	0.05	0.07	0.12
	Body Top	/	0.06	0.06
	Body Bottom	0.14	/	0.14
DC_B2_n5+ Wi-Fi 2.4G	Head Left Cheek	0.51	0.49	1.00
	Head Left Tilt	0.63	0.34	0.97
	Head Right Cheek	0.56	0.10	0.66
	Head Right Tilt	0.45	0.12	0.57
DC_B2_n5+ Wi-Fi 2.4G (Hotspot)	Body Front	0.25	0.07	0.32
	Body Back	0.40	0.18	0.58
	Body Left	0.19	/	0.19
	Body Right	0.05	0.07	0.12
	Body Top	0.22	0.06	0.28
	Body Bottom	0.14	/	0.14

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 5G	Head Left Cheek	0.16	0.12	0.28
	Head Left Tilt	0.10	0.20	0.30
	Head Right Cheek	0.23	0.18	0.41
	Head Right Tilt	0.10	0.16	0.26
GSM 850+ Wi-Fi 5G (Hotspot)	Body Worn Back	0.26	0.06	0.32
	Body Front	0.26	0.03	0.29
	Body Back	0.48	0.06	0.54
	Body Left	0.13	/	0.13
	Body Right	0.24	0.07	0.31
	Body Top	/	0.15	0.15
	Body Bottom	0.14	/	0.14
PCS 1900+ Wi-Fi 5G	Head Left Cheek	0.48	0.12	0.60
	Head Left Tilt	0.79	0.20	0.99
	Head Right Cheek	0.57	0.18	0.75
	Head Right Tilt	0.88	0.16	1.04
PCS 1900+ Wi-Fi 5G (Hotspot)	Body Worn Back	0.23	0.06	0.29
	Body Front	0.19	0.03	0.22
	Body Back	0.21	0.06	0.27
	Body Left	0.09	/	0.09
	Body Right	/	0.07	0.07
	Body Top	0.40	0.15	0.55
	Body Bottom	/	/	/
WCDMA Band 2+ Wi-Fi 5G	Head Left Cheek	0.39	0.12	0.51
	Head Left Tilt	0.70	0.20	0.90
	Head Right Cheek	0.34	0.18	0.52
	Head Right Tilt	0.47	0.16	0.63
WCDMA Band 2+ Wi-Fi 5G (Hotspot)	Body Front	0.11	0.03	0.14
	Body Back	0.13	0.06	0.19
	Body Left	0.06	/	0.06
	Body Right	/	0.07	0.07
	Body Top	0.24	0.15	0.39
	Body Bottom	/	/	/
WCDMA Band 5+ Wi-Fi 5G	Head Left Cheek	0.20	0.12	0.32
	Head Left Tilt	0.16	0.20	0.36
	Head Right Cheek	0.25	0.18	0.43
	Head Right Tilt	0.12	0.16	0.28
WCDMA Band 5+ Wi-Fi 5G (Hotspot)	Body Front	0.20	0.03	0.23
	Body Back	0.31	0.06	0.37
	Body Left	0.10	/	0.10
	Body Right	0.17	0.07	0.24
	Body Top	/	0.15	0.15
	Body Bottom	0.11	/	0.11

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 5G	Head Left Cheek	0.35	0.12	0.47
	Head Left Tilt	0.53	0.20	0.73
	Head Right Cheek	0.37	0.18	0.55
	Head Right Tilt	0.37	0.16	0.53
LTE Band 2+ Wi-Fi 5G (Hotspot)	Body Front	0.10	0.03	0.13
	Body Back	0.11	0.06	0.17
	Body Left	0.06	/	0.06
	Body Right	/	0.07	0.07
	Body Top	0.22	0.15	0.37
	Body Bottom	/	/	/
LTE Band 5+ Wi-Fi 5G	Head Left Cheek	0.16	0.12	0.28
	Head Left Tilt	0.11	0.20	0.31
	Head Right Cheek	0.19	0.18	0.37
	Head Right Tilt	0.10	0.16	0.26
LTE Band 5+ Wi-Fi 5G (Hotspot)	Body Front	0.17	0.03	0.20
	Body Back	0.24	0.06	0.30
	Body Left	0.10	/	0.10
	Body Right	0.15	0.07	0.22
	Body Top	/	0.15	0.15
	Body Bottom	0.10	/	0.10
LTE Band 12+ Wi-Fi 5G	Head Left Cheek	0.13	0.12	0.25
	Head Left Tilt	0.08	0.20	0.28
	Head Right Cheek	0.13	0.18	0.31
	Head Right Tilt	0.07	0.16	0.23
LTE Band 12+ Wi-Fi 5G (Hotspot)	Body Front	0.18	0.03	0.21
	Body Back	0.24	0.06	0.30
	Body Left	0.16	/	0.16
	Body Right	0.17	0.07	0.24
	Body Top	/	0.15	0.15
	Body Bottom	0.06	/	0.06
LTE Band 41+ Wi-Fi 5G	Head Left Cheek	0.52	0.12	0.64
	Head Left Tilt	0.69	0.20	0.89
	Head Right Cheek	1.40	0.18	1.58
	Head Right Tilt	1.42	0.16	<b>1.58</b>
LTE Band 41+ Wi-Fi 5G (Hotspot)	Body Front	0.26	0.03	0.29
	Body Back	0.60	0.06	0.66
	Body Left	0.16	/	0.16
	Body Right	/	0.07	0.07
	Body Top	0.80	0.15	<b>0.95</b>
	Body Bottom	/	/	/

Mode	Position	Reported SAR(W/kg)		$\Sigma$ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 41+ Wi-Fi 5G	Head Left Cheek	0.16	0.12	0.28
	Head Left Tilt	0.10	0.20	0.30
	Head Right Cheek	0.19	0.18	0.37
	Head Right Tilt	0.08	0.16	0.24
5G NR Band n5+ Wi-Fi 5G (Hotspot)	Body Front	0.15	0.03	0.18
	Body Back	0.29	0.06	0.35
	Body Left	0.13	/	0.13
	Body Right	0.05	0.07	0.12
	Body Top	/	0.15	0.15
	Body Bottom	0.14	/	0.14
DC_B2_n5+ Wi-Fi 5G	Head Left Cheek	0.51	0.12	0.63
	Head Left Tilt	0.63	0.20	0.83
	Head Right Cheek	0.56	0.18	0.74
	Head Right Tilt	0.45	0.16	0.61
DC_B2_n5+ Wi-Fi 5G (Hotspot)	Body Front	0.25	0.03	0.28
	Body Back	0.40	0.06	0.46
	Body Left	0.19	/	0.19
	Body Right	0.05	0.07	0.12
	Body Top	0.22	0.15	0.37
	Body Bottom	0.14	/	0.14

**Note:**

1. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

2. Hotspot Mode is not feasible during voice calls.

**Conclusion:**

Sum of SAR:  $\Sigma$  SAR  $\leq$  1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

## **SAR Plots**

---

**Please Refer to the Attachment.**



## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

### Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/uncertainty y ±%	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ±%, (1 g)	Standard uncertainty ±%, (10 g)
<b>Measurement system</b>							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
<b>Test sample related</b>							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
<b>Phantom and set-up</b>							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

## Measurement uncertainty evaluation for IEC 62209-2 SAR test

Source of uncertainty	Tolerance/uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
<b>Measurement system</b>							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Modulation Response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
<b>Test sample related</b>							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	$\sqrt{3}$	1	1	2.6	2.6
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
<b>Phantom and set-up</b>							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc. - Conductivity	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Temp. unc. - Permittivity	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

---

## **APPENDIX B EUT TEST POSITION PHOTOS**

---

**Please Refer to the Attachment.**

---

## **APPENDIX C PROBE CALIBRATION CERTIFICATES**

---

**Please Refer to the Attachment.**

---

## **APPENDIX D DIPOLE CALIBRATION CERTIFICATES**

---

**Please Refer to the Attachment.**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***