

# **FCC Test Report**

Report No.: AGC03285210502FE03

FCC ID : 2AMWO-FSCBT1026

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Bluetooth Module

**BRAND NAME** : Feasycom

**MODEL NAME** : FSC-BT1026

**APPLICANT**: Shenzhen Feasycom Technology Co., LTD

**DATE OF ISSUE** : Jul. 06, 2021

**STANDARD(S)** : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Attestation of Shenzhen) Co., Ltd





Report No.: AGC03285210502FE03

Page 2 of 87

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 06, 2021	Valid	Initial Release



# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	
2.9. EQUIPMENT MODIFICATIONS	
2.10. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
5.2. EQUIPMENT USED IN TESTED SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. 20DB BANDWIDTH	19
8.1. MEASUREMENT PROCEDURE	19
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25



9.3. MEASUREMENT EQUIPMENT USED	25
9.4. LIMITS AND MEASUREMENT RESULT	25
10. RADIATED EMISSION	46
10.1. MEASUREMENT PROCEDURE	46
10.2. TEST SETUP	48
10.3. LIMITS AND MEASUREMENT RESULT	49
10.4. TEST RESULT	
11. NUMBER OF HOPPING FREQUENCY	
11.1. MEASUREMENT PROCEDURE	67
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	67
11.3. MEASUREMENT EQUIPMENT USED	
11.4. LIMITS AND MEASUREMENT RESULT	
12. TIME OF OCCUPANCY (DWELL TIME)	68
12.1. MEASUREMENT PROCEDURE	68
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
12.3. MEASUREMENT EQUIPMENT USED	
12.4. LIMITS AND MEASUREMENT RESULT	
13. FREQUENCY SEPARATION	
13.1. MEASUREMENT PROCEDURE	
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
13.3. MEASUREMENT EQUIPMENT USED	
13.4. LIMITS AND MEASUREMENT RESULT	72
14. LINE CONDUCTED EMISSION TEST	
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	77
APPENDIX B. PHOTOGRAPHS OF FUT	79



# 1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Feasycom Technology Co., LTD	
Address	Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road, Xixiang, Baoan District, Shenzhen, China	
Manufacturer Shenzhen Feasycom Technology Co., LTD		
Address	Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road, Xixiang, Baoan District, Shenzhen, China	
Factory	Shenzhen Feasycom Technology Co., LTD	
Address Room 2004A, 20th Floor, Huichao Technology Building, Jinhai Road, Xixiai Baoan District, Shenzhen, China		
Product Designation	oduct Designation Bluetooth Module	
Brand Name	Feasycom	
Test Model FSC-BT1026		
Date of test	May 27, 2021 to Jul. 06, 2021	
Deviation	No any deviation from the test method	
Condition of Test Sample Normal		
Test Result Pass		
Report Template	AGCRT-US-BR/RF	

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By	John Zerry	
,co .	John Zeng (Project Engineer)	Jul. 06, 2021
Reviewed By	Max Zhang	
NO.	Max Zhang (Reviewer)	Jul. 06, 2021
Approved By	Formesticis	
	Forrest Lei (Authorized Officer)	Jul. 06, 2021



Report No.: AGC03285210502FE03

Page 6 of 87

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Bluetooth Module". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	Operation Frequency 2.402GHz to 2.480GHz		
RF Output Power	9.643dBm(Max)		
Bluetooth Version	V5.1		
Modulation	BR⊠GFSK, EDR⊠π /4-DQPSK, ⊠8DPSK BLE⊠GFSK 1Mbps ⊠GFSK 2Mbps		
Number of channels	79 Channels		
Hardware Version	V1.2		
Software Version	V1.2.1		
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain 2dBi			
Power Supply DC 3.3V			

**Note:** All the same except for the Bluetooth chips model. (The EUT has two Bluetooth chips model. One is Bluetooth chips(QCC3024), and the one is Bluetooth chips(QCC3034). Only the test data of chips model (QCC3024) recorded in this report.)

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
F. 30	0	2402 MHz
-d 1	207 200	2403 MHz
- CO	d o P	3 20 2 2
1 20	38	2440 MHz
2402~2480MHz	39	2441 MHz
100	40	2442 MHz
	40° -0 J	NO. 100
7.G	77	2479 MHz
200	78	2480 MHz



#### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:


- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.





The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

#### 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AMWO-FSCBT1026** filing to comply with the FCC PART 15.247 requirements.

#### 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Report No.: AGC03285210502FE03

Page 9 of 87

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	U <sub>c</sub> = ±3.1 dB	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %	
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %	




# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note: 1. Only the result of the worst case was recorded in the report, if no other cases.

- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

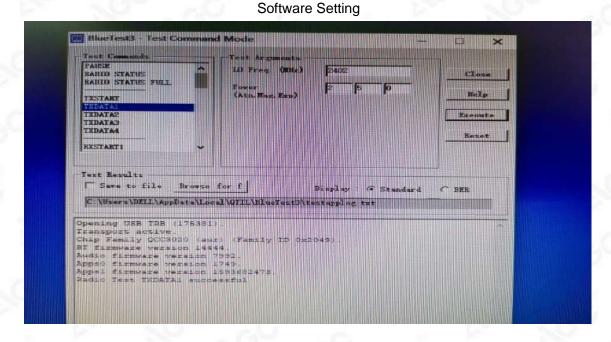




Report No.: AGC03285210502FE03

Page 11 of 87


# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:



#### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Module	FSC-BT1026	2AMWO-FSCBT1026 EUT	
2	Control Box	N/A	USB-TRBI200	AE
3	PC Adapter	ADC6501TM	N/A	AE
4	PC	16301-01	N/A	AE
5	Charger line	N/A	0.6m unshielded	AE

#### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrictions of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC03285210502FE03

Page 12 of 87

#### 6. TEST FACILITY


Test Site	Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location  1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number CN1259			
FCC Test Firm Registration Number 975832			
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	Rohde & Schwarz	ESPI	101206	May 11, 2021	May 10, 2022
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	FARA	EZ-EMC(Ver. AGC-CON03A1)	N/A	N/A	N/A

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	Rohde & Schwarz	ESCI	10096	Apr. 14, 2021	Apr. 13, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE(Ver.2.5)	N/A	N/A	N/A





#### 7. PEAK OUTPUT POWER

#### 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

# **PEAK POWER TEST SETUP**

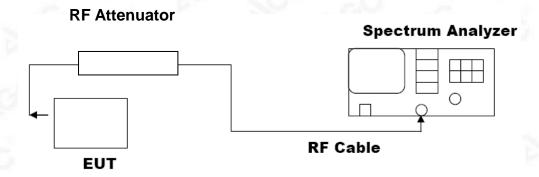



#### 7.3. LIMITS AND MEASUREMENT RESULT

	Test Da	ta of Conducted Output F	Power	
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
GFSK	2402	6.549	≤21	Pass
	2441	6.750	€21	Pass
	2480	7.226	≤21	Pass
	2402	7.744	≤21	Pass
π /4-DQPSK	2441	9.066	≤21	Pass
	2480	9.032	≤21	Pass
8DPSK	2402	9.643	≤21	Pass
	2441	9.624	≤21	Pass
	2480	9.449	≤21	Pass


# **Test Graphs of Conducted Output Power**



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.






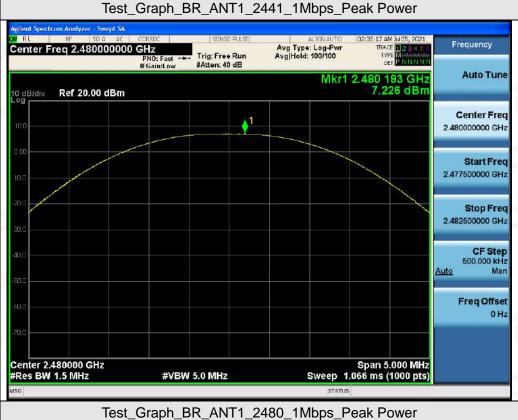





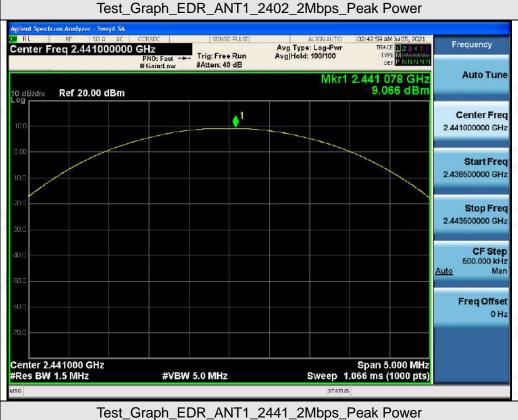



















#### 8. 20DB BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

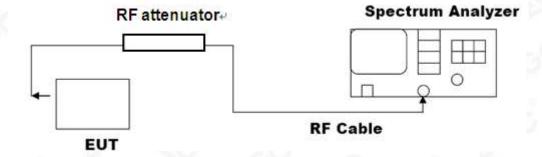





#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
-6	2402	0.862	0.958	N/A	Pass
GFSK	2441	0.862	0.958	N/A	Pass
	2480	0.859	0.957	N/A	Pass
	2402	1.203	1.337	N/A	Pass
π/4-DQPSK	2441	1.191	1.334	N/A	Pass
	2480	1.195	1.344	N/A	Pass
8DPSK	2402	1.184	1.306	N/A	Pass
	2441	1.185	1.309	N/A	Pass
	2480	1.185	1.310	N/A	Pass

# Test Graphs of Occupied Bandwidth and -20 Bandwidth

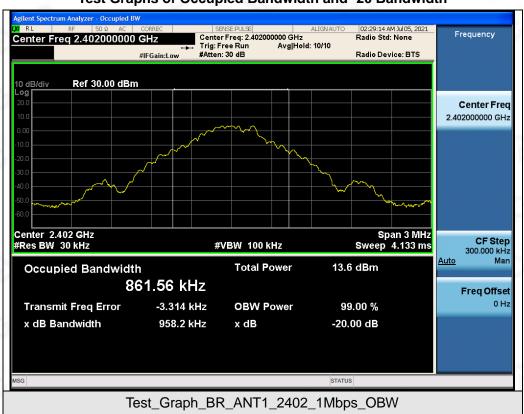




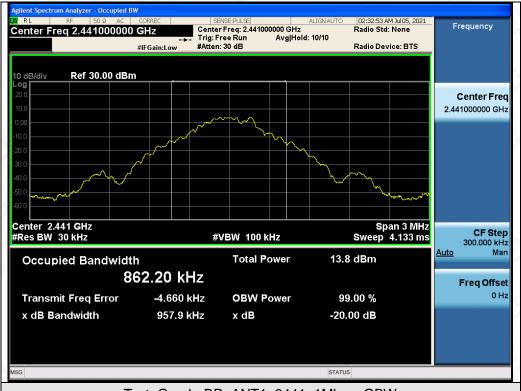





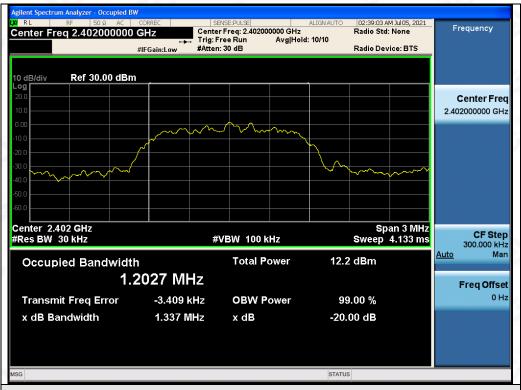













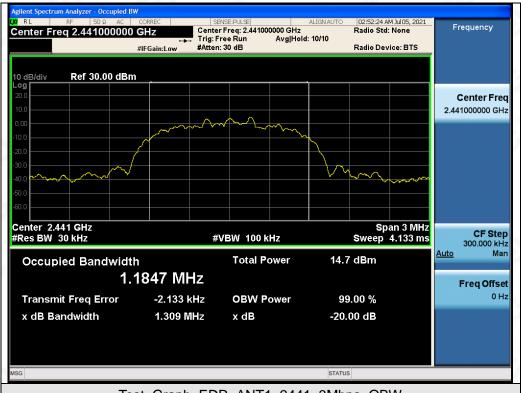

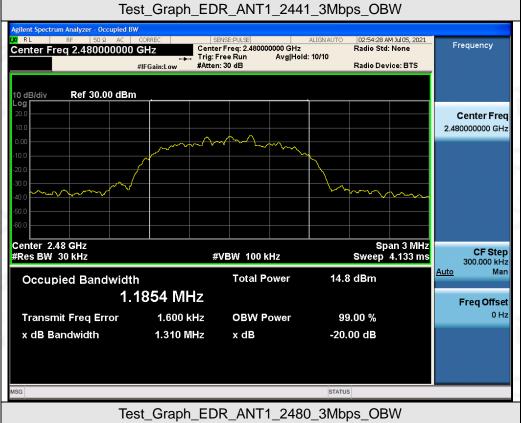



Report No.: AGC03285210502FE03

Page 25 of 87

# 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Augustian I.	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		



#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



#### Test\_Graph\_BR\_ANT1\_2402\_1Mbps\_Reference Level



Test\_Graph\_BR\_ANT1\_2402\_1Mbps\_Lower Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.










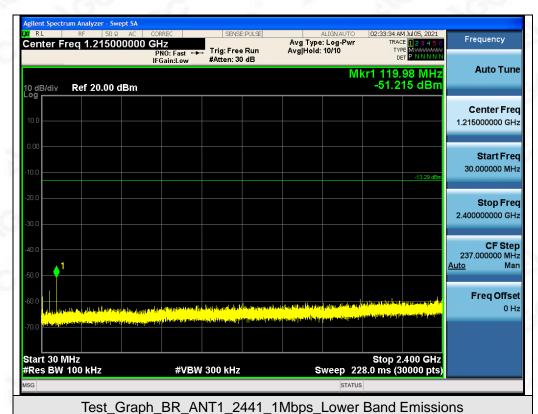







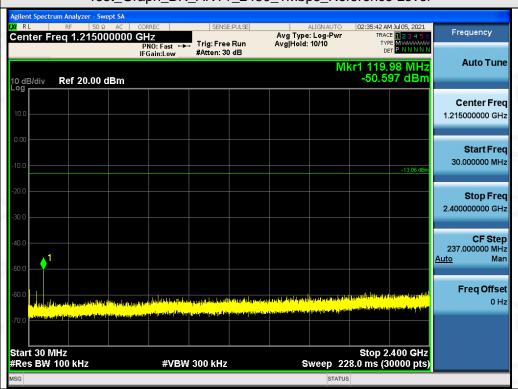

Test\_Graph\_BR\_ANT1\_2480\_1Mbps\_Lower Band Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.











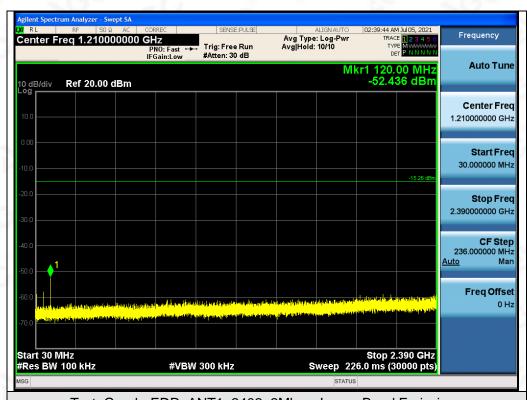

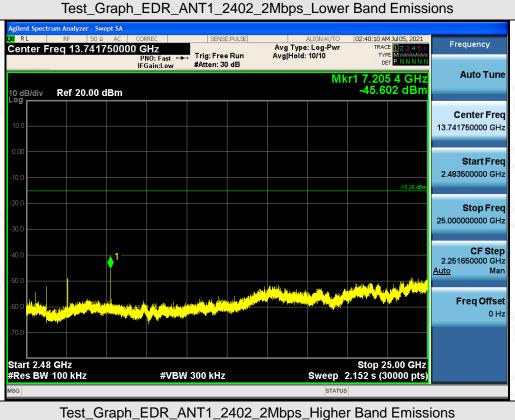





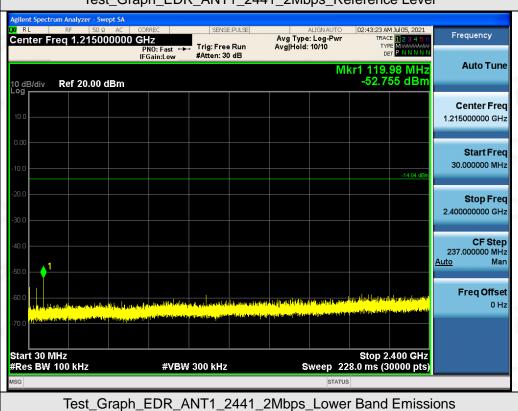











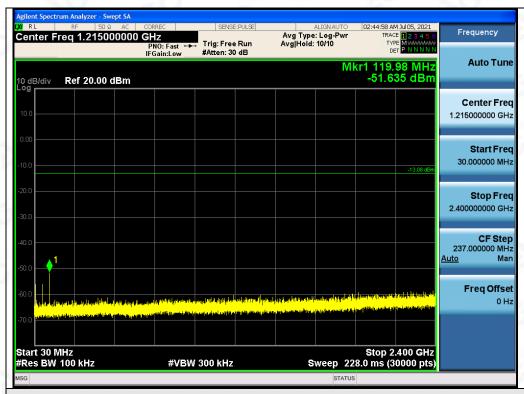







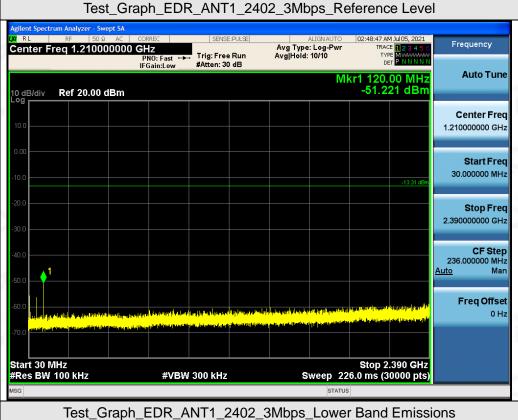











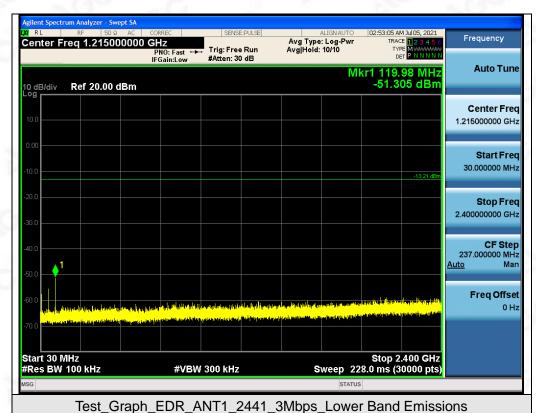








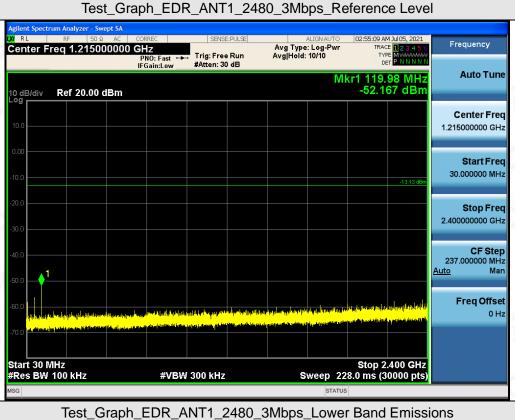




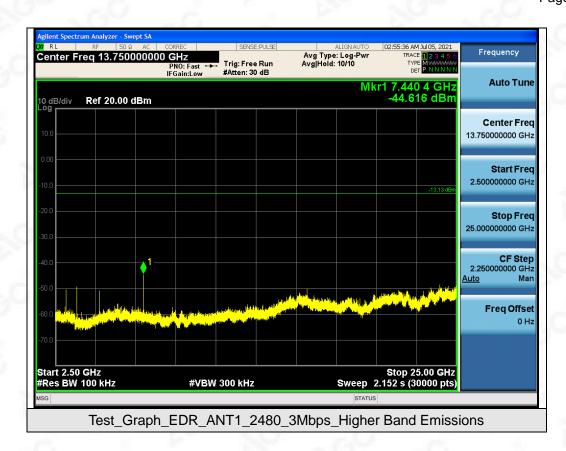




#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

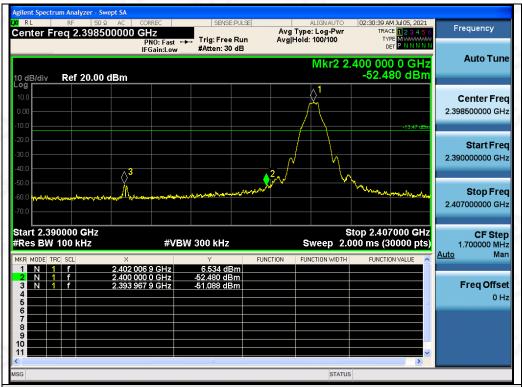



## Test\_Graph\_BR\_ANT1\_2402\_1Mbps\_Lower Band Edge Emissions

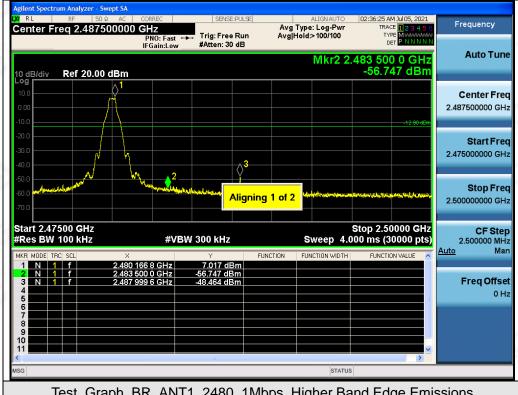


Test\_Graph\_BR\_ANT1\_2480\_1Mbps\_Higher Band Edge Emissions




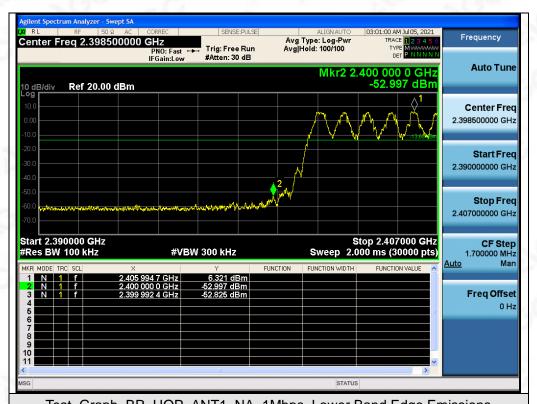

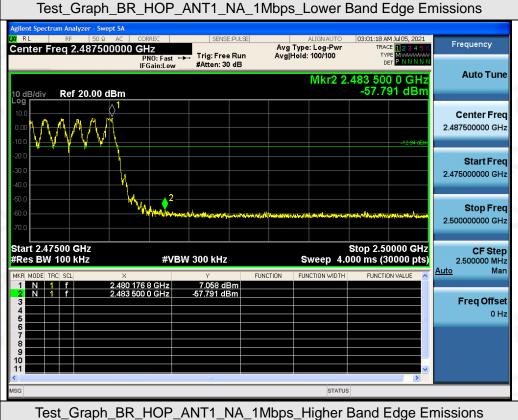




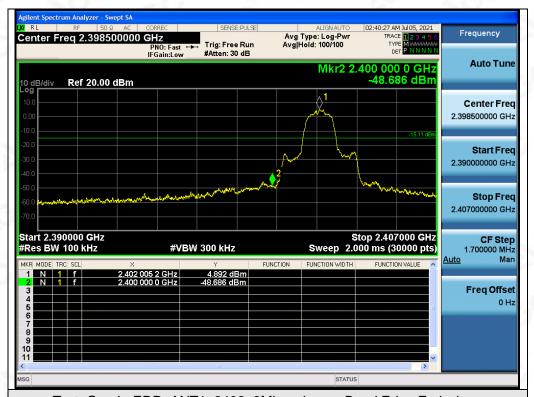

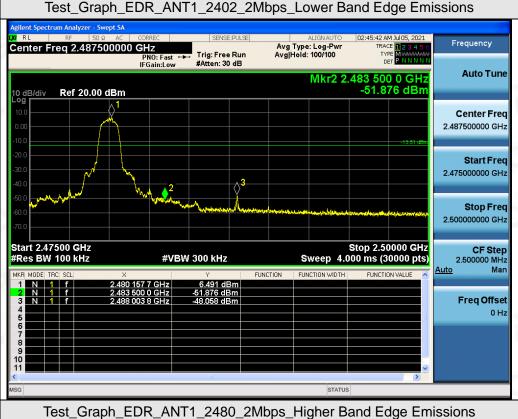



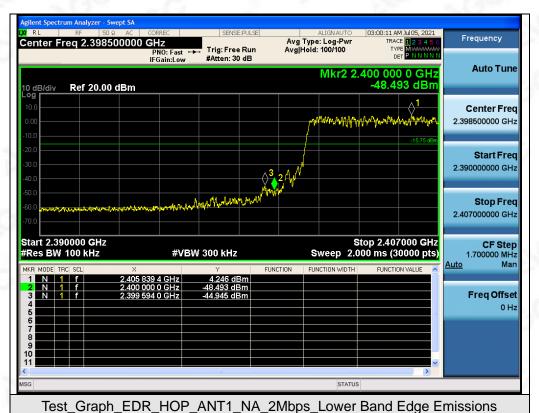


nt Spectrum Analyzer - Swept SA




Test\_Graph\_EDR\_HOP\_ANT1\_NA\_2Mbps\_Higher Band Edge Emissions


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



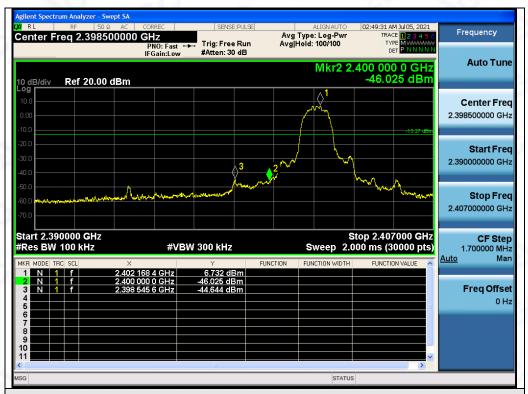

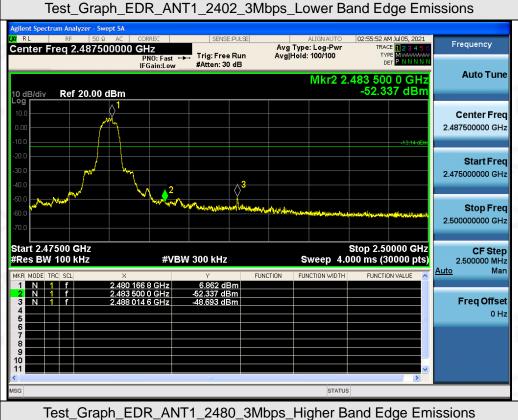



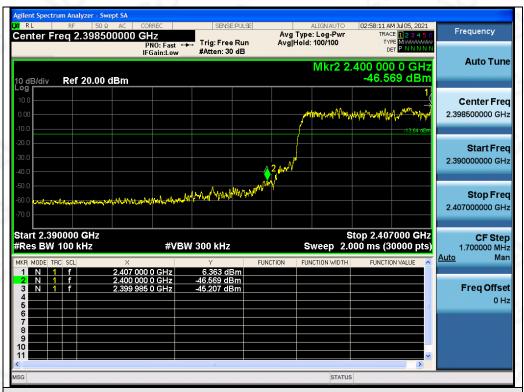

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_3Mbps\_Lower Band Edge Emissions



Test\_Graph\_EDR\_HOP\_ANT1\_NA\_3Mbps\_Higher Band Edge Emissions



Report No.: AGC03285210502FE03

Page 46 of 87

# 10. RADIATED EMISSION

#### 10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC03285210502FE03

Page 47 of 87

# The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




# 10.2. TEST SETUP


# Radiated Emission Test-Setup Frequency Below 30MHz

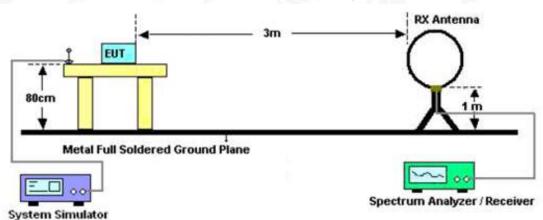

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

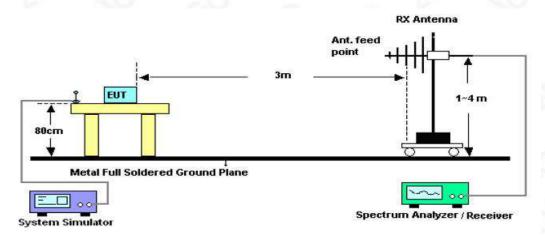

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

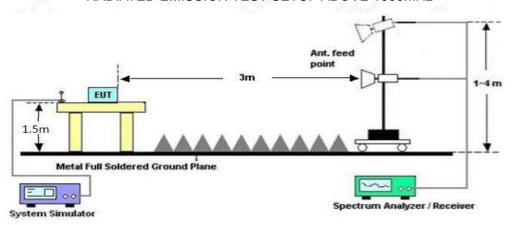



Report No.: AGC03285210502FE03

Page 49 of 87

#### 10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

# 10.4. TEST RESULT


#### Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



## Radiated emission from 30MHz to 1000MHz

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

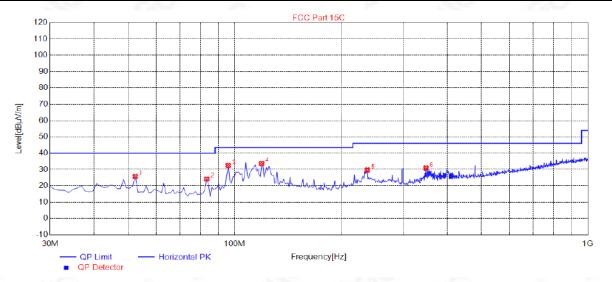


NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polatity
1	52.3100	25.77	11.49	40.00	14.23	100	0	Horizontal
2	83.3500	24.20	7.18	40.00	15.80	100	32	Horizontal
3	95.9600	32.49	9.71	43.50	11.01	100	45	Horizontal
4	119.2400	33.71	13.39	43.50	9.79	100	219	Horizontal
5	237.5800	29.68	14.65	46.00	16.32	100	101	Horizontal
6	348.1600	30.89	17.78	46.00	15.11	100	68	Horizontal

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

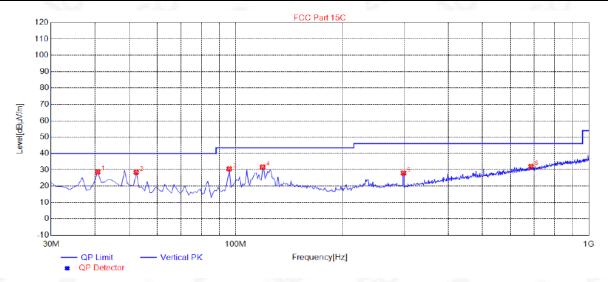


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6700	28.66	11.91	40.00	11.34	100	210	Vertical
2	52.3100	28.52	11.49	40.00	11.48	100	7	Vertical
3	95.9600	30.56	9.71	43.50	12.94	100	141	Vertical
4	119.2400	31.69	13.39	43.50	11.81	100	249	Vertical
5	298.6900	28.04	15.92	46.00	17.96	100	56	Vertical
6	685.7200	32.05	25.74	46.00	13.95	100	246	Vertical

# **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 7 is the worst case and recorded in the report.





Radiated emission above 1GHz

EUT	Bluetooth Module	Model Name FSC-BT1026	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	47.68	0.08	47.58	74	-26.42	peak
4804.000	37.59	0.08	37.54	54	-16.46	AVG
7206.000	43.15	2.21	42.81	74	-31.19	peak
7206.000	33.47	2.21	35.49	54	-18.51	AVG
	-0			307	~O	
emark:	NY = C				34	600
actor = Anter	nna Factor + Cable	e Loss - Pre	-amplifier.			

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	48.15	0.08	48.23	74	-25.77	peak
4804.000	37.32	0.08	37.4	54	-16.6	AVG
7206.000	44.94	2.21	47.15	74	-26.85	peak
7206.000	34.27	2.21	36.48	54	-17.52	AVG
			0	100		
emark:			Nº - 1			
ctor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the report apply only to the test report should be addressed to AGC by agc@agc-cert.com. /Inspection The test results of the test report.



Report No.: AGC03285210502FE03

Page 53 of 87

The test results

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	47.99	0.14	48.13	74	-25.87	peak
4882.000	38.42	0.14	38.56	54	-15.44	AVG
7323.000	45.71	2.36	48.07	74	-25.93	peak
7323.000	35.72	2.36	38.08	54	-15.92	AVG
emark:	-0.1	- 3	100	-66		

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	<ul> <li>Value Type</li> </ul>
4882.000	48.44	0.14	48.58	74	-25.42	peak
4882.000	38.62	0.14	38.76	54	-15.24	AVG
7323.000	45.73	2.36	48.09	74	-25.91	peak
7323.000	35.09	2.36	37.45	54	-16.55	AVG
		VO-			7/2	

Factor = Antenna Factor + Cable Loss - Pre-amplifier



Report No.: AGC03285210502FE03

Page 54 of 87

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
48.73	0.22	48.95	74	-25.05	peak
38.17	0.22	38.39	54	-15.61	AVG
45.53	2.64	48.17	74	-25.83	peak
35.17	2.64	37.81	54	-16.19	AVG
			- C) Y		
	(dBµV) 48.73 38.17 45.53	(dBµV) (dB) 48.73 0.22 38.17 0.22 45.53 2.64	(dBμV)     (dB)     (dBμV/m)       48.73     0.22     48.95       38.17     0.22     38.39       45.53     2.64     48.17	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)       48.73     0.22     48.95     74       38.17     0.22     38.39     54       45.53     2.64     48.17     74	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)     (dBμV/m)       48.73     0.22     48.95     74     -25.05       38.17     0.22     38.39     54     -15.61       45.53     2.64     48.17     74     -25.83

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	49.72	0.22	49.94	74	-24.06	peak
4960.000	39.47	0.22	39.69	54	-14.31	AVG
7440.000	46.13	2.64	48.77	74	-25.23	peak
7440.000	36.78	2.64	39.42	54	-14.58	AVG
		10°	100			-6
emark:		100	C 11"			- 100
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

## **RESULT: PASS**

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The 8DPSK modulation is the worst case and recorded in the report.

/Inspection The test results




# Test result for band edge emission at restricted bands

EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

#### Test Graph for Peak Measurement



Test Graph for Average Measurement

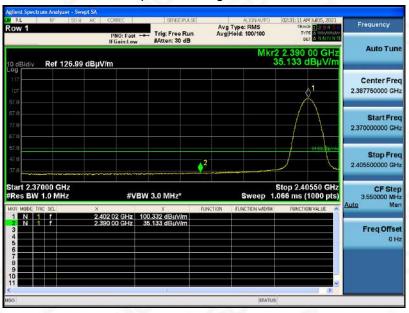

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Festional Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. ce of the test report. presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

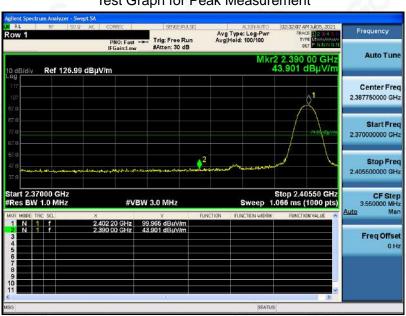

Test Graph for Average Measurement




**RESULT: PASS** 




EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Test Graph for Peak Measurement

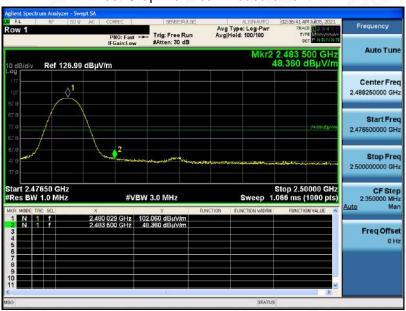

Test Graph for Average Measurement

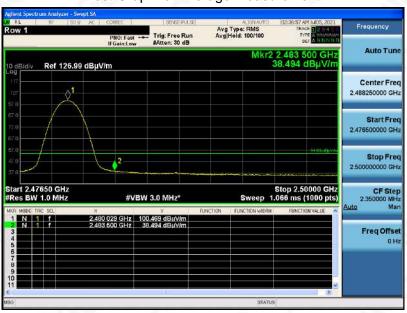


**RESULT: PASS** 



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Test Graph for Peak Measurement

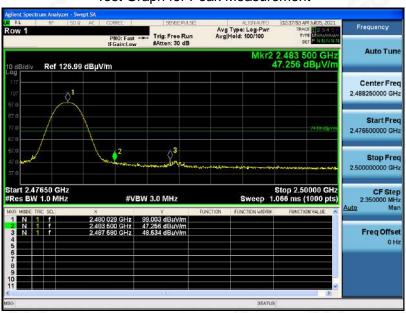

Test Graph for Average Measurement





EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 




EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

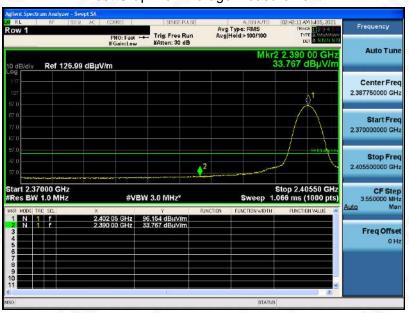


**RESULT: PASS** 




EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Test Graph for Peak Measurement

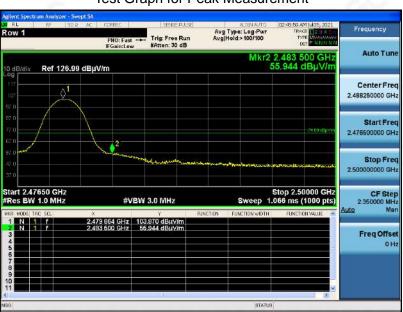

Test Graph for Average Measurement

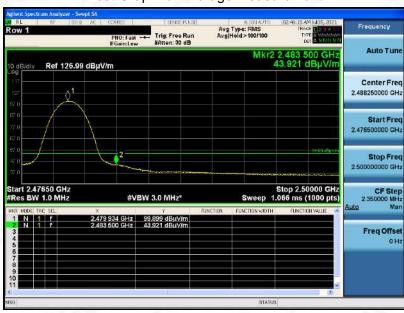

**RESULT: PASS** 



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 




EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

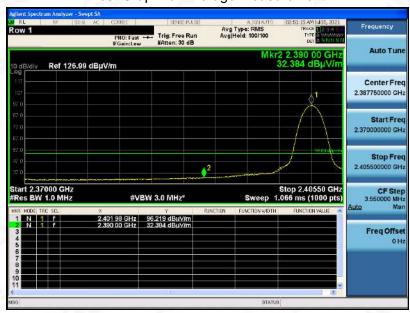

**RESULT: PASS** 



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



EUT	Bluetooth Module	Model Name	FSC-BT1026
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



# 11. NUMBER OF HOPPING FREQUENCY

#### 11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3. VBW RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
- 4. Allow the trace to stabilize.

## 11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

#### 11.4. LIMITS AND MEASUREMENT RESULT

Test Data of Number of Hopping Frequency						
Test Mode Number of Hopping Frequency Limits Pass or Fail						
GFSK Hopping 79 >=15 Pass						

## **Test Graphs of Number of Hopping Frequency**



Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC03285210502FE03

Page 68 of 87

# 12. TIME OF OCCUPANCY (DWELL TIME)

#### 12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Zero span, centered on a hopping channel.
- 2. RBW shall be ≤channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4. Detector function: Peak. Trace: Max hold.
- 5. Use the marker-delta function to determine the transmit time per hop.
- 6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer)  $\times$  (period specified in the requirements / analyzer sweep time).

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

## 12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

#### 12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


# 12.4. LIMITS AND MEASUREMENT RESULT

Test Data of Dwell Time					
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)	Pass or Fail
2402	2.881	27.0*4	311.148	400	Pass
2441	2.881	26.0*4	299.624	400	Pass
2480	2.881	26.0*4	299.624	400	Pass


Note: The 8DPSK modulation is the worst case and recorded in the report.



# **Test Graphs of Dwell Time**

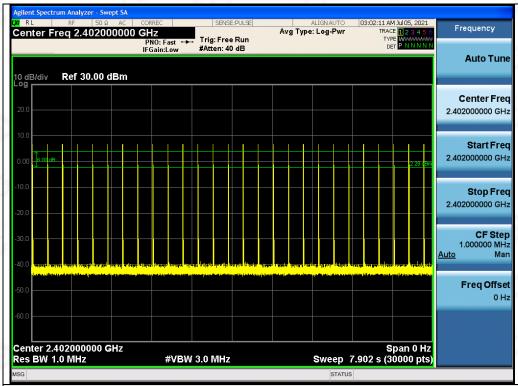

# Test\_Graph\_BR\_HOP\_ANT1\_NA\_1Mbps\_2402\_Number of Burst

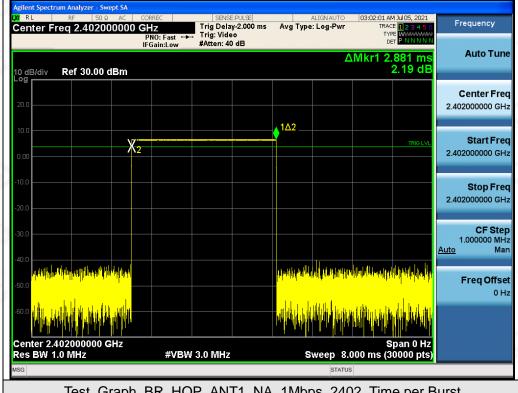



Test\_Graph\_BR\_HOP\_ANT1\_NA\_1Mbps\_2402\_Time per Burst

Dedicated Pes Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the g/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/




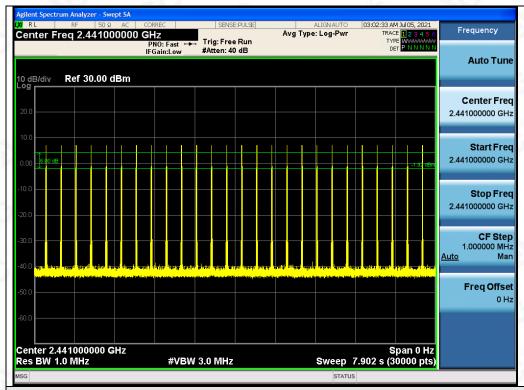

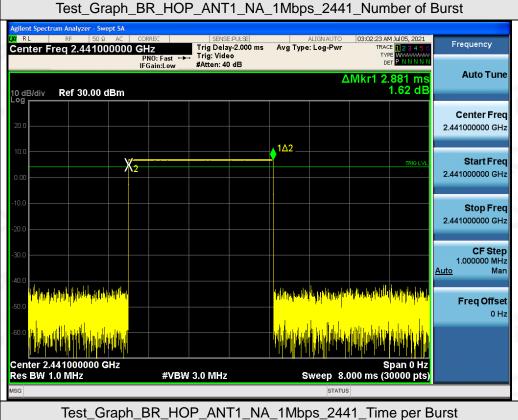



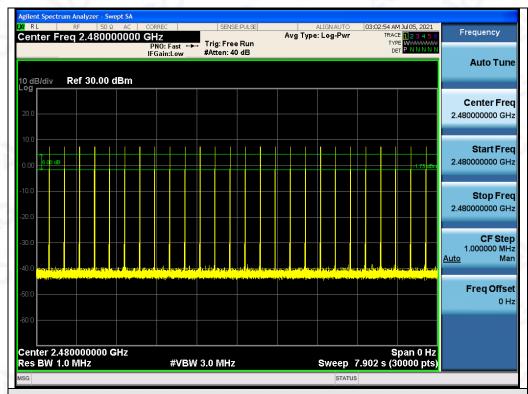

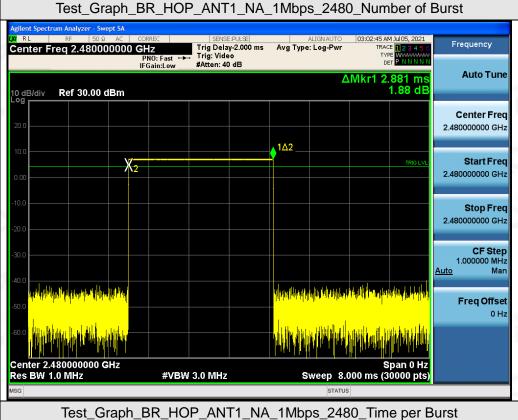



## 13. FREQUENCY SEPARATION

#### 13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Wide enough to capture the peaks of two adjacent channels.
- 2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3. Video (or average) bandwidth (VBW) ≥ RBW.
- 4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

# 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2


#### 13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

#### 13.4. LIMITS AND MEASUREMENT RESULT

Test Data of Frequency Separation						
Test Mode Channel Separation (MHz) Limits Pass or Fail						
GFSK Hopping 1.005 >= 2/3 -20dB BW Pass						

## **Test Graphs of Number of Hopping Frequency**

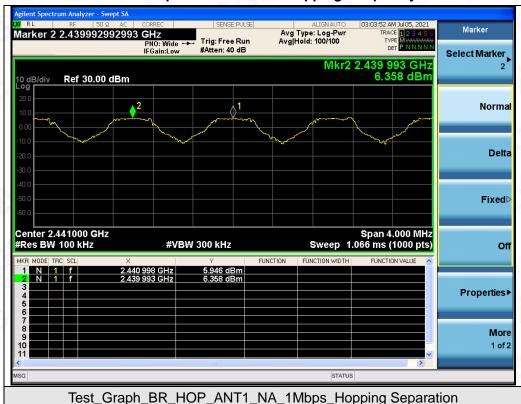

Note: The GFSK modulation is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC03285210502FE03

Page 73 of 87

## 14. LINE CONDUCTED EMISSION TEST


#### 14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage					
Frequency	Q.P. (dBμV)	Average (dBμV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## 14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

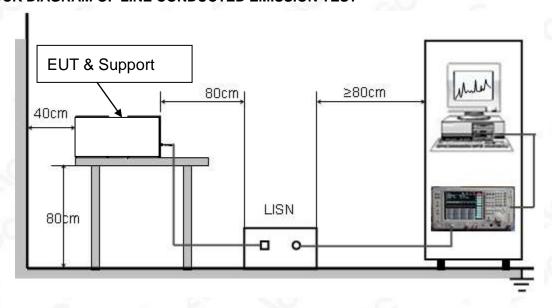

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Declinated Pastro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report report and in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC03285210502FE03 Page 74 of 87

#### 14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### 14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

#### Line Conducted Emission Test Line 1-L

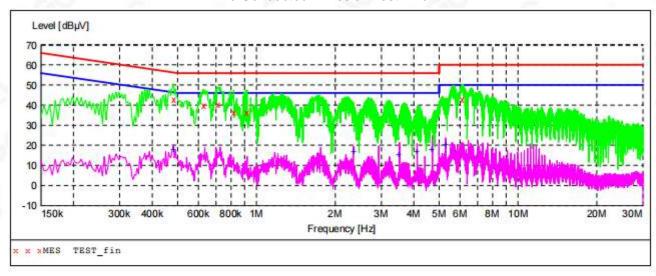

#### MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.482000	43.20	11.1	56	13.1	QP	LI	FLO
0.626000	39.80	10.6	56	16.2	QP	Ll	FLO
0.710000	40.20	10.4	56	15.8	QP	L1	FLO
0.818000	36.50	10.8	56	19.5	QP	LI	FLO
0.922000	36.60	11.2	56	19.4	QP	Ll	FLO
6.130000	43.00	11.7	60	17.0	QP	Ll	FLO

# MEASUREMENT RESULT: "TEST\_fin2"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.482000	18.00	11.1	46	28.3	AV	L1	FLO
2.350000	16.90	11.5	46	29.1	AV	LI	FLO
3.522000	15.50	11.6	46	30.5	AV	Ll	FLO
4.110000	17.20	11.6	46	28.8	AV	L1	FLO
4.698000	17.70	11.6	46	28.3	AV	LI	FLO
5.286000	20.30	11.7	50	29.7	AV	L1	FLO

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Line Conducted Emission Test Line 2-N

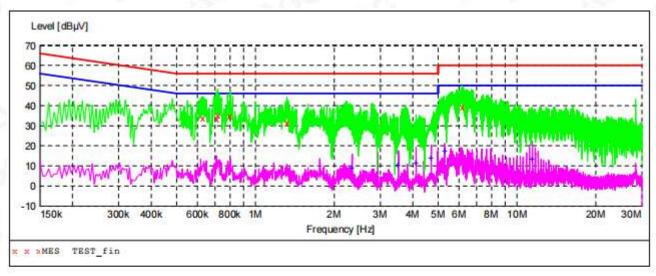

#### MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.626000	33.80	10.6	56	22.2	QP	N	FLO
0.710000	33.50	10.4	56	22.5	QP	N	FLO
0.718000	35.40	10.4	56	20.6	QP	N	FLO
0.802000	34.90	10.8	56	21.1	OP	N	FLO
1.318000	31.70	11.5	56	24.3	QP	N	FLO
6.174000	39.60	11.7	60	20.4	QP	N	FLO

#### MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.346000	8.80	11.5	46	37.2	AV	N	FLO
3.522000	10.60	11.6	46	35.4	AV	N	FLO
4.110000	11.40	11.6	46	32.6	AV	N	FLO
4.694000	13.90	11.6	46	32.1	AV	N	FLO
5.282000	17.60	11.7	50	32.4	AV	N	FLO
11.454000	13.70	12.0	50	36.3	AV	N	FLO

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHz



RADIATED EMISSION TEST SETUP ABOVE 1GHz




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## CONDUCTED EMISSION TEST SETUP



#### CONDUCTED TEST SETUP

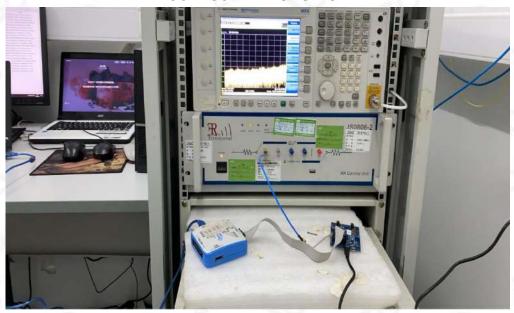


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




# **APPENDIX B: PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT(Bluetooth chips QCC3024)

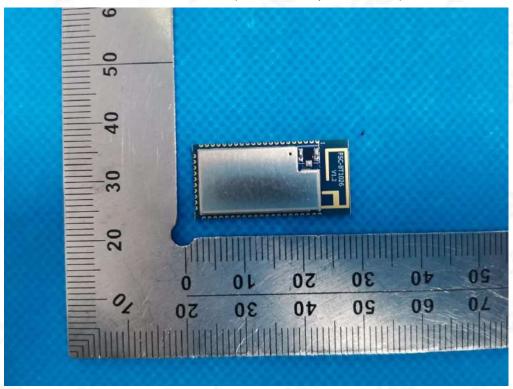


**BOTTOM VIEW OF EUT** 

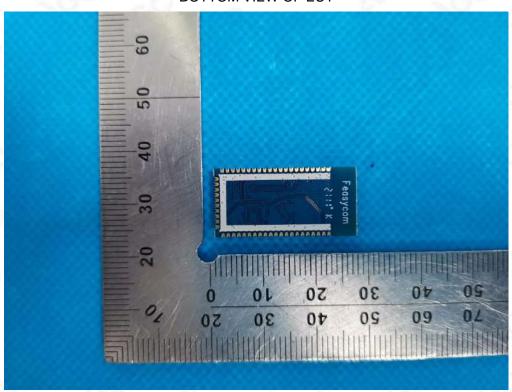


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrictions of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purport is not permitted without the writter purport is results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# FRONT VIEW OF EUT

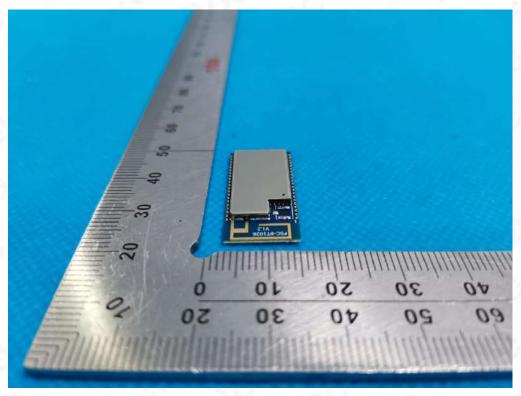


**BACK VIEW OF EUT** 

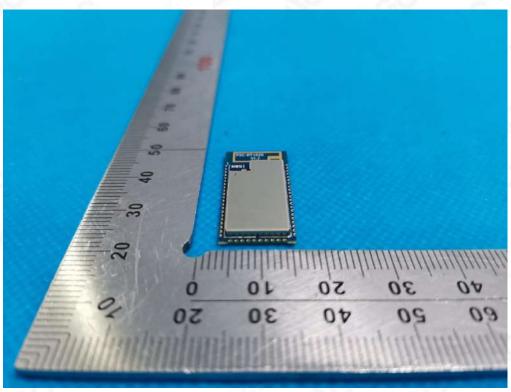


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **LEFT VIEW OF EUT**

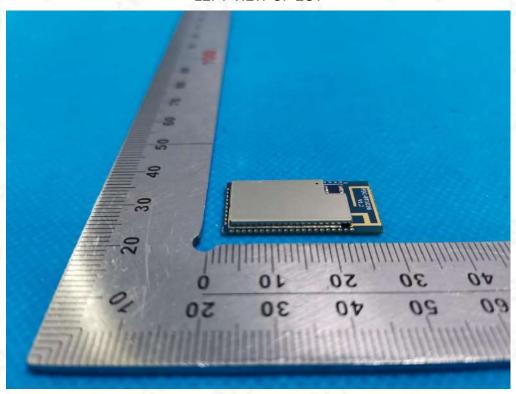


RIGHT VIEW OF EUT

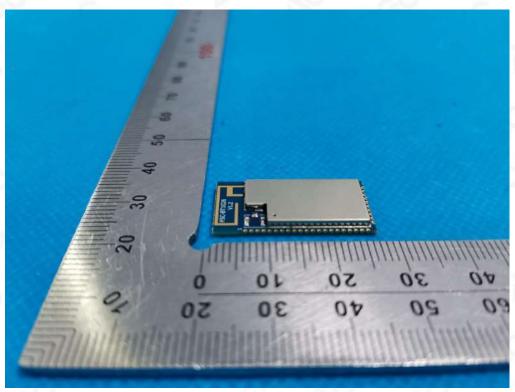


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **OPEN VIEW OF EUT**

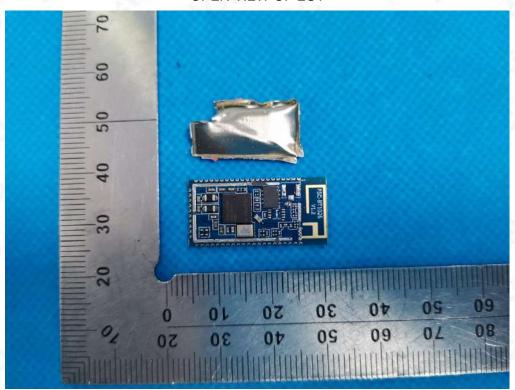

**INTERNAL VIEW OF EUT-1** 

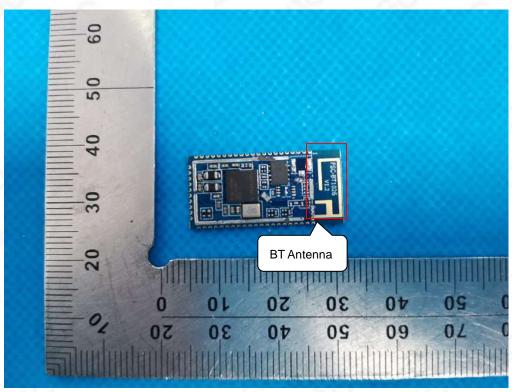


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrictions of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purport is not permitted without the writter purport is results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **INTERNAL VIEW OF EUT-2**




TOP VIEW OF EUT(Bluetooth chips QCC3034)

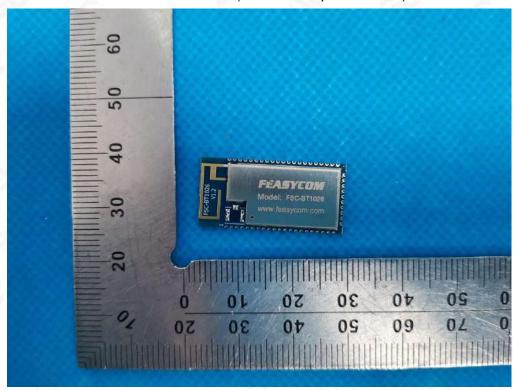


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **BOTTOM VIEW OF EUT**

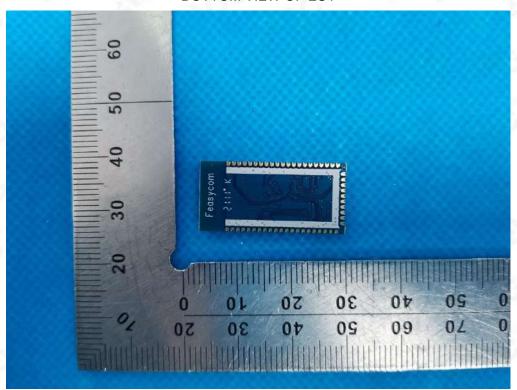


FRONT VIEW OF EUT

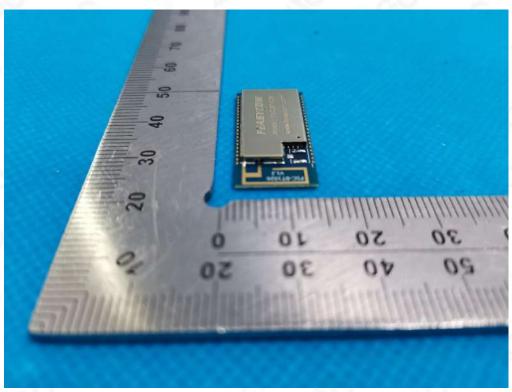


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **BACK VIEW OF EUT**

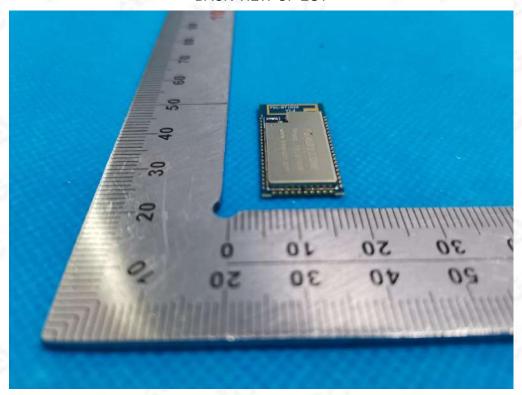


LEFT VIEW OF EUT

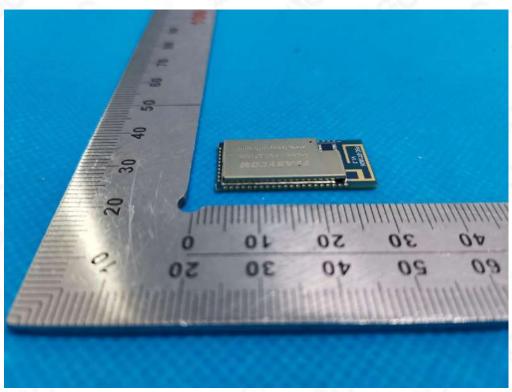


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## RIGHT VIEW OF EUT

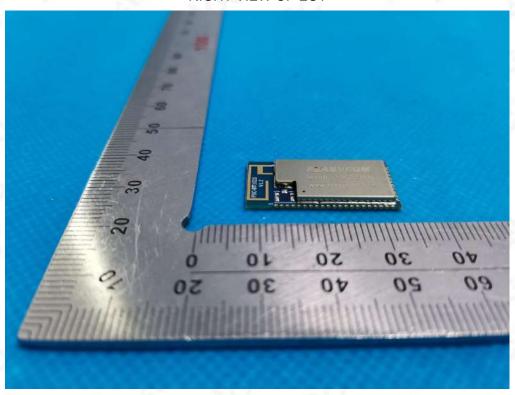


**OPEN VIEW OF EUT** 

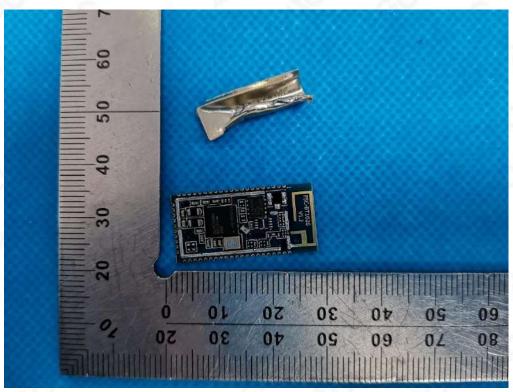


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



## **INTERNAL VIEW OF EUT-1**

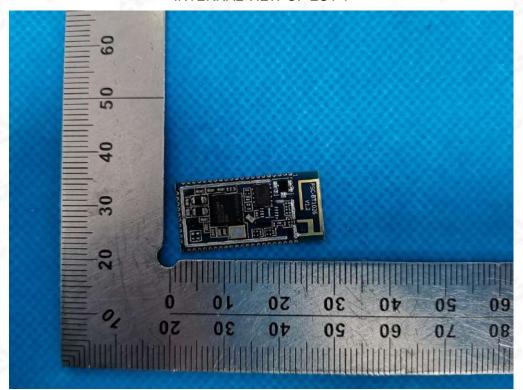

**INTERNAL VIEW OF EUT-2** 

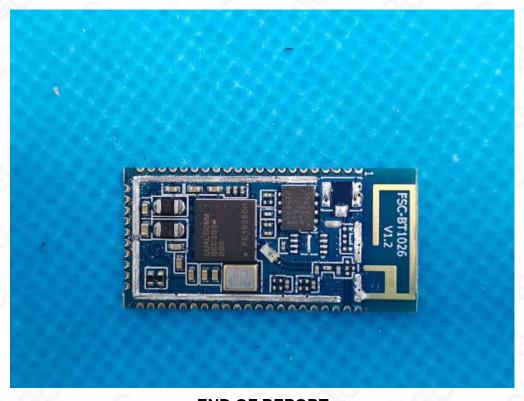

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrictions of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purport is not permitted without the writter purport is results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

The test results

he test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festi Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.