



FCC Part 15C Measurement and Test Report

For

Shenzhen Aukey Smart Information Technology Co.,Ltd.

Building P03, South China City Electronics Trading Center, Longgang

District, Shenzhen, Guangdong, 518111, China

FCC ID: 2AU5S-AIW20

FCC Rule(s): FCC Part 15.247

Product Description: wearbuds

Tested Model: AI-W20

Report No.: WTX19X10071409W

Sample Receipt Date: 2019-10-17

Tested Date: 2019-10-17 to 2020-01-10

Issued Date: 2020-01-13

Tested By: Mike Shi / Engineer

Mike Shi

Reviewed By: Lion Cai / RF Manager

Lion Cai

Approved & Authorized By: Silin Chen / Manager

Silin Chen

Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.



TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
1.2 TEST STANDARDS.....5
1.3 TEST METHODOLOGY5
1.4 TEST FACILITY5
1.5 EUT SETUP AND TEST MODE.....6
1.6 MEASUREMENT UNCERTAINTY6
1.7 TEST EQUIPMENT LIST AND DETAILS7

2. SUMMARY OF TEST RESULTS9

3. RF EXPOSURE10
3.1 STANDARD APPLICABLE.....10
3.2 TEST RESULT.....10

4. ANTENNA REQUIREMENT11
4.1 STANDARD APPLICABLE.....11
4.2 EVALUATION INFORMATION11

5. POWER SPECTRAL DENSITY12
5.1 STANDARD APPLICABLE.....12
5.2 TEST PROCEDURE.....12
5.3 SUMMARY OF TEST RESULTS/PLOTS12

6. DTS BANDWIDTH.....14
6.1 STANDARD APPLICABLE.....14
6.2 TEST PROCEDURE.....14
6.3 SUMMARY OF TEST RESULTS/PLOTS14

7. RF OUTPUT POWER16
7.1 STANDARD APPLICABLE.....16
7.2 TEST PROCEDURE.....16
7.3 SUMMARY OF TEST RESULTS/PLOTS16

8. FIELD STRENGTH OF SPURIOUS EMISSIONS18
8.1 STANDARD APPLICABLE.....18
8.2 TEST PROCEDURE.....18
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....19
8.4 SUMMARY OF TEST RESULTS/PLOTS19

9. OUT OF BAND EMISSIONS.....27
9.1 STANDARD APPLICABLE.....27
9.2 TEST PROCEDURE.....27
9.3 SUMMARY OF TEST RESULTS/PLOTS28

10. CONDUCTED EMISSIONS34
10.1 TEST PROCEDURE.....34
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....34
10.3 TEST RECEIVER SETUP34
10.4 SUMMARY OF TEST RESULTS/PLOTS34



Report version

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00 | 2020-01-13 | Original |
| / | / | / |



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Aukey Smart Information Technology Co.,Ltd.
 Address of applicant: Building P03, South China City Electronics Trading Center,
 Longgang District, Shenzhen, Guangdong, 518111, China

Manufacturer: Jiangxi Lianchuang Hongsheng Electronic Co.,Ltd
 Address of manufacturer: 5 / F, building 4, jinrongda Industrial Park, Xuegang North
 Road, Bantian street, Longgang District, Shenzhen

| General Description of EUT | |
|--|-----------------|
| Product Name: | wearbuds |
| Brand Name: | Aipower |
| Model No.: | AI-W20 |
| Adding Model(s): | / |
| Rated Voltage: | Battery: DC3.7V |
| Battery Capacity | 80mAh*2 |
| Power Adapter: | / |
| Software Version: | / |
| Hardware Version: | / |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> | |

| Technical Characteristics of EUT | |
|----------------------------------|---------------------|
| Bluetooth Version: | V4.2 (BLE mode) |
| Frequency Range: | 2402-2480MHz |
| RF Output Power: | 0.14dBm (Conducted) |
| Data Rate: | 1Mbps |
| Modulation: | GFSK |
| Quantity of Channels: | 40 |
| Channel Separation: | 2MHz |
| Type of Antenna: | Integral Antenna |
| Antenna Gain: | -2.6dBi |

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List | | |
|----------------|-------------|---------|
| Test Mode | Description | Remark |
| TM1 | Low | 2402MHz |
| TM2 | Middle | 2440MHz |
| TM3 | High | 2480MHz |

| Test Conditions | |
|--------------------|-----------|
| Temperature: | 22~25 °C |
| Relative Humidity: | 50~55 %. |
| ATM Pressure: | 1019 mbar |

| EUT Cable List and Details | | | |
|----------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| Charging cable | 0.8 | Unshielded | Without Ferrite |

| Special Cable List and Details | | | |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| / | / | / | / |

| Auxiliary Equipment List and Details | | | |
|--------------------------------------|--------------|----------|---------------|
| Description | Manufacturer | Model | Serial Number |
| Adapter | / | HJ050100 | 1408 |

1.6 Measurement Uncertainty

| Measurement uncertainty | | |
|--------------------------------|------------|--------------------|
| Parameter | Conditions | Uncertainty |
| RF Output Power | Conducted | ±0.42dB |
| Occupied Bandwidth | Conducted | ±1.5% |
| Power Spectral Density | Conducted | ±1.8dB |
| Conducted Spurious Emission | Conducted | ±2.17dB |
| Conducted Emissions | Conducted | 9-150kHz ±3.74dB |
| | | 0.15-30MHz ±3.34dB |
| Transmitter Spurious Emissions | Radiated | 30-200MHz ±4.52dB |
| | | 0.2-1GHz ±5.56dB |
| | | 1-6GHz ±3.84dB |
| | | 6-18GHz ±3.92dB |



1.7 Test Equipment List and Details

| No. | Description | Manufacturer | Model | Serial No. | Cal Date | Due Date |
|-----------|-------------------|------------------------|-----------------------|-------------|------------|------------|
| SEMT-1072 | Spectrum Analyzer | Agilent | E4407B | MY41440400 | 2019-04-30 | 2020-04-29 |
| SEMT-1031 | Spectrum Analyzer | Rohde & Schwarz | FSP30 | 836079/035 | 2019-04-30 | 2020-04-29 |
| SEMT-1007 | EMI Test Receiver | Rohde & Schwarz | ESVB | 825471/005 | 2019-04-30 | 2020-04-29 |
| SEMT-1008 | Amplifier | Agilent | 8447F | 3113A06717 | 2019-04-30 | 2020-04-29 |
| SEMT-1043 | Amplifier | C&D | PAP-1G18 | 2002 | 2019-04-30 | 2020-04-29 |
| SEMT-1011 | Broadband Antenna | Schwarz beck | VULB9163 | 9163-333 | 2019-05-05 | 2021-05-04 |
| SEMT-1042 | Horn Antenna | ETS | 3117 | 00086197 | 2019-05-05 | 2021-05-04 |
| SEMT-1121 | Horn Antenna | Schwarzbeck | BBHA 9170 | BBHA9170582 | 2019-05-05 | 2021-05-04 |
| SEMT-1069 | Loop Antenna | Schwarz beck | FMZB 1516 | 9773 | 2019-05-05 | 2021-05-04 |
| SEMT-1001 | EMI Test Receiver | Rohde & Schwarz | ESPI | 101611 | 2019-04-30 | 2020-04-29 |
| SEMT-1003 | L.I.S.N | Schwarz beck | NSLK8126 | 8126-224 | 2019-04-30 | 2020-04-29 |
| SEMT-1002 | Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100911 | 2019-04-30 | 2020-04-29 |
| SEMT-1168 | Pre-amplifier | Direction Systems Inc. | PAP-0126 | 14141-12838 | 2019-04-30 | 2020-04-29 |
| SEMT-1169 | Pre-amplifier | Direction Systems Inc. | PAP-2640 | 14145-14153 | 2019-04-30 | 2020-04-29 |
| SEMT-1163 | Spectrum Analyzer | Rohde & Schwarz | FSP40 | 100612 | 2019-04-30 | 2020-04-29 |
| SEMT-1170 | DRG Horn Antenna | A.H. SYSTEMS | SAS-574 | 571 | 2019-05-05 | 2021-05-04 |
| SEMT-1166 | Power Limiter | Agilent | N9356B | MY45450376 | 2019-04-30 | 2020-04-29 |
| SEMT-1048 | RF Limiter | ATTEN | AT-BSF-2400~2500 | / | 2019-04-30 | 2020-04-29 |
| SEMT-1076 | RF Switcher | Top Precision | RCS03-A2 | / | 2019-04-30 | 2020-04-29 |
| SEMT-C001 | Cable | Zheng DI | LL142-07-07-10M(A) | / | 2019-03-18 | 2020-03-17 |
| SEMT-C002 | Cable | Zheng DI | ZT40-2.92J-2.92J-6M | / | 2019-03-18 | 2020-03-17 |
| SEMT-C003 | Cable | Zheng DI | ZT40-2.92J-2.92J-2.5M | / | 2019-03-18 | 2020-03-17 |
| SEMT-C004 | Cable | Zheng DI | 2M0RFC | / | 2019-03-18 | 2020-03-17 |
| SEMT-C005 | Cable | Zheng DI | 1M0RFC | / | 2019-03-18 | 2020-03-17 |
| SEMT-C006 | Cable | Zheng DI | 1M0RFC | / | 2019-03-18 | 2020-03-17 |



| Software List | | | |
|--|---------------------|--------------|----------------|
| Description | Manufacturer | Model | Version |
| EMI Test Software (Radiated Emission)* | Farad | EZ-EMC | RA-03A1 |
| EMI Test Software (Conducted Emission)* | Farad | EZ-EMC | RA-03A1 |

*Remark: indicates software version used in the compliance certification testing



2. SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test Item | Result |
|---------------------------|-----------------------------------|---------------|
| §2.1093 | RF Exposure | Compliant |
| §15.203; §15.247(b)(4)(i) | Antenna Requirement | Compliant |
| §15.205 | Restricted Band of Operation | Compliant |
| §15.207(a) | Conducted Emission | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |
| §15.247(a)(2) | DTS Bandwidth | Compliant |
| §15.247(b)(3) | RF Output Power | Compliant |
| §15.209(a) | Radiated Emission | Compliant |
| §15.247(d) | Band Edge (Out of Band Emissions) | Compliant |

N/A: not applicable



3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.



4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an Integral antenna, fulfill the requirement of this section.



5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Summary of Test Results/Plots

| Test Mode | Test Channel | Power Spectral Density dBm/3kHz | Limit dBm/3kHz |
|-----------|--------------|------------------------------------|-------------------|
| GFSK(BLE) | Low | -15.17 | 8 |
| | Middle | -14.81 | 8 |
| | High | -14.57 | 8 |

Please refer to the following test plots:



| | |
|---------------|--|
| <p>Low</p> | <p>Agilent 15:37:57 Oct 18, 19</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.401988000 GHz -15.17 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker: 2.401988000 GHz -15.17 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |
| <p>Middle</p> | <p>Agilent 15:42:44 Oct 18, 19</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.439971500 GHz -14.81 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker: 2.439971500 GHz -14.81 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.44 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |
| <p>High</p> | <p>Agilent 15:46:12 Oct 18, 19</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.479989500 GHz -14.57 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker: 2.479989500 GHz -14.57 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.48 GHz Span 1.5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 171.5 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |



6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

| Test Mode | Test Channel | 6 dB Bandwidth KHz | Limit kHz |
|-----------|--------------|-----------------------|--------------|
| GFSK(BLE) | Low | 729.234 | ≥ 500 |
| | Middle | 728.198 | ≥ 500 |
| | High | 738.860 | ≥ 500 |

Please refer to the following test plots:



| | |
|---------------|---|
| <p>Low</p> | <p>Agilent 15:38:21 Oct 18, 19 R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0746 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 11.017 kHz x dB Bandwidth 729.234 kHz</p> <p>Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p> |
| <p>Middle</p> | <p>Agilent 15:41:54 Oct 18, 19 R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0785 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 11.248 kHz x dB Bandwidth 728.198 kHz</p> <p>Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p> |
| <p>High</p> | <p>Agilent 15:46:38 Oct 18, 19 R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 1.0806 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 11.822 kHz x dB Bandwidth 738.860 kHz</p> <p>Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p> |



7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

7.3 Summary of Test Results/Plots

| Test Mode | Test Channel | Reading dBm | Output Power mW | Limit mW |
|-----------|--------------|----------------|--------------------|-------------|
| GFSK(BLE) | Low | -0.71 | 0.85 | 1000 |
| | Middle | -0.19 | 0.96 | 1000 |
| | High | 0.14 | 1.03 | 1000 |



| | |
|---------------|--|
| <p>Low</p> | <p>Agilent 15:37:37 Oct 18, 19 R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.402240 GHz -0.712 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker 2.402240000 GHz -0.712 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.402 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |
| <p>Middle</p> | <p>Agilent 15:42:20 Oct 18, 19 R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.440005 GHz -0.191 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker 2.440005000 GHz -0.191 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.44 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |
| <p>High</p> | <p>Agilent 15:45:52 Oct 18, 19 R T</p> <p>Ref 10 dBm Atten 20 dB Mkr1 2.480035 GHz 0.141 dBm</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Marker 2.480035000 GHz 0.141 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 2.48 GHz Span 5 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p> |

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

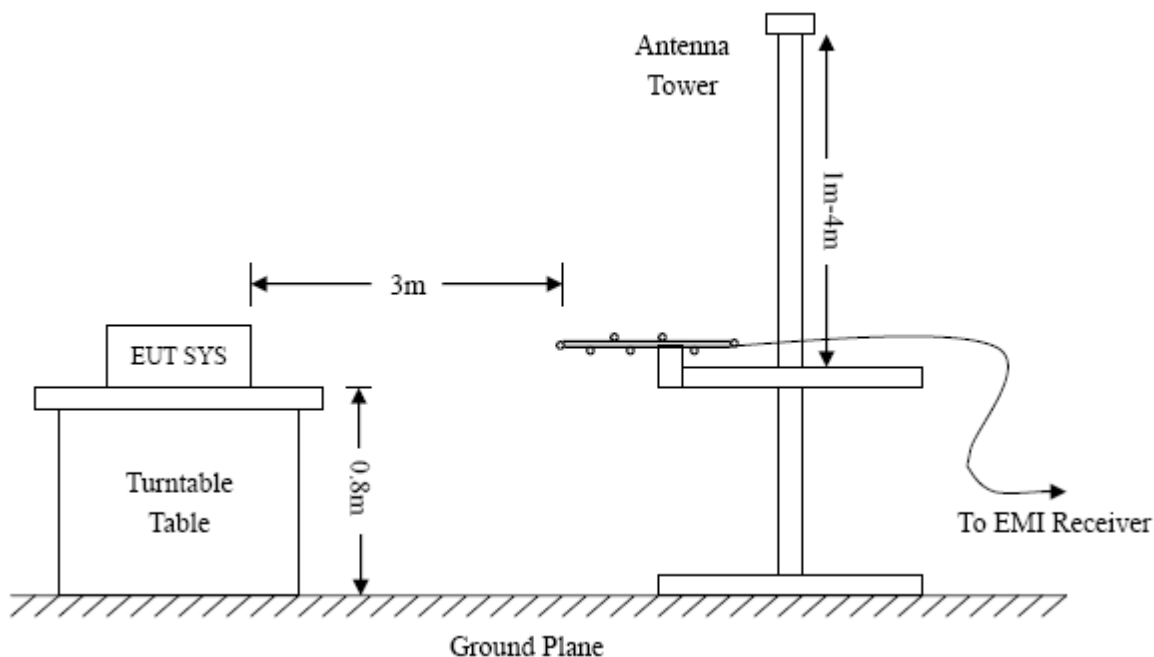

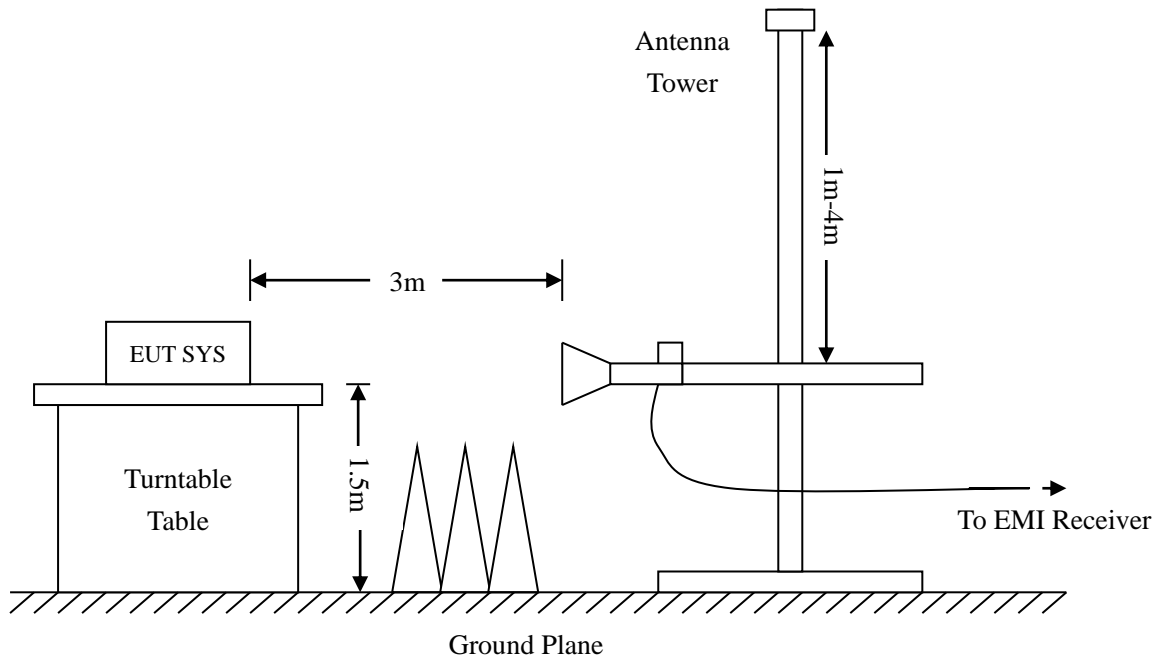

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.



➤ Spurious Emissions Below 1GHz


| | | | |
|--------------|-----|-----------|------------|
| Test Channel | Low | Polarity: | Horizontal |
|--------------|-----|-----------|------------|

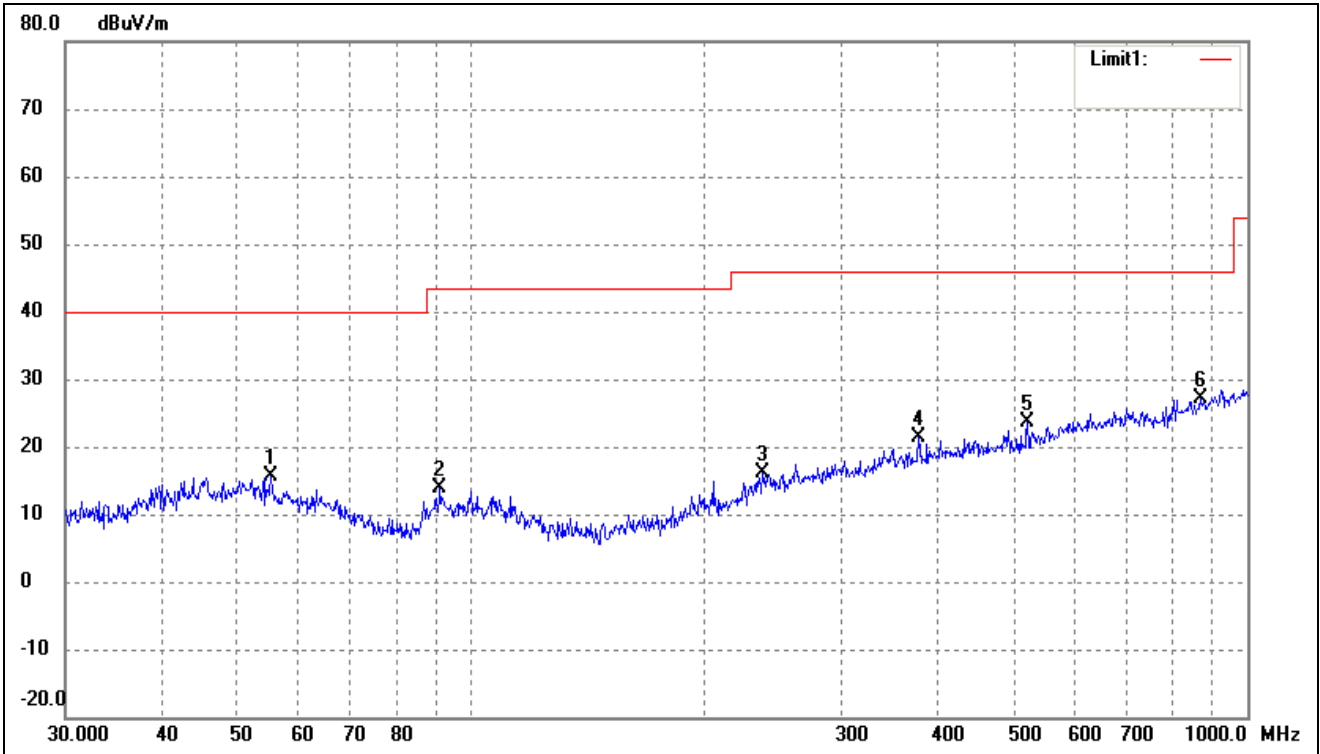

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 55.2207 | 27.75 | -12.18 | 15.57 | 40.00 | -24.43 | 99 | 100 | peak |
| 2 | 91.1746 | 27.42 | -13.63 | 13.79 | 43.50 | -29.71 | 168 | 100 | peak |
| 3 | 237.4760 | 26.44 | -10.35 | 16.09 | 46.00 | -29.91 | 110 | 100 | peak |
| 4 | 377.2591 | 28.38 | -7.04 | 21.34 | 46.00 | -24.66 | 135 | 100 | peak |
| 5 | 520.8882 | 28.83 | -5.29 | 23.54 | 46.00 | -22.46 | 281 | 100 | peak |
| 6 | 869.1302 | 26.86 | 0.38 | 27.24 | 46.00 | -18.76 | 207 | 100 | peak |




| | | | |
|--------------|-----|-----------|----------|
| Test Channel | Low | Polarity: | Vertical |
|--------------|-----|-----------|----------|

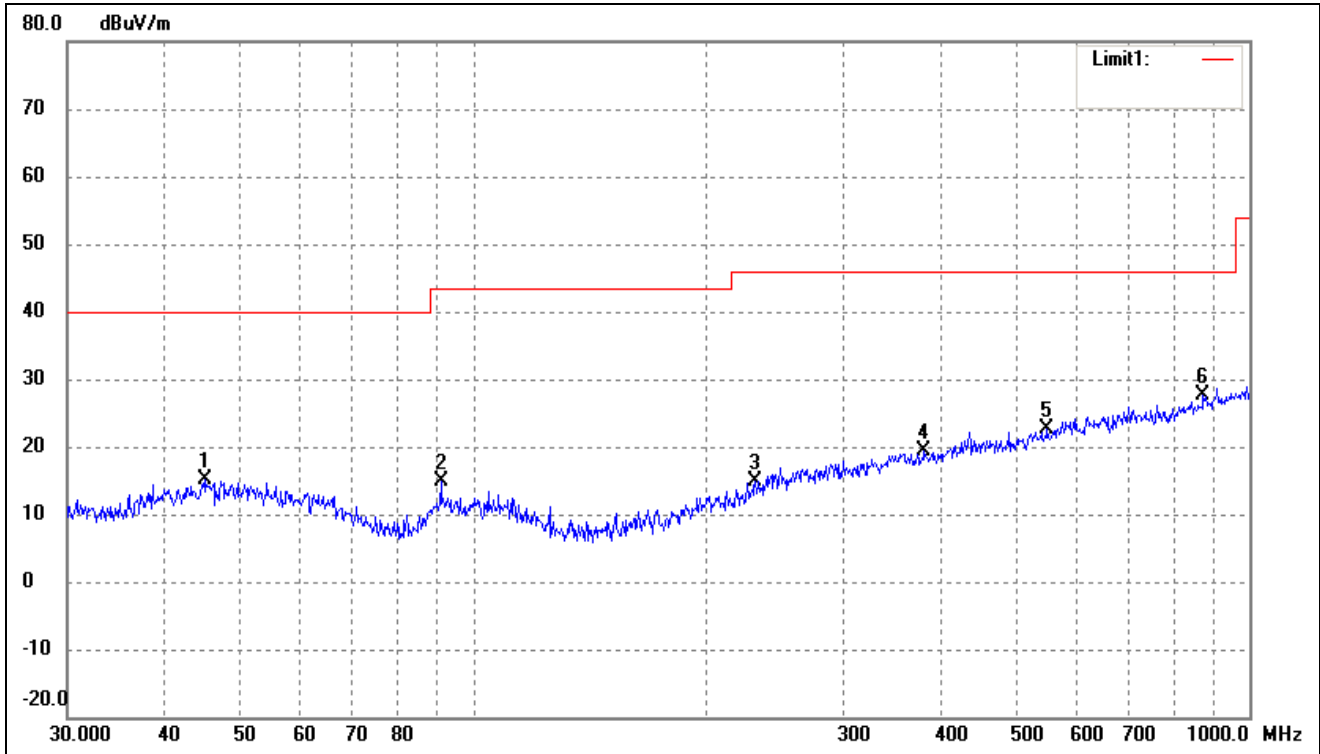

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 45.2166 | 27.09 | -11.92 | 15.17 | 40.00 | -24.83 | 113 | 100 | peak |
| 2 | 90.8554 | 28.45 | -13.57 | 14.88 | 43.50 | -28.62 | 261 | 100 | peak |
| 3 | 230.9068 | 25.99 | -11.00 | 14.99 | 46.00 | -31.01 | 81 | 100 | peak |
| 4 | 381.2487 | 26.38 | -6.93 | 19.45 | 46.00 | -26.55 | 154 | 100 | peak |
| 5 | 549.0195 | 27.40 | -4.83 | 22.57 | 46.00 | -23.43 | 89 | 100 | peak |
| 6 | 872.1832 | 27.22 | 0.44 | 27.66 | 46.00 | -18.34 | 155 | 100 | peak |




| | | | |
|--------------|--------|-----------|------------|
| Test Channel | Middle | Polarity: | Horizontal |
|--------------|--------|-----------|------------|

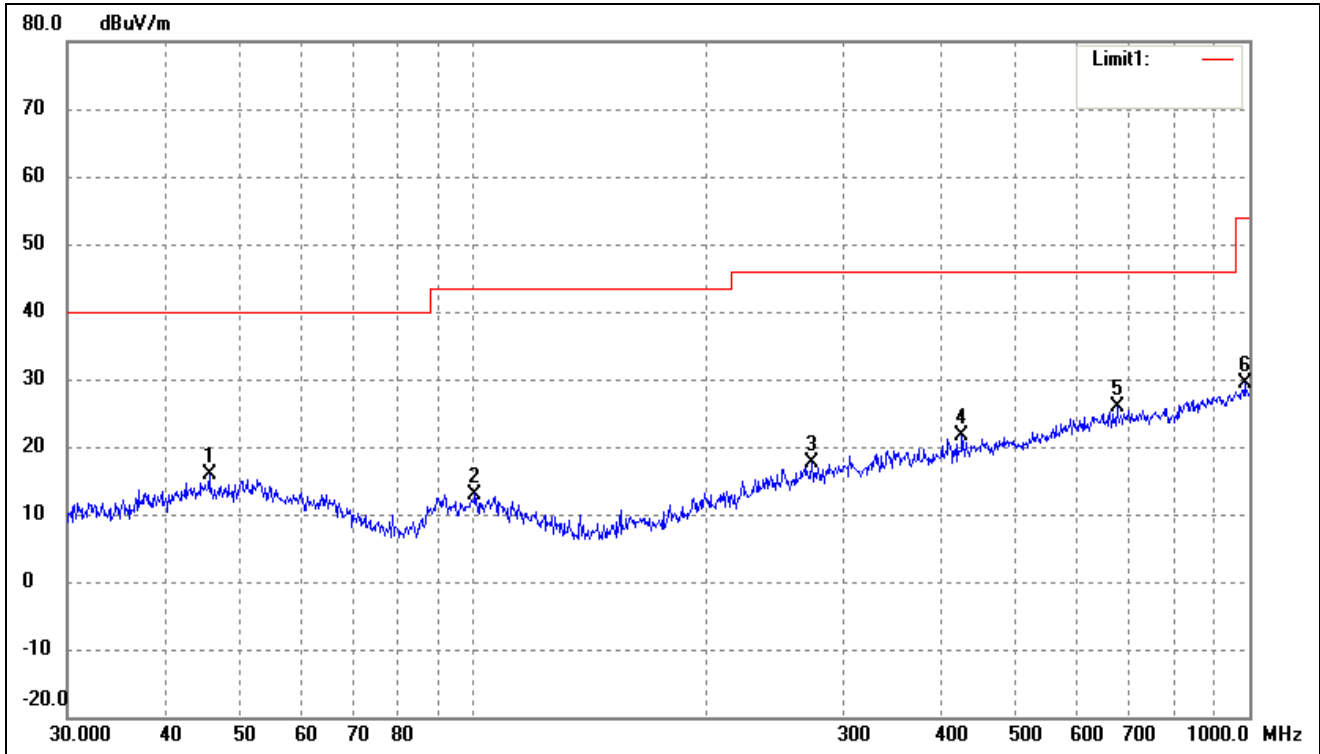

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 45.6948 | 27.69 | -11.85 | 15.84 | 40.00 | -24.16 | 54 | 100 | peak |
| 2 | 100.5806 | 26.75 | -13.75 | 13.00 | 43.50 | -30.50 | 152 | 100 | peak |
| 3 | 273.2341 | 26.73 | -9.03 | 17.70 | 46.00 | -28.30 | 116 | 100 | peak |
| 4 | 426.5210 | 27.67 | -6.14 | 21.53 | 46.00 | -24.47 | 141 | 100 | peak |
| 5 | 675.2080 | 28.29 | -2.40 | 25.89 | 46.00 | -20.11 | 63 | 100 | peak |
| 6 | 986.0717 | 27.22 | 2.16 | 29.38 | 54.00 | -24.62 | 289 | 100 | peak |




| | | | |
|--------------|--------|-----------|----------|
| Test Channel | Middle | Polarity: | Vertical |
|--------------|--------|-----------|----------|

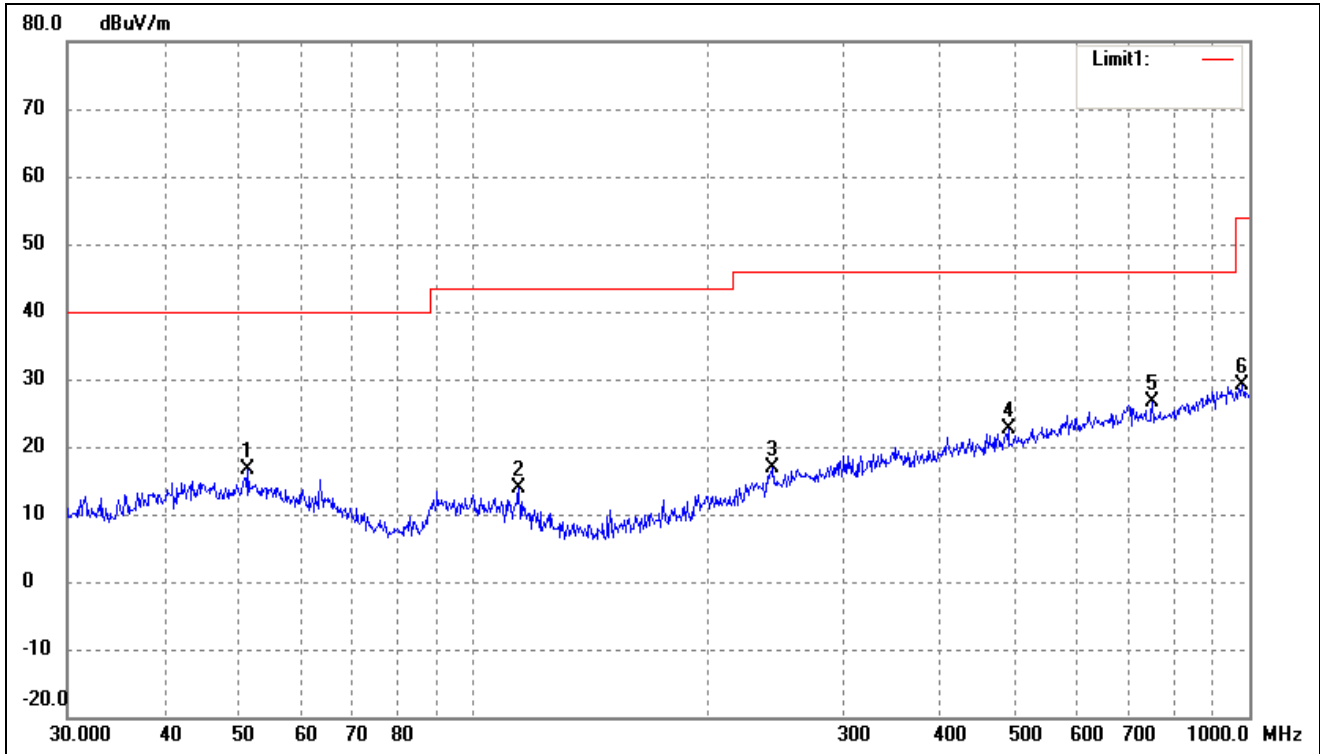

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 51.3005 | 28.27 | -11.59 | 16.68 | 40.00 | -23.32 | 331 | 100 | peak |
| 2 | 114.5146 | 28.61 | -14.74 | 13.87 | 43.50 | -29.63 | 98 | 100 | peak |
| 3 | 243.3772 | 26.90 | -10.09 | 16.81 | 46.00 | -29.19 | 280 | 100 | peak |
| 4 | 489.0269 | 28.27 | -5.57 | 22.70 | 46.00 | -23.30 | 102 | 100 | peak |
| 5 | 750.1083 | 28.53 | -1.98 | 26.55 | 46.00 | -19.45 | 132 | 100 | peak |
| 6 | 979.1804 | 26.89 | 2.24 | 29.13 | 54.00 | -24.87 | 321 | 100 | peak |




| | | | |
|--------------|------|-----------|------------|
| Test Channel | High | Polarity: | Horizontal |
|--------------|------|-----------|------------|

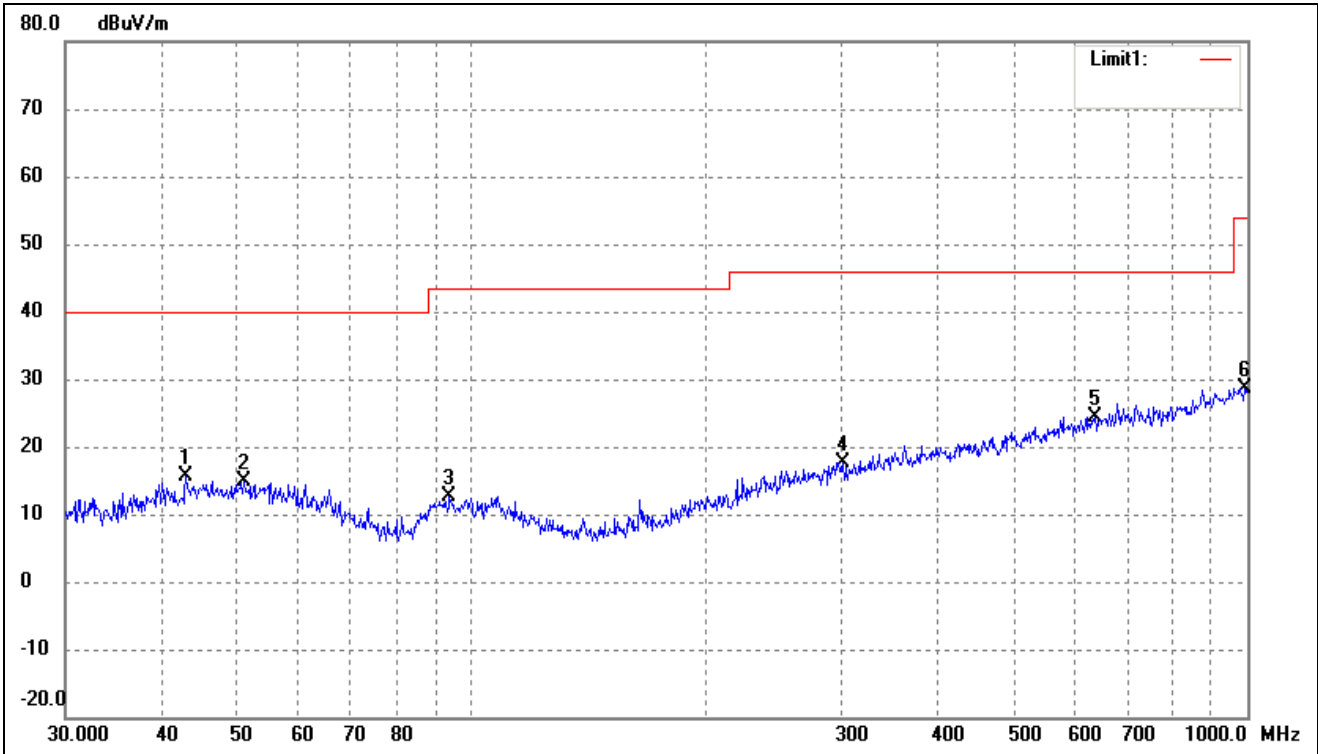

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 42.8998 | 27.74 | -12.16 | 15.58 | 40.00 | -24.42 | 265 | 100 | peak |
| 2 | 50.9420 | 26.45 | -11.59 | 14.86 | 40.00 | -25.14 | 97 | 100 | peak |
| 3 | 93.7685 | 26.79 | -14.15 | 12.64 | 43.50 | -30.86 | 128 | 100 | peak |
| 4 | 301.4224 | 25.88 | -8.17 | 17.71 | 46.00 | -28.29 | 142 | 100 | peak |
| 5 | 636.1340 | 27.16 | -2.70 | 24.46 | 46.00 | -21.54 | 198 | 100 | peak |
| 6 | 993.0114 | 26.57 | 2.12 | 28.69 | 54.00 | -25.31 | 131 | 100 | peak |



| | | | |
|--------------|------|-----------|----------|
| Test Channel | High | Polarity: | Vertical |
|--------------|------|-----------|----------|

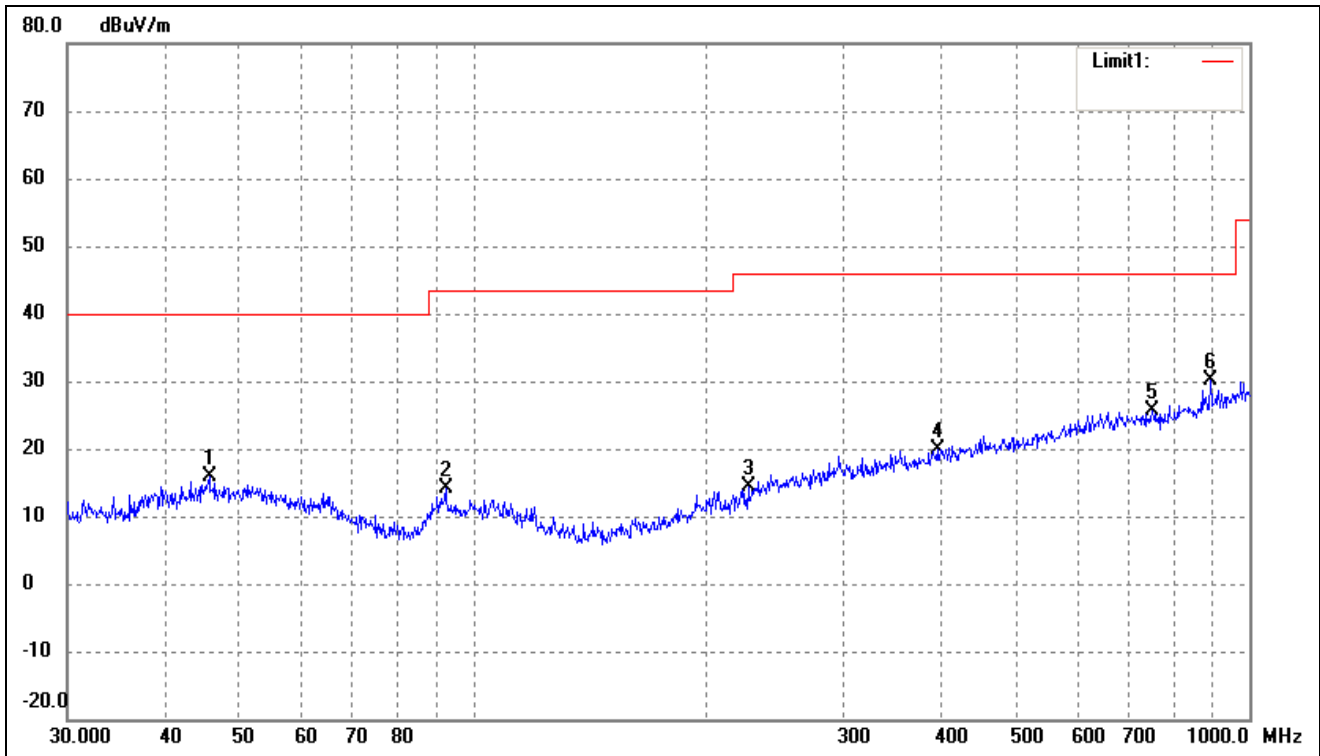

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree () | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------|-------------|--------|
| 1 | 45.6948 | 27.65 | -11.85 | 15.80 | 40.00 | -24.20 | 312 | 100 | peak |
| 2 | 92.1388 | 28.04 | -13.83 | 14.21 | 43.50 | -29.29 | 341 | 100 | peak |
| 3 | 226.0994 | 25.95 | -11.64 | 14.31 | 46.00 | -31.69 | 56 | 100 | peak |
| 4 | 396.2415 | 26.78 | -6.91 | 19.87 | 46.00 | -26.13 | 110 | 100 | peak |
| 5 | 750.1083 | 27.52 | -1.98 | 25.54 | 46.00 | -20.46 | 203 | 100 | peak |
| 6 | 890.7278 | 29.37 | 0.64 | 30.01 | 46.00 | -15.99 | 123 | 100 | peak |



➤ Spurious Emissions Above 1GHz

| Frequency (MHz) | Reading (dBuV/m) | Correct dB | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polar H/V | Detector |
|------------------------|---------------------|---------------|--------------------|-------------------|----------------|--------------|----------|
| Low Channel-2402MHz | | | | | | | |
| 4804 | 61.74 | -3.59 | 58.15 | 74 | -15.85 | H | PK |
| 4804 | 42.87 | -3.59 | 39.28 | 54 | -14.72 | H | AV |
| 7206 | 58.39 | -0.52 | 57.87 | 74 | -16.13 | H | PK |
| 7206 | 35.36 | -0.52 | 34.84 | 54 | -19.16 | H | AV |
| 4804 | 61.80 | -3.59 | 58.21 | 74 | -15.79 | V | PK |
| 4804 | 38.71 | -3.59 | 35.12 | 54 | -18.88 | V | AV |
| 7206 | 58.11 | -0.52 | 57.59 | 74 | -16.41 | V | PK |
| 7206 | 42.08 | -0.52 | 41.56 | 54 | -12.44 | V | AV |
| Middle Channel-2440MHz | | | | | | | |
| 4880 | 58.63 | -3.49 | 55.14 | 74 | -18.86 | H | PK |
| 4880 | 43.16 | -3.49 | 39.67 | 54 | -14.33 | H | AV |
| 7320 | 62.17 | -0.47 | 61.70 | 74 | -12.30 | H | PK |
| 7320 | 37.82 | -0.47 | 37.35 | 54 | -16.65 | H | AV |
| 4880 | 60.90 | -3.49 | 57.41 | 74 | -16.59 | V | PK |
| 4880 | 39.31 | -3.49 | 35.82 | 54 | -18.18 | V | AV |
| 7320 | 58.38 | -0.47 | 57.91 | 74 | -16.09 | V | PK |
| 7320 | 41.48 | -0.47 | 41.01 | 54 | -12.99 | V | AV |
| High Channel-2480MHz | | | | | | | |
| 4960 | 60.02 | -3.41 | 56.61 | 74 | -17.39 | H | PK |
| 4960 | 41.15 | -3.41 | 37.74 | 54 | -16.26 | H | AV |
| 7440 | 59.28 | -0.42 | 58.86 | 74 | -15.14 | H | PK |
| 7440 | 38.23 | -0.42 | 37.81 | 54 | -16.19 | H | AV |
| 4960 | 61.81 | -3.41 | 58.40 | 74 | -15.60 | V | PK |
| 4960 | 44.42 | -3.41 | 41.01 | 54 | -12.99 | V | AV |
| 7440 | 57.62 | -0.42 | 57.20 | 74 | -16.80 | V | PK |
| 7440 | 41.64 | -0.42 | 41.22 | 54 | -12.78 | V | AV |

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

| Frequency | RBW |
|------------------|------------------|
| 9kHz to 150kHz | 200Hz to 300Hz |
| 0.15MHz to 30MHz | 9kHz to 10kHz |
| 30MHz to 1000MHz | 100kHz to 120kHz |
| >1000MHz | 1MHz |

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots



➤ Radiated test


| | | | |
|--------------|-----|-----------|----------------------|
| Test Channel | Low | Polarity: | Vertical(worst case) |
|--------------|-----|-----------|----------------------|

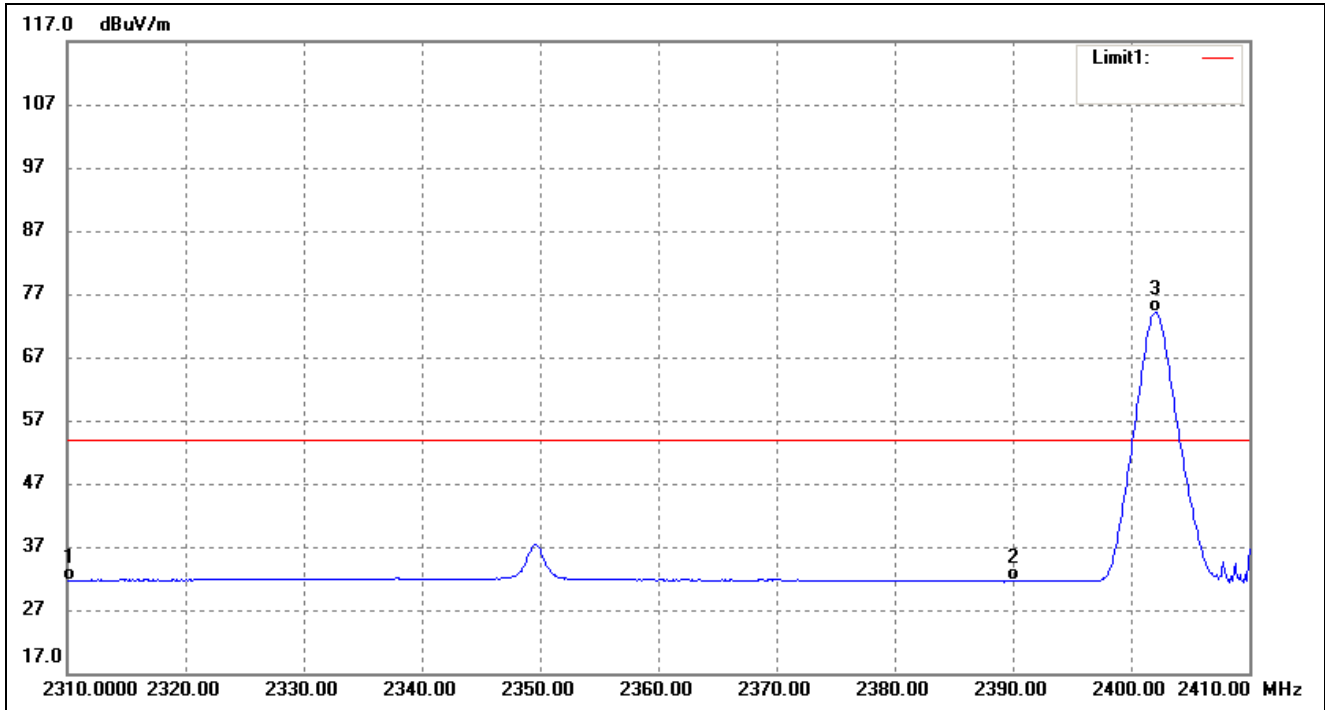

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|--------------------|-----------------|----------------|-------------|------------------|
| 1 | 2310.000 | 41.34 | -9.66 | 31.68 | 54.00 | -22.32 | Average Detector |
| | 2310.000 | 53.09 | -9.66 | 43.43 | 74.00 | -30.57 | Peak Detector |
| 2 | 2390.000 | 41.03 | -9.50 | 31.53 | 54.00 | -22.47 | Average Detector |
| | 2390.000 | 53.48 | -9.50 | 43.98 | 74.00 | -30.02 | Peak Detector |
| 3 | 2402.000 | 83.60 | -9.47 | 74.13 | / | / | Average Detector |
| | 2402.100 | 92.16 | -9.47 | 82.69 | / | / | Peak Detector |




| | | | |
|--------------|------|-----------|----------------------|
| Test Channel | High | Polarity: | Vertical(worst case) |
|--------------|------|-----------|----------------------|

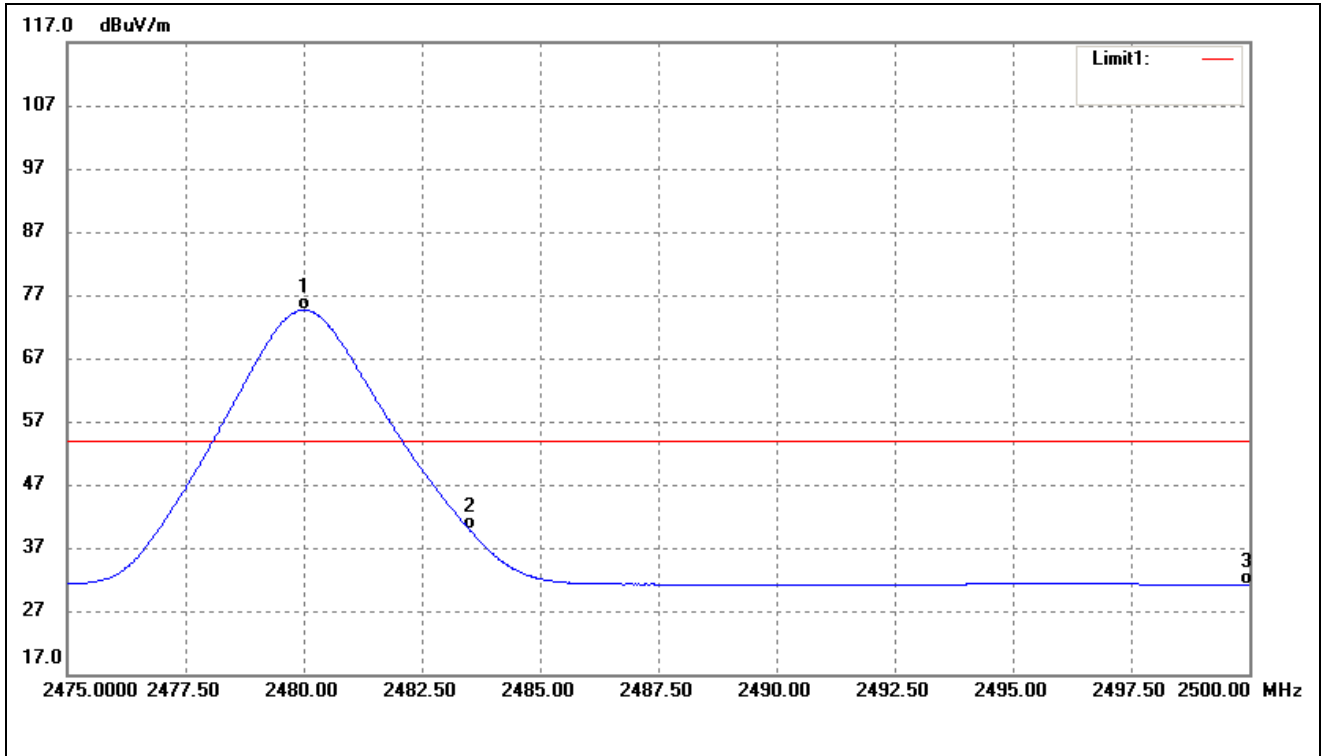

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|------------------|
| 1 | 2480.000 | 83.97 | -9.32 | 74.65 | / | / | Average Detector |
| | 2480.000 | 92.70 | -9.32 | 83.38 | / | / | Peak Detector |
| 2 | 2483.500 | 49.27 | -9.31 | 39.96 | 54.00 | -14.04 | Average Detector |
| | 2483.500 | 57.12 | -9.31 | 47.81 | 74.00 | -26.19 | Peak Detector |
| 3 | 2500.000 | 40.41 | -9.28 | 31.13 | 54.00 | -22.87 | Average Detector |
| | 2500.000 | 52.06 | -9.28 | 42.78 | 74.00 | -31.22 | Peak Detector |





➤ Conducted test

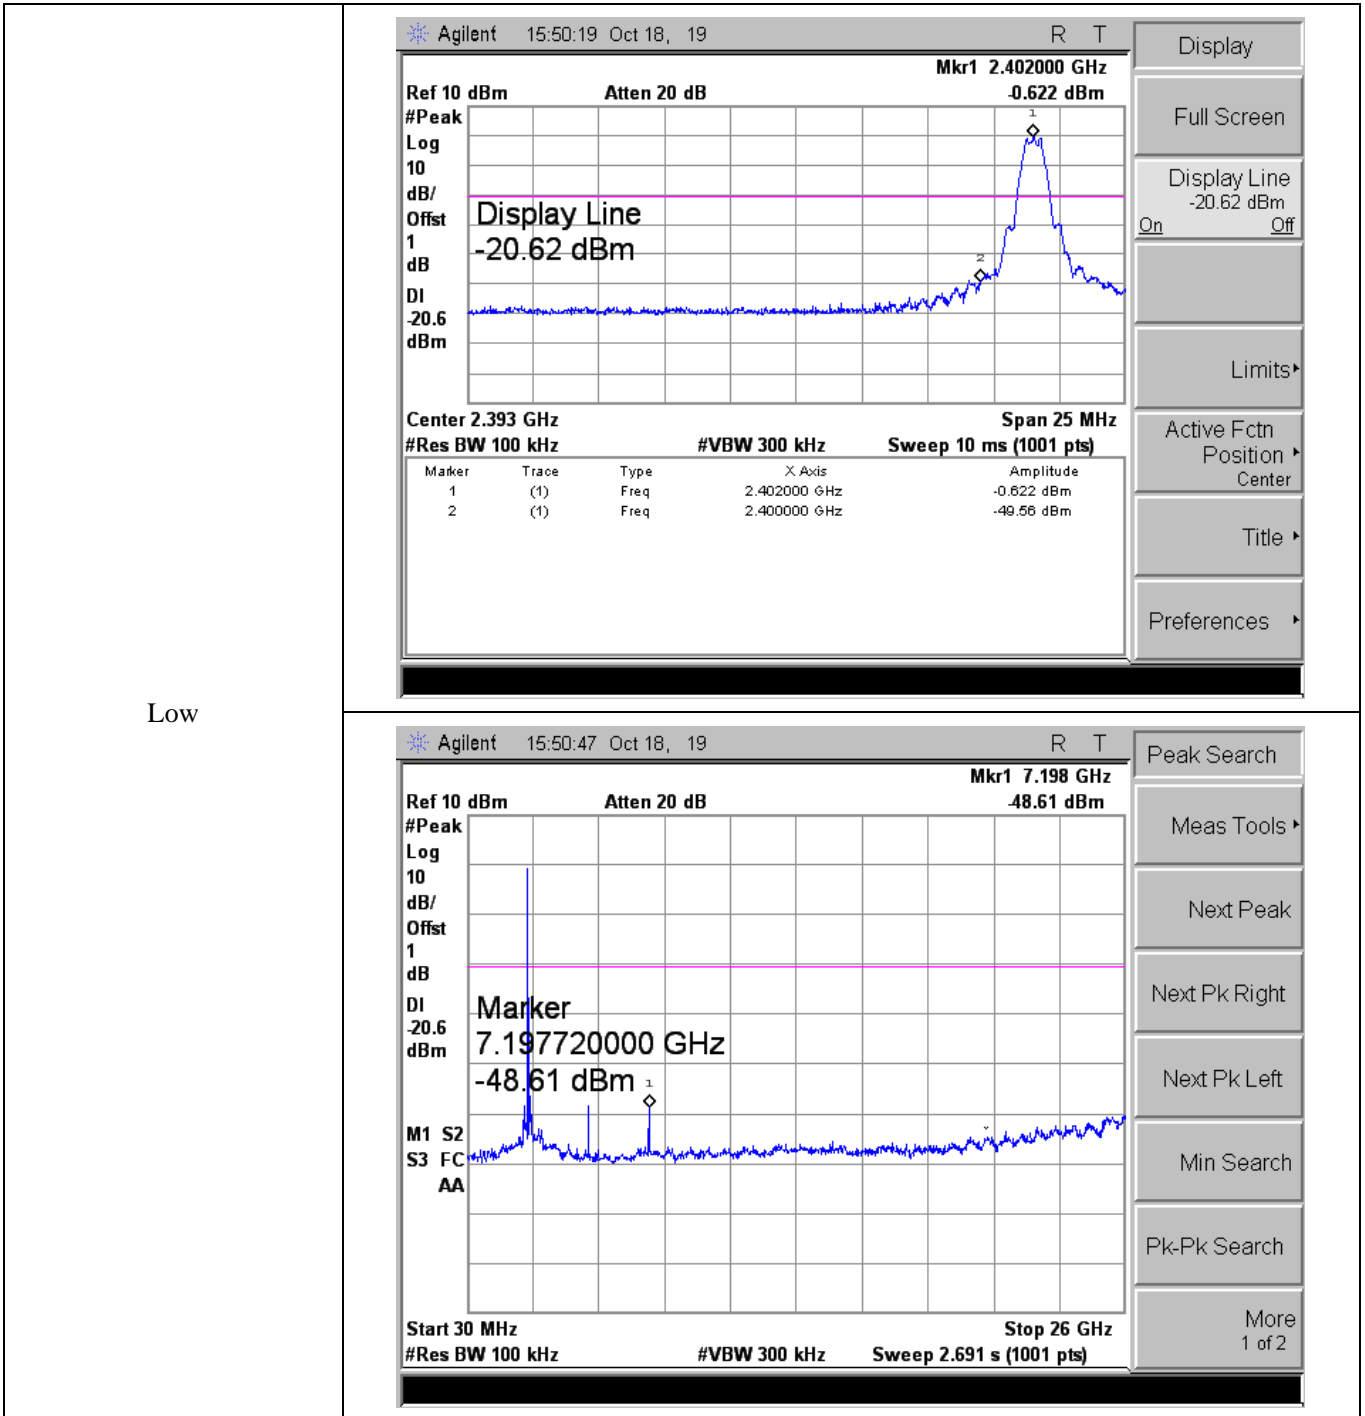





Middle

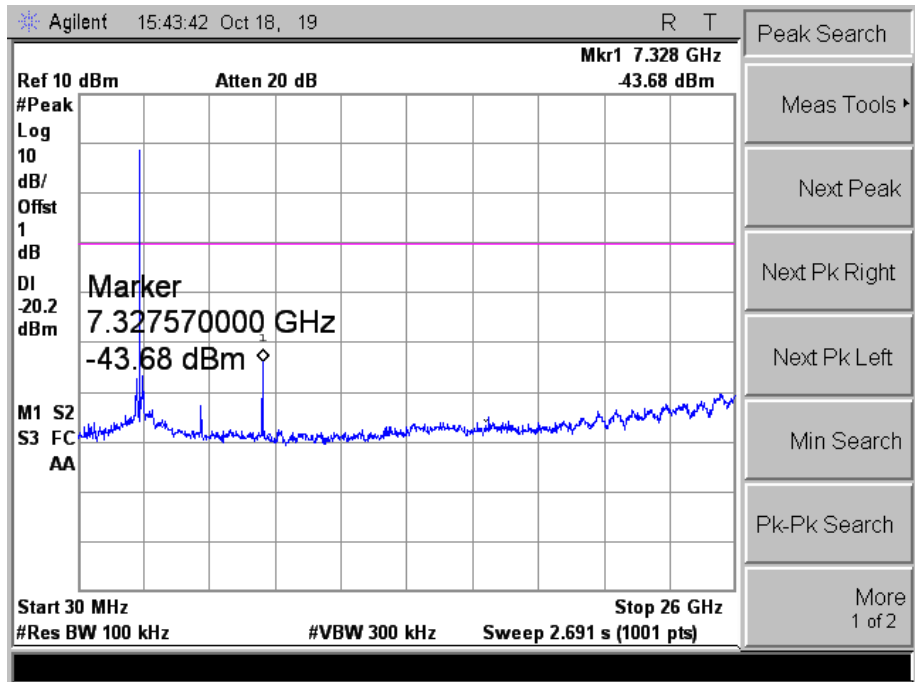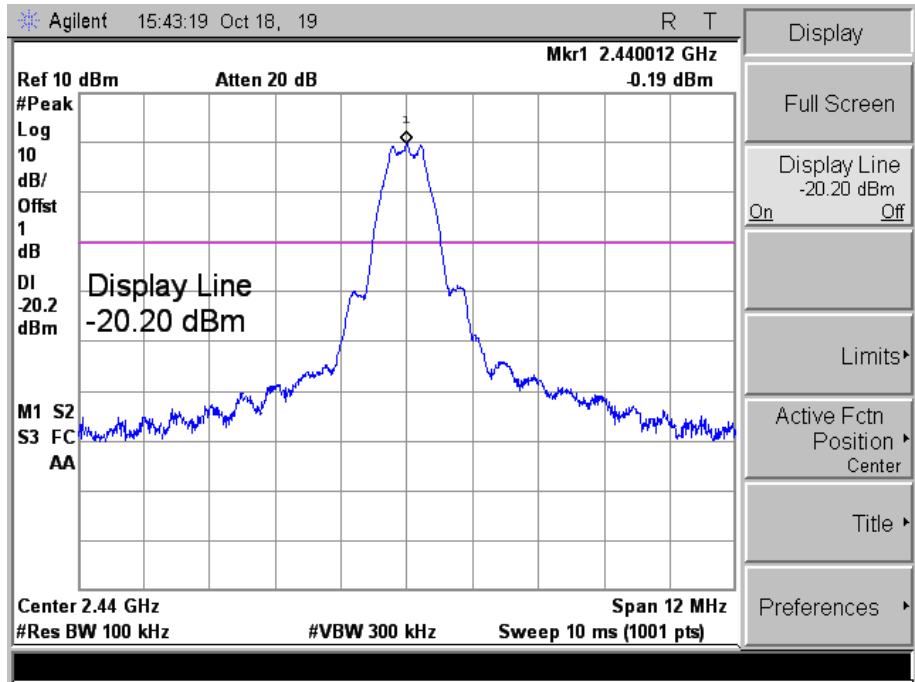



High

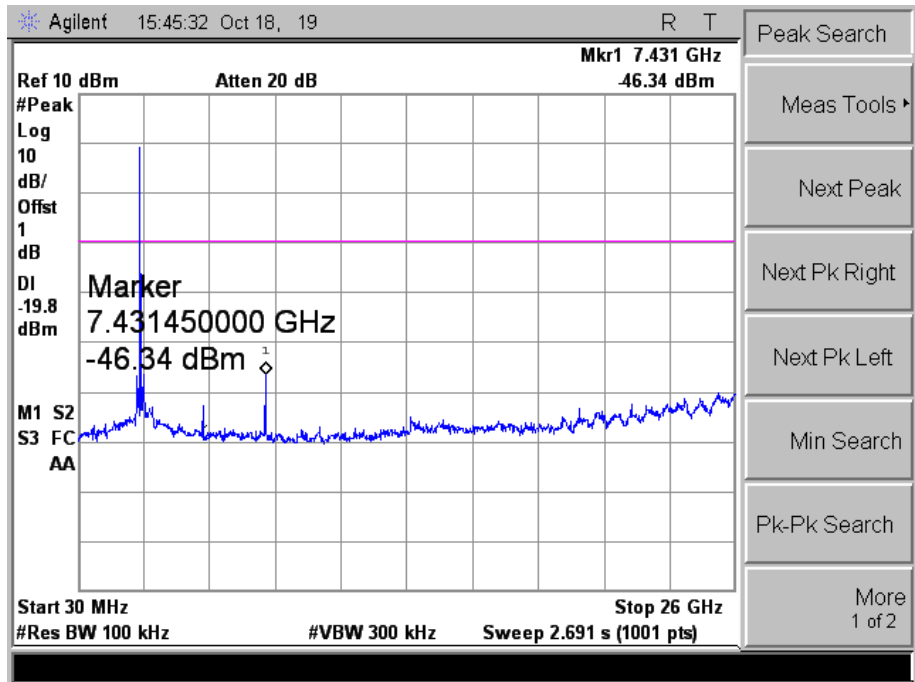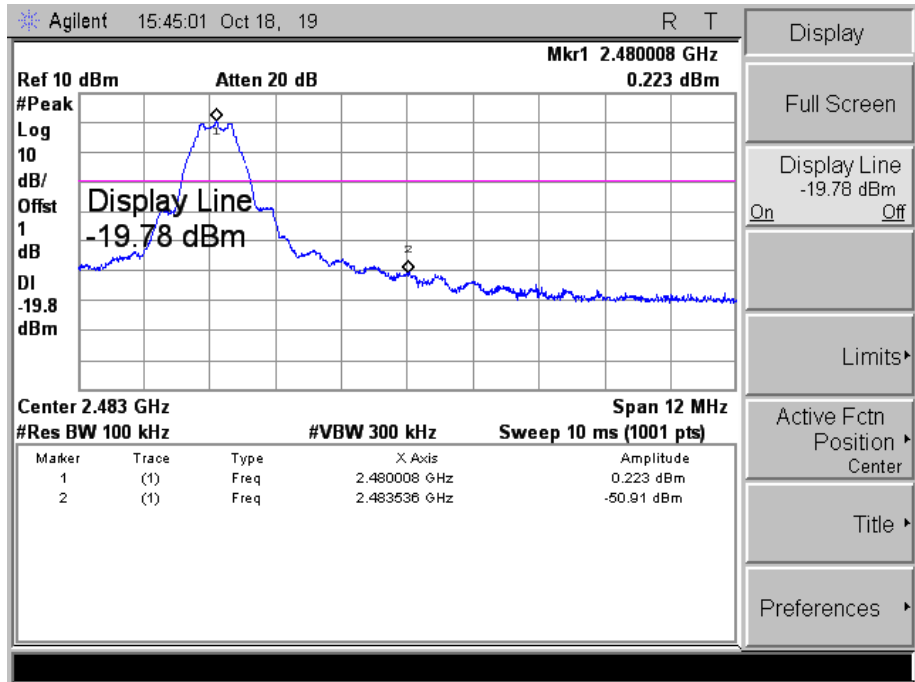


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

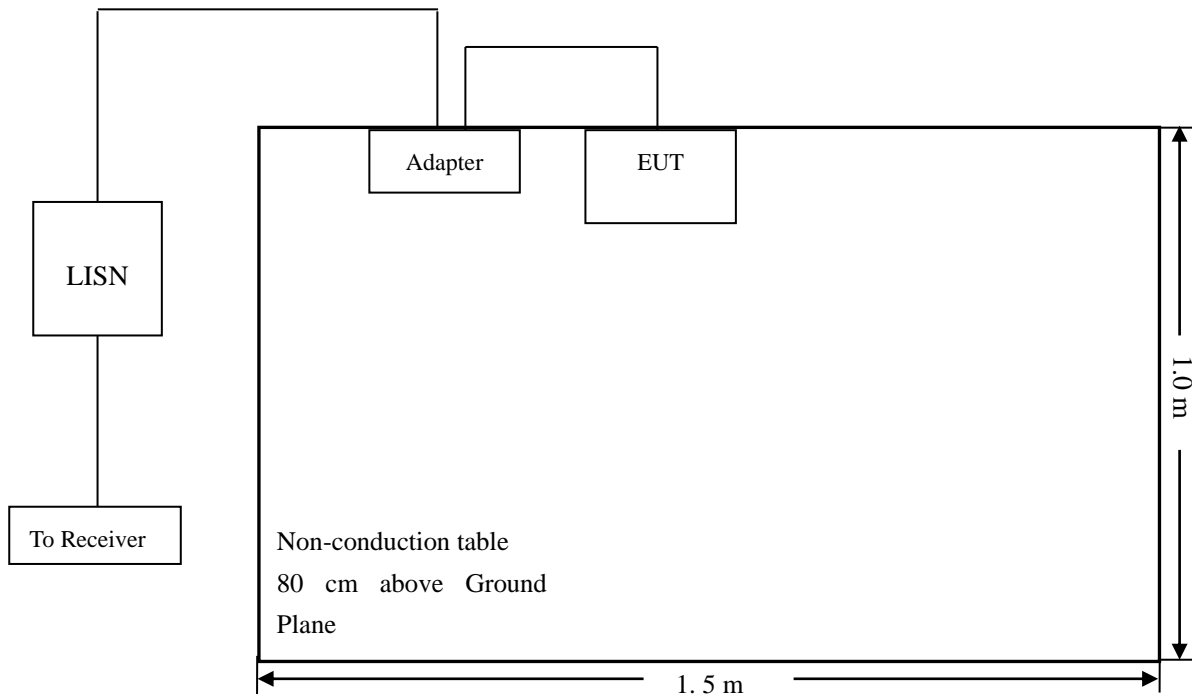

10.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

10.4 Summary of Test Results/Plots




| | | | | |
|-----------|---------------|-------------|-----------|---------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Neutral |
|-----------|---------------|-------------|-----------|---------|

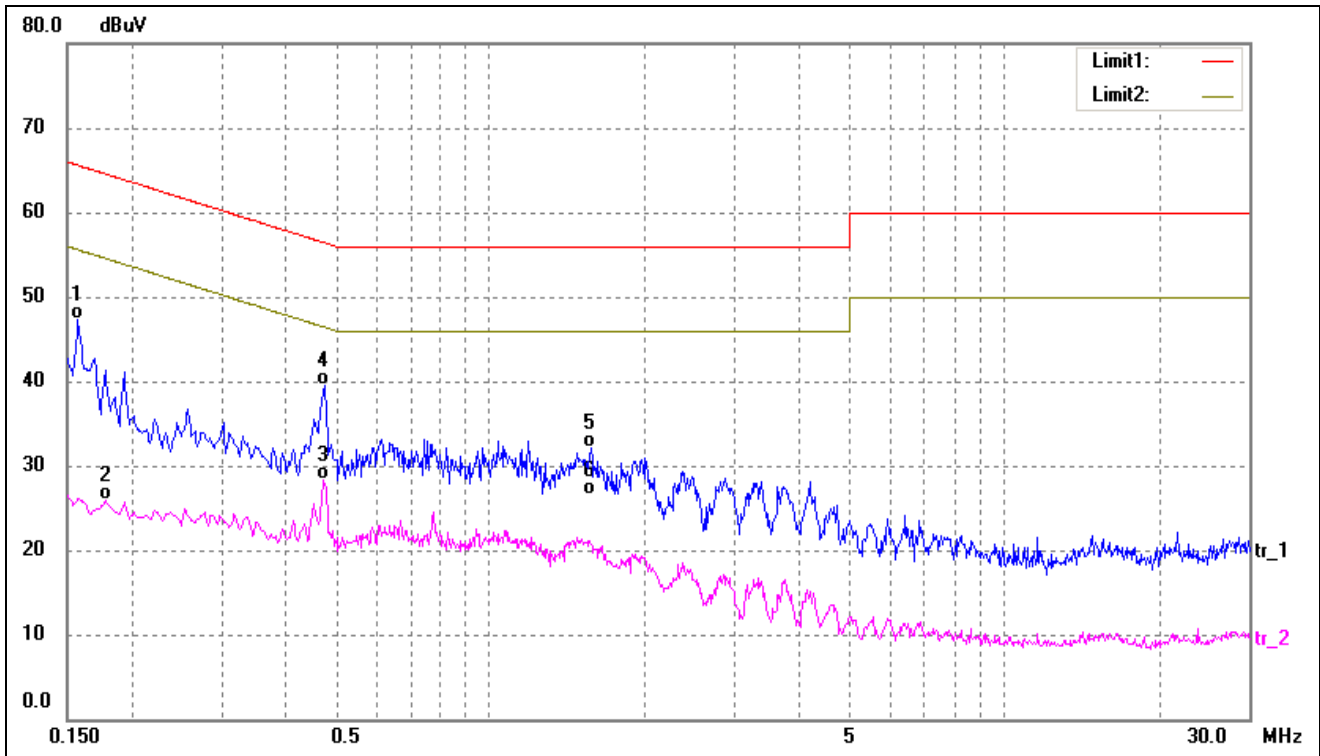

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|----------|
| 1 | 0.1580 | 37.29 | 9.95 | 47.24 | 65.57 | -18.33 | QP |
| 2 | 0.1780 | 15.86 | 9.96 | 25.82 | 54.58 | -28.76 | AVG |
| 3 | 0.4740 | 18.19 | 10.02 | 28.21 | 46.44 | -18.23 | AVG |
| 4* | 0.4780 | 29.51 | 10.02 | 39.53 | 56.37 | -16.84 | QP |
| 5 | 1.5740 | 21.64 | 10.37 | 32.01 | 56.00 | -23.99 | QP |
| 6 | 1.5740 | 16.17 | 10.37 | 26.54 | 46.00 | -19.46 | AVG |



| | | | | |
|-----------|---------------|-------------|-----------|------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Line |
|-----------|---------------|-------------|-----------|------|

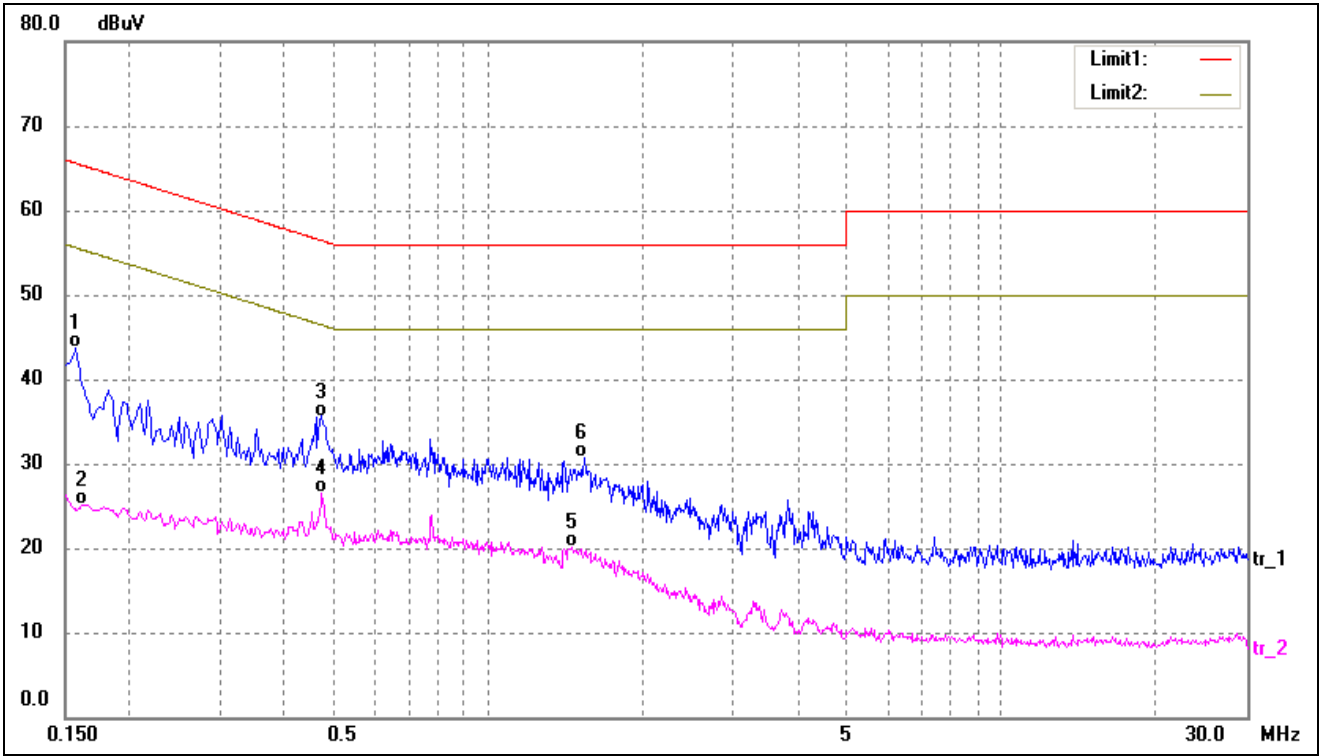

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|----------------|---------------|--------------|-------------|----------|
| 1 | 0.1580 | 33.70 | 9.95 | 43.65 | 65.57 | -21.92 | QP |
| 2 | 0.1620 | 15.08 | 9.95 | 25.03 | 55.36 | -30.33 | AVG |
| 3 | 0.4740 | 25.58 | 10.02 | 35.60 | 56.44 | -20.84 | QP |
| 4* | 0.4740 | 16.46 | 10.02 | 26.48 | 46.44 | -19.96 | AVG |
| 5 | 1.4580 | 9.70 | 10.36 | 20.06 | 46.00 | -25.94 | AVG |
| 6 | 1.5380 | 20.31 | 10.37 | 30.68 | 56.00 | -25.32 | QP |

***** END OF REPORT *****