

TEST REPORT

of

FCC Part 15 Subpart C AND CANADA RSS-247

Full Modular Approval

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product : **Module**
Brand: **KingYoung**
Model: **KYRM-0083**
Model Difference: **N/A**
FCC ID: **2AU5WKYRM-0083**
FCC Rule Part: **§15.247, Cat: DTS**
Applicant: **King Young Technology Co., Ltd.**
Address: **10F., No.318 Sec. 1, Neihu Rd., Neihu District,
Taipei City, 114, Taiwan**

Test Performed by:
International Standards Laboratory Corp.

<LT Lab.>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW0997; TAF: 0997; IC: IC4067B-4;

*Address:

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: ISL-19LR265FC

Issue Date : 2019/11/08



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

VERIFICATION OF COMPLIANCE

Applicant: King Young Technology Co., Ltd.
Product Description: Module
Brand Name: KingYoung
Model No.: KYRM-0083
Model Difference: N/A
FCC ID: 2AU5WKYRM-0083
Date of test: 2019/09/03 ~ 2019/11/07
Date of EUT Received: 2019/09/03

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:		Date:	2019/11/08
	Barry Lee / Senior Engineer		
Prepared By:		Date:	2019/11/08
	Gigi Yeh / Senior Engineer		
Approved By:		Date:	2019/11/08
	Jerry Liu / Technical Manager		

Version

Version No.	Date	Description
00	2019/11/08	Initial creation of document

Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	$\leq 30\text{MHz}$: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

Table of Contents

1	General Information	6
1.1	Related Submittal(s) / Grant (s)	7
1.2	Test Methodology	7
1.3	Test Facility	7
1.4	Special Accessories	7
1.5	Equipment Modifications	7
2	System Test Configuration	8
2.1	EUT Configuration	8
2.2	EUT Exercise	8
2.3	Test Procedure	8
2.4	Configuration of Tested System	9
3	Summary of Test Results	10
4	Description of Test Modes	10
5	Conducted Emission Test	11
5.1	Standard Applicable:	11
5.2	Measurement Equipment Used:	11
5.3	EUT Setup:	11
5.4	Measurement Procedure:	12
5.5	Measurement Result:	12
6	Peak Output Power Measurement	15
6.1	Standard Applicable:	15
6.2	Measurement Equipment Used:	16
6.3	Test Set-up:	16
6.4	Measurement Procedure:	16
6.5	Measurement Result:	17
7	6dB Bandwidth & 99% Bandwidth	18
7.1	Standard Applicable:	18
7.2	Measurement Equipment Used:	18
7.3	Test Set-up:	18
7.4	Measurement Procedure:	18
7.5	Measurement Result:	19
8	Spurious Emission Test	22
8.1	Standard Applicable	22
8.2	Measurement Equipment Used:	22
8.3	Test SET-UP:	22
8.4	Measurement Procedure:	23
8.5	Field Strength Calculation	24
8.6	Measurement Result:	24
9	100kHz Bandwidth of Band Edges Measurement	31
9.1	Standard Applicable:	31
9.2	Measurement Equipment Used:	32
9.3	Test SET-UP:	33
9.4	Measurement Procedure:	34
9.5	Field Strength Calculation:	34
9.6	Measurement Result:	34

10	Peak Power Spectral Density	39
10.1	Standard Applicable:	39
10.2	Measurement Equipment Used:	39
10.3	Test Set-up:	39
10.4	Measurement Procedure:	39
10.5	Measurement Result:	39
11	Antenna Requirement	42
11.1	Standard Applicable:	42
11.2	Antenna Connected Construction:	42

1 General Information

General:

Product Name:	Module
Brand Name:	KingYoung
Model Name:	KYRM-0083
Model Difference:	N/A
Power Supply:	5Vdc

Zigbee:

Modulation type	OQPSK
Frequency Range(MHz)	2405-2480MHz
Channel Number	16
Measured Power	PK: 13.88dBm PK
Antenna Designation:	Chip Antenna: 0.5dBi

This report applies for 2.4GHz Zigbee

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AU5WKYRM-0083** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 15.247 Meas Guidance v05r02.

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory Corp.**<LT Lab.> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10: 2013. FCC Registration Number is: 487532; Designation Number is: TW0997, Canada Registration Number: 4067B-4.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 6 of ANSI C63.10: 2013 and RSS-Gen issue 5 Amendment 1: 2019. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m/1.5m (frequency above 1 GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration

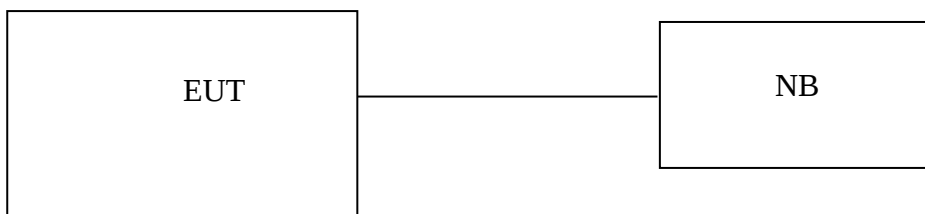


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	Lenovo	V370	N/A	N/A	Non-shield

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)	Peak Output Power/ EIRP	Compliant
§15.247(a)(2)	6dB & 99% Power Bandwidth	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4 Description of Test Modes

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

Zigbee mode: Channel low (2405MHz), mid (2445MHz) and high (2480MHz) are chosen for full testing.

5 Conducted Emission Test

5.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

5.2 Measurement Equipment Used:

AC Power Line Test Site					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	08/29/2019	08/28/2020
EMI Receiver 18	Rohde & Schwarz	ESCI	101392	05/16/2019	05/15/2020
LISN 18	ROHDE & SCHWARZ	ENV216	101424	07/09/2019	07/08/2020
LISN 15	ROHDE & SCHWARZ	ENV216	101335	11/22/2018	11/21/2019
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10-2013.
2. The AC/DC Power adaptor of PC was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:


1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

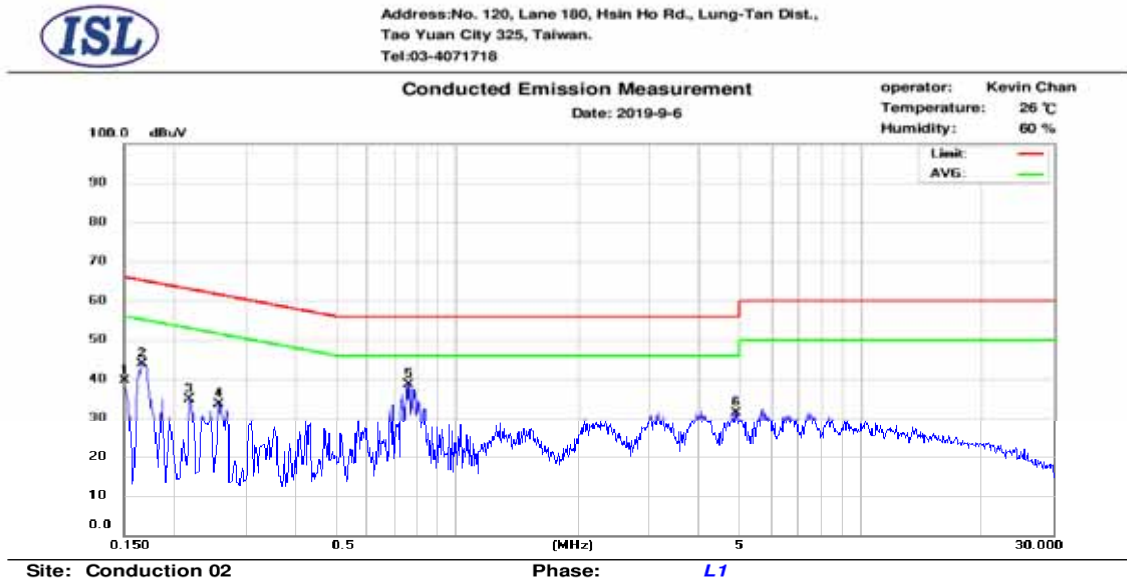

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.150	27.42	8.07	9.63	37.05	66.00	-28.95	17.70	56.00	-38.30
2	0.166	31.89	12.73	9.63	41.52	65.16	-23.64	22.36	55.16	-32.80
3	0.218	18.33	1.12	9.62	27.95	62.89	-34.94	10.74	52.89	-42.15
4	0.258	20.13	9.05	9.62	29.75	61.50	-31.75	18.67	51.50	-32.83
5	0.762	24.40	15.07	9.65	34.05	56.00	-21.95	24.72	46.00	-21.28
6	4.906	16.02	10.07	9.76	25.78	56.00	-30.22	19.83	46.00	-26.17



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718


Conducted Emission Measurement

Date: 2019-9-6

operator: Kevin Chan

Temperature: 26 °C

Humidity: 60 %

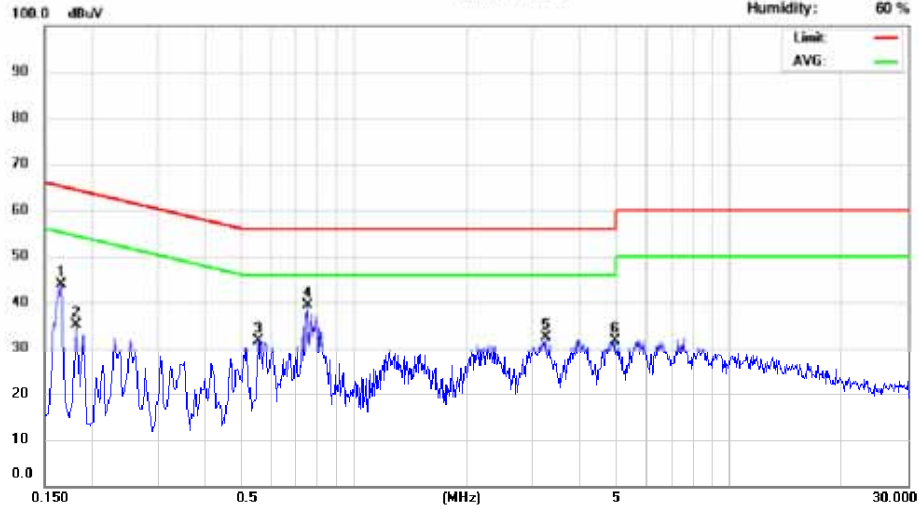

Site: Conduction 02

Phase: **N**

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.166	31.38	13.70	9.64	41.02	65.16	-24.14	23.34	55.16	-31.82
2	0.182	25.57	9.21	9.64	35.21	64.39	-29.18	18.85	54.39	-35.54
3	0.558	15.82	7.93	9.65	25.47	56.00	-30.53	17.58	46.00	-28.42
4	0.754	25.57	17.28	9.67	35.24	56.00	-20.76	26.95	46.00	-19.05
5	3.250	16.55	10.75	9.75	26.30	56.00	-29.70	20.50	46.00	-25.50
6	4.962	16.34	9.43	9.78	26.12	56.00	-29.88	19.21	46.00	-26.79

6 Peak Output Power Measurement

6.1 Standard Applicable:

According to §15.247(b)(3), (b)(4), (c)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
Power Meter 05	Anritsu	ML2495A	1116010	10/04/2019	10/03/2020
Power Sensor 05	Anritsu	MA2411B	34NKF50	10/04/2019	10/03/2020
Power Sensor 06	DARE	RPR3006W	13I00030SN O33	01/11/2019	01/10/2020
Power Sensor 08	DARE	RPR3006W	14I00889SN O35	06/27/2019	06/26/2020
Power Sensor 09	DARE	RPR3006W	14I00889SN O36	06/27/2019	06/26/2020
Temperature Chamber	KSON	THS-B4H100	2287	02/19/2019	02/18/2020
DC Power supply	ABM	8185D	N/A	01/10/2019	01/09/2020
AC Power supply	EXTECH	CFC105W	NA	N/A	N/A
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/26/2017	12/25/2019
Spectrum analyzer	keysight	N9010A	MY56070257	10/05/2019	10/04/2020
Spectrum analyzer	R&S	FSP40	100116	01/10/2019	01/09/2020
Test Software	DARE	Radiation Ver:2013.1.23	NA	NA	NA

6.3 Test Set-up:

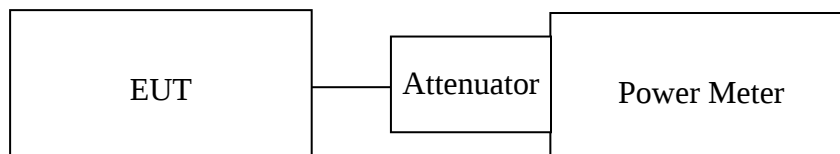

6.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5 Measurement Result:

Zigbee

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)
Low	13.25	0.02115	1
Mid	13.88	0.02441	1
High	6.17	0.00414	1

Cable Offset: 1

7 6dB Bandwidth & 99% Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=100kHz, VBW = 3*RBW, Span= cover the complete power envelope of the signal of the UUT Sweep=auto
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

7.5 Measurement Result:


Zigbee

CH	6dB Bandwidth (MHz)	Limit (kHz)
Lower	1.66	> 500
Mid	1.66	> 500
Higher	1.66	> 500


Note: Refer to next page for plots.

Zigbee Mode


6dB Bandwidth Test Data CH-Low

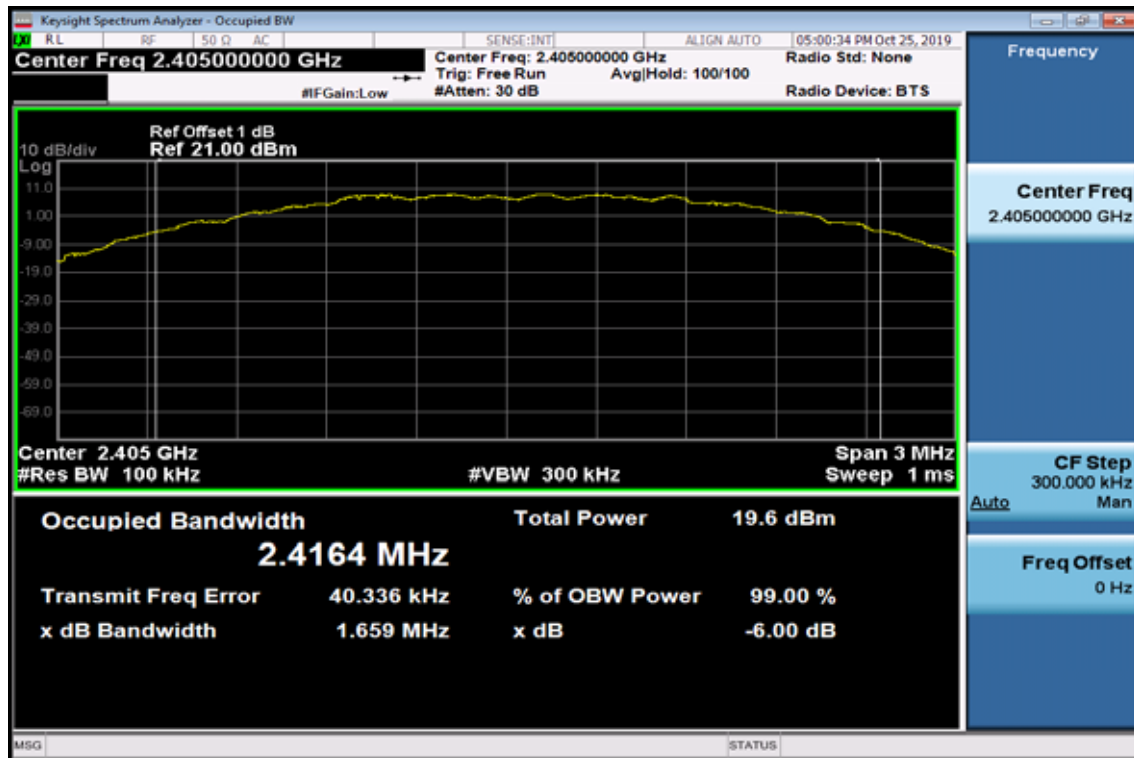

6dB Band Width Test Data CH-Mid

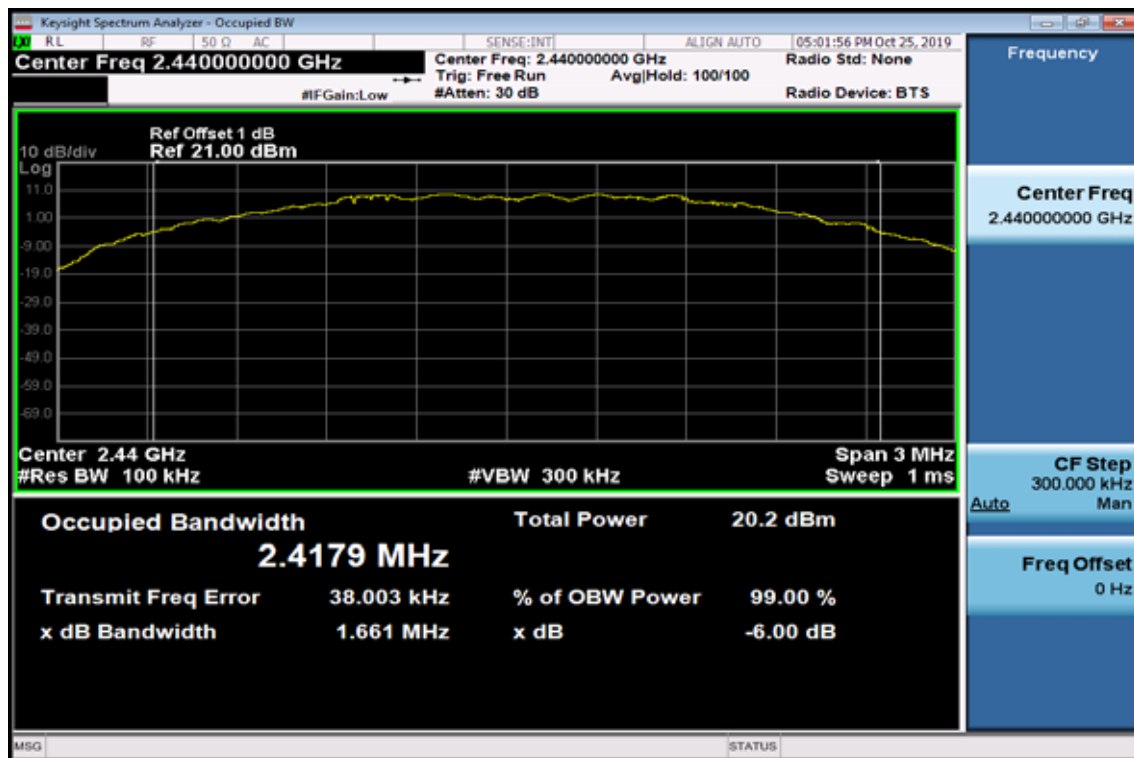

6dB Band Width Test Data CH-High

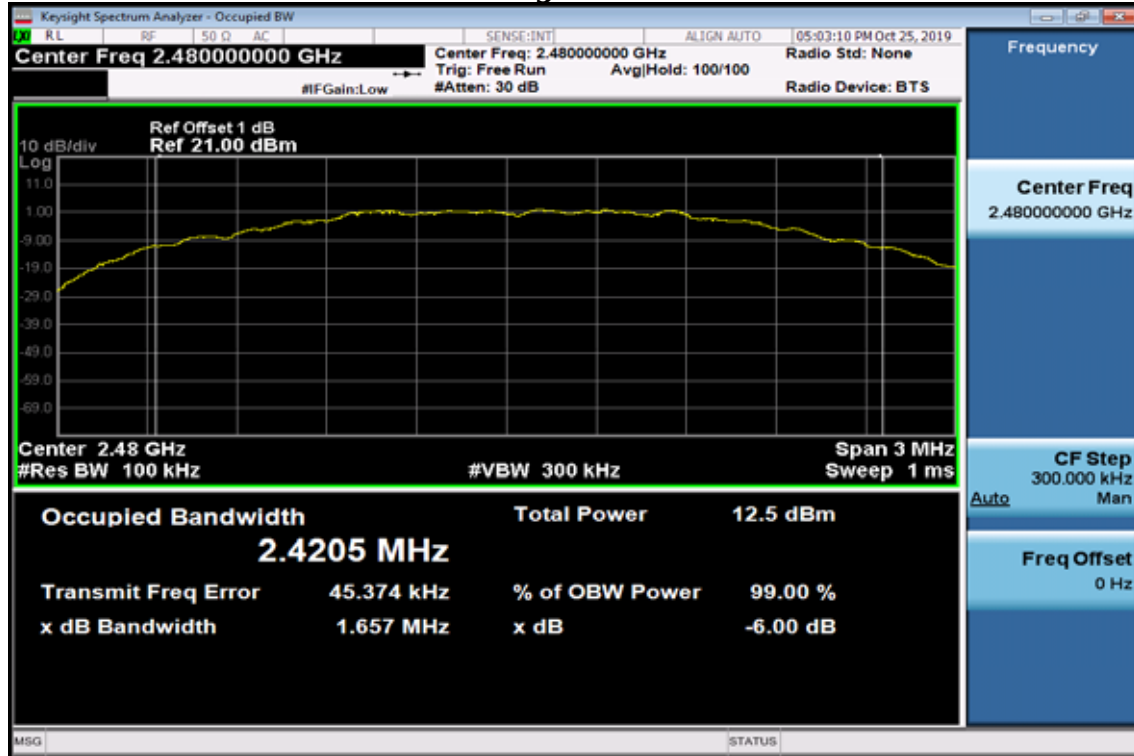

8 Spurious Emission Test

8.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

Refer to section 9.2 for details.

8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

8.3.2 Radiated emission:

Refer to section 9.3 for details.

8.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Test receiver setting : Blew 1GHz
 Detector : Average(9kHz – 90kHz, 110kHz – 90kHz), Quasi-Peak
 Bandwidth : 200Hz, 120kHz
 Test spectrum setting : Above 1GHz
 Peak : RBW=1MHz, VBW=3MHz, Sweep=auto
 Average (for Zigbee) : RBW=1MHz, VBW=10Hz, Sweep=auto

Average Measurement Setting (VBW)

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
Zigbee	100	--	--	--	10Hz

8.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Low	Test Date	2019/10/25
Fundamental Frequency	2402MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	263.77	33.98	-5.05	28.93	46.00	-17.07	Peak	VERTICAL
2	444.19	31.53	-1.13	30.40	46.00	-15.60	Peak	VERTICAL
3	521.79	31.55	0.11	31.66	46.00	-14.34	Peak	VERTICAL
4	704.15	29.46	3.17	32.63	46.00	-13.37	Peak	VERTICAL
5	762.35	30.61	4.24	34.85	46.00	-11.15	Peak	VERTICAL
6	833.16	32.96	5.18	38.14	46.00	-7.86	Peak	VERTICAL
1	303.54	34.23	-3.76	30.47	46.00	-15.53	Peak	HORIZONTAL
2	395.69	33.11	-2.08	31.03	46.00	-14.97	Peak	HORIZONTAL
3	444.19	35.35	-1.13	34.22	46.00	-11.78	Peak	HORIZONTAL
4	520.82	33.33	0.08	33.41	46.00	-12.59	Peak	HORIZONTAL
5	721.61	30.91	3.28	34.19	46.00	-11.81	Peak	HORIZONTAL
6	835.10	31.90	5.21	37.11	46.00	-8.89	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	2019/10/25
Fundamental Frequency	2442MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	399.57	31.55	-2.02	29.53	46.00	-16.47	Peak	VERTICAL
2	427.70	30.85	-1.48	29.37	46.00	-16.63	Peak	VERTICAL
3	540.22	29.86	0.37	30.23	46.00	-15.77	Peak	VERTICAL
4	618.79	30.33	1.68	32.01	46.00	-13.99	Peak	VERTICAL
5	712.88	30.51	3.21	33.72	46.00	-12.28	Peak	VERTICAL
6	795.33	29.14	4.52	33.66	46.00	-12.34	Peak	VERTICAL
1	291.90	30.01	-4.08	25.93	46.00	-20.07	Peak	HORIZONTAL
2	373.38	29.88	-2.42	27.46	46.00	-18.54	Peak	HORIZONTAL
3	499.48	30.04	-0.66	29.38	46.00	-16.62	Peak	HORIZONTAL
4	604.24	29.74	1.58	31.32	46.00	-14.68	Peak	HORIZONTAL
5	761.38	29.12	4.22	33.34	46.00	-12.66	Peak	HORIZONTAL
6	852.56	29.56	5.37	34.93	46.00	-11.07	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	2019/10/25
Fundamental Frequency	2480MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	326.82	30.59	-3.26	27.33	46.00	-18.67	Peak	VERTICAL
2	493.66	29.92	-0.69	29.23	46.00	-16.77	Peak	VERTICAL
3	598.42	29.44	1.49	30.93	46.00	-15.07	Peak	VERTICAL
4	745.86	28.66	3.92	32.58	46.00	-13.42	Peak	VERTICAL
5	825.40	29.55	5.07	34.62	46.00	-11.38	Peak	VERTICAL
6	863.23	30.00	5.52	35.52	46.00	-10.48	Peak	VERTICAL
1	263.77	37.21	-5.05	32.16	46.00	-13.84	Peak	HORIZONTAL
2	365.62	30.03	-2.64	27.39	46.00	-18.61	Peak	HORIZONTAL
3	431.58	31.36	-1.37	29.99	46.00	-16.01	Peak	HORIZONTAL
4	594.54	29.18	1.41	30.59	46.00	-15.41	Peak	HORIZONTAL
5	792.42	29.72	4.48	34.20	46.00	-11.80	Peak	HORIZONTAL
6	853.53	30.03	5.38	35.41	46.00	-10.59	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	2019/10/25
Fundamental Frequency	2402MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4810.00	55.03	-9.40	45.63	74.00	-28.37	Peak	VERTICAL
2	7215.00	48.37	-1.82	46.55	74.00	-27.45	Peak	VERTICAL
1	4810.00	55.07	-9.40	45.67	74.00	-28.33	Peak	HORIZONTAL
2	7215.00	46.79	-1.82	44.97	74.00	-29.03	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	2019/10/25
Fundamental Frequency	2442MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4880.00	55.07	-9.21	45.86	74.00	-28.14	Peak	VERTICAL
2	7320.00	45.90	-1.75	44.15	74.00	-29.85	Peak	VERTICAL
1	4880.00	57.23	-9.21	48.02	74.00	-25.98	Peak	HORIZONTAL
2	7320.00	45.25	-1.75	43.50	74.00	-30.50	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	2019/10/25
Fundamental Frequency	2480MHz	Test By	Barry
Temperature	25	Pol	Ver./Hor
Humidity	60 %		

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	4960.00	61.82	-9.01	52.81	54.00	-1.19	Average	VERTICAL
2	4960.00	66.26	-9.01	57.25	74.00	-16.75	Peak	VERTICAL
3	7440.00	45.51	-1.75	43.76	74.00	-30.24	Peak	VERTICAL
1	4960.00	61.93	-9.01	52.92	54.00	-1.08	Average	HORIZONTAL
2	4960.00	65.58	-9.01	56.57	74.00	-17.43	Peak	HORIZONTAL
3	7440.00	46.23	-1.75	44.48	74.00	-29.52	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9 100kHz Bandwidth of Band Edges Measurement

9.1 Standard Applicable:

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Chamber 19(966)					
Equipment Type	MFR	Model Number	Serial Number	Last Cal.	Cal Due.
Spectrum analyzer	R&S	FSP40	100116	01/10/2019	01/09/2020
EMI Receiver	R&S	ESR3	102461	08/08/2018	08/07/2020
Loop Antenna(9K-30M)	EM	EM-6879	271	05/31/2019	05/30/2020
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	01/29/2019	01/28/2020
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	06/17/2019	06/16/2020
Horn antenna (18G-26G)	Com-power	AH-826	081001	11/21/2017	11/20/2019
Horn antenna (26G-40G)	Com-power	AH-640	100A	03/29/2019	03/28/2021
Preamplifier (9k-1000M)	HP	8447F	3113A06362	01/14/2019	01/13/2020
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	10/29/2019	10/28/2020
Preamplifier (26G-40G)	MITEQ	JS4-26004000- 27-5A	818471	05/06/2019	05/05/2020
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	01/17/2019	01/16/2020
RF cable (1G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/2	11/27/2017	11/26/2019
Signal Generator	Anritsu	MG3692A	20311	01/09/2019	01/08/2020
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

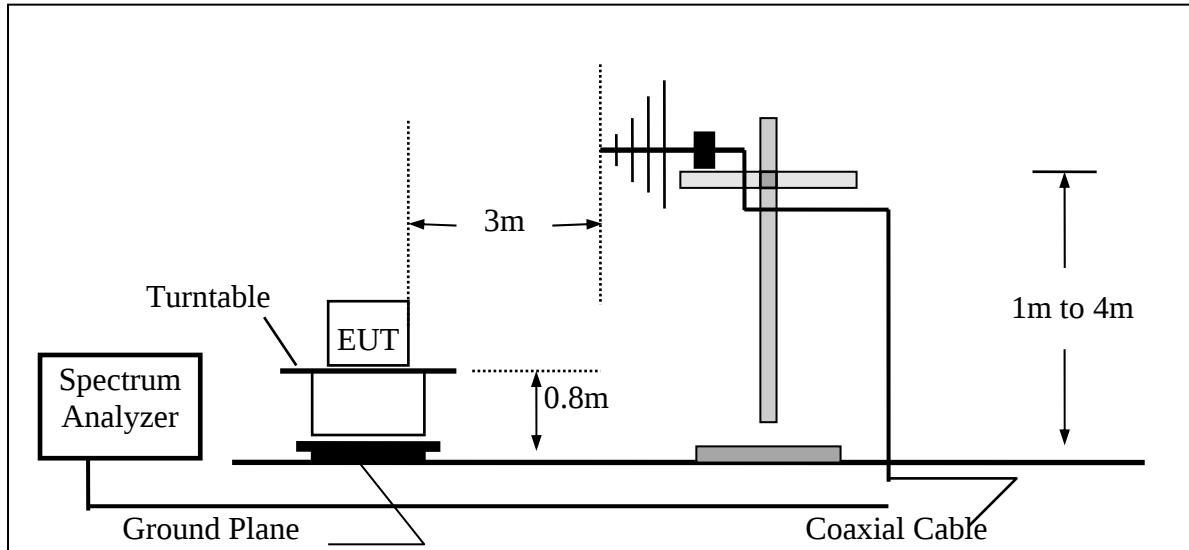

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

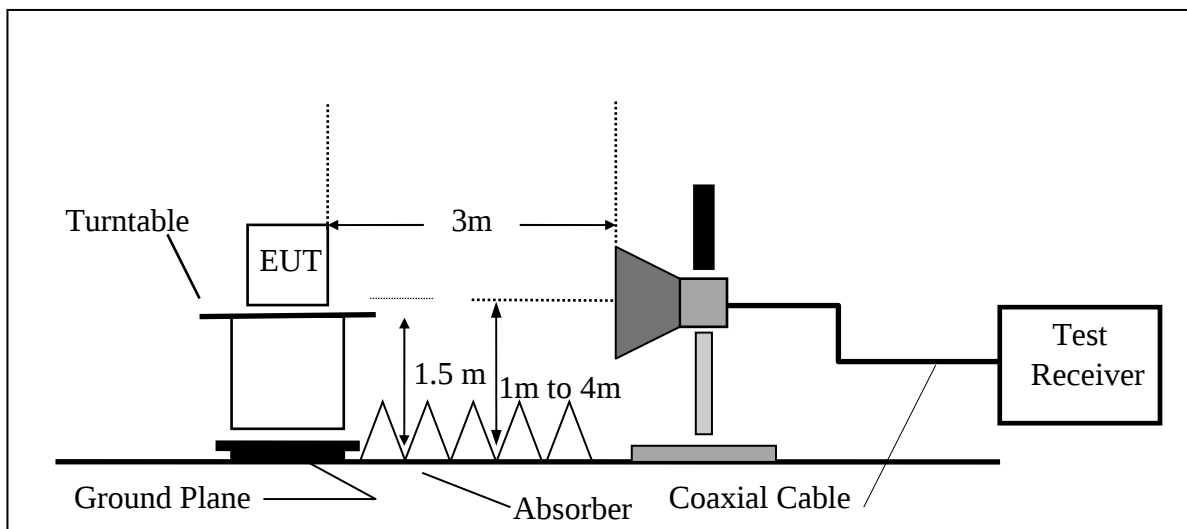

9.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100kHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

9.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Emission:

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2019/10/25
Test By Barry
Humidity 60 %

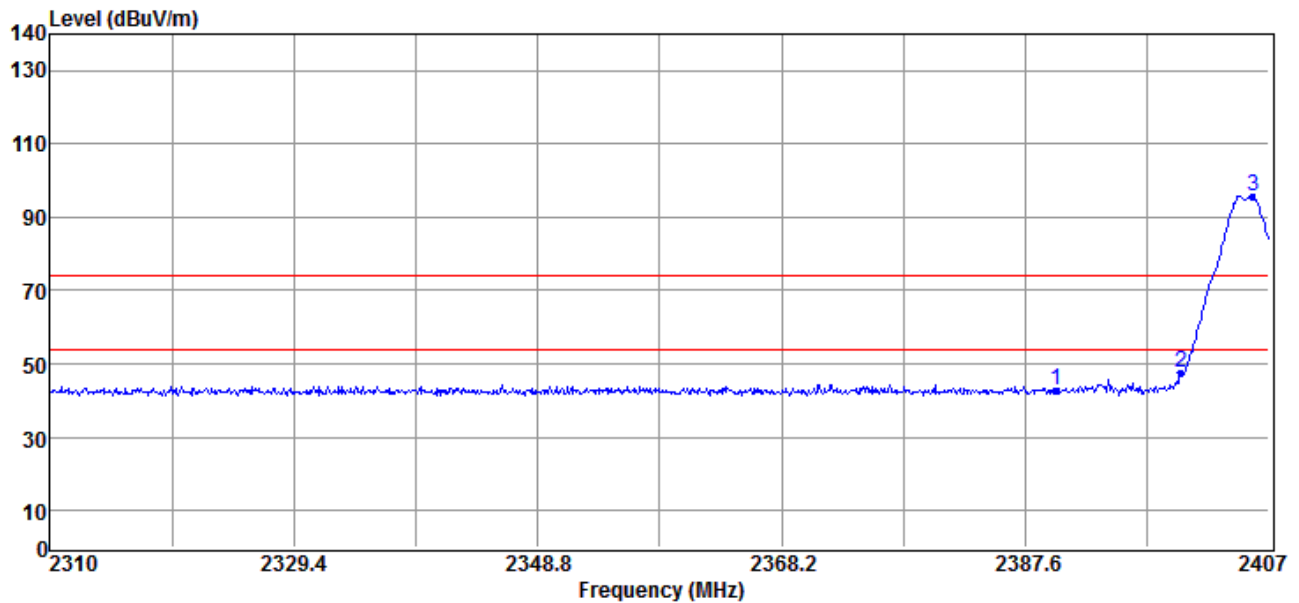

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	58.42	-15.84	42.58	74.00	-31.42	Peak	VERTICAL
2	2400.00	63.67	-15.86	47.81	75.76	-27.95	Peak	VERTICAL
3	2405.74	111.61	-15.85	95.76	F	--	Peak	VERTICAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.

Note: “F” denotes fundamental frequency

Operation Mode TX CH Low
 Fundamental Frequency 2402 MHz
 Temperature 25

Test Date 2019/10/25
 Test By Barry
 Humidity 60 %

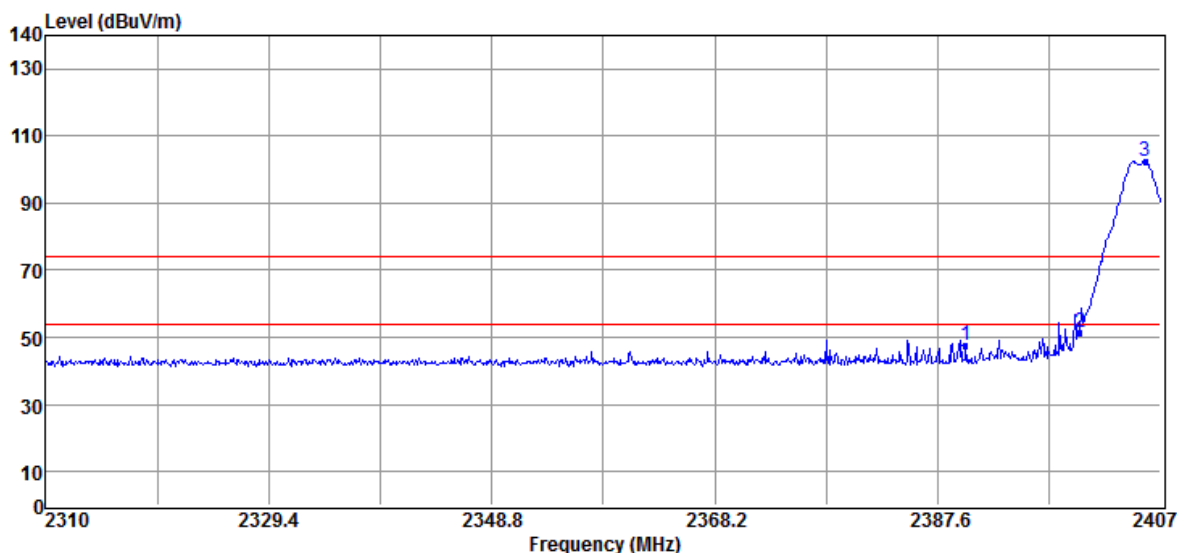

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2390.00	63.39	-15.84	47.55	74.00	-26.45	Peak	HORIZONTAL
2	2400.00	67.46	-15.86	51.60	82.47	-30.87	Peak	HORIZONTAL
3	2405.64	118.32	-15.85	102.47	F	--	Peak	HORIZONTAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25

Test Date 2019/10/25
Test By Barry
Humidity 60 %

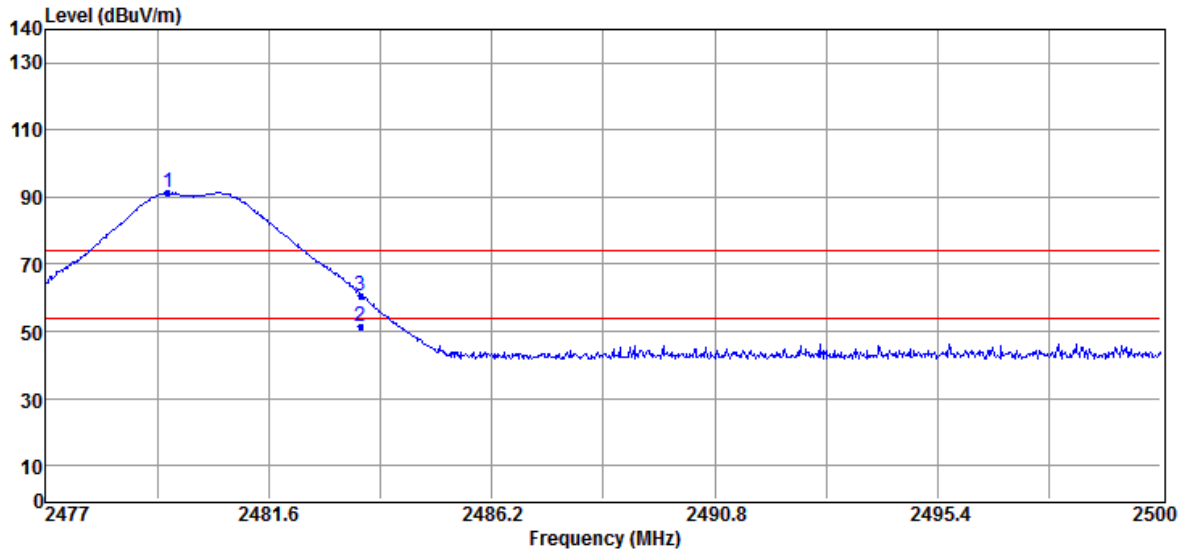

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2479.53	107.16	-15.84	91.32	F	--	Peak	VERTICAL
2	2483.50	67.11	-15.84	51.27	54.00	-2.73	Average	VERTICAL
3	2483.50	76.52	-15.84	60.68	74.00	-13.32	Peak	VERTICAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25

Test Date 2019/10/25
Test By Barry
Humidity 60 %

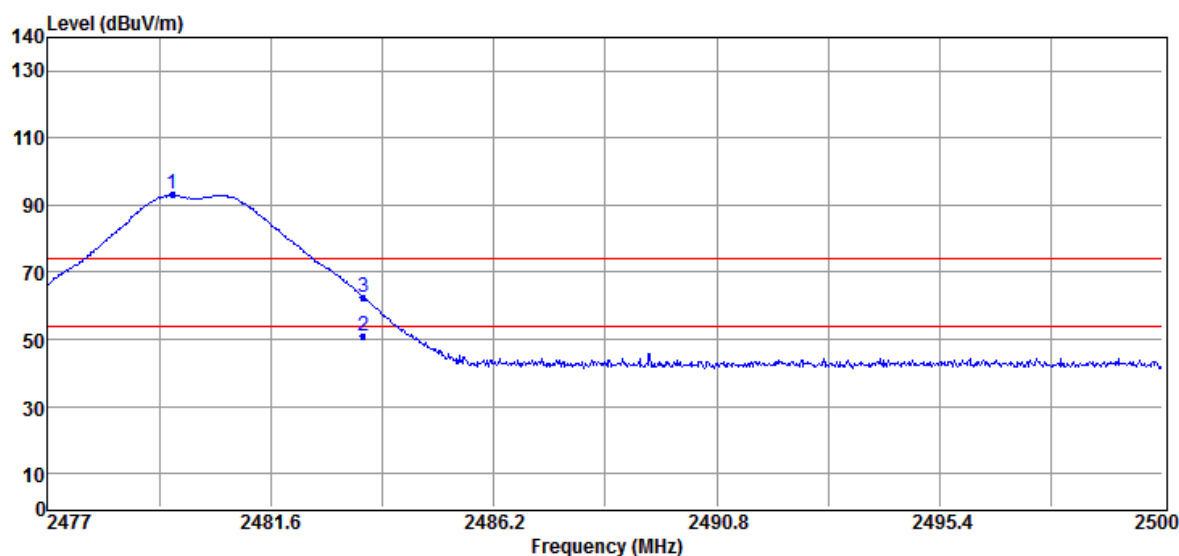

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	2479.58	108.96	-15.84	93.12	F	--	Peak	HORIZONTAL
2	2483.51	66.82	-15.84	50.98	54.00	-3.02	Average	HORIZONTAL
3	2483.51	78.49	-15.84	62.65	74.00	-11.35	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.

Note: “F” denotes fundamental frequency

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 issue 2, §5.2

(2)The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW =100kHz, VBW = 300kHz, Span =5 to 30% greater than emission BW, Sweep=Auto
4. Record the max. reading.
5. Repeat above procedures until all frequency measured were complete.

10.5 Measurement Result:

Zigbee

Frequency MHz	Power Density Reading (dBm)	Maximum Limit (dBm)
Low	-2.99	8
Mid	-2.45	8
High	-10.02	8


Zigbee Mode Power Spectral Density Test Plot (CH-Low)



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)

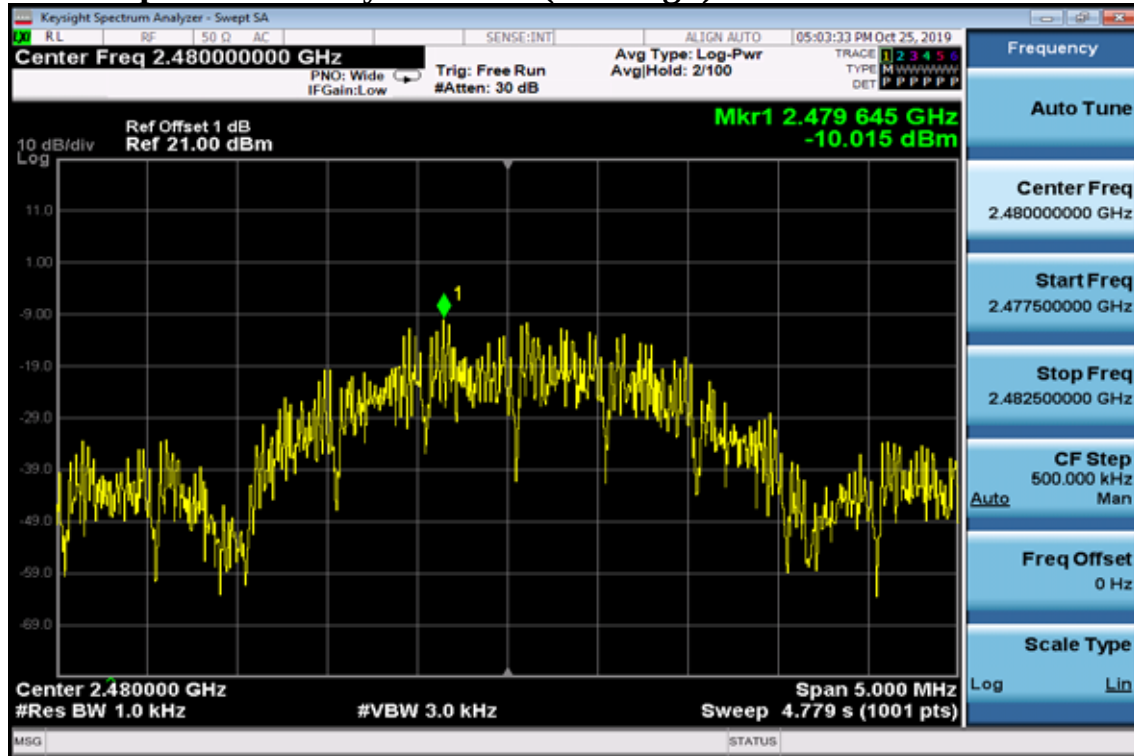

11 Antenna Requirement

11.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting as follow. Please see EUT photo and antenna spec. for details

Model	Antenna Type	Antenna Gain
KYRM-0083	Chip Antenna	0.5 dBi