

TEST REPORT

Product : SMART WIRELESS DOOR OPENER
Trade mark : N/A
Model/Type reference : GD810/GD811/GD812
Serial Number : N/A
Report Number : EED32L00337602
FCC ID : 2AU7E-GD81X
Date of Issue: : Mar. 27, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

ShenZhen SigmaWit Technology Co., Ltd
11th floor, Lingyun Building Honglang North 2nd Road,
Bao'an, ShenZhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

mark.chen.

Mark Chen

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Ware Xin

Ware Xin

Approved by:

Sam Chuang

Sam Chuang

Date:

Mar. 27, 2020

Check No.: 3096310179



2 Version

Version No.	Date	Description
00	Mar. 27, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.:GD810/GD811/GD812

Only the model GD810 was tested, Their electrical circuit design, layout, components used and internal wiring are identical, Only the type the name,number of external keys is different


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2).....	8
7 EQUIPMENT LIST	9
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
Appendix A): 20dB Occupied Bandwidth.....	12
Appendix B): Carrier Frequency Separation.....	16
Appendix C): Dwell Time.....	19
Appendix D): Hopping Channel Number.....	22
Appendix E): Conducted Peak Output Power.....	24
Appendix F): Band-edge for RF Conducted Emissions.....	26
Appendix G): RF Conducted Spurious Emissions.....	30
Appendix H) Pseudorandom Frequency Hopping Sequence.....	34
Appendix I) Antenna Requirement.....	35
Appendix J) AC Power Line Conducted Emission.....	36
Appendix K) Restricted bands around fundamental frequency (Radiated).....	39
Appendix L) Radiated Spurious Emissions.....	48
PHOTOGRAPHS OF TEST SETUP	52
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	56

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

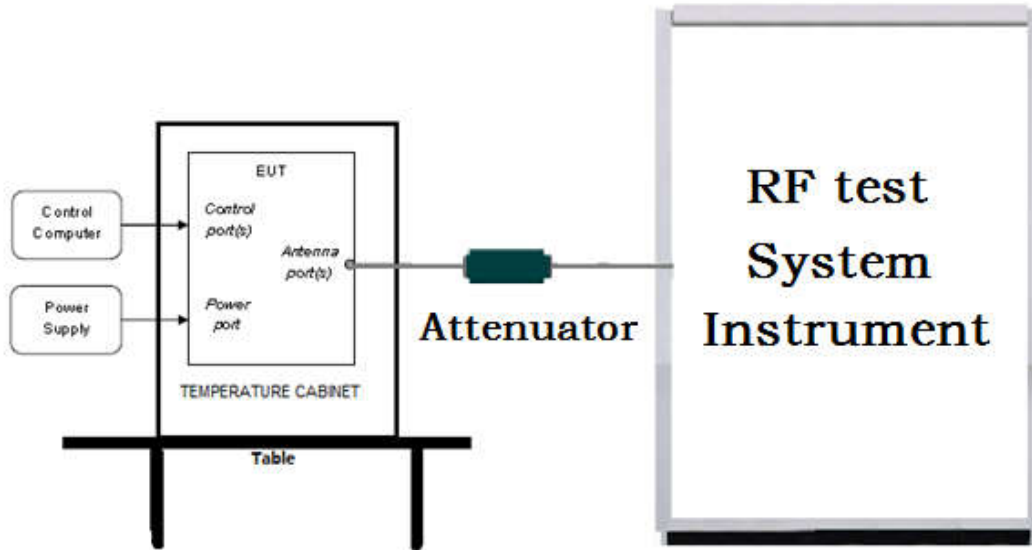

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

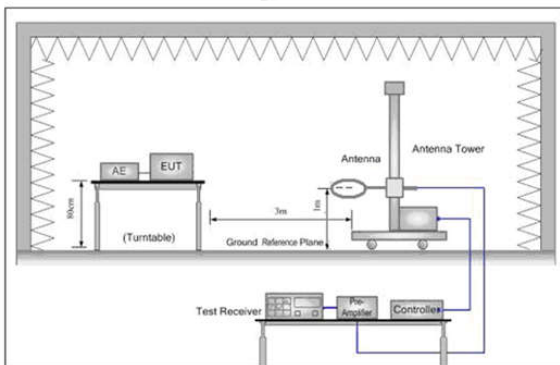


Figure 1. Below 30MHz

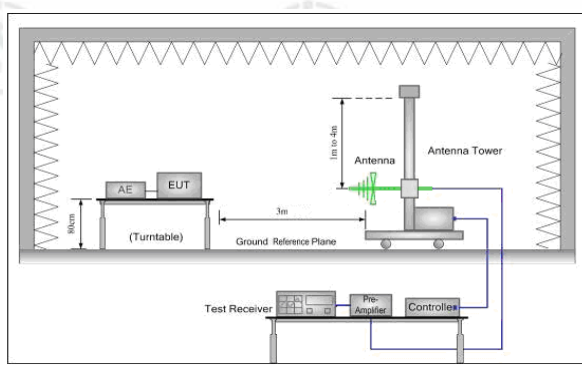


Figure 2. 30MHz to 1GHz


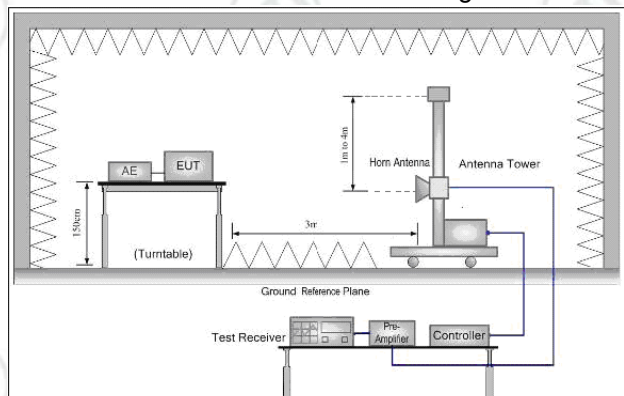


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

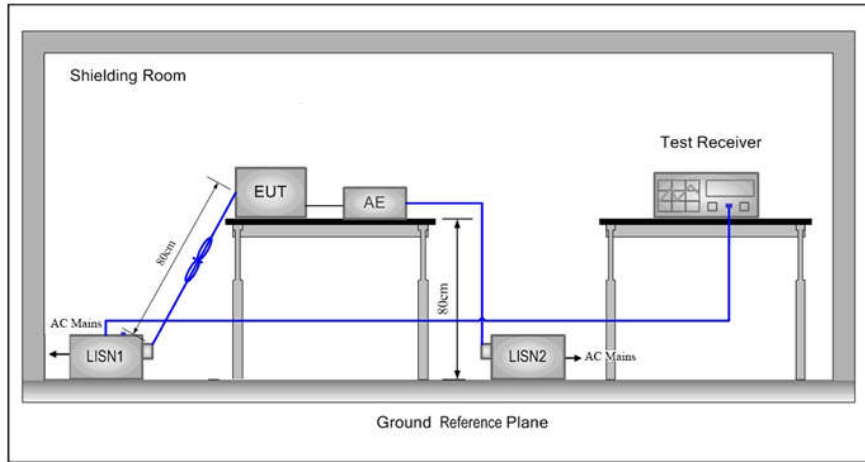

5.2 Test Environment

Operating Environment:	
Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2478 MHz	Channel 1	Channel 8	Channel 15
		2402MHz	2440MHz	2478MHz

6 General Information

6.1 Client Information

Applicant:	ShenZhen SigmaWit Technology Co., Ltd
Address of Applicant:	11th floor, Lingyun Building Honglang North 2nd Road, Bao'an, ShenZhen, China
Manufacturer:	ShenZhen SigmaWit Technology Co., Ltd
Address of Manufacturer:	11th floor, Lingyun Building Honglang North 2nd Road, Bao'an, ShenZhen, China
Factory:	ShenZhen SigmaWit Technology Co., Ltd
Address of Factory:	11th floor, Lingyun Building Honglang North 2nd Road, Bao'an, ShenZhen, China

6.2 General Description of EUT

Product Name:	SMART WIRELESS DOOR OPENER	
Model No.(EUT):	GD810/GD811/GD812	
Test Mode No.:	GD810	
Tark mark:	N/A	
EUT Supports Radios application	2402MHz to 2478MHz	
Power Supply:	Adapter	MODEL:XSC-0501000SU INPUT:100-240V~50/60Hz 0.4A OUTPUT:5V --- 1000mA
	LITHIUM BATTERY	MODEL:CR2450, DC 3V
Sample Received Date:	Nov. 13, 2019	
Sample tested Date:	Nov. 13, 2019 to Jan. 06, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz to 2478MHz
Modulation Type:	GFSK
Number of Channel:	15
Test Power Grade:	Tx power :8 dBm
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Software of EUT:	SecureCRT.exe
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Test Voltage:	DC 3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	5	2420MHz	9	2446MHz	13	2465MHz
2	2408MHz	6	2425MHz	10	2450MHz	14	2473MHz
3	2410MHz	7	2434MHz	11	2456MHz	15	2478MHz
4	2413MHz	8	2440MHz	12	2461MHz		

6.4 Description of Support Units

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	HP	HP 430 G3	5CD6082JLC	CTI	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY56376072	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	03-01-2019	02-29-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	05-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-16-2019	01-15-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	N/A	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth

Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100kHz, VBW = 300kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup



Test Result

99% OBW

Mode	Channel.	99% OBW [MHz]	Verdict
GFSK	LCH	0.08435	PASS
GFSK	MCH	0.08136	PASS
GFSK	HCH	0.08336	PASS

20 dB Bandwidth

Mode	Channel.	20dB Bandwidth [MHz]	Verdict
GFSK	LCH	0.2670	PASS
GFSK	MCH	0.2658	PASS
GFSK	HCH	0.2691	PASS

Test Graph
99% OBW



20 dB Bandwidth

Graphs	
GFSK/LCH	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 228.36 kHz</p> <p>Total Power: 4.06 dBm</p> <p>Transmit Freq Error: -61.786 kHz</p> <p>x dB Bandwidth: 267.0 kHz</p>
GFSK/MCH	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.440000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 228.85 kHz</p> <p>Total Power: 4.54 dBm</p> <p>Transmit Freq Error: -62.518 kHz</p> <p>x dB Bandwidth: 265.8 kHz</p>
GFSK/HCH	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.478000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.478 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 230.03 kHz</p> <p>Total Power: 3.92 dBm</p> <p>Transmit Freq Error: -64.624 kHz</p> <p>x dB Bandwidth: 269.1 kHz</p>

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = approximately 30% of the channel spacing, VBW \cong RBW, Sweep = auto. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

Test Setup



Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.999	PASS
GFSK	MCH	4.090	PASS
GFSK	HCH	4.130	PASS

Test Graph

Graphs	
<p>GFSK/LCH</p>	
<p>GFSK/MCH</p>	
<p>GFSK/HCH</p>	

Appendix C): Dwell Time

Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Sweep = auto


Test Setup



Result Table

Mode	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	LCH	1.0028	106.7	0.107	0.74	PASS
GFSK	MCH	1.0028	106.7	0.107	0.74	PASS
GFSK	HCH	1.012	106.7	0.108	0.74	PASS

Test Graph

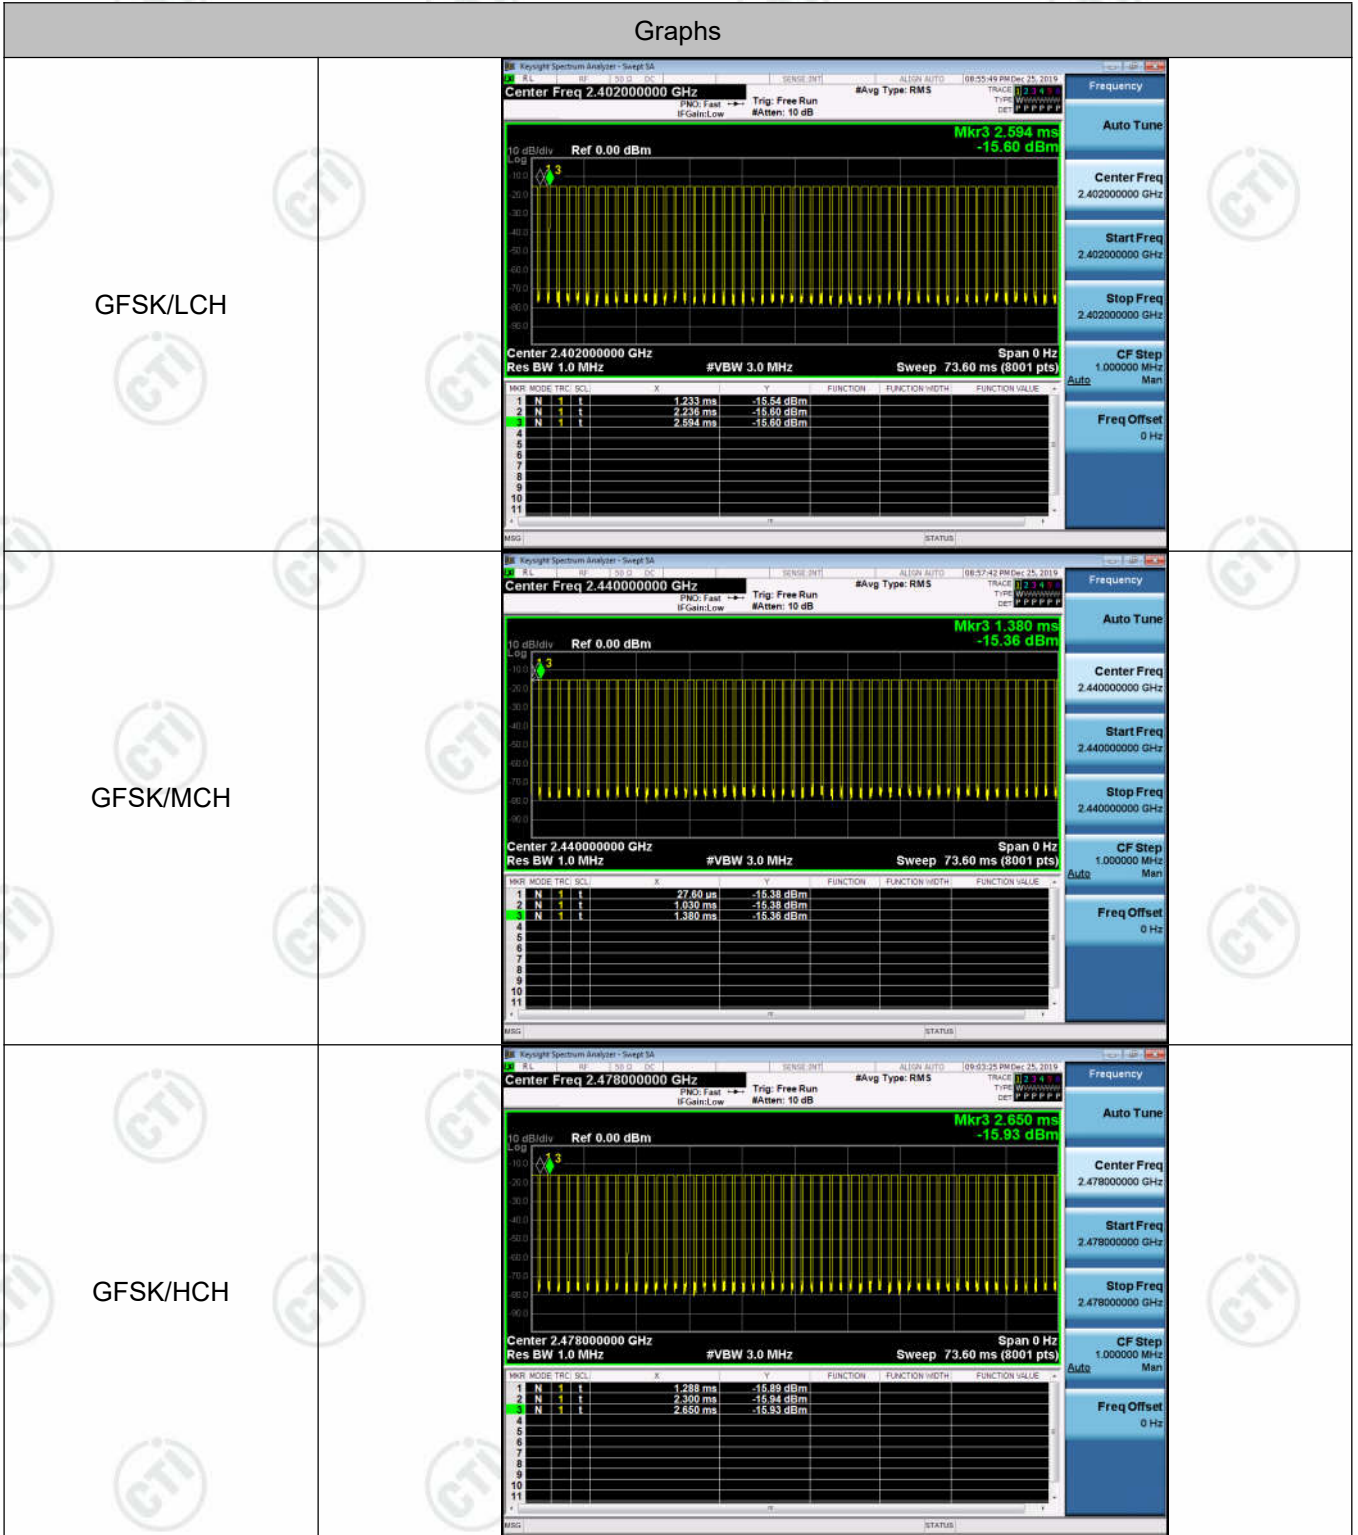

Appendix D): Hopping Channel Number

Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller., VBW \geq RBW.
4. Max hold, view and count how many channel in the band.


Test Setup



Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	15	PASS

Test Graph

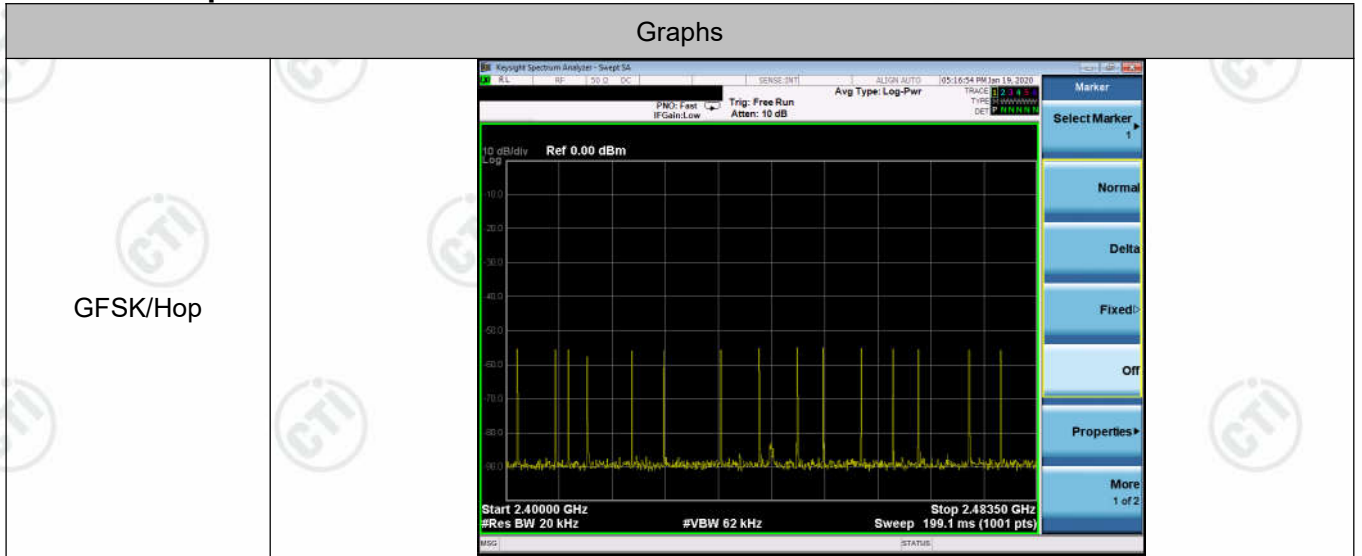

Appendix E): Conducted Peak Output Power

Test Limit

According to §15.247(b)(1).

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

Test Setup



Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	3.963	PASS
GFSK	MCH	4.390	PASS
GFSK	HCH	3.841	PASS

Test Graph



Appendix F): Band-edge for RF Conducted Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.

Test Setup




Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	3.943	Off	-53.744	-16.06	PASS
			-6.330	On	-52.321	-26.33	PASS
GFSK	HCH	2480	3.875	Off	-45.963	-16.13	PASS
			-5.255	On	-48.312	-25.26	PASS

Test Graph



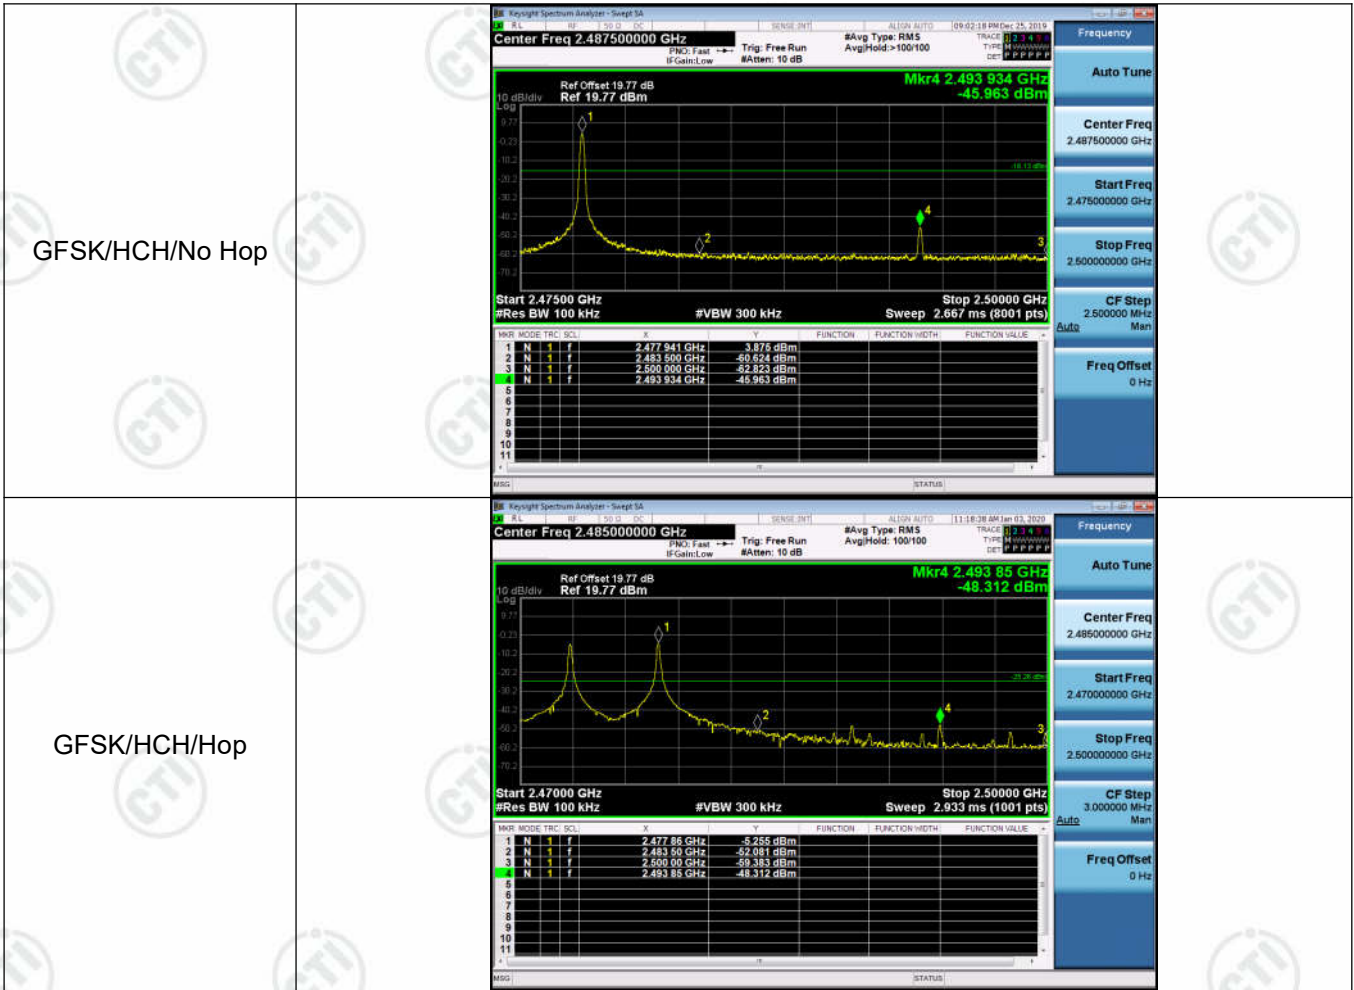

Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.


Test Setup

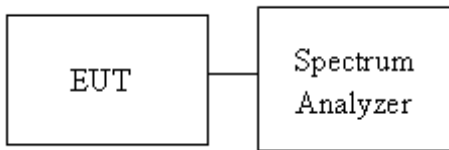


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	3.895	<Limit	PASS
GFSK	MCH	4.371	<Limit	PASS
GFSK	HCH	3.836	<Limit	PASS


Test Graph

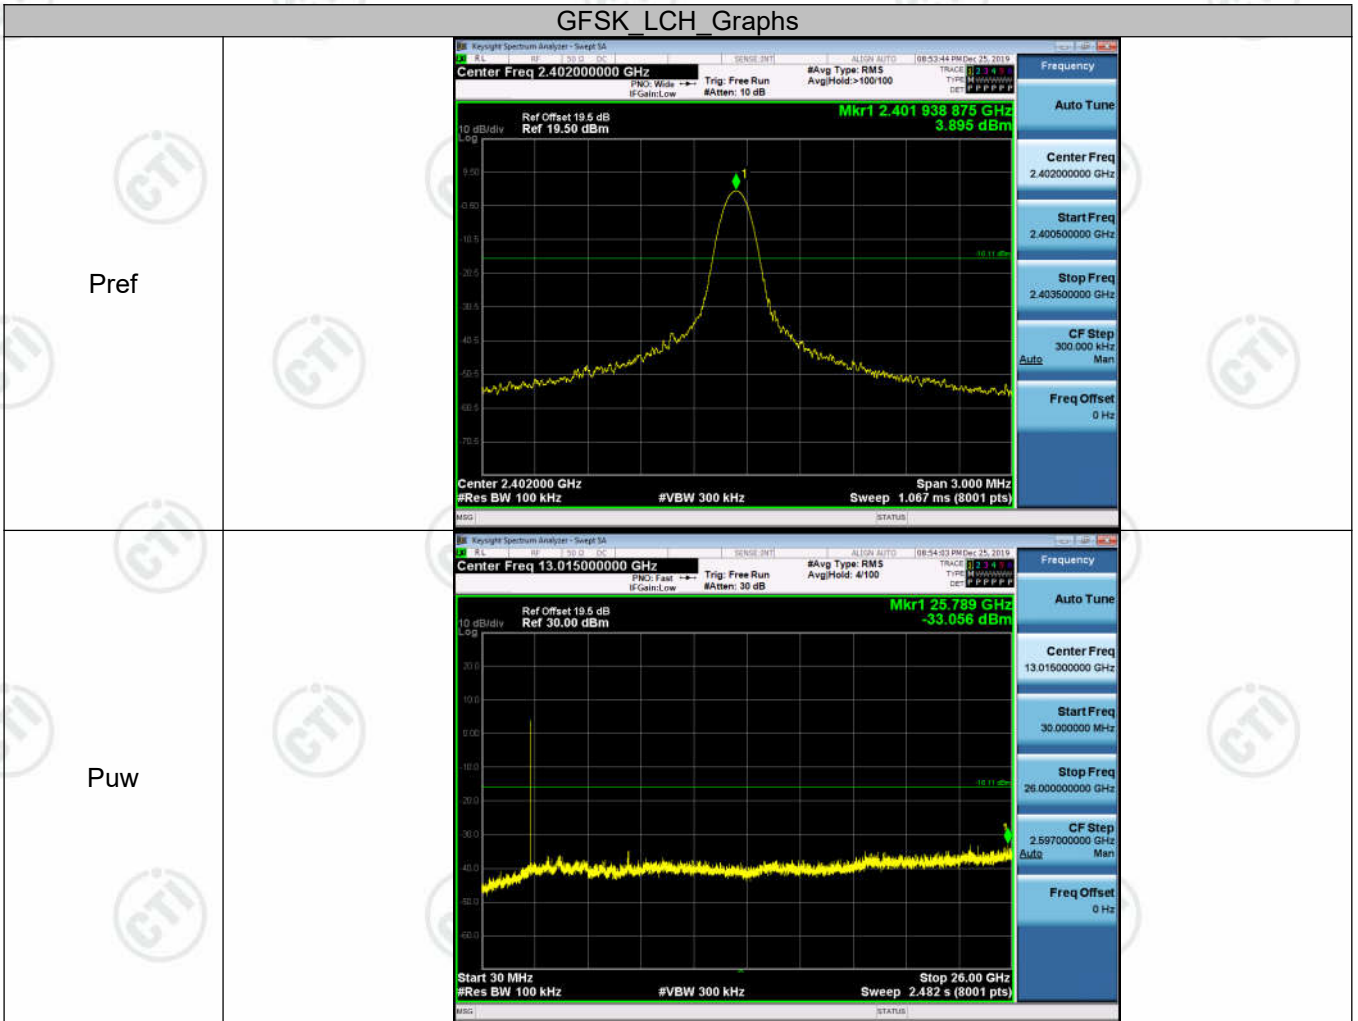

GFSK_MCH_Graphs

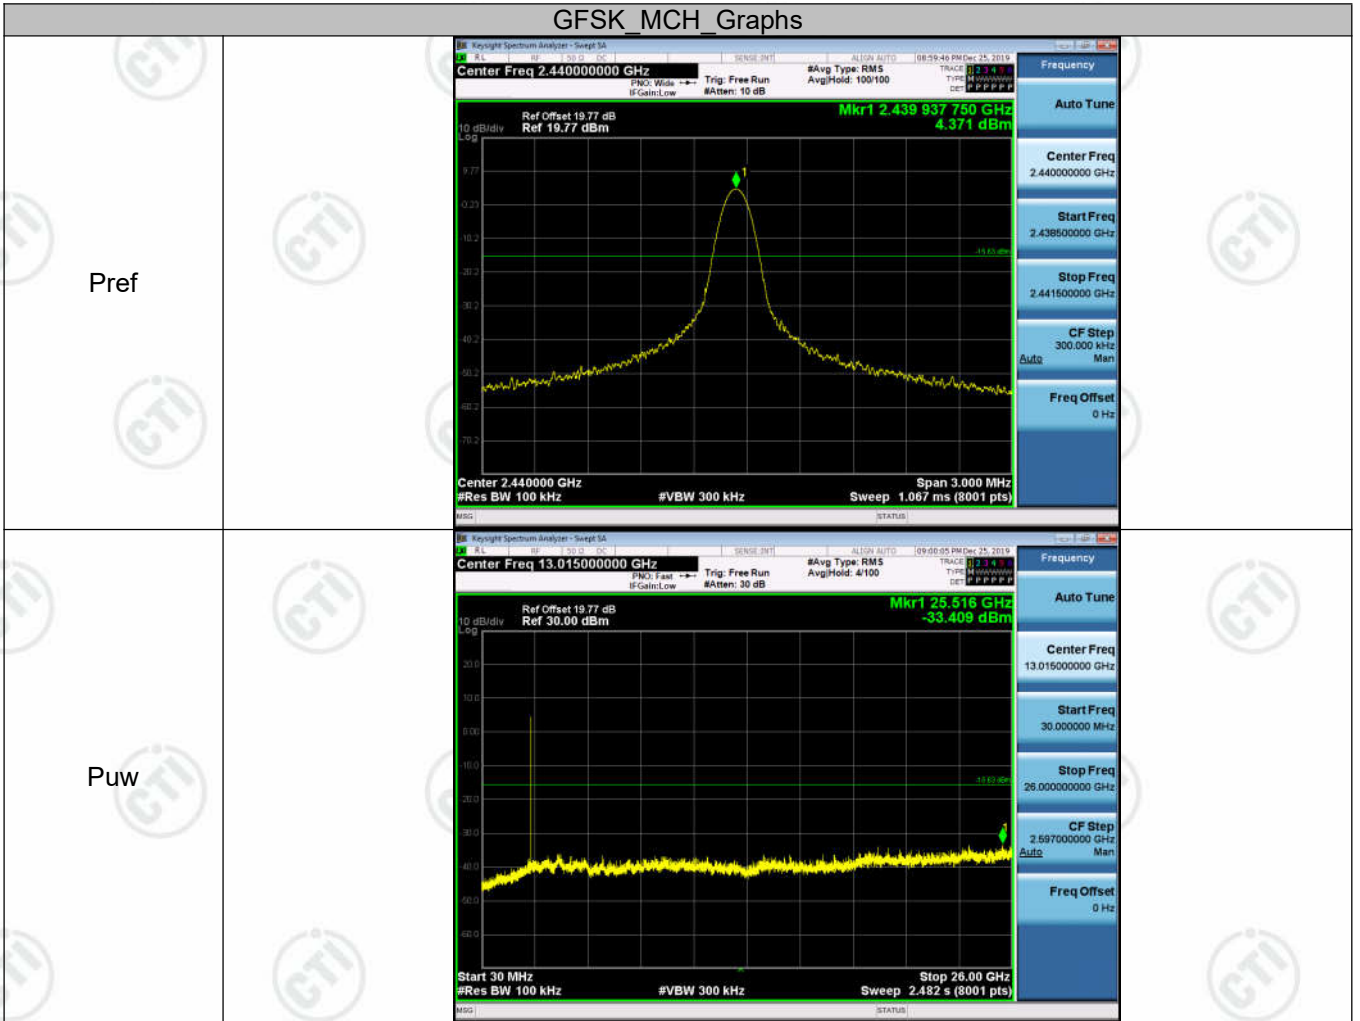

GFSK_HCH_Graphs

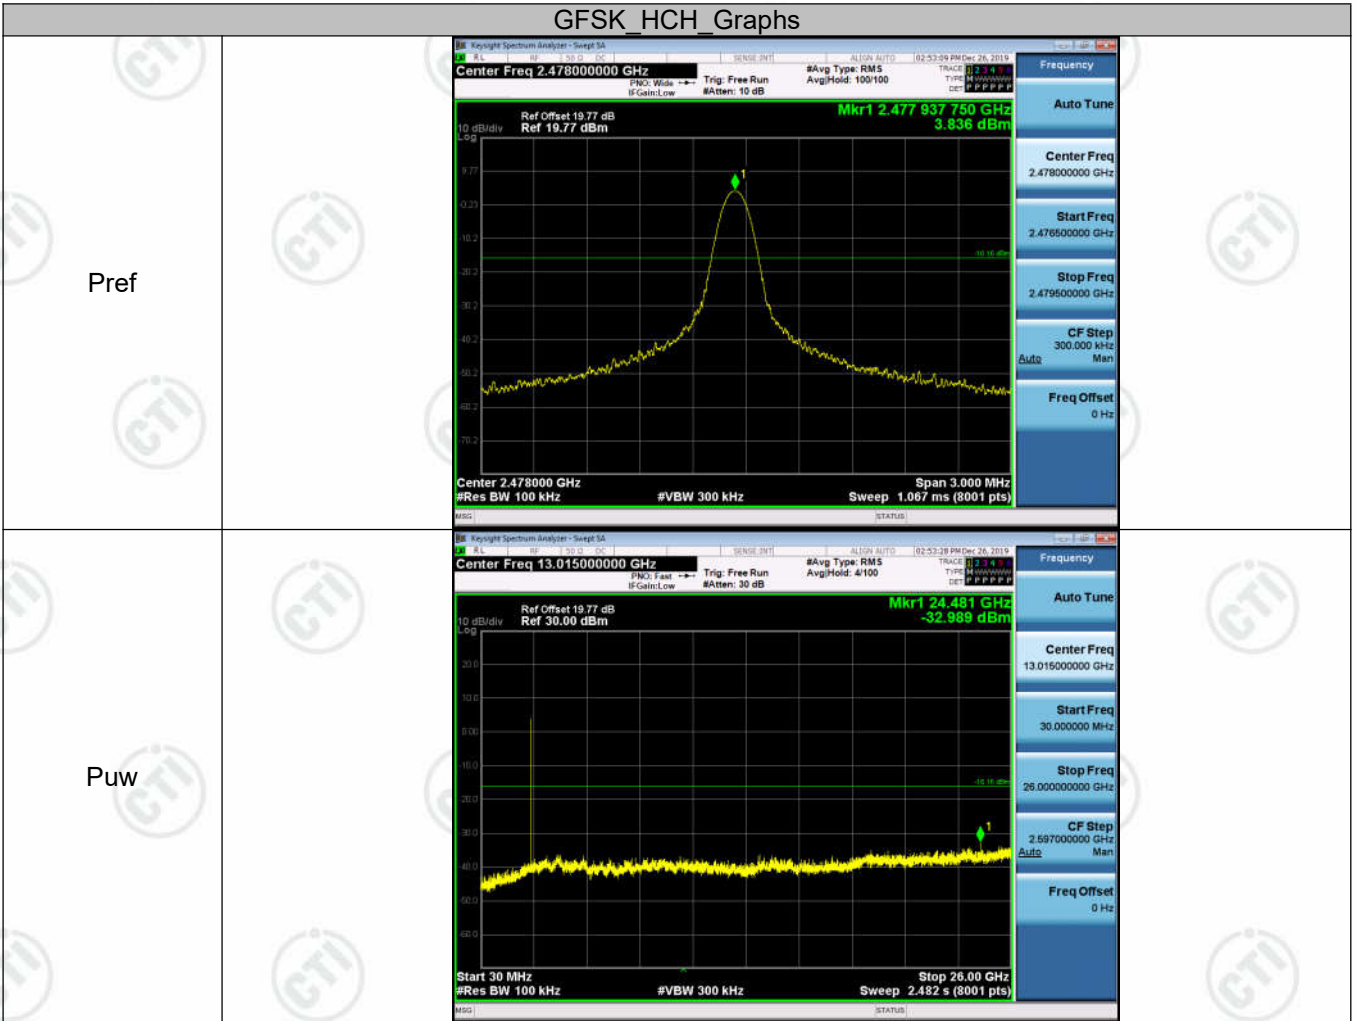

Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="317 952 1369 1099" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1198 1273 1346" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I) Antenna Requirement



15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

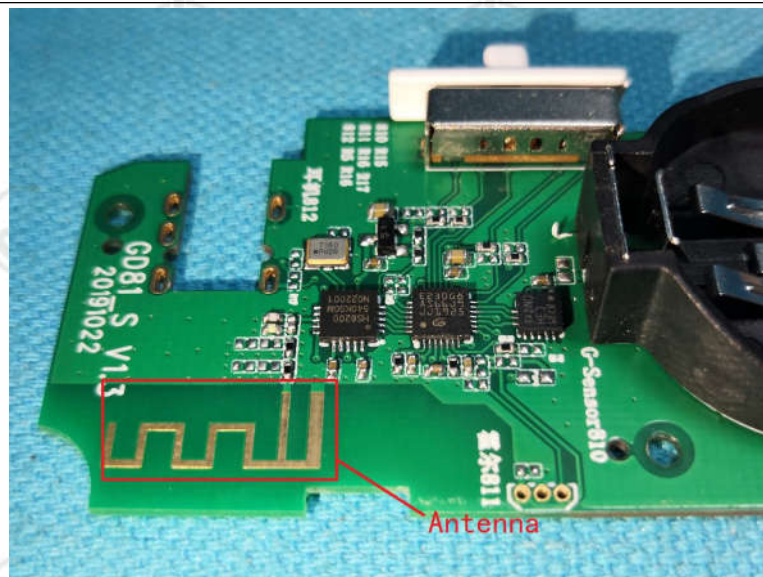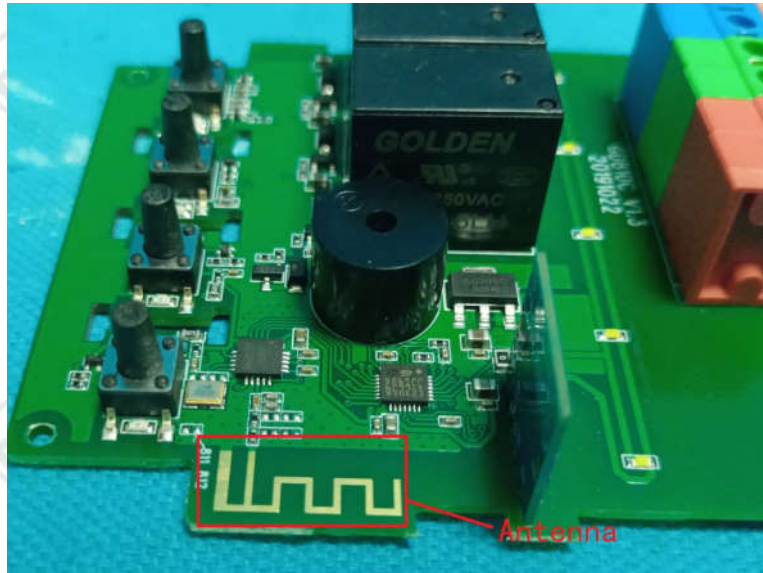

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

Appendix J) AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 																
<p>Limit:</p>	<table border="1" data-bbox="497 1160 1369 1379"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

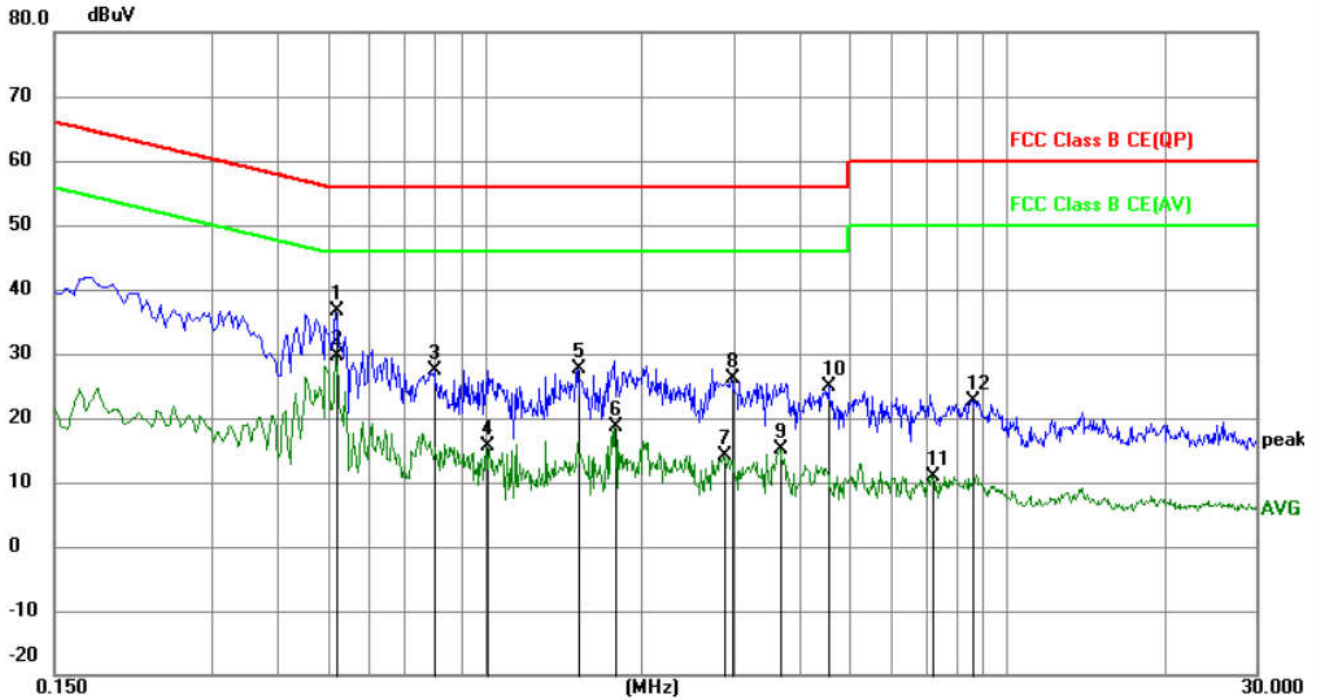

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.5190	26.71	10.02	36.73	56.00	-19.27	QP	
2	*	0.5190	19.72	10.02	29.74	46.00	-16.26	AVG	
3		0.8025	17.50	9.91	27.41	56.00	-28.59	QP	
4		1.0050	5.65	9.91	15.56	46.00	-30.44	AVG	
5		1.5090	17.81	9.87	27.68	56.00	-28.32	QP	
6		1.7745	8.72	9.85	18.57	46.00	-27.43	AVG	
7		2.8815	4.25	9.83	14.08	46.00	-31.92	AVG	
8		2.9715	16.18	9.83	26.01	56.00	-29.99	QP	
9		3.6825	5.22	9.83	15.05	46.00	-30.95	AVG	
10		4.5690	15.13	9.83	24.96	56.00	-31.04	QP	
11		7.1835	1.03	9.86	10.89	50.00	-39.11	AVG	
12		8.6325	12.77	9.91	22.68	60.00	-37.32	QP	

Neutral line:

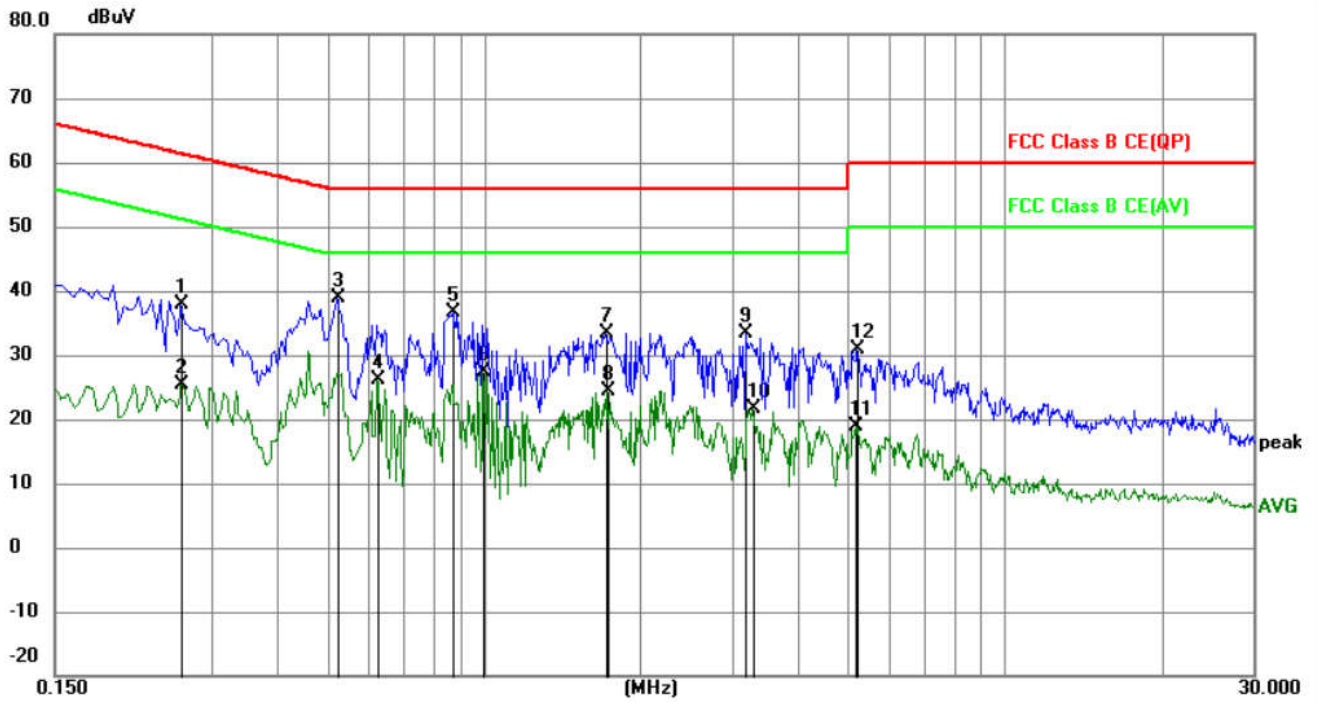

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2625	27.74	10.07	37.81	61.35	-23.54	QP	
2	0.2625	15.27	10.07	25.34	51.35	-26.01	AVG	
3 *	0.5235	28.76	10.03	38.79	56.00	-17.21	QP	
4	0.6270	16.16	9.99	26.15	46.00	-19.85	AVG	
5	0.8745	26.73	9.92	36.65	56.00	-19.35	QP	
6	0.9960	17.49	9.91	27.40	46.00	-18.60	AVG	
7	1.7115	23.49	9.85	33.34	56.00	-22.66	QP	
8	1.7295	14.64	9.85	24.49	46.00	-21.51	AVG	
9	3.1875	23.57	9.83	33.40	56.00	-22.60	QP	
10	3.2865	11.72	9.83	21.55	46.00	-24.45	AVG	
11	5.1810	8.98	9.83	18.81	50.00	-31.19	AVG	
12	5.1945	21.06	9.83	30.89	60.00	-29.11	QP	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBuV/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		

Test plot as follows:

Mode:	GFSK	Channel:	2402
Remark:	PK		


Test Graph

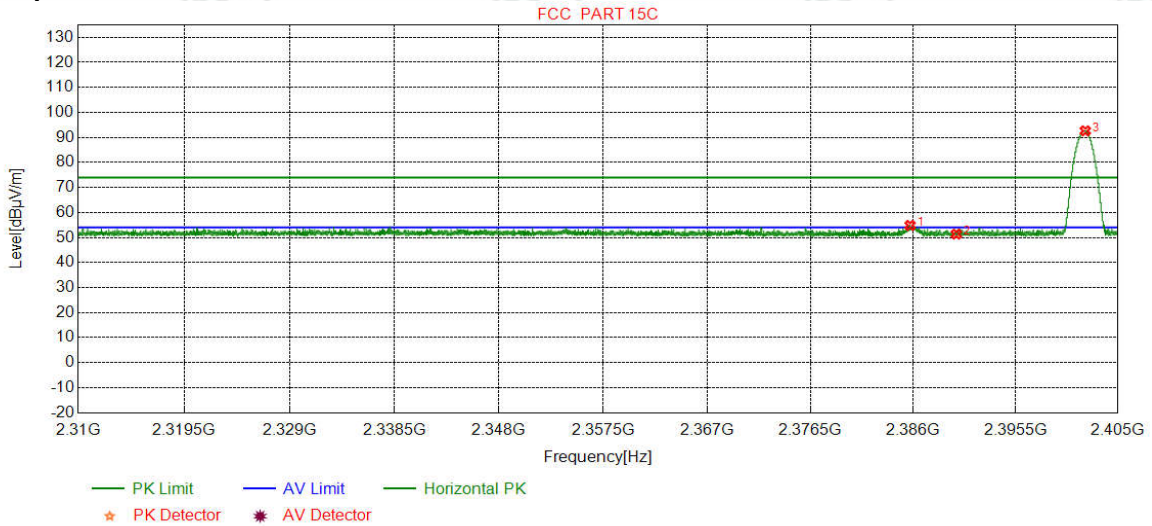

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2385.7200	32.24	13.41	-42.44	51.63	54.84	74.00	19.16	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	48.18	51.36	74.00	22.64	Pass	Horizontal
3	2401.9788	32.26	13.31	-42.43	89.50	92.64	74.00	-18.64	Pass	Horizontal

Mode:	GFSK	Channel:	2402
Remark:	PK		


Test Graph

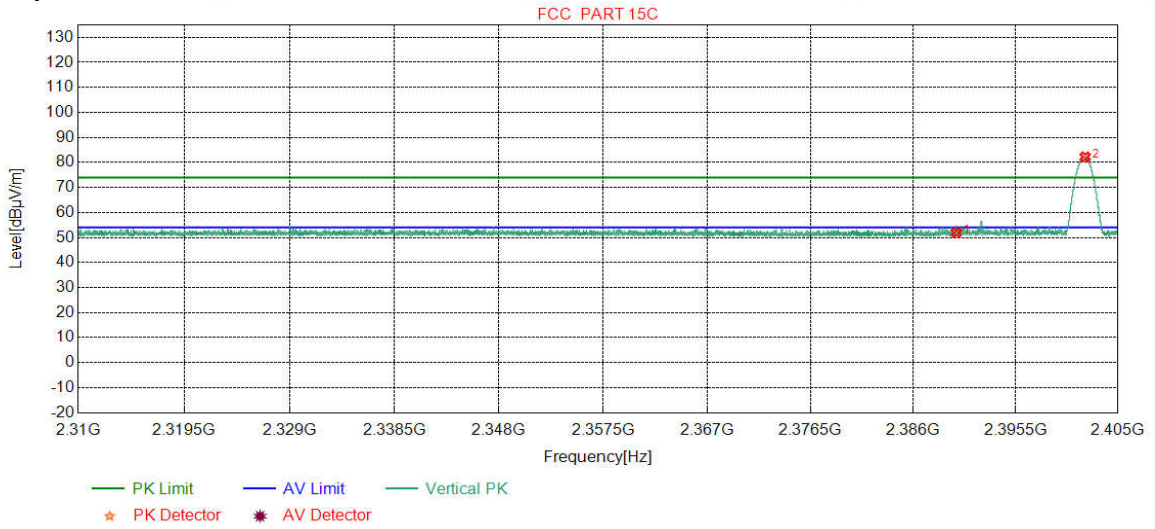

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	48.77	51.95	74.00	22.05	Pass	Vertical
2	2401.9598	32.26	13.31	-42.43	79.06	82.20	74.00	-8.20	Pass	Vertical

Mode:	GFSK	Channel:	2402
Remark:	AV		


Test Graph

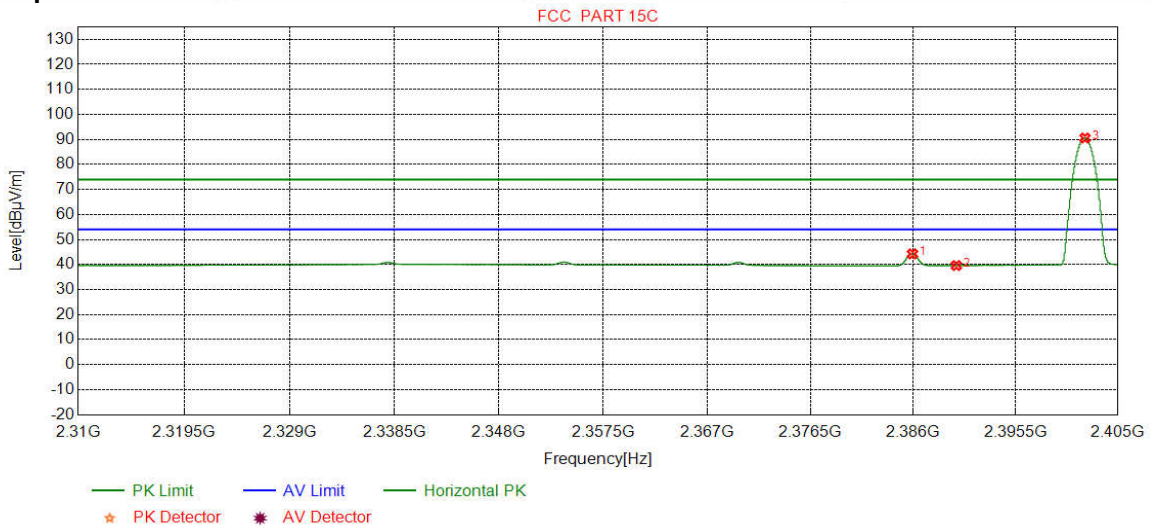

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2385.9354	32.24	13.40	-42.44	41.06	44.26	54.00	9.74	Pass	Horizontal
2	2390.0000	32.25	13.37	-42.44	36.41	39.59	54.00	14.41	Pass	Horizontal
3	2401.9535	32.26	13.31	-42.43	87.43	90.57	54.00	-36.57	Pass	Horizontal

Mode:	GFSK	Channel:	2402
Remark:	AV		


Test Graph

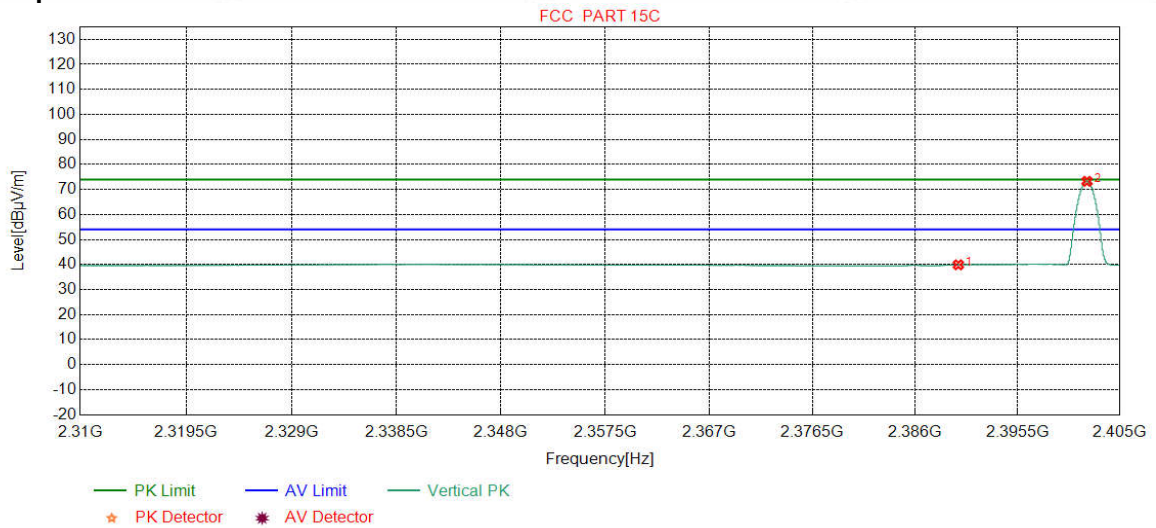

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	36.71	39.89	54.00	14.11	Pass	Vertical
2	2401.9535	32.26	13.31	-42.43	70.10	73.24	54.00	-19.24	Pass	Vertical

Mode:	GFSK	Channel:	2478
Remark:	PK		


Test Graph

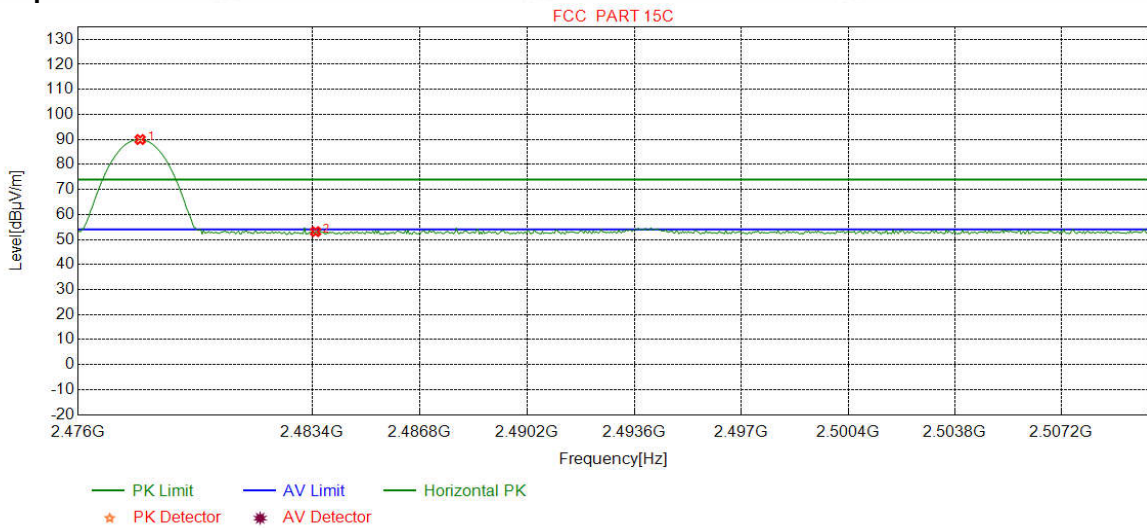

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2477.9574	32.37	13.40	-42.40	86.59	89.96	74.00	-15.96	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	49.79	53.15	74.00	20.85	Pass	Horizontal

Mode:	GFSK	Channel:	2478
Remark:	PK		


Test Graph

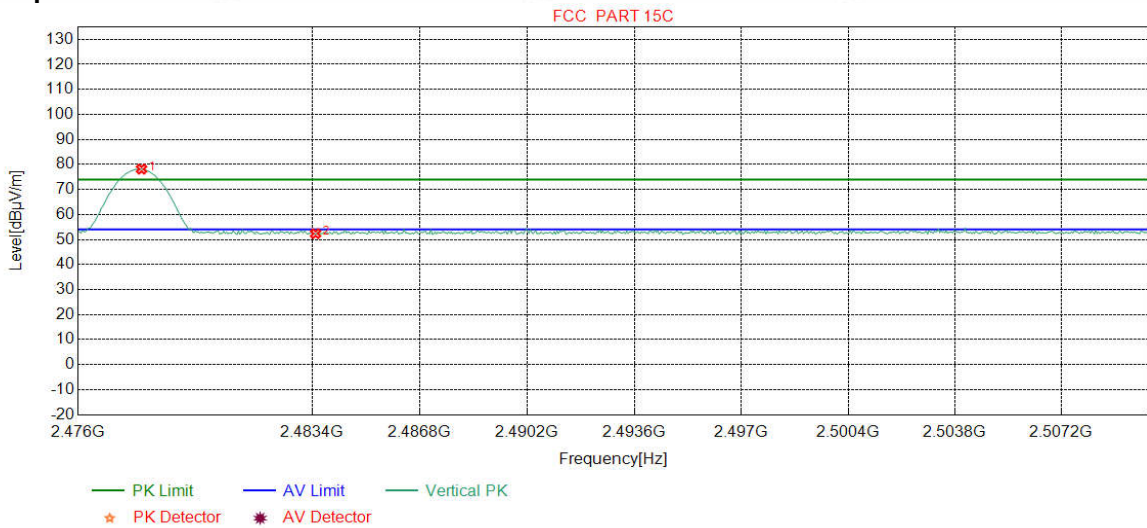

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2478.0000	32.37	13.40	-42.40	74.76	78.13	74.00	-4.13	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	48.98	52.34	74.00	21.66	Pass	Vertical

Mode:	GFSK	Channel:	2478
Remark:	AV		


Test Graph

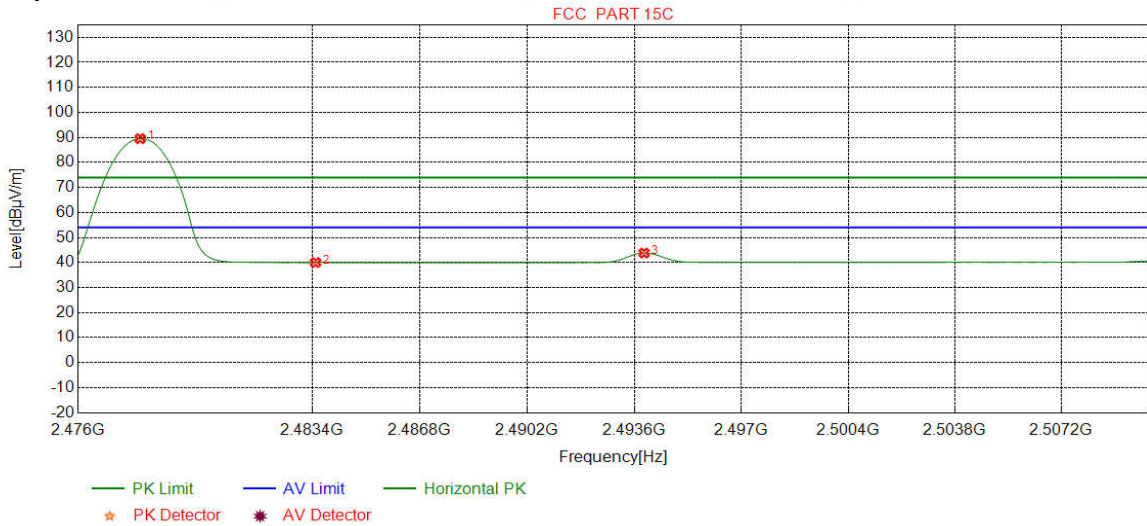

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2477.9574	32.37	13.40	-42.40	86.14	89.51	54.00	-35.51	Pass	Horizontal
2	2483.5000	32.38	13.38	-42.40	36.65	40.01	54.00	13.99	Pass	Horizontal
3	2493.9149	32.39	13.33	-42.39	40.46	43.79	54.00	10.21	Pass	Horizontal

Mode:	GFSK	Channel:	2478
Remark:	AV		

Test Graph

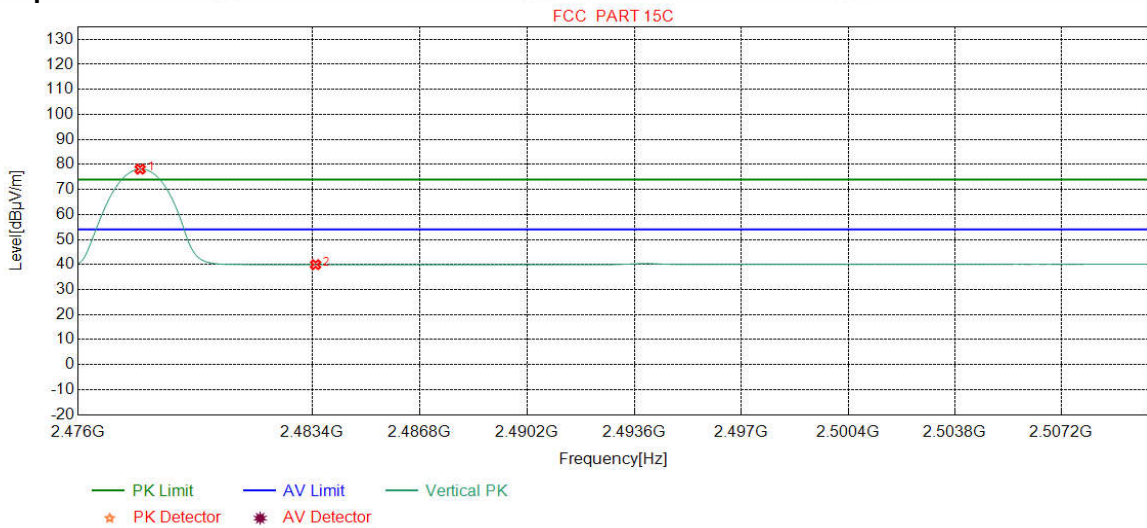

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity
1	2477.9574	32.37	13.40	-42.40	74.73	78.10	54.00	-24.10	Pass	Vertical
2	2483.5000	32.38	13.38	-42.40	36.60	39.96	54.00	14.04	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the GFSK of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

**Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz**

Mode:			GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	42.5143	12.75	0.74	-32.11	39.51	20.89	40.00	19.11	Pass	H	PK
2	122.8383	8.77	1.31	-32.05	40.96	18.99	43.50	24.51	Pass	H	PK
3	241.1901	11.97	1.84	-31.89	51.69	33.61	46.00	12.39	Pass	H	PK
4	288.3368	12.97	2.02	-31.89	48.61	31.71	46.00	14.29	Pass	H	PK
5	600.0290	19.00	2.96	-31.99	43.44	33.41	46.00	12.59	Pass	H	PK
6	974.9715	22.55	3.75	-30.95	42.63	37.98	54.00	16.02	Pass	H	PK
7	53.7674	12.60	0.83	-32.09	41.34	22.68	40.00	17.32	Pass	V	PK
8	184.3424	9.41	1.59	-31.98	46.69	25.71	43.50	17.79	Pass	V	PK
9	208.8859	11.13	1.71	-31.94	45.44	26.34	43.50	17.16	Pass	V	PK
10	411.4421	15.58	2.42	-31.83	38.96	25.13	46.00	20.87	Pass	V	PK
11	600.0290	19.00	2.96	-31.99	43.34	33.31	46.00	12.69	Pass	V	PK
12	974.9715	22.55	3.75	-30.95	41.18	36.53	54.00	17.47	Pass	V	PK

Transmitter Emission above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2966.3966	33.15	4.45	-42.14	50.64	46.10	74.00	27.90	Pass	H	PK
2	3468.0312	33.39	4.45	-41.84	49.93	45.93	74.00	28.07	Pass	H	PK
3	4804.0000	34.50	4.55	-40.66	53.07	51.46	74.00	22.54	Pass	H	PK
4	7206.0000	36.31	5.81	-41.02	51.94	53.04	74.00	20.96	Pass	H	PK
5	9608.0000	37.64	6.63	-40.76	46.04	49.55	74.00	24.45	Pass	H	PK
6	12010.000	39.31	7.60	-41.21	46.72	52.42	74.00	21.58	Pass	H	PK
7	2997.1997	33.20	4.54	-42.12	51.97	47.59	74.00	26.41	Pass	V	PK
8	3379.0253	33.35	4.54	-41.89	49.33	45.33	74.00	28.67	Pass	V	PK
9	4804.0000	34.50	4.55	-40.66	54.74	53.13	74.00	20.87	Pass	V	PK
10	7206.0000	36.31	5.81	-41.02	48.04	49.14	74.00	24.86	Pass	V	PK
11	9608.0000	37.64	6.63	-40.76	46.13	49.64	74.00	24.36	Pass	V	PK
12	12010.000	39.31	7.60	-41.21	45.50	51.20	74.00	22.80	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2440	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2925.9926	33.08	4.39	-42.16	50.89	46.20	74.00	27.80	Pass	H	PK
2	3947.0631	33.76	4.34	-40.89	50.20	47.41	74.00	26.59	Pass	H	PK
3	4880.0000	34.50	4.80	-40.60	54.05	52.75	74.00	21.25	Pass	H	PK
4	7320.0000	36.42	5.85	-40.92	51.11	52.46	74.00	21.54	Pass	H	PK
5	9760.0000	37.70	6.73	-40.62	46.70	50.51	74.00	23.49	Pass	H	PK
6	12200.000	39.42	7.67	-41.17	45.67	51.59	74.00	22.41	Pass	H	PK
7	3199.0133	33.28	4.65	-42.00	51.29	47.22	74.00	26.78	Pass	V	PK
8	3944.0629	33.76	4.34	-40.90	49.77	46.97	74.00	27.03	Pass	V	PK
9	4880.0000	34.50	4.80	-40.60	55.07	53.77	74.00	20.23	Pass	V	PK
10	7320.0000	36.42	5.85	-40.92	48.52	49.87	74.00	24.13	Pass	V	PK
11	9760.0000	37.70	6.73	-40.62	46.40	50.21	74.00	23.79	Pass	V	PK
12	12200.000	39.42	7.67	-41.17	45.57	51.49	74.00	22.51	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2478	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2997.9998	33.20	4.54	-42.12	50.76	46.38	74.00	27.62	Pass	H	PK
2	3808.0539	33.65	4.37	-41.18	50.38	47.22	74.00	26.78	Pass	H	PK
3	4956.0000	34.50	4.82	-40.54	53.25	52.03	74.00	21.97	Pass	H	PK
4	7434.0000	36.53	5.85	-40.82	50.74	52.30	74.00	21.70	Pass	H	PK
5	9912.0000	37.76	6.78	-40.48	46.72	50.78	74.00	23.22	Pass	H	PK
6	12390.000	39.53	7.82	-41.12	45.89	52.12	74.00	21.88	Pass	H	PK
7	3069.0046	33.23	4.79	-42.08	51.04	46.98	74.00	27.02	Pass	V	PK
8	3890.0593	33.71	4.34	-41.00	50.18	47.23	74.00	26.77	Pass	V	PK
9	4956.0000	34.50	4.82	-40.54	53.60	52.38	74.00	21.62	Pass	V	PK
10	7434.0000	36.53	5.85	-40.82	49.23	50.79	74.00	23.21	Pass	V	PK
11	9912.0000	37.76	6.78	-40.48	45.79	49.85	74.00	24.15	Pass	V	PK
12	12390.000	39.53	7.82	-41.12	45.53	51.76	74.00	22.24	Pass	V	PK

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.