



# RF TEST REPORT

**Applicant** Shanghai Smawave Technology Co. ,Ltd  
**FCC ID** 2AU8HMGL6201A  
**Product** LTE Module  
**Brand** Smawave  
**Model** MGL6201A  
**Report No.** R2001A0002-R4V1  
**Issue Date** February 20, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2(2019) / FCC CFR 47 Part 90R(2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Peng Tao*

*Performed by: Peng Tao*

*Kai Xu*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory.....	4
1.1. Notes of the Test Report.....	4
1.2. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General Information.....	5
3. Applied Standards.....	6
4. Test Configuration.....	7
5. Test Case Results.....	8
5.1. RF Power Output and Effective Radiated Power.....	8
5.2. Occupied Bandwidth.....	13
5.4. Band Edge Compliance.....	17
5.5. Peak-to-Average Power Ratio (PAPR).....	36
5.6. Frequency Stability.....	38
5.7. Spurious Emissions at Antenna Terminals.....	41
5.8. Radiates Spurious Emission.....	45
6. Main Test Instruments.....	49



## Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output and Effective Radiated Power	2.1046/90.635 (b) 90.542	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.543	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	90.539 (c)	PASS
6	Spurious Emissions at Antenna Terminals	90.543 (e)	PASS
7	Radiates Spurious Emission	90.543 (e)	PASS
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			
Date of Testing: October 1, 2019~ November 7, 2019 and December 31, 2019			



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Shanghai Smawave Technology Co. ,Ltd
Applicant address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Shanghai Smawave Technology Co. ,Ltd
Manufacturer address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

### 2.2. General Information

EUT Description			
Model	MGL6201A		
Product IMEI	860524031979550		
Hardware Version	V2.0		
Software Version	CAT12-A		
Power Supply	External Power Supply		
Antenna Type	External Antenna		
Antenna Gain	1.04dBi		
Test Mode(s)	LTE Band 14;		
Test Modulation	(LTE)QPSK, 16QAM, 64QAM;		
Maximum E.R.P.	LTE Band 14: 22.03dBm		
Rated Power Supply Voltage	3.3V		
Extreme Voltage	Minimum: 3V    Maximum: 3.6V		
Extreme Temperature	Lowest: -40°C    Highest: +70°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 14	788 ~ 798	758 ~ 768
Note: The information of the EUT is declared by the manufacturer.			



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 90R (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC 47 CFR Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**



## 4. Test Configuration

The main board of the product (product name: SGL4010) is the same as the module(module name:MGL6201A), including the PCB layout and the BOM list , without any change.

The conducted test results will reference to SGL4010 (report No.: R1909A0578-R4).

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 14

Test items	Bandwidth (MHz)		Modulation			RB			Test Channel		
	5	10	QPSK	16QAM	64QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	-	-	O	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	-	-	O	-	-	O	O	O
Radiates Spurious Emission	O	O	O	-	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.										

## 5. Test Case Results

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement


During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and **ANSI C63.26 (2015)**.


- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$



**Test Setup**

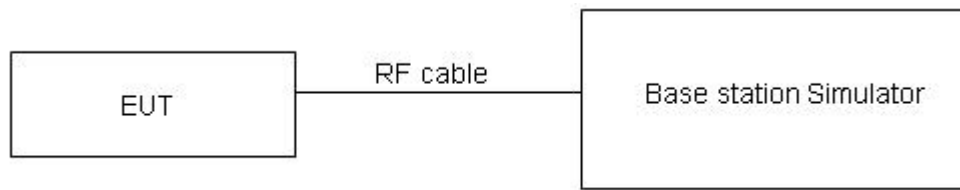

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

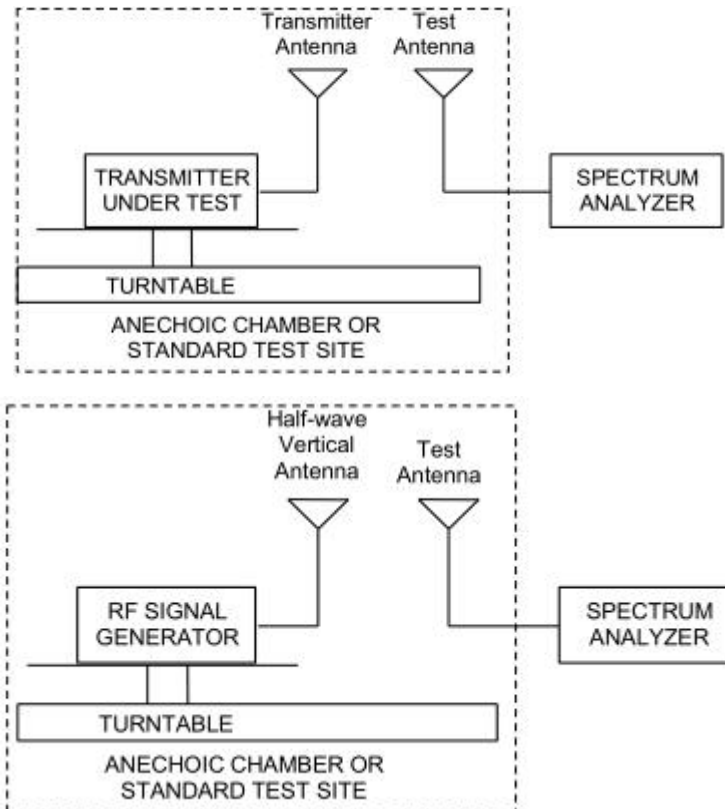

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

90.542(7) Portable stations (hand-held devices) transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB for RF power output,  $k = 2$ ,  $U = 1.19$  dB for ERP .with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

BAND	Bandwidth	Modulation	Channel	RB Configuration	Conducted Power(dBm)	ERP (dBm)
Band14	5M	QPSK	23305	1RB#0	19.31	18.20
Band14	5M	QPSK	23305	1RB#13	19.52	18.41
Band14	5M	QPSK	23305	1RB#24	20.78	19.67
Band14	5M	QPSK	23305	12RB#0	20.31	19.20
Band14	5M	QPSK	23305	12RB#6	20.24	19.13
Band14	5M	QPSK	23305	12RB#13	20.16	19.05
Band14	5M	QPSK	23305	25RB#0	20.03	18.92
Band14	5M	QPSK	23330	1RB#0	19.49	18.38
Band14	5M	QPSK	23330	1RB#13	21.82	20.71
Band14	5M	QPSK	23330	1RB#24	21.80	20.69
Band14	5M	QPSK	23330	12RB#0	21.06	19.95
Band14	5M	QPSK	23330	12RB#6	21.01	19.90
Band14	5M	QPSK	23330	12RB#13	22.00	20.89
Band14	5M	QPSK	23330	25RB#0	21.21	20.10
Band14	5M	QPSK	23355	1RB#0	21.60	20.49
Band14	5M	QPSK	23355	1RB#13	21.42	20.31
Band14	5M	QPSK	23355	1RB#24	18.87	17.76
Band14	5M	QPSK	23355	12RB#0	22.44	21.33
Band14	5M	QPSK	23355	12RB#6	22.37	21.26
Band14	5M	QPSK	23355	12RB#13	19.90	18.79
Band14	5M	QPSK	23355	25RB#0	20.84	19.73
Band14	5M	16QAM	23305	1RB#0	19.39	18.28
Band14	5M	16QAM	23305	1RB#13	19.57	18.46
Band14	5M	16QAM	23305	1RB#24	20.93	19.82
Band14	5M	16QAM	23305	12RB#0	20.44	19.33
Band14	5M	16QAM	23305	12RB#6	22.39	21.28
Band14	5M	16QAM	23305	12RB#13	20.38	19.27
Band14	5M	16QAM	23305	25RB#0	20.10	18.99
Band14	5M	16QAM	23330	1RB#0	19.83	18.72
Band14	5M	16QAM	23330	1RB#13	22.13	21.02
Band14	5M	16QAM	23330	1RB#24	22.08	20.97
Band14	5M	16QAM	23330	12RB#0	21.17	20.06
Band14	5M	16QAM	23330	12RB#6	21.10	19.99
Band14	5M	16QAM	23330	12RB#13	22.05	20.94
Band14	5M	16QAM	23330	25RB#0	21.29	20.18
Band14	5M	16QAM	23355	1RB#0	21.69	20.58
Band14	5M	16QAM	23355	1RB#13	21.46	20.35
Band14	5M	16QAM	23355	1RB#24	18.94	17.83
Band14	5M	16QAM	23355	12RB#0	22.40	21.29



Band14	5M	16QAM	23355	12RB#6	22.39	21.28
Band14	5M	16QAM	23355	12RB#13	19.92	18.81
Band14	5M	16QAM	23355	25RB#0	20.87	19.76
Band14	5M	64QAM	23305	1RB#0	20.21	20.84
Band14	5M	64QAM	23305	1RB#13	21.11	21.74
Band14	5M	64QAM	23305	1RB#24	21.34	21.97
Band14	5M	64QAM	23305	12RB#0	20.97	21.60
Band14	5M	64QAM	23305	12RB#6	20.95	21.58
Band14	5M	64QAM	23305	12RB#13	21.39	22.02
Band14	5M	64QAM	23305	25RB#0	21.01	21.64
Band14	5M	64QAM	23330	1RB#0	20.29	20.92
Band14	5M	64QAM	23330	1RB#13	21.21	21.84
Band14	5M	64QAM	23330	1RB#24	21.28	21.91
Band14	5M	64QAM	23330	12RB#0	20.94	21.57
Band14	5M	64QAM	23330	12RB#6	20.92	21.55
Band14	5M	64QAM	23330	12RB#13	21.36	21.99
Band14	5M	64QAM	23330	25RB#0	20.98	21.61
Band14	5M	64QAM	23355	1RB#0	20.26	20.89
Band14	5M	64QAM	23355	1RB#13	21.19	21.82
Band14	5M	64QAM	23355	1RB#24	21.26	21.89
Band14	5M	64QAM	23355	12RB#0	20.93	21.56
Band14	5M	64QAM	23355	12RB#6	20.91	21.54
Band14	5M	64QAM	23355	12RB#13	21.34	21.97
Band14	5M	64QAM	23355	25RB#0	20.97	21.60
Band14	10M	QPSK	23330	1RB#0	21.15	20.04
Band14	10M	QPSK	23330	1RB#25	22.54	21.43
Band14	10M	QPSK	23330	1RB#49	20.39	19.28
Band14	10M	QPSK	23330	25RB#0	21.56	20.45
Band14	10M	QPSK	23330	25RB#13	21.64	20.53
Band14	10M	QPSK	23330	25RB#25	22.03	20.92
Band14	10M	QPSK	23330	50RB#0	22.04	20.93
Band14	10M	16QAM	23330	1RB#0	21.82	20.71
Band14	10M	16QAM	23330	1RB#25	23.14	22.03
Band14	10M	16QAM	23330	1RB#49	21.00	19.89
Band14	10M	16QAM	23330	25RB#0	21.65	20.54
Band14	10M	16QAM	23330	25RB#13	21.63	20.52
Band14	10M	16QAM	23330	25RB#25	22.12	21.01
Band14	10M	16QAM	23330	50RB#0	22.08	20.97
Band14	10M	64QAM	23330	1RB#0	18.28	18.91
Band14	10M	64QAM	23330	1RB#25	21.04	21.67
Band14	10M	64QAM	23330	1RB#49	19.27	19.90
Band14	10M	64QAM	23330	25RB#0	20.57	21.20
Band14	10M	64QAM	23330	25RB#13	20.56	21.19



Band14	10M	64QAM	23330	25RB#25	20.88	21.51
Band14	10M	64QAM	23330	50RB#0	20.73	21.36

## 5.2. Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 14 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 14 (10MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

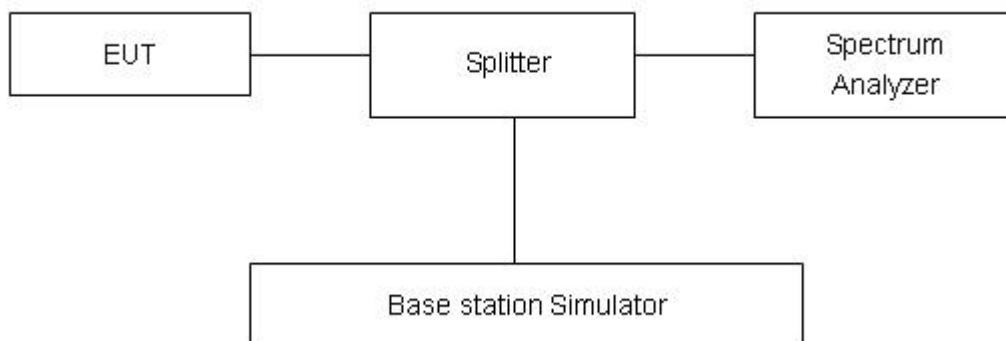

### Limits

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .



Test Result

LTE Band 14								
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)		
100%	QPSK	5	23305	790.5	4.5700	5.362		
			23330	793	4.5169	5.239		
			23355	795.5	4.5255	5.283		
		10	23330	793	8.9859	10.130		
			16QAM	5	23305	790.5	4.5700	5.362
					23330	793	4.5169	5.239
	23355	795.5			4.5255	5.283		
	10	23330		793	8.9859	10.130		
		64QAM		5	23305	790.5	4.5079	5.303
					23330	793	4.5393	5.356
	23355		795.5		4.5280	5.180		
	10		23330	793	8.8853	9.706		

LTE Band 14 QPSK 5MHz CH-Low



LTE Band 14 QPSK 5MHz CH-Middle







LTE Band 14 QPSK 5MHz CH-High



LTE Band 14 QPSK 10MHz CH-Middle






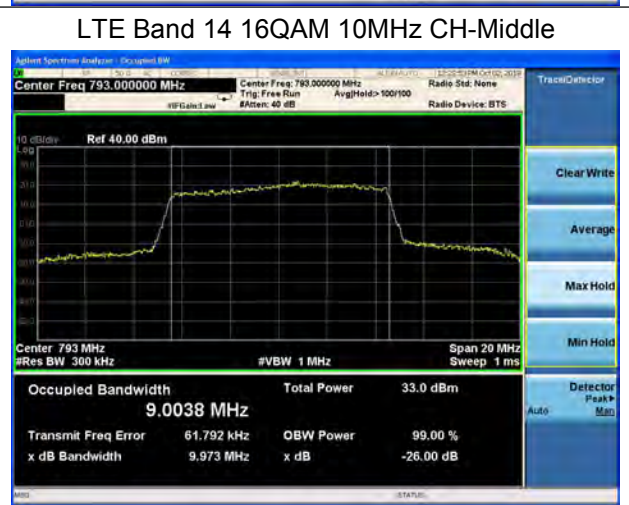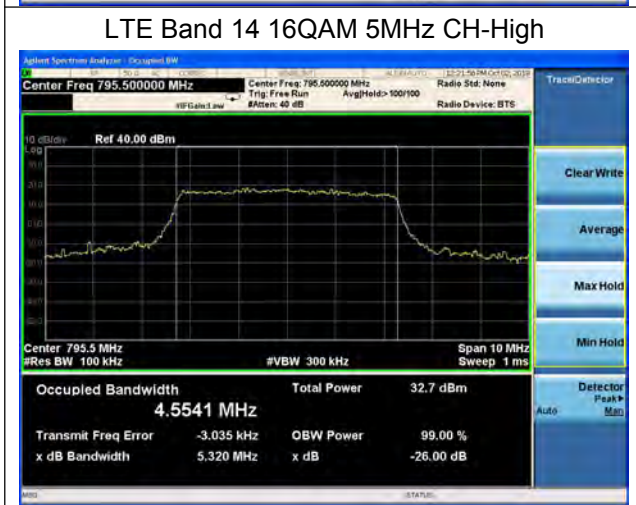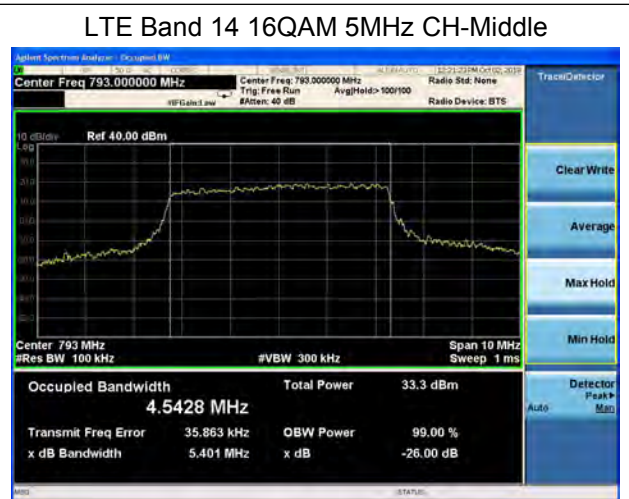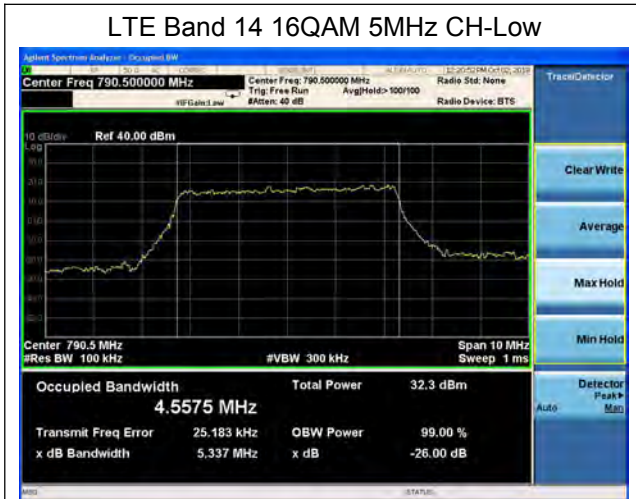




LTE Band 14 64QAM 5MHz CH-Low

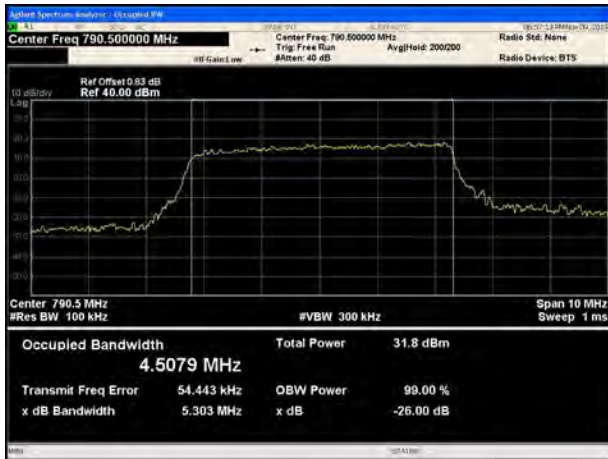

LTE Band 14 64QAM 5MHz CH-Middle

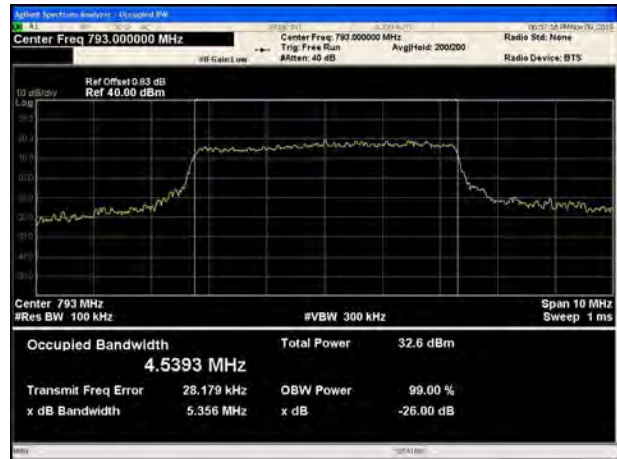

LTE Band 14 64QAM 5MHz CH-High



LTE Band 14 64QAM 10MHz CH-Middle





### 5.4. Band Edge Compliance

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


**Method of Measurement**

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v03r01 Section 6.0

- 1.The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 14 (5MHz). RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band14 (10MHz).
3. Set spectrum analyzer with RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. Checked that all the results comply with the emission limit line.

**Test Setup**

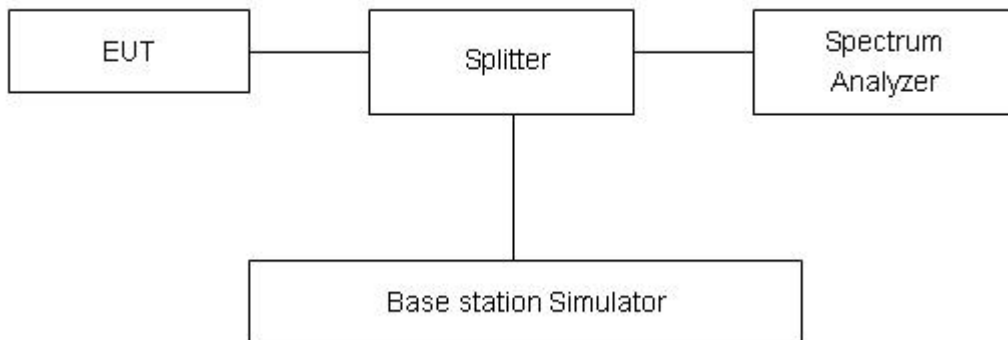

**Limits**

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations.



(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.



Test Result:

LTE Band 14 QPSK 5MHz 1 RB CH-Low (30MHz ~758MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-High (30MHz ~758MHz)



LTE Band 14 QPSK 5MHz 100%RB CH-Low (30MHz ~758MHz)



LTE Band 14 QPSK 5MHz 100%RB CH-High (30MHz ~758MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-Low (769MHz ~775MHz)



LTE Band 14 QPSK 5MHz 100%RB CH-Low (769MHz ~775MHz)





LTE Band 14 QPSK 5MHz 1 RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 5MHz 100%RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 5MHz 100%RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-Low  
(787.9MHz ~ 788 MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-High  
(787.9MHz ~ 788 MHz)







LTE Band 14 QPSK 5MHz 100%RB CH-Low (787.9MHz ~ 788 MHz)



LTE Band 14 QPSK 5MHz 100%RB CH- High (787.9MHz ~ 788 MHz)



LTE Band 14 QPSK 5MHz 1 RB CH- High (799MHz ~805MHz)



LTE Band 14 QPSK 5MHz 100%RB CH- High (799MHz ~805MHz)



LTE Band 14 QPSK 5MHz 1 RB CH-Low (805MHz~ 9GHz)



LTE Band 14 QPSK 5MHz 1 RB CH- High (805MHz~ 9GHz)





LTE Band 14 QPSK 5MHz 100%RB CH-Low  
(805MHz~ 9GHz)



LTE Band 14 QPSK 5MHz 100%RB CH- High  
(805MHz~ 9GHz)





LTE Band 14 QPSK 10MHz 1 RB CH-Low (30MHz ~758MHz)



LTE Band 14 QPSK 10MHz 1 RB CH-High (30MHz ~758MHz)



LTE Band 14 QPSK 10MHz 100%RB CH-Low (30MHz ~758MHz)



LTE Band 14 QPSK 10MHz 100%RB CH-High (30MHz ~758MHz)



LTE Band 14 QPSK 10MHz 1 RB CH-Low (769MHz ~7710MHz)



LTE Band 14 QPSK 10MHz 100%RB CH-Low (769MHz ~7710MHz)







LTE Band 14 QPSK 10MHz 1 RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 10MHz 1 RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 10MHz 100%RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 10MHz 100%RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 QPSK 10MHz 1 RB CH-Low  
(787.9MHz ~ 788 MHz)



LTE Band 14 QPSK 10MHz 1 RB CH-High  
(787.9MHz ~ 788 MHz)







LTE Band 14 QPSK 10MHz 100%RB CH-Low (787.9MHz ~ 788 MHz)




LTE Band 14 QPSK 10MHz 100%RB CH- High (787.9MHz ~ 788 MHz)



LTE Band 14 QPSK 10MHz 1 RB CH- High (799MHz ~805MHz)



LTE Band 14 QPSK 10MHz 100%RB CH- High (799MHz ~805MHz)

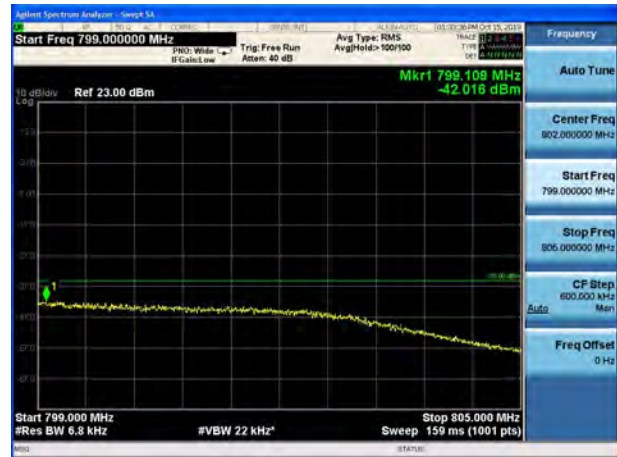

LTE Band 14 QPSK 10MHz 1 RB CH-Low (805MHz~ 9GHz)



LTE Band 14 QPSK 10MHz 1 RB CH- High (805MHz~ 9GHz)





LTE Band 14 QPSK 10MHz 100%RB CH-Low  
(805MHz~ 9GHz)



LTE Band 14 QPSK 10MHz 100%RB CH- High  
(805MHz~ 9GHz)






LTE Band 14 16QAM 5MHz 1 RB CH-Low (30MHz ~758MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-High (30MHz ~758MHz)

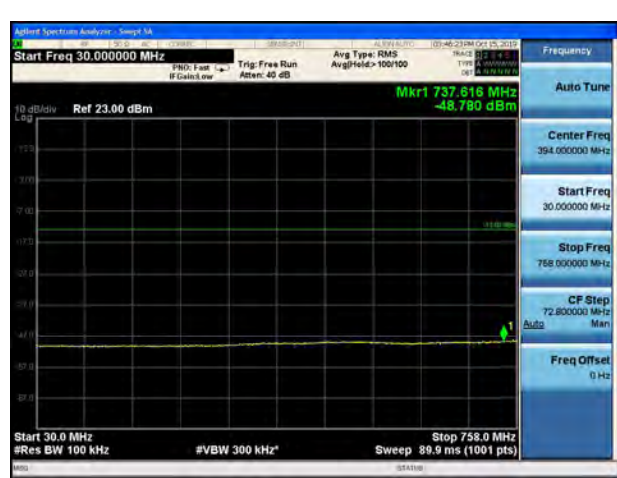

LTE Band 14 16QAM 5MHz 100%RB CH-Low (30MHz ~758MHz)



LTE Band 14 16QAM 5MHz 100%RB CH-High (30MHz ~758MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-Low (769MHz ~775MHz)



LTE Band 14 16QAM 5MHz 100%RB CH-Low (769MHz ~775MHz)







LTE Band 14 16QAM 5MHz 1 RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 16QAM 5MHz 100%RB CH-Low  
(775MHz ~787.9MHz)



LTE Band 14 16QAM 5MHz 100%RB CH-High  
(775MHz ~787.9MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-Low  
(787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-High  
(787.9MHz ~ 788 MHz)





LTE Band 14 16QAM 5MHz 100%RB CH-Low (787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 5MHz 100%RB CH- High (787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 5MHz 1 RB CH- High (799MHz ~805MHz)



LTE Band 14 16QAM 5MHz 100%RB CH- High (799MHz ~805MHz)



LTE Band 14 16QAM 5MHz 1 RB CH-Low (805MHz~ 9GHz)



LTE Band 14 16QAM 5MHz 1 RB CH- High (805MHz~ 9GHz)





LTE Band 14 16QAM 5MHz 100%RB CH-Low  
(805MHz~ 9GHz)



LTE Band 14 16QAM 5MHz 100%RB CH- High  
(805MHz~ 9GHz)








LTE Band 14 16QAM 10MHz 1 RB CH-Low (30MHz ~758MHz)



LTE Band 14 16QAM 10MHz 1 RB CH-High (30MHz ~758MHz)

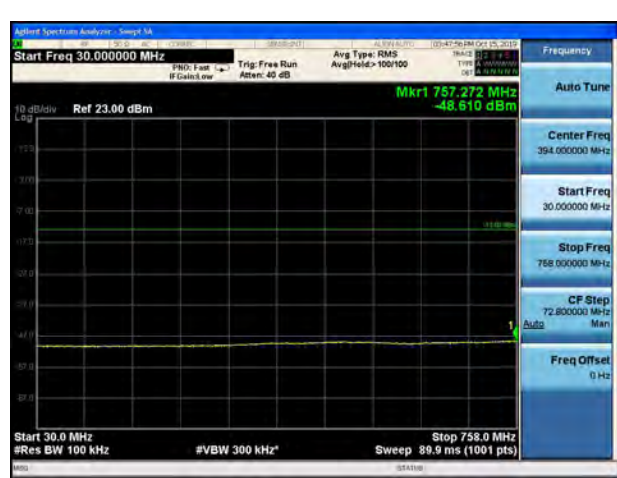

LTE Band 14 16QAM 10MHz 100%RB CH-Low (30MHz ~758MHz)



LTE Band 14 16QAM 10MHz 100%RB CH-High (30MHz ~758MHz)



LTE Band 14 16QAM 10MHz 1 RB CH-Low (769MHz ~7710MHz)



LTE Band 14 16QAM 10MHz 100%RB CH-Low (769MHz ~7710MHz)






LTE Band 14 16QAM 10MHz 1 RB CH-Low (775MHz ~787.9MHz)




LTE Band 14 16QAM 10MHz 1 RB CH-High (775MHz ~787.9MHz)



LTE Band 14 16QAM 10MHz 100%RB CH-Low (775MHz ~787.9MHz)

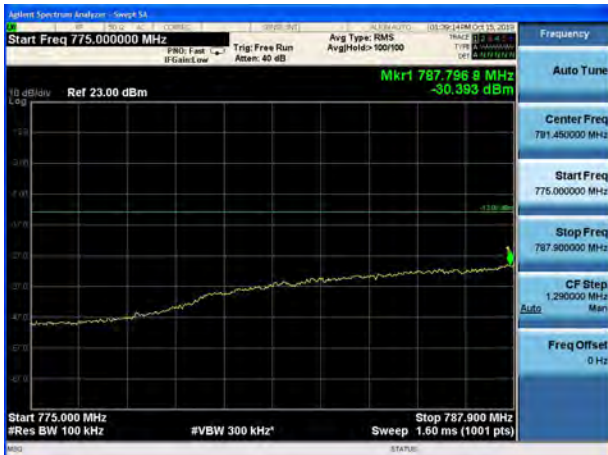

LTE Band 14 16QAM 10MHz 100%RB CH-High (775MHz ~787.9MHz)

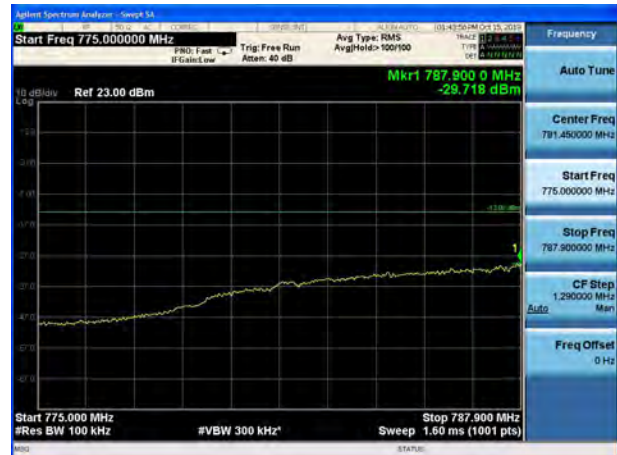

LTE Band 14 16QAM 10MHz 1 RB CH-Low (787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 10MHz 1 RB CH-High (787.9MHz ~ 788 MHz)







LTE Band 14 16QAM 10MHz 100%RB CH-Low (787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 10MHz 100%RB CH- High (787.9MHz ~ 788 MHz)



LTE Band 14 16QAM 10MHz 1 RB CH- High (799MHz ~805MHz)



LTE Band 14 16QAM 10MHz 100%RB CH- High (799MHz ~805MHz)



LTE Band 14 16QAM 10MHz 1 RB CH-Low (805MHz~ 9GHz)



LTE Band 14 16QAM 10MHz 1 RB CH- High (805MHz~ 9GHz)





LTE Band 14 16QAM 10MHz 100%RB CH-Low  
(805MHz~ 9GHz)




LTE Band 14 16QAM 10MHz 100%RB CH- High  
(805MHz~ 9GHz)







LTE Band 14 64QAM 5MHz 1 RB CH-23205

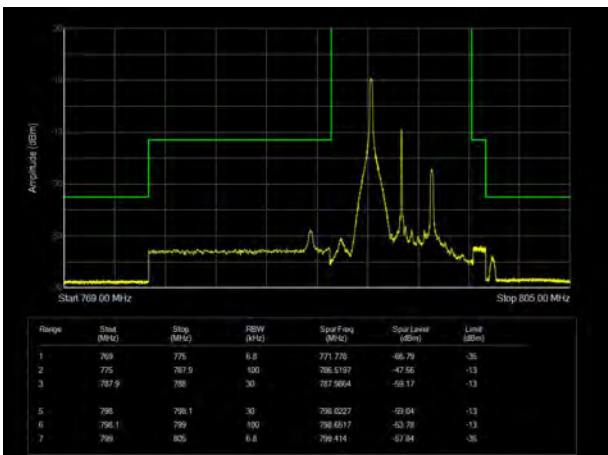


LTE Band 14 64QAM 5MHz 1 RB CH-23255

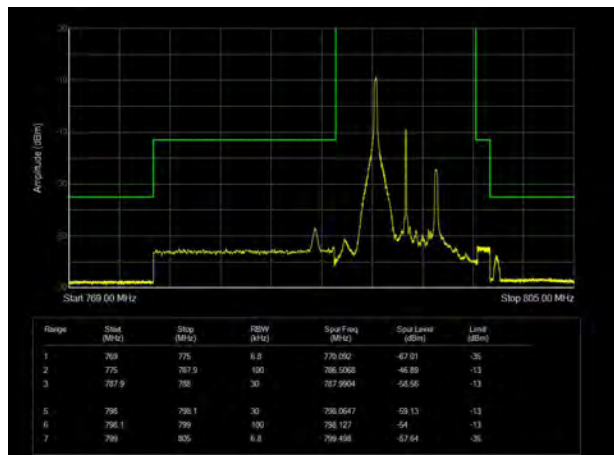


LTE Band 14 64QAM 5MHz 100%RB CH-23205

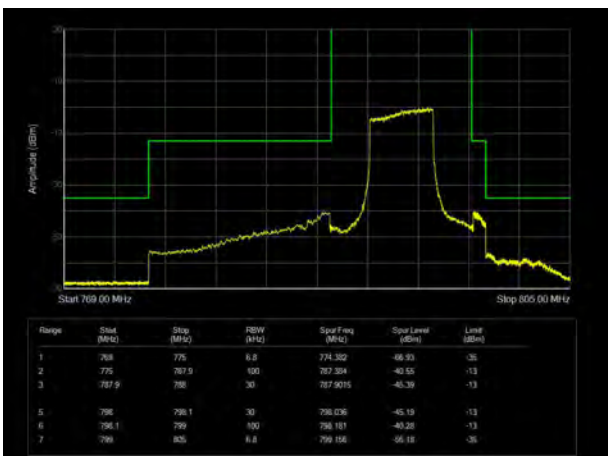


LTE Band 14 64QAM 5MHz 100%RB CH-23255

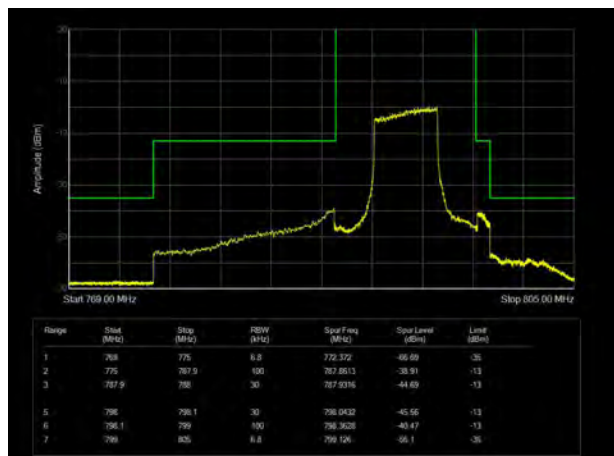

LTE Band 14 64QAM 10MHz 1 RB CH-23230

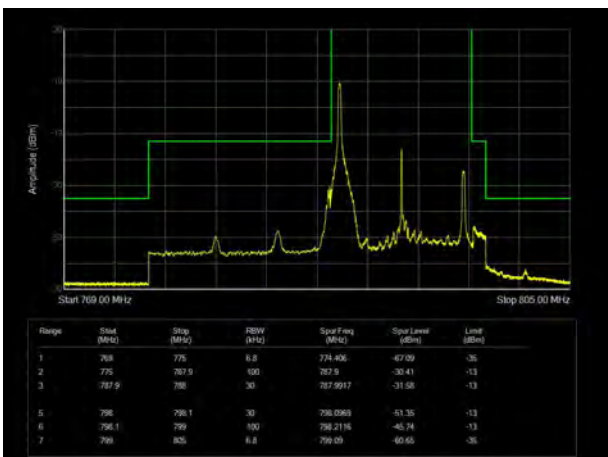

LTE Band 14 64QAM 10MHz 100%RB CH-23230

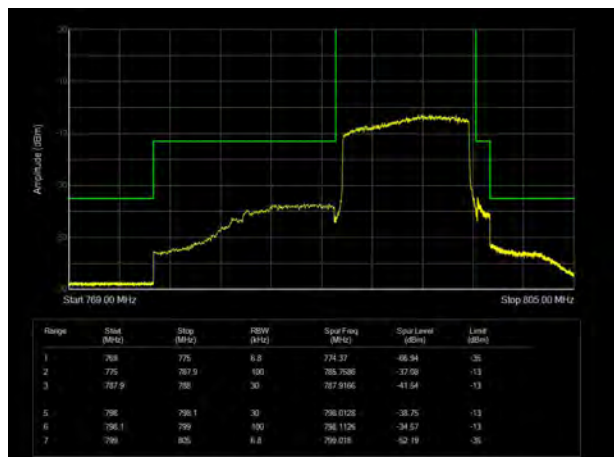

### 5.5. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

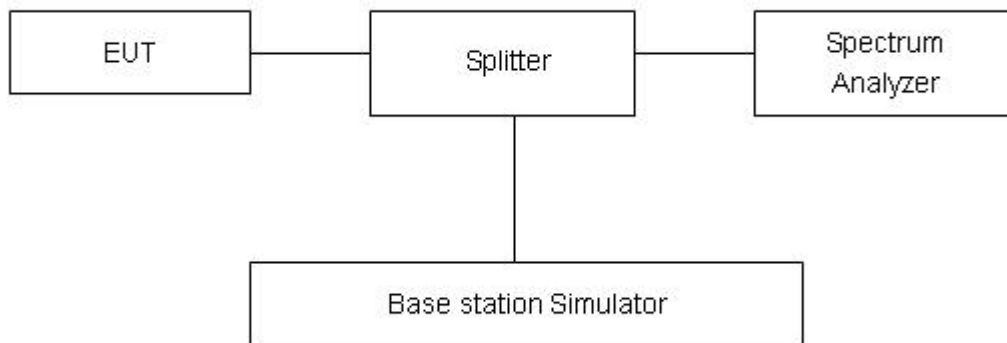

#### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

LTE Band 14								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	23305	790.5	28.64	22.97	5.67	≤13	PASS
		23330	793	29.16	24.31	4.85	≤13	PASS
		23355	795.5	28.33	23.74	4.59	≤13	PASS
	10	23330	793	28.78	24.10	4.68	≤13	PASS
16QAM	5	23305	790.5	29.20	23.04	6.16	≤13	PASS
		23330	793	29.38	24.24	5.14	≤13	PASS
		23355	795.5	28.55	23.69	4.86	≤13	PASS
	10	23330	793	29.15	24.02	5.13	≤13	PASS
64QAM	5	23305	790.5	25.76	19.63	6.13	≤13	PASS
		23330	793	25.81	19.62	6.19	≤13	PASS
		23355	795.5	25.31	19.11	6.20	≤13	PASS
	10	23330	793	26.26	20.13	6.13	≤13	PASS

## 5.6. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +70°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +70°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### 2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3V and 3.6V, with a nominal voltage of 3.3V.

### Test setup

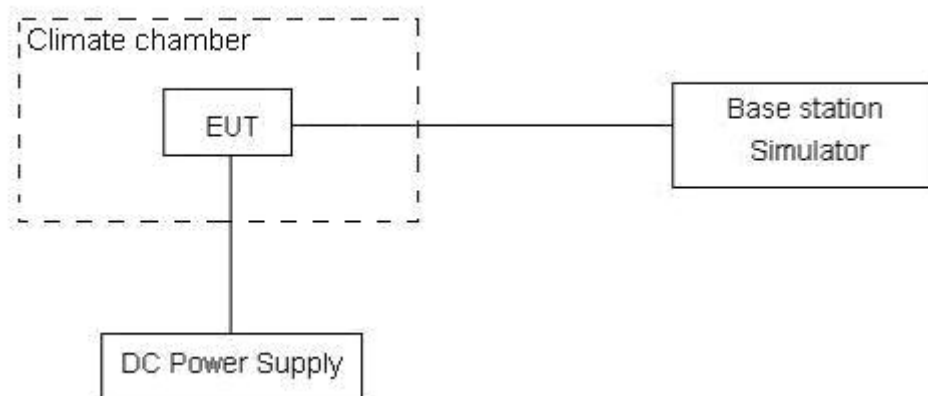



**Limits**

90.539 (c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3, U = 0.01\text{ppm}$ .



## Test Result

LTE Band 14								
Condition		Freq. Error (Hz)	Freq. Error (Hz)	Freq. Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz	(Hz)	(Hz)	(Hz)	(ppm)	(ppm)	(ppm)	
Temperature	Voltage	16QAM	QPSK	64QAM	16QAM	QPSK	64QAM	
Normal (25°C)	Normal	5.69	17.84	3.93	0.00303	0.00949	0.00209	PASS
Extreme (70°C)		15.09	7.03	10.82	0.00803	0.00374	0.00575	PASS
Extreme (60°C)		3.33	9.39	17.81	0.00177	0.00500	0.00947	PASS
Extreme (50°C)		7.46	3.81	10.58	0.00397	0.00203	0.00563	PASS
Extreme (40°C)		12.92	12.46	13.99	0.00687	0.00663	0.00744	PASS
Extreme (30°C)		9.78	1.02	10.71	0.00520	0.00054	0.00570	PASS
Extreme (20°C)		8.49	6.75	12.90	0.00451	0.00359	0.00686	PASS
Extreme (10°C)		9.00	12.69	10.90	0.00479	0.00675	0.00580	PASS
Extreme (0°C)		9.59	3.25	9.23	0.00510	0.00173	0.00491	PASS
Extreme (-10°C)		11.36	2.47	4.63	0.00604	0.00131	0.00246	PASS
Extreme (-20°C)		14.07	14.59	11.12	0.00749	0.00776	0.00591	PASS
Extreme (-30°C)		8.27	1.94	1.85	0.00440	0.00103	0.00098	PASS
Extreme (-40°C)		13.09	1.04	15.01	0.00696	0.00055	0.00798	PASS
25°C	LV	14.80	8.12	6.27	0.00787	0.00432	0.00334	PASS
	HV	8.49	6.61	17.14	0.00451	0.00351	0.00912	PASS
Condition		Freq. Error (Hz)	Freq. Error (Hz)	Freq. Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz	(Hz)	(Hz)	(Hz)	(ppm)	(ppm)	(ppm)	
Temperature	Voltage	16QAM	QPSK	64QAM	16QAM	QPSK	64QAM	
Normal (25°C)	Normal	2.66	6.85	16.11	0.00141	0.00364	0.00857	PASS
Extreme (70°C)		12.81	2.19	1.32	0.00682	0.00117	0.00070	PASS
Extreme (60°C)		11.11	10.89	3.06	0.00591	0.00579	0.00163	PASS
Extreme (50°C)		14.13	3.46	10.29	0.00751	0.00184	0.00547	PASS
Extreme (40°C)		17.35	6.49	2.24	0.00923	0.00345	0.00119	PASS
Extreme (30°C)		8.24	10.94	1.36	0.00439	0.00582	0.00072	PASS
Extreme (20°C)		14.86	8.89	17.28	0.00791	0.00473	0.00919	PASS
Extreme (10°C)		10.54	13.77	3.25	0.00560	0.00733	0.00173	PASS
Extreme (0°C)		9.11	15.71	2.25	0.00485	0.00836	0.00120	PASS
Extreme (-10°C)		8.02	17.32	9.18	0.00426	0.00921	0.00488	PASS
Extreme (-20°C)		1.30	9.45	4.59	0.00069	0.00503	0.00244	PASS
Extreme (-30°C)		8.03	8.46	7.43	0.00427	0.00450	0.00395	PASS
Extreme (-40°C)		16.32	10.37	3.38	0.00868	0.00552	0.00180	PASS
25°C	LV	6.13	16.62	5.18	0.00326	0.00884	0.00275	PASS
	HV	15.61	9.22	6.22	0.00830	0.00490	0.00331	PASS



## 5.7. Spurious Emissions at Antenna Terminals

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 1MHz and VBW 3MHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

### Test setup

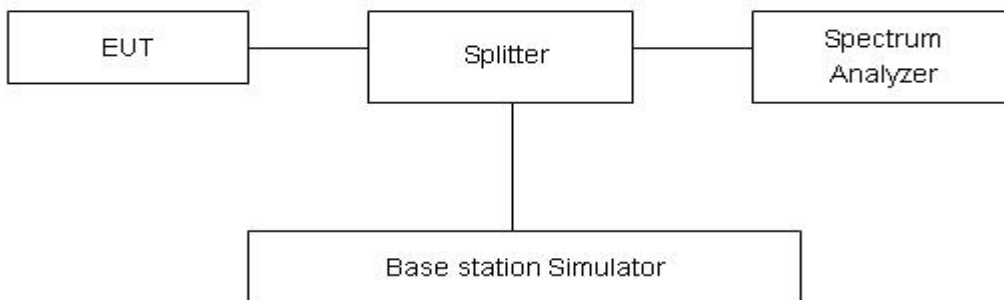

### Limits

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.



(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

### Measurement Uncertainty







The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .



Frequency	Uncertainty
100kHz-1GHz	0.684 dB
1GHz-12.75GHz	1.407 dB



### Test Result

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT. The signal beyond the limit is carrier.

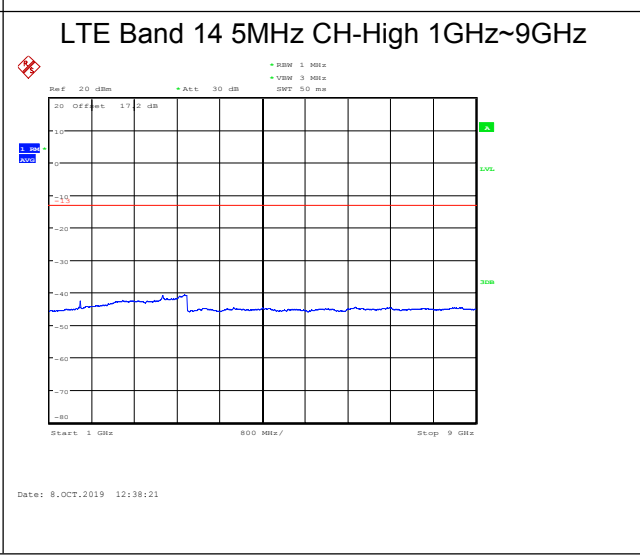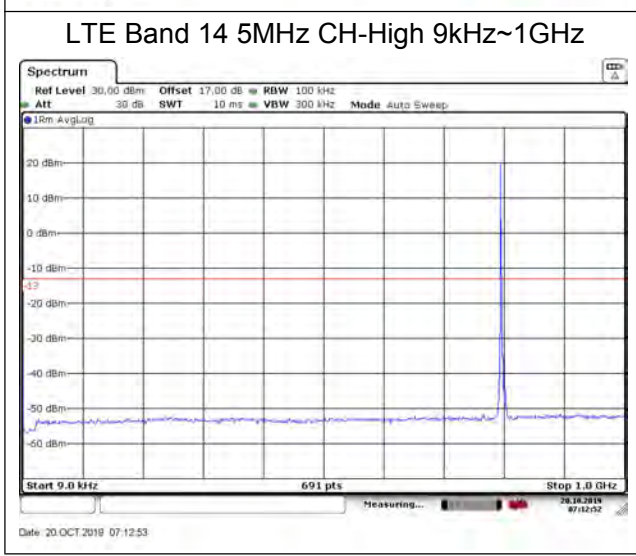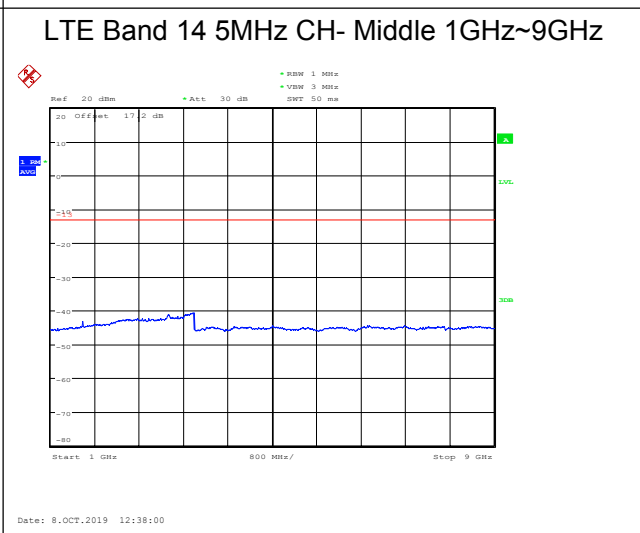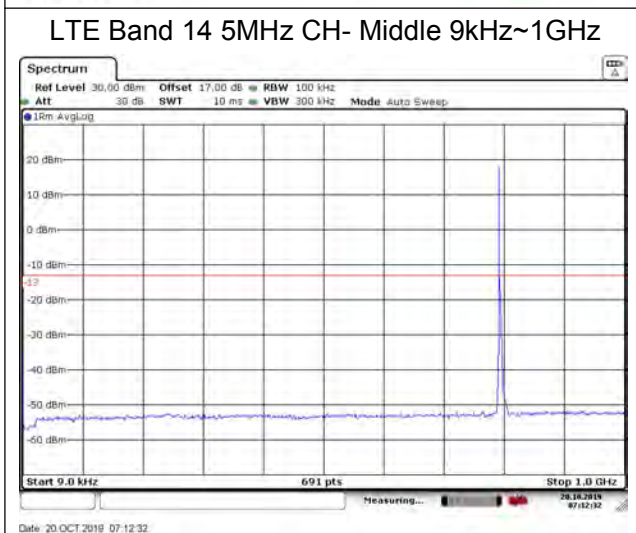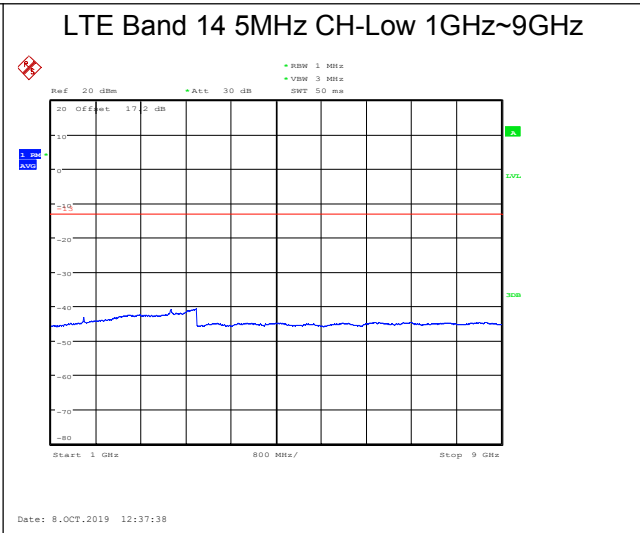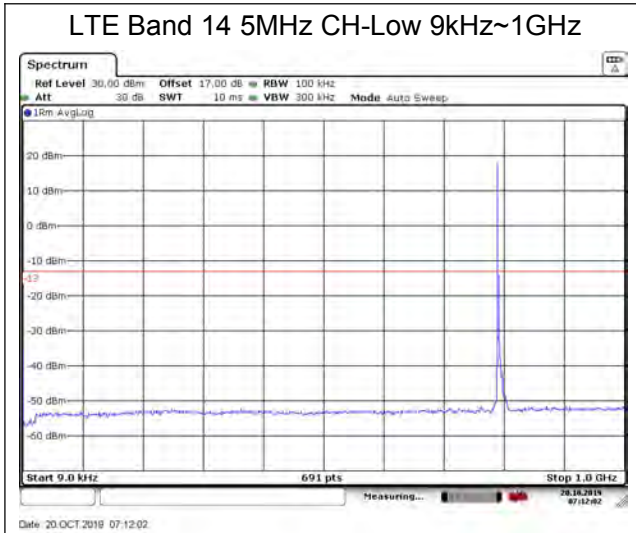

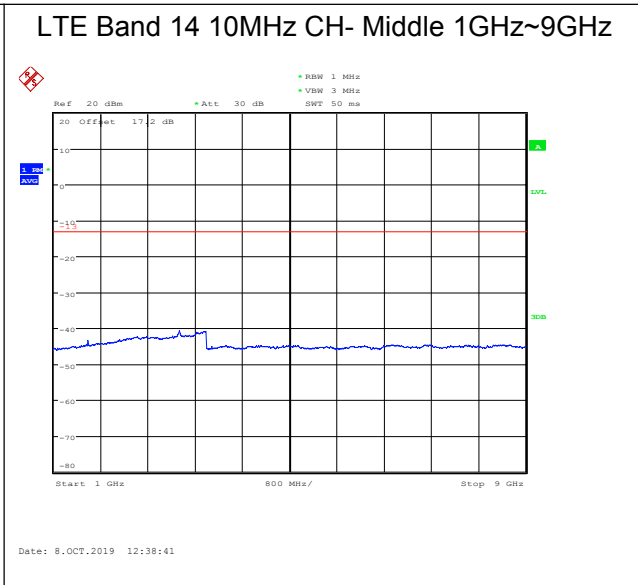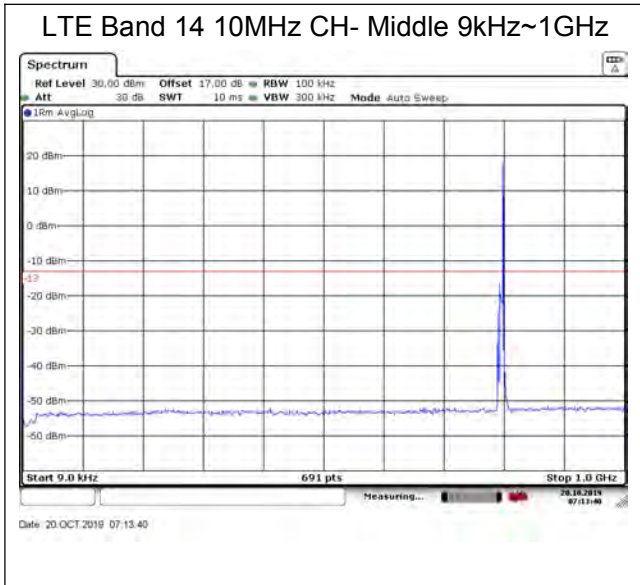



## 5.8. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360° , and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC' s permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360° , and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

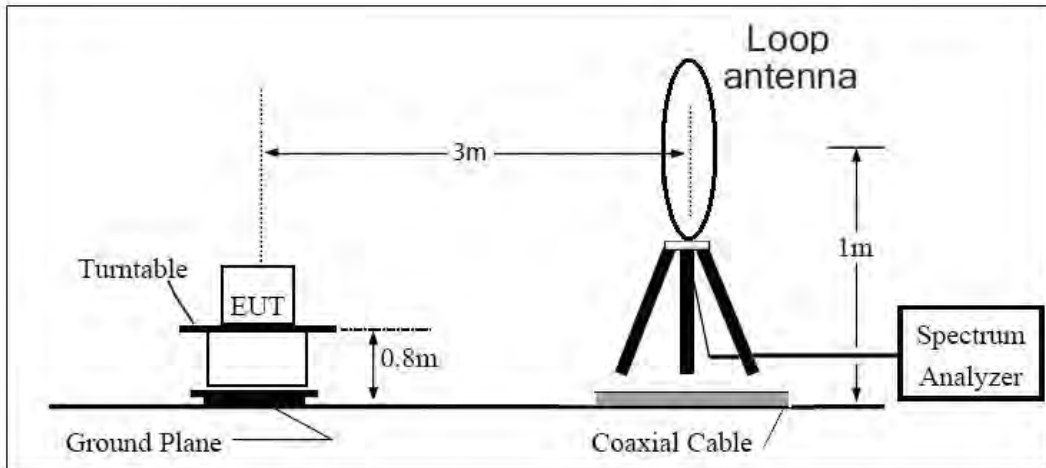

**30MHz ~ 1GHz**

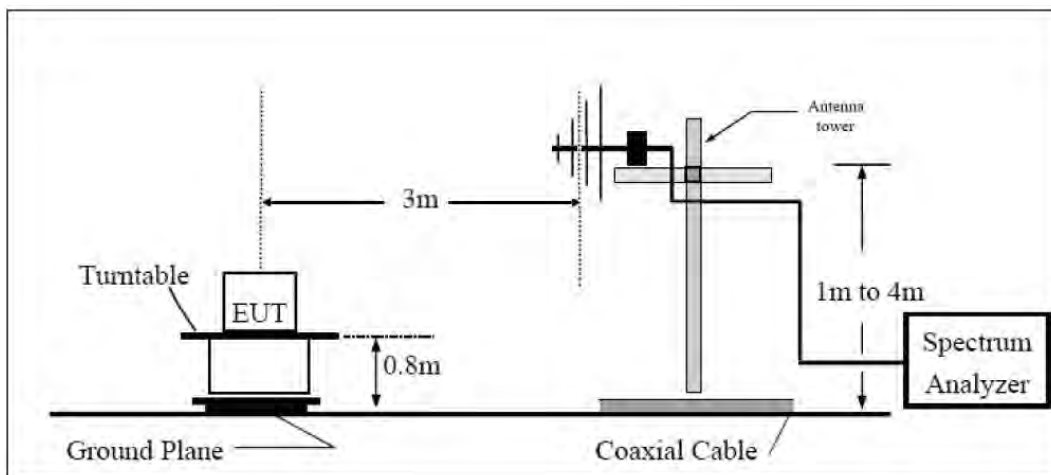

**Above 1GHz**

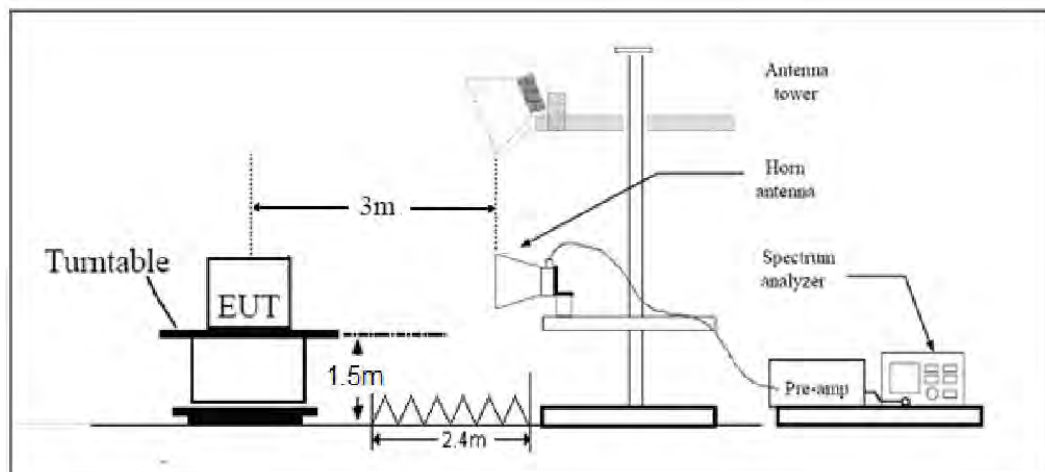

Note: Area side: 2.4m x 3.6m



## Limits

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 14 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1581.6	-60.02	2.00	10.75	Horizontal	-53.65	-13.00	40.65	315
3	2379.0	-63.02	2.51	11.05	Horizontal	-56.59	-13.00	43.59	0
4	3172.0	-56.00	4.20	11.15	Horizontal	-48.91	-13.00	35.91	45
5	3965.0	-54.56	5.20	11.15	Horizontal	-47.59	-13.00	34.59	90
6	4758.0	-58.58	5.50	11.95	Horizontal	-54.30	-13.00	41.30	315
7	5551.0	-60.70	5.70	13.55	Horizontal	-53.69	-13.00	40.69	225
8	6344.0	-57.08	6.30	13.75	Horizontal	-51.30	-13.00	38.30	180
9	7137.0	-52.70	6.80	13.85	Horizontal	-48.00	-13.00	35.00	90
10	7930.0	-54.02	6.90	14.25	Horizontal	-48.00	-13.00	35.00	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 14 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1577.1	-60.02	2.00	10.75	Horizontal	-53.42	-13.00	40.42	225
3	2378.4	-63.02	2.51	11.05	Horizontal	-56.63	-13.00	43.63	135
4	3172.0	-56.00	4.20	11.15	Horizontal	-51.20	-13.00	38.20	225
5	3965.0	-54.56	5.20	11.15	Horizontal	-50.76	-13.00	37.76	135
6	4758.0	-58.58	5.50	11.95	Horizontal	-54.28	-13.00	41.28	225
7	5551.0	-60.70	5.70	13.55	Horizontal	-55.00	-13.00	42.00	90
8	6344.0	-57.08	6.30	13.75	Horizontal	-51.78	-13.00	38.78	45
9	7137.0	-52.70	6.80	13.85	Horizontal	-47.80	-13.00	34.80	90
10	7930.0	-54.02	6.90	14.25	Horizontal	-48.82	-13.00	35.82	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2019-12-16	2020-12-17
Trilog Antenna	SCHWARZBECK	VUBL 9163	01111	2019-09-12	2021-09-11
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-3-14
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*