

# FCC Test Report

APPLICANT : Smawave Technology Co. ,Ltd  
EQUIPMENT : CAT12 outdoor CPE  
BRAND NAME : smawave  
MODEL NAME : SRE410  
FCC ID : 2AU8HSRE410-EUD  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Oct. 20, 2023 ~ Oct. 25, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



## TABLE OF CONTENTS

REVISION HISTORY .....	3
SUMMARY OF TEST RESULT .....	4
1. GENERAL DESCRIPTION .....	5
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Product Feature of Equipment Under Test .....	5
1.4. Product Specification of Equipment Under Test .....	5
1.5. Modification of EUT .....	5
1.6. Test Location .....	6
1.7. Test Software .....	6
1.8. Applicable Standards .....	6
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....	7
2.1. Test Mode .....	7
2.2. Connection Diagram of Test System .....	7
2.3. Support Unit used in test configuration and system .....	8
2.4. EUT Operation Test Setup .....	8
3. TEST RESULT .....	9
3.1. Test of AC Conducted Emission Measurement .....	9
3.2. Test of Radiated Emission Measurement .....	13
4. LIST OF MEASURING EQUIPMENT .....	18
5. MEASUREMENT UNCERTAINTY .....	19
APPENDIX A. SETUP PHOTOGRAPHS	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC3O1704	Rev. 01	Initial issue of report	Dec. 04, 2023

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 12.27 dB at 23.140 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 1.43 dB at 30.970 MHz for Quasi-Peak

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

## 1. General Description

### 1.1. Applicant

**Smawave Technology Co. ,Ltd**

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

### 1.2. Manufacturer

**Smawave Technology Co. ,Ltd**

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

### 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	CAT12 outdoor CPE
Brand Name	smawave
Model Name	SRE410
FCC ID	2AU8HSRE410-EUD
EUT supports Radios application	LTE
IMEI Code	Conduction: 862165041895283 Radiation: 862165041895283
HW Version	V1.0
SW Version	OCB12FW_Codium_CBSD_V10.20

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 42 : 3450 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz
Rx Frequency	LTE Band 42 : 3450 MHz ~ 3600 MHz LTE Band 43 : 3600 MHz ~ 3700 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz
Antenna Type	WWAN : Panel Antenna
Type of Modulation	LTE: QPSK / 16QAM / 64QAM

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH07-KS	CN1257	314309

## 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: LTE Band 48 Rx + LAN Link + Charging from POE
Radiated Emissions	Mode 1: LTE Band 48 Rx + LAN Link + Charging from POE

### 2.2.Connection Diagram of Test System

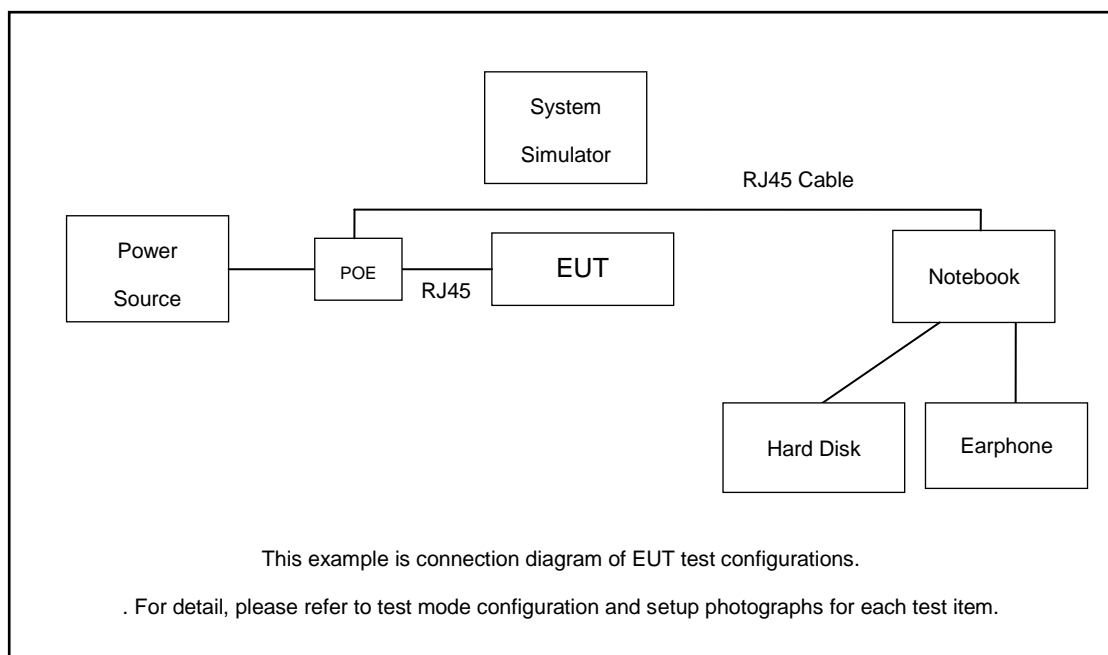

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Earphone	Lenovo	P121	N/A	Unshielded,1.2m	N/A
3.	Notebook	Lenovo	S730-13IWL	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
5.	Hard disk	KINGSHARE	KSP6120G	Fcc DoC	Shielded, 1.2m	N/A
6.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
7.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A

## 2.4. EUT Operation Test Setup

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

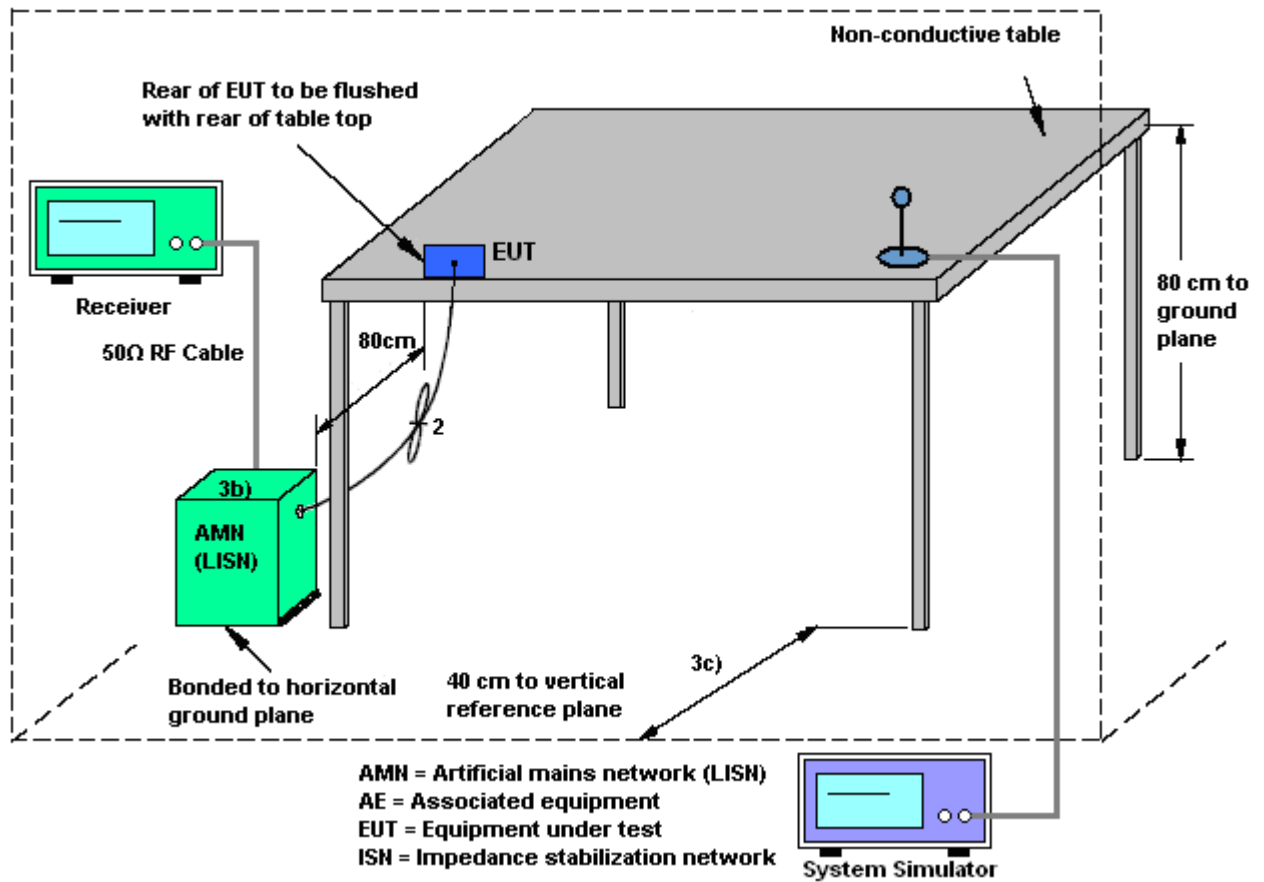

### 3.1.5 Test Result of AC Conducted Emission


<b>Test Engineer :</b>	Amos Zhang	<b>Temperature :</b>	25.3~26.2°C
		<b>Relative Humidity :</b>	38~40%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

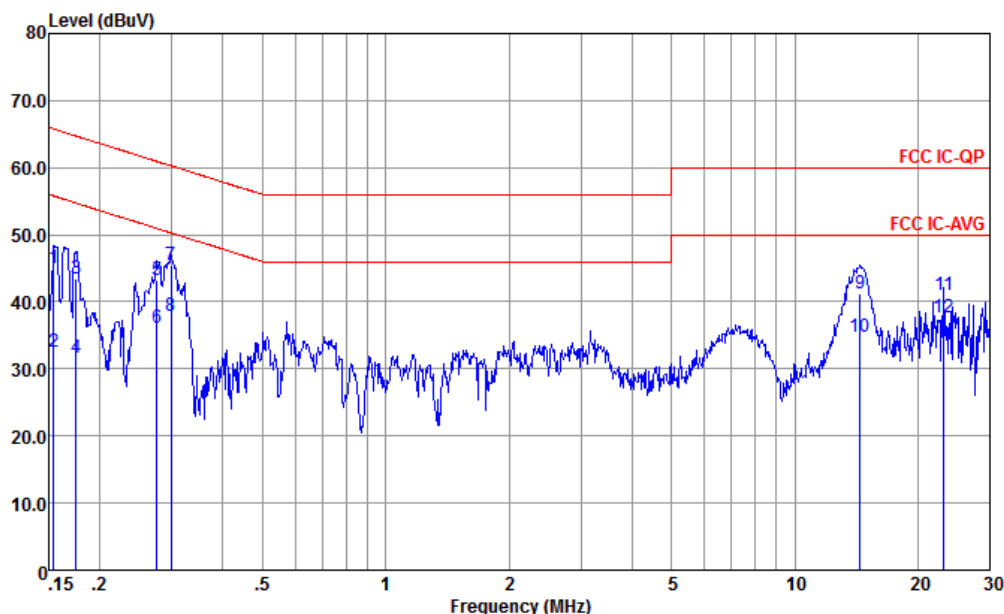

Site : CO01-KS  
Condition : FCC IC-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV		dB	
1	0.154	45.08	-20.70	65.78	34.60	0.05	10.43	QP
2	0.154	32.58	-23.20	55.78	22.10	0.05	10.43	Average
3	0.175	43.36	-21.36	64.72	32.90	0.04	10.42	QP
4	0.175	31.66	-23.06	54.72	21.20	0.04	10.42	Average
5	0.276	43.20	-17.74	60.94	32.80	0.04	10.36	QP
6	0.276	36.00	-14.94	50.94	25.60	0.04	10.36	Average
7	0.299	45.49	-14.79	60.28	35.10	0.04	10.35	QP
8	0.299	37.99	-12.29	50.28	27.60	0.04	10.35	Average
9	14.440	41.27	-18.73	60.00	30.20	-0.12	11.19	QP
10	14.440	34.67	-15.33	50.00	23.60	-0.12	11.19	Average
11	23.140	41.03	-18.97	60.00	29.89	-0.31	11.45	QP
12 *	23.140	37.73	-12.27	50.00	26.59	-0.31	11.45	Average

<b>Test Engineer :</b>	Amos Zhang	<b>Temperature :</b>	25.3~26.2°C
		<b>Relative Humidity :</b>	38~40%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

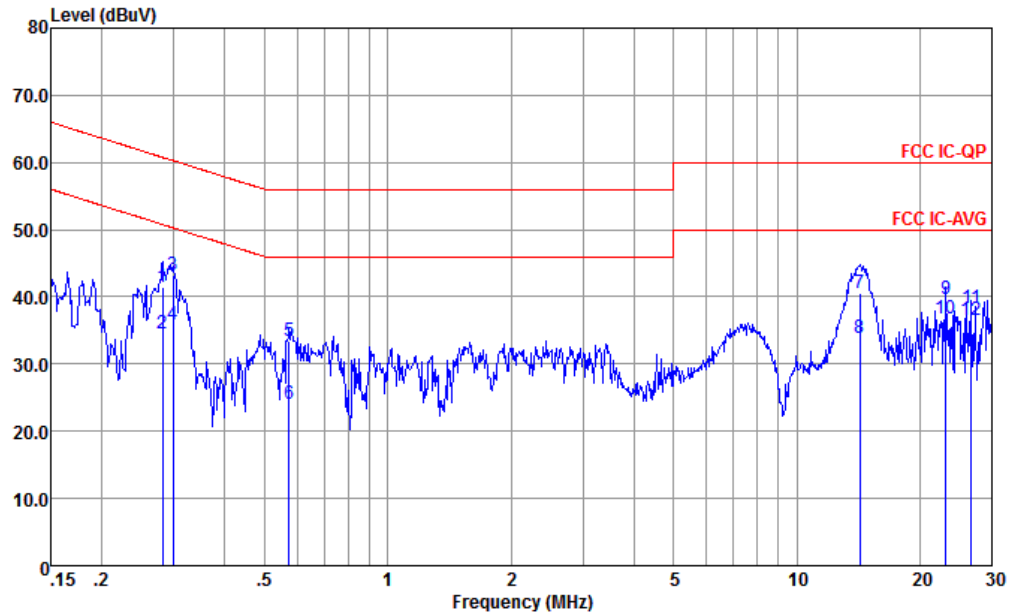

Site : CO01-KS  
Condition : FCC IC-QP LISM-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISM	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.282	41.43	-19.33	60.76	31.10	-0.03	10.36	QP
2	0.282	34.63	-16.23	50.76	24.20	-0.03	10.36	Average
3	0.299	43.21	-17.07	60.28	32.90	-0.04	10.35	QP
4	0.299	35.81	-14.47	50.28	25.60	-0.04	10.35	Average
5	0.573	33.32	-22.68	56.00	23.20	-0.07	10.19	QP
6	0.573	24.02	-21.98	46.00	13.90	-0.07	10.19	Average
7	14.288	40.67	-19.43	60.00	29.50	-0.11	11.18	QP
8	14.288	33.97	-16.03	50.00	22.90	-0.11	11.18	Average
9	23.140	39.67	-20.33	60.00	28.59	-0.37	11.45	QP
10 *	23.140	36.67	-13.33	50.00	25.59	-0.37	11.45	Average
11	26.699	38.28	-21.72	60.00	27.10	-0.41	11.59	QP
12	26.699	36.48	-13.52	50.00	25.30	-0.41	11.59	Average

Note:

- Level(dBuV) = Read Level(dBuV) + LISM Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

**<Class B Limit>**

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz

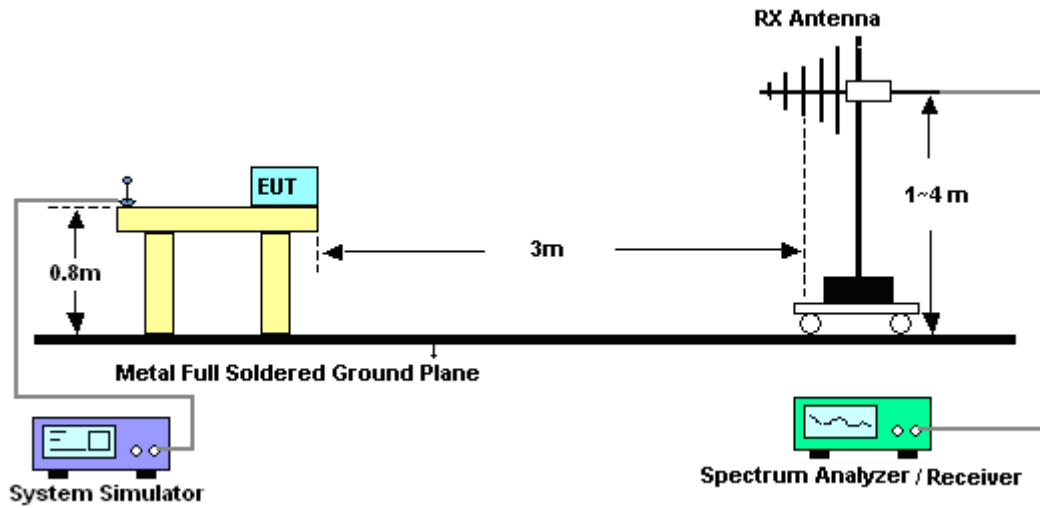


For radiated emissions above 1GHz

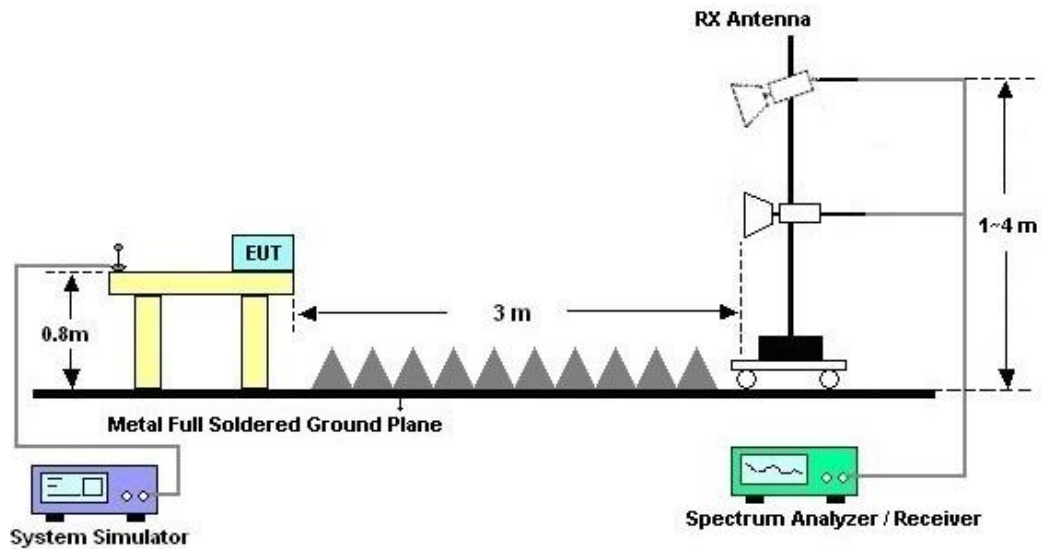

### 3.2.5. Test Result of Radiated Emission

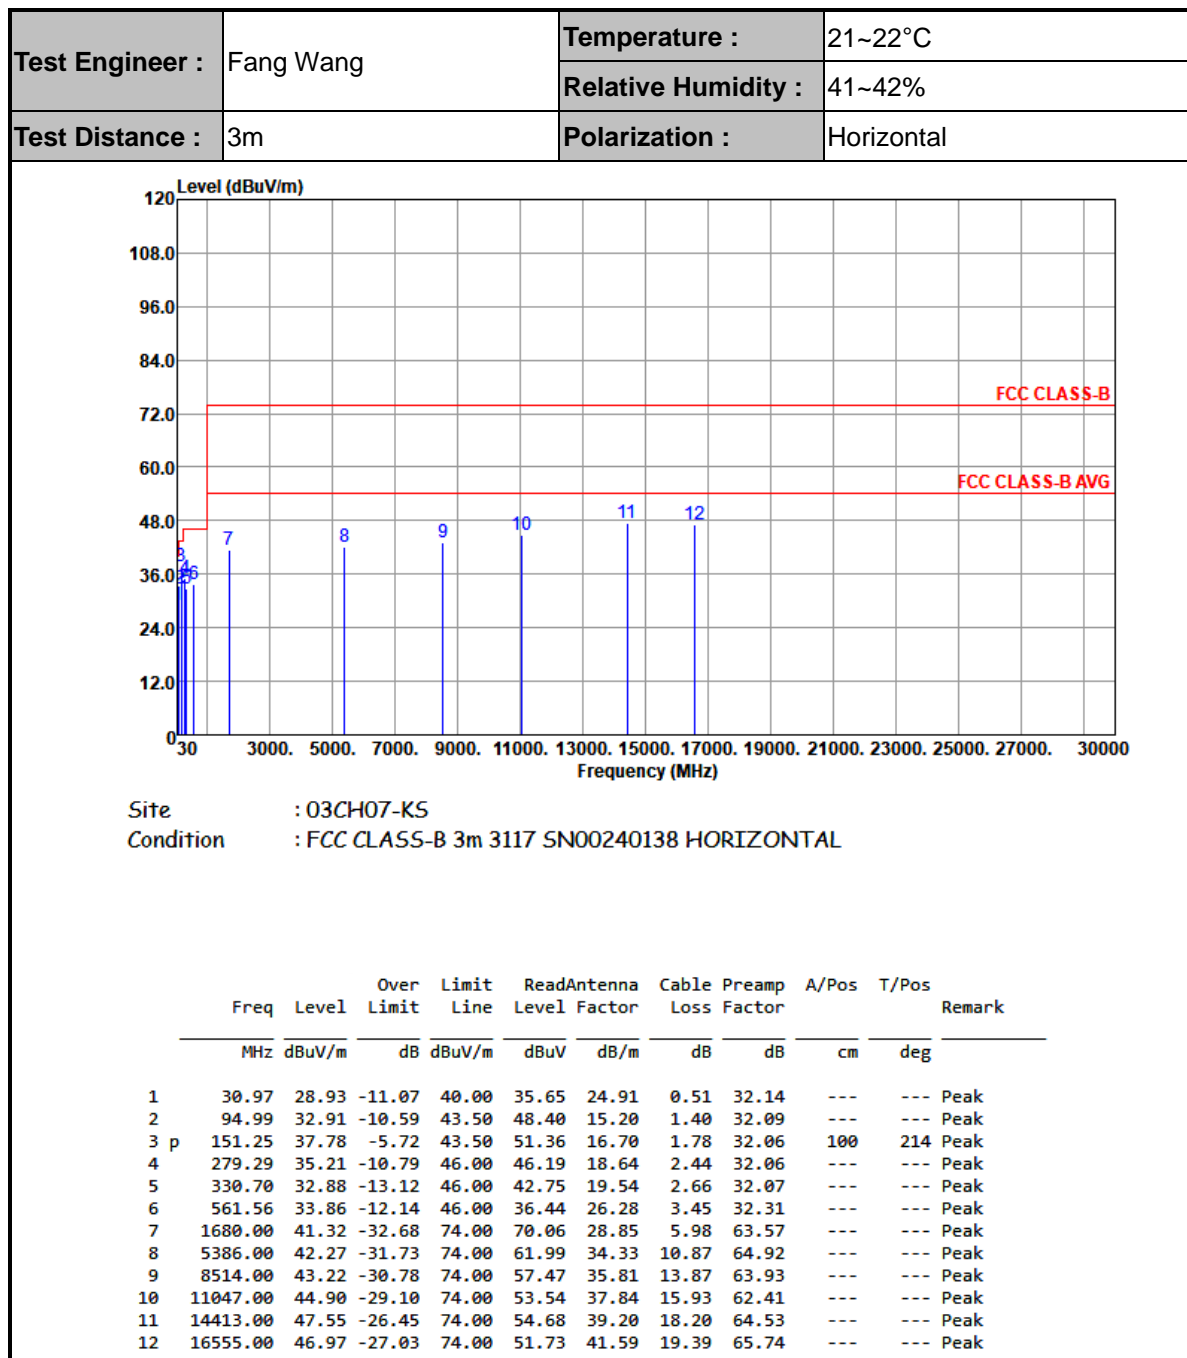



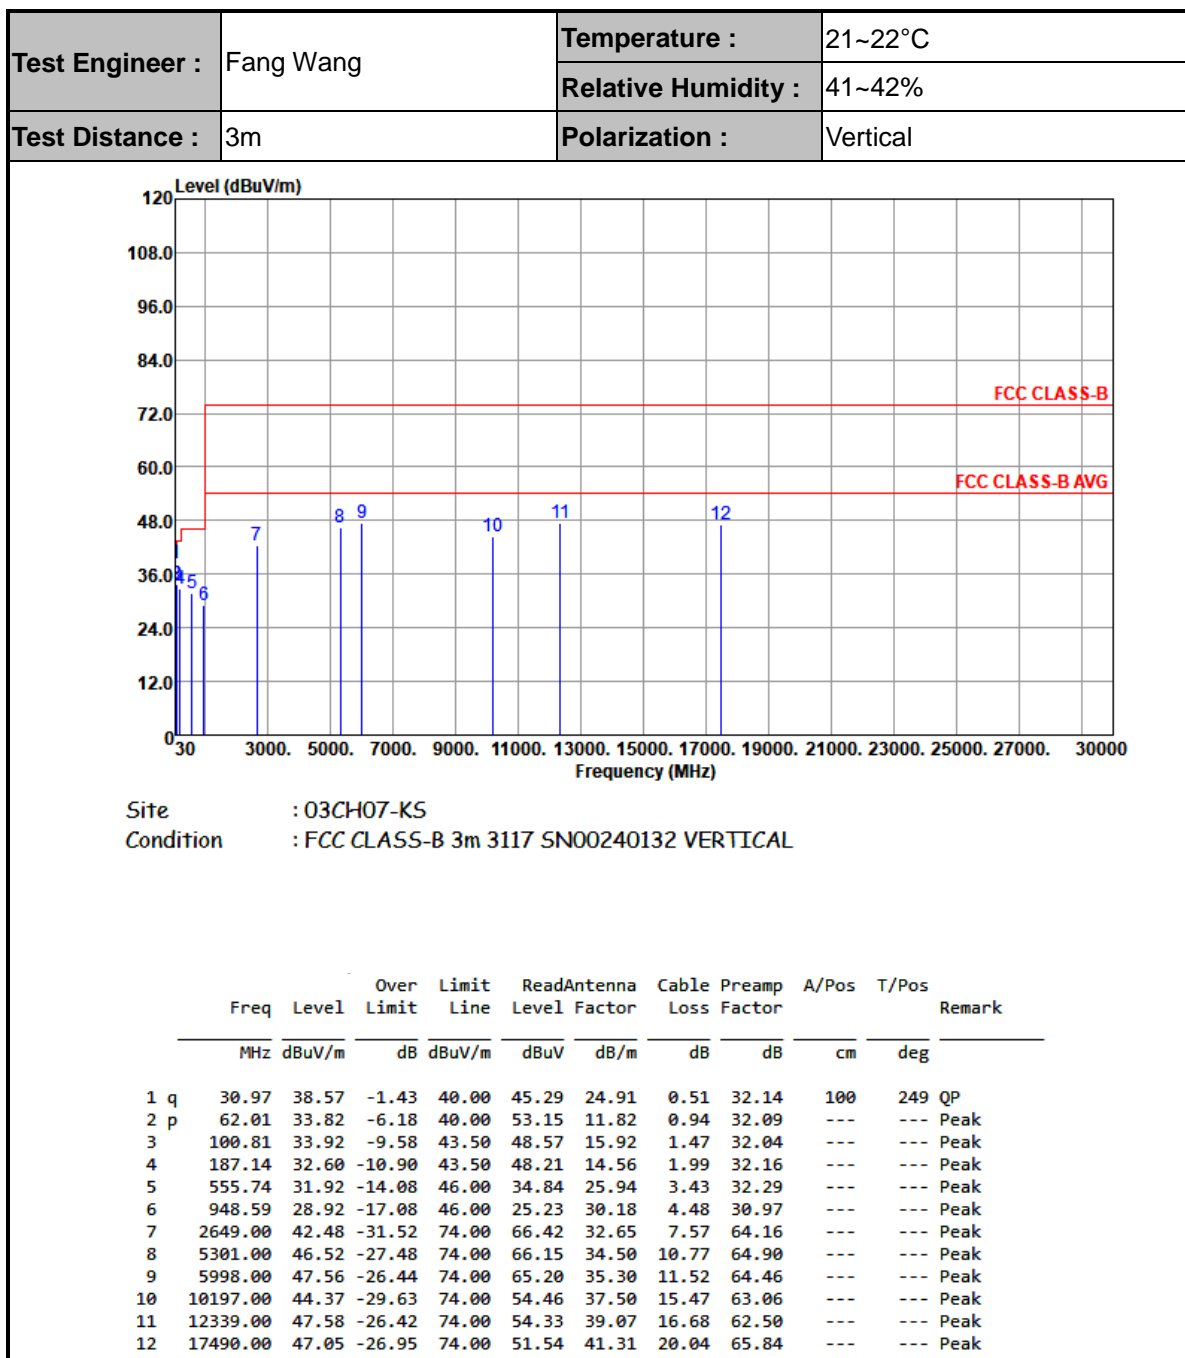

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Oct. 23, 2023 ~Oct. 25, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Oct. 23, 2023 ~Oct. 25, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Oct. 23, 2023 ~Oct. 25, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Oct. 23, 2023 ~Oct. 25, 2023	Oct. 10, 2024	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 10, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Oct. 09, 2024	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 10, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Oct. 09, 2024	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 12, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Aug. 11, 2024	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Apr. 05, 2024	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 16, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Oct. 15, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413741	9KHz~1GHz	Jan. 05, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Oct. 10, 2023	Oct. 20, 2023 ~Oct. 25, 2023	Oct. 09, 2024	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Oct. 20, 2023 ~Oct. 25, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Oct. 20, 2023 ~Oct. 25, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Oct. 20, 2023 ~Oct. 25, 2023	NCR	Radiation (03CH07-KS)

NCR: No Calibration Required

## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.20dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.86dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.24dB
---	--------