



FCC RF Test Report

APPLICANT : Smawave Technology Co. ,Ltd
EQUIPMENT : 5G ODU_NA
BRAND NAME : smawave
MODEL NAME : SRE620-b
FCC ID : 2AU8HSRE620-B
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band Category A and B Devices (CBD)
EQUIPMENT TYPE : CPE-CBSD (Category B)
TEST DATE(S) : May 11, 2023 ~ May 19, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Maximum EIRP and Emission Designator 6

 1.5 Testing Site..... 6

 1.6 Test Software 7

 1.7 Applied Standards 7

2 Test Configuration of Equipment Under Test 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Support Unit used in test configuration 9

 2.4 Measurement Results Explanation Example 9

 2.5 Frequency List of Low/Middle/High Channels..... 10

3 Conducted Test Items..... 12

 3.1 Measuring Instruments..... 12

 3.2 Conducted Output Power 13

 3.3 Peak-to-Average Ratio 14

 3.4 EIRP 15

 3.5 Occupied Bandwidth 17

 3.6 Conducted Band Edge 18

 3.7 Conducted Spurious Emission 19

 3.8 Frequency Stability..... 20

4 Radiated Test Items 21

 4.1 Measuring Instruments..... 21

 4.2 Test Setup 21

 4.3 Test Result of Radiated Test..... 22

 4.4 Radiated Spurious Emission 23

5 List of Measuring Equipment..... 24

6 Uncertainty of Evaluation 25

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



History of this test report

Report No.	Version	Description	Issued Date
FG342001A	01	Initial issue of report	May 31, 2023



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Pass	-
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 16.22 dB at 7230.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Smawave Technology Co. ,Ltd

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

1.2 Manufacturer

Smawave Technology Co. ,Ltd

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	5G ODU_NA
Brand Name	smawave
Model Name	SRE620-b
FCC ID	2AU8HSRE620-B
Tx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz
Rx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Conducted Power	<Ant. 0> LTE Band 48: 22.28 dBm LTE Band 48C_CA: 20.70 dBm
Antenna Gain	<Ant. 0> LTE Band 48: 8.26 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
IMEI Code	Conducted: 863109050027817 Radiation: 863109050027833
HW Version	V1.0
SW Version	Codium_FW_5G_1.0.8



1.4 Maximum EIRP and Emission Designator

LTE Band 48		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	3552.5~3697.5	1.1220	4M48G7D	0.9204	4M49W7D
10	3555.0~3695.0	1.1324	9M05G7D	0.8954	9M13W7D
15	3557.5~3692.5	1.0740	13M4G7D	0.8872	13M5W7D
20	3560.0~3690.0	1.0889	17M9G7D	0.8974	18M0W7D
LTE Band 48 CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5MHz+20MHz		0.7691	23M2G7D	0.6152	23M3W7D
10MHz+20MHz		0.7816	27M9G7D	0.6223	28M1W7D
15MHz+20MHz		0.7798	32M8G7D	0.6209	32M9W7D
20MHz+5MHz		0.7621	23M3G7D	0.6166	23M5W7D
20MHz+10MHz		0.7745	28M0G7D	0.6209	28M0W7D
20MHz+15MHz		0.7852	32M7G7D	0.6194	32M9W7D
20MHz+20MHz		0.7870	37M6G7D	0.6252	37M6W7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309



1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power & E.I.R.P	48	-	-	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	48	-	-				v	v	v	v	v	v	v		v		v	
26dB and 99% Bandwidth	48	-	-	v	v	v	v	v	v						v		v	
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Conducted Spurious Emission	48	-	-	v	v	v	v	v					v			v	v	v
Power Spectral Density	48	-	-	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Frequency Stability	48	-	-	v					v						v		v	
Radiated Spurious Emission	48	Worst Case															v	
Note	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 																	

Test Items	Band	Bandwidth (MHz)										Modulation				RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power & E.I.R.P	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v					v		v	
Conducted Band Edge	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v
Conducted Spurious Emission	48C_CA	v	v	v	v	v	v	v	-	-	-	v				v			v	v	v
Power Spectral Density	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v
Frequency Stability	48C_CA	v							-	-	-	v						v		v	
Radiated Spurious Emission	48C_CA	Worst Case																		v	
Note	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 																				

2.2 Connection Diagram of Test System

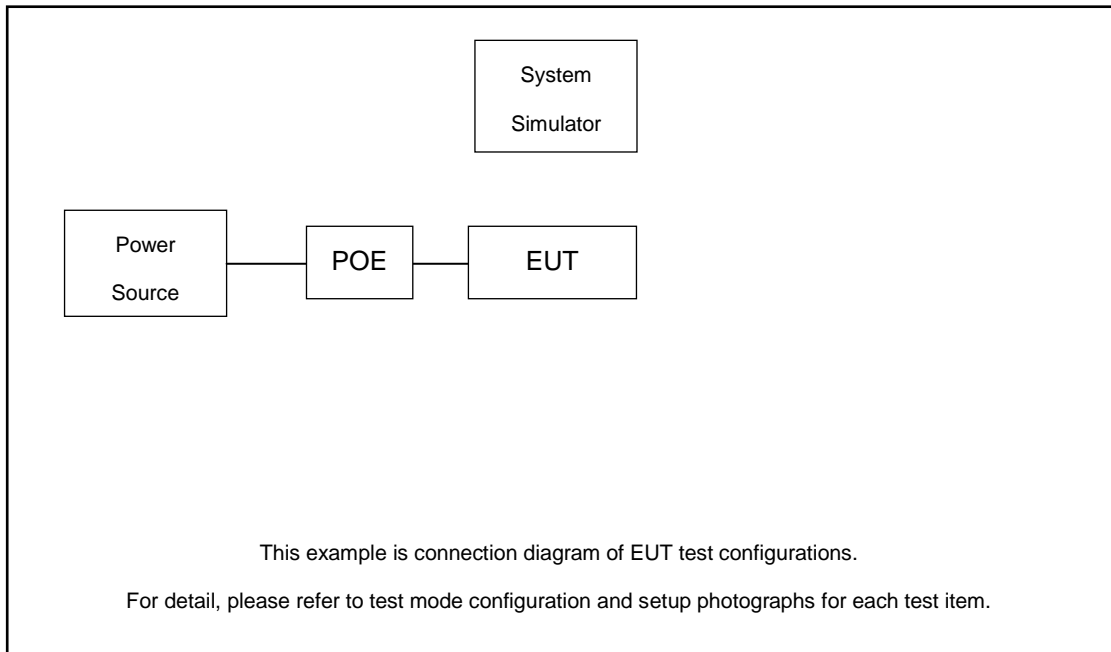

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.3 dB.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 6.3 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest	
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690



20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 +20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

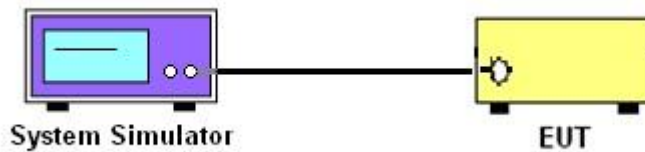

3.1.3 PSD, Peak-to-Average Ratio, 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

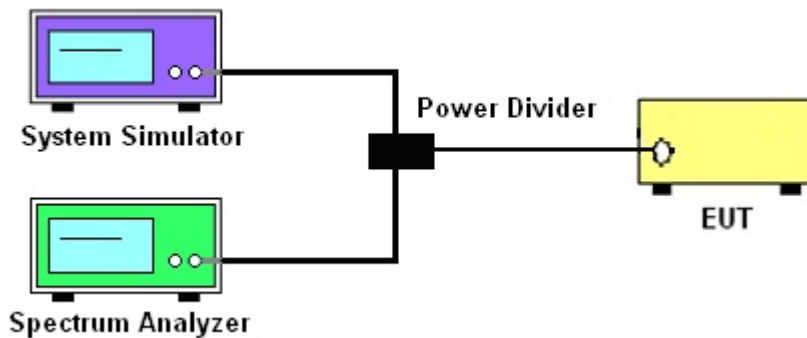

3.1.4 Frequency Stability

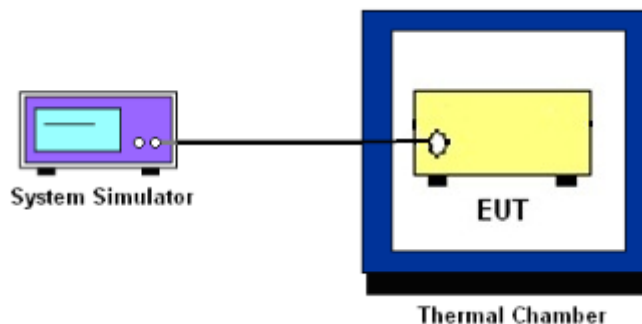

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP and PSD limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
<input type="checkbox"/>	End User Device	23	n/a
<input type="checkbox"/>	Category A CBSD	30	20
Applied	Category B CBSD	47	37

Remark:

1. The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)
2. Maximum PSD values are radiated. Measurements can be done conducted and add antenna gain back in.

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)
 - EIRP = $P_T + G_T - L_C$, ERP = EIRP -2.15, where
 - P_T = transmitter output power in dBm
 - G_T = gain of the transmitting antenna in dBi
 - L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.4.3 Test Procedures for EIRP PSD

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 2 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).
10. Determine the EIRP by adding the effective antenna gain to the adjusted power level.
11. Add $10 \log(1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

9. The EUT was connected to spectrum analyzer and system simulator via a power divider.
10. The band edges of low and high channels for the highest RF powers were measured.
11. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
12. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
13. Offset has included the duty factor for LTE Band 48. Duty factor = $10 \log (1/x)$, where x is the measured duty cycle.
14. Set spectrum analyzer with RMS detector.
15. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

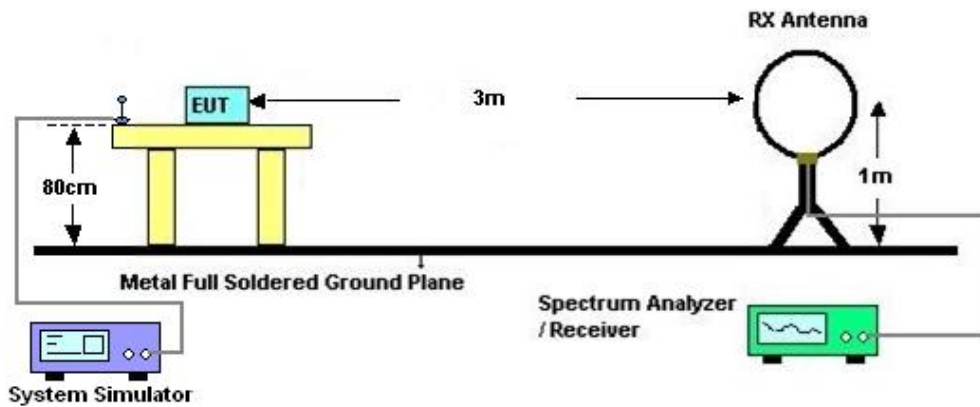

4.2.2 For radiated test from 30MHz to 1GHz

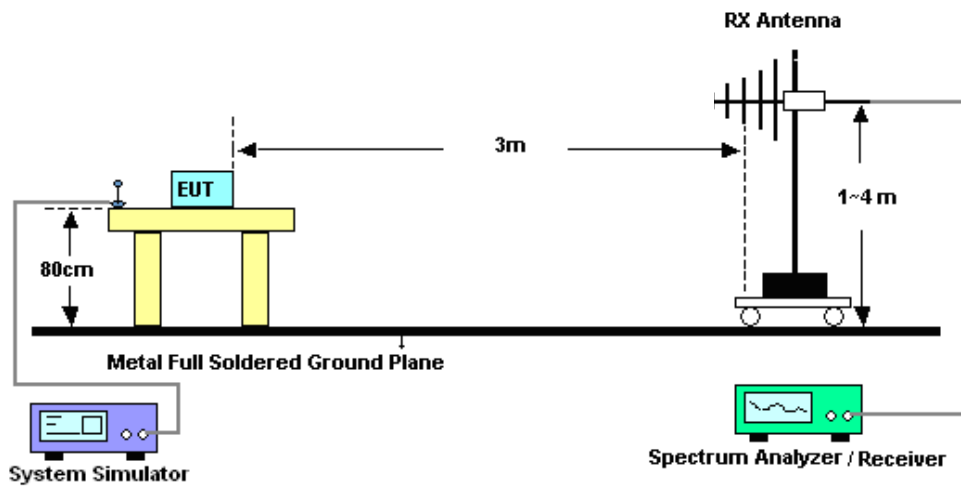

4.2.3 For radiated test above 1GHz

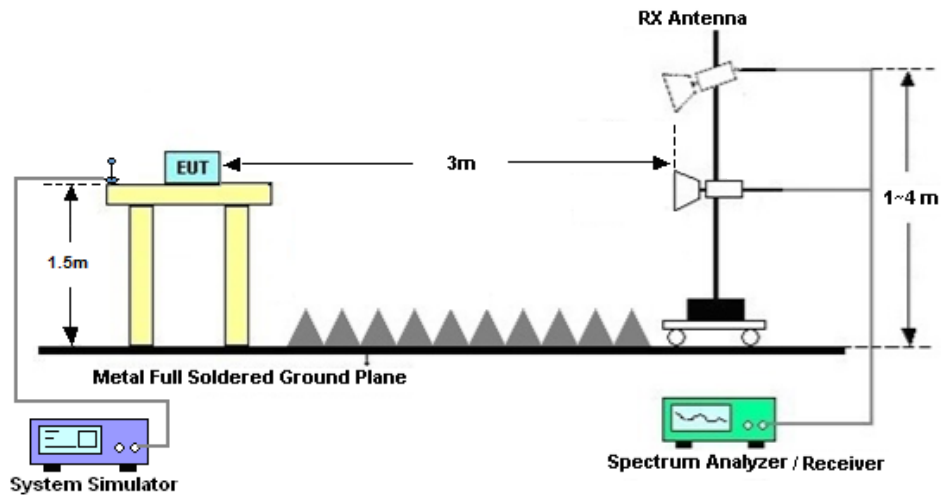

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	May 11, 2023~ May 19, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	May 11, 2023~ May 19, 2023	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 15, 2022	May 11, 2023~ May 19, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY574710 79	10Hz-44G,MAX 30dB	Oct. 12, 2022	May 13, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	May 13, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	May 13, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	May 13, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	May 13, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	May 13, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2023	May 13, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 12, 2022	May 13, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A023 70	1Ghz-18Ghz	Oct. 12, 2022	May 13, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	May 13, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 13, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 13, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

LTE Band 48 (Ant.0):

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	EIRP(W)		
								L	M	H
Channel				55340	55990	56640		EIRP(W)		
Frequency (MHz)				3560	3625	3690		L	M	H
20	QPSK	1	0	21.28	21.90	21.99	8.26	0.8995	1.0375	1.0593
20	QPSK	1	99	21.29	21.68	22.11	8.26	0.9016	0.9863	1.0889
20	QPSK	100	0	20.31	20.98	21.26	8.26	0.7194	0.8395	0.8954
20	16QAM	1	0	20.30	20.89	21.10	8.26	0.7178	0.8222	0.8630
20	16QAM	1	99	20.25	20.68	21.27	8.26	0.7096	0.7834	0.8974
20	16QAM	100	0	19.26	19.91	20.24	8.26	0.5649	0.6561	0.7079
20	64QAM	1	0	19.29	19.92	20.16	8.26	0.5689	0.6577	0.6950
20	64QAM	1	99	19.32	20.02	20.11	8.26	0.5728	0.6730	0.6871
20	64QAM	100	0	18.30	18.94	19.23	8.26	0.4529	0.5248	0.5610
20	256QAM	1	0	16.33	16.89	17.10	8.26	0.2877	0.3273	0.3436
20	256QAM	1	99	16.45	16.86	17.17	8.26	0.2958	0.3251	0.3491
20	256QAM	100	0	16.32	16.90	17.23	8.26	0.2871	0.3281	0.3540
Channel				55315	55990	56665	Gain	EIRP(W)		
Frequency (MHz)				3557.5	3625	3692.5		L	M	H
15	QPSK	1	0	21.22	21.82	22.04	8.26	0.8872	1.0186	1.0715
15	QPSK	1	74	21.08	21.74	22.05	8.26	0.8590	1.0000	1.0740
15	QPSK	75	0	20.31	20.88	21.26	8.26	0.7194	0.8204	0.8954
15	16QAM	1	0	20.34	20.93	21.22	8.26	0.7244	0.8299	0.8872
15	16QAM	1	74	20.02	20.80	21.04	8.26	0.6730	0.8054	0.8511
15	16QAM	75	0	19.25	19.81	20.24	8.26	0.5636	0.6412	0.7079
15	64QAM	1	0	19.22	19.92	20.23	8.26	0.5598	0.6577	0.7063
15	64QAM	1	74	19.20	19.79	20.23	8.26	0.5572	0.6383	0.7063
15	64QAM	75	0	18.28	18.87	19.20	8.26	0.4508	0.5164	0.5572
15	256QAM	1	0	16.24	16.87	17.06	8.26	0.2818	0.3258	0.3404
15	256QAM	1	74	16.23	16.83	17.07	8.26	0.2812	0.3228	0.3412
15	256QAM	75	0	16.26	16.90	17.19	8.26	0.2831	0.3281	0.3508
Channel				55290	55990	56690	Gain	EIRP(W)		
Frequency (MHz)				3555	3625	3695		L	M	H
10	QPSK	1	0	21.41	22.01	22.23	8.26	0.9268	1.0641	1.1194
10	QPSK	1	49	21.24	21.90	22.28	8.26	0.8913	1.0375	1.1324
10	QPSK	50	0	20.44	20.99	21.32	8.26	0.7413	0.8414	0.9078
10	16QAM	1	0	20.29	21.05	21.26	8.26	0.7161	0.8531	0.8954
10	16QAM	1	49	20.35	20.88	21.25	8.26	0.7261	0.8204	0.8933
10	16QAM	50	0	19.45	19.97	20.35	8.26	0.5902	0.6653	0.7261



10	64QAM	1	0	19.48	20.02	20.32	8.26	0.5943	0.6730	0.7211
10	64QAM	1	49	19.25	19.94	20.35	8.26	0.5636	0.6607	0.7261
10	64QAM	50	0	18.43	19.05	19.34	8.26	0.4667	0.5383	0.5754
10	256QAM	1	0	16.49	17.05	17.07	8.26	0.2985	0.3396	0.3412
10	256QAM	1	49	16.28	16.88	17.06	8.26	0.2844	0.3266	0.3404
10	256QAM	50	0	16.45	17.02	17.33	8.26	0.2958	0.3373	0.3622
Channel				55265	55990	56715	Gain	EIRP(W)		
Frequency (MHz)				3552.5	3625	3697.5		L	M	H
5	QPSK	1	0	21.41	21.94	22.17	8.26	0.9268	1.0471	1.1041
5	QPSK	1	24	21.33	21.98	22.24	8.26	0.9099	1.0568	1.1220
5	QPSK	25	0	20.46	20.96	21.31	8.26	0.7447	0.8356	0.9057
5	16QAM	1	0	20.41	20.91	21.20	8.26	0.7362	0.8260	0.8831
5	16QAM	1	24	20.22	21.04	21.38	8.26	0.7047	0.8511	0.9204
5	16QAM	25	0	19.44	19.99	20.35	8.26	0.5888	0.6683	0.7261
5	64QAM	1	0	19.48	20.01	20.33	8.26	0.5943	0.6714	0.7228
5	64QAM	1	24	19.40	20.09	20.25	8.26	0.5834	0.6839	0.7096
5	64QAM	25	0	18.41	19.05	19.35	8.26	0.4645	0.5383	0.5768
5	256QAM	1	0	16.42	16.87	17.19	8.26	0.2938	0.3258	0.3508
5	256QAM	1	24	16.29	16.97	17.31	8.26	0.2851	0.3334	0.3606
5	256QAM	25	0	16.40	17.01	17.31	8.26	0.2924	0.3365	0.3606



LTE Band 48C_CA (Ant.0):

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Gain	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
				L	M	H		L	M	H
Channel				L	M	H		L	M	H
20+20	QPSK	1RB01RBMAX		1.41	1.61	1.71	8.26	0.0093	0.0097	0.0099
	QPSK	1RBMAX1RB0		1.06	1.50	1.84	8.26	0.0086	0.0095	0.0102
	QPSK	FULL		12.28	20.70	12.95	8.26	0.1132	0.7870	0.1321
	16QAM	1RB01RBMAX		1.43	1.67	1.70	8.26	0.0093	0.0098	0.0099
	16QAM	1RBMAX1RB0		1.02	1.55	1.79	8.26	0.0085	0.0096	0.0101
	16QAM	FULL		12.35	19.70	12.91	8.26	0.1151	0.6252	0.1309
	64QAM	1RB01RBMAX		1.49	1.78	1.82	8.26	0.0094	0.0101	0.0102
	64QAM	1RBMAX1RB0		1.21	1.67	1.94	8.26	0.0089	0.0098	0.0105
	64QAM	FULL		12.20	19.67	12.90	8.26	0.1112	0.6209	0.1306
	256QAM	1RB01RBMAX		1.36	1.68	1.75	8.26	0.0092	0.0099	0.0100
	256QAM	1RBMAX1RB0		0.97	1.68	1.77	8.26	0.0084	0.0099	0.0101
	256QAM	FULL		12.21	17.71	12.86	8.26	0.1114	0.3954	0.1294
20+15	QPSK	1RB01RBMAX		1.34	1.69	1.76	8.26	0.0091	0.0099	0.0100
	QPSK	1RBMAX1RB0		1.03	1.52	1.83	8.26	0.0085	0.0095	0.0102
	QPSK	FULL		12.18	20.69	12.92	8.26	0.1107	0.7852	0.1312
	16QAM	1RB01RBMAX		1.32	1.64	1.69	8.26	0.0091	0.0098	0.0099
	16QAM	1RBMAX1RB0		0.98	1.50	1.83	8.26	0.0084	0.0095	0.0102
	16QAM	FULL		12.25	19.66	12.97	8.26	0.1125	0.6194	0.1327
	64QAM	1RB01RBMAX		1.39	1.63	1.82	8.26	0.0092	0.0097	0.0102
	64QAM	1RBMAX1RB0		1.13	1.58	1.93	8.26	0.0087	0.0096	0.0104
	64QAM	FULL		12.14	19.65	12.89	8.26	0.1096	0.6180	0.1303
	256QAM	1RB01RBMAX		1.26	1.61	1.71	8.26	0.0090	0.0097	0.0099
	256QAM	1RBMAX1RB0		0.96	1.49	1.78	8.26	0.0084	0.0094	0.0101
	256QAM	FULL		12.14	17.68	12.94	8.26	0.1096	0.3926	0.1318
20+10	QPSK	1RB01RBMAX		1.28	1.64	1.84	8.26	0.0090	0.0098	0.0102
	QPSK	1RBMAX1RB0		0.98	1.49	1.75	8.26	0.0084	0.0094	0.0100
	QPSK	FULL		12.18	20.63	12.97	8.26	0.1107	0.7745	0.1327
	16QAM	1RB01RBMAX		1.17	1.64	1.74	8.26	0.0088	0.0098	0.0100
	16QAM	1RBMAX1RB0		0.96	1.39	1.66	8.26	0.0084	0.0092	0.0098
	16QAM	FULL		12.24	19.67	12.94	8.26	0.1122	0.6209	0.1318
	64QAM	1RB01RBMAX		1.32	1.70	1.81	8.26	0.0091	0.0099	0.0102
	64QAM	1RBMAX1RB0		1.03	1.54	1.94	8.26	0.0085	0.0095	0.0105
	64QAM	FULL		12.13	19.66	12.90	8.26	0.1094	0.6194	0.1306
	256QAM	1RB01RBMAX		1.14	1.57	1.69	8.26	0.0087	0.0096	0.0099
	256QAM	1RBMAX1RB0		0.93	1.53	1.74	8.26	0.0083	0.0095	0.0100
	256QAM	FULL		12.13	17.64	12.89	8.26	0.1094	0.3890	0.1303
20+5	QPSK	1RB01RBMAX		1.16	1.64	1.81	8.26	0.0087	0.0098	0.0102
	QPSK	1RBMAX1RB0		0.97	1.44	1.72	8.26	0.0084	0.0093	0.0100
	QPSK	FULL		12.15	20.56	12.96	8.26	0.1099	0.7621	0.1324
	16QAM	1RB01RBMAX		1.15	1.54	1.75	8.26	0.0087	0.0095	0.0100
	16QAM	1RBMAX1RB0		1.02	1.47	1.75	8.26	0.0085	0.0094	0.0100
	16QAM	FULL		12.19	19.64	12.99	8.26	0.1109	0.6166	0.1334
	64QAM	1RB01RBMAX		1.18	1.63	1.91	8.26	0.0088	0.0097	0.0104
	64QAM	1RBMAX1RB0		1.13	1.52	1.82	8.26	0.0087	0.0095	0.0102
	64QAM	FULL		12.07	19.58	12.98	8.26	0.1079	0.6081	0.1330



	256QAM	1RB01RBMAX	1.13	1.66	1.87	8.26	0.0087	0.0098	0.0103
	256QAM	1RBMAX1RB0	0.93	1.43	1.71	8.26	0.0083	0.0093	0.0099
	256QAM	FULL	12.08	17.60	12.88	8.26	0.1081	0.3855	0.1300
15+20	QPSK	1RB01RBMAX	1.21	1.57	1.77	8.26	0.0089	0.0096	0.0101
	QPSK	1RBMAX1RB0	0.95	1.62	1.80	8.26	0.0083	0.0097	0.0101
	QPSK	FULL	12.24	20.66	12.93	8.26	0.1122	0.7798	0.1315
	16QAM	1RB01RBMAX	1.13	1.55	1.58	8.26	0.0087	0.0096	0.0096
	16QAM	1RBMAX1RB0	0.92	1.67	1.84	8.26	0.0083	0.0098	0.0102
	16QAM	FULL	12.16	19.67	12.90	8.26	0.1102	0.6209	0.1306
	64QAM	1RB01RBMAX	1.28	1.71	1.74	8.26	0.0090	0.0099	0.0100
	64QAM	1RBMAX1RB0	1.02	1.65	1.98	8.26	0.0085	0.0098	0.0106
	64QAM	FULL	12.10	19.65	12.86	8.26	0.1086	0.6180	0.1294
	256QAM	1RB01RBMAX	1.14	1.50	1.76	8.26	0.0087	0.0095	0.0100
	256QAM	1RBMAX1RB0	0.86	1.59	1.83	8.26	0.0082	0.0097	0.0102
	256QAM	FULL	12.12	17.65	12.87	8.26	0.1091	0.3899	0.1297
10+20	QPSK	1RB01RBMAX	1.16	1.55	1.74	8.26	0.0087	0.0096	0.0100
	QPSK	1RBMAX1RB0	0.91	1.65	1.84	8.26	0.0083	0.0098	0.0102
	QPSK	FULL	12.07	20.67	12.90	8.26	0.1079	0.7816	0.1306
	16QAM	1RB01RBMAX	1.08	1.60	1.59	8.26	0.0086	0.0097	0.0097
	16QAM	1RBMAX1RB0	0.82	1.60	1.73	8.26	0.0081	0.0097	0.0100
	16QAM	FULL	12.10	19.68	12.92	8.26	0.1086	0.6223	0.1312
	64QAM	1RB01RBMAX	1.23	1.62	1.83	8.26	0.0089	0.0097	0.0102
	64QAM	1RBMAX1RB0	0.98	1.73	1.89	8.26	0.0084	0.0100	0.0104
	64QAM	FULL	11.98	19.65	12.87	8.26	0.1057	0.6180	0.1297
	256QAM	1RB01RBMAX	1.07	1.50	1.72	8.26	0.0086	0.0095	0.0100
	256QAM	1RBMAX1RB0	0.83	1.67	1.83	8.26	0.0081	0.0098	0.0102
	256QAM	FULL	12.01	17.66	12.86	8.26	0.1064	0.3908	0.1294
5+20	QPSK	1RB01RBMAX	1.07	1.52	1.66	8.26	0.0086	0.0095	0.0098
	QPSK	1RBMAX1RB0	0.88	1.67	1.81	8.26	0.0082	0.0098	0.0102
	QPSK	FULL	11.99	20.60	12.82	8.26	0.1059	0.7691	0.1282
	16QAM	1RB01RBMAX	1.01	1.59	1.67	8.26	0.0085	0.0097	0.0098
	16QAM	1RBMAX1RB0	0.87	1.61	1.91	8.26	0.0082	0.0097	0.0104
	16QAM	FULL	12.04	19.62	12.90	8.26	0.1072	0.6138	0.1306
	64QAM	1RB01RBMAX	1.03	1.56	1.73	8.26	0.0085	0.0096	0.0100
	64QAM	1RBMAX1RB0	0.79	1.70	1.92	8.26	0.0080	0.0099	0.0104
	64QAM	FULL	11.93	19.63	12.89	8.26	0.1045	0.6152	0.1303
	256QAM	1RB01RBMAX	1.06	1.51	1.71	8.26	0.0086	0.0095	0.0099
	256QAM	1RBMAX1RB0	0.84	1.67	1.84	8.26	0.0081	0.0098	0.0102
	256QAM	FULL	11.91	17.63	12.82	8.26	0.1040	0.3882	0.1282



LTE Band 48

EIRP Power Density

1RB0

Mode	LTE Band 48 : EIRP Power Density (dBm/1MHz)							
BW	5MHz 1RB0				10MHz 1RB0			
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	29.20	28.12	27.68	24.54	29.31	28.30	27.62	24.41
Middle CH	29.72	28.87	27.86	24.63	29.99	29.19	28.26	25.21
Highest CH	30.23	29.28	28.17	25.16	30.28	29.59	28.42	25.27
BW	15MHz 1RB0				20MHz 1RB0			
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	29.41	28.50	27.29	24.59	29.25	28.67	27.24	24.54
Middle CH	29.70	29.10	28.13	25.01	30.05	28.97	27.96	24.86
Highest CH	30.26	29.18	28.45	25.36	30.30	29.31	28.03	25.25
Limit	37dBm /1MHz							
Gain	8.26							
Result	Pass							

1RB MAX

Mode	LTE Band 48 : EIRP Power Density (dBm/1MHz)							
BW	5MHz 1RBMAX				10MHz 1RBMAX			
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	29.25	28.50	27.68	24.32	29.19	28.19	27.14	23.79
Middle CH	29.68	28.91	27.97	25.04	29.85	29.13	28.04	25.35
Highest CH	30.20	29.33	28.14	25.19	30.09	29.25	27.96	25.36
BW	15MHz 1RBMAX				20MHz 1RBMAX			
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	29.17	28.26	27.35	24.71	28.92	28.41	27.08	24.34
Middle CH	29.73	28.77	28.33	25.15	29.89	28.60	27.96	25.31
Highest CH	30.24	28.98	27.98	25.46	30.26	29.15	28.26	25.40
Limit	37dBm /1MHz							
Gain	8.26							
Result	pass							



FULL RB

Mode	LTE Band 48 : EIRP Power Density (dBm/1MHz)							
	BW	5MHz FULL				10MHz FULL		
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	22.42	21.24	20.48	18.43	19.60	18.58	17.46	15.87
Middle CH	22.80	21.73	20.91	18.85	20.21	19.11	18.15	16.13
Highest CH	23.07	22.10	21.11	19.16	20.42	19.47	18.43	16.40
BW	15MHz FULL				20MHz FULL			
Mod.	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
Lowest CH	18.01	16.93	16.07	13.91	16.99	15.79	14.76	12.68
Middle CH	18.25	17.18	16.17	14.38	17.01	16.03	14.94	13.08
Highest CH	18.66	17.69	16.50	14.65	17.52	16.40	15.44	13.55
Limit	37dBm /1MHz							
Gain	8.26							
Result	Pass							




Conducted PSD


LTE Band 48 / 5MHz

QPSK


Lowest Channel / 1RB0

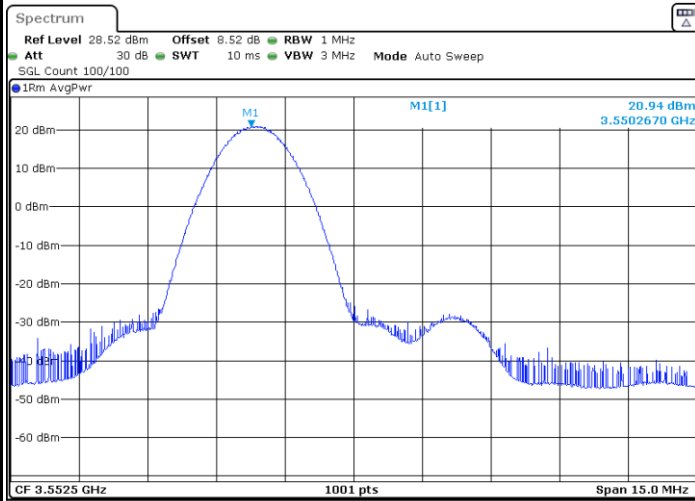

Lowest Channel / 1RBmax

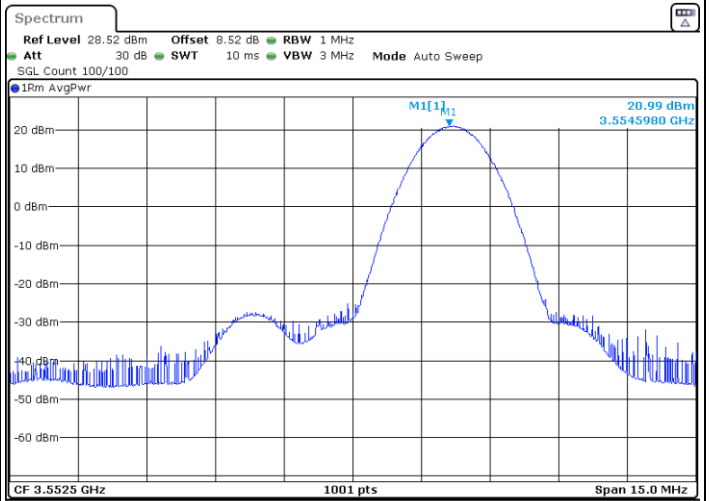

Lowest Channel / Full RB

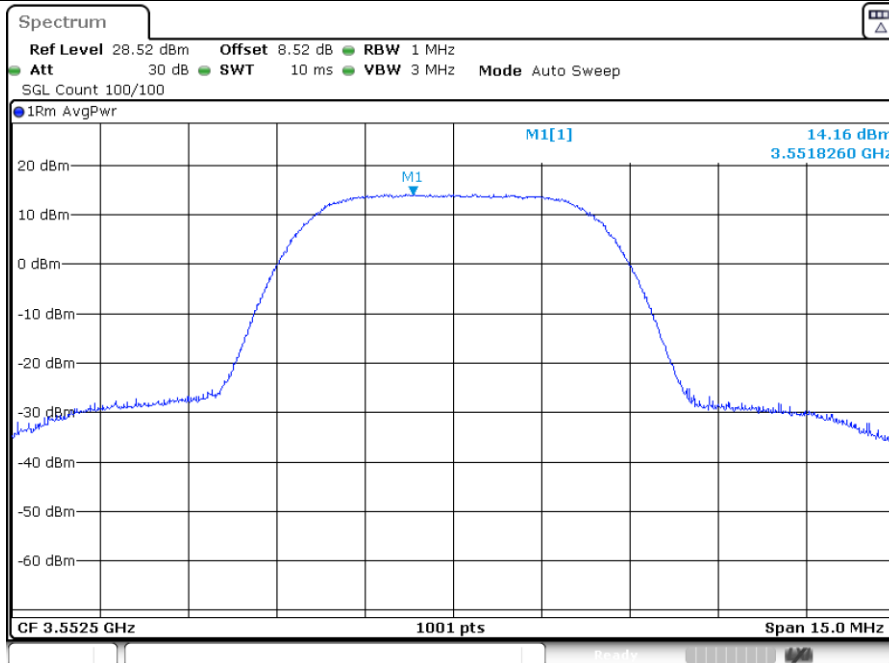




LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

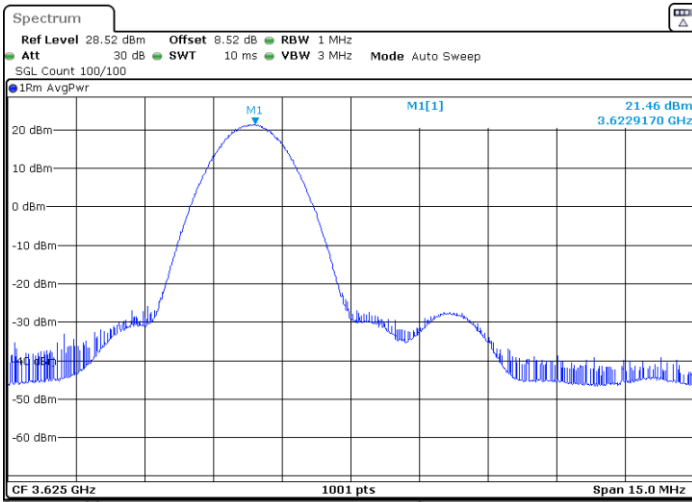


Date: 19.MAY.2023 09:26:35

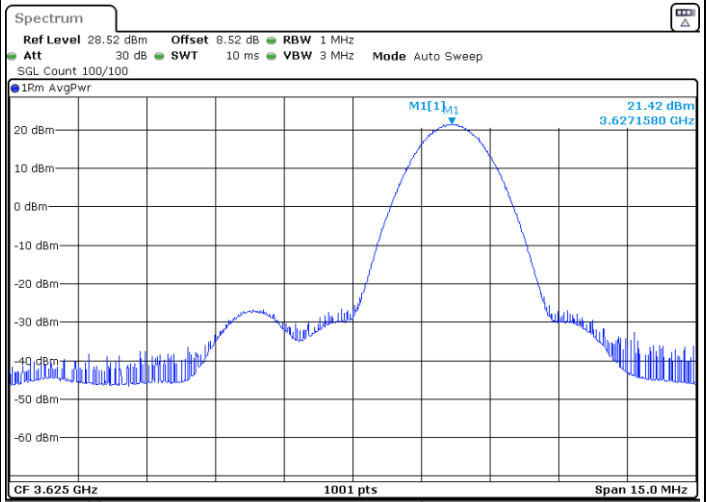

Date: 19.MAY.2023 09:29:57

Middle Channel / Full RB

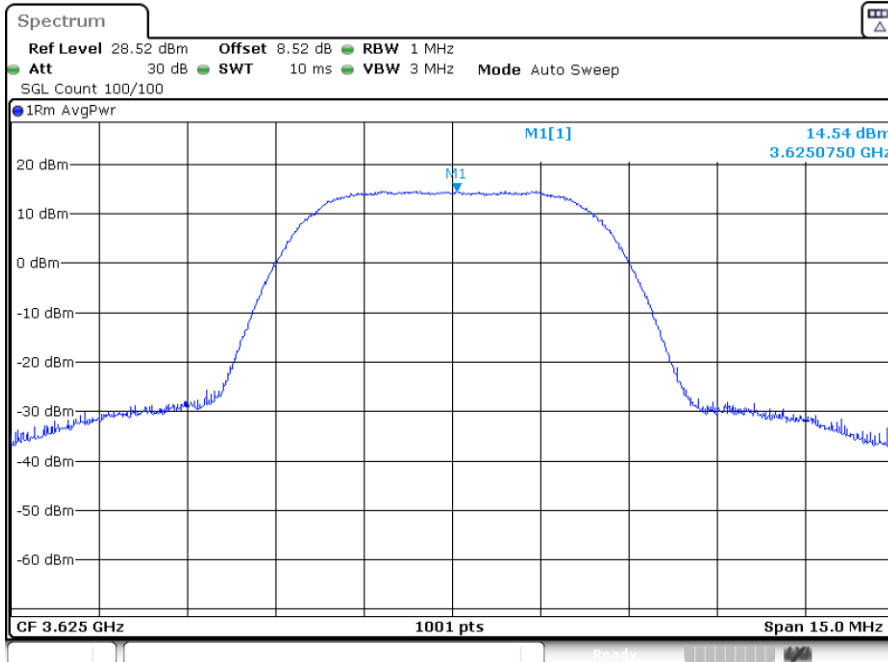

Date: 19.MAY.2023 09:30:25




LTE Band 48 / 5MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

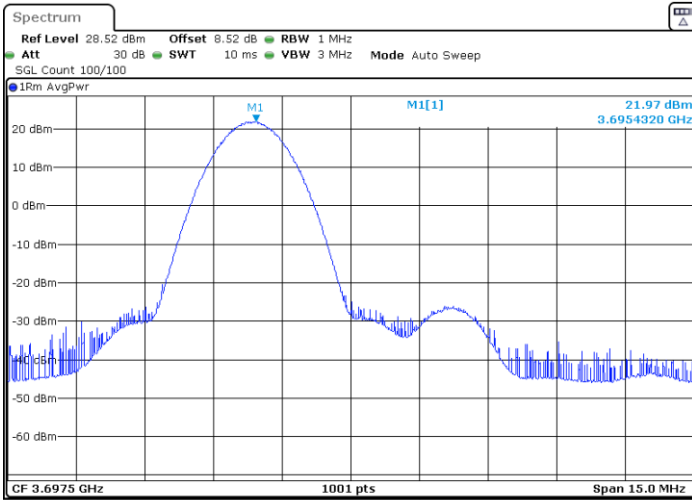


Date: 19.MAY.2023 09:32:21

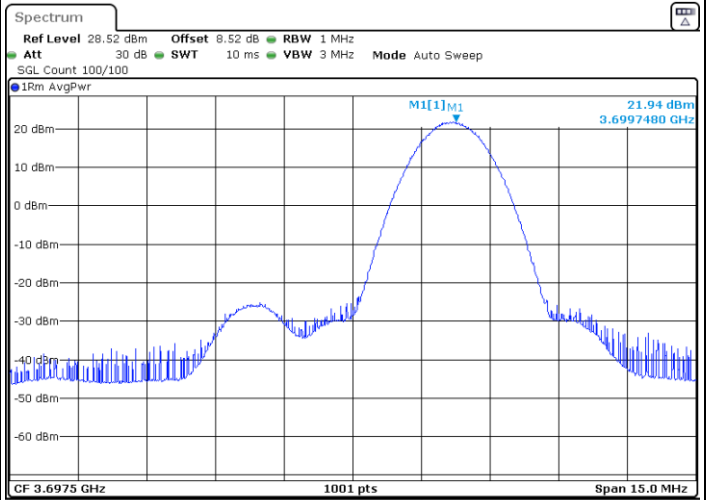

Date: 19.MAY.2023 09:36:15

Highest Channel / Full RB

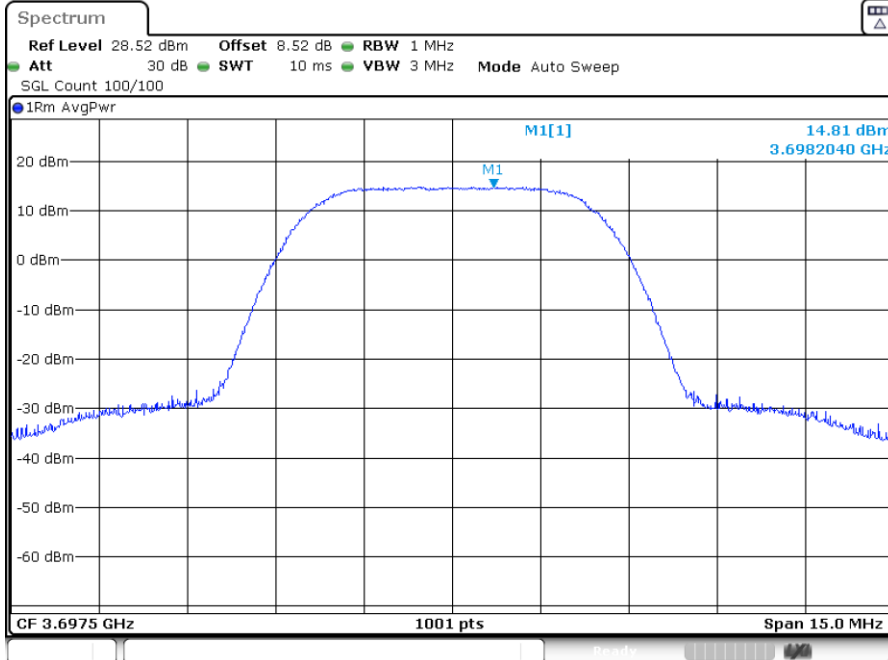

Date: 19.MAY.2023 09:36:44





LTE Band 48 / 5MHz

16QAM

Lowest Channel / 1RB0


Lowest Channel / 1RBmax

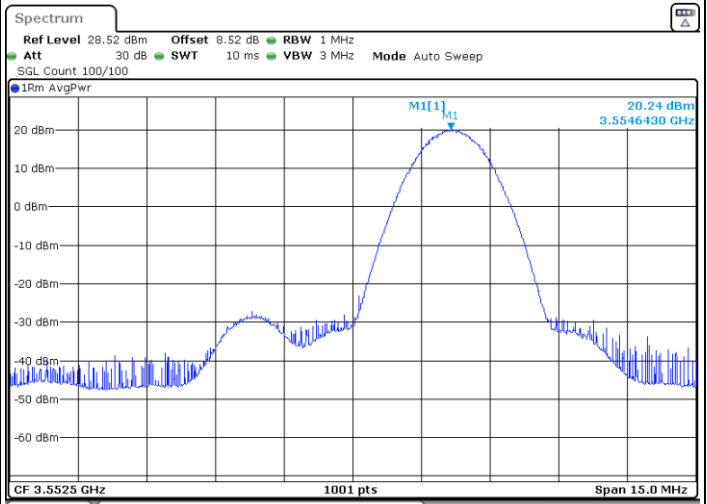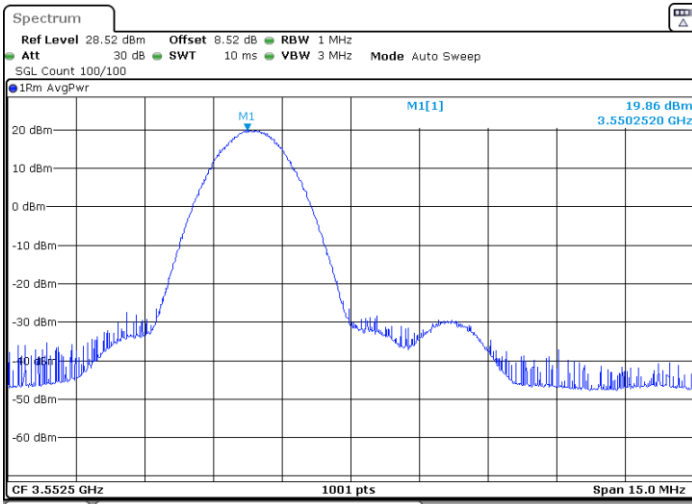

Date: 19.MAY.2023 09:20:22

Date: 19.MAY.2023 09:23:14

Lowest Channel / Full RB

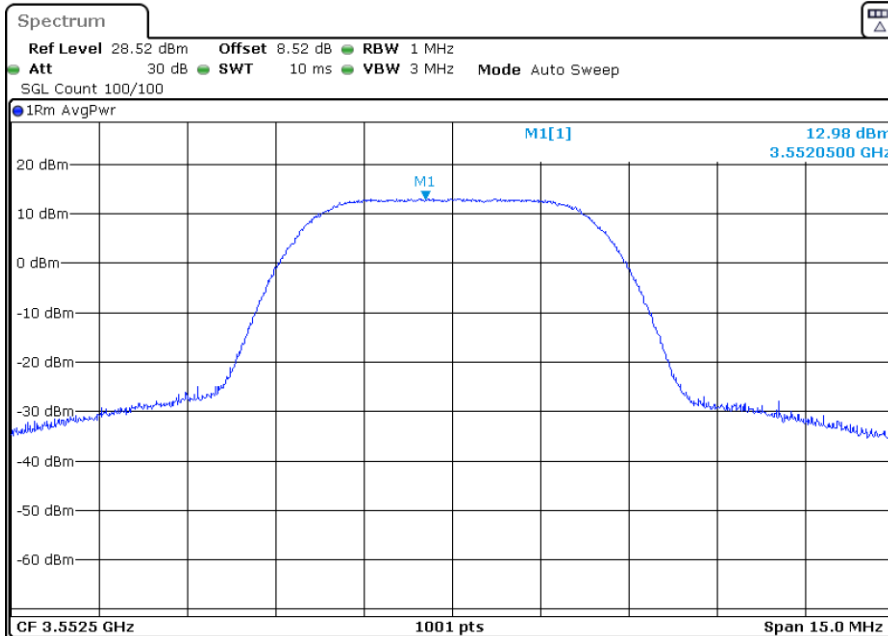

Date: 19.MAY.2023 09:24:43




LTE Band 48 / 5MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

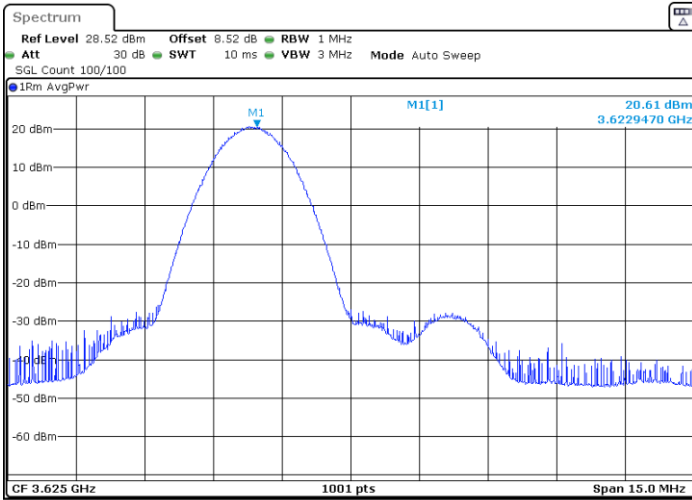


Date: 19.MAY.2023 09:27:04

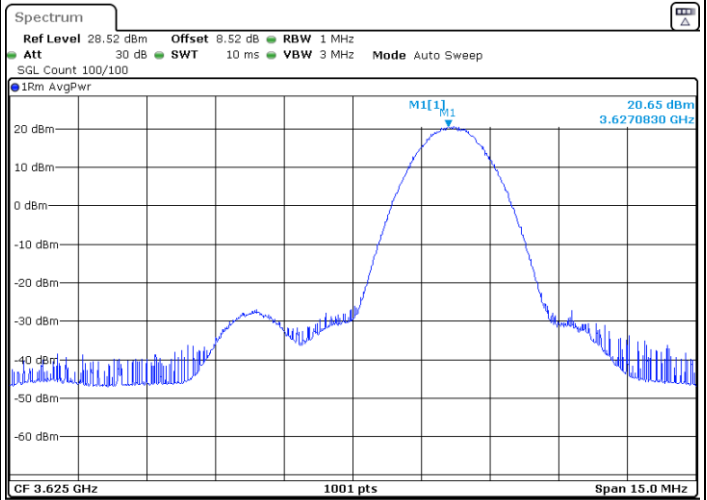

Date: 19.MAY.2023 09:29:28

Middle Channel / Full RB

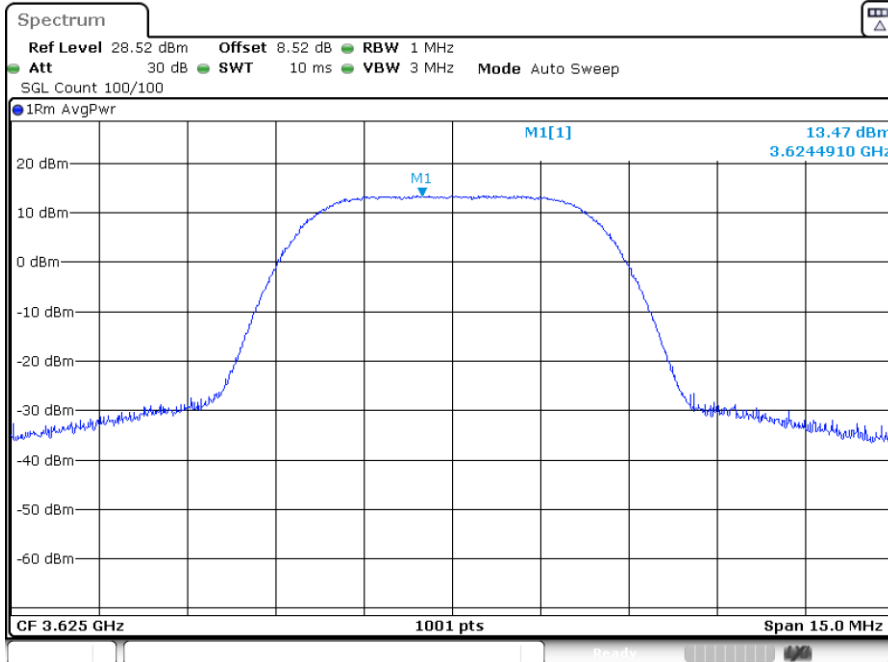

Date: 19.MAY.2023 09:30:54




LTE Band 48 / 5MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

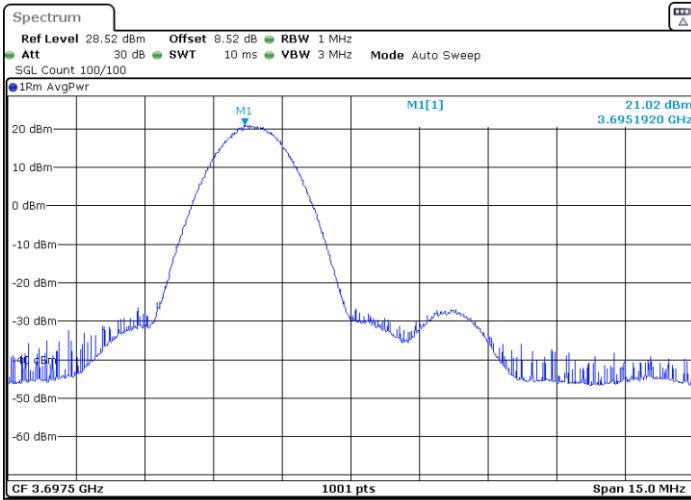


Date: 19.MAY.2023 09:32:51

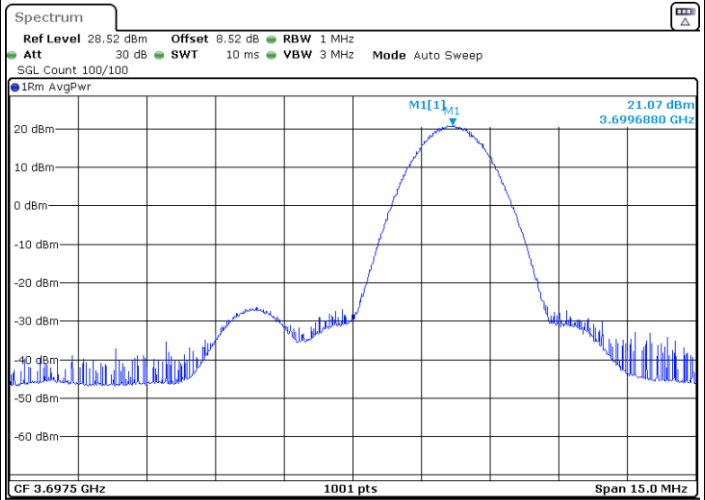

Date: 19.MAY.2023 09:35:45

Highest Channel / Full RB

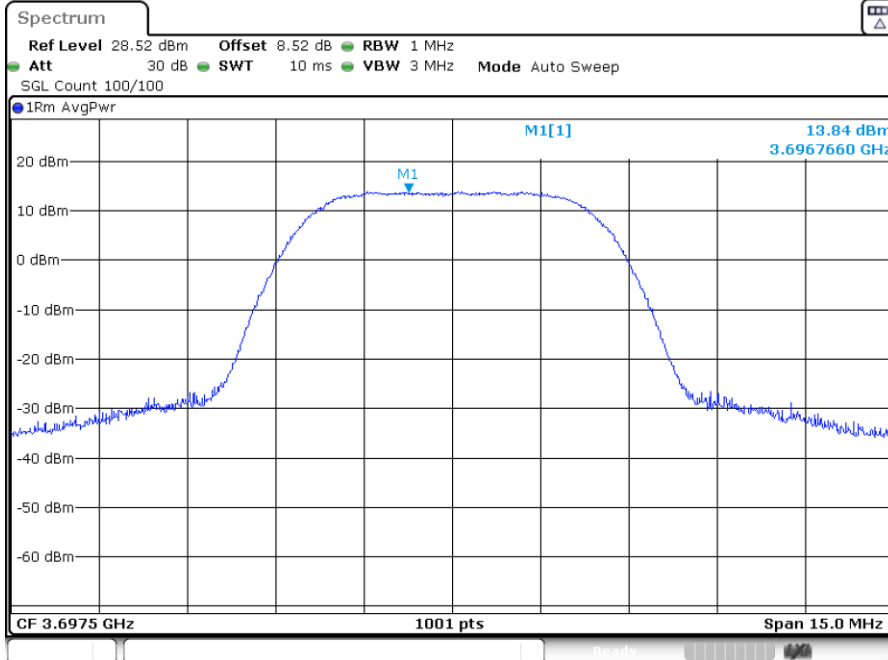

Date: 19.MAY.2023 09:37:14




LTE Band 48 / 5MHz


64QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

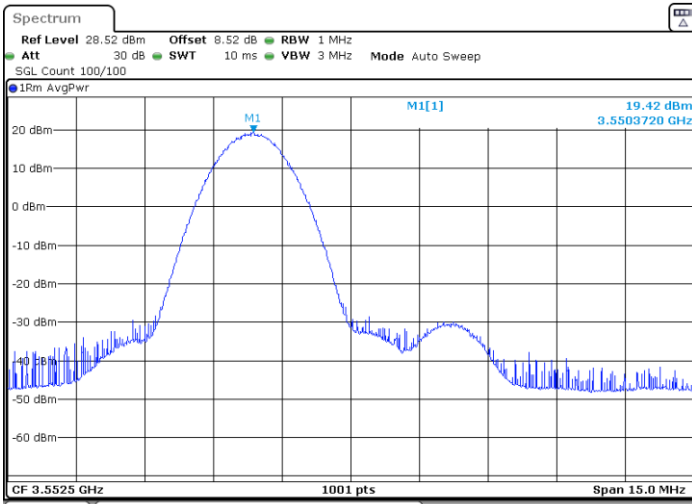


Date: 19.MAY.2023 09:20:52

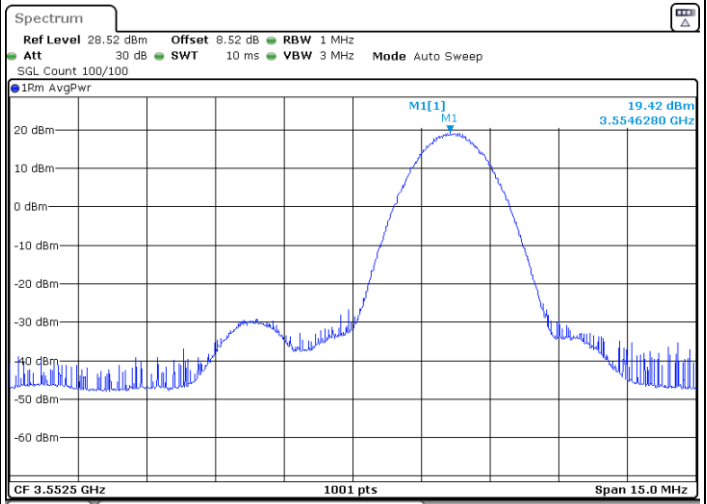

Date: 19.MAY.2023 09:22:45

Lowest Channel / Full RB

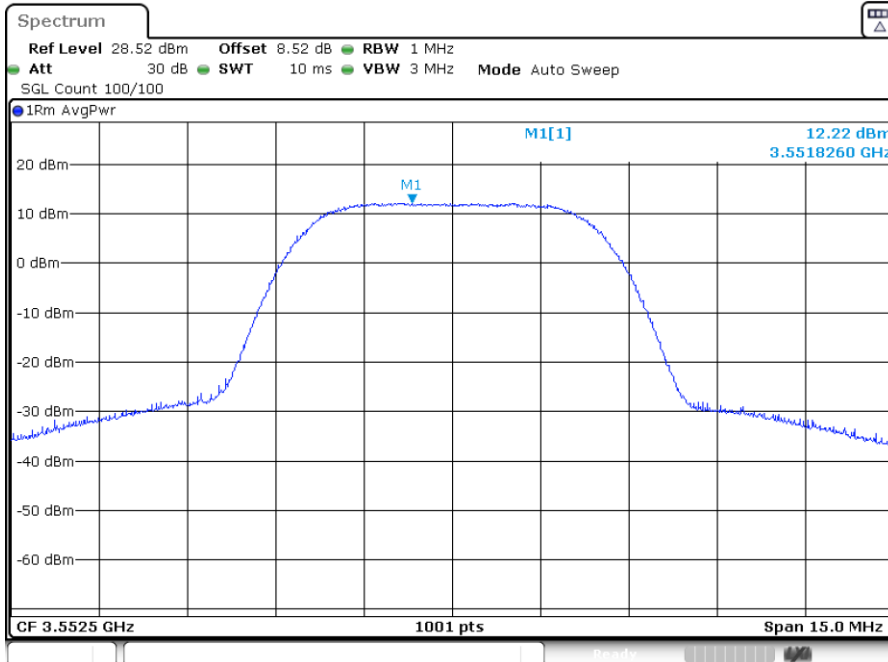

Date: 19.MAY.2023 09:25:12




LTE Band 48 / 5MHz


64QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

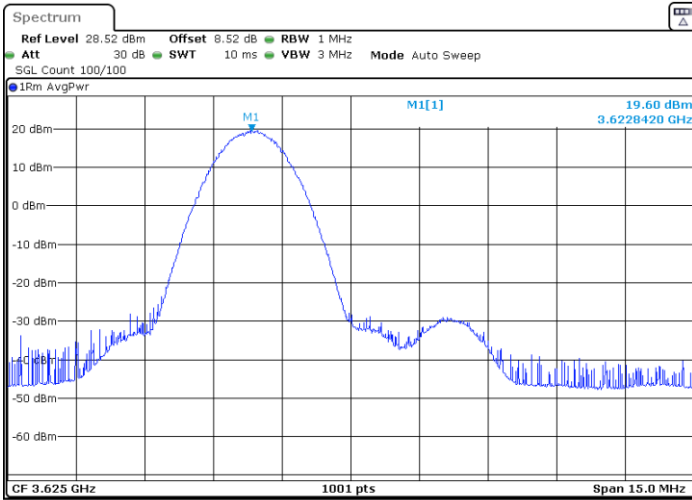


Date: 19.MAY.2023 09:27:32

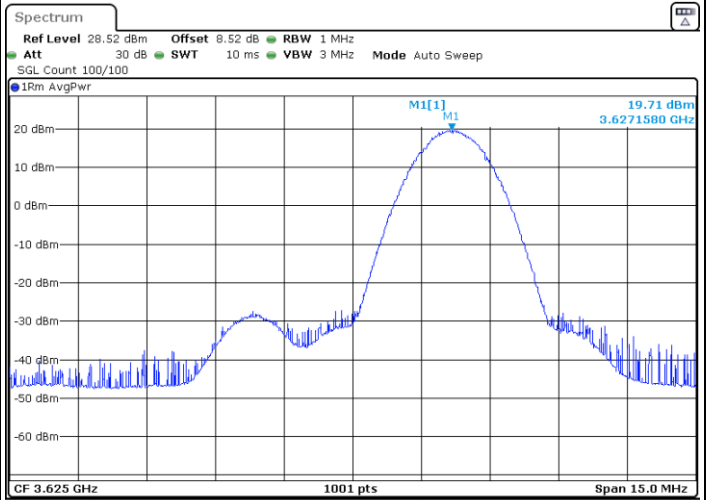

Date: 19.MAY.2023 09:28:59

Middle Channel / Full RB

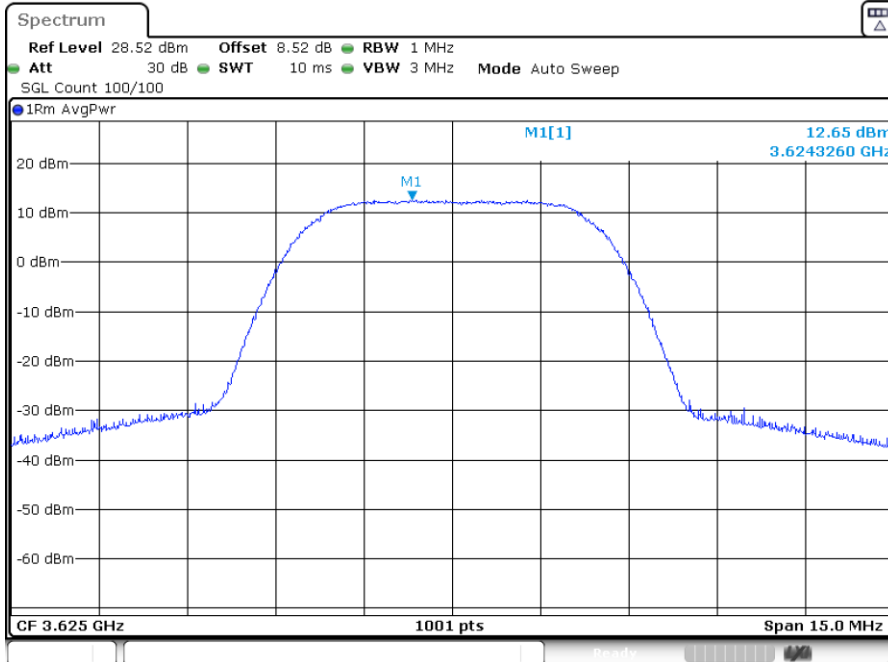

Date: 19.MAY.2023 09:31:23




LTE Band 48 / 5MHz


64QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

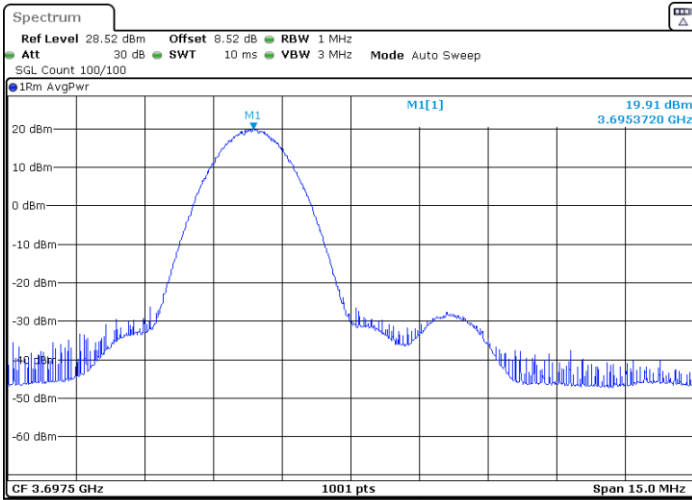


Date: 19.MAY.2023 09:33:20

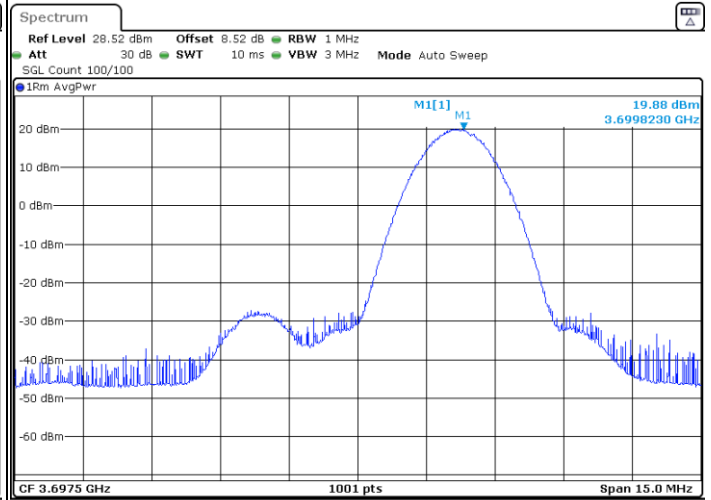

Date: 19.MAY.2023 09:35:15

Highest Channel / Full RB

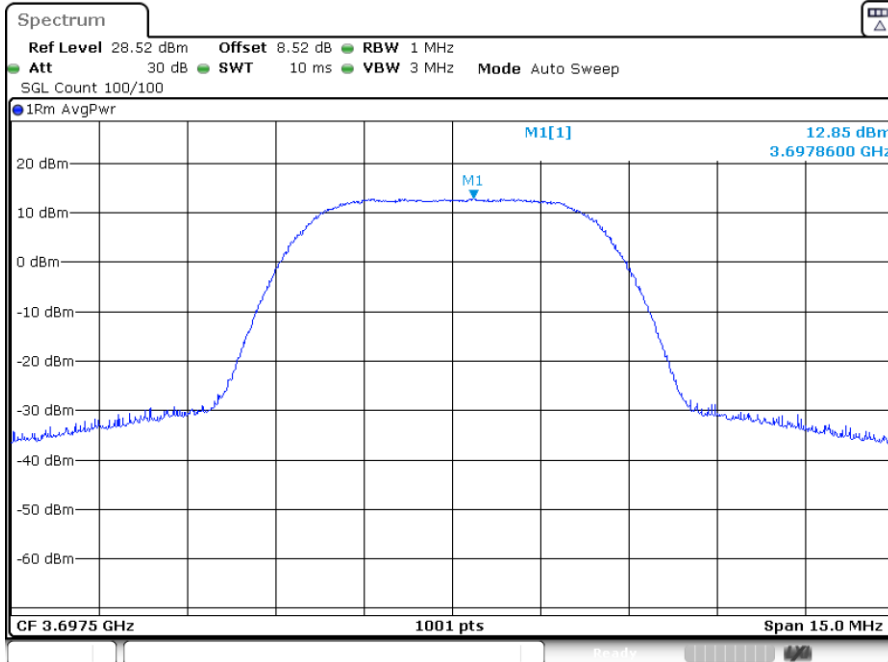

Date: 19.MAY.2023 09:37:43




LTE Band 48 / 5MHz


256QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

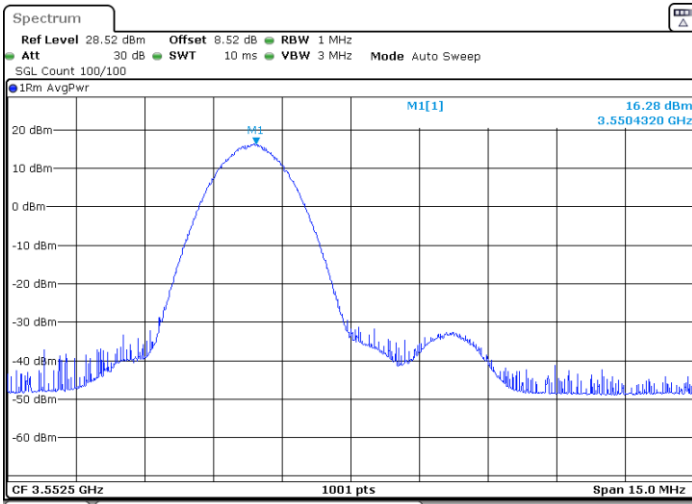


Date: 19.MAY.2023 09:21:22

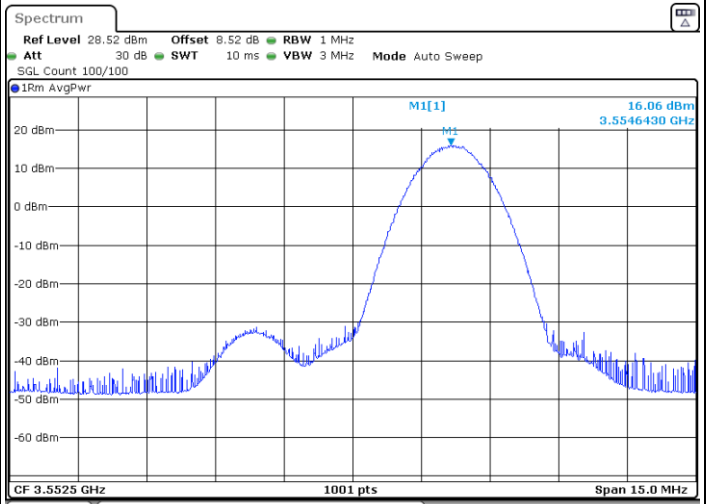

Date: 19.MAY.2023 09:22:15

Lowest Channel / Full RB

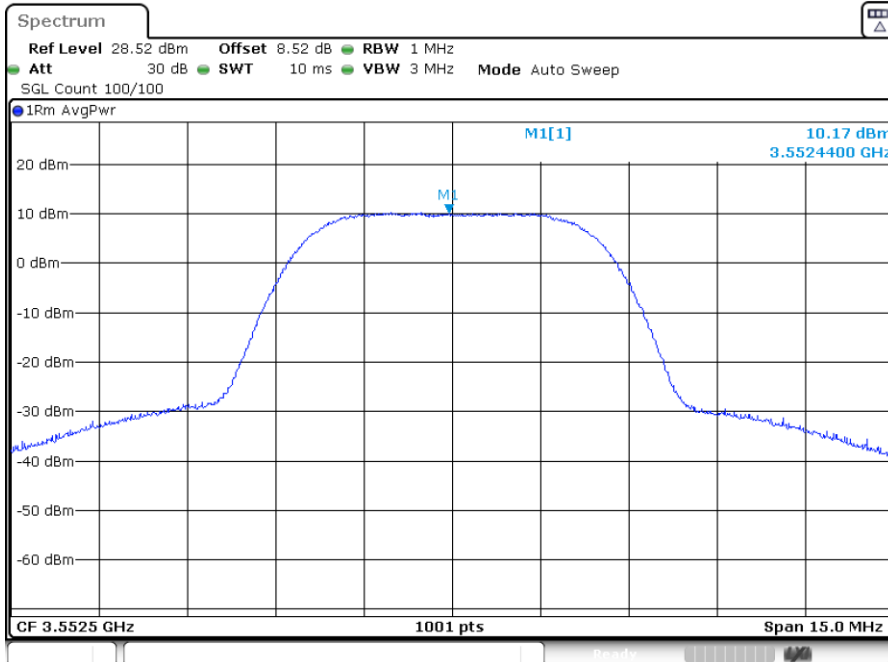

Date: 19.MAY.2023 09:25:42




LTE Band 48 / 5MHz


256QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

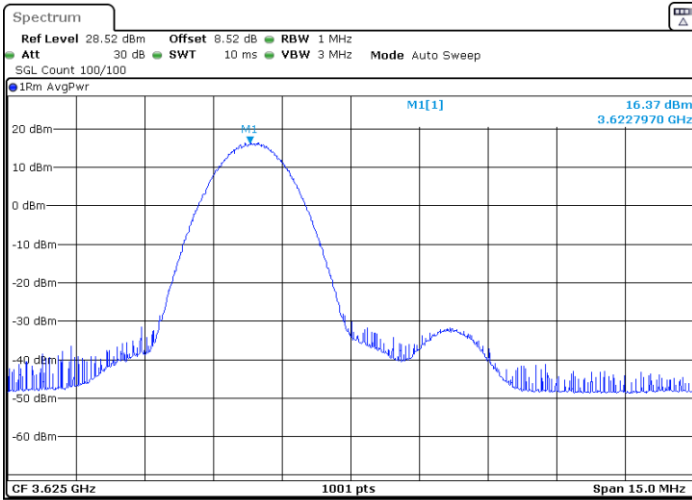


Date: 19.MAY.2023 09:28:01

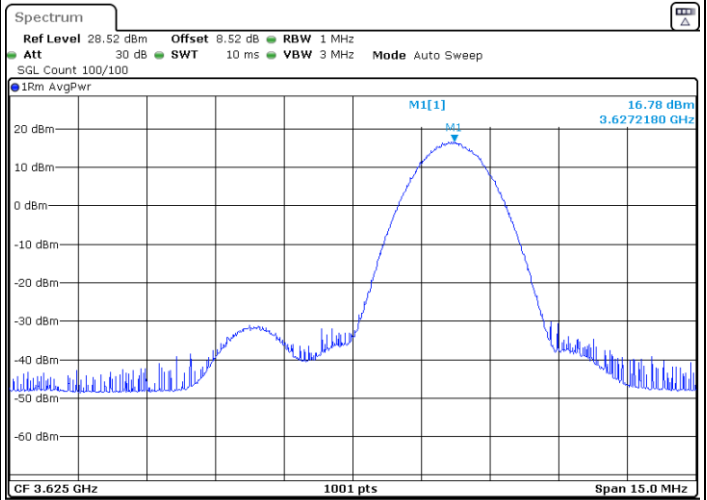

Date: 19.MAY.2023 09:28:30

Middle Channel / Full RB

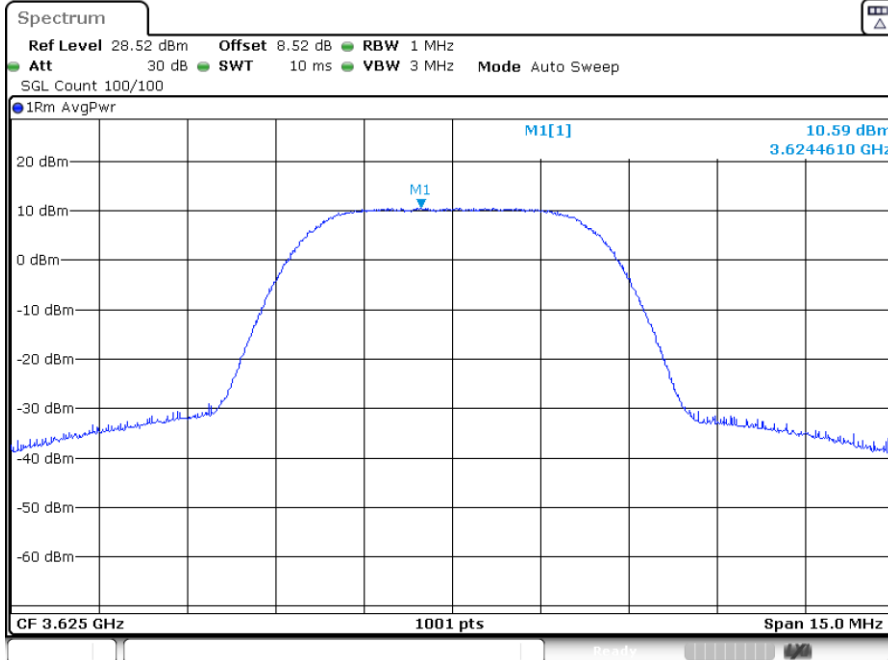

Date: 19.MAY.2023 09:31:52




LTE Band 48 / 5MHz


256QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

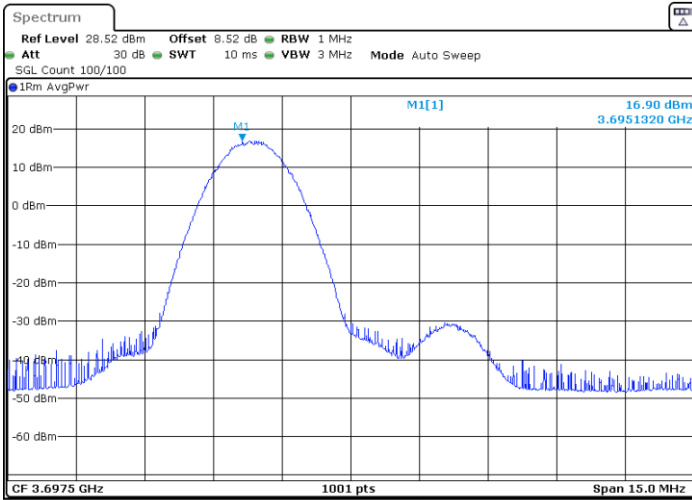


Date: 19.MAY.2023 09:33:50

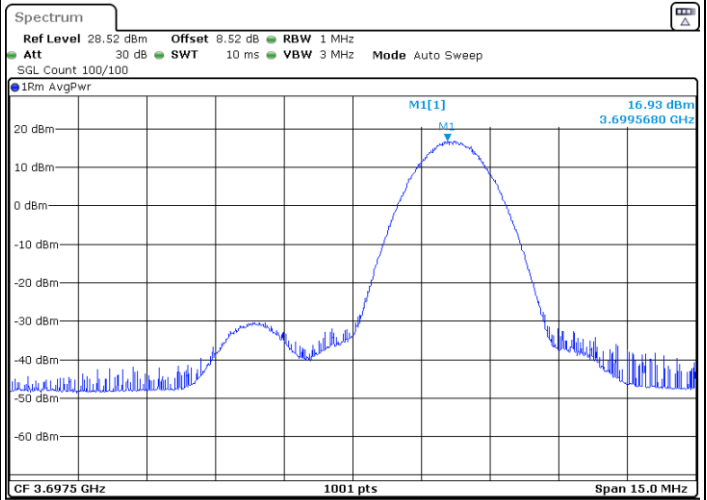

Date: 19.MAY.2023 09:34:43

Highest Channel / Full RB

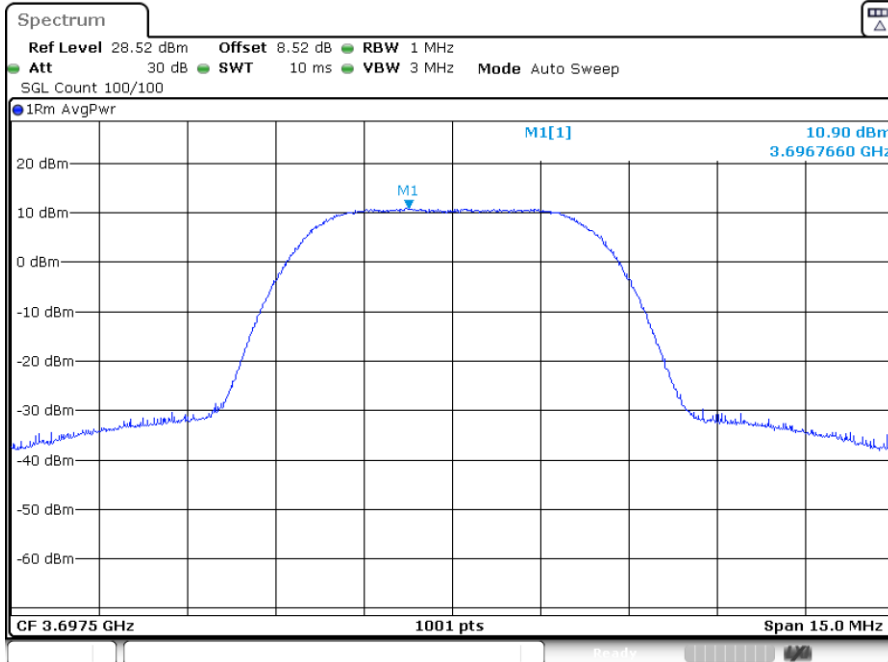

Date: 19.MAY.2023 09:38:13




LTE Band 48 / 10MHz


QPSK

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

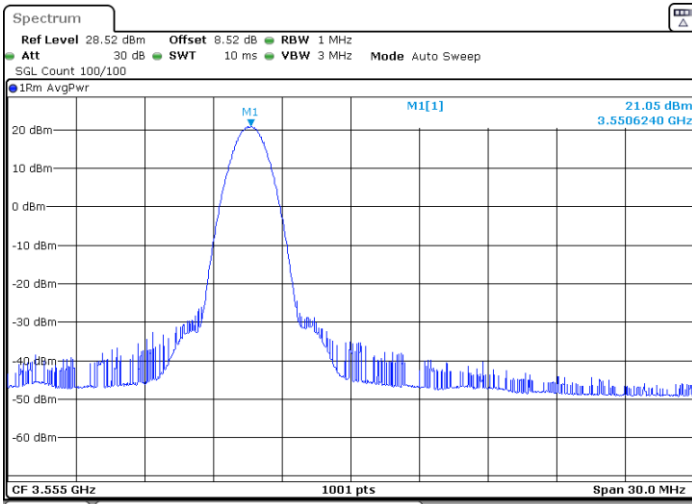


Date: 19.MAY.2023 09:46:12

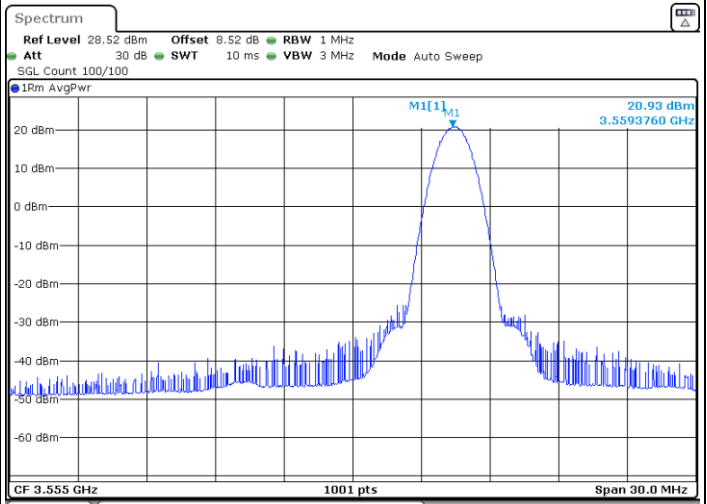

Date: 19.MAY.2023 09:50:06

Lowest Channel / Full RB

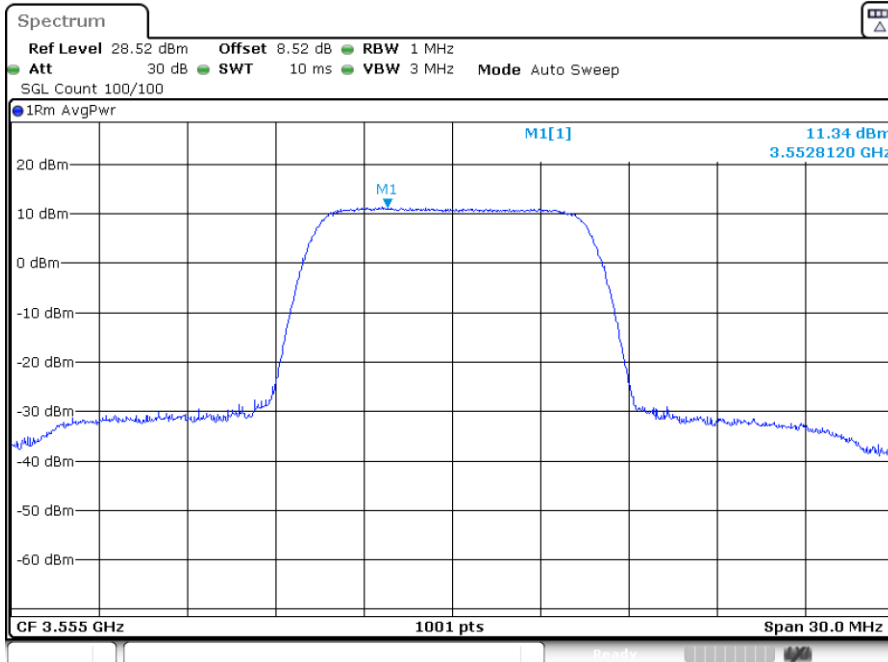

Date: 19.MAY.2023 09:50:35




LTE Band 48 / 10MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

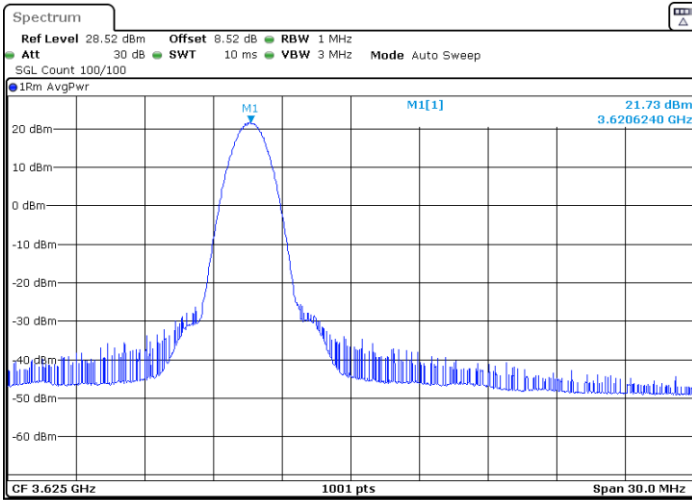


Date: 19.MAY.2023 09:52:57

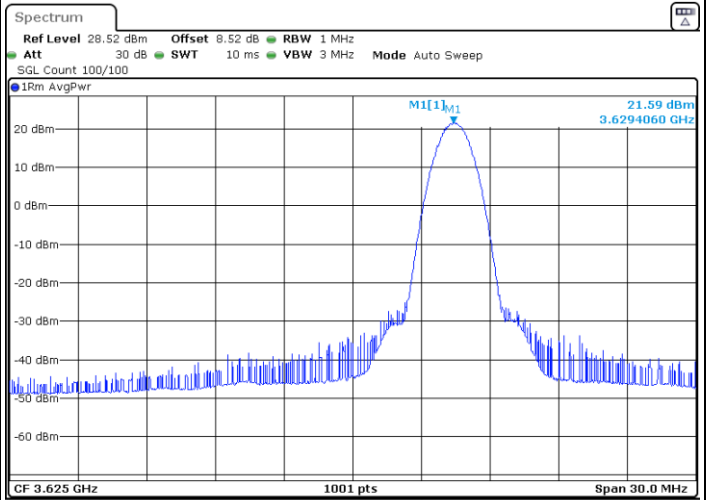

Date: 19.MAY.2023 09:54:52

Middle Channel / Full RB

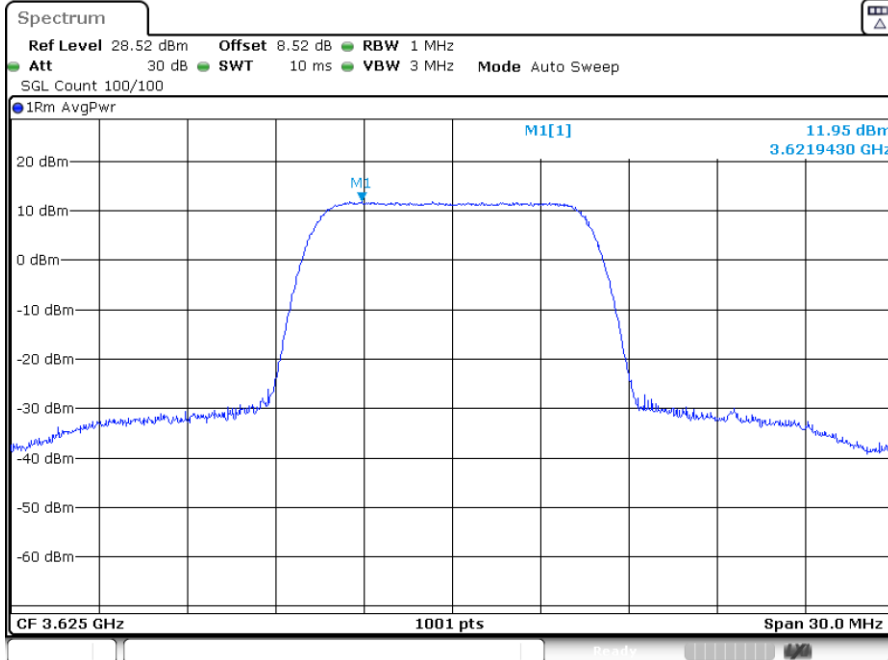

Date: 19.MAY.2023 09:58:14




LTE Band 48 / 10MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

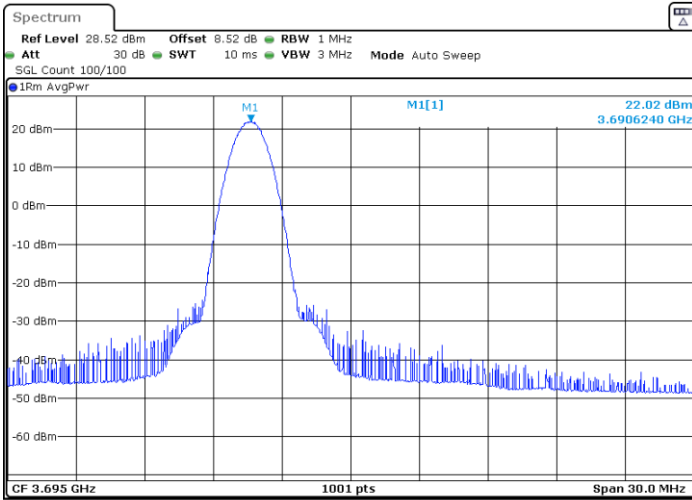


Date: 19.MAY.2023 09:58:43

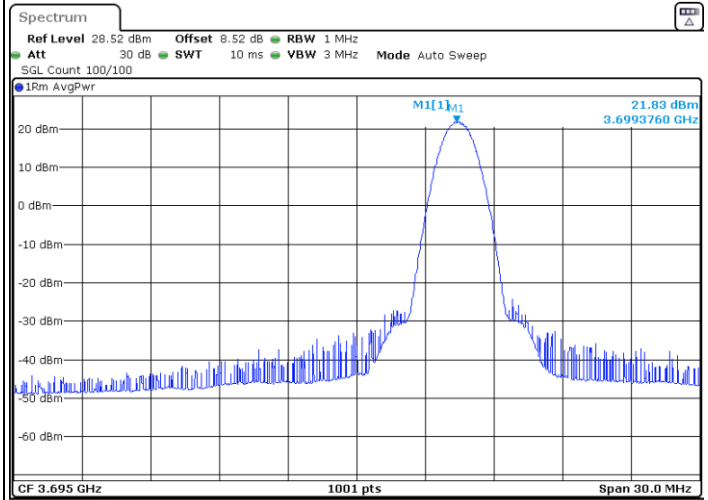

Date: 19.MAY.2023 10:02:33

Highest Channel / Full RB

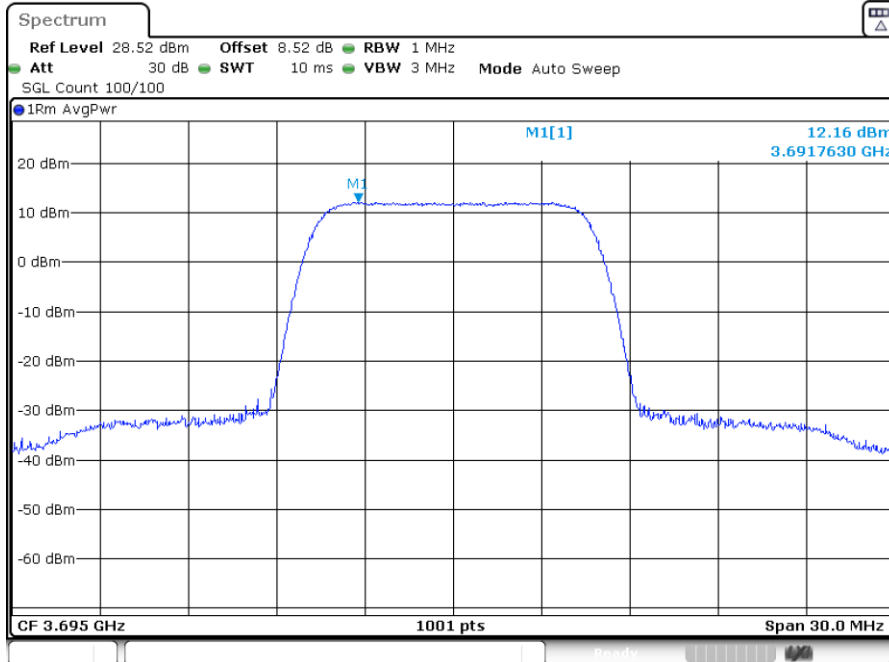

Date: 19.MAY.2023 10:03:02




LTE Band 48 / 10MHz


16QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

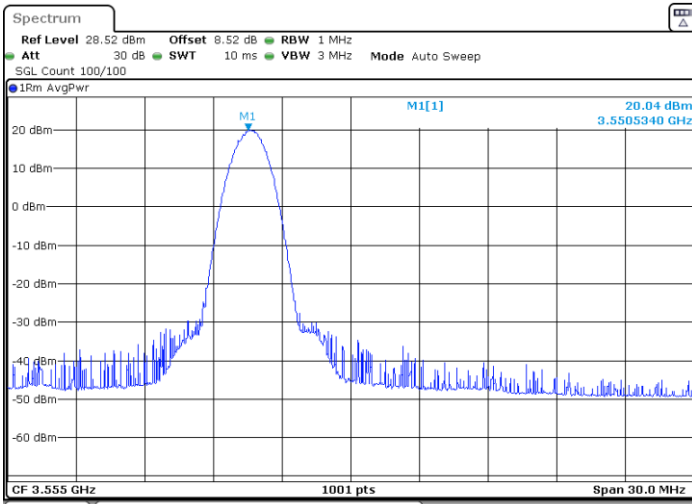


Date: 19.MAY.2023 09:46:42

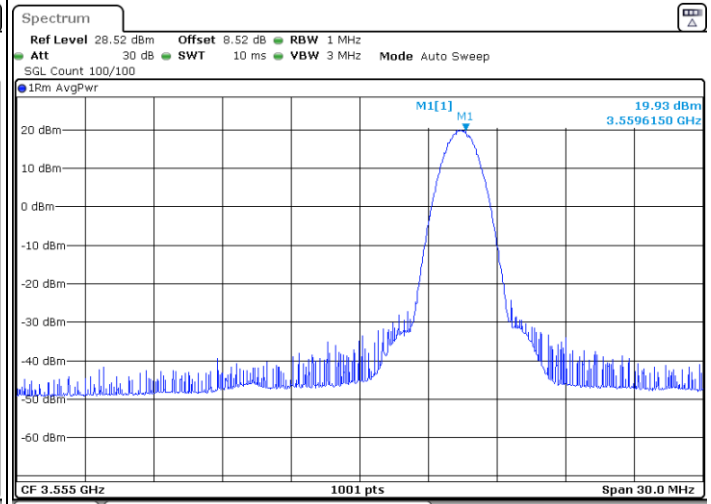

Date: 19.MAY.2023 09:49:36

Lowest Channel / Full RB

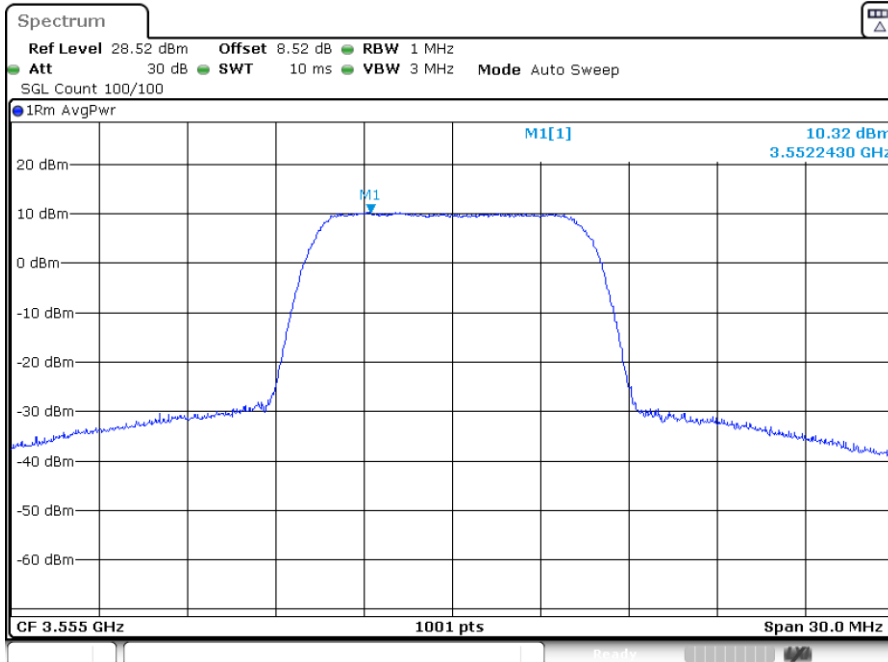

Date: 19.MAY.2023 09:51:05




LTE Band 48 / 10MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

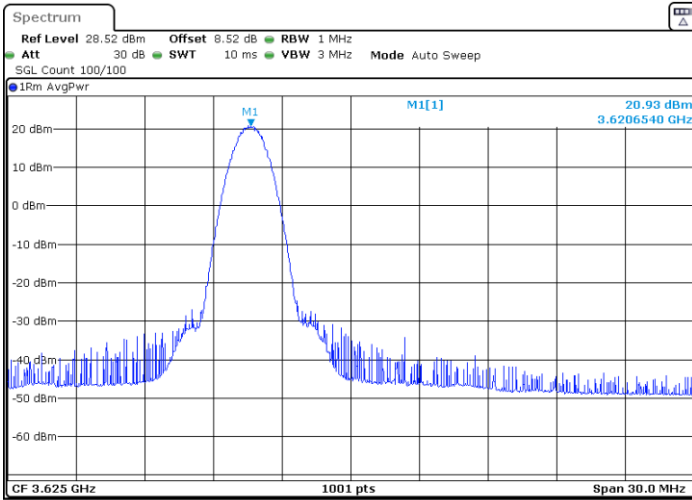


Date: 19.MAY.2023 09:53:25

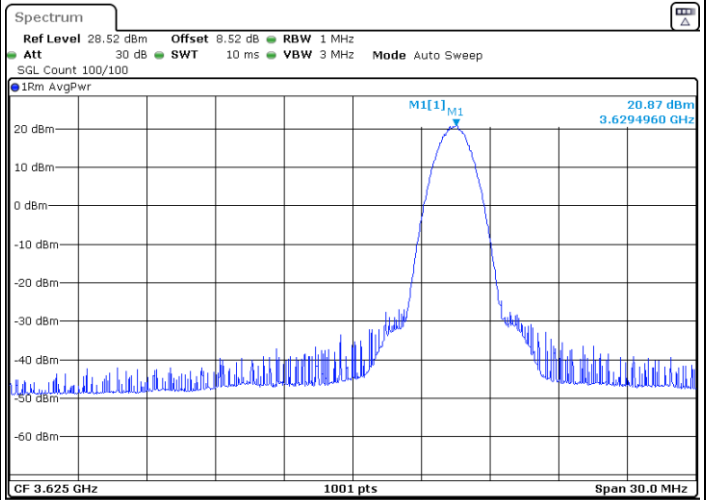

Date: 19.MAY.2023 09:55:21

Middle Channel / Full RB

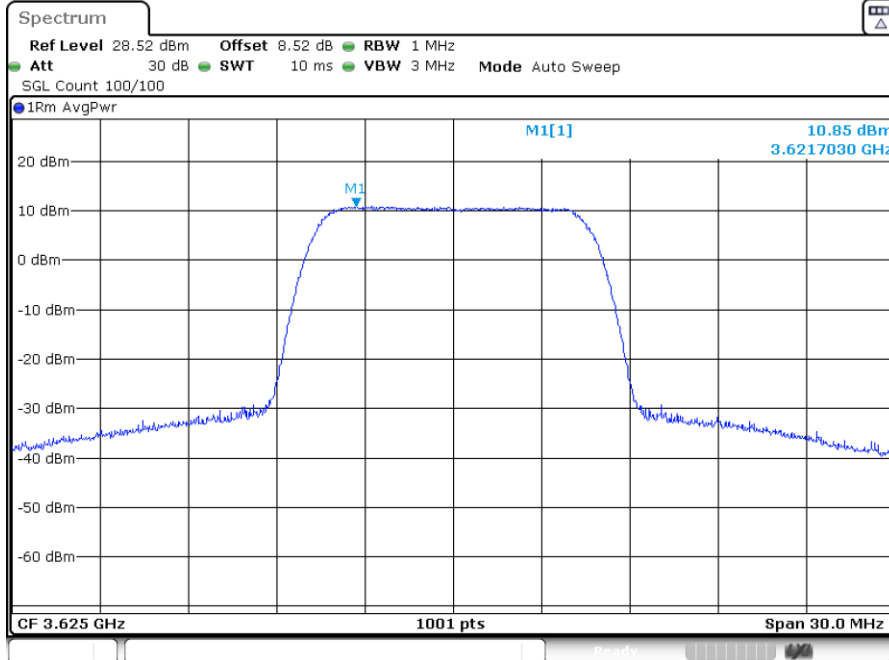

Date: 19.MAY.2023 09:57:45




LTE Band 48 / 10MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

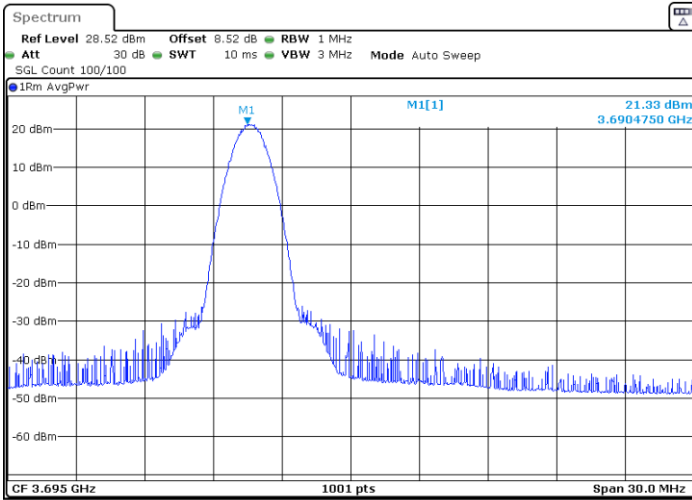


Date: 19.MAY.2023 09:59:12

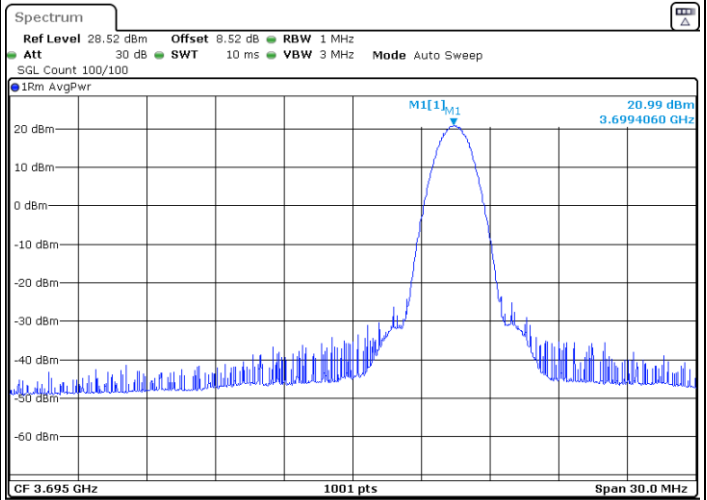

Date: 19.MAY.2023 10:02:03

Highest Channel / Full RB

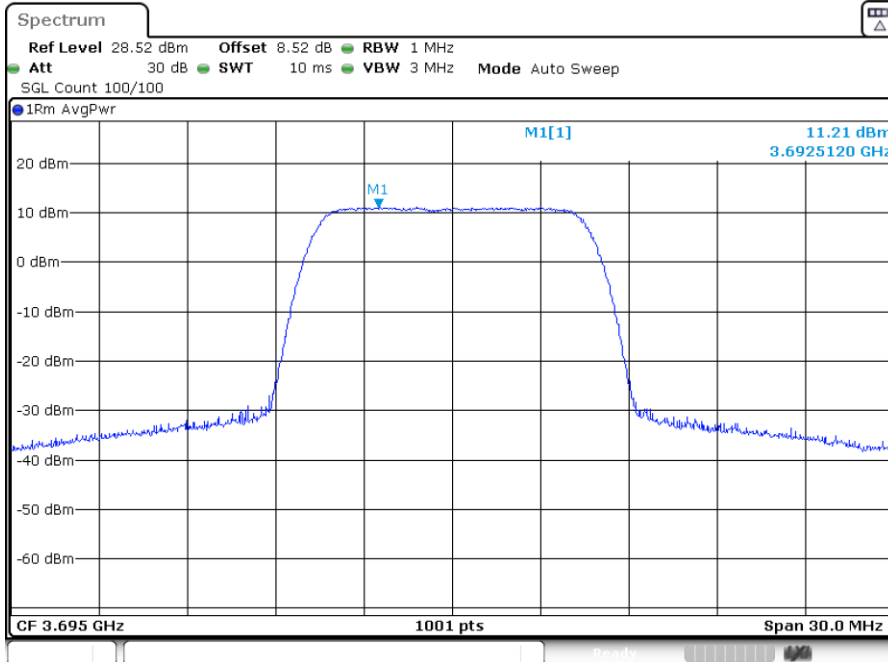

Date: 19.MAY.2023 10:03:32





LTE Band 48 / 10MHz


64QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

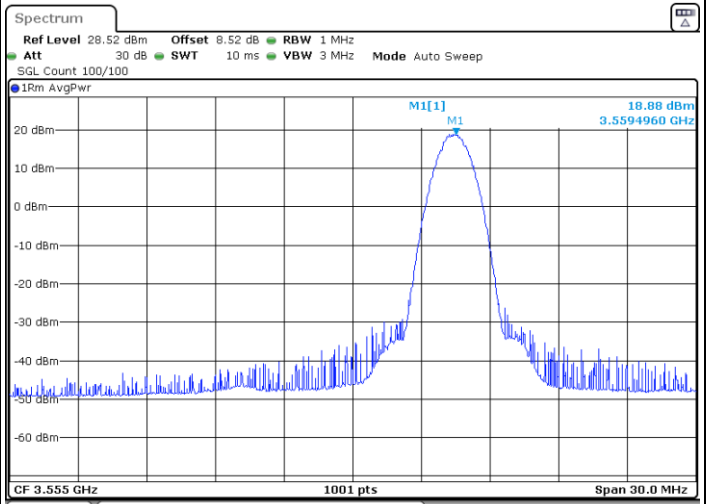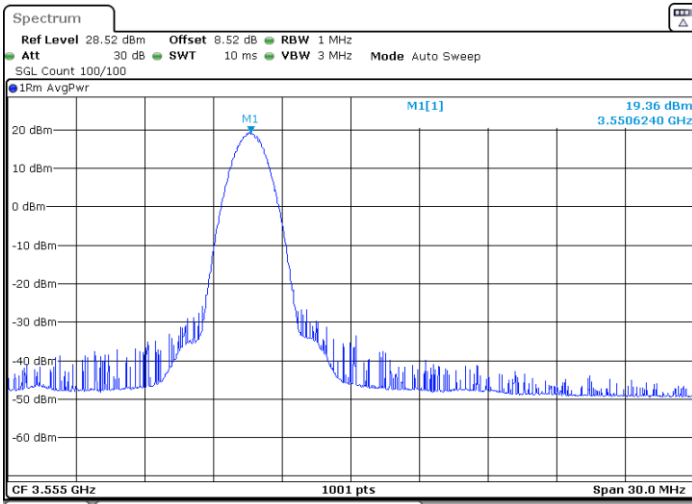

Lowest Channel / Full RB

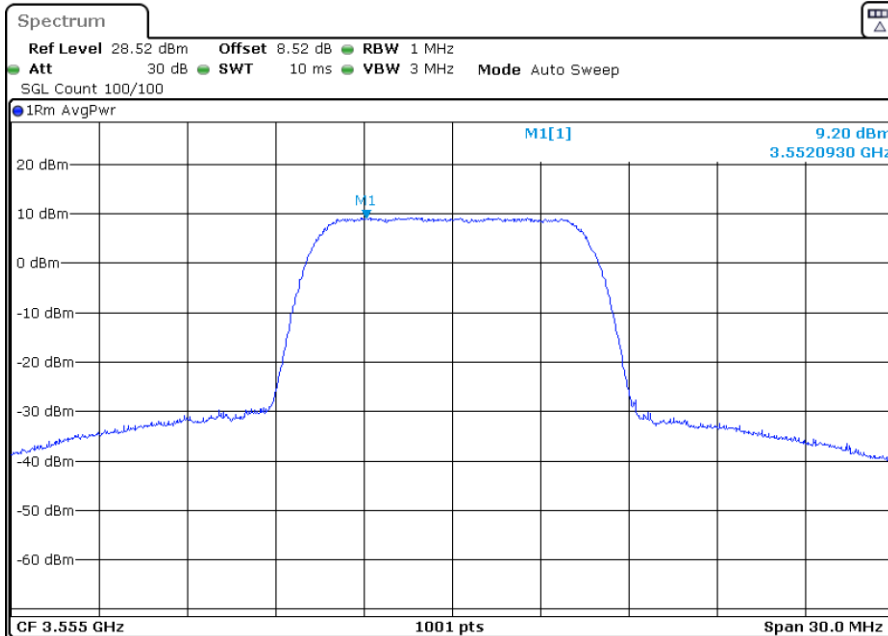




LTE Band 48 / 10MHz


64QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

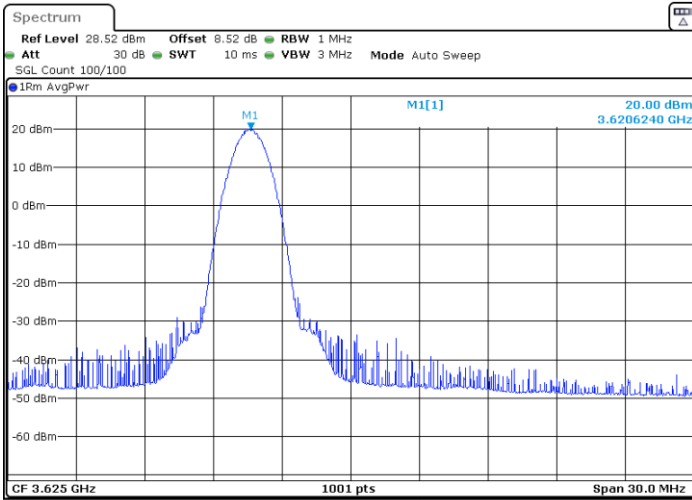


Date: 19.MAY.2023 09:53:54

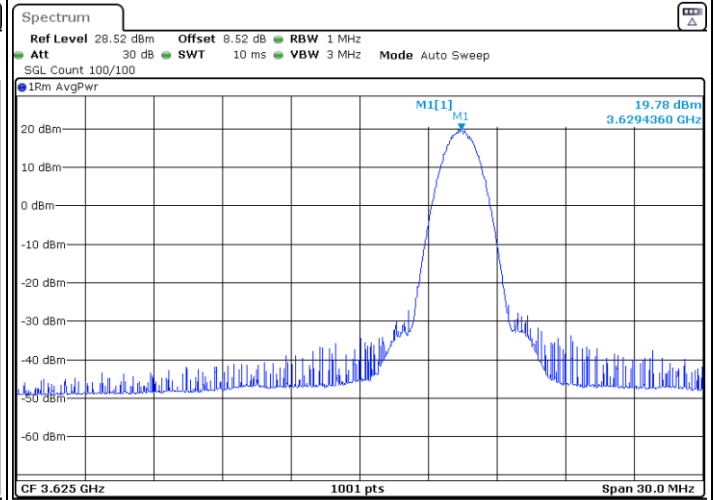

Date: 19.MAY.2023 09:55:50

Middle Channel / Full RB

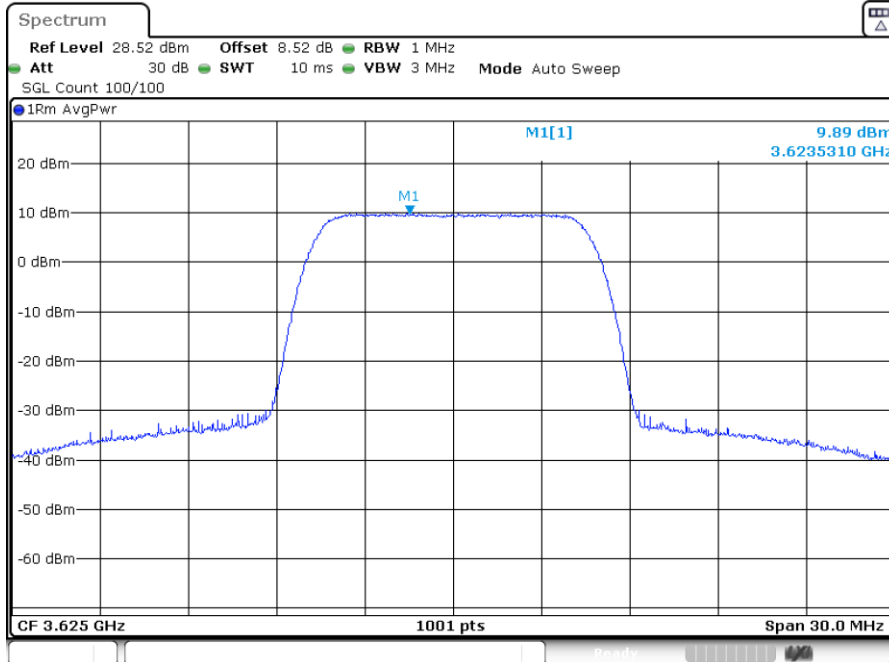

Date: 19.MAY.2023 09:57:16




LTE Band 48 / 10MHz


64QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

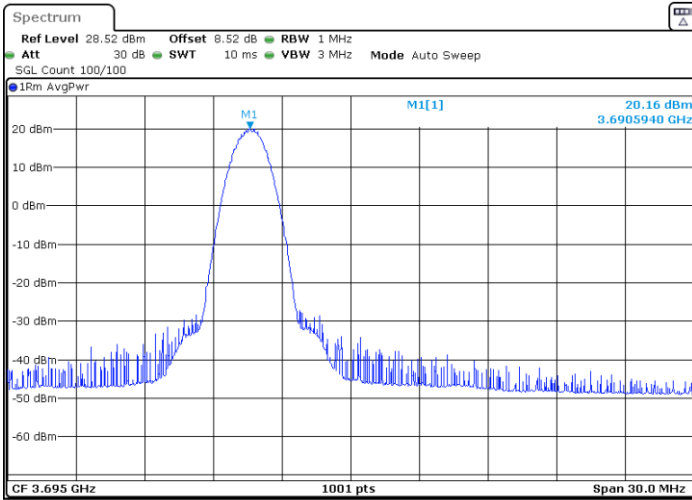


Date: 19.MAY.2023 09:59:42

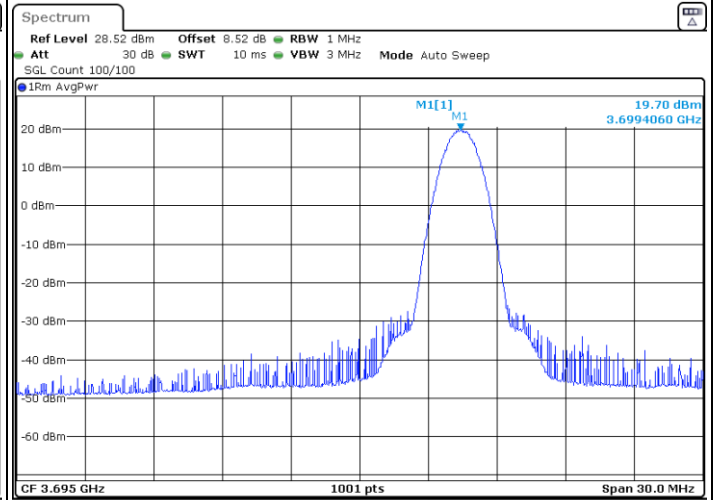

Date: 19.MAY.2023 10:01:34

Highest Channel / Full RB

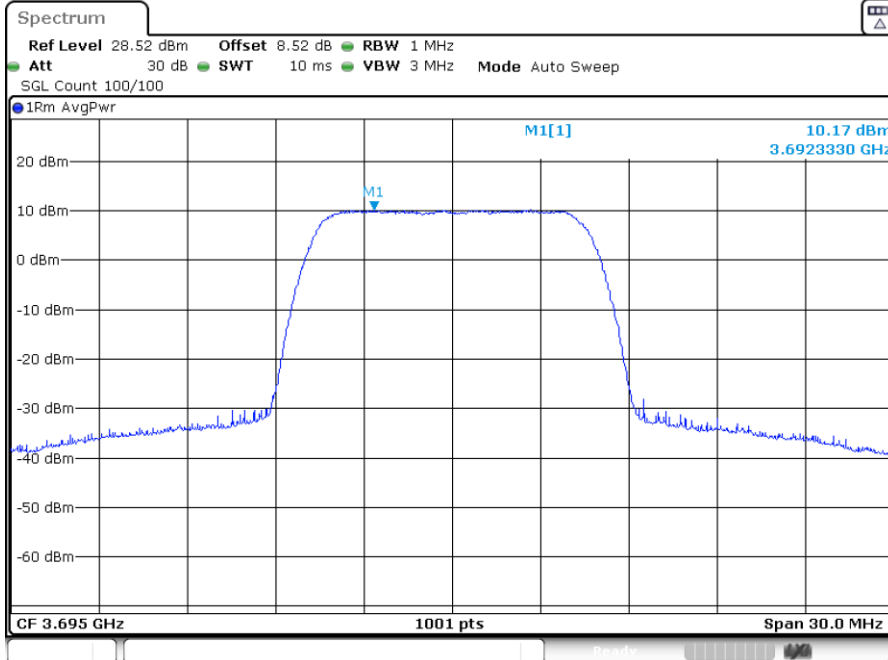

Date: 19.MAY.2023 10:04:02




LTE Band 48 / 10MHz


256QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

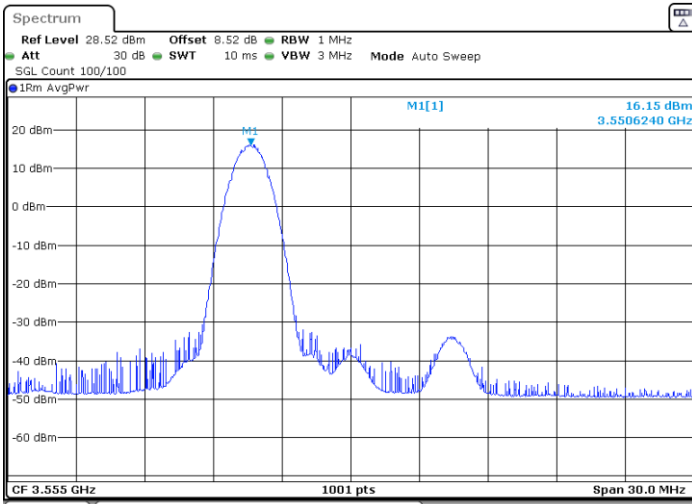


Date: 19.MAY.2023 09:47:41

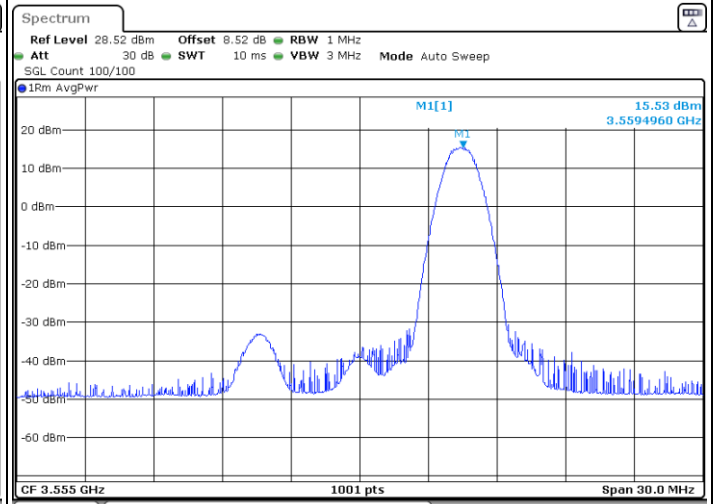

Date: 19.MAY.2023 09:48:34

Lowest Channel / Full RB

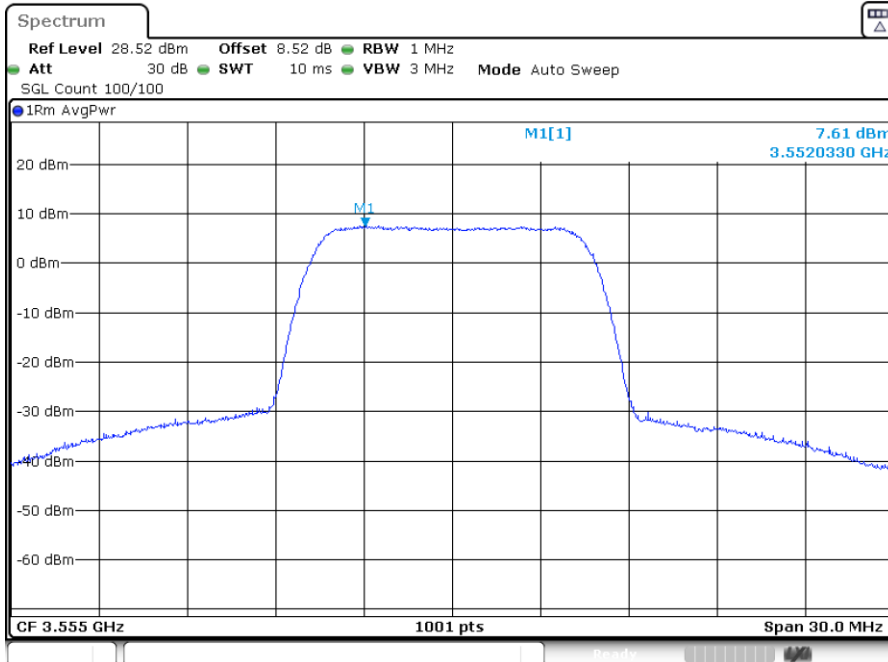

Date: 19.MAY.2023 09:52:04




LTE Band 48 / 10MHz


256QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

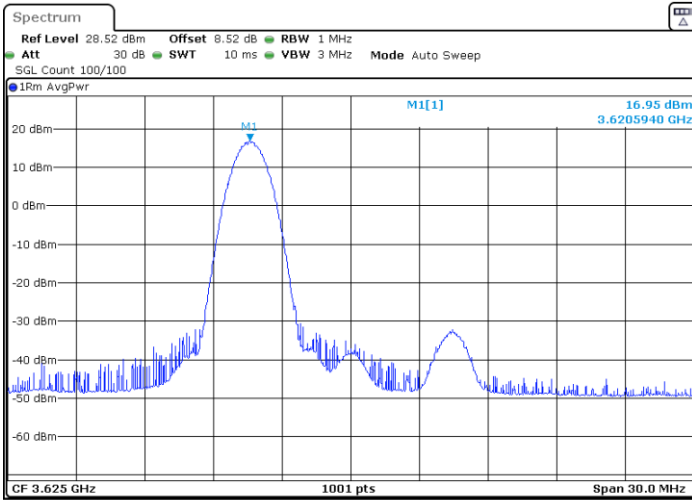


Date: 19.MAY.2023 09:54:23

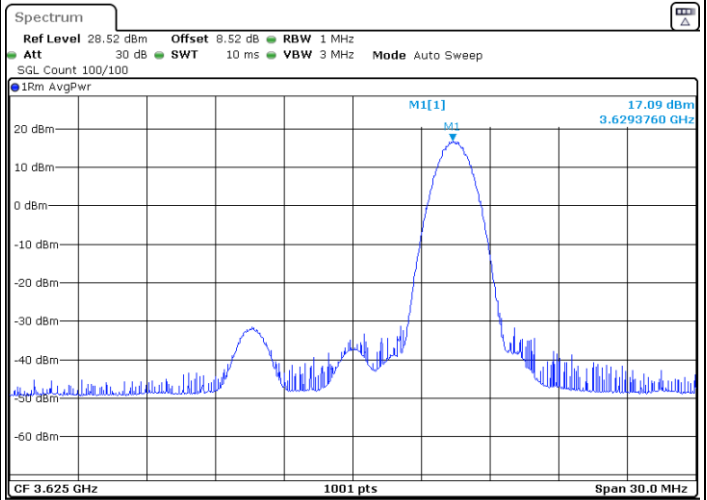

Date: 19.MAY.2023 09:56:18

Middle Channel / Full RB

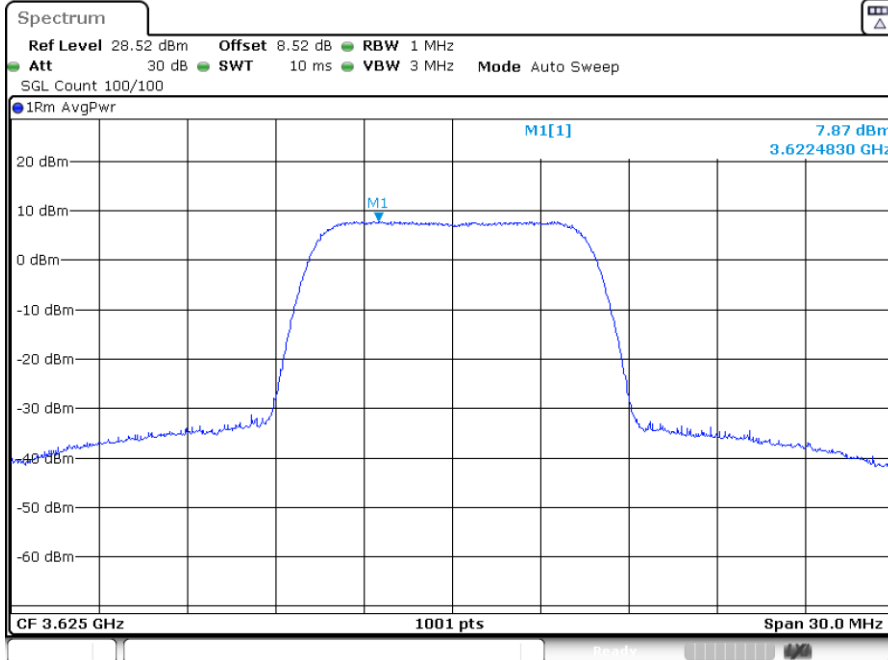

Date: 19.MAY.2023 09:56:47





LTE Band 48 / 10MHz


256QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

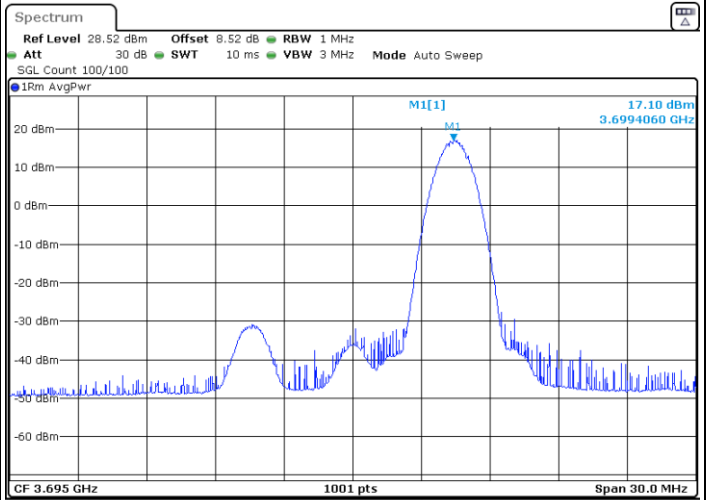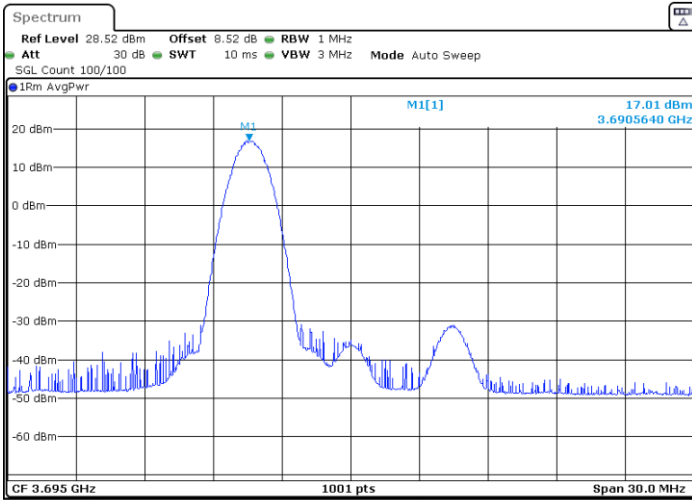

Highest Channel / Full RB

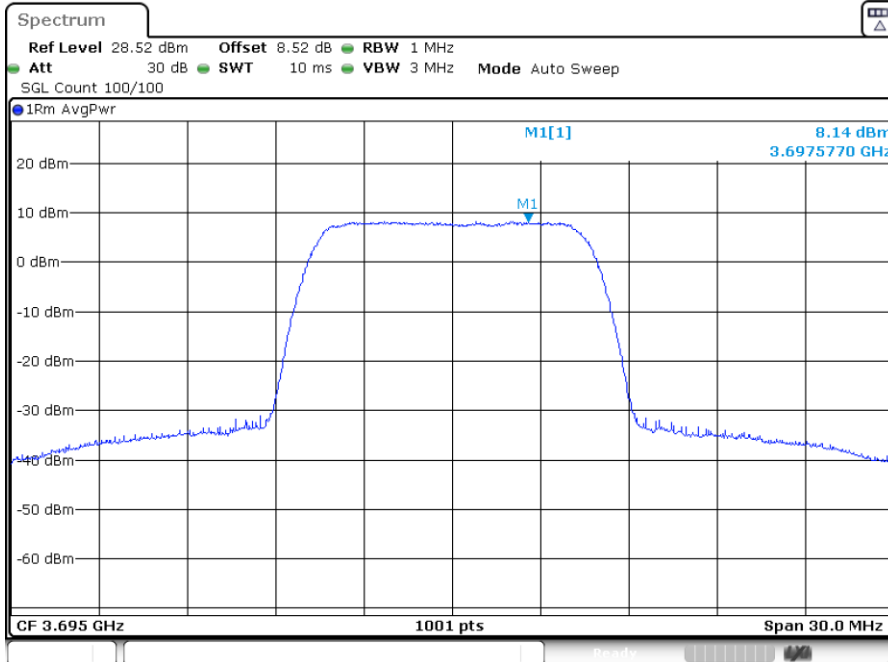




LTE Band 48 / 15MHz


QPSK

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

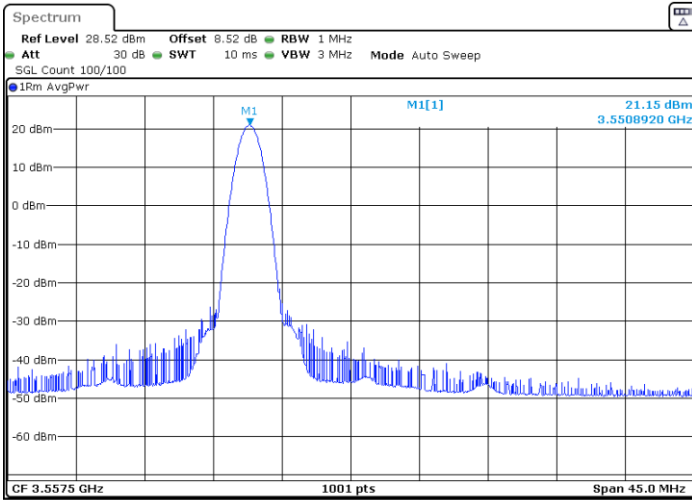


Date: 19.MAY.2023 10:05:11

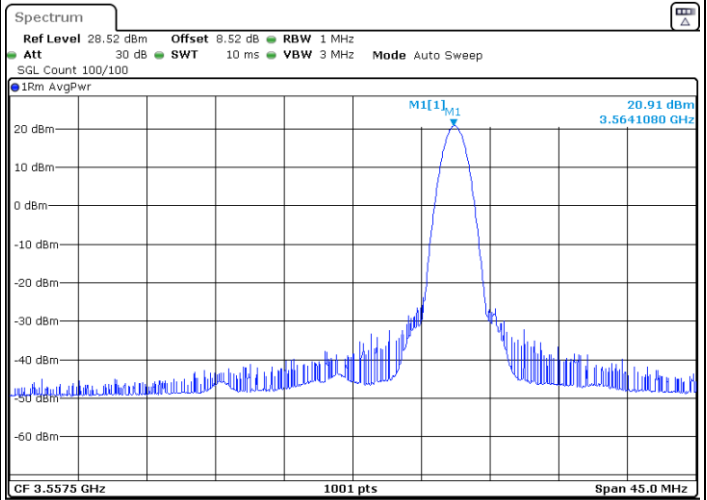

Date: 19.MAY.2023 10:07:10

Lowest Channel / Full RB

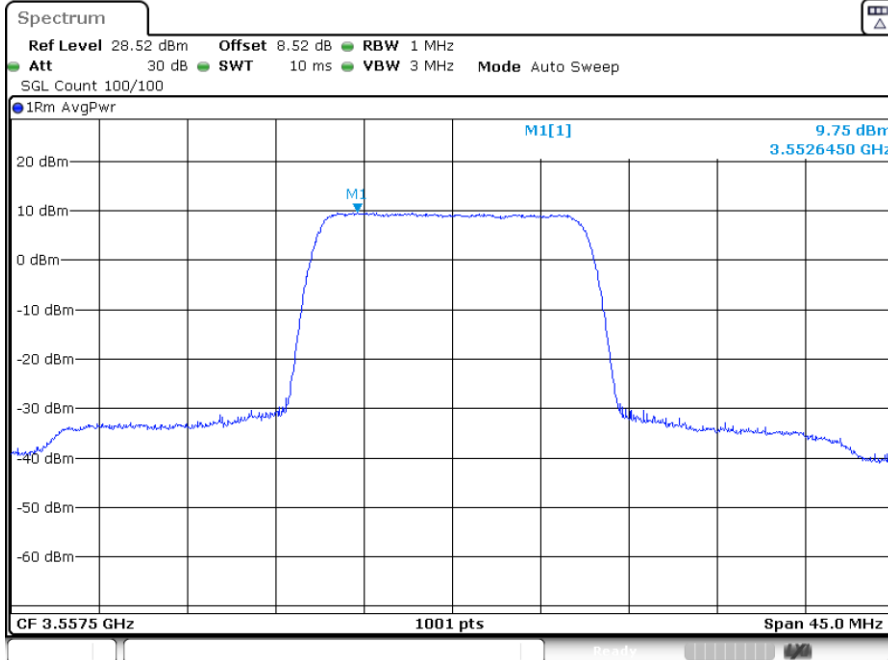

Date: 19.MAY.2023 10:11:00




LTE Band 48 / 15MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

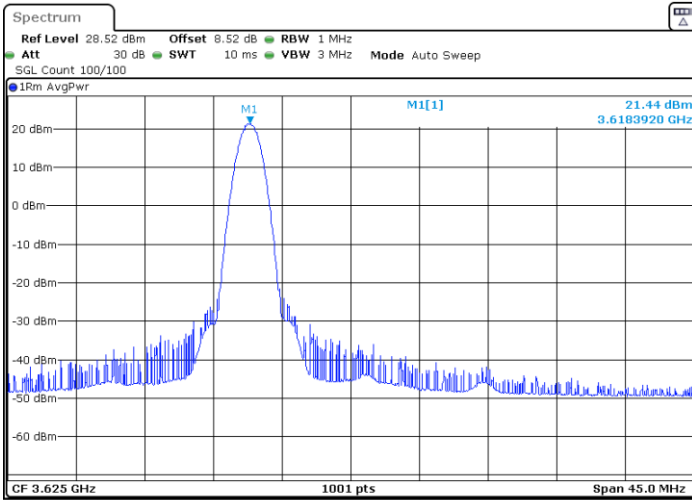


Date: 19.MAY.2023 10:11:29

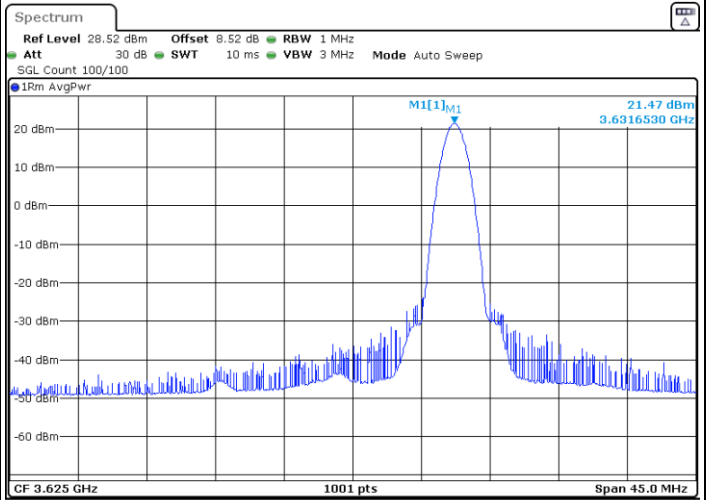

Date: 19.MAY.2023 10:14:50

Middle Channel / Full RB

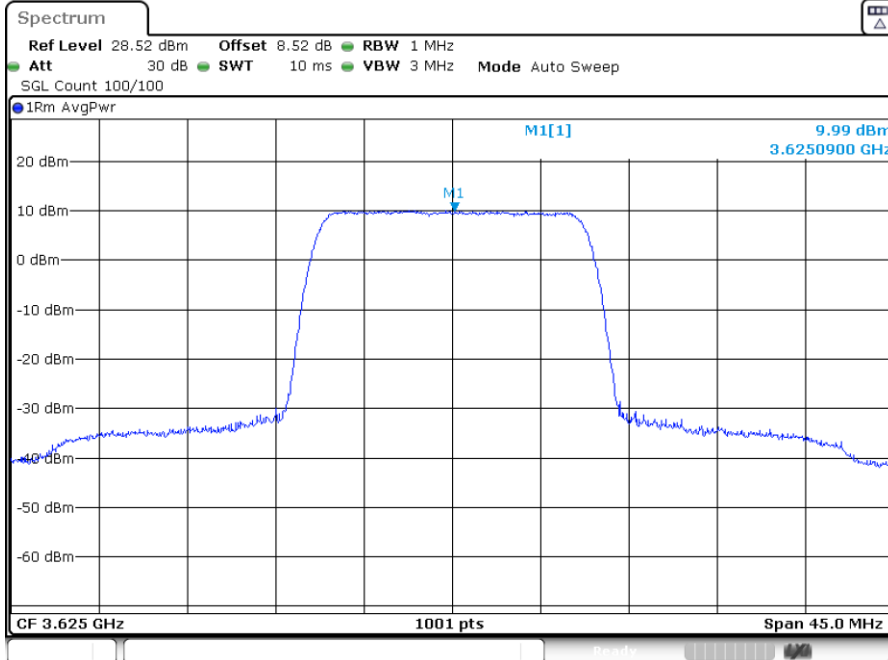

Date: 19.MAY.2023 10:15:19




LTE Band 48 / 15MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

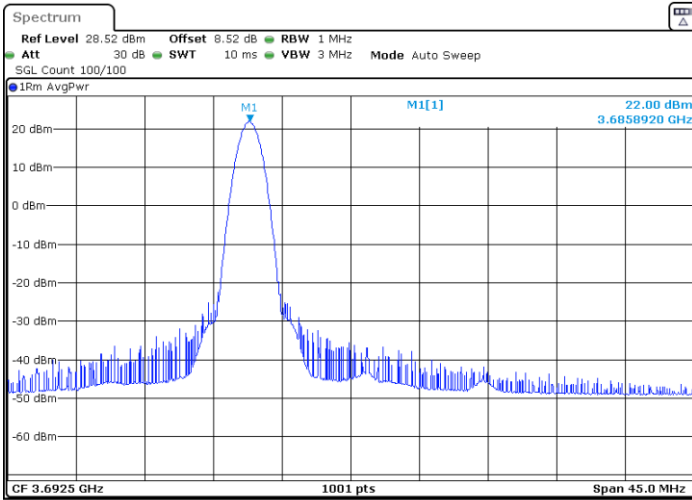


Date: 19.MAY.2023 10:17:15

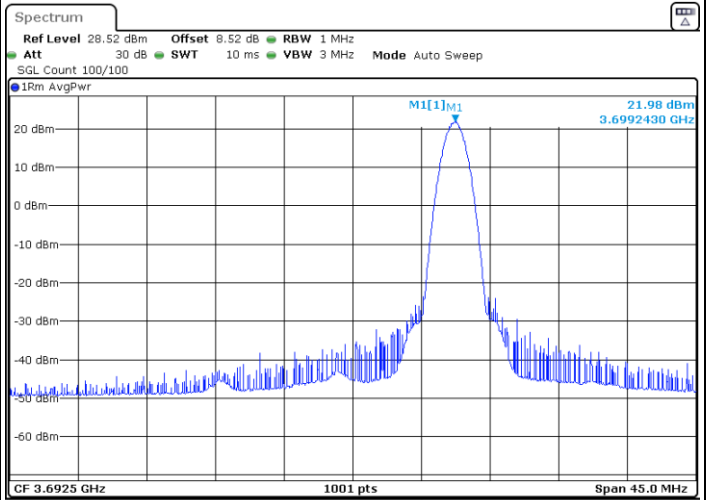

Date: 19.MAY.2023 10:21:06

Highest Channel / Full RB

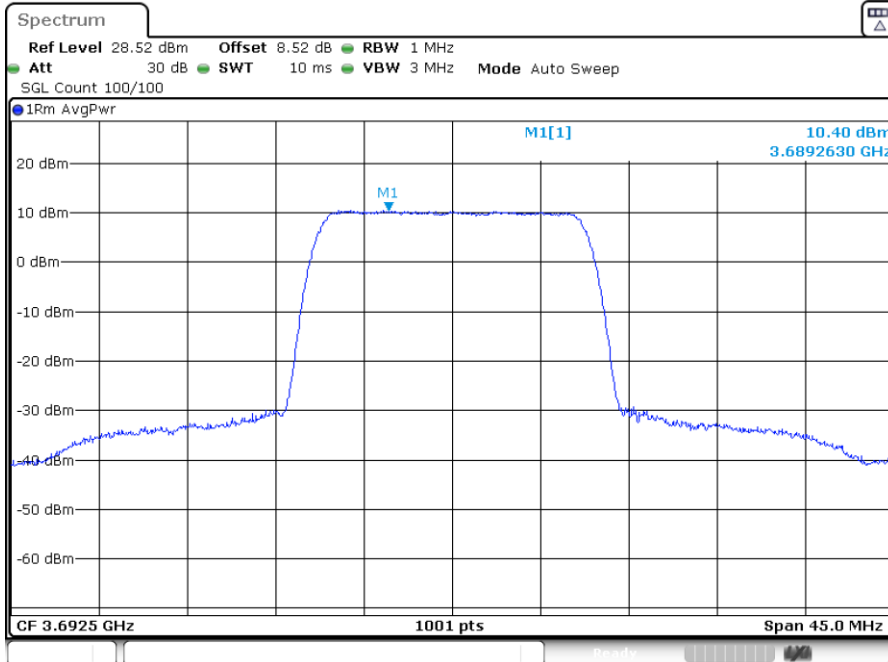

Date: 19.MAY.2023 10:21:35




LTE Band 48 / 15MHz


16QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

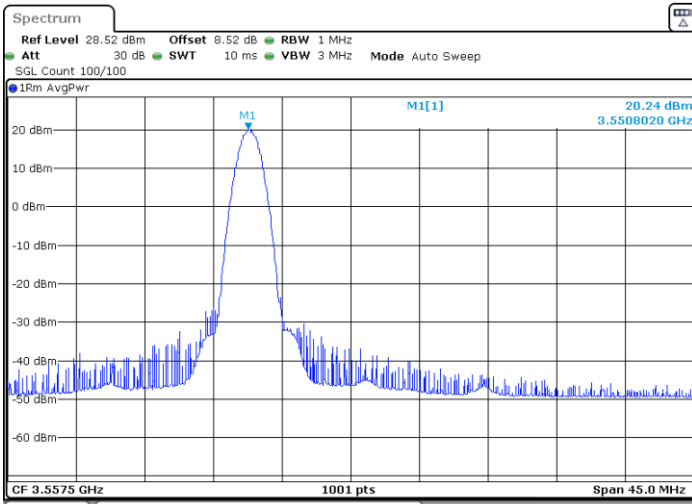


Date: 19.MAY.2023 10:05:41

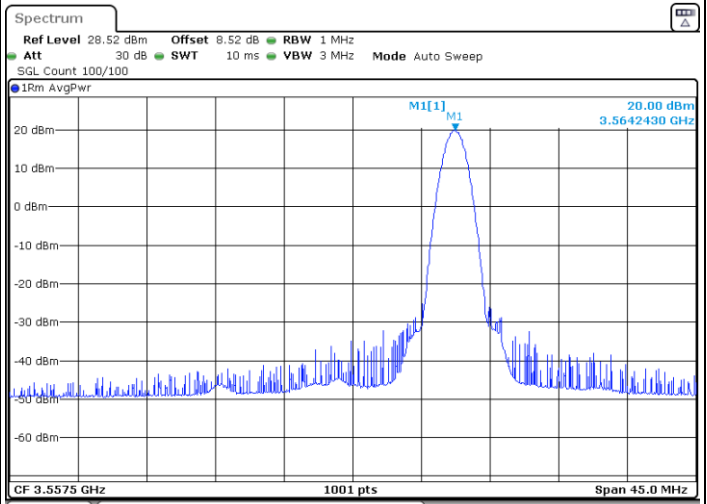

Date: 19.MAY.2023 10:07:39

Lowest Channel / Full RB

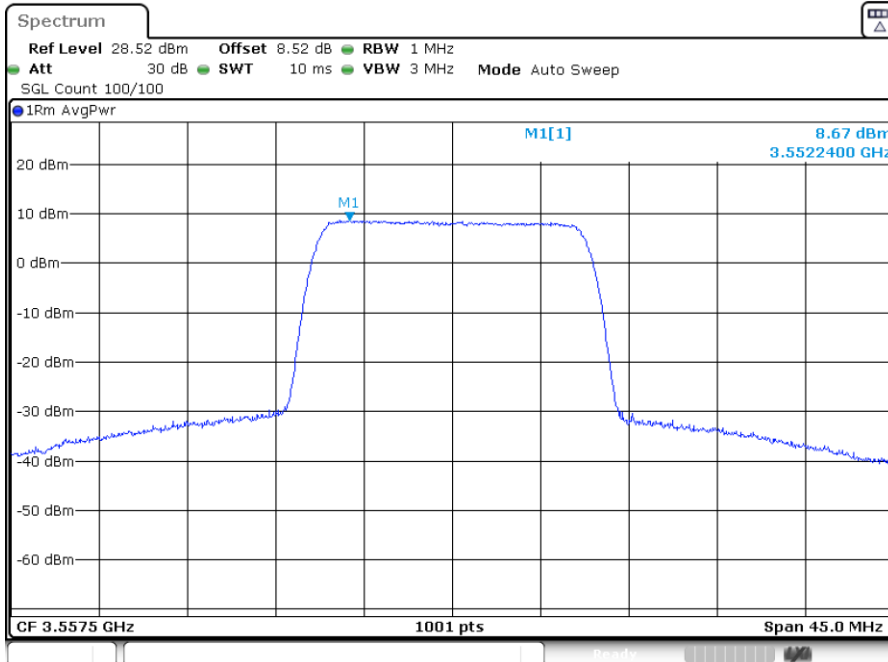

Date: 19.MAY.2023 10:10:30




LTE Band 48 / 15MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

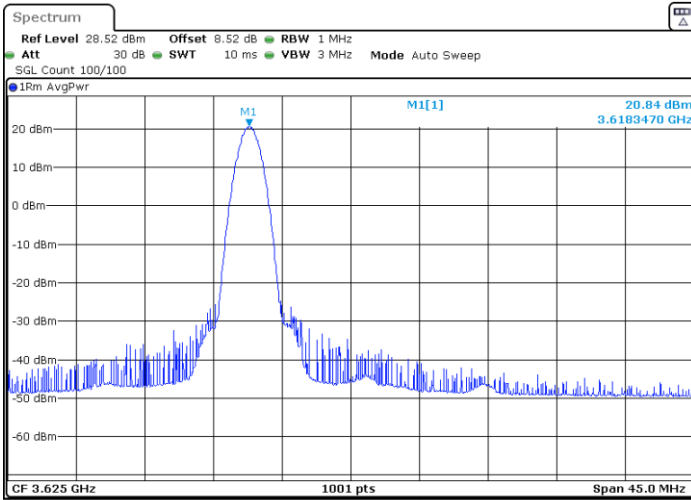


Date: 19.MAY.2023 10:11:58

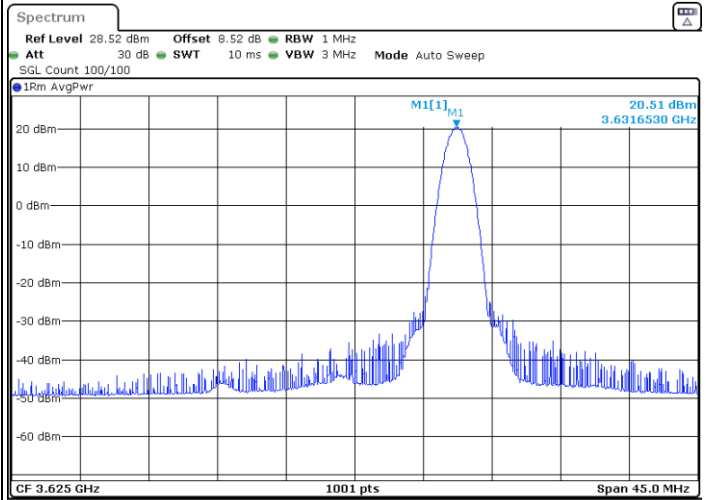

Date: 19.MAY.2023 10:14:22

Middle Channel / Full RB

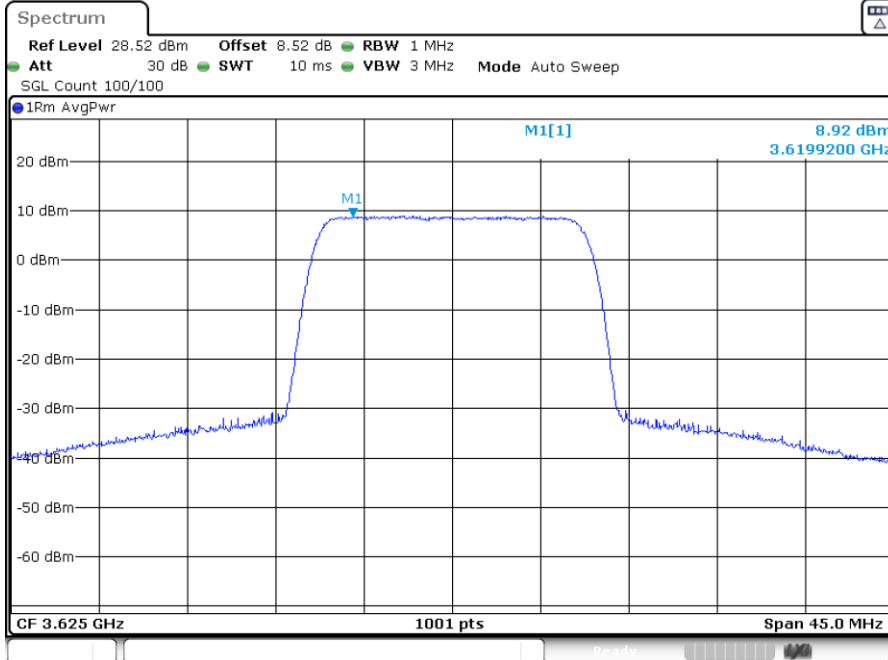

Date: 19.MAY.2023 10:15:48




LTE Band 48 / 15MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

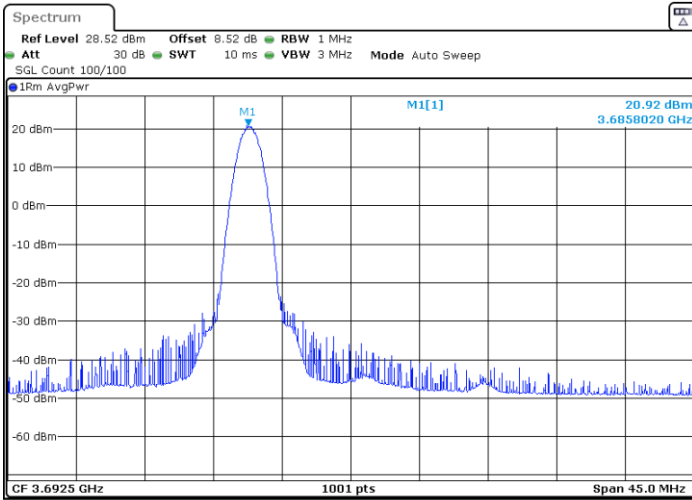


Date: 19.MAY.2023 10:17:45

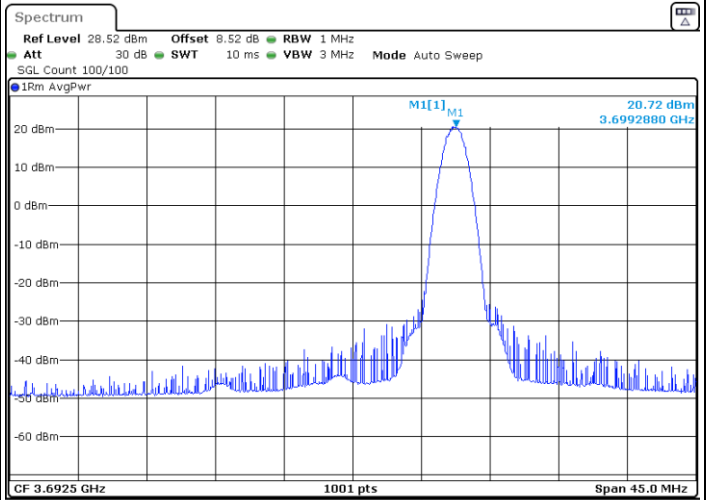

Date: 19.MAY.2023 10:20:36

Highest Channel / Full RB

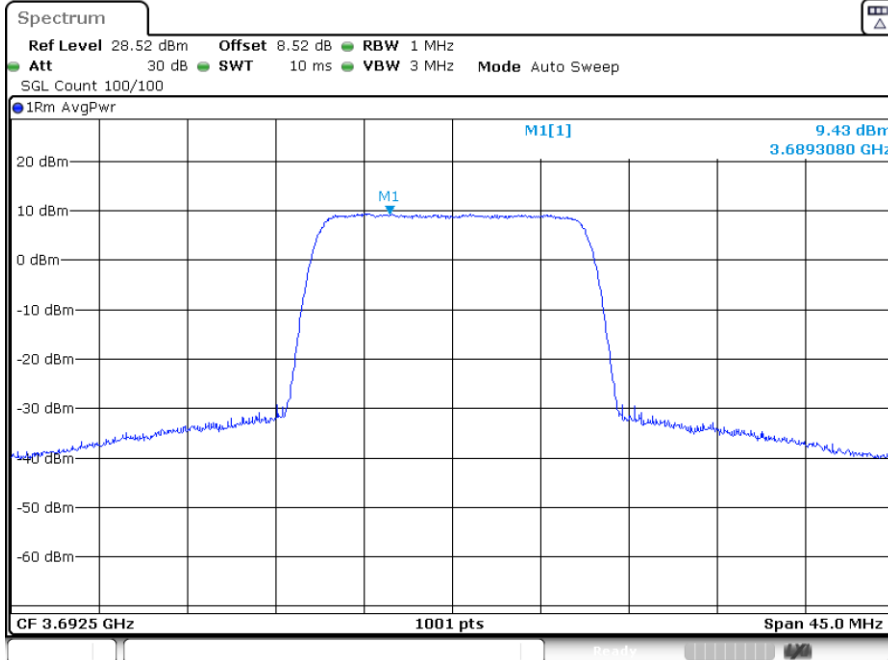

Date: 19.MAY.2023 10:22:05




LTE Band 48 / 15MHz


64QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

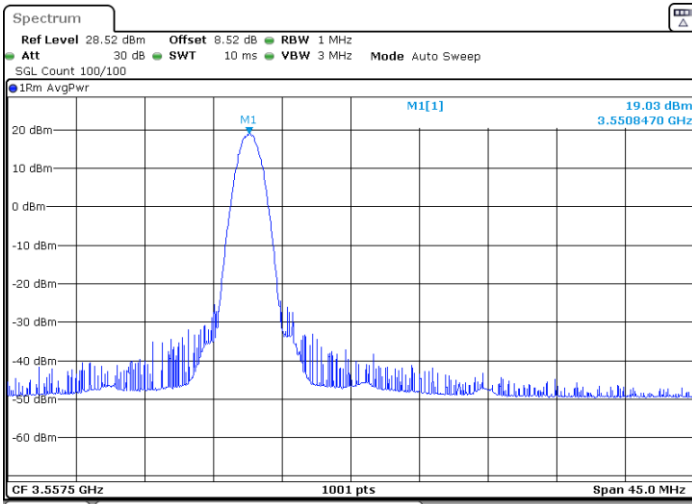


Date: 19.MAY.2023 10:06:10

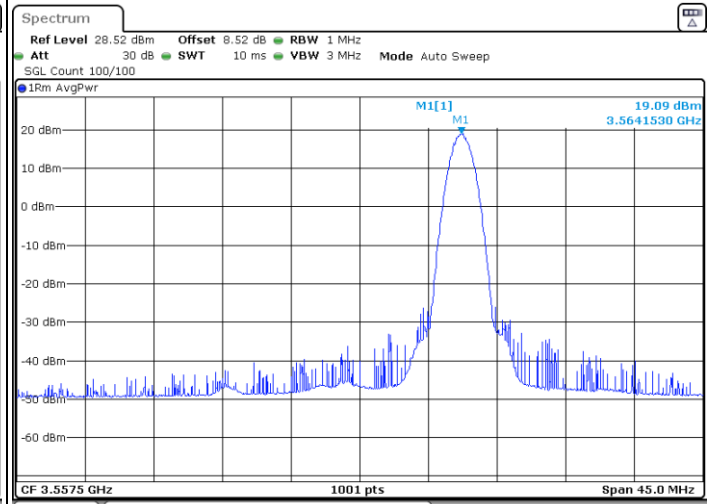

Date: 19.MAY.2023 10:08:09

Lowest Channel / Full RB

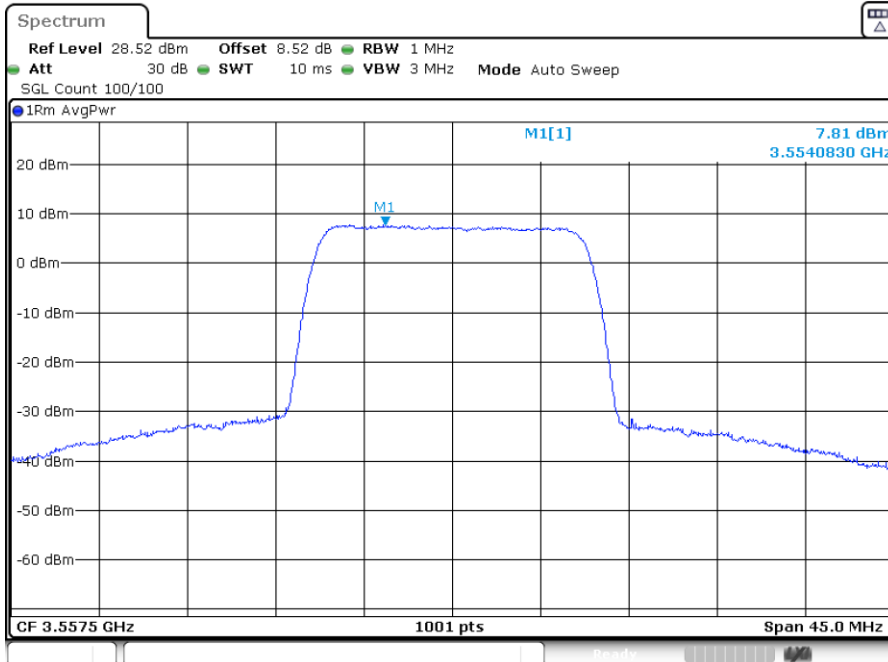

Date: 19.MAY.2023 10:10:01




LTE Band 48 / 15MHz


64QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

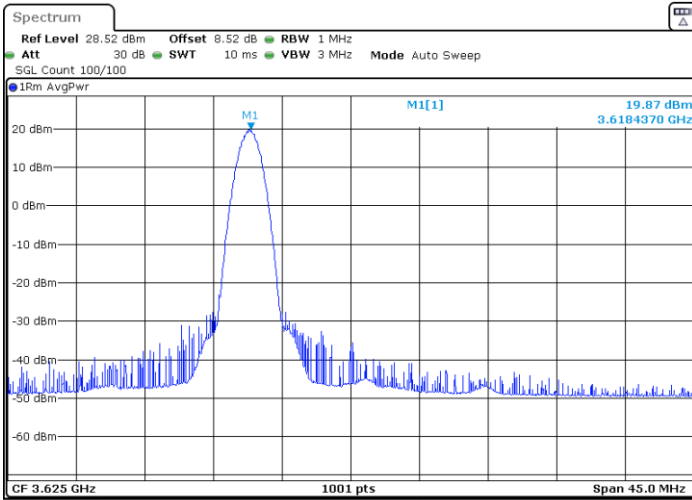


Date: 19.MAY.2023 10:12:26

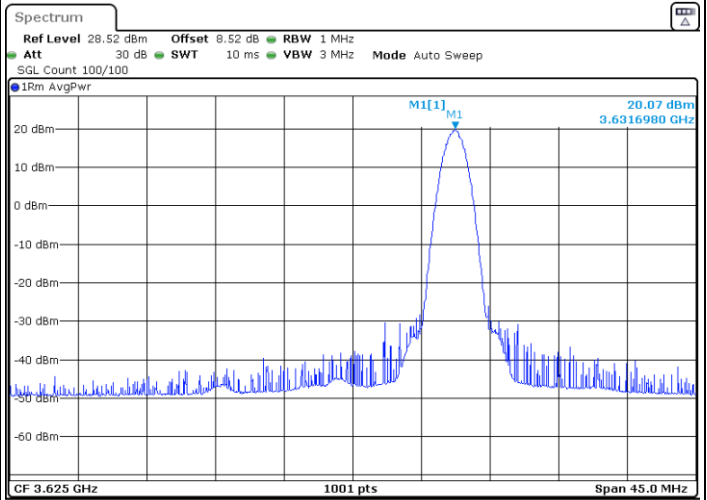

Date: 19.MAY.2023 10:13:53

Middle Channel / Full RB

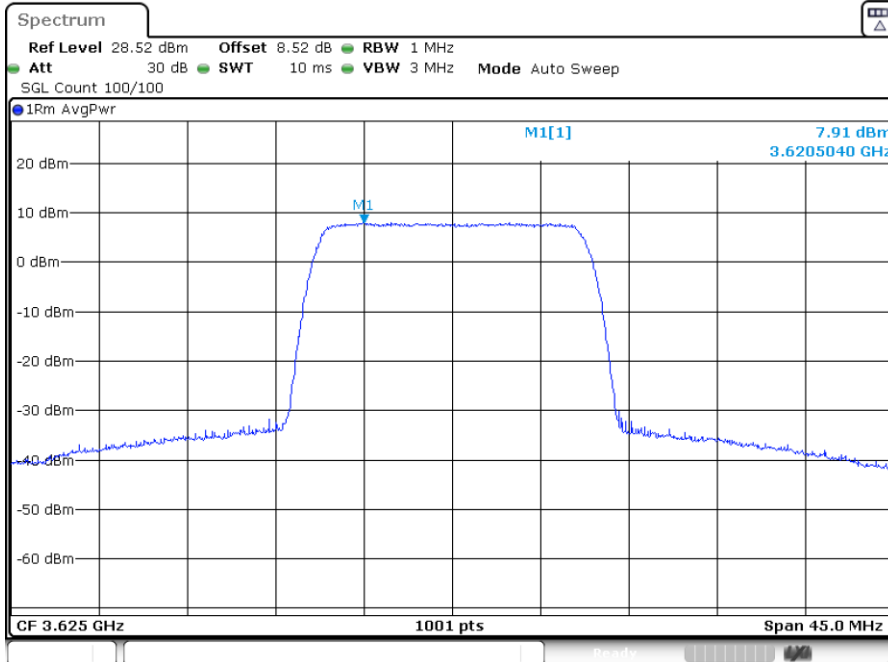

Date: 19.MAY.2023 10:16:17




LTE Band 48 / 15MHz


64QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

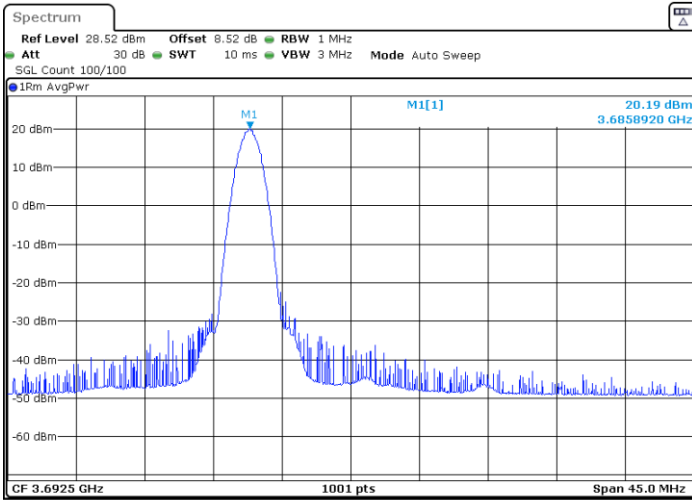


Date: 19.MAY.2023 10:18:14

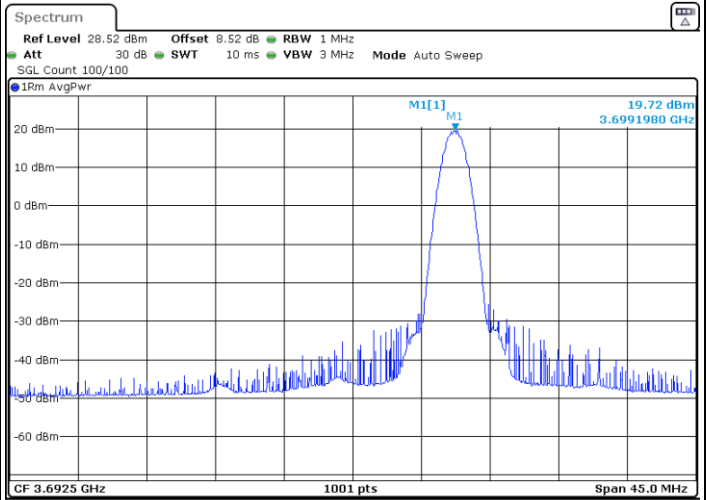

Date: 19.MAY.2023 10:20:07

Highest Channel / Full RB

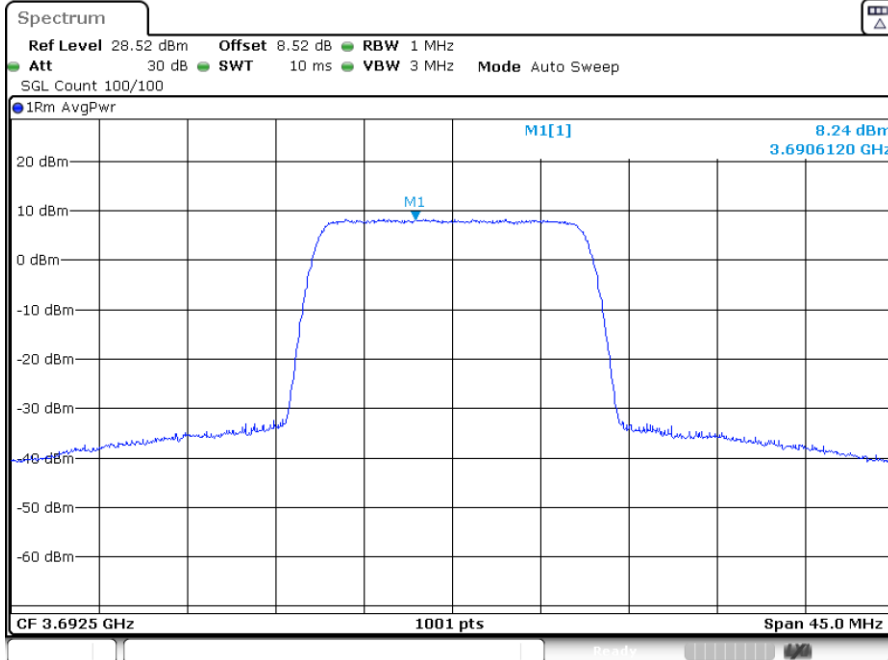

Date: 19.MAY.2023 10:22:34




LTE Band 48 / 15MHz


256QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

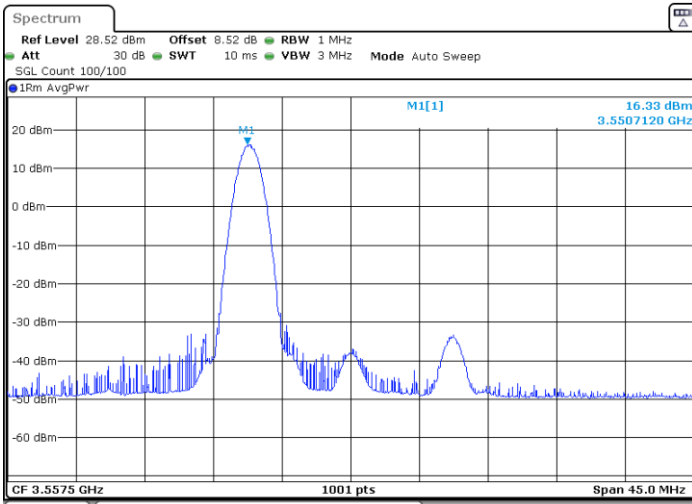


Date: 19.MAY.2023 10:06:40

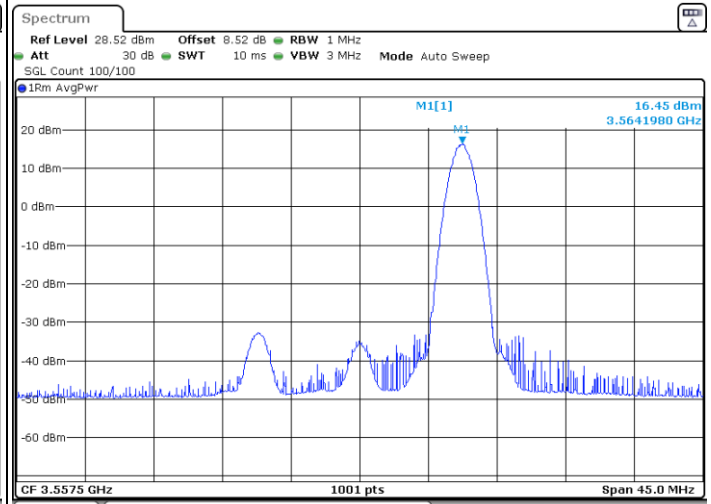

Date: 19.MAY.2023 10:08:38

Lowest Channel / Full RB

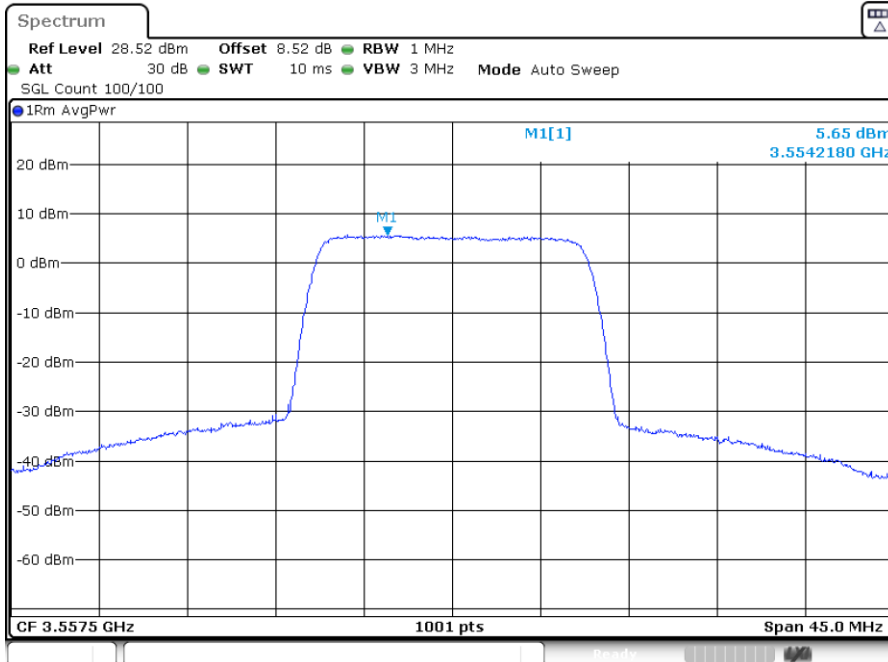

Date: 19.MAY.2023 10:09:31