



SAR EVALUATION REPORT

For

Siemens Healthcare Diagnostics Inc.

2 Edgewater Drive Norwood, Massachusetts 02351 United States

FCC ID: 2AUAM-PD470SH
IC: 25398-PD470SH

Model: PD470SH-N
Serial Model: PD470SH-B

Report Type: Original Report	Product Type: Mobile Computing Device
Report Producer : <u>Angelo Chang</u> <i>Angelo Chang</i>	
Report Number : <u>RXZ190821001-23A</u>	
Report Date : <u>2019.08.30</u>	
Reviewed By: <u>Jerry Chang</u> <i>Jerry Chang</i>	
Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2)2647 6898 Fax: +886 (2) 2647 6895 www.bacl.com.tw	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Taiwan) The determination of the test results does not require consideration of the uncertainty of the measurement unless the assessment is required by customer agreement, regulation or standard document specification.

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.0	RXZ190821001	RXZ190821001-23A	2019.08.30	Original Report	Angelo Chang

Attestation of Test Results			
EUT Information	EUT Description	Mobile Computing Device	
	Trade Name	Siemens Healthcare Diagnostics	
	Model Name	PD470SH-N	
	Series Model	PD470SH-B	
	FCC ID	2AUAM-PD470SH	
	IC	25398-PD470SH	
	Model Number	V0120190307	
	Serial Number	O110191568125734	
	Test Date	2019-08-22~2019-08-26/2019-09-19	
MODE	Max. SAR Level(s) Reported(W/kg)	Limit	
WLAN2.4GHz	1g Head SAR	0.768	1.6(W/kg)
	1g Body SAR	0.379	
WLAN5GHz	1g Head SAR	1.33	
	1g Body SAR	0.513	
Bluetooth	1g Head SAR	0.096	
	1g Body SAR	0.051	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)		
	RSS-102 Issue 5 March 2015 Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).		
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 248227 D01 802.11 Wi-Fi SAR v02r02		
<p>Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated.</p>			

TABLE OF CONTENTS

EUT DESCRIPTION6

 Technical Specification 6

REFERENCE, STANDARDS, AND GUIDELINES 7

 SAR Limits..... 8

FACILITIES9

DESCRIPTION OF TEST SYSTEM 10

 Area Scans 14

 Zoom Scan (Cube Scan Averaging) 14

Recommended Tissue Dielectric Parameters for Head and Body..... 15

 Tissue Dielectric Parameters for Head and Body Phantoms 15

EQUIPMENT LIST AND CALIBRATION 16

 Equipment’s List & Calibration Information 16

SAR MEASUREMENT SYSTEM VERIFICATION..... 17

 Liquid Verification 17

 System Accuracy Verification..... 19

 System Verification Setup Block Diagram 19

 System Accuracy Check Results 19

SAR SYSTEM VALIDATION DATA..... 20

EUT TEST STRATEGY AND METHODOLOGY..... 23

 Test Positions for Device Operating Next to a Person’s Ear..... 26

 Cheek/Touch Position 26

 Test positions for body-worn and other configurations..... 28

 Test Distance for SAR Evaluation..... 28

 SAR Evaluation Procedure..... 29

CONDUCTED OUTPUT POWER MEASUREMENT 30

 Provision Applicable 30

 Test Procedure 30

 Maximum Target Output Power..... 31

 Test Results: 32

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS..... 35

 Antenna Distance To Edge..... 35

 Standalone SAR test exclusion considerations..... 36

 SAR test exclusion for the EUT edge considerations Result 36

SAR MEASUREMENT RESULTS..... 37

 SAR Test Data..... 37

SAR MEASUREMENT VARIABILITY 44

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION45

APPENDIX A MEASUREMENT UNCERTAINTY.....	46
APPENDIX B EUT TEST POSITION PHOTOS	48
APPENDIX C SAR PLOTS OF SAR MEASUREMENT	52
APPENDIX D CALIBRATION CERTIFICATES.....	53

EUT DESCRIPTION

This report has been prepared on behalf of **Siemens Healthcare Diagnostics Inc.** and their product **Mobile Computing Device**, Model: **PD470SH-N** Series Model: **PD470SH-B** FCC ID: **2AUAM-PD470SH** , IC: **25398-PD470SH** , or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Product Type	Mobile Computing Device
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna for WLAN and Bluetooth
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Operation Mode :	WLAN2.4G/WLAN5G, Bluetooth(BDR/EDR),BLE,NFC
Frequency Band:	WLAN (2.4G): 2412 -2462 MHz WLAN (U-NII-1 Band): 5150-5250MHz(TX & RX) WLAN (U-NII-3 Band): 5725-5850MHz(TX & RX) Bluetooth : 2402 MHz-2480 MHz
Conducted RF Power:	WLAN (2.4G): 17.10 dBm WLAN (U-NII-1 Band): 16.00 dBm WLAN (U-NII-3 Band): 16.48 dBm Bluetooth(BDR/EDR): 9.37 dBm
Dimensions (L*W*H):	16.0 cm (H) x 7.8 cm (W) x 1.5 cm (D)
Power Source:	Battery :3.8Vdc, 4000 mAh
Normal Operation:	Body-worn

Note :

1. PD47SH-B and PD470SH-N use the same motherboard and RF Chip, the difference between PD47SH-B and PD470SH-N is that PD47SH-B more than PD470SH-N a barcode scanner function.
2. The pre-test results show that values measured on the Device PD470SH-N are the worst case values, for Front,Left Side,Right Side and Bottom and Head Tilt.
3. All measurement and test data in this report was gathered from production sample Serial numbers: V0120190307, O110191568125734 (Assigned by BAACL, Taiwan), The EUT supplied by the applicant was received on 2019-08-20.

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located

on

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.


Test site at Bay Area Compliance Laboratories Corp. (Taiwan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 22, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 974454. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Taiwan) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3180), Please refer Exhibit E “Certificate and Scope of Accreditation of ISO/IEC 17025:2005 TAF Certificate”


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

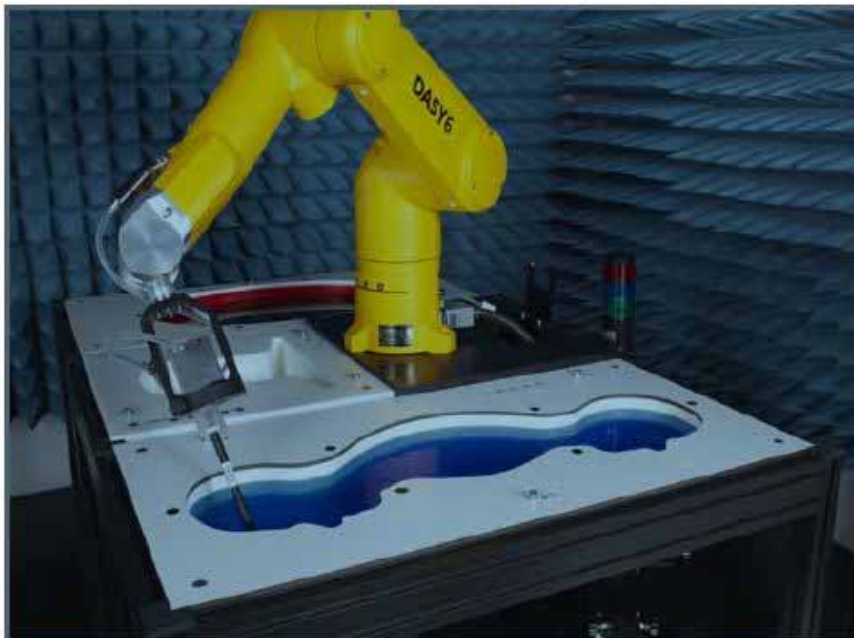

DASY6 System Description

The DASY6 system for performing compliance tests consists of the following items:

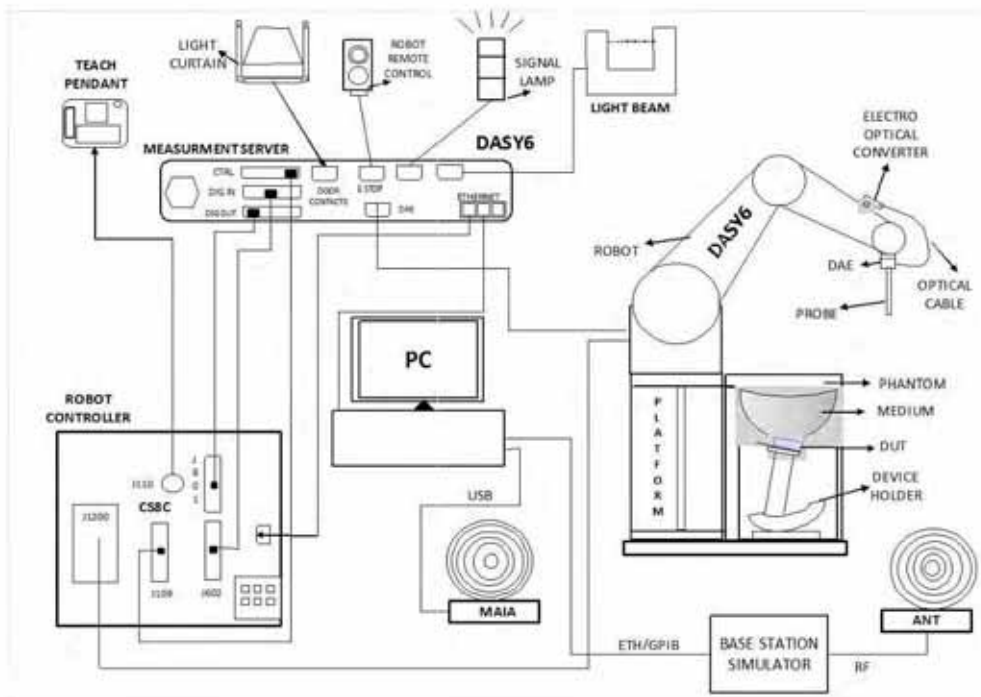

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI


SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required. In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation. DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

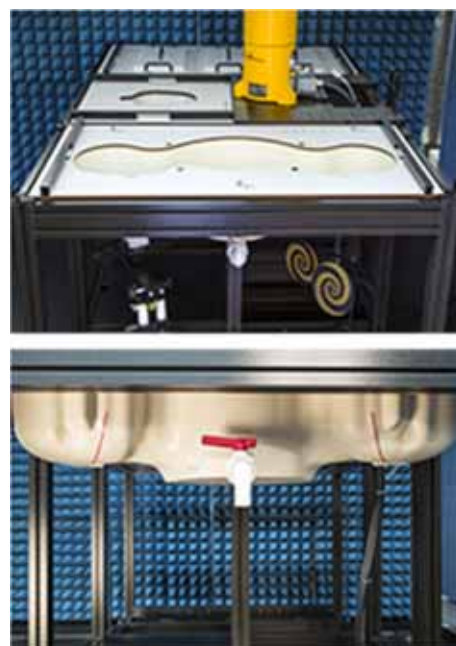

Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the SAM Twin phantom.


ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEC 62209-2 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the ELI phantom

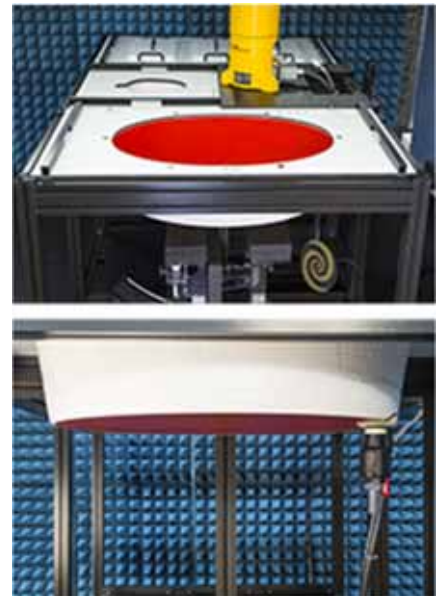

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY4 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


EQUIPMENT LIST AND CALIBRATION

Equipment's List & Calibration Information

Equipment	Model	S/N	Calibration	Calibration
			Date	Due Date
Robot	TX90	5N26A1	N.C.R	N.C.R
DASY4 Test Software	DASY5.2	N/A	N.C.R	N.C.R
DASY6 Measurement Server	DASY 6.0	1588	N/A	N/A
Data Acquisition Electronics	DAE4	1561	2018/11/7	2019/11/6
E-Field Probe	EX3DV4	7520	2018/11/5	2019/11/4
Dipole,2450MHz	D2450V2	969	2018/5/30	2021/5/29
Dipole,5GHz	D5GHzV2	1225	2018/5/25	2021/5/24
Twin SAM	Twin SAM V5.0	1368	N/A	N/A
Twin SAM	Twin SAM V8.0	1953	N/A	N/A
Twin ELI	Twin ELI V8.0	2088	N/A	N/A
Simulated Tissue 2450 MHz Head	TS-2450-H	/	Each Time	/
Simulated Tissue 5GHz Head	TS-5GHz-H	/	Each Time	/
Mounting Device	N/A	SD 000 H01 KA	N/A	N/A
Network Analyzer	8753D	3140A05361	2019/3/28	2020/3/27
Dielectric probe kit	85070B	50207	/	/
Spectrum Analyzer	FSEK30	825084/006	2018/12/13	2019/12/12
Signal Generator	SMB100A	110700	2018/11/22	2019/11/21
Power Meter	E4418B	GB43312279	2018/11/15	2019/11/14
Power Sensor	E9301A	MY41497400	2018/11/15	2019/11/14
Power Amplifier	ZVE-8G+	365701647	2019/1/11	2020/1/10
Power Amplifier	ZHL-42W+	329401642	2019/1/11	2020/1/10
Directional Coupler	488Z	810	N.C.R	N.C.R
Attenuator	20dB, 100W	1453	N.C.R	N.C.R

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

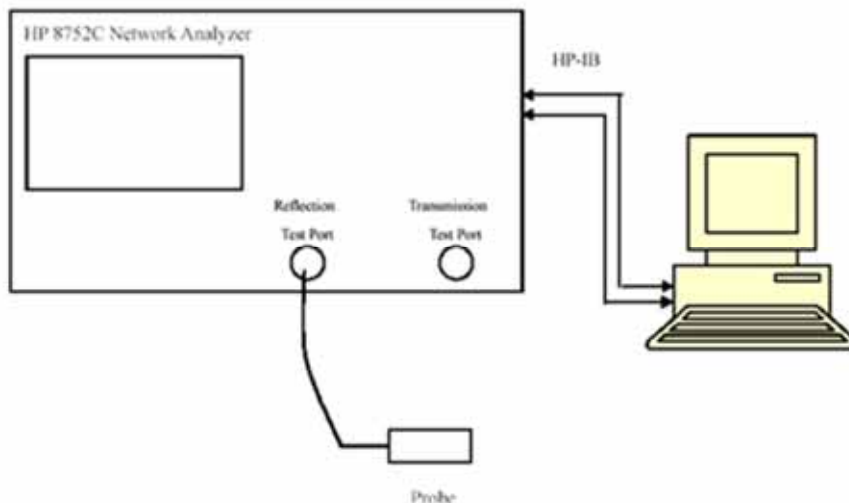

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2450	Simulated Tissue 2450 MHz Head	1.820	39.668	1.80	39.20	1.11	1.19	±5
2402	Simulated Tissue 2450 MHz Head	1.766	39.876	1.76	39.29	0.34	1.47	±5
2441	Simulated Tissue 2450 MHz Head	1.811	39.7	1.79	39.22	1.17	1.28	±5
2480	Simulated Tissue 2450 MHz Head	1.853	39.533	1.8	39.2	2.94	0.85	±5
2412	Simulated Tissue 2450 MHz Head	1.778	39.825	1.77	39.27	0.45	1.34	±5
2437	Simulated Tissue 2450 MHz Head	1.808	39.714	1.79	39.22	1.01	1.31	±5
2462	Simulated Tissue 2450 MHz Head	1.834	39.61	1.81	39.18	1.33	1.05	±5

*Liquid Verification above was performed on 2019-08-22.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
5180	Simulated Tissue 5GHz Head	4.597	37.34	4.64	36.02	-0.93	3.72	±5
5200	Simulated Tissue 5GHz Head	4.616	37.309	4.66	36	-0.94	3.64	±5
5240	Simulated Tissue 5GHz Head	4.666	37.268	4.7	35.96	-0.72	3.52	±5

*Liquid Verification above was performed on 2019-08-23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
5800	Simulated Tissue 5GHz Head	5.240	36.500	5.27	35.30	-0.57	3.40	±5
5755	Simulated Tissue 5GHz Head	5.196	36.51	5.23	35.35	-0.65	3.14	±5
5795	Simulated Tissue 5GHz Head	5.235	36.503	5.27	35.31	-0.66	3.41	±5

*Liquid Verification above was performed on 2019-08-26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	
2450	Simulated Tissue 2450 MHz Head	1.823	41.093	1.80	39.20	1.28	4.83	±5
2402	Simulated Tissue 2450 MHz Head	1.784	41.179	1.76	39.29	1.36	4.78	±5
2441	Simulated Tissue 2450 MHz Head	1.815	41.110	1.79	39.22	1.40	4.87	±5
2480	Simulated Tissue 2450 MHz Head	1.847	41.053	1.80	39.2	2.61	4.73	±5
2412	Simulated Tissue 2450 MHz Head	1.793	41.173	1.77	39.27	1.30	4.77	±5
2437	Simulated Tissue 2450 MHz Head	1.812	41.108	1.79	39.22	1.23	4.87	±5
2462	Simulated Tissue 2450 MHz Head	1.833	41.084	1.81	39.18	1.27	4.81	±5
5180	Simulated Tissue 5GHz Head	4.711	36.464	4.64	36.02	1.53	1.29	±5
5200	Simulated Tissue 5GHz Head	4.732	36.423	4.66	36	1.55	1.18	±5
5240	Simulated Tissue 5GHz Head	4.788	36.335	4.70	35.96	1.87	0.93	±5
5800	Simulated Tissue 5GHz Head	5.492	35.174	5.27	35.30	4.21	-0.36	±5
5755	Simulated Tissue 5GHz Head	5.439	35.260	5.23	35.35	4.00	-0.40	±5
5795	Simulated Tissue 5GHz Head	5.489	35.196	5.27	35.31	4.16	-0.29	±5

*Liquid Verification above was performed on 2019-09-19.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- b) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- c) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

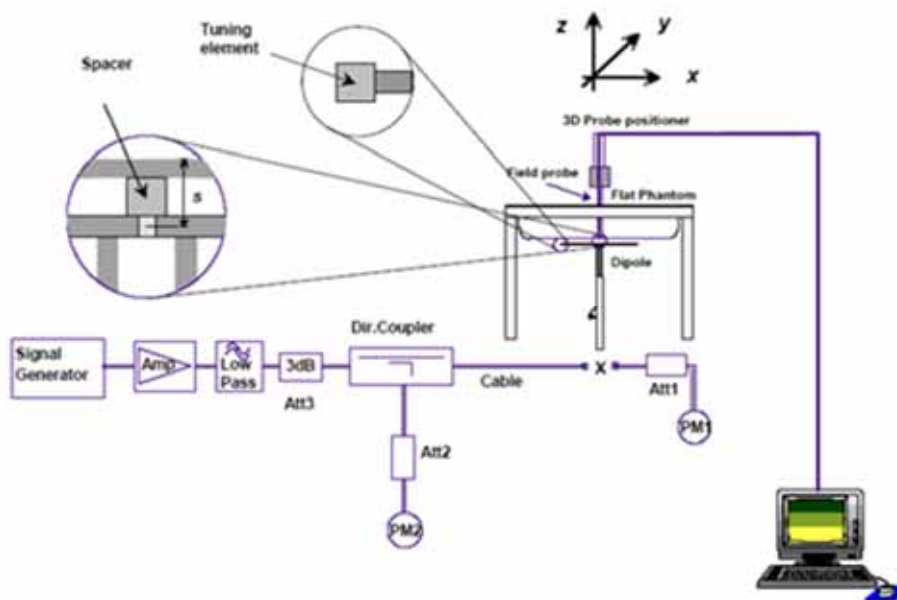

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)	Normalized to 1W (W/kg)	Target Value(W/kg)	Delta (%)	Tolerance (%)
2019/8/22	2450	Head	250	12.60	50.4	52.60	-4.18	± 10
2019/8/23	5200	Head	100	7.90	79	77.10	2.46	± 10
2019/8/26	5800	Head	100	8.14	81.4	80.50	1.12	± 10
2019/09/19	2450	Head	250	13.80	55.2	52.60	4.94	± 10
2019/09/19	5200	Head	100	8.09	80.9	77.10	4.93	± 10
2019/09/19	5800	Head	100	8.75	87.5	80.50	8.70	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

Test Laboratory: BACL . SAR Testing Lab

Date: 8/22/2019

System Check_Head_2450MHz

DUT: D2450V2-969

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used : f = 2450 MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.668$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 16.9 W/kg


250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.02 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.88 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

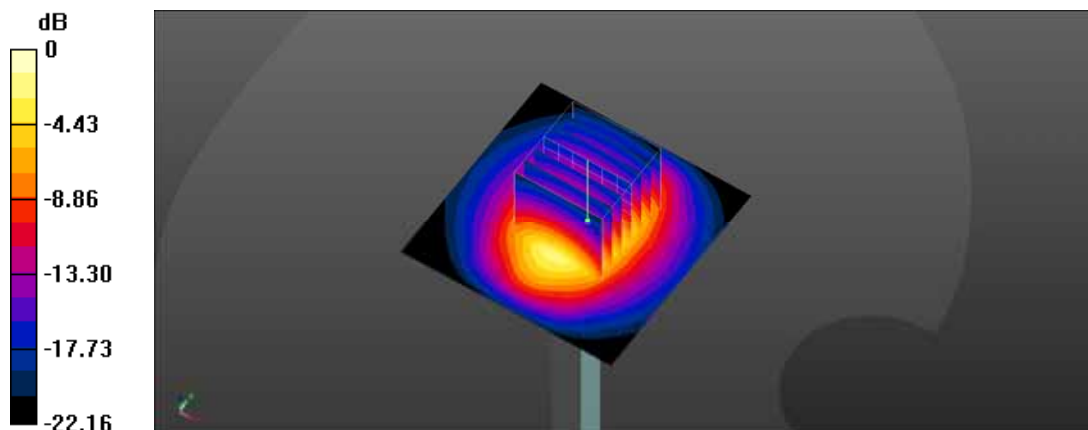

0 dB = 16.6 W/kg = 12.20 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

Date: 8/23/2019

System Check_Head_5200MHz

DUT: D5GHzV2-1225-5200

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.616 \text{ S/m}$; $\epsilon_r = 37.309$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 18.9 W/kg


100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 69.72 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.9 W/kg ; SAR(10 g) = 2.19 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

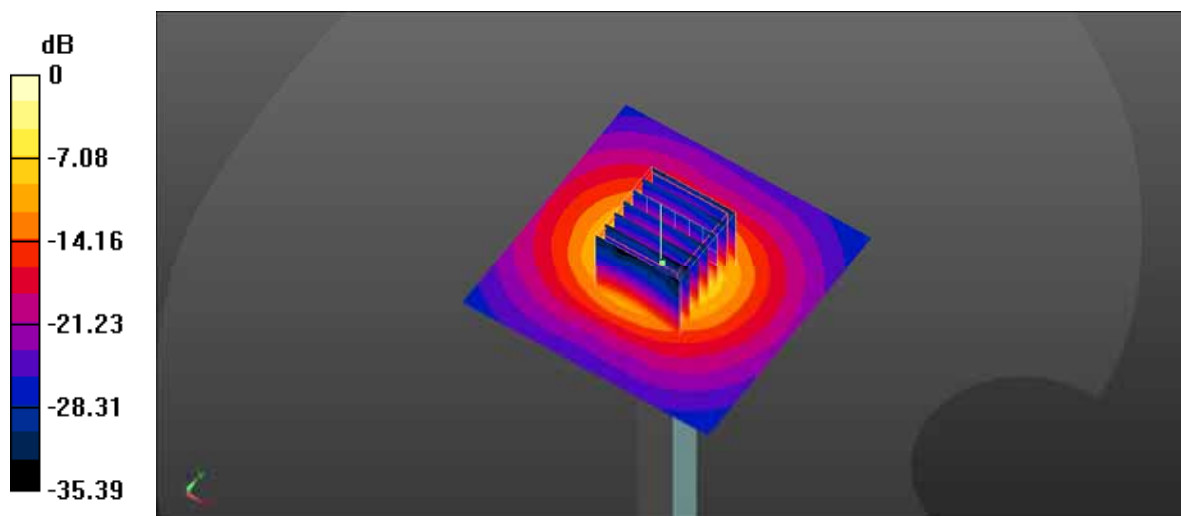

0 dB = $19.4 \text{ W/kg} = 12.88 \text{ dBW/kg}$

Test Laboratory: BACL . SAR Testing Lab

Date: 8/26/2019

System Check_Head_5800MHz

DUT: D5GHzV2-1225-5800

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.24 \text{ S/m}$; $\epsilon_r = 36.496$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $21.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 20.9 W/kg


100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 66.98 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 37.6 W/kg

SAR(1 g) = 8.14 W/kg ; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

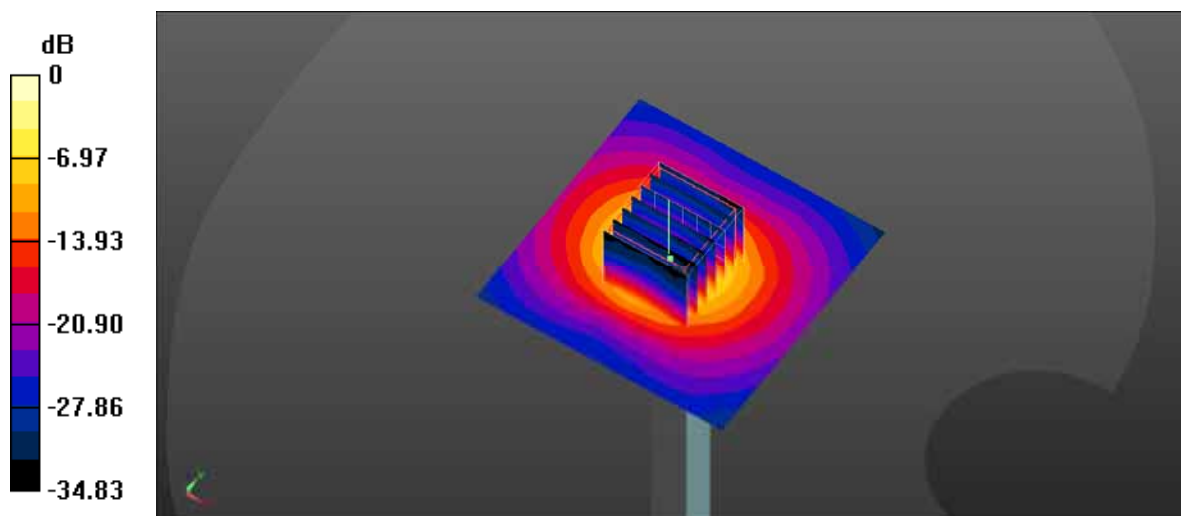

0 dB = $20.8 \text{ W/kg} = 13.18 \text{ dBW/kg}$

Test Laboratory: BACL . SAR Testing Lab

Date: 9/19/2019

System Check_Head_2450MHz

DUT: D2450V2-969

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.823 \text{ S/m}$; $\epsilon_r = 41.093$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(7.33, 7.33, 7.33); Calibrated: 11/5/2018
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 18.5 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 99.81 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.8 W/kg ; SAR(10 g) = 6.45 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

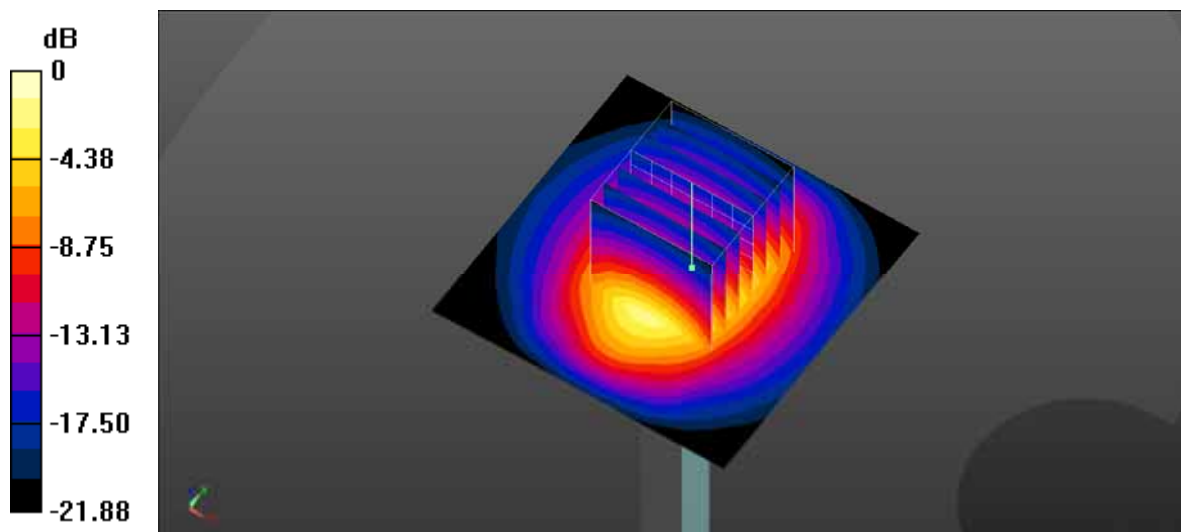

0 dB = $18.2 \text{ W/kg} = 12.60 \text{ dBW/kg}$

Test Laboratory: BACL . SAR Testing Lab

Date: 9/19/2019

System Check_Head_5200MHz

DUT: D5GHzV2-1225-5200

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.732 \text{ S/m}$; $\epsilon_r = 36.423$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.9 \text{ }^\circ\text{C}$; Liquid Temperature : $21.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.55, 5.55, 5.55); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 19.4 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 69.72 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.09 W/kg ; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.9 W/kg

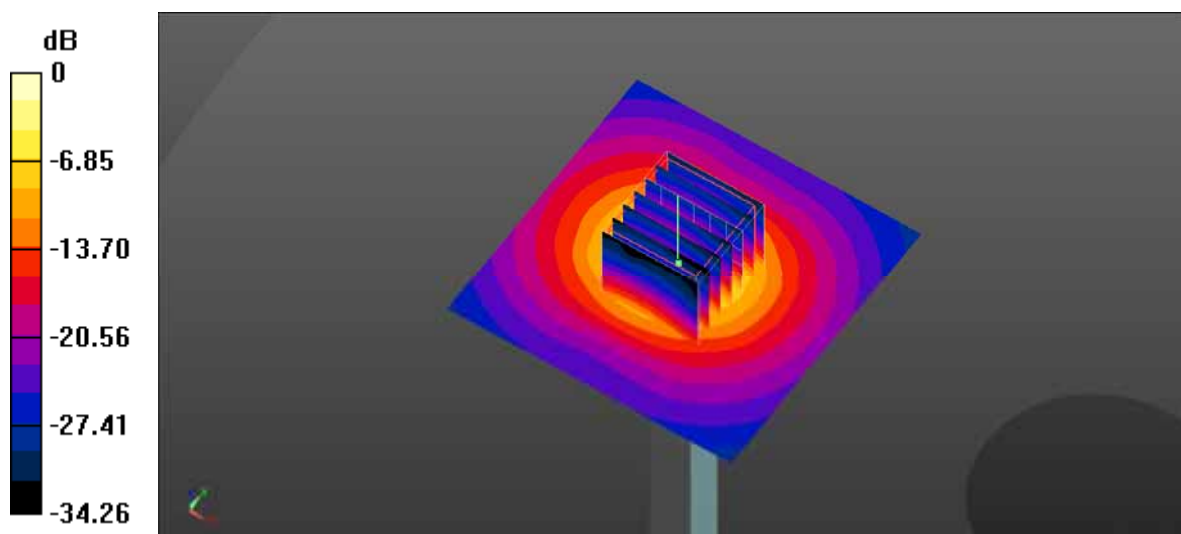

0 dB = 19.9 W/kg = 12.99 dBW/kg

Test Laboratory: BACL . SAR Testing Lab

Date: 9/19/2019

System Check_Head_5800MHz

DUT: D5GHzV2-1225-5800

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.492 \text{ S/m}$; $\epsilon_r = 35.174$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7520; ConvF(5.1, 5.1, 5.1); Calibrated: 11/5/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1561; Calibrated: 11/7/2018
- Phantom: Twin-SAM V8.0 (20deg probe tilt)-Right; Type: QD 000 P40 CB; Serial: 1368
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 22.6 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 68.47 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 41.2 W/kg

SAR(1 g) = 8.75 W/kg ; SAR(10 g) = 2.4 W/kg

Maximum value of SAR (measured) = 22.7 W/kg

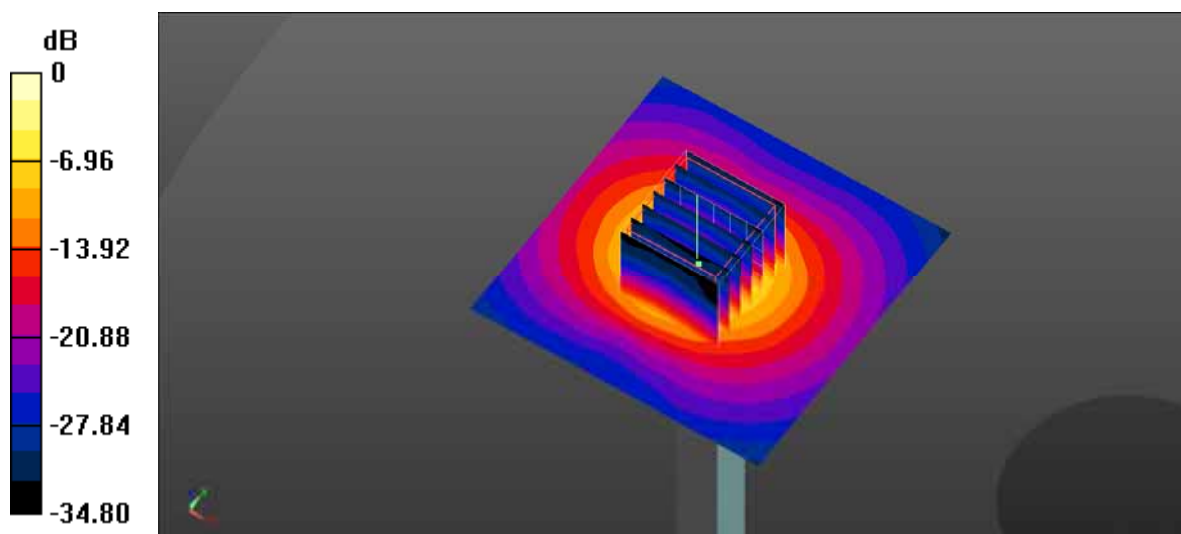



0 dB = $22.7 \text{ W/kg} = 13.56 \text{ dBW/kg}$

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

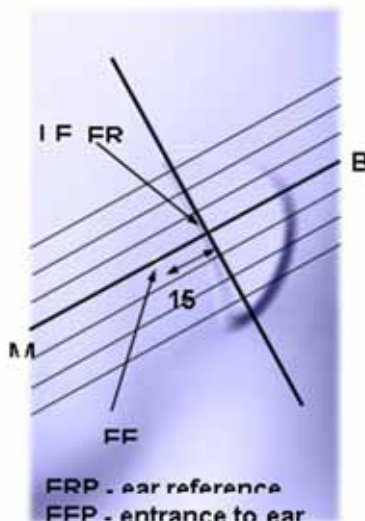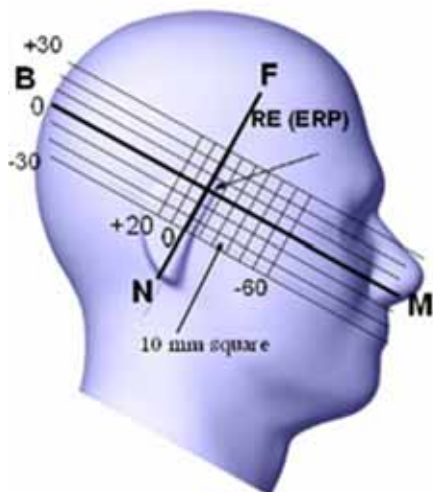

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

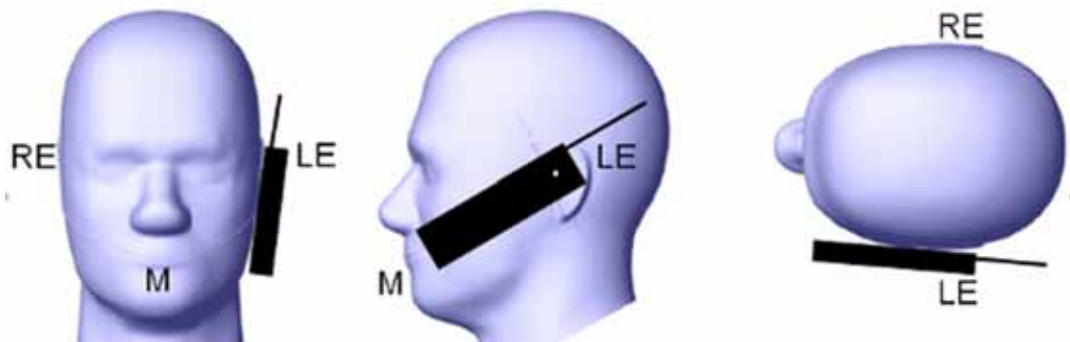

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15o Position

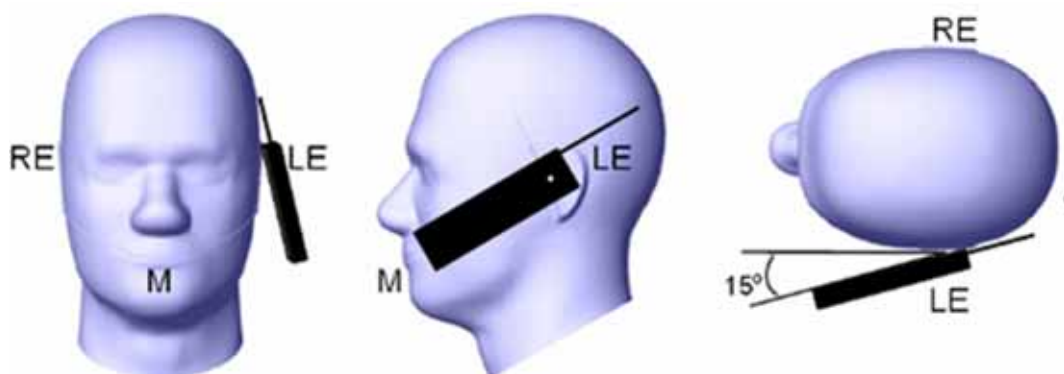

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

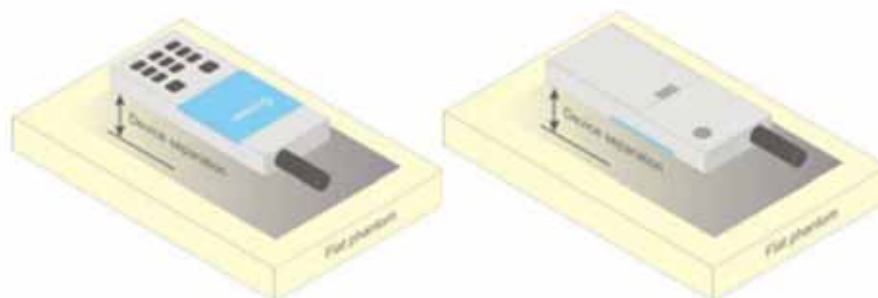


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

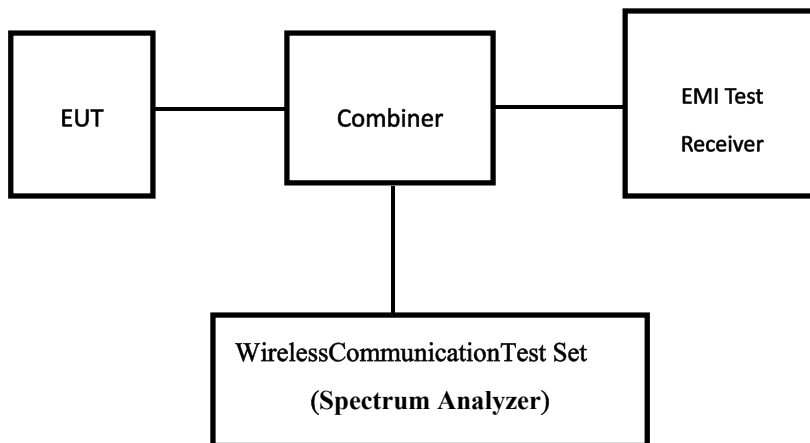

WLAN&Bluetooth

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

Wi-Fi

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

- 1.For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11
- 2.For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
WLAN(2.4G)	17.5	17.5	17.5
WLAN(U-NII-1 Band)	16.5	16.0	16.0
WLAN(U-NII-3 Band)	16.5	16.5	16.5
Bluetooth(BDR/EDR)	10.0	5.0	7.5

Test Results:

WLAN 2.4GHz:

Mode	Channel frequency (MHz)	Data Rate	RF Output Power (dBm)
802.11b	2412	1Mbps	16.97
	2437		16.99
	2462		17.10
802.11g	2412	6Mbps	12.94
	2437		12.71
	2462		12.57
802.11n HT20	2412	MCS0	12.72
	2437		12.37
	2462		12.72
802.11n HT40	2422	MCS0	12.12
	2437		12.04
	2452		11.95

Note: The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n HT20, MCS0 for 802.11n HT40.

WLAN 5G(5150-5250 MHz):

Mode	Channel frequency (MHz)	RF Output Power (dBm)
802.11a	5180	16.00
	5200	15.53
	5240	15.46
802.11ac20	5180	15.80
	5200	15.98
	5240	15.84
802.11ac40	5190	15.99
	5230	15.83
802.11ac80	5210	15.48

WLAN 5G(5725-5850 MHz):

Mode	Channel frequency (MHz)	RF Output Power (dBm)
802.11a	5745	16.43
	5785	15.89
	5825	16.46
802.11ac20	5745	16.38
	5785	15.92
	5825	16.35
802.11ac40	5755	16.15
	5795	16.48
802.11ac80	5775	5.87

Note:


The output power was tested under data rate 54 for 802.11a, MCS0 for 802.11ac20 and 802.11ac40 and 802.11ac80.

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	9.37
	2441	4.61
	2480	6.91
EDR(8-DPSK)	2402	8.77
	2441	3.19
	2480	6.24

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

Antennas Location:

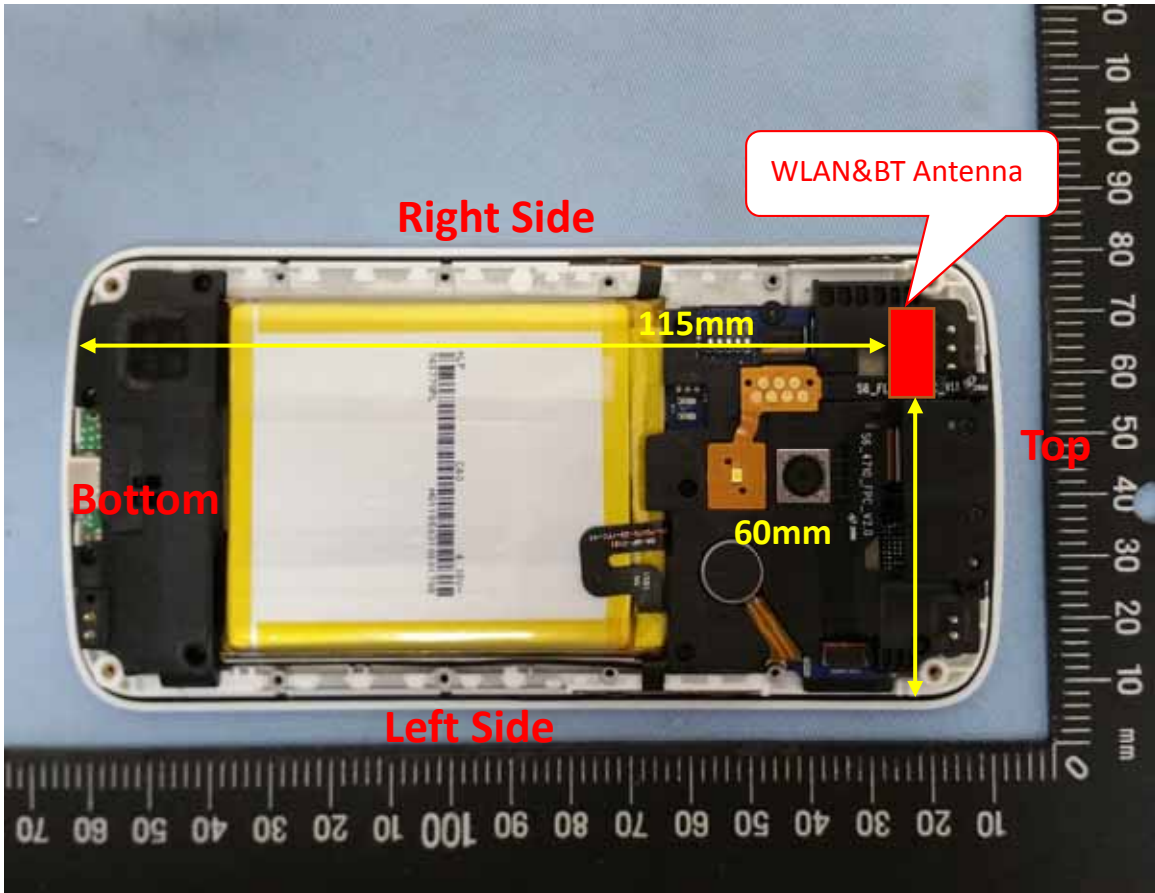

Note : The Protective material on corners was removed during SAR test.

Antenna Distance To Edge

Antenna Distance To Edge(mm)					
Antenna	Front/Back	Right Side	Left Side	Top Side	Bottom Side
Bluetooth/WLAN	<5	<5	60	<5	115

NOTE:

Per **KDB 941225 D06 v02r01**, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Min. Test Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
WLAN2.4G	2462	17.5	56.0	0	17.57	3.0	No
WLAN5G	5795	16.5	45.0	0	21.67	3.0	No
Bluetooth	2402	10.0	10	0	3.10	3.0	No

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR test exclusion for the EUT edge considerations Result

Mode	Front/Back	Left	Right	Top	Bottom
Bluetooth/WLAN	Required	Exclusion	Required	Required	Exclusion

NOTE:

Required : The distance to Edge is less than 25mm, testing is required.

Exclusion* : SAR test exclusion evaluation has been done above.

Exclusion : The distance to Edge is more than 25 mm, testing is not required.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed diametric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.5-23.0 °C	22.5-23.0 °C	22.5-23.0 °C
Relative Humidity:	59 %	59 %	59 %
Test Date:	2019-08-22	2019-08-23	2019-08-26

The testing was performed by Brett shen

WLAN 2.4G:

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
	WLAN2.4G	802.11b 1Mbps	Right Cheek	11	2462	17.10	17.50	0.01	0.346	0.379	
	WLAN2.4G	802.11b 1Mbps	Right Tilted	11	2462	17.10	17.50	0.07	0.308	0.338	
	WLAN2.4G	802.11b 1Mbps	Left Cheek	11	2462	17.10	17.50	-0.19	0.592	0.649	
	WLAN2.4G	802.11b 1Mbps	Left Tilted	11	2462	17.10	17.50	-0.06	0.530	0.581	
3	WLAN2.4G	802.11b 1Mbps	Left Cheek	1	2412	16.97	17.50	0.01	0.680	0.768	
	WLAN2.4G	802.11b 1Mbps	Left Cheek	6	2437	16.99	17.50	0.01	0.624	0.702	
*4	WLAN2.4G	802.11b 1Mbps	Left Cheek	1	2412	16.97	17.50	-0.02	0.569	0.643	PD470SH-B
	WLAN2.4G	802.11b 1Mbps	Front(10mm)	11	2462	17.1	17.5	-0.07	0.209	0.229	
	WLAN2.4G	802.11b 1Mbps	Back(10mm)	11	2462	17.1	17.5	-0.02	0.199	0.218	
	WLAN2.4G	802.11b 1Mbps	Top Side(10mm)	11	2462	17.1	17.5	-0.07	0.254	0.279	
	WLAN2.4G	802.11b 1Mbps	Left Side(10mm)	11	2462	17.1	17.5	-0.17	0.020	0.022	
	WLAN2.4G	802.11b 1Mbps	Right Side(10mm)	11	2462	17.1	17.5	0.12	0.192	0.211	
	WLAN2.4G	802.11b 1Mbps	Top Side(10mm)	1	2412	16.97	17.5	0.06	0.295	0.333	
6	WLAN2.4G	802.11b 1Mbps	Top Side(10mm)	6	2437	16.99	17.5	-0.01	0.337	0.379	
*7	WLAN2.4G	802.11b 1Mbps	Back(10mm)	11	2462	17.1	17.5	0	0.158	0.173	PD470SH-B
*8	WLAN2.4G	802.11b 1Mbps	Top Side(10mm)	6	2437	16.99	17.5	-0.01	0.249	0.280	PD470SH-B

WLAN 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Consideration:

Modulation Mode	Pavg (dBm)	Pavg (mW)	Reported SAR(W/kg)	Adjusted SAR(W/kg)	Limit(W/kg)	SAR Test Exclusion
802.11b(DSSS)	17.5	56	0.768	/	/	/
802.11g(OFDM)	13.0	20	/	0.241	1.2	Yes
802.11n HT20(OFDM)	13.0	20	/	0.241	1.2	Yes
802.11n HT40(OFDM)	12.5	18	/	0.215	1.2	Yes

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/kg}$, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR is not required for 2.4 GHz OFDM when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$.
4. For modes that peak SAR is too low to evaluate, a SAR value 0.01W/kg is considered as their Scaled SAR.
5. According to IEC 62209-2:2010, If the correction ΔSAR has a positive sign, the measured SAR results shall not be corrected.

Bluetooth:

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
	BT	GFSK 1Mbps	Right Cheek	0	2402	9.37	10	-0.11	0.045	0.052	
	BT	GFSK 1Mbps	Right Tilted	0	2402	9.37	10	0.03	0.040	0.046	
	BT	GFSK 1Mbps	Left Cheek	0	2402	9.37	10	-0.15	0.071	0.082	
	BT	GFSK 1Mbps	Left Tilted	0	2402	9.37	10	0.13	0.078	0.090	
	BT	GFSK 1Mbps	Left Tilted	39	2441	4.61	5	0.14	0.067	0.074	
1	BT	GFSK 1Mbps	Left Tilted	78	2480	6.91	7.5	-0.1	0.084	0.096	
*1	BT	GFSK 1Mbps	Left Tilted	78	2480	6.91	7.5	0.11	0.070	0.080	PD470SH-B
	BT	GFSK 1Mbps	Front(10mm)	0	2402	8.77	9	0.15	0.027	0.028	
	BT	GFSK 1Mbps	Back(10mm)	0	2402	8.77	9	-0.15	0.029	0.030	
2	BT	GFSK 1Mbps	Top Side(10mm)	0	2402	8.77	9	0.12	0.049	0.051	
	BT	GFSK 1Mbps	Left Side(10mm)	0	2402	8.77	9	0.19	0.002	0.002	
	BT	GFSK 1Mbps	Right Side(10mm)	0	2402	8.77	9	0.14	0.021	0.022	
	BT	GFSK 1Mbps	Top Side(10mm)	39	2441	3.19	4	0.01	0.038	0.046	
	BT	GFSK 1Mbps	Top Side(10mm)	78	2480	6.24	7	0.18	0.042	0.050	
*2	BT	GFSK 1Mbps	Back(10mm)	0	2402	8.77	9	0.12	0.021	0.022	PD470SH-B
*3	BT	GFSK 1Mbps	Top Side(10mm)	0	2402	8.77	9	0.07	0.037	0.039	PD470SH-B

Note:

1. When the 1-g SAR is $\leq 0.8W/Kg$, testing for other channels are optional.
2. Since the power of BLE mode is the largest mode of Bluetooth, BLE mode is selected to test.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WLAN 5G:

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
	WLAN5G	802.11a 6Mbps	Right Cheek	36	5180	16.00	16.50	0.04	0.867	0.973	
	WLAN5G	802.11a 6Mbps	Right Cheek	40	5200	15.53	16.00	0.03	0.878	0.978	
	WLAN5G	802.11a 6Mbps	Right Cheek	48	5240	15.46	16.00	0.11	0.939	1.063	
	WLAN5G	802.11a 6Mbps	Right Tilted	36	5180	16.00	16.50	0.14	0.921	1.033	
	WLAN5G	802.11a 6Mbps	Right Tilted	40	5200	15.53	16.00	0.07	0.962	1.072	
	WLAN5G	802.11a 6Mbps	Right Tilted	48	5240	15.46	16.00	0.15	0.980	1.110	
	WLAN5G	802.11a 6Mbps	Left Cheek	36	5180	16.00	16.50	-0.11	0.868	0.974	
	WLAN5G	802.11a 6Mbps	Left Cheek	40	5200	15.53	16.00	0.1	1.000	1.114	
	WLAN5G	802.11a 6Mbps	Left Cheek	48	5240	15.46	16.00	0.05	1.010	1.144	
	WLAN5G	802.11a 6Mbps	Left Tilted	36	5180	16.00	16.50	0.12	0.830	0.931	
4	WLAN5G	802.11a 6Mbps	Left Tilted	40	5200	15.53	16.00	-0.03	1.160	1.293	
	WLAN5G	802.11a 6Mbps	Left Tilted	48	5240	15.46	16.00	0.07	1.100	1.246	
*5	WLAN5G	802.11a 6Mbps	Left Tilted	40	5200	15.53	16.00	0.02	1.100	1.226	PD470SH-B

	WLAN5G	802.11ac-VHT40 MCS0	Right Cheek	159	5795	16.48	17.00	0.01	0.903	1.018	
	WLAN5G	802.11ac-VHT40 MCS0	Right Cheek	151	5755	16.15	16.50	0.09	0.954	1.034	
	WLAN5G	802.11ac-VHT40 MCS0	Right Tilted	159	5795	16.48	17.00	0.16	0.884	0.996	
	WLAN5G	802.11ac-VHT40 MCS0	Right Tilted	151	5755	16.15	16.50	0.13	0.914	0.991	
5	WLAN5G	802.11ac-VHT40 MCS0	Left Cheek	159	5795	16.48	17.00	-0.16	1.180	1.330	
	WLAN5G	802.11ac-VHT40 MCS0	Left Cheek	151	5755	16.15	16.50	-0.02	1.100	1.192	
	WLAN5G	802.11ac-VHT40 MCS0	Left Tilted	159	5795	16.48	17.00	0.04	0.924	1.042	
	WLAN5G	802.11ac-VHT40 MCS0	Left Tilted	151	5755	16.15	16.50	-0.11	1.180	1.279	
*6	WLAN5G	802.11ac-VHT40 MCS0	Left Cheek	159	5795	16.48	17.00	-0.02	1.160	1.308	PD470SH-B

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Note
	WLAN5G	802.11a 6Mbps	Front(10mm)	36	5180	16.00	16.50	-0.13	0.210	0.236	
	WLAN5G	802.11a 6Mbps	Back(10mm)	36	5180	16.00	16.50	0.01	0.154	0.173	
	WLAN5G	802.11a 6Mbps	Top Side(10mm)	36	5180	16.00	16.50	-0.09	0.341	0.383	
	WLAN5G	802.11a 6Mbps	Left Side(10mm)	36	5180	16.00	16.50	0.12	0.029	0.033	
	WLAN5G	802.11a 6Mbps	Right Side(10mm)	36	5180	16.00	16.50	0.01	0.102	0.114	
	WLAN5G	802.11a 6Mbps	Top Side(10mm)	40	5200	15.53	16	0.12	0.334	0.372	
7	WLAN5G	802.11a 6Mbps	Top Side(10mm)	48	5240	15.46	16	-0.05	0.356	0.403	
*9	WLAN5G	802.11a 6Mbps	Back(10mm)	36	5180	16.00	16.50	0.06	0.122	0.137	PD470SH-B
*10	WLAN5G	802.11a 6Mbps	Top Side(10mm)	48	5240	15.46	16	0.16	0.342	0.387	PD470SH-B
	WLAN5G	802.11ac-VHT40 MCS0	Front(10mm)	159	5795	16.48	17.00	-0.1	0.328	0.370	
	WLAN5G	802.11ac-VHT40 MCS0	Back(10mm)	159	5795	16.48	17.00	0.07	0.342	0.386	
8	WLAN5G	802.11ac-VHT40 MCS0	Top Side(10mm)	159	5795	16.48	17.00	-0.11	0.455	0.513	
	WLAN5G	802.11ac-VHT40 MCS0	Left Side(10mm)	159	5795	16.48	17.00	-0.18	0.059	0.067	
	WLAN5G	802.11ac-VHT40 MCS0	Right Side(10mm)	159	5795	16.48	17.00	0	0.135	0.152	
	WLAN5G	802.11ac-VHT40 MCS0	Top Side(10mm)	151	5755	16.15	16.50	0.1	0.462	0.501	
*11	WLAN5G	802.11ac-VHT40 MCS0	Back(10mm)	159	5795	16.48	17.00	0.02	0.289	0.326	PD470SH-B
*12	WLAN5G	802.11ac-VHT40 MCS0	Top Side(10mm)	159	5795	16.48	17.00	0.07	0.411	0.463	PD470SH-B

Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 Head and Body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
6. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg and SAR peak to location ratio < 0.04 , no additional SAR measurements for MIMO.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

SAR MEASUREMENT VARIABILITY

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
			Original	Repeated	
WLAN5 G	5795	Left Cheek	1.18	1.11	1.07

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
Bluetooth +WLAN	X	X

Simultaneous SAR test exclusion considerations:

Bluetooth +WLAN Main:

Mode (SAR1+SAR2)	Position	eported SAR (W/kg)		ΣSAR < 1.6W/kg
		SAR1	SAR2	
/	/	/	/	/
/	/	/	/	/

Conclusion:

Sum of SAR: $\Sigma\text{SAR} < 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test


Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	√3	0	0	0.0	0.0
Boundary effect	1.0	R	√3	1	1	0.6	0.6
Linearity	4.7	R	√3	1	1	2.7	2.7
Detection limits	1.0	R	√3	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	√3	1	1	0.0	0.0
Integration time	0.0	R	√3	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	√3	1	1	0.6	0.6
RF ambient conditions– reflections	1.0	R	√3	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	√3	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	√3	1	1	3.9	3.9
Post-processing	2.0	R	√3	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	√3	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	√3	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	√3	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	√3	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9


Measurement uncertainty evaluation for IEC62209-2 SAR test






Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Modulation Response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions– reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	$\sqrt{3}$	1	1	2.6	2.6
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc. - Conductivity	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Temp. unc. - Permittivity	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

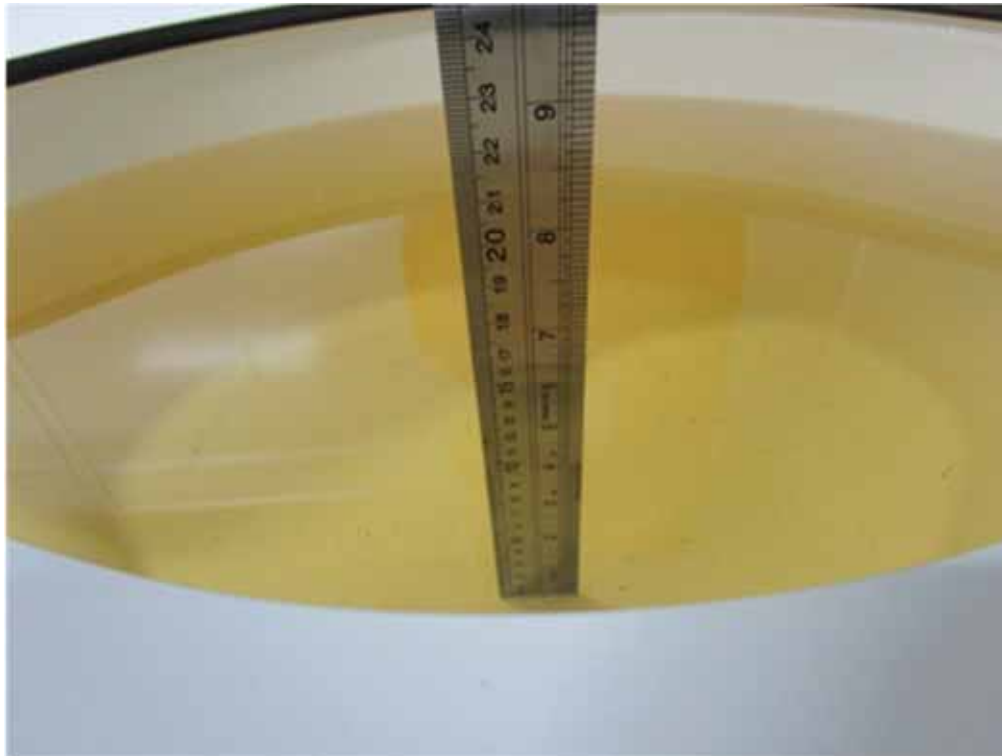


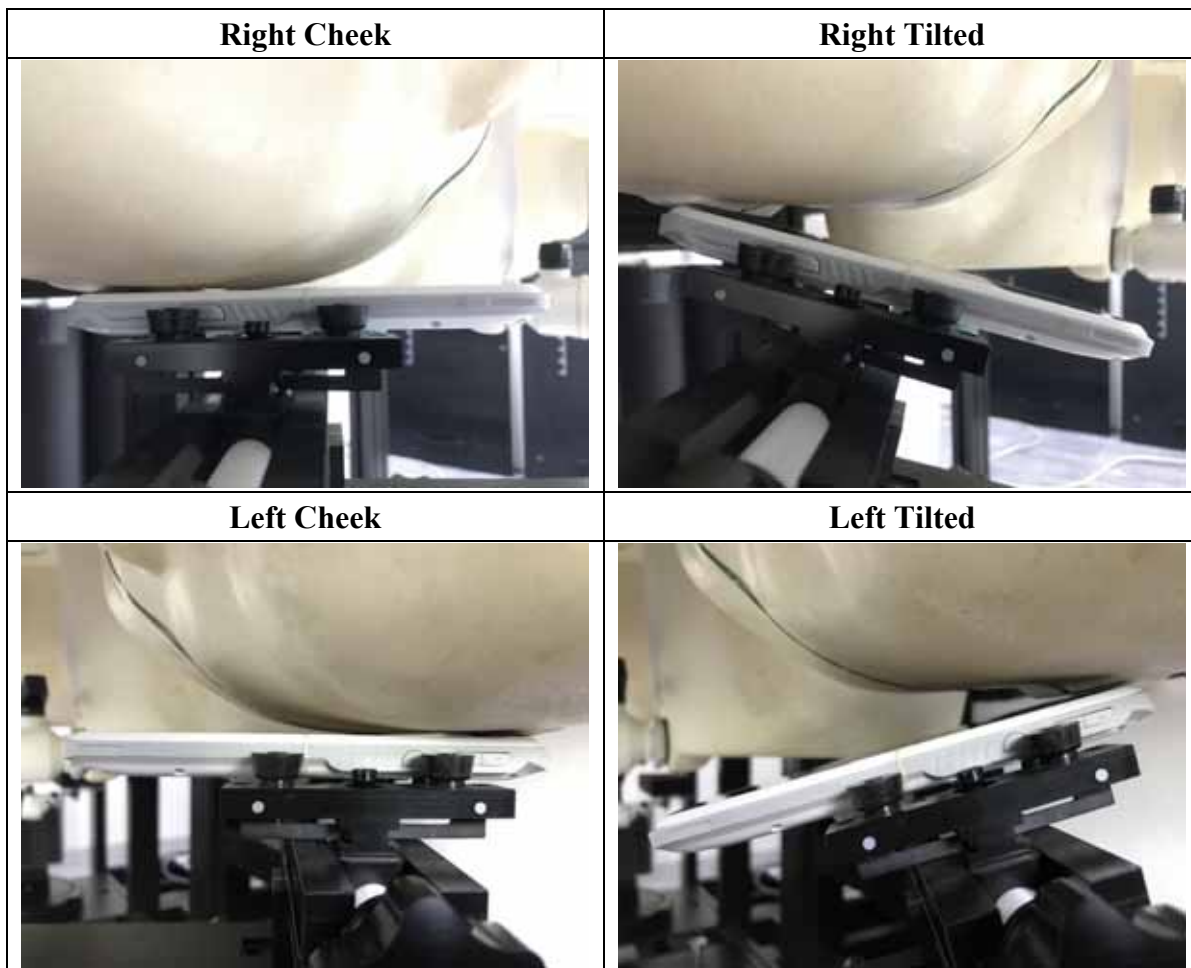
APPENDIX B EUT TEST POSITION PHOTOS

Liquid depth $\geq 15\text{cm}$



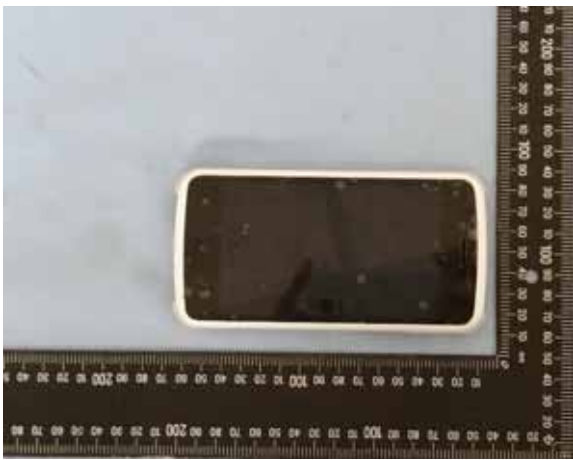

Front	Back
	
Left	Right
	
Top	
	

<p style="text-align: center;">EUT-Front View</p>  A photograph showing the front view of a small, dark, rectangular electronic device. The device is centered on a light blue background. A black ruler with white markings is visible on the right and bottom edges of the image for scale.	<p style="text-align: center;">EUT-Back View</p>  A photograph showing the back view of the same electronic device. The back is light-colored and features several small circular holes and a central circular feature. A black ruler with white markings is visible on the right and bottom edges of the image for scale.
<p style="text-align: center;">EUT-Front View (PD470SH-B)</p>  A photograph showing the front view of a small, dark, rectangular electronic device, similar to the one above. A black ruler with white markings is visible on the right and bottom edges of the image for scale.	<p style="text-align: center;">EUT-Back View (PD470SH-B)</p>  A photograph showing the back view of the same electronic device, similar to the one above. A black ruler with white markings is visible on the right and bottom edges of the image for scale.

APPENDIX C SAR PLOTS OF SAR MEASUREMENT

Please refer to the file document of RXZ190821001-23A

APPENDIX C SAR PLOTS OF SAR MEASUREMENT.

APPENDIX D CALIBRATION CERTIFICATES

Please refer to the file document of RXZ190821001-23A

APPENDIX D CALIBRATION CERTIFICATES.

******* END OF REPORT *******