



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20230200137E-02
Applicant: THINKCAR TECH CO., LTD.
Address of Applicant: 2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen
Equipment Under Test (EUT):
Product: THINKLINK Video Remote Service Device, THINKLINK Video Remote Service Device, THINKLINK Video Remote Diagnostic Device
Model No.: TKSL1, TKTL1
Teat Model No.: TKSL1
Brand Name: THINKCAR, XHINKCAR, MUCAR
FCC ID: 2AUARTHINKTLB
Standards: 47 CFR Part 15, Subpart C
ANSI C63.10: 2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01
Date of Receipt: 2022-02-22
Date of Test: 2022-02-22 to 2023-02-14
Date of Issue: 2023-02-24
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: _____

Lewis Zhou

(Lewis Zhou)

Reviewed By: _____

Timo Lei

(Timo Lei)

Approved By: _____

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230200137E-02	Rev.01	Initial report	2023-02-24

Note:

This test report (Ref. No.: CQASZ20230200137E-02)

In addition to radiation stray test data, other test data in the report are from the original test report (Ref. No.: CQASZ20220200239E-02).

Only the appearance of the test sample was reported, for which radiation spurious was retested

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

Note:

In addition to radiation stray test data, other test data in the report are from the original test report (Ref. No.: CQASZ20220200239E-02).

Only the appearance of the test sample was reported, for which radiation spurious was retested

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	7
4.5 DESCRIPTION OF SUPPORT UNITS	9
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
4.9 DEVIATION FROM STANDARDS	10
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
4.12 EQUIPMENTS LIST	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED EMISSIONS	13
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	17
<i>Test Result</i>	18
<i>Test Graphs</i>	19
5.4 6DB OCCUPY BANDWIDTH	24
5.5 POWER SPECTRAL DENSITY	36
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	43
5.7 RF CONDUCTED SPURIOUS EMISSIONS	48
5.8 RADIATED SPURIOUS EMISSIONS	63
5.8.1 Radiated emission below 1GHz	66
5.8.2 Transmitter emission above 1GHz	68
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	70
6 PHOTOGRAPHS - EUT TEST SETUP	75
6.1 RADIATED EMISSION	75
6.2 CONDUCTED EMISSION	76
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	77

4 General Information

4.1 Client Information

Applicant:	THINKCAR TECH CO., LTD.
Address of Applicant:	2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen
Manufacturer:	THINKCAR TECH CO., LTD.
Address of Manufacturer:	2606, building 4, phase II, TiananYungu, Gangtou community, Bantian, Longgang District, Shenzhen
Factory:	THINKCAR TECH CO., LTD.
Address of Factory:	Room 401, 4th Floor, Block B, Qiaoan Science and Technology Industrial Park, Longhua District, Shenzhen, Guangdong, China

4.2 General Description of EUT

Product Name:	THINKLINK Video Remote Service Device, THINKLINK Video Remote Service Device, THINKLINK Video Remote Diagnostic Device
Model No.:	TKSL1, TKTL1
Test Model No.:	TKSL1
Trade Mark:	THINKCAR, XHINKCAR, MUCAR
Adapter:	Adapter: MODEL: PSY1204000 INPUT: 100-240V~50/60Hz 1.3A Max OUTPUT: 12V 4A, 48W
EUT Supports Radios application:	BT: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz; U-NII-3: 5.725-5.850GHz

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Test Software of EUT:	cktszsss32
Antenna Type:	FPC antenna
Antenna Gain:	3.34dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Run Software:

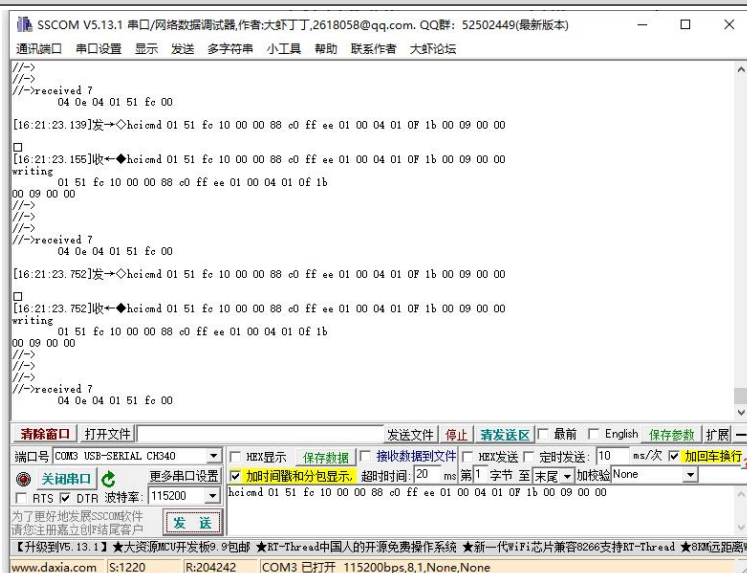

The screenshot shows the SSCOM V5.13.1 software interface. The main window displays a log of data being received and sent over a serial port. The log shows hexadecimal data packets, such as '04 0e 04 01 51 f0 00' and '01 51 f0 10 00 00 88 e0 ff ee 01 00 04 01 0f 1b 00 09 00 00'. The interface includes a menu bar with options like '清除窗口', '打开文件', '发送文件', '停止', '清除发送区', '最新', 'English', '保存参数', and '扩展'. Below the menu bar, there are various settings for the serial port, including '端口号' (COM3), '波特率' (115200), and '校验' (None). The status bar at the bottom shows 'COM3 已打开 115200bps,8,1,None,None'.

Operated Mode for Worst Duty Cycle:		
Test Mode	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	89.36	0.49
IEEE802.11g	62.96	2.01
IEEE802.11n (HT20)	61.54	2.11

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipments List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU40	CQA-075	2022/9/9	2023/9/8
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/9/9	2023/9/8
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/9/9	2023/9/8
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/9/9	2023/9/8
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/9/9	2023/9/8
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/9/9	2023/9/8
Antenna Connector	CQA	RFC-01	CQA-080	2022/9/9	2023/9/8
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/9/9	2023/9/8
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/9/9	2023/9/8
Power meter	R&S	NRVD	CQA-029	2022/9/9	2023/9/8
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/9/9	2023/9/8
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
LISN	R&S	ENV216	CQA-003	2022/9/9	2023/9/8
Coaxial cable	CQA	N/A	CQA-C009	2022/9/9	2023/9/8
DC power	KEYSIGHT	E3631A	CQA-028	2022/9/9	2023/9/8

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

5 Test results and Measurement Data

5.1 Antenna Requirement

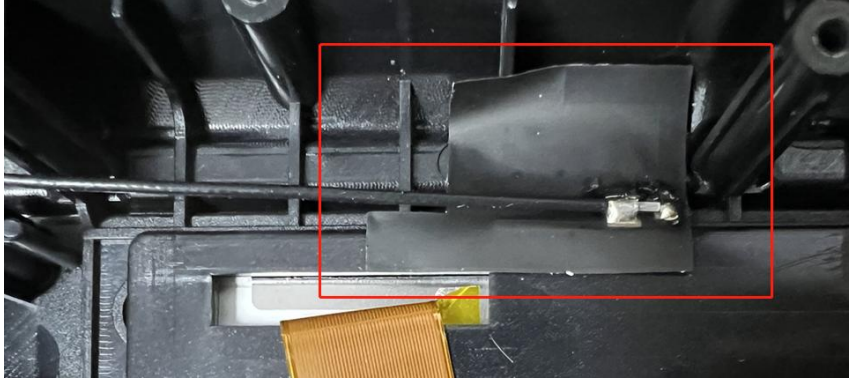Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	
<p>The antenna is FPC antenna. 3.34dBi@2.4GHz</p>	


5.2 Conducted Emissions

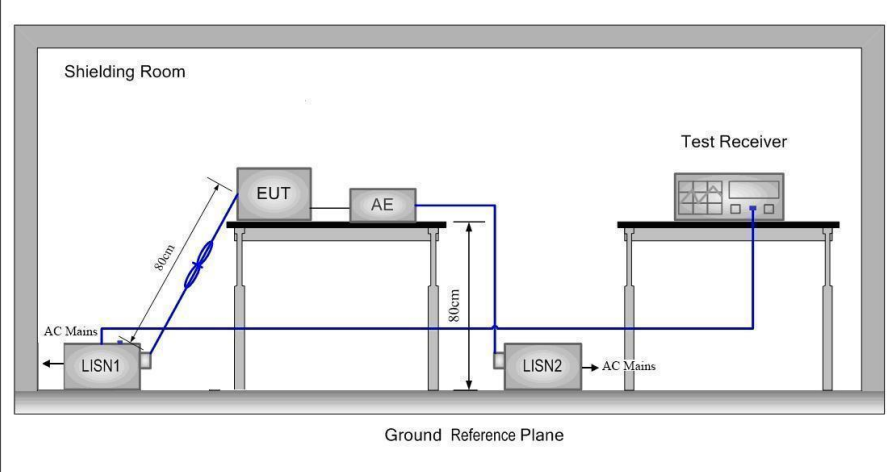Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
0.5-5	56	46													
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Setup:															
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and														

	highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

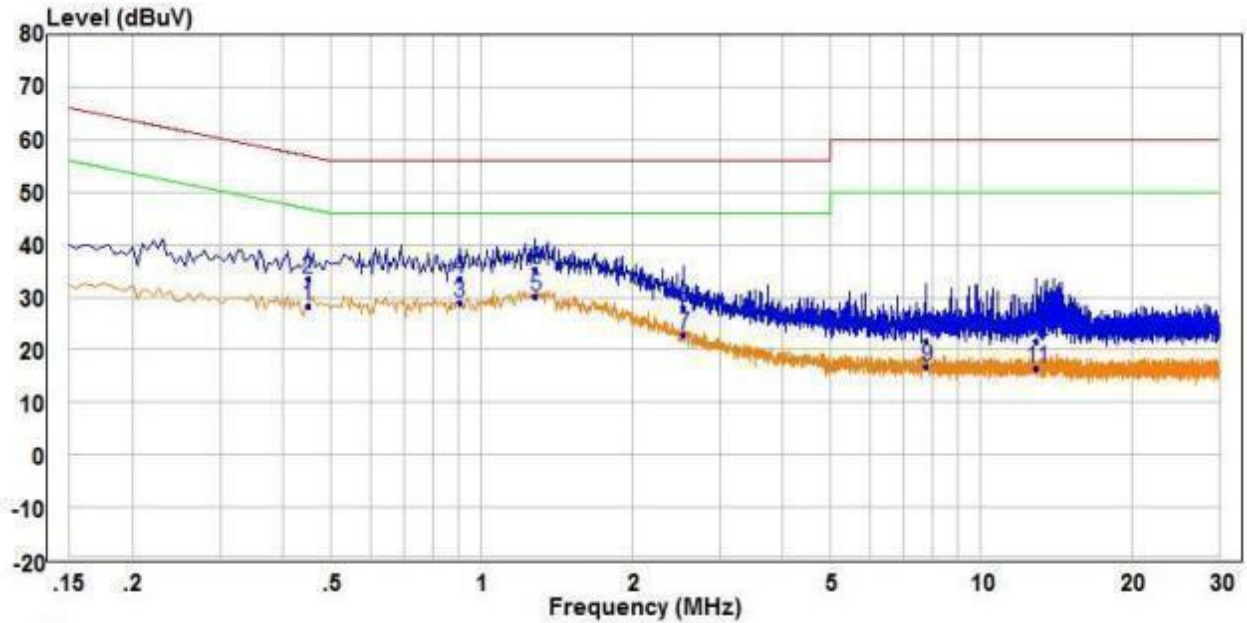


	Read Freq	Read Level	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.450	18.76	9.66	28.42	46.88	-18.46	Average	Line
2	0.450	23.85	9.66	33.51	56.88	-23.37	QP	Line
3	0.905	19.14	9.76	28.90	46.00	-17.10	Average	Line
4	0.905	23.89	9.76	33.65	56.00	-22.35	QP	Line
5 PP	1.285	19.90	10.40	30.30	46.00	-15.70	Average	Line
6 QP	1.285	24.78	10.40	35.18	56.00	-20.82	QP	Line
7	2.545	11.63	11.14	22.77	46.00	-23.23	Average	Line
8	2.545	16.78	11.14	27.92	56.00	-28.08	QP	Line
9	7.775	6.89	9.83	16.72	50.00	-33.28	Average	Line
10	7.775	11.89	9.83	21.72	60.00	-38.28	QP	Line
11	12.945	6.72	9.80	16.52	50.00	-33.48	Average	Line
12	12.945	11.73	9.80	21.53	60.00	-38.47	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

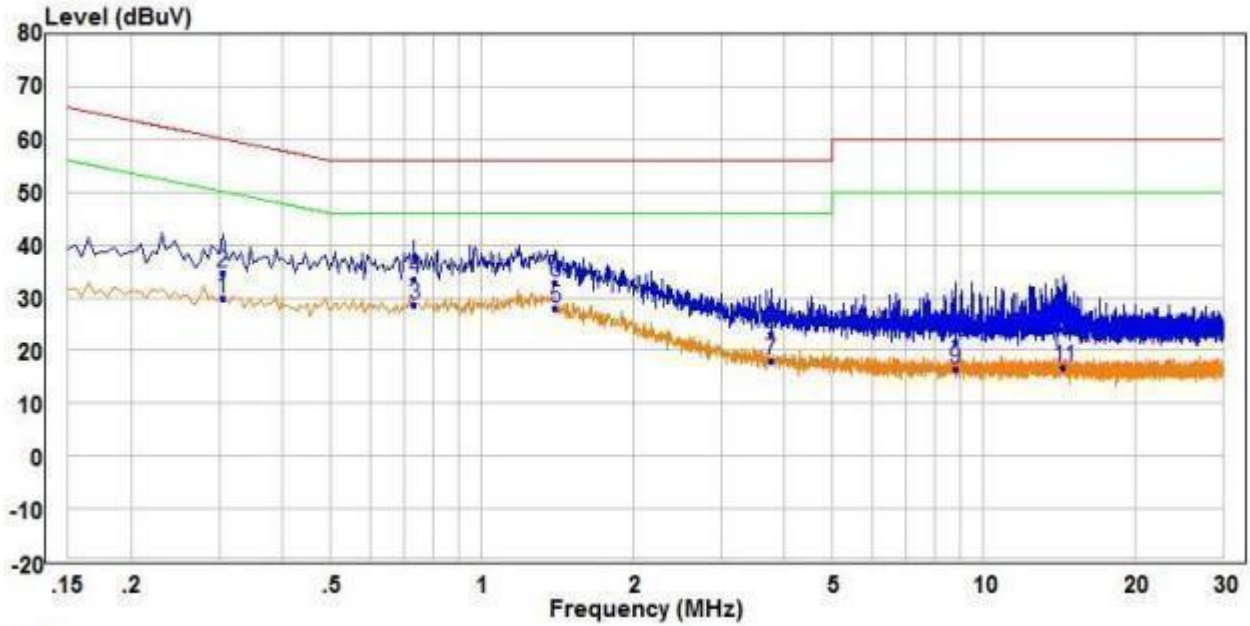


	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dB		
1	0.305	20.29	9.49	29.78	50.11	-20.33 Average	Neutral
2	0.305	25.24	9.49	34.73	60.11	-25.38 QP	Neutral
3 PP	0.735	18.81	9.88	28.69	46.00	-17.31 Average	Neutral
4 QP	0.735	23.58	9.88	33.46	56.00	-22.54 QP	Neutral
5	1.400	18.38	9.72	28.10	46.00	-17.90 Average	Neutral
6	1.400	23.06	9.72	32.78	56.00	-23.22 QP	Neutral
7	3.765	8.37	9.78	18.15	46.00	-27.85 Average	Neutral
8	3.765	13.25	9.78	23.03	56.00	-32.97 QP	Neutral
9	8.785	6.67	9.86	16.53	50.00	-33.47 Average	Neutral
10	8.785	11.74	9.86	21.60	60.00	-38.40 QP	Neutral
11	14.430	7.17	9.75	16.92	50.00	-33.08 Average	Neutral
12	14.430	14.47	9.75	24.22	60.00	-35.78 QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak & Average Output Power

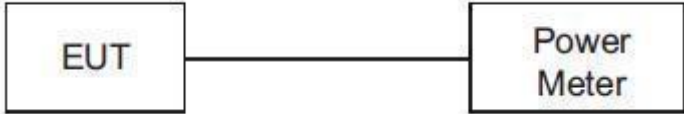
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <pre> graph LR EUT[EUT] --- PM[Power Meter] </pre>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass



Measurement Data
Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	11.50	≤30	PASS
		2437	12.80	≤30	PASS
		2462	12.08	≤30	PASS
11G	Ant1	2412	11.13	≤30	PASS
		2437	12.38	≤30	PASS
		2462	11.61	≤30	PASS
11N20SISO	Ant1	2412	10.86	≤30	PASS
		2437	12.09	≤30	PASS
		2462	11.36	≤30	PASS


Test Graphs

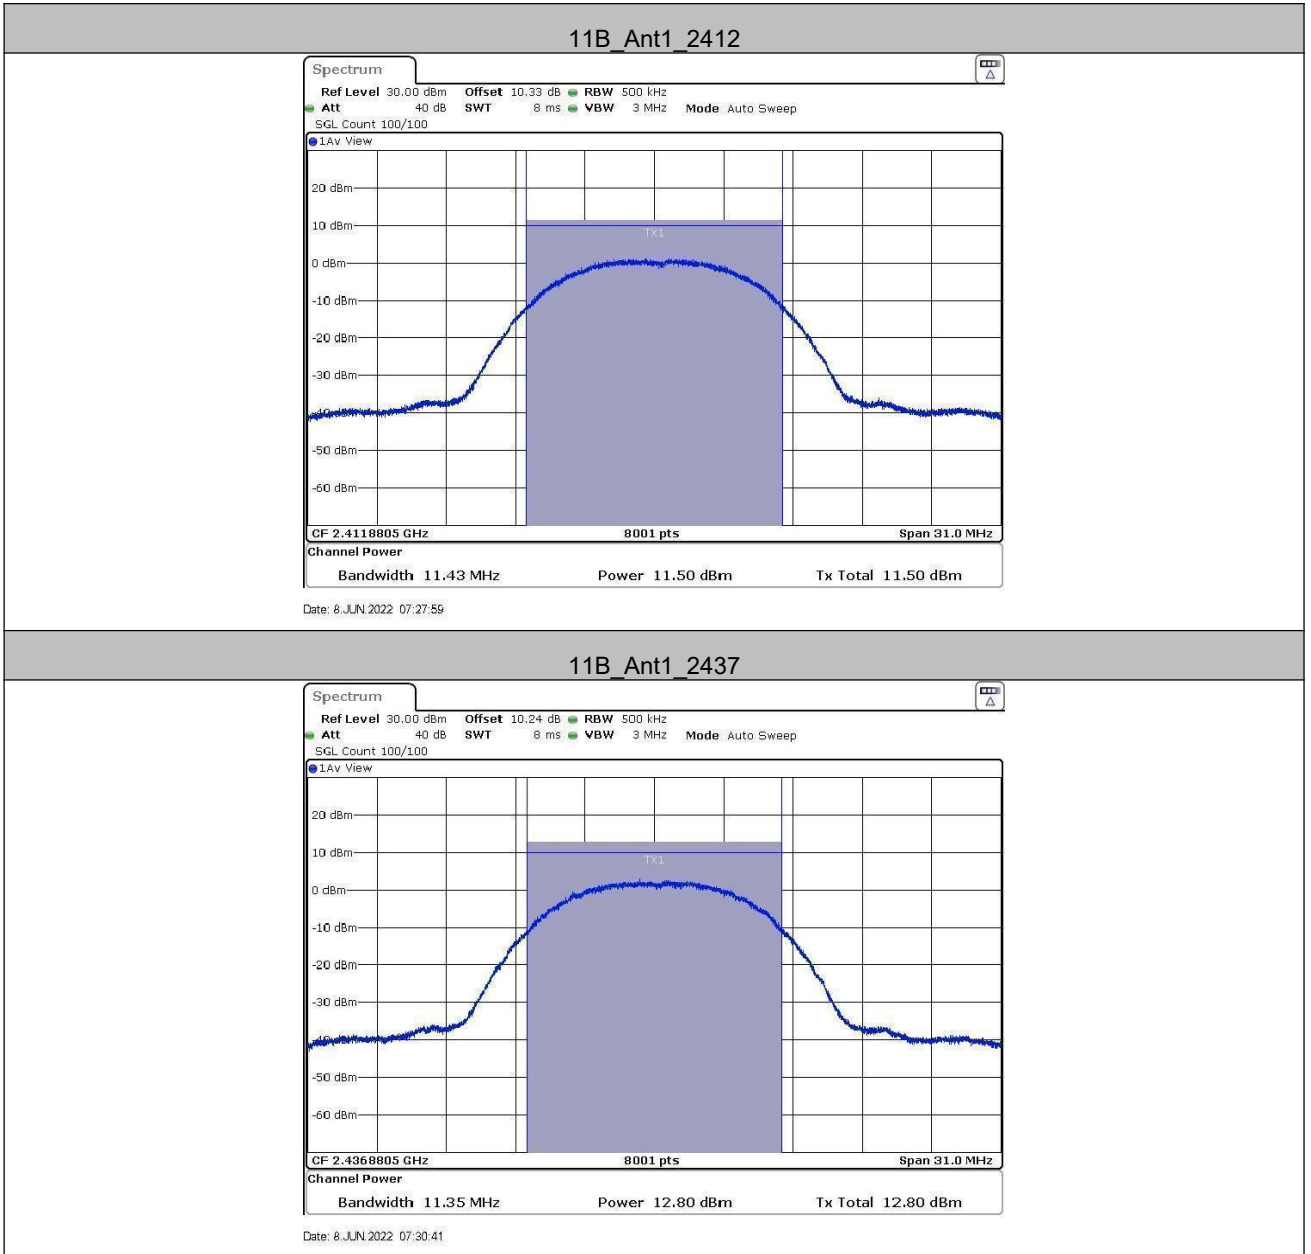

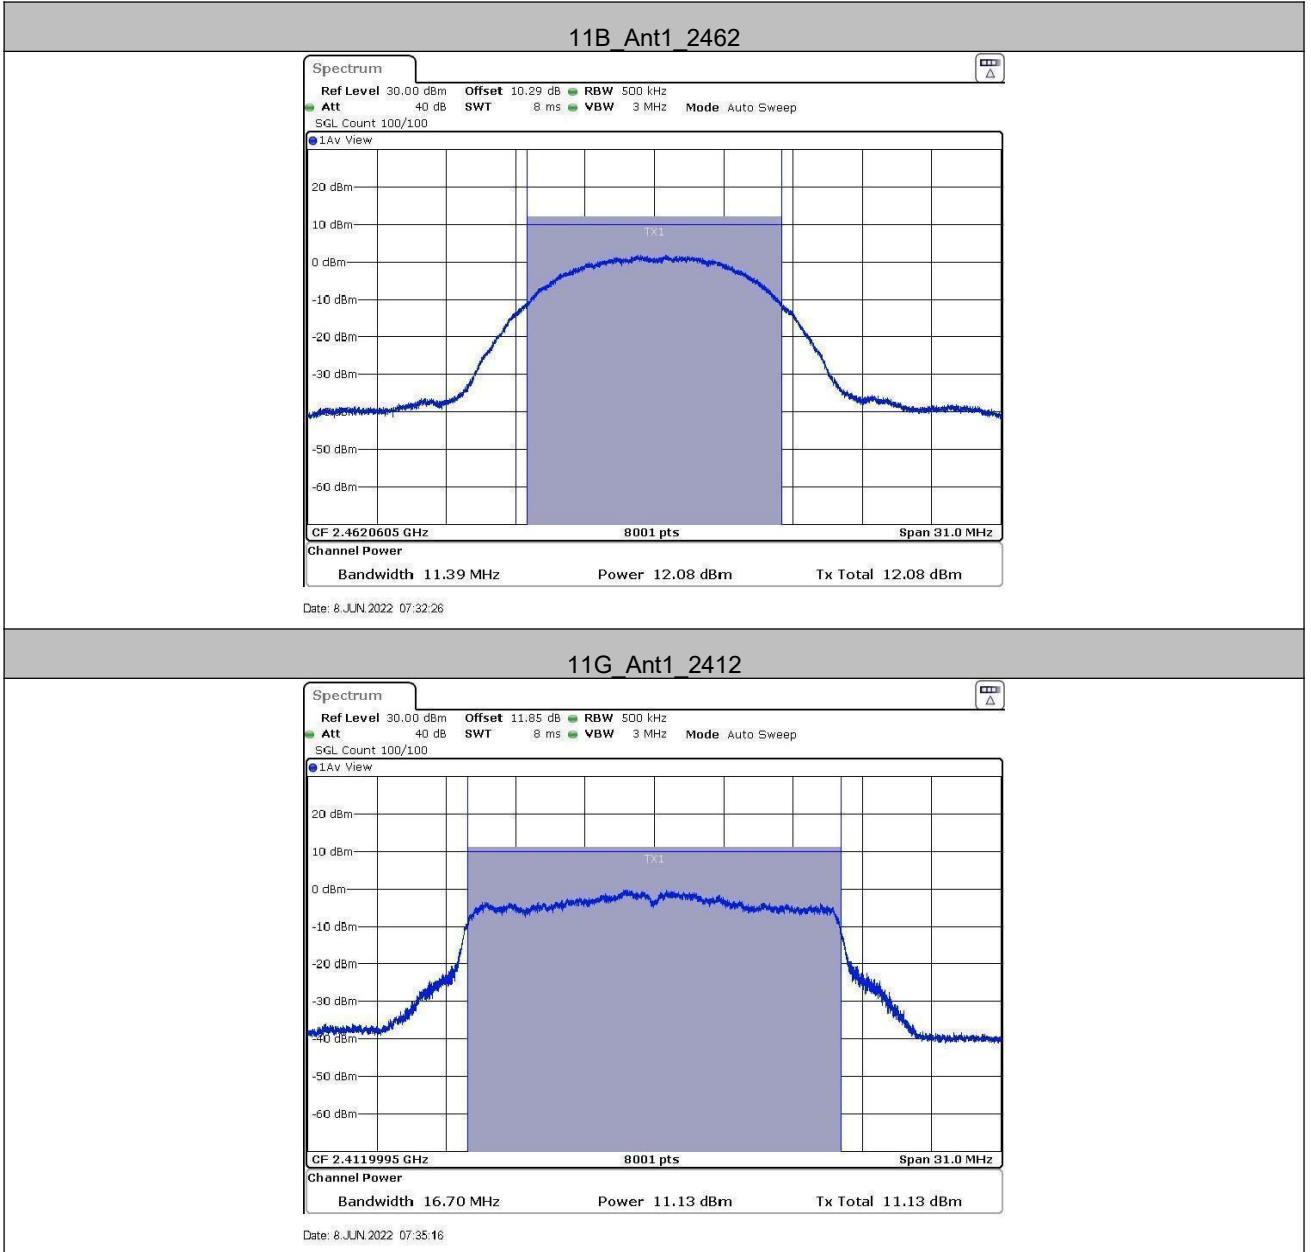

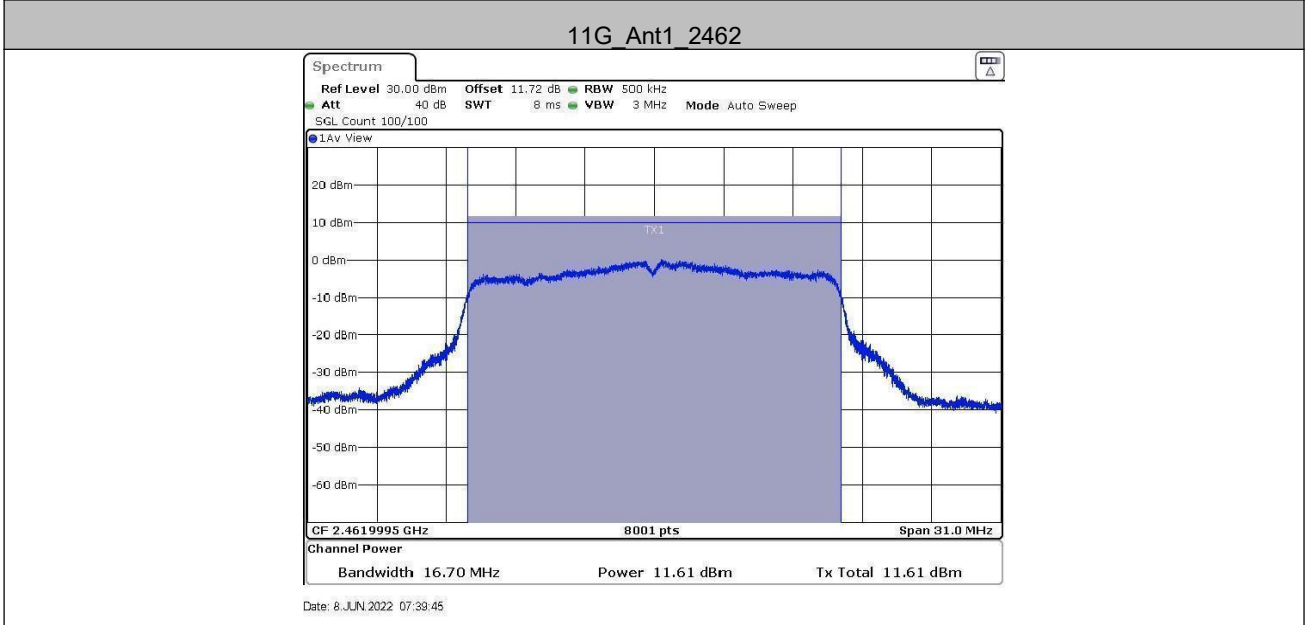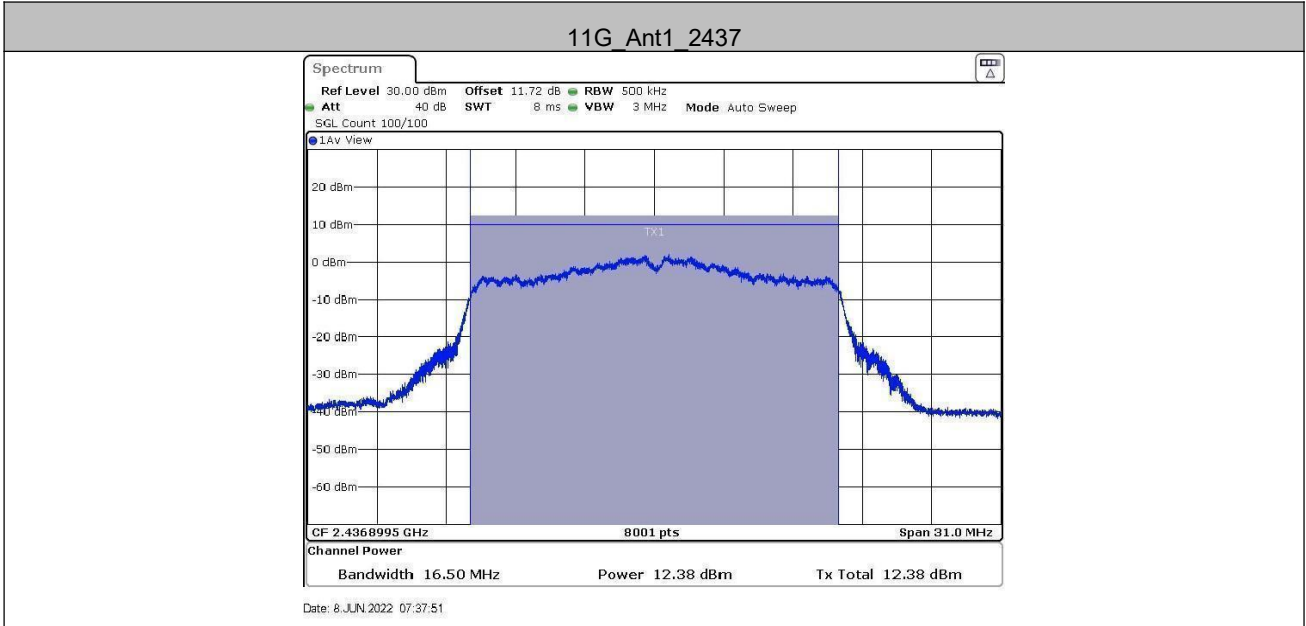


11N20SISO_Ant1_2412

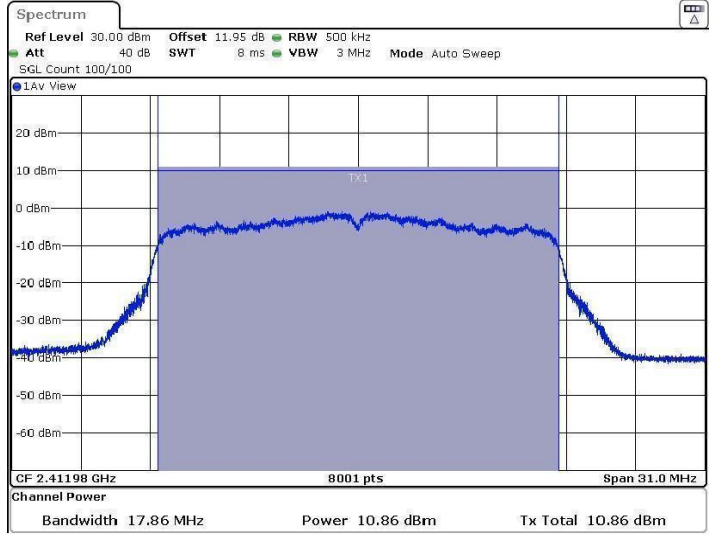


Date: 8 JUN 2022 07:43:15


11N20SISO_Ant1_2437

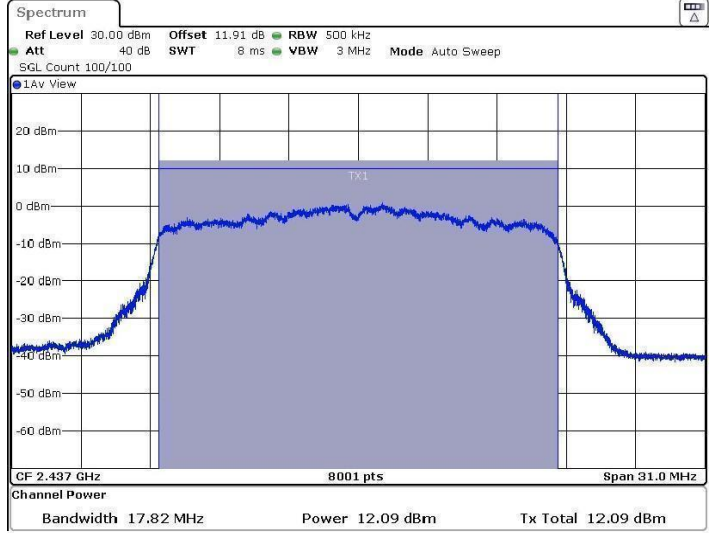

Date: 8 JUN 2022 07:45:54

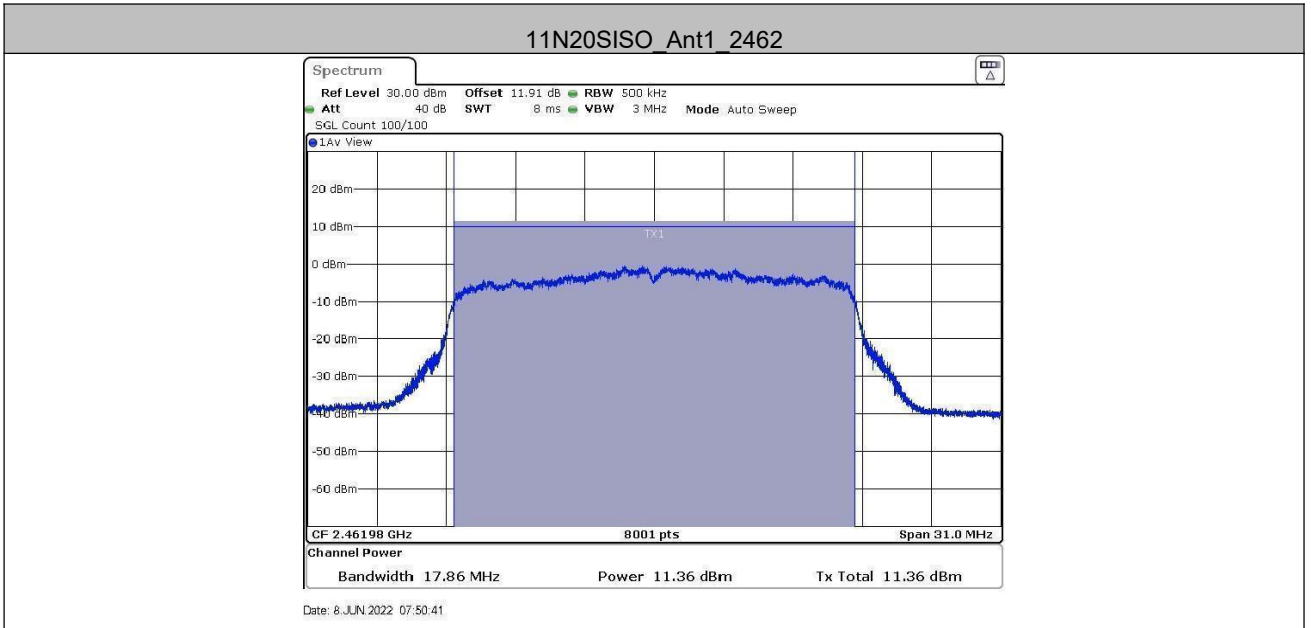


5.4 6dB Occupy Bandwidth

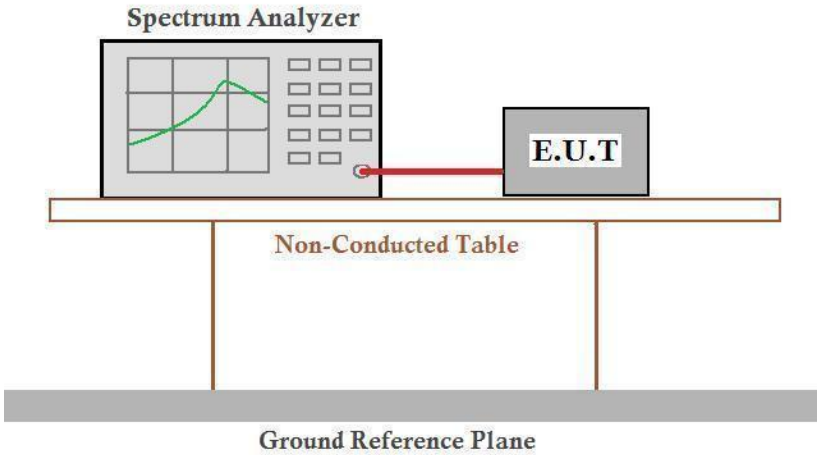
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Measurement Data


802.11b mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	8.520	11.429	≥500	Pass
Middle	8.000	11.349	≥500	Pass
Highest	8.400	11.389	≥500	Pass
802.11g mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	15.800	16.703	≥500	Pass
Middle	15.240	16.503	≥500	Pass
Highest	15.720	16.703	≥500	Pass
802.11n(HT20) mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	17.680	17.862	≥500	Pass
Middle	16.080	17.822	≥500	Pass
Highest	17.040	17.862	≥500	Pass
Remark:				
1. 99% OBW was for reference only				


Test plot as follows:

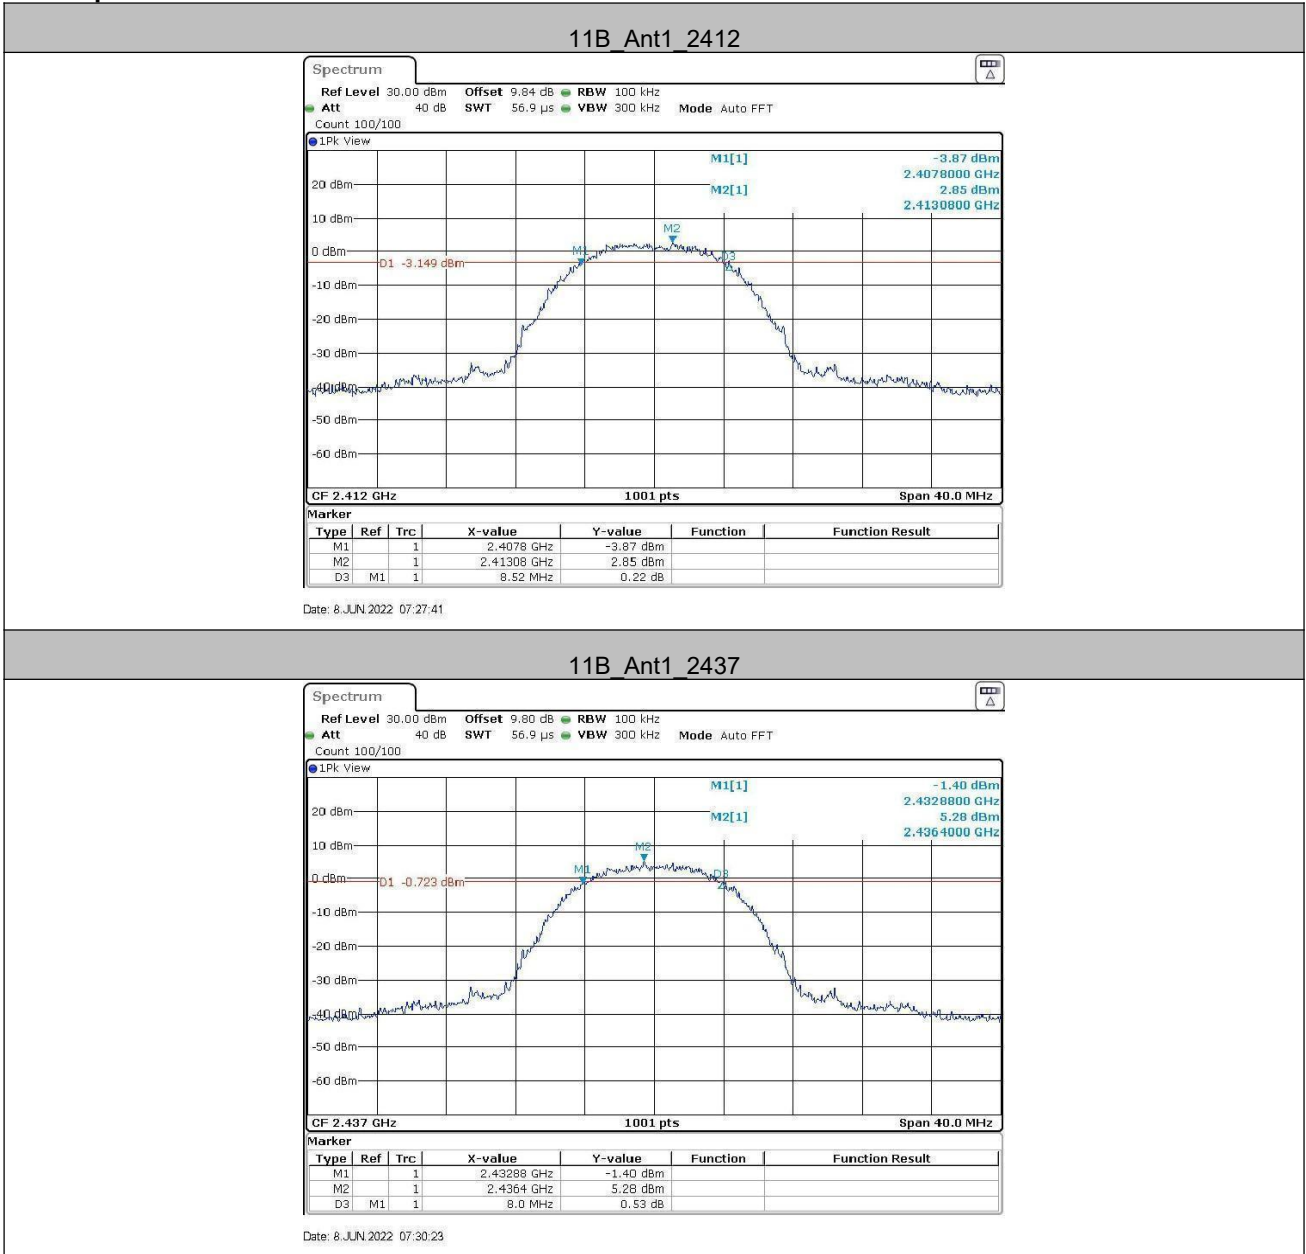

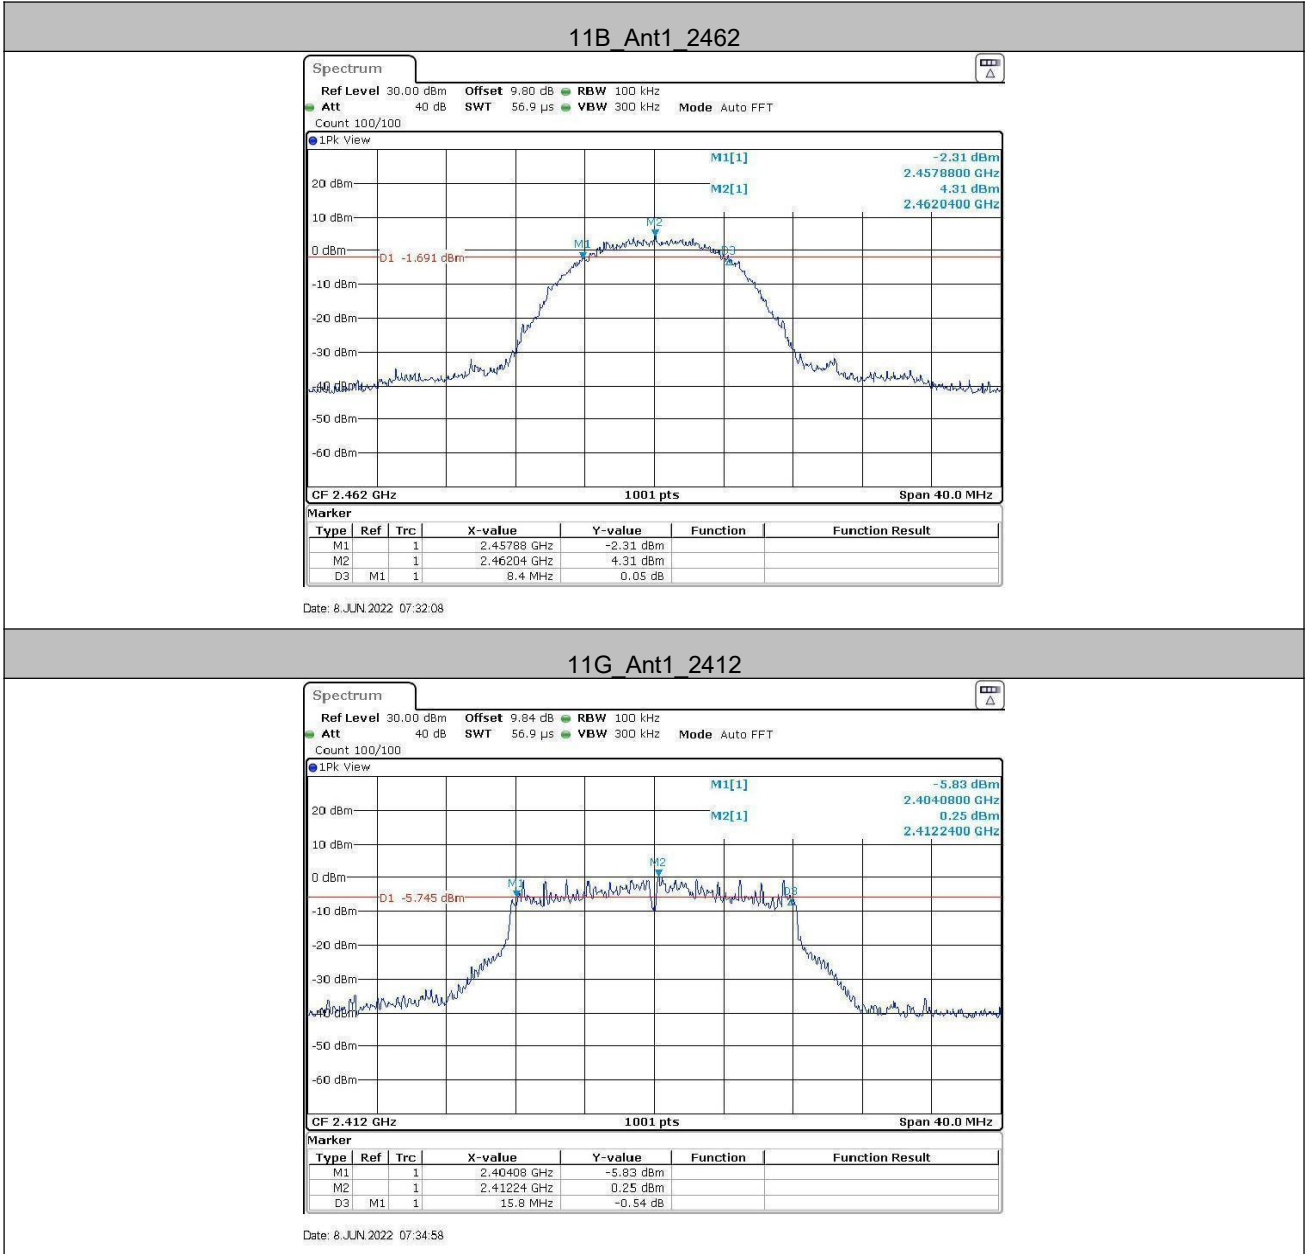




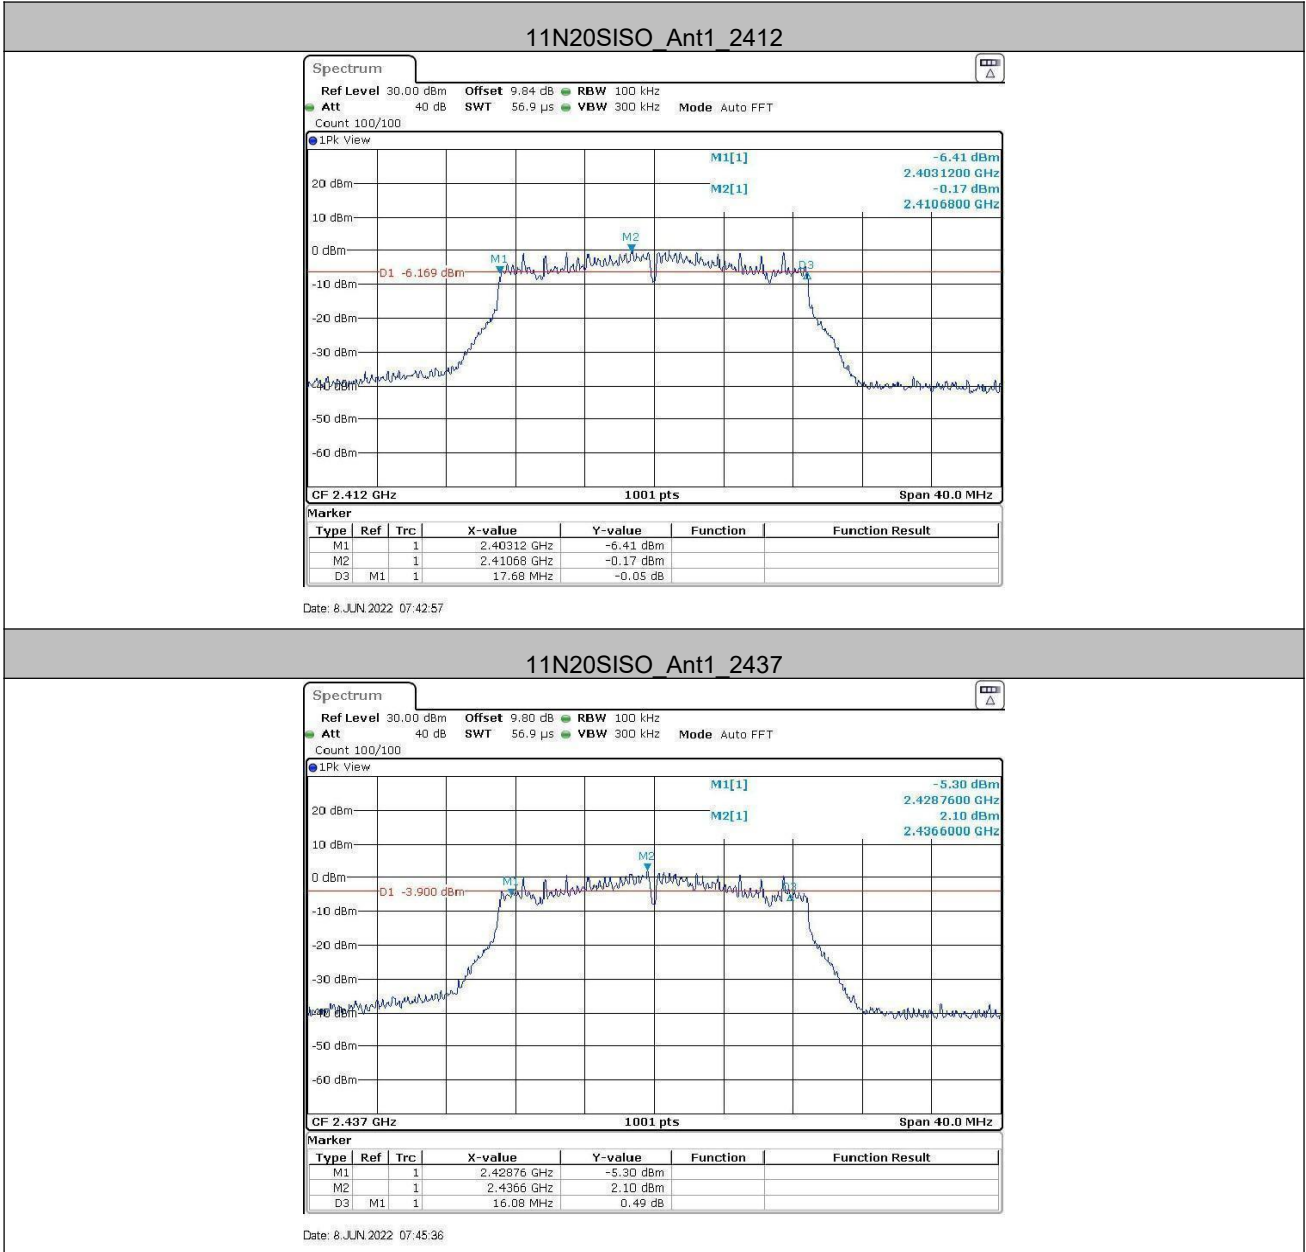

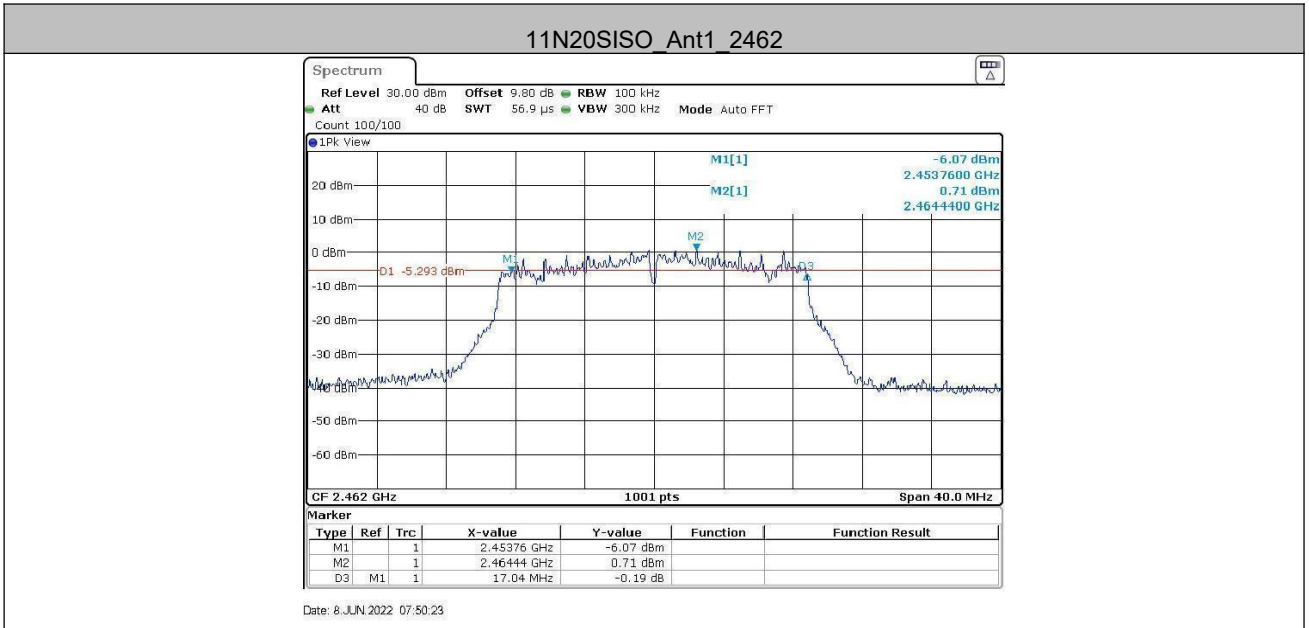


11B_Ant1_2412

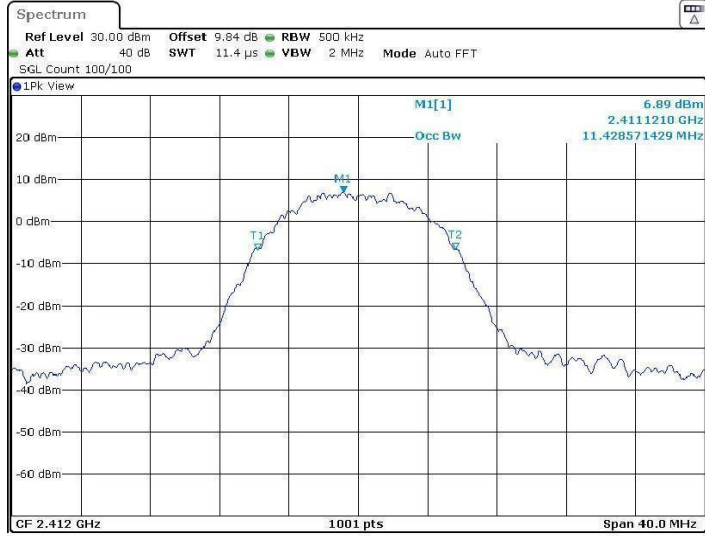


Date: 8 JUN 2022 07:27:53


11B_Ant1_2437

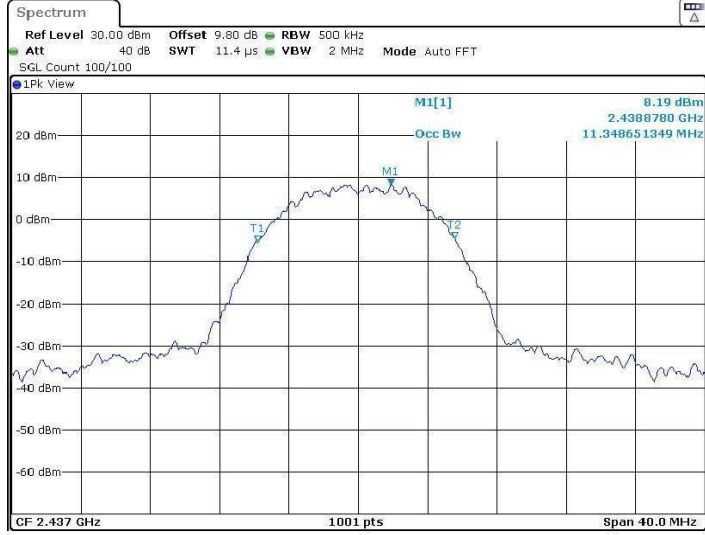

Date: 8 JUN 2022 07:30:34




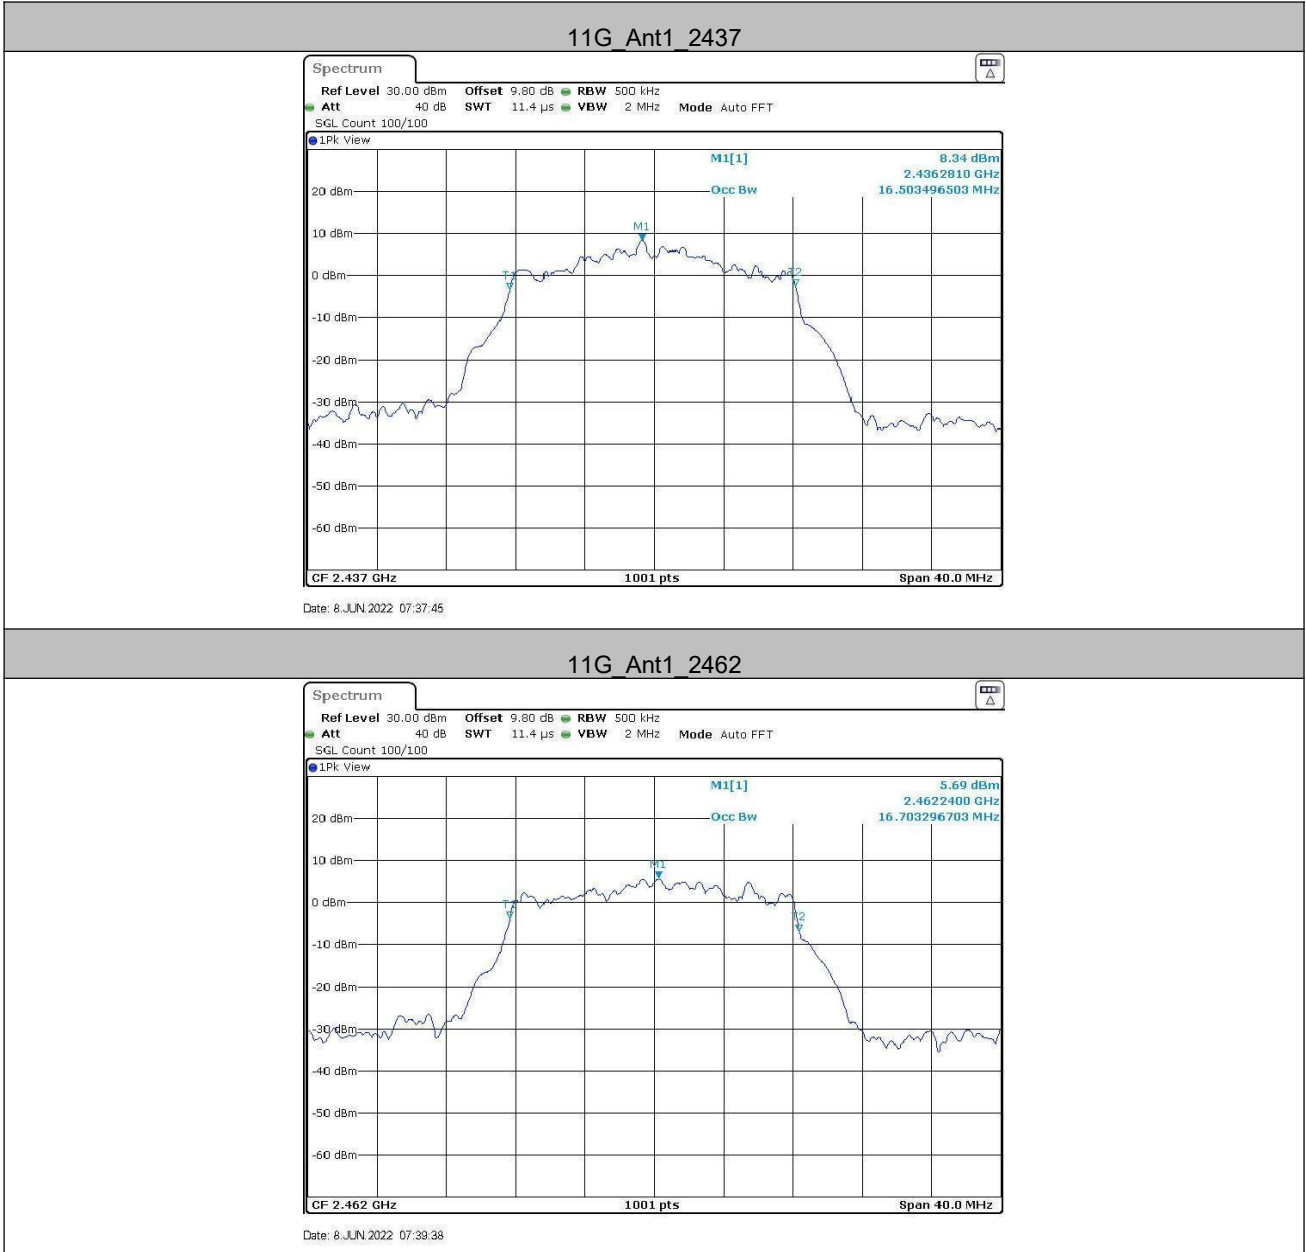

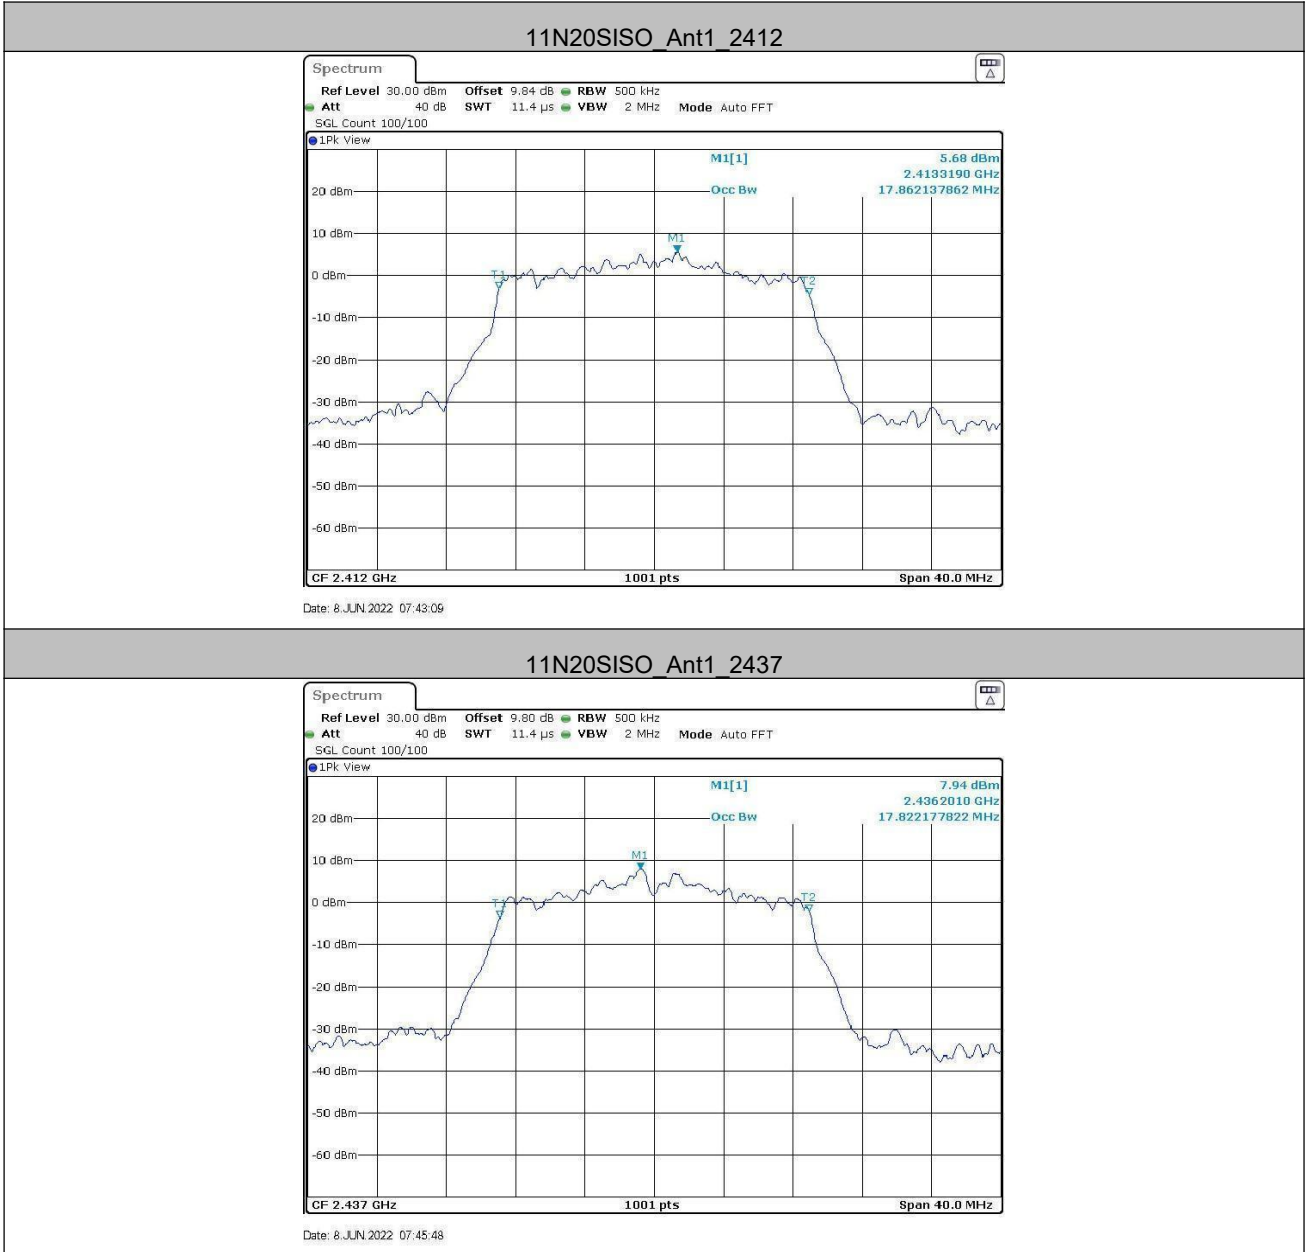




5.5 Power Spectral Density

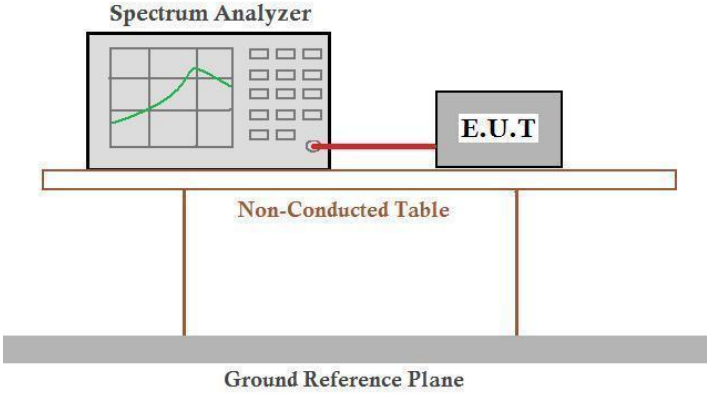
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass


Measurement Data

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.43	≤8	PASS
		2437	-13.17	≤8	PASS
		2462	-14.46	≤8	PASS
11G	Ant1	2412	-11.71	≤8	PASS
		2437	-9.25	≤8	PASS
		2462	-11.44	≤8	PASS
11N20SISO	Ant1	2412	-13.82	≤8	PASS
		2437	-12.46	≤8	PASS
		2462	-13.13	≤8	PASS


Test plot as follows:

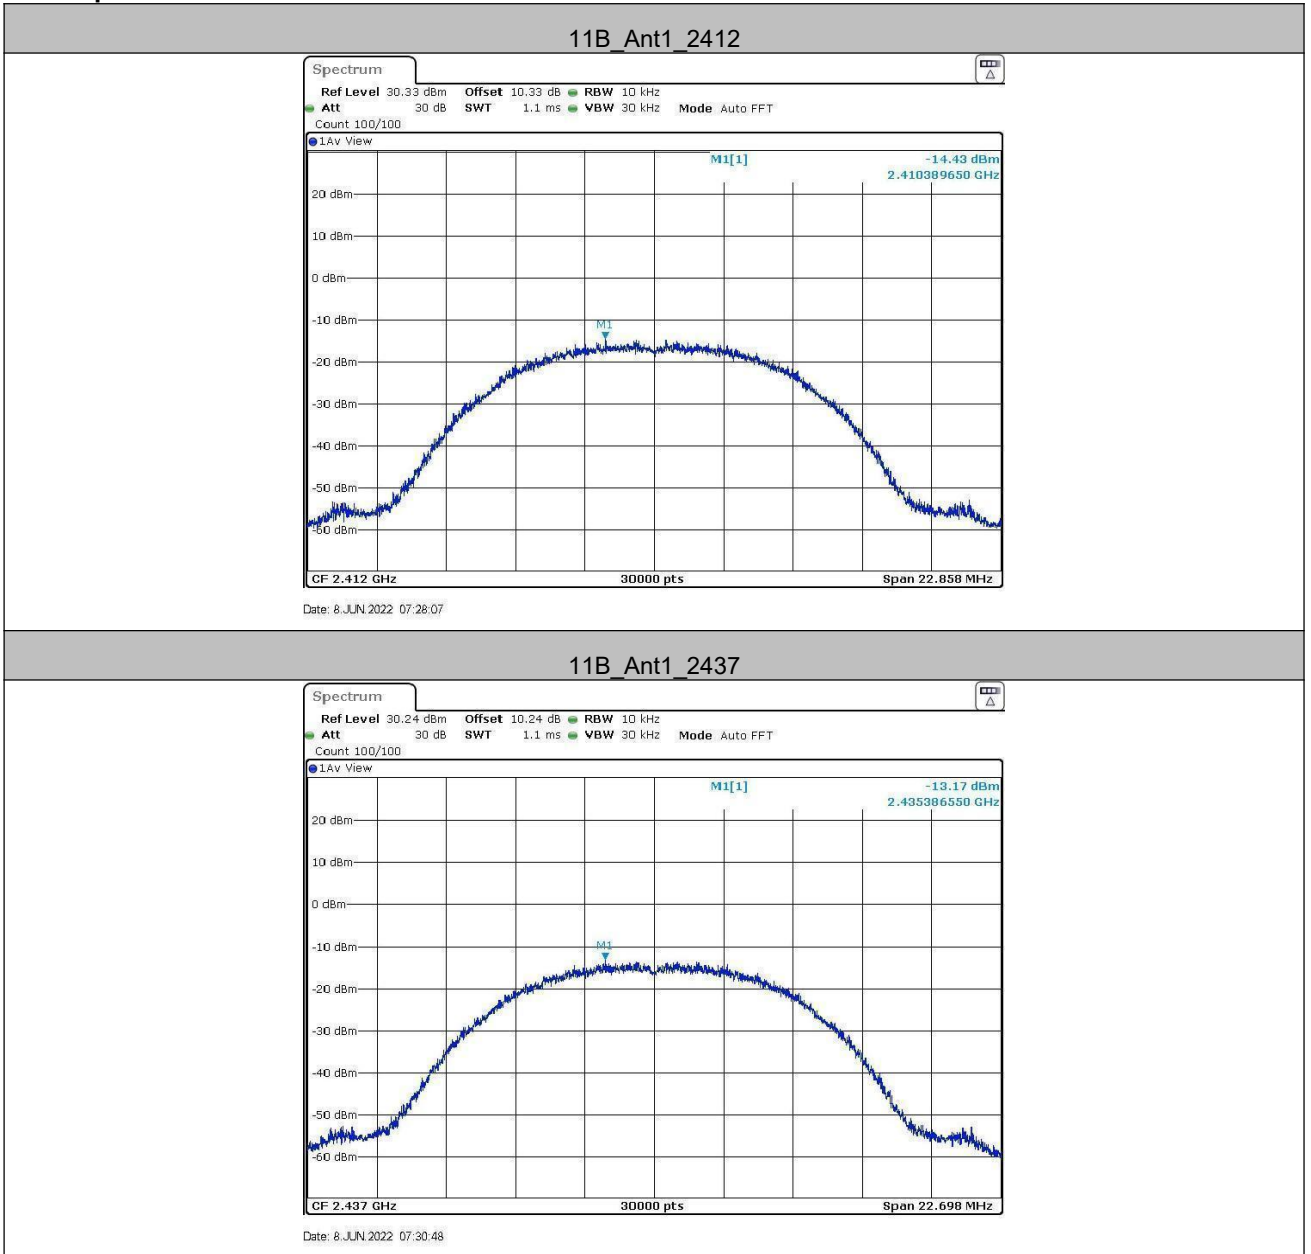

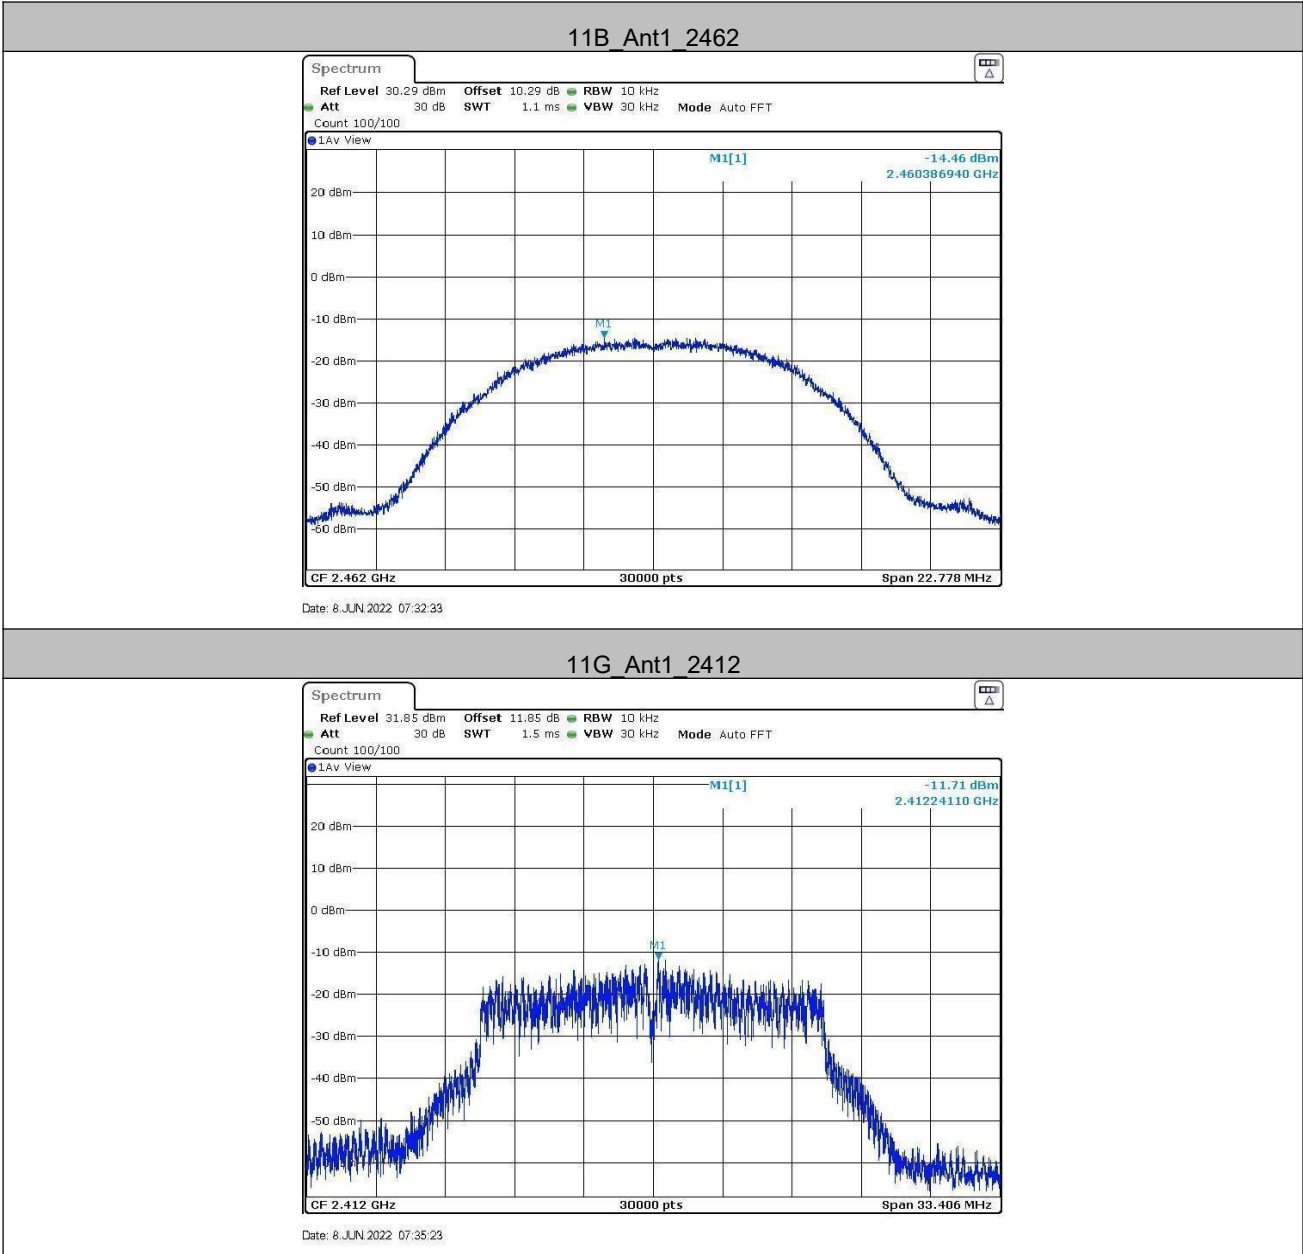

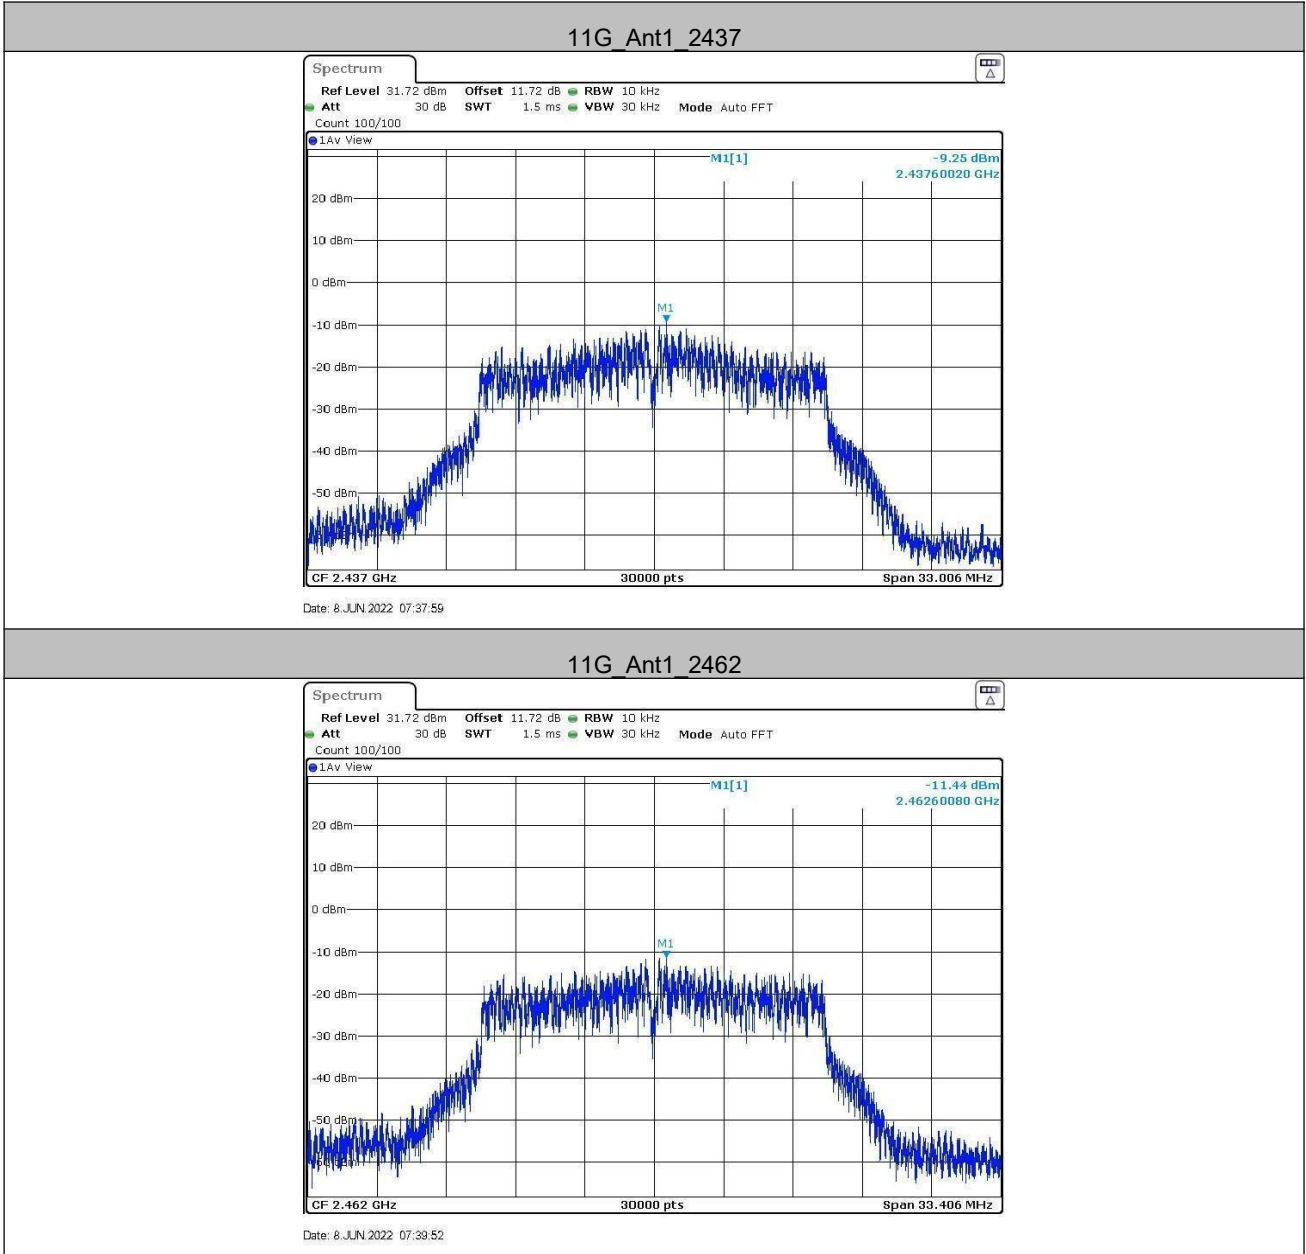


11N20SISO_Ant1_2412

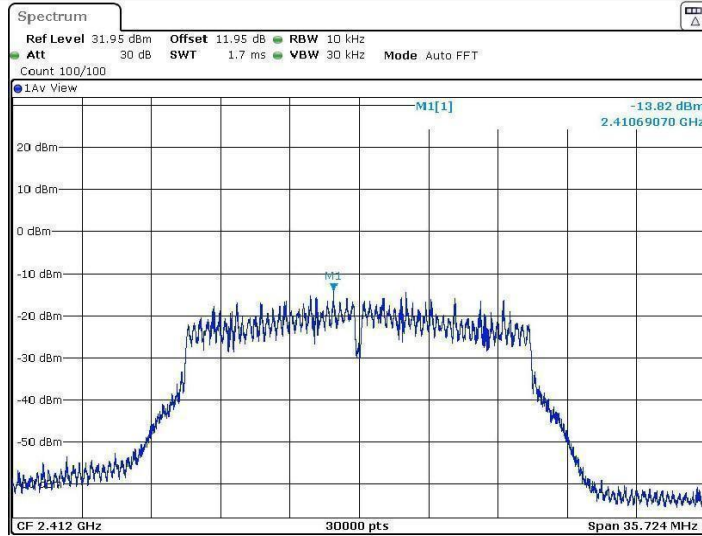


Date: 8 JUN 2022 07:43:23


11N20SISO_Ant1_2437

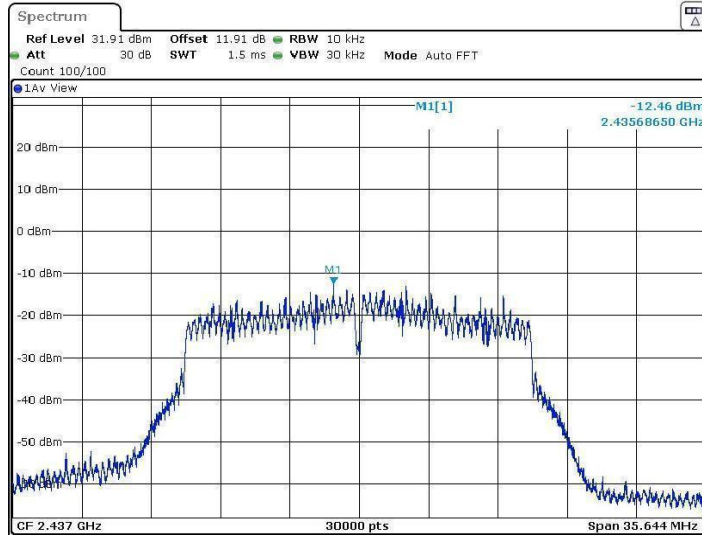

Date: 8 JUN 2022 07:48:01

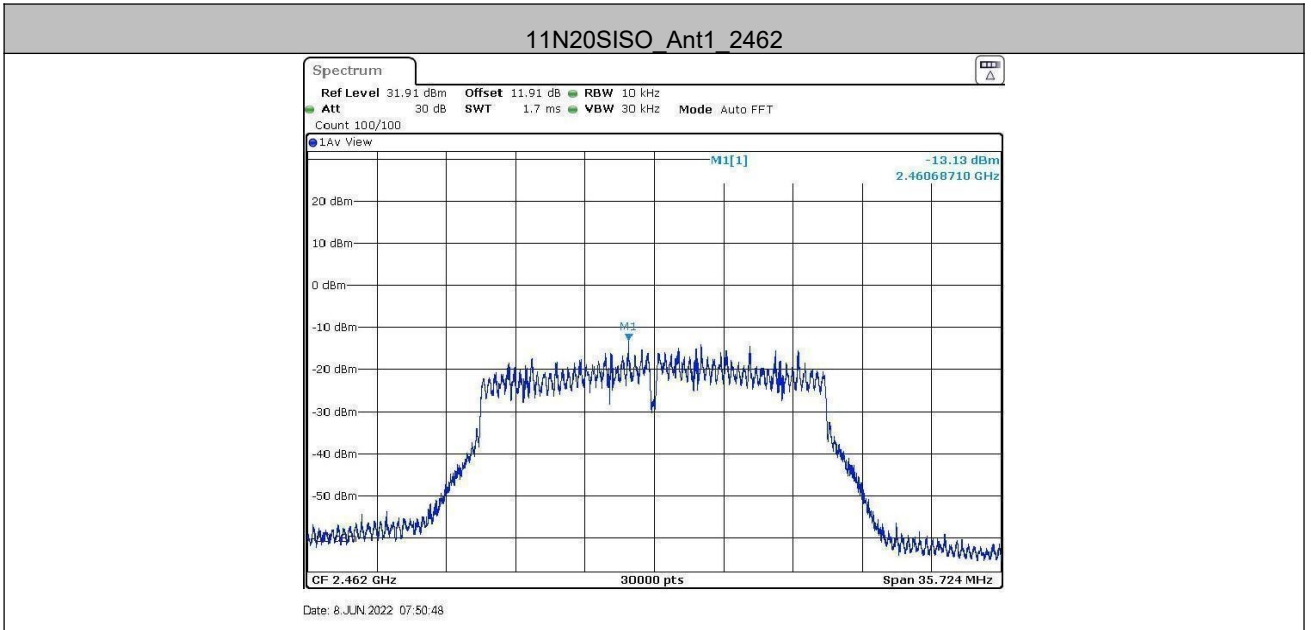


5.6 Band-edge for RF Conducted Emissions

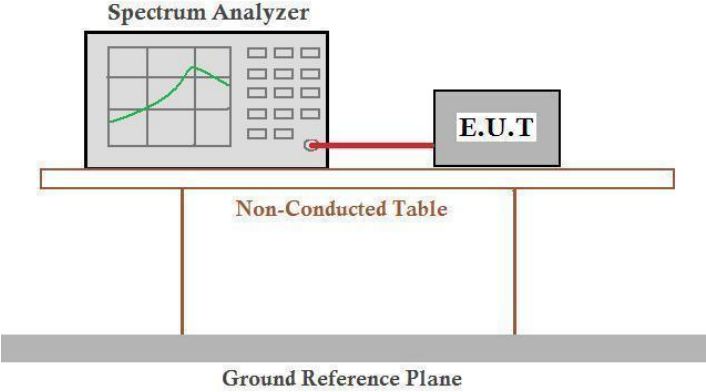
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Data:

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.18	-38.32	≤-25.82	PASS
		High	2462	3.76	-47.21	≤-26.24	PASS
11G	Ant1	Low	2412	0.25	-33.84	≤-29.75	PASS
		High	2462	1.02	-41.56	≤-28.98	PASS
11N20SISO	Ant1	Low	2412	-0.15	-35.7	≤-30.15	PASS
		High	2462	0.65	-45.22	≤-29.35	PASS

Test plot as follows:

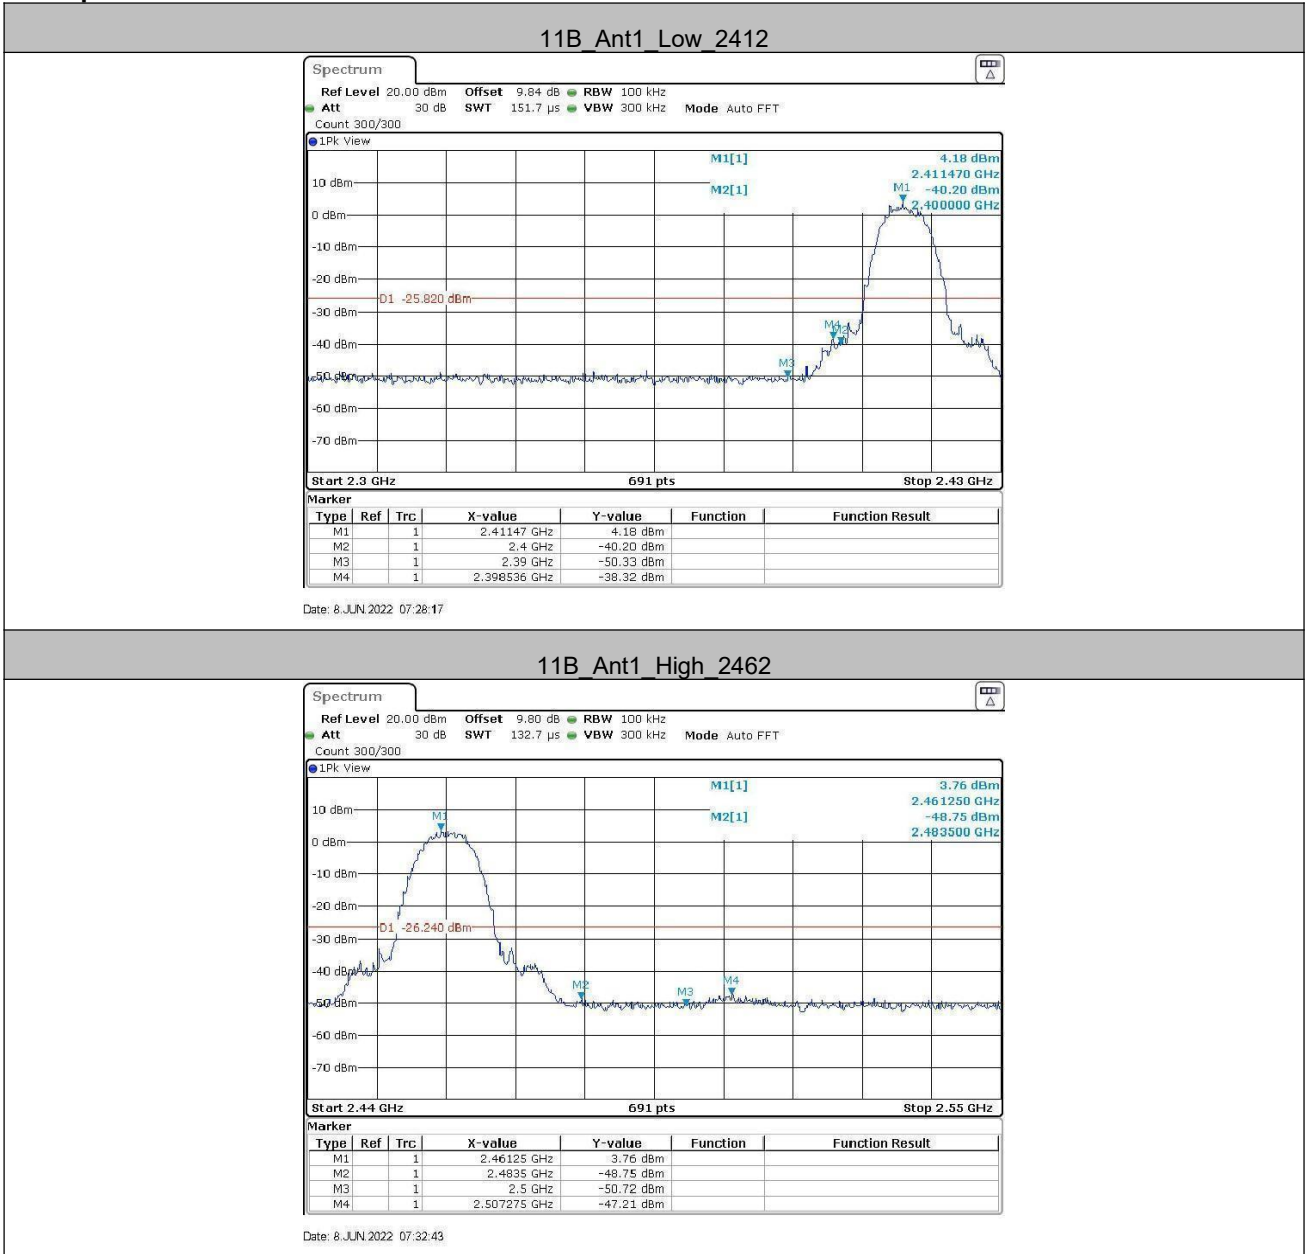


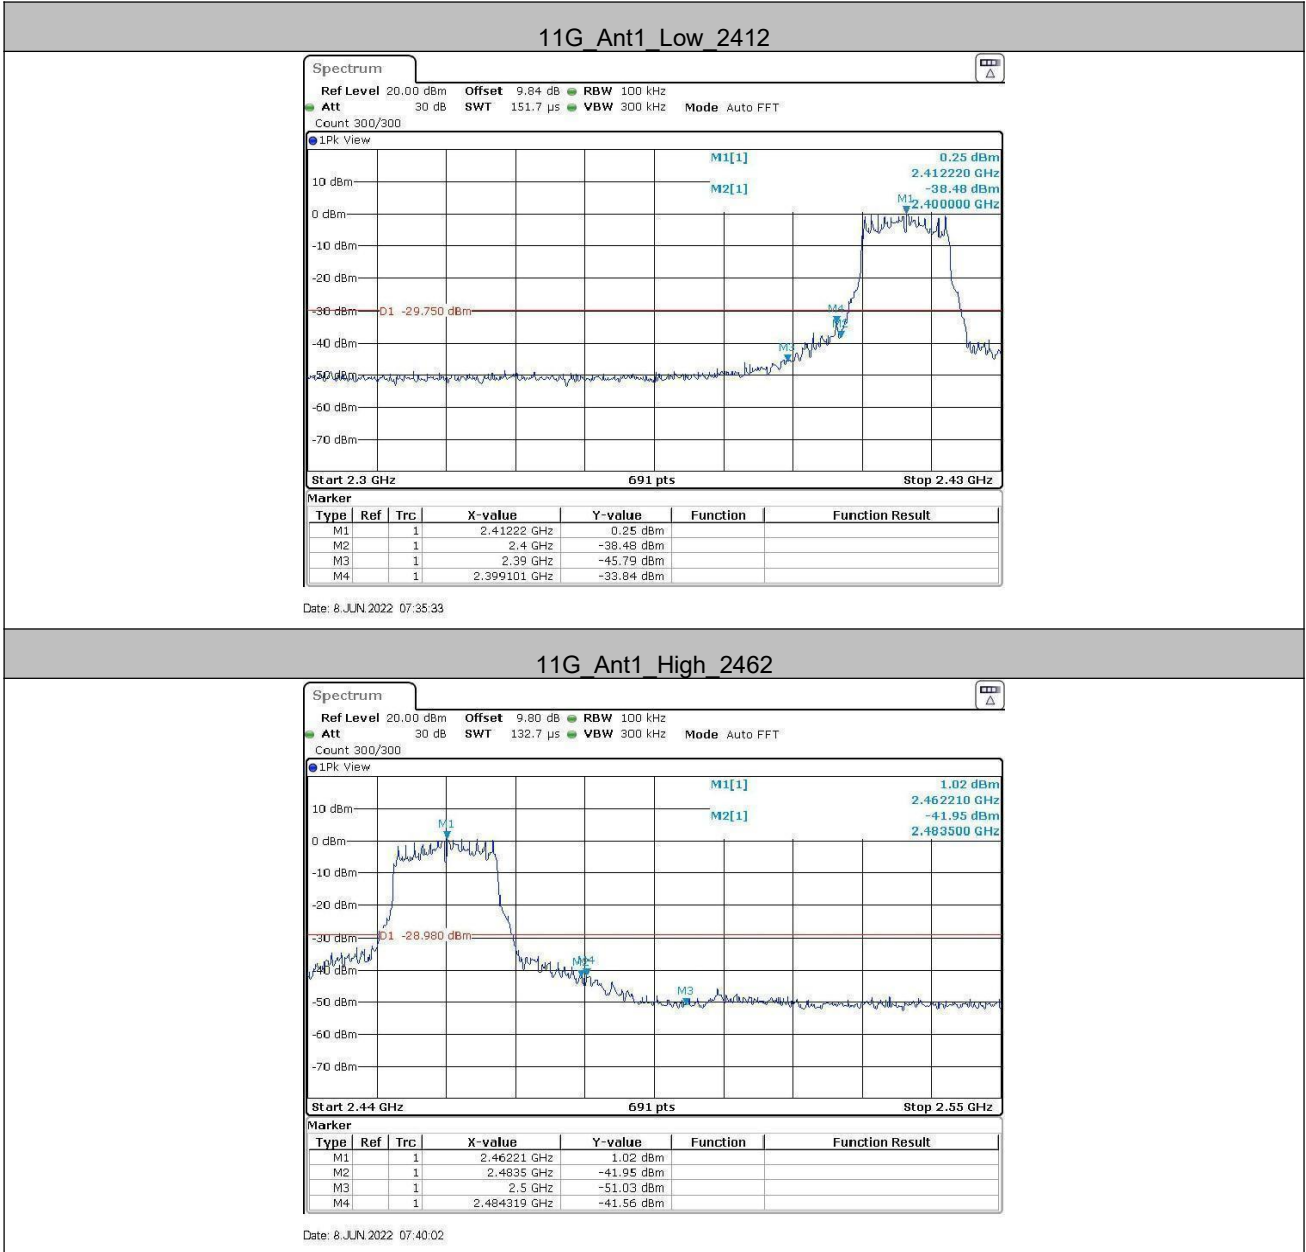


11N20SISO_Ant1_Low_2412




11N20SISO_Ant1_High_2462

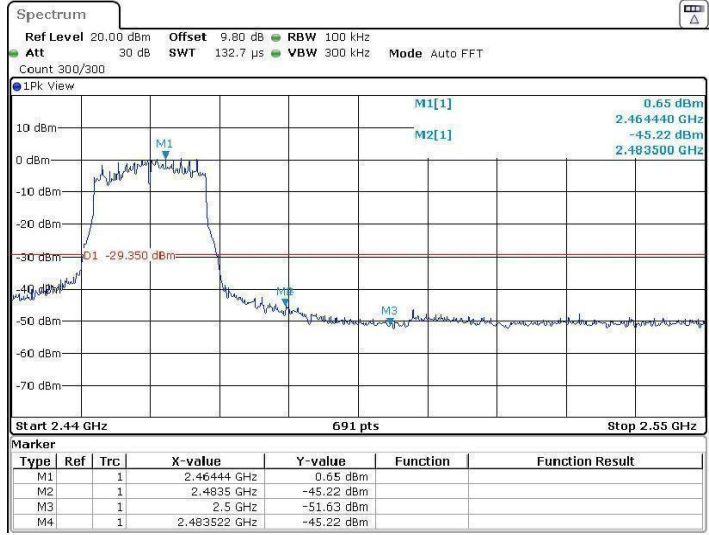


5.7 RF Conducted Spurious Emissions

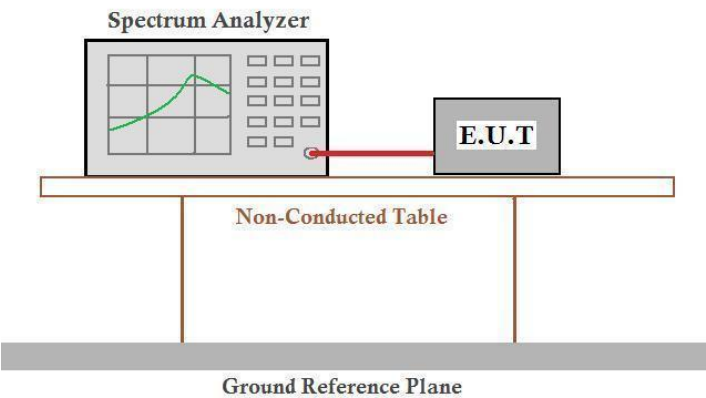Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>The diagram illustrates the test setup for RF conducted spurious emissions. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test plot as follows:

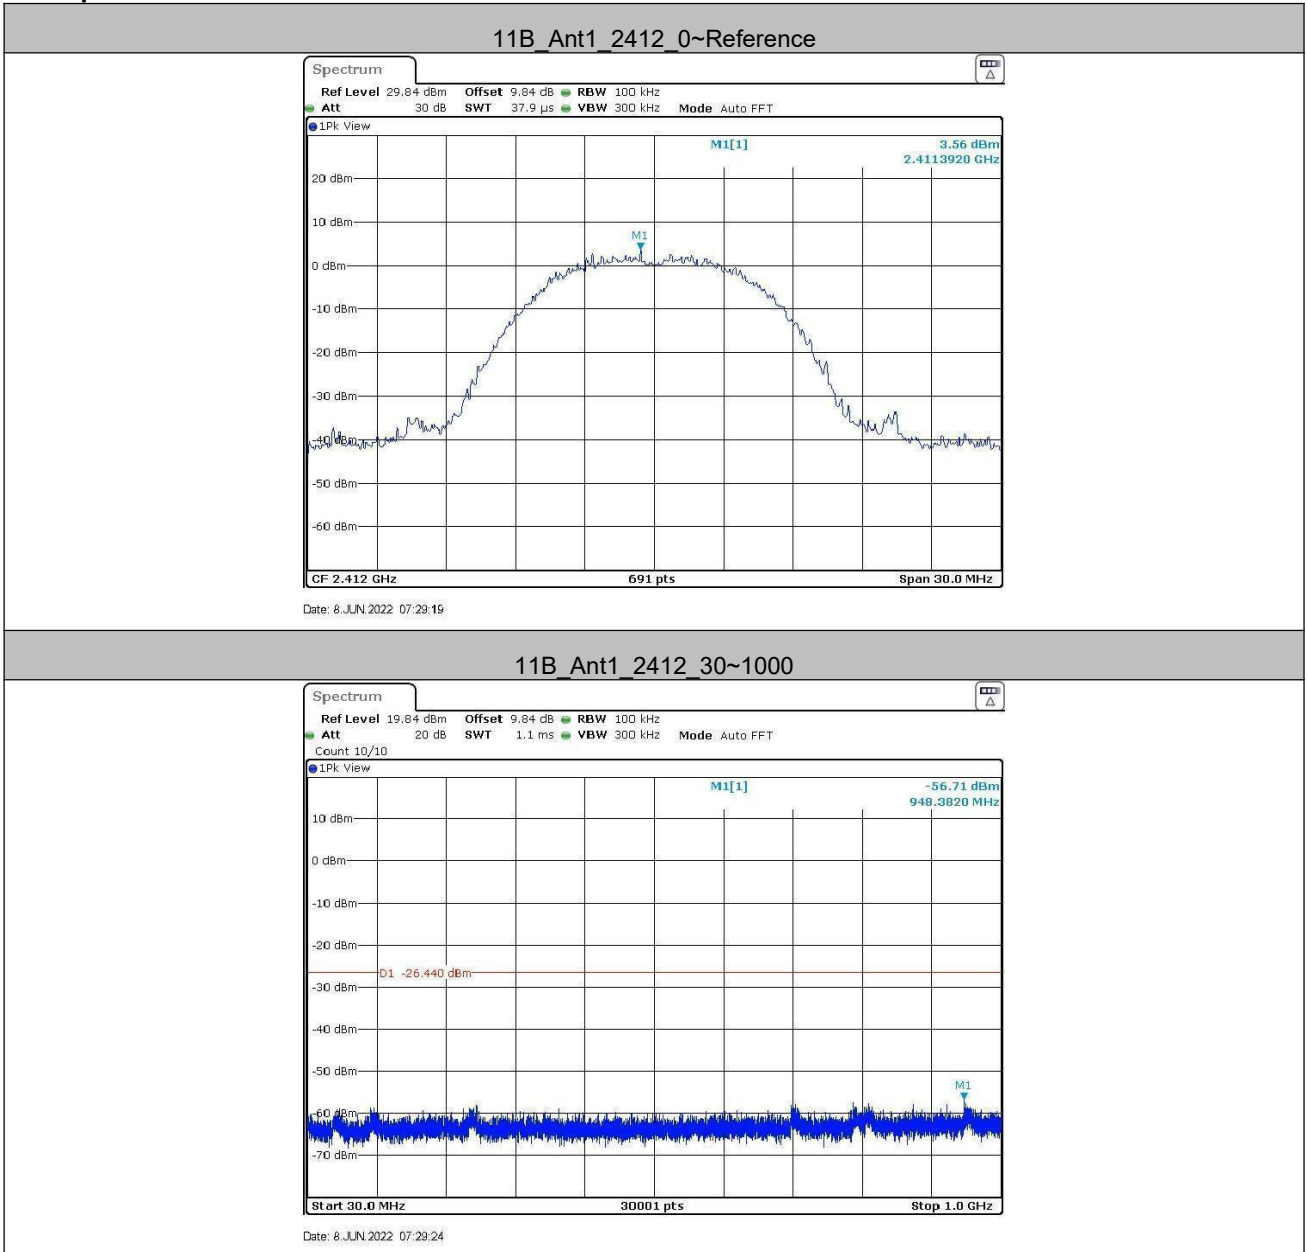


11B_Ant1_2412_1000~26500

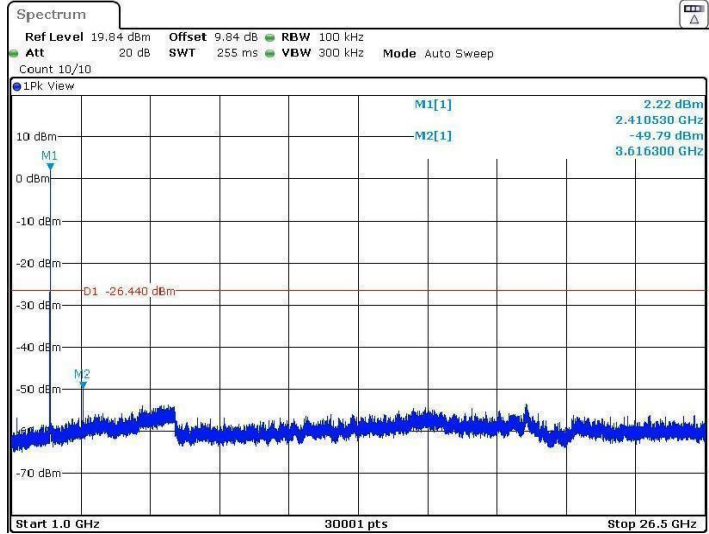



Date: 8 JUN 2022 07:29:46


11B_Ant1_2437_0~Reference


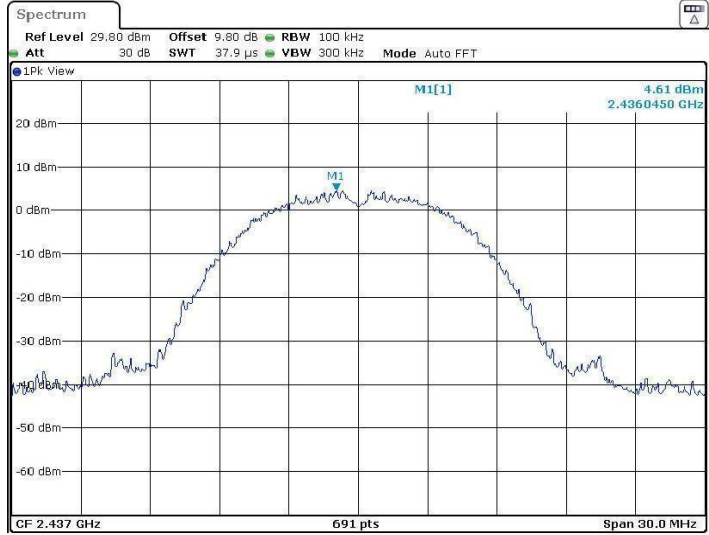




Date: 8 JUN 2022 07:30:55

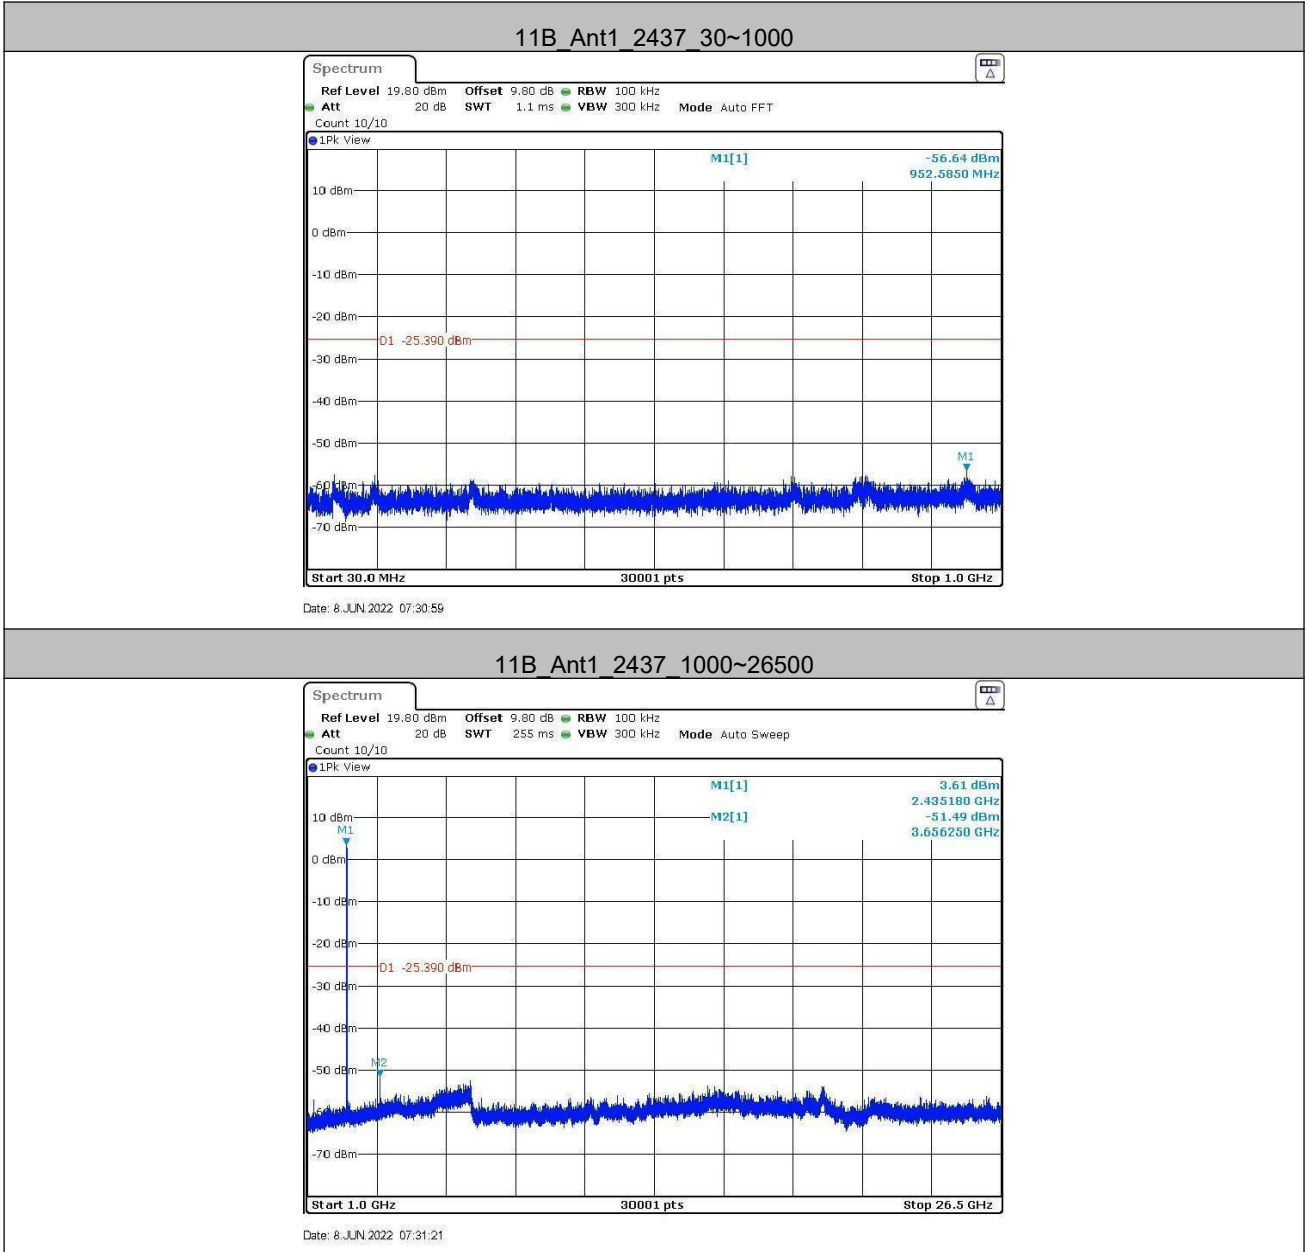



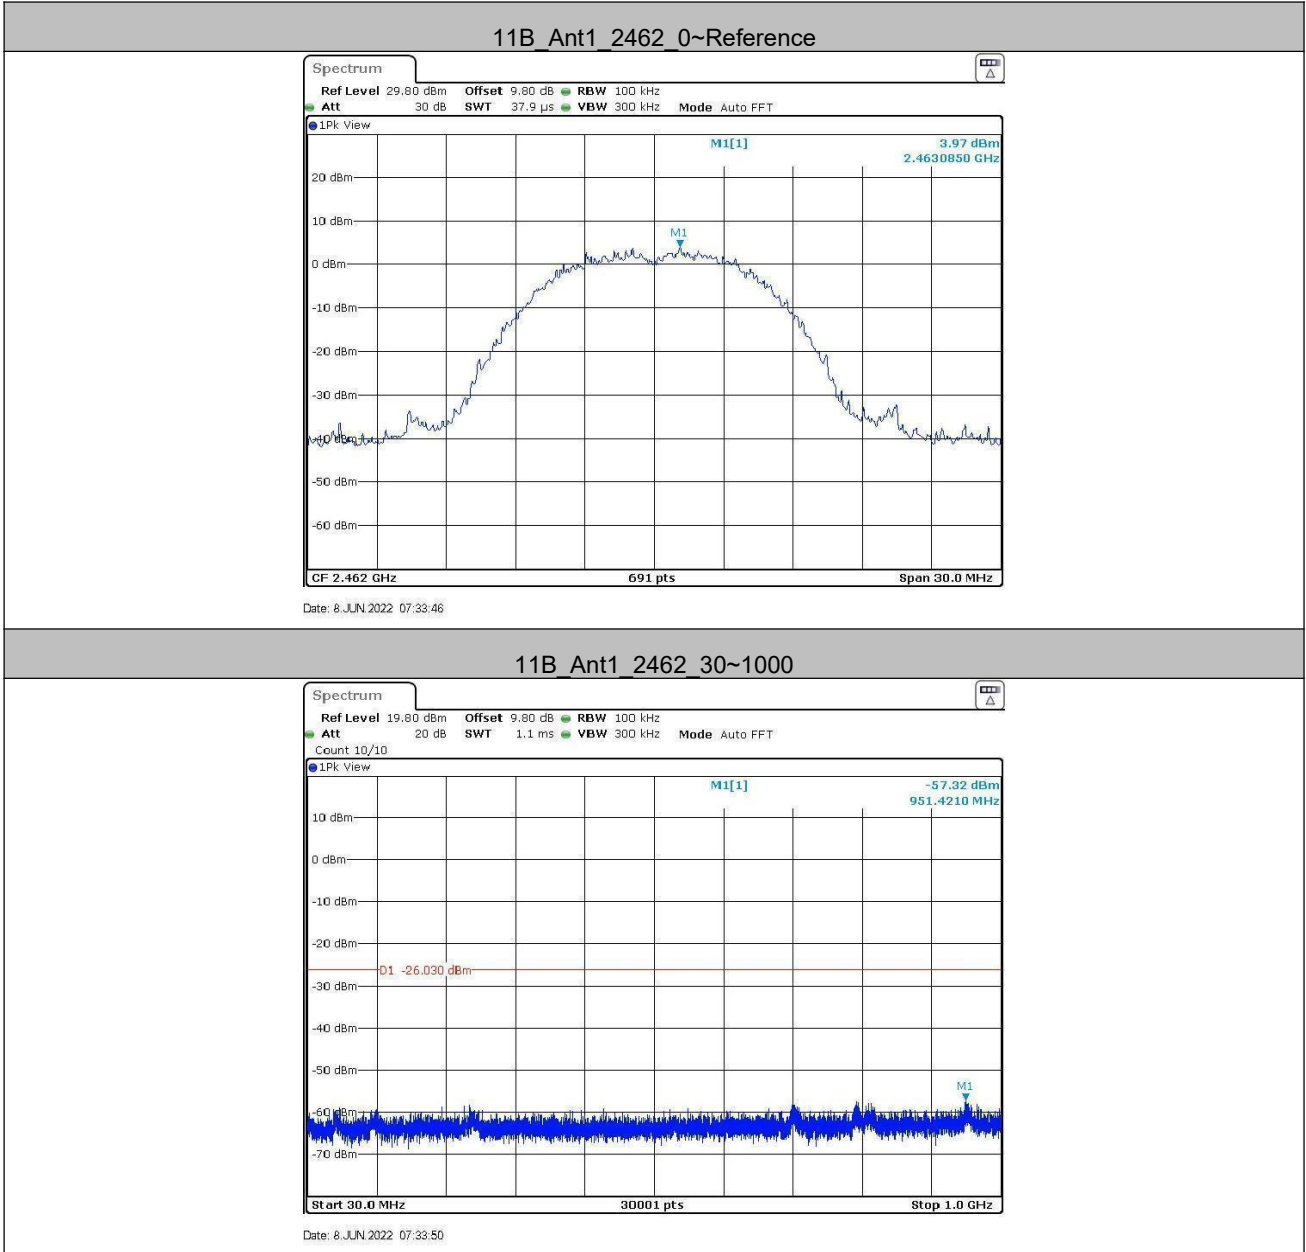



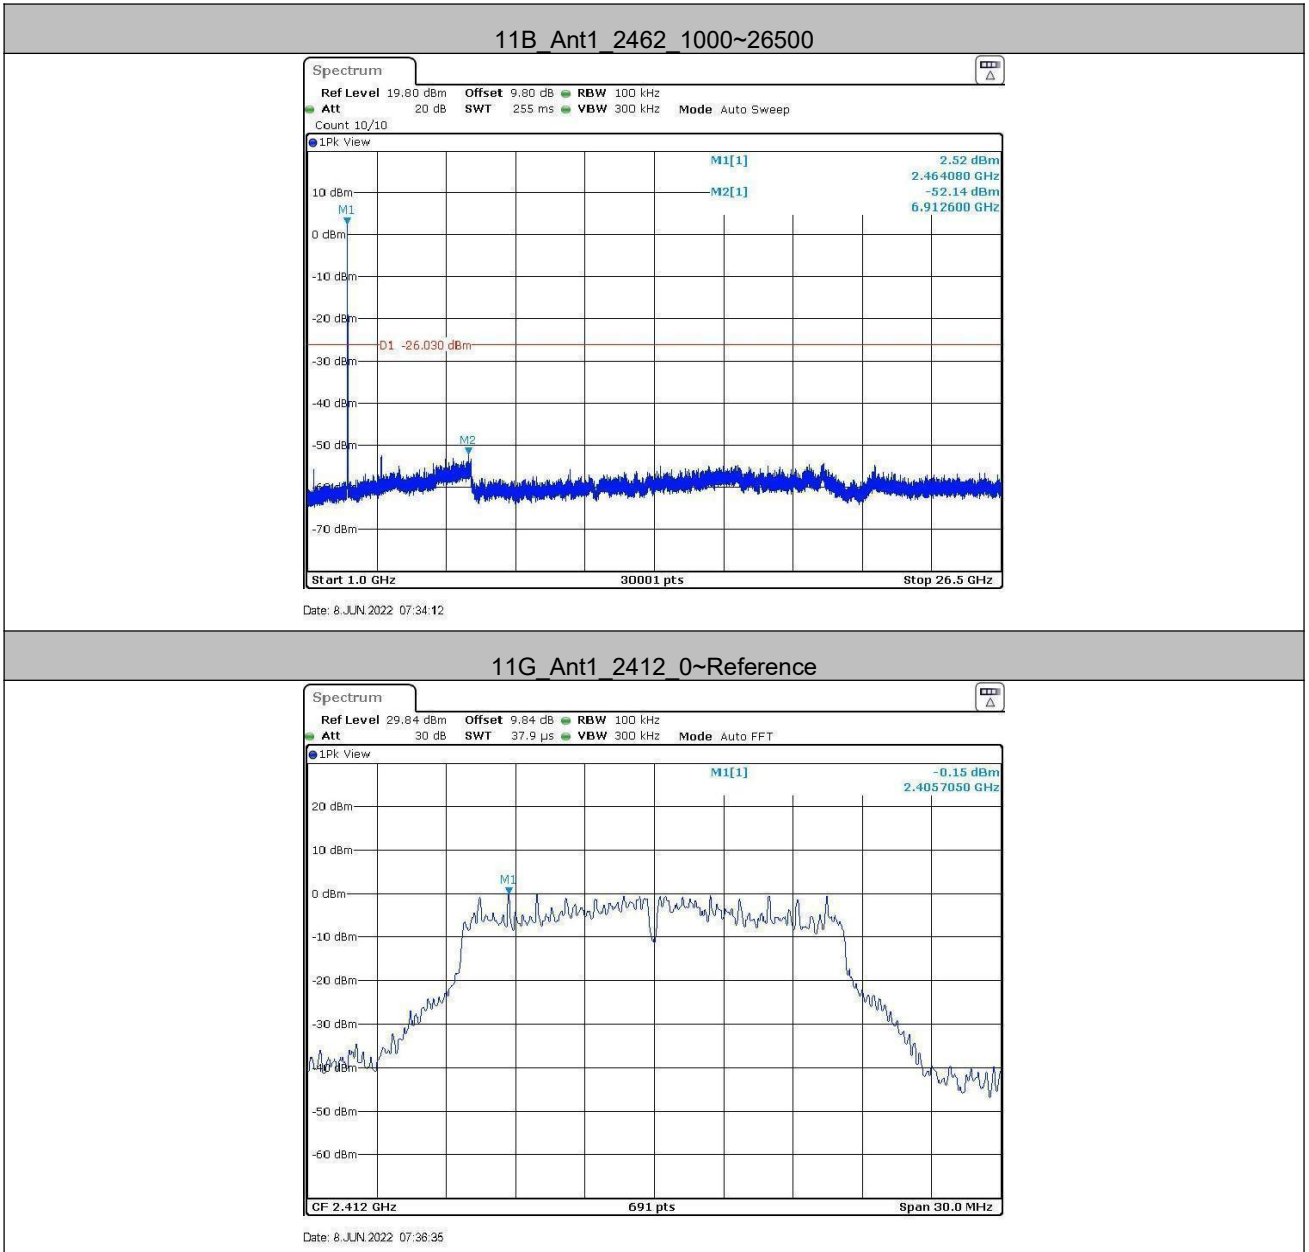


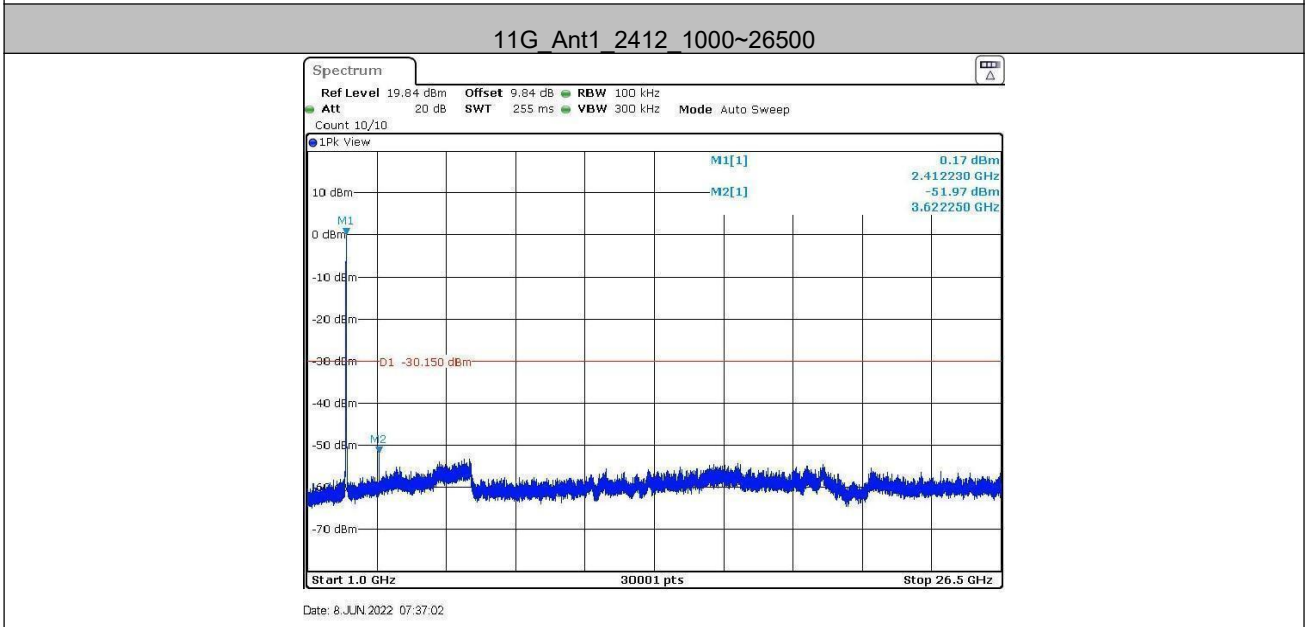
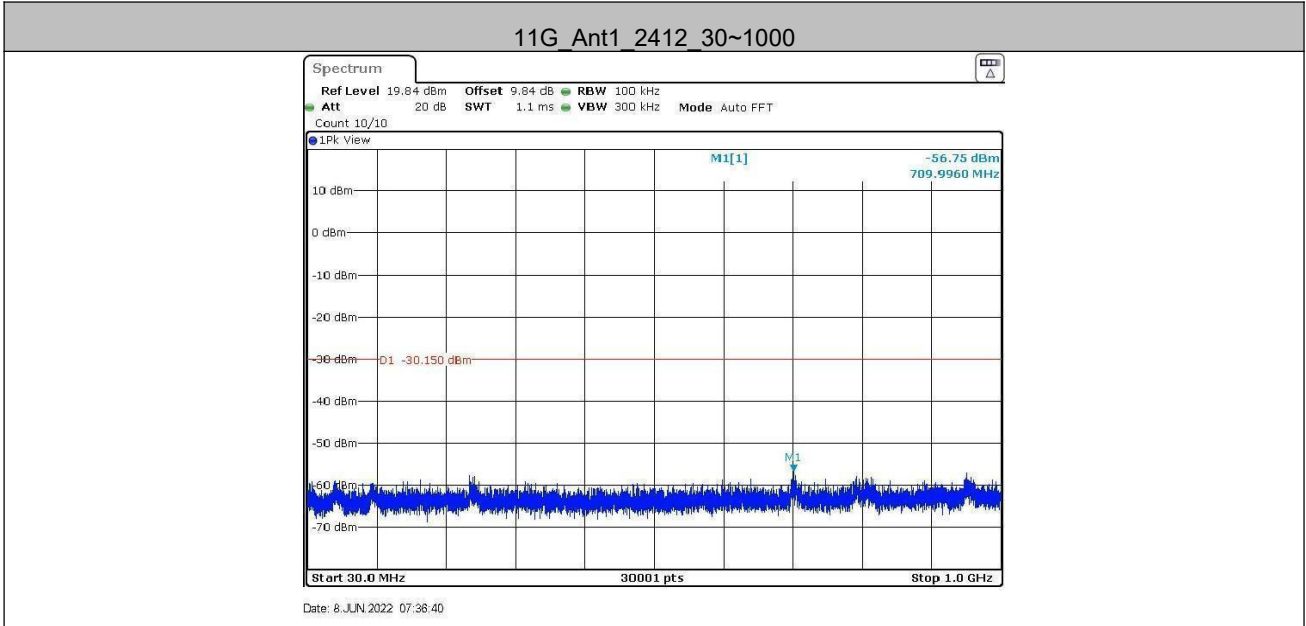


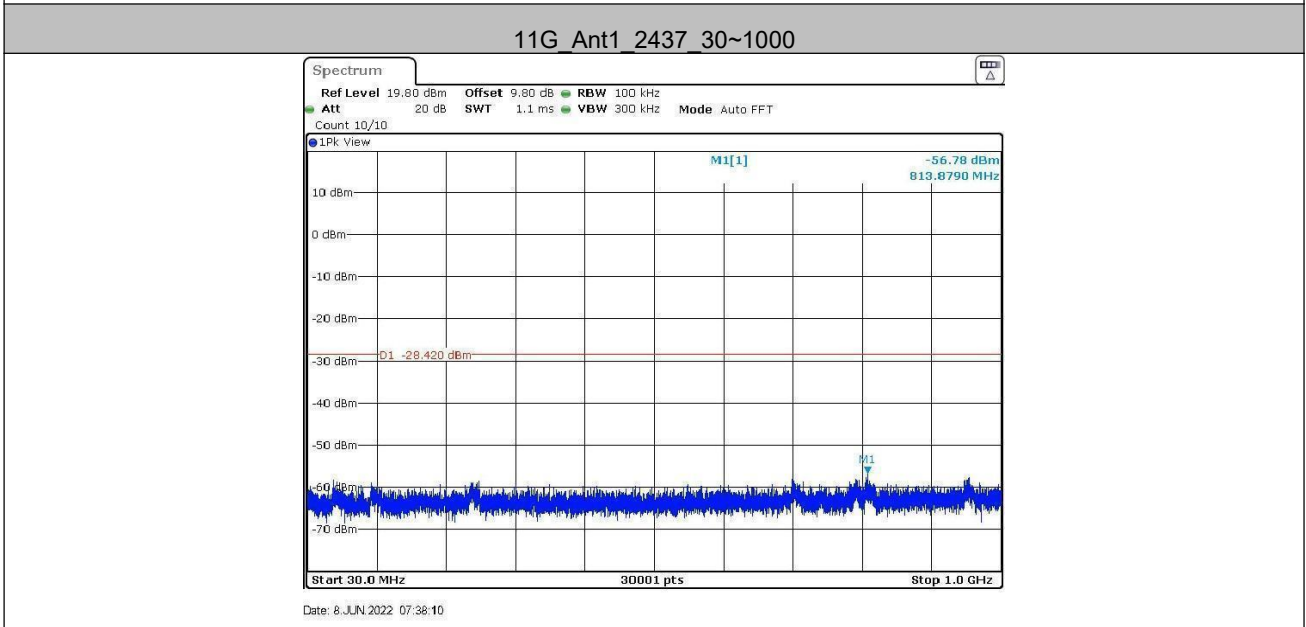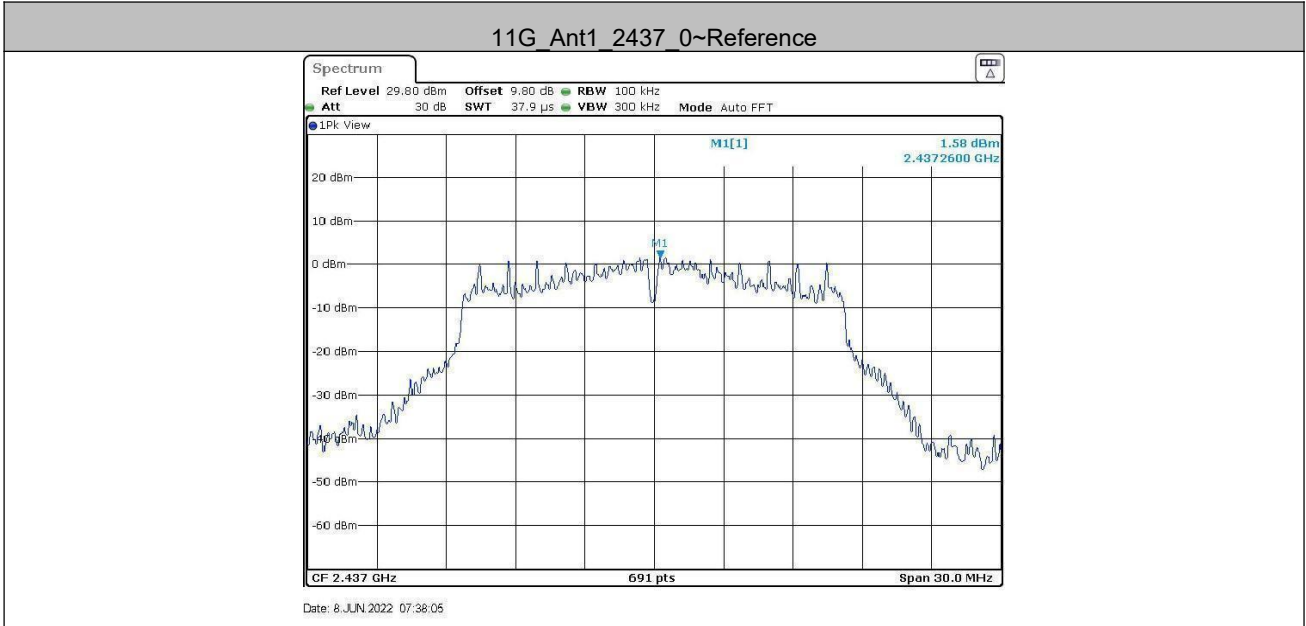

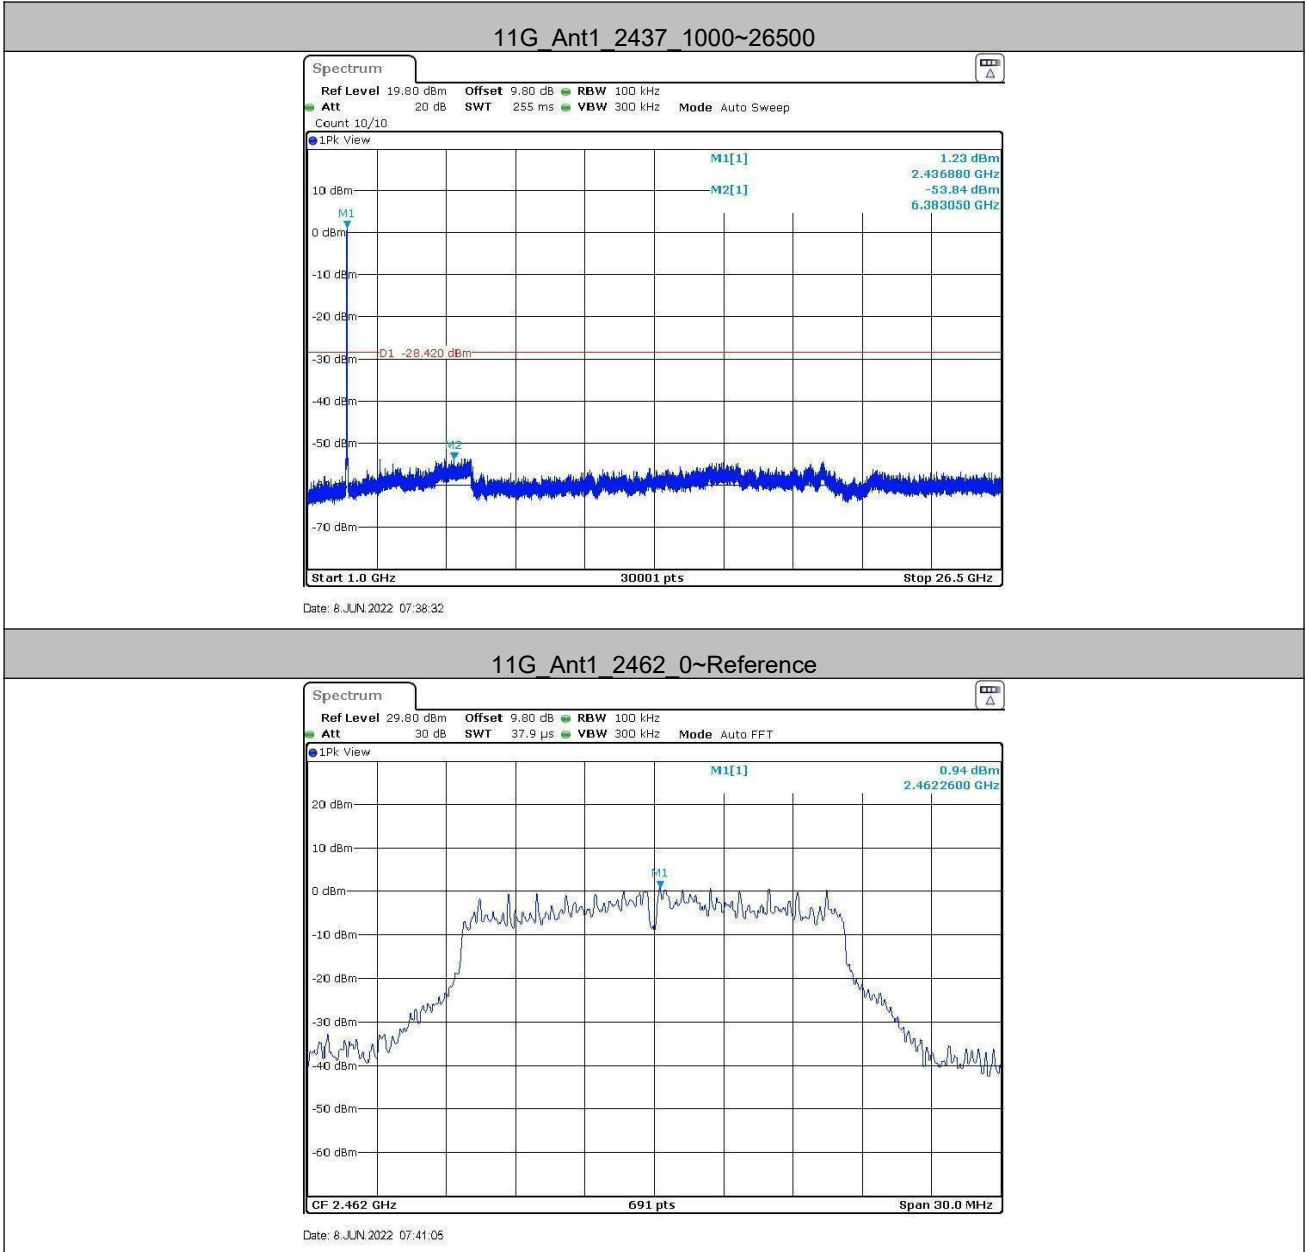


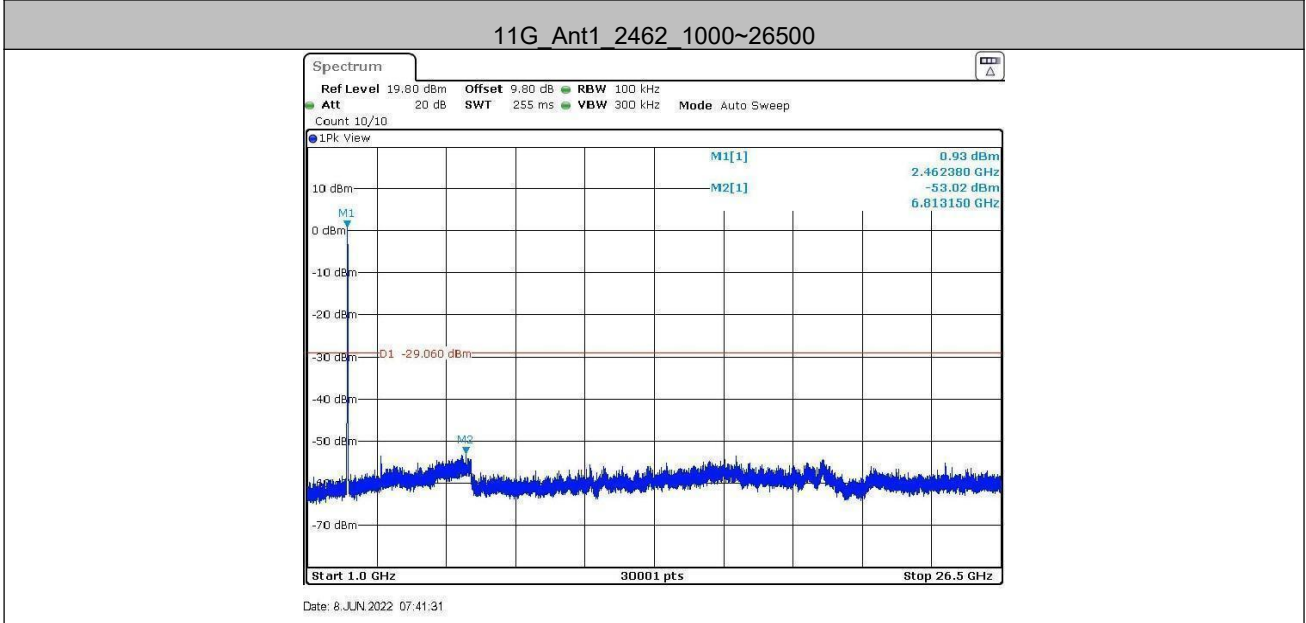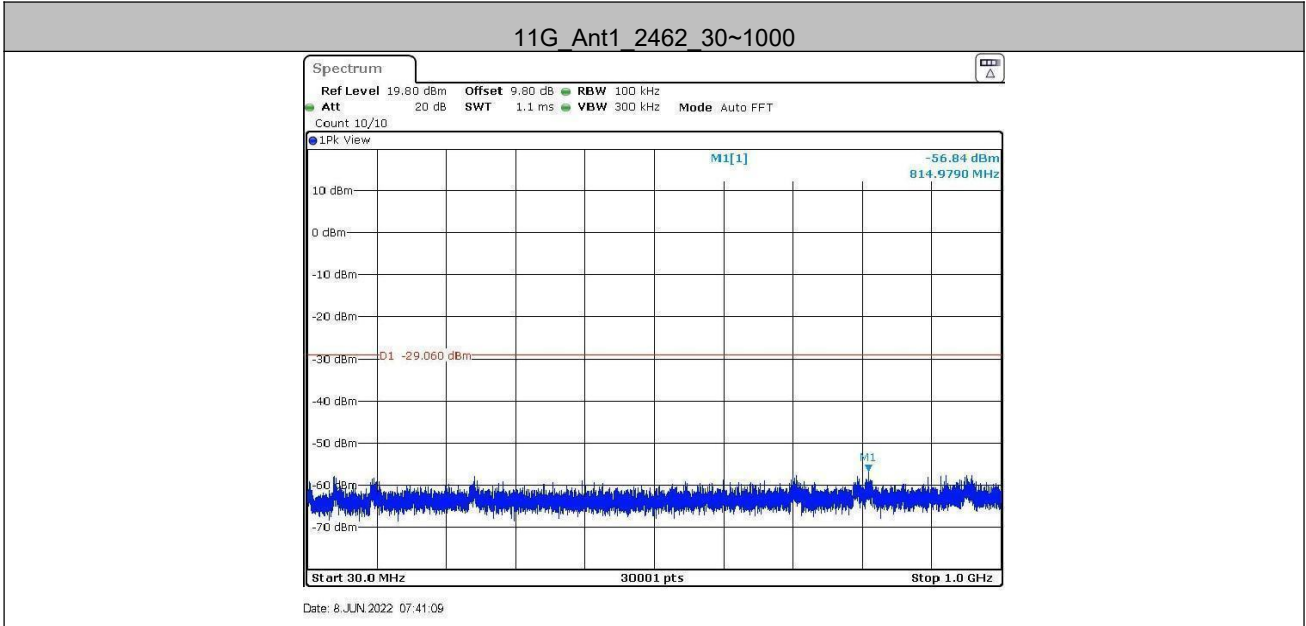

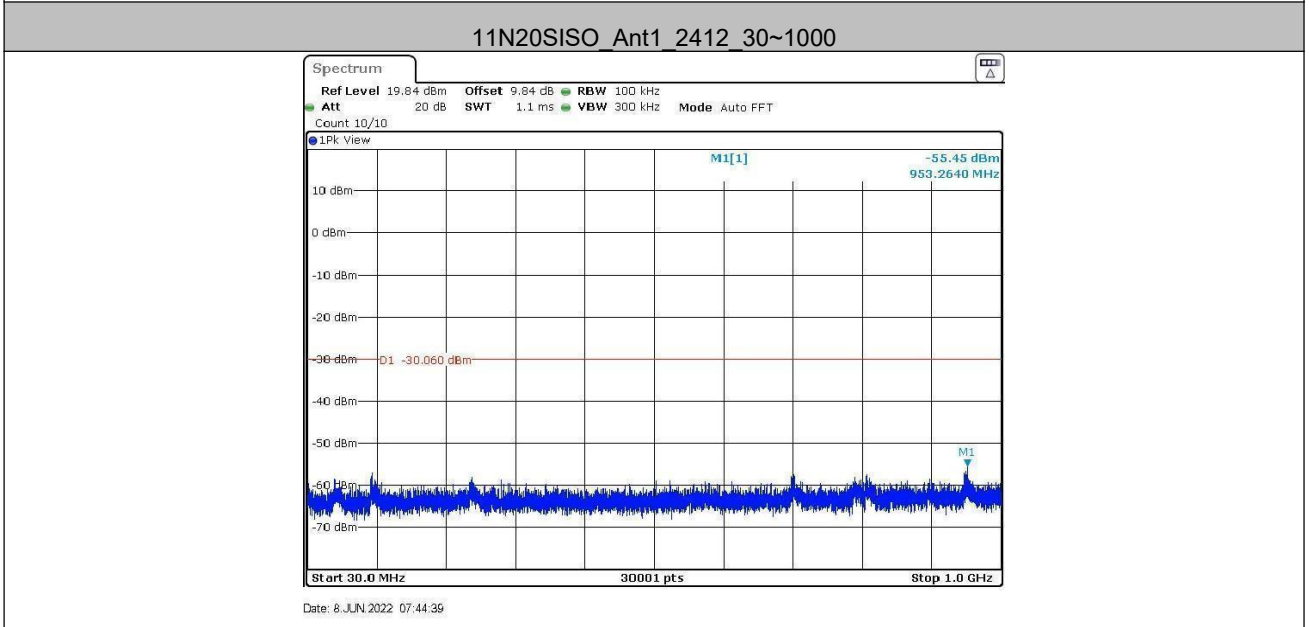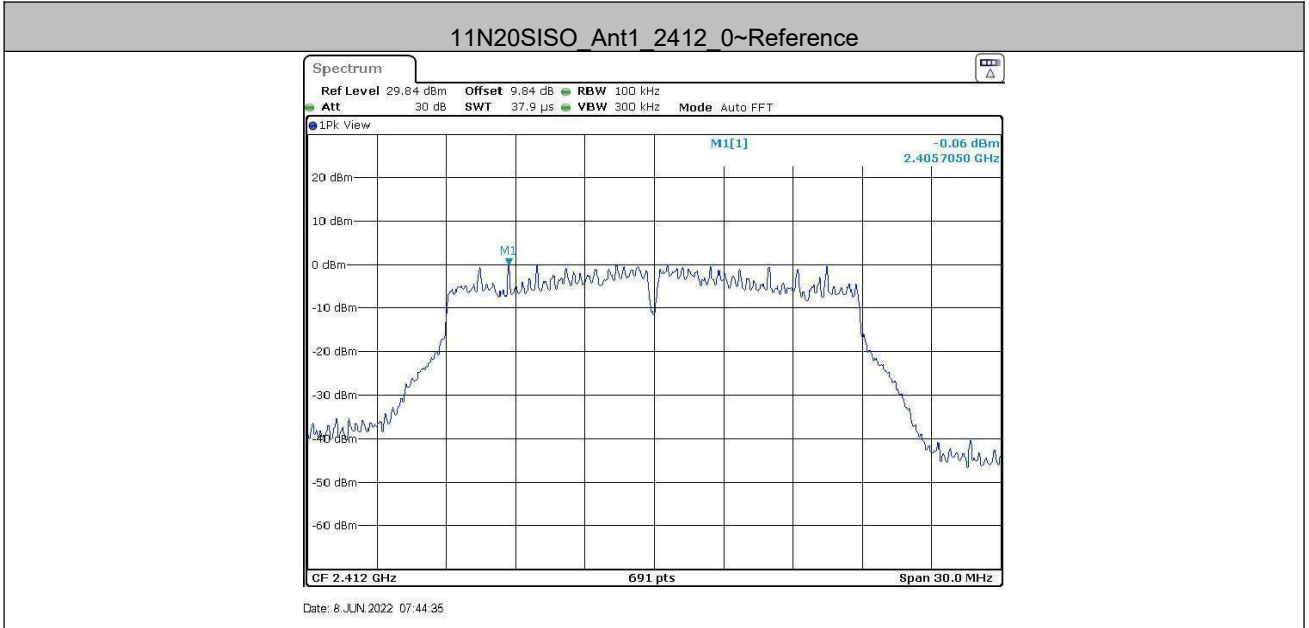

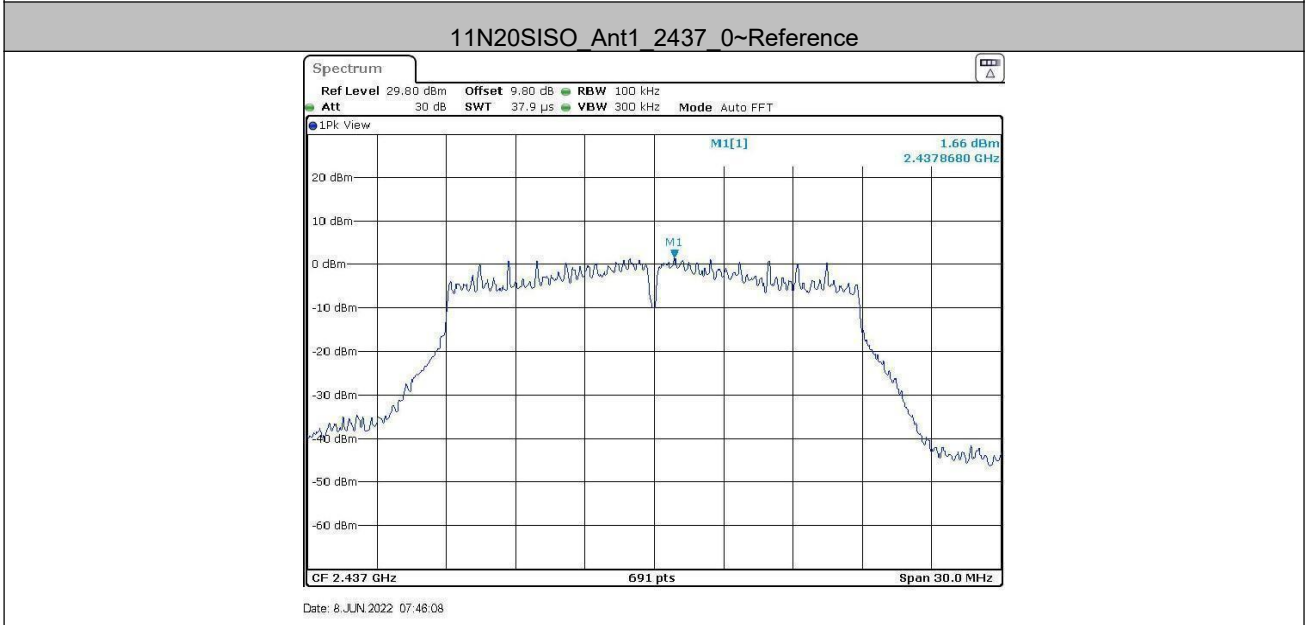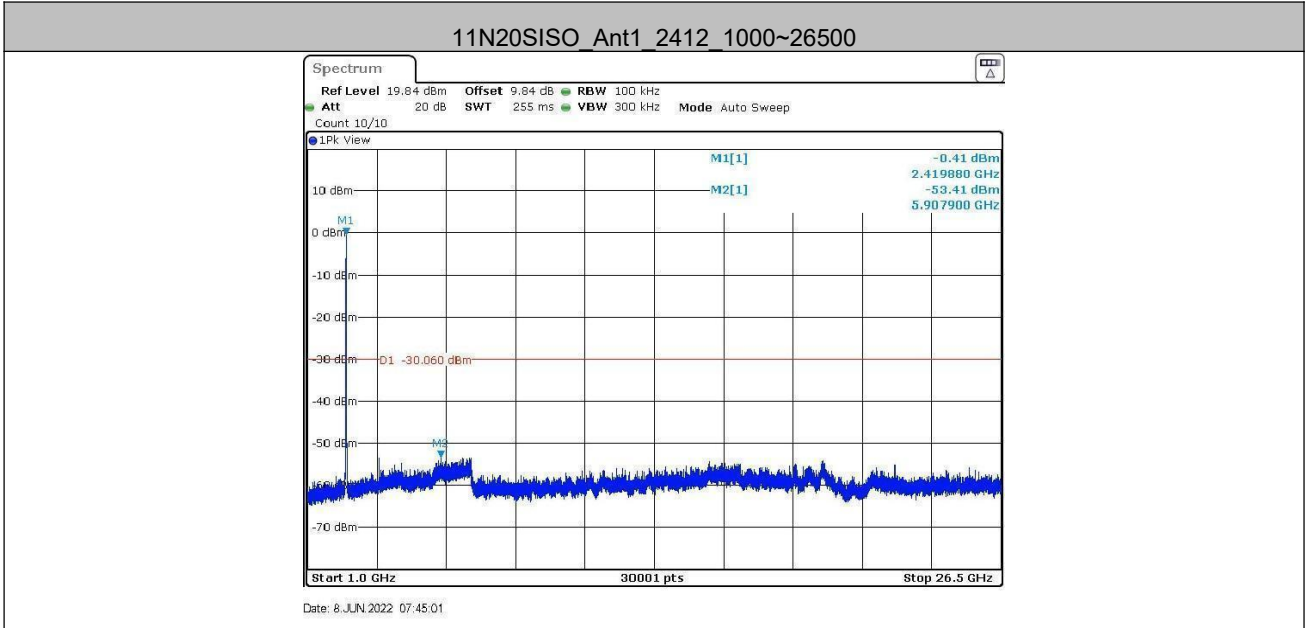


11N20SISO_Ant1_2437_30~1000

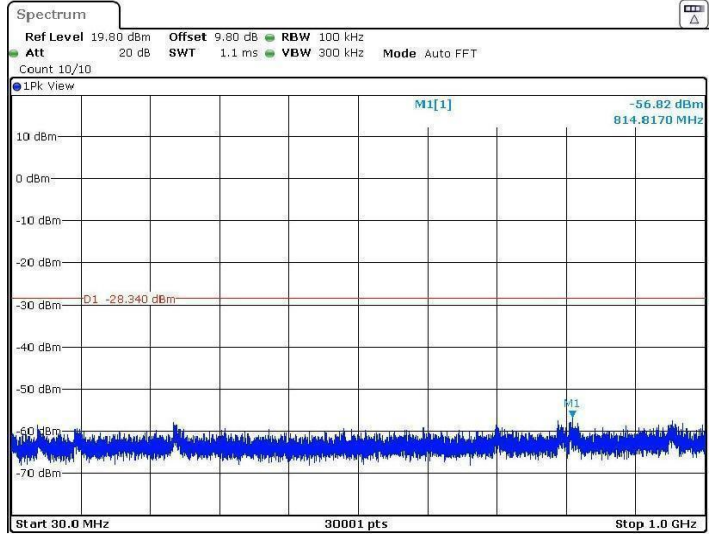

Date: 8 JUN 2022 07:48:12

11N20SISO_Ant1_2437_1000~26500

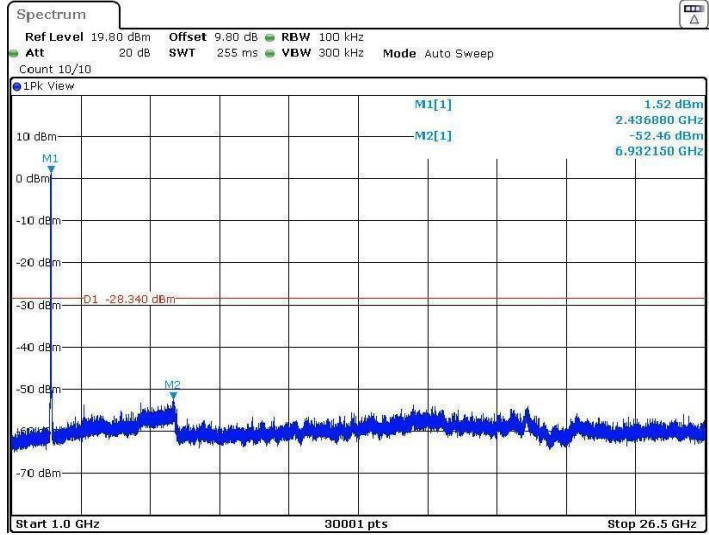

Date: 8 JUN 2022 07:48:34