



**FCC 47 CFR PART 15 SUBPART C  
ISED RSS-210 ISSUE 10**

**CERTIFICATION TEST REPORT**

*For*

**Z-Wave Switch**

**MODEL NUMBER: SQR14101WHZ; SQR14101LAZ; SQR14101BKZ**

**FCC ID: 2AUCU-14101Z  
IC: 25381-14101Z**

**REPORT NUMBER: 4789339772-2**

**ISSUE DATE: June 01, 2020**

*Prepared for*

**Schneider Electric (China) Co., Ltd., Shenzhen Branch  
Room 201, Building A, No. 1 Qianwanyi Road, Shengang Cooperation Zone,  
Qianhai, Shenzhen, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Room 101, Building 10, Innovation Technology Park,  
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China**  
Tel: +86 769 33817100  
Fax: +86 769 33244054  
Website: [www.ul.com](http://www.ul.com)

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	06/01/2020	Initial Issue	

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	7
5.2. <i>MAXIMUM EMISSIONS FIELD STRENGTH</i> .....	7
5.3. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	8
5.4. <i>TEST ENVIRONMENT</i> .....	8
5.5. <i>TEST CHANNEL CONFIGURATION</i> .....	8
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	9
5.7. <i>DESCRIPTION OF TEST SETUP</i> .....	9
5.8. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i> .....	10
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>12</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	12
7.2. <i>20 dB AND 99% BANDWIDTH</i> .....	13
<b>8. RADIATED TEST RESULTS.....</b>	<b>16</b>
8.1. <i>LIMITS AND PROCEDURE</i> .....	16
8.2. <i>FIELD STRENGTH OF INTENTIONAL EMISSIONS</i> .....	22
8.3. <i>SPURIOUS EMISSIONS BELOW 30M</i> .....	28
8.4. <i>SPURIOUS EMISSIONS BELOW 1 GHz</i> .....	31
8.5. <i>SPURIOUS EMISSIONS 1 ~ 10GHz</i> .....	33
<b>9. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>39</b>
<b>10. ANTENNA REQUIREMENTS .....</b>	<b>42</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Schneider Electric (China) Co., Ltd., Shenzhen Branch  
 Address: Room 201, Building A, No. 1 Qianwanyi Road, Shengang Cooperation Zone, Qianhai, Shenzhen, China

### Manufacturer Information

Company Name: Schneider Electric (China) Co., Ltd., Shenzhen Branch  
 Address: Room 201, Building A, No. 1 Qianwanyi Road, Shengang Cooperation Zone, Qianhai, Shenzhen, China

### EUT Information

EUT Name: Z-Wave Switch  
 Model: SQR14101WHZ  
 Series Models: SQR14101LAZ; SQR14101BKZ  
 Model differences: SQR14101WHZ; SQR14101LAZ; SQR14101BKZ are identical except for color  
 Brand Name: **Schneider**  
  
 Sample Status: Normal  
 Sample Received Date: Jan 17, 2020  
 Date of Tested: Jan 17~~ June 01, 2020


### APPLICABLE STANDARDS

#### STANDARD

#### TEST RESULTS

CFR 47 Part 15 Subpart C	PASS
ISED RSS-210 Issue 10	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:



Kebo Zhang  
 Project Engineer

Checked By:



Shawn Wen  
 Laboratory Leader

Approved By:



Stephen Guo  
 Laboratory Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, ISED RSS-210 Issue 10 and RSS-GEN Issue 5

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b>            UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>IAS (Lab Code: TL-702)</b>            UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has demonstrated compliance with ISO/IEC Standard 17025:2005, General requirements for the competence of testing and calibration laboratories</p> <p><b>FCC (FCC Designation No.: CN1187)</b>            UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules</p> <p><b>ISED(Company No.: 21320)</b>            UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b>            UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name:            Chamber D, the VCCI registration No. is G-20019 and R-20004            Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)( include Fundamental emission)	5.04dB(1-6GHz) 5.30dB (6GHz-18GHz) 5.23dB (18GHz-26GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment	Z-Wave Switch		
Model Name	SQR14101WHZ		
Series Models:	SQR14101LAZ; SQR14101BKZ		
Model differences:	SQR14101WHZ; SQR14101LAZ; SQR14101BKZ are identical except for color		
	908.4 MHz:40kbps/FSK		
Data Rates	908.42 MHz:9.6kbps/FSK		
	916.0 MHz:100kbps/GFSK		
	Channel ID	Channel Frequency(MHz)	
Transmit Channel Tested:	1	908.40	
	2	908.42	
	3	916.00	
Power Supply	AC120V, 60Hz		

### 5.2. MAXIMUM EMISSIONS FIELD STRENGTH

Operation Frequency (MHz)	Number of Transmit Chains (NTX)	Channel Number	Max. Emissions Field Strength (dB $\mu$ V/m)
908.4-916	1	3[3]	92.10

### 5.3. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 908.4~916MHz				
Test Software		sscom		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		916MHz	908.42MHz	908.4MHz
FSK&GFSK	1	25	25	25

Note:

1. All tests executed under maximum input levels.

### 5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	AC120V,60Hz
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

### 5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel Number	Test Channel
Z-wave	CH 1, CH 2, CH 3/ Low, Middle, High	908.4MHz, 908.42MHz, 916MHz

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	908.4~916	Wire antenna	-3.51

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name
1	Laptop	ThinkPad	T460S
2	USB to Serial Conversion board	/	/

### I/O CABLES

No.	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### TEST SETUP

The EUT can work in an engineer mode with a software through a table PC before the testing.

### SETUP DIAGRAM FOR TESTS



## 5.8. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.05,2019	Dec.05,2020				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Radiated Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400 036	Dec.06,2019	Dec.06,2020				
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021				
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A090 99	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020				
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Other instruments										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020				

## 6. SUMMARY OF TEST RESULTS

Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	20dB Bandwidth	FCC Part 15.215(c)	Pass
2	99%dB Bandwidth	RSS-Gen Clause 6.7	Pass
3	TX Spurious Emission	FCC 15.249 (a)(d)(e) FCC 15.209 FCC 15.205 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
4	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
5	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
"N/A" denotes test is not applicable in this test report.			


## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only

#### TEST SETUP

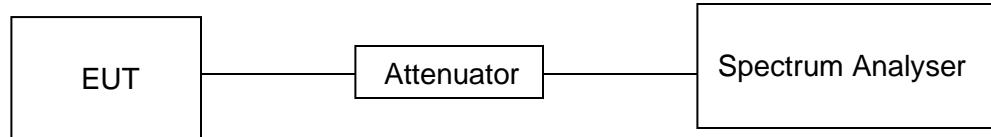

#### RESULTS


Test Channel	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	minimum VBW 1/T (kHz)
MID	1	1	1	100%	0	0.01

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time (transmit duration)

#### ON TIME AND DUTY CYCLE MID

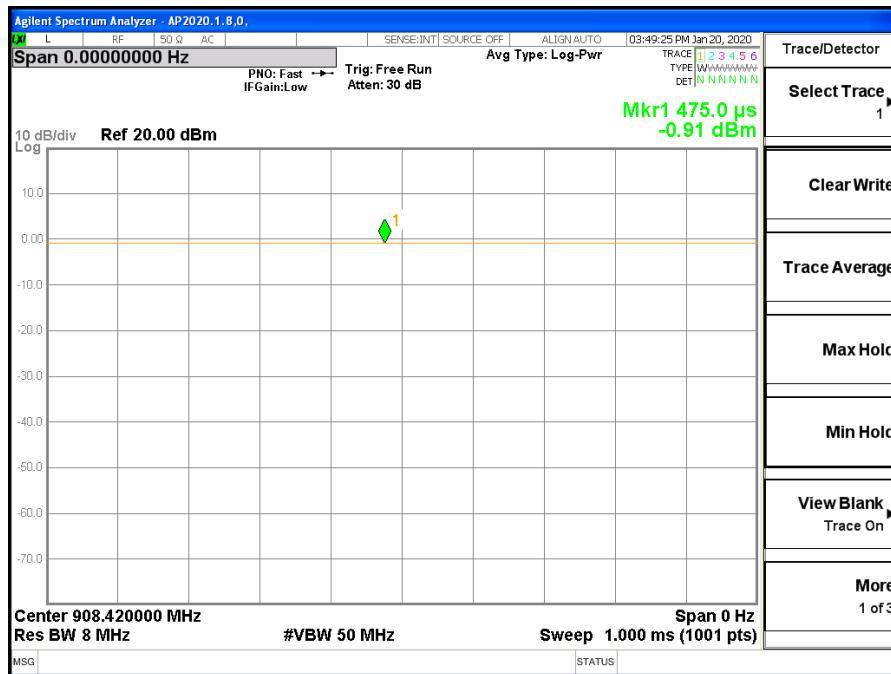

## 7.2. 20 dB AND 99% BANDWIDTH

### LIMITS

FCC Part15 (15.249), Subpart C RSS-GEN			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.215(c)	20dB Bandwidth	for reporting purposes only	902-928 MHz
RSS-Gen Clause 6.7	99% Bandwidth	N/A	902-928MHz


### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the occupied bandwidth
VBW	$\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB/99% relative to the maximum level measured in the fundamental emission.



### TEST SETUP

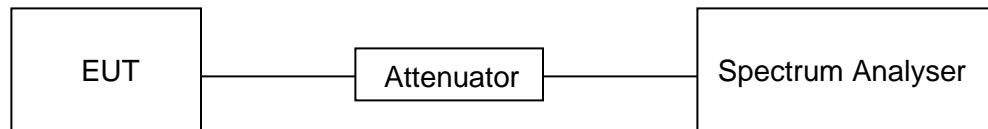

**RESULTS**

Channel	20dB bandwidth (kHz)	99% bandwidth (kHz)	Result
Low	92.04	88.261	Pass
Middle	99.07	89.403	Pass
High	126.7	114.50	Pass

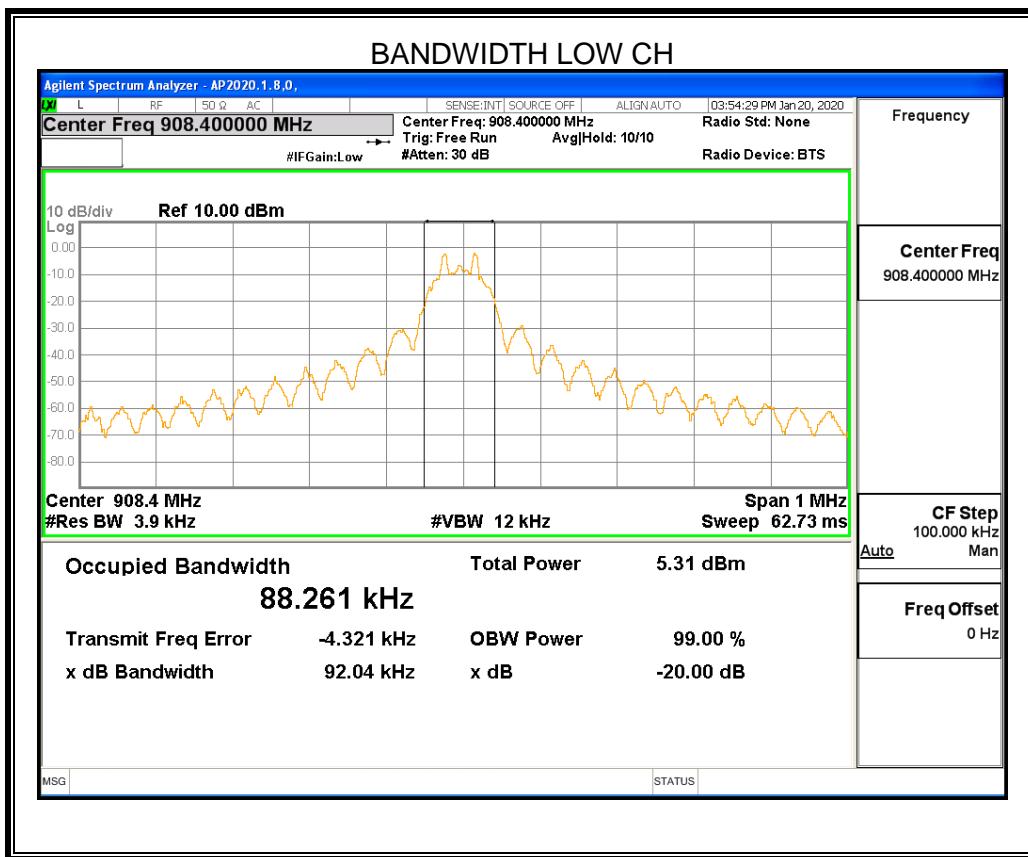

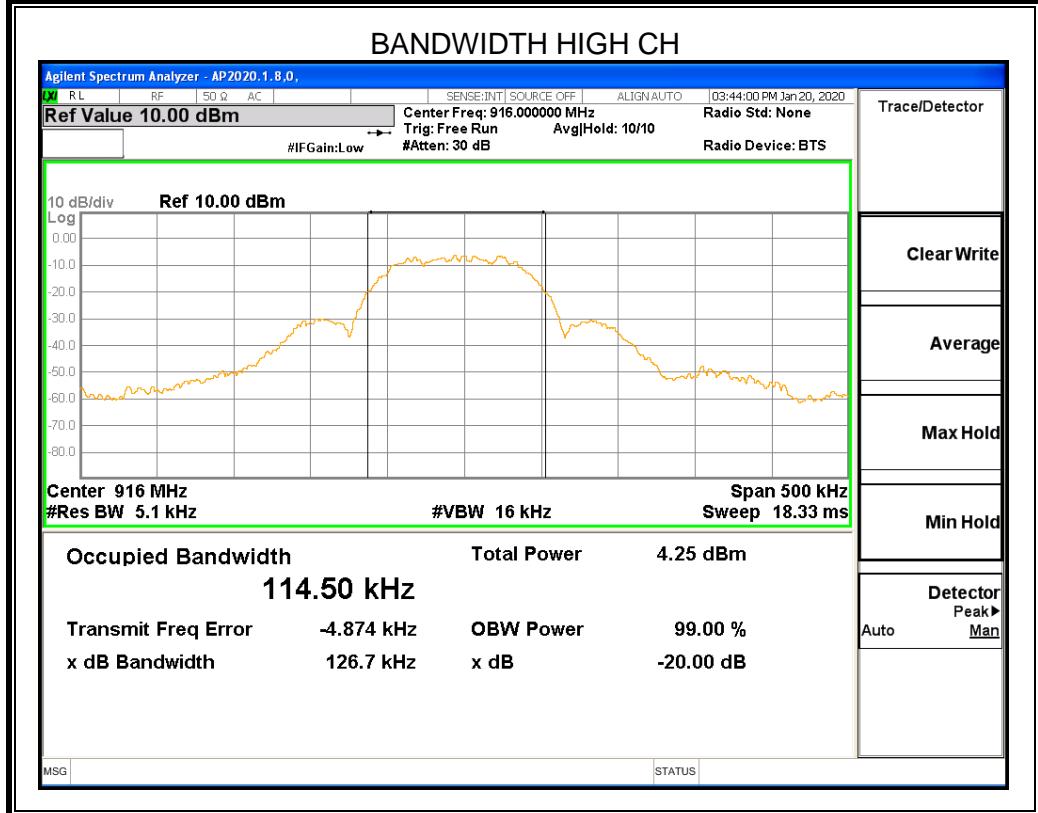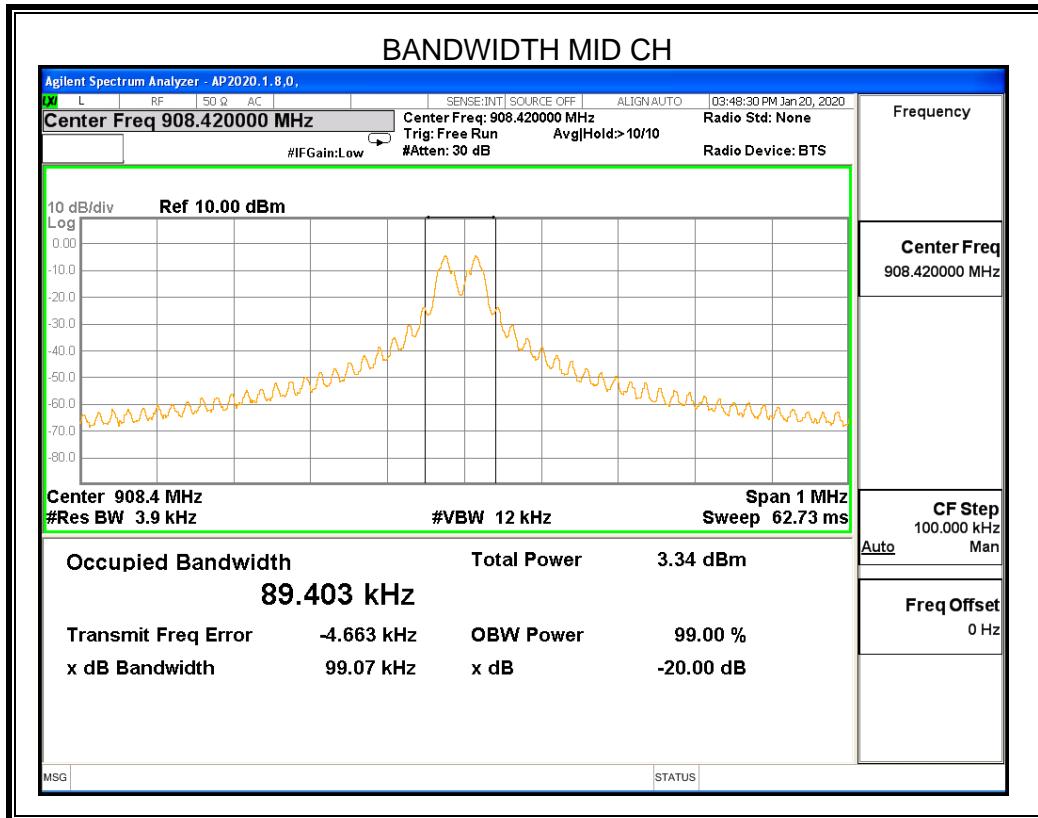

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC §15.249 (a)(d)(e)

RSS-210 Issue 9 Clause Annex B B.10

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10

The field strength of emissions from intentional radiators operated within these frequency bands			
Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
2400 – 2483.5	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
5725 – 5875	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3

Radiation Disturbance Test Limit for FCC (Class B)(9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics

of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.


Radiation Disturbance Test Limit for FCC (Above 1GHz)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC §15.205 (a)

## TEST SETUP AND PROCEDURE

Below 30MHz

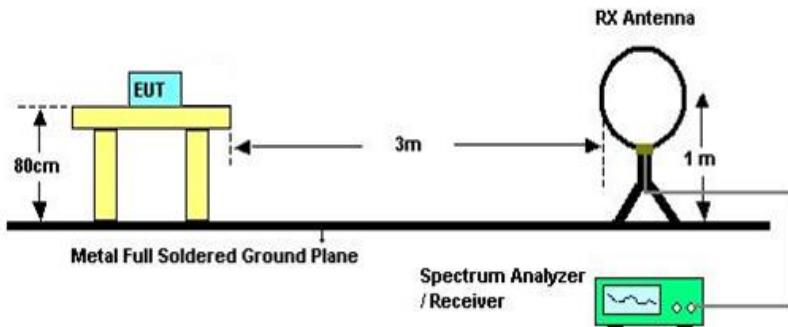


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Measurement = Reading Level + Correct Factor
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
8. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

## Below 1G

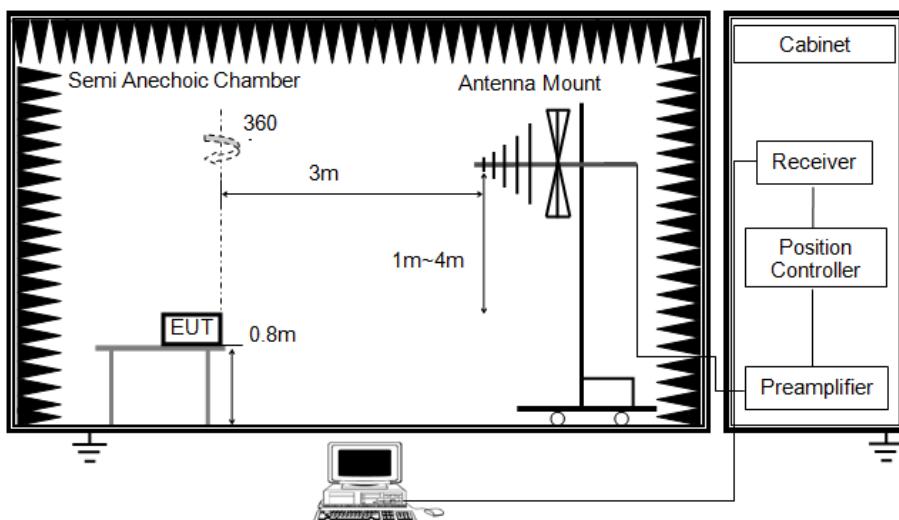


## The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Measurement = Reading Level + Correct Factor
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

## ABOVE 1G

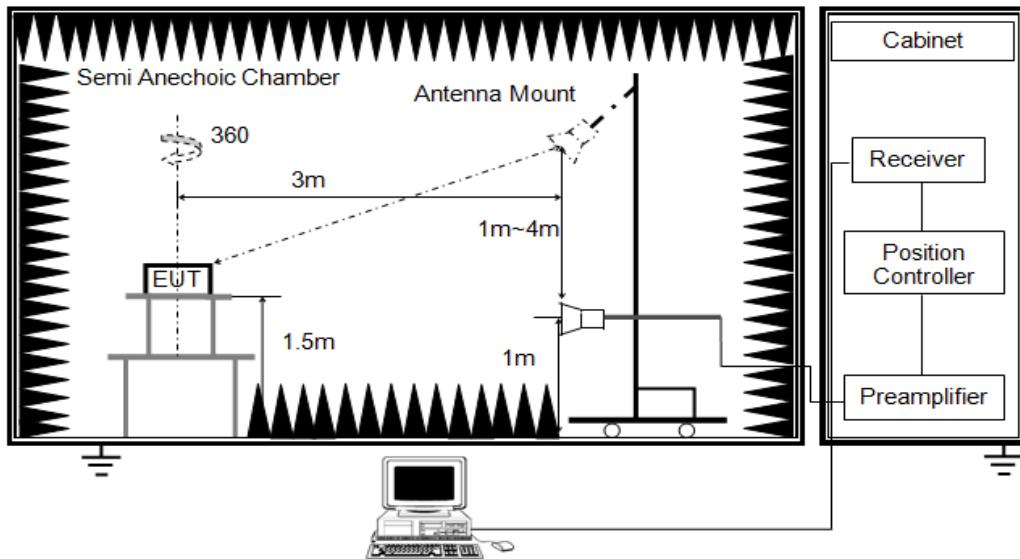


## The setting of the spectrum analyser

RBW	1M MHz
VBW	PEAK: 3M AVG: See Note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average power measurement, set the detector to AVG, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)


X axis, Y axis, Z axis positions:

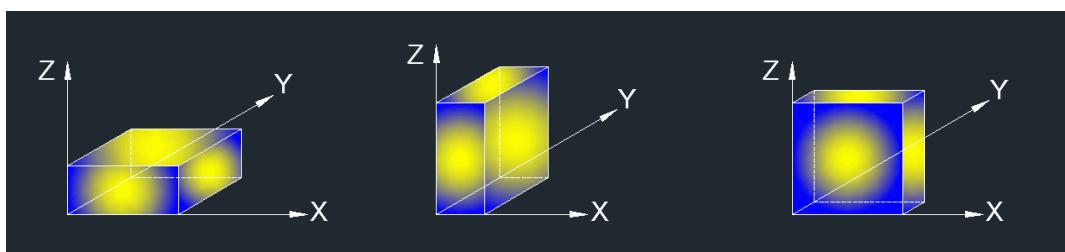

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


## 8.2. FIELD STRENGTH OF INTENTIONAL EMISSIONS

### FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

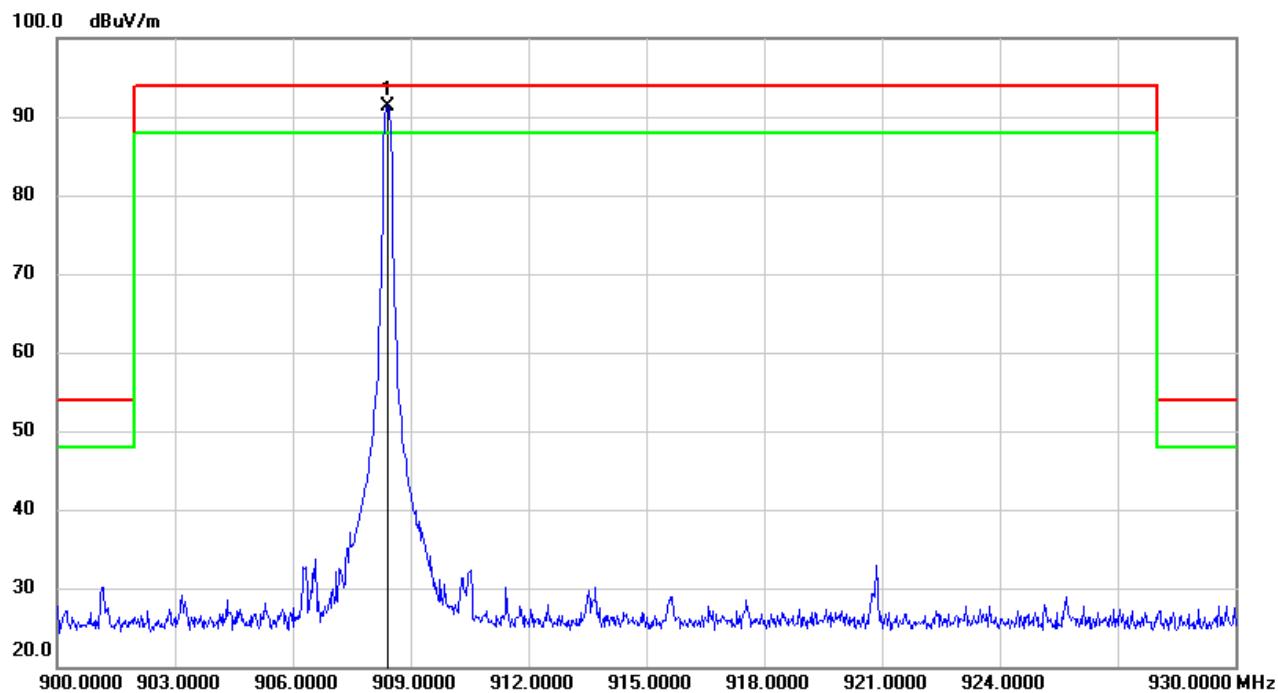


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4000	95.52	-4.13	91.39	94.00	-2.61	QP

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. QP detector.

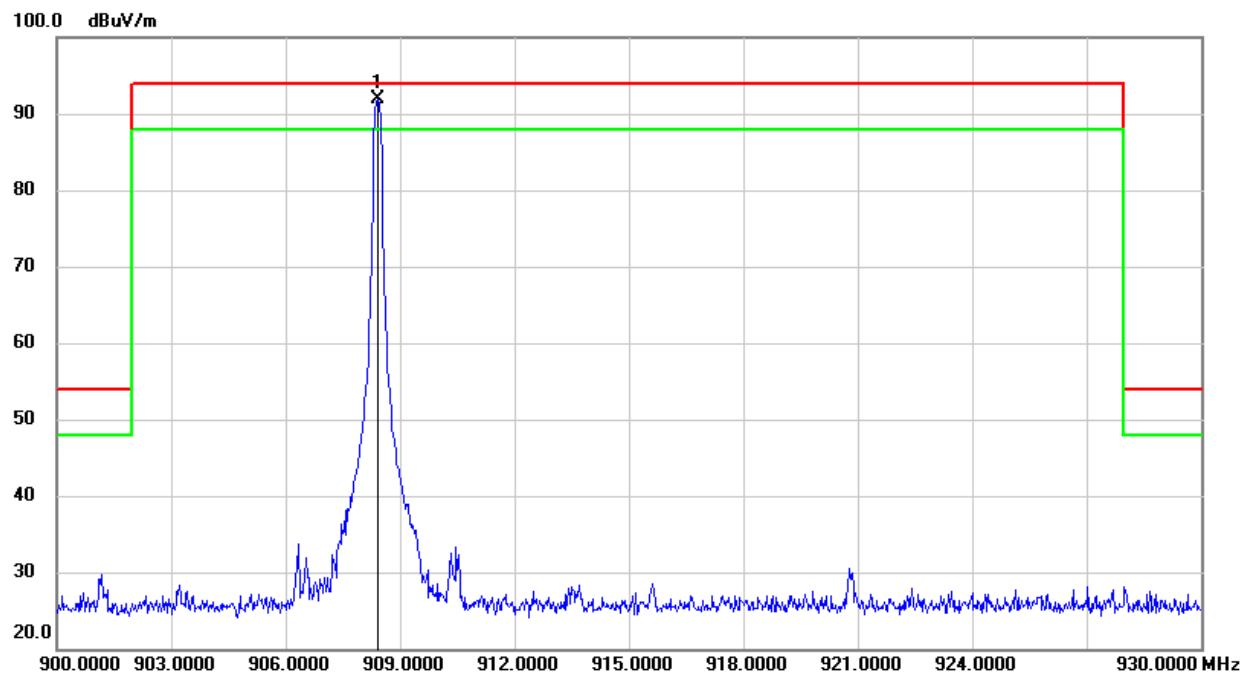**FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4000	96.10	-4.13	91.97	94.00	-2.03	QP

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. QP detector.

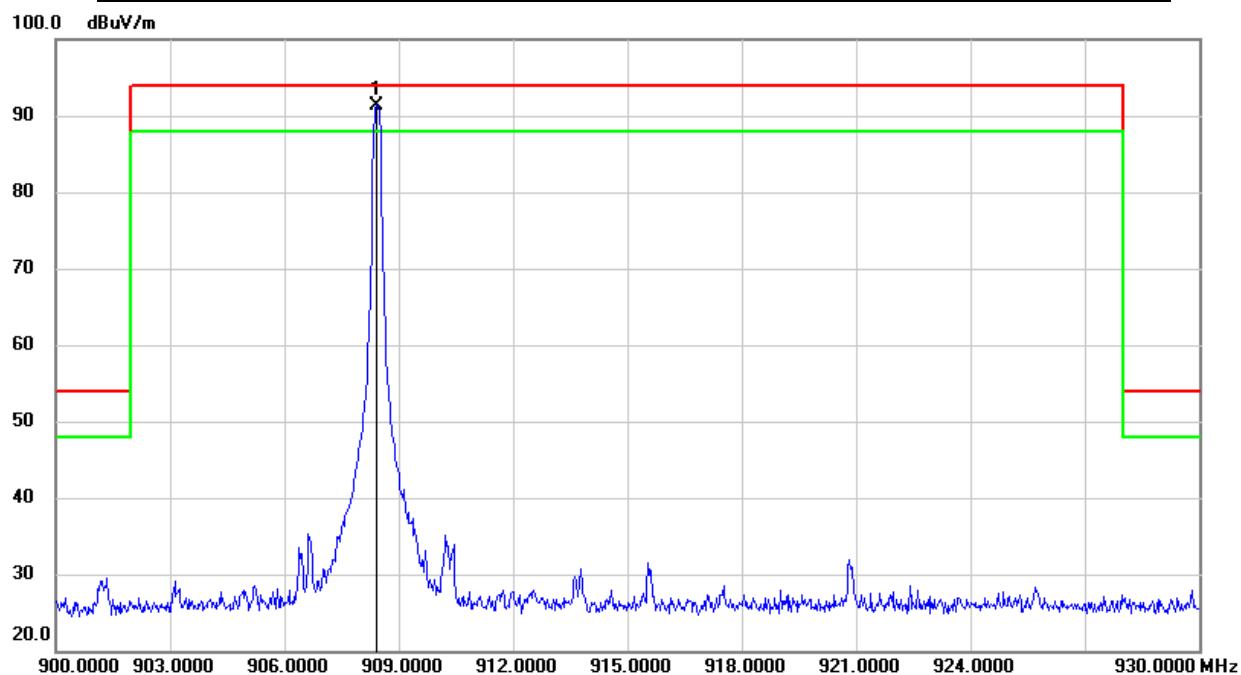**FIELD STRENGTH OF INTENTIONAL EMISSIONS (MIDDLE CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	908.4200	95.52	-4.12	91.40	94.00	-2.60	QP


Note: 1. Measurement = Reading Level + Correct Factor.  
 2. QP detector.

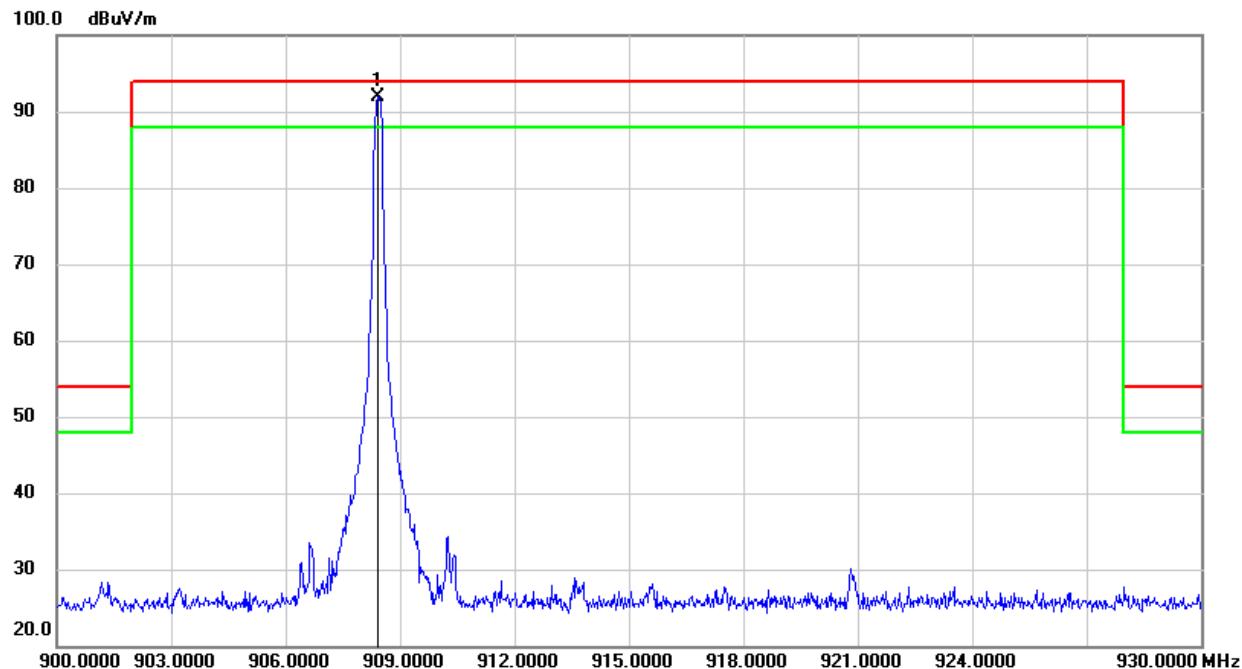**FIELD STRENGTH OF INTENTIONAL EMISSIONS (MIDDLE CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Correct (dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	908.4200	96.08	-4.12	91.96	94.00	-2.04	QP


Note: 1. Measurement = Reading Level + Correct Factor.

2. QP detector.

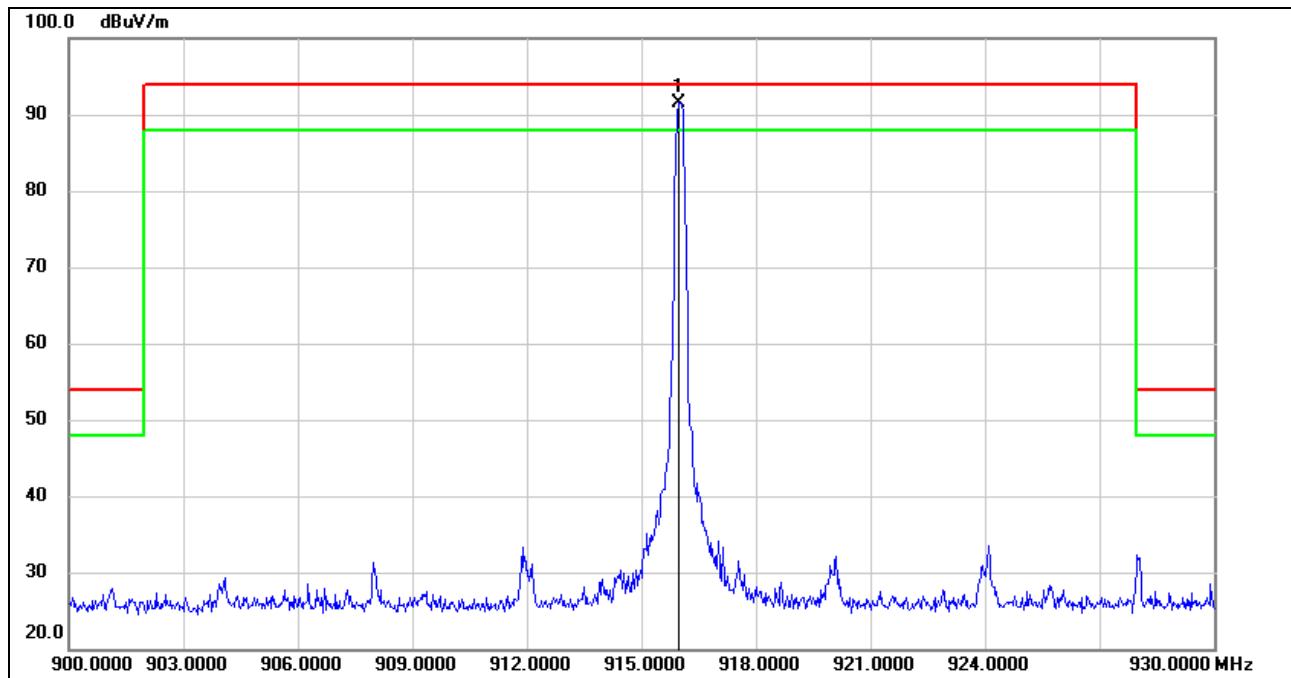**FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	916.0000	95.55	-4.01	91.54	94.00	-2.46	QP

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. QP detector.

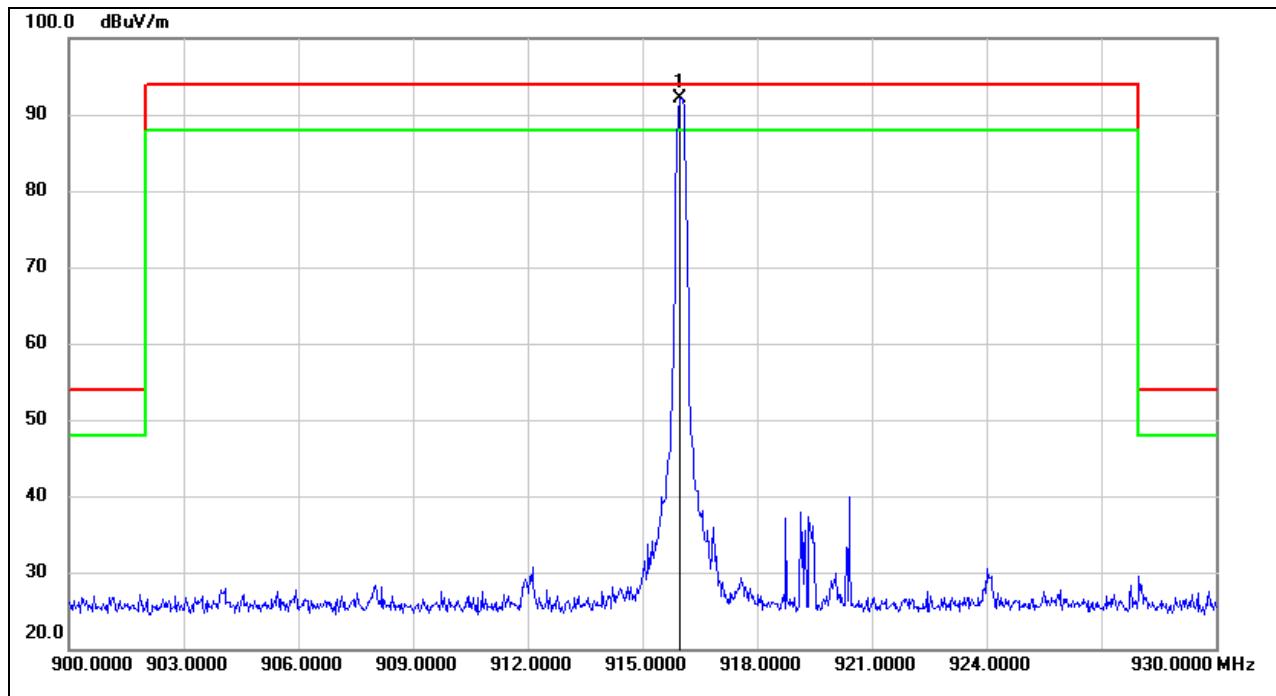**FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	916.0000	96.11	-4.01	92.10	94.00	-1.90	QP

Note: 1. Measurement = Reading Level + Correct Factor.


2. QP detector.

### 8.3. SPURIOUS EMISSIONS BELOW 30M

#### SPURIOUS EMISSIONS

(MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9kHz~ 150kHz

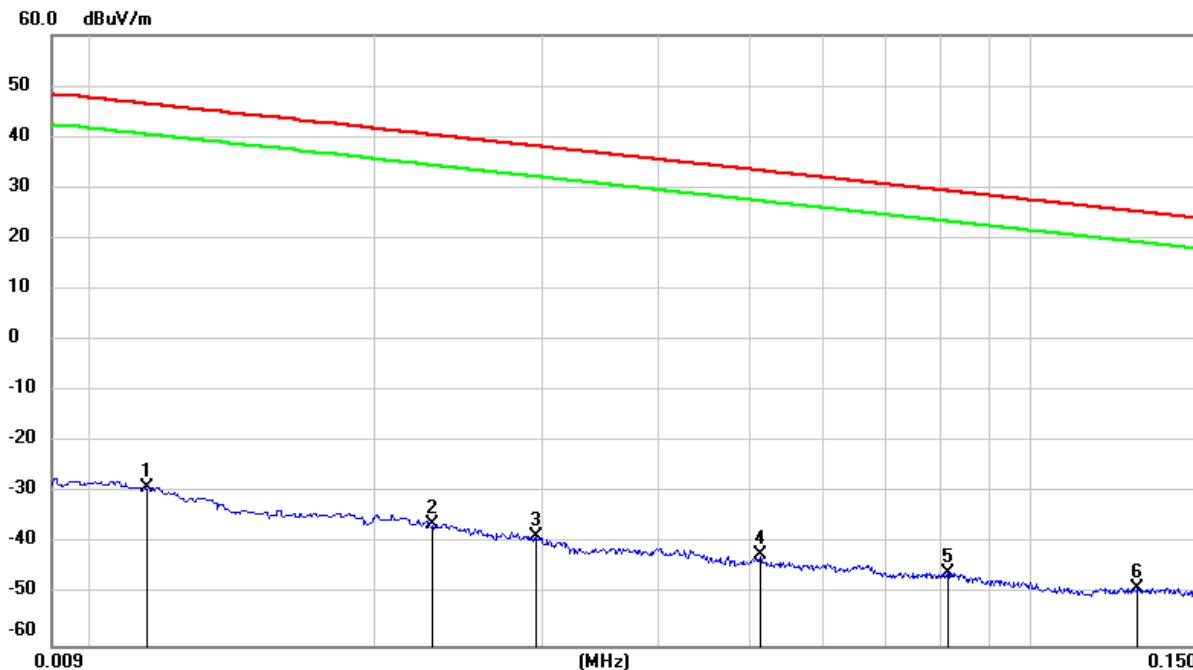


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0114	72.50	-101.40	-28.90	46.46	-80.40	-5.04	-75.36	peak
2	0.0229	65.19	-101.36	-36.17	40.40	-87.67	-11.10	-76.57	peak
3	0.0296	62.83	-101.39	-38.56	38.18	-90.06	-13.32	-76.74	peak
4	0.0514	59.18	-101.48	-42.30	33.38	-93.80	-18.12	-75.68	peak
5	0.0815	55.91	-101.65	-45.74	29.38	-97.24	-22.12	-75.12	peak
6	0.1300	52.93	-101.70	-48.77	25.33	-100.27	-26.17	-74.10	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

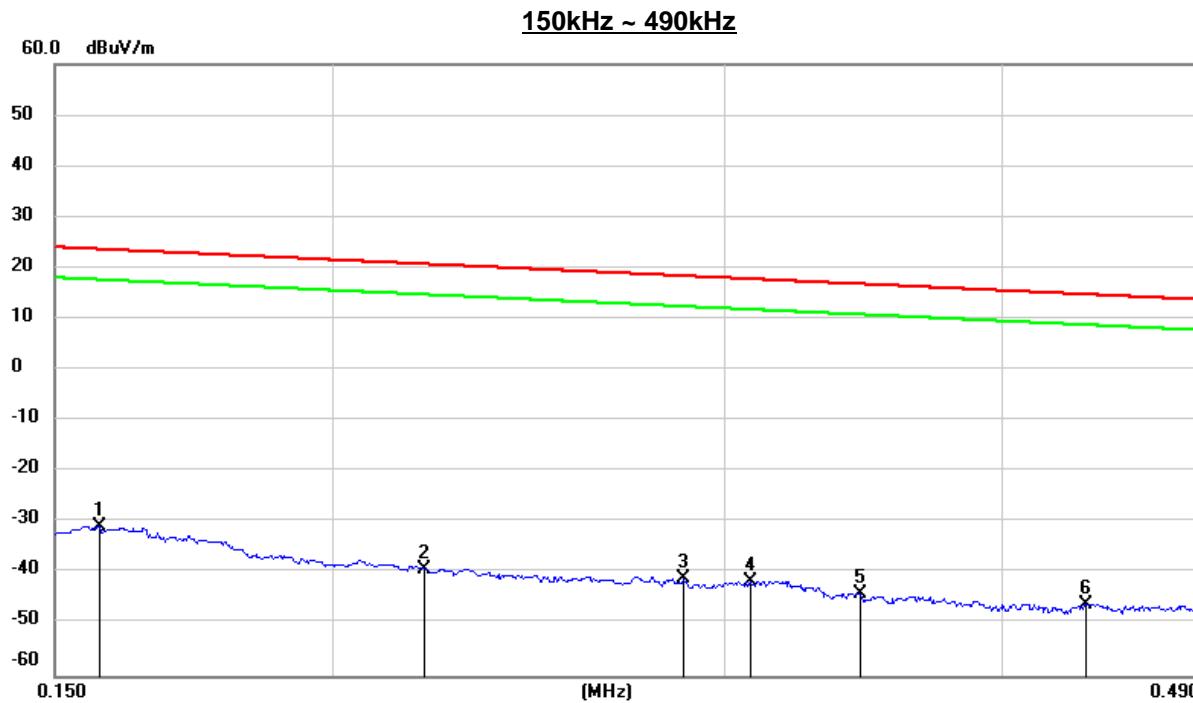


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1570	71.03	-101.65	-30.62	23.68	-82.12	-27.82	-54.30	peak
2	0.2200	62.74	-101.75	-39.01	20.75	-90.51	-30.75	-59.76	peak
3	0.2877	60.84	-101.85	-41.01	18.42	-92.51	-33.08	-59.43	peak
4	0.3084	60.45	-101.86	-41.41	17.82	-92.91	-33.68	-59.23	peak
5	0.3452	57.99	-101.90	-43.91	16.84	-95.41	-34.66	-60.75	peak
6	0.4364	55.86	-101.99	-46.13	14.80	-97.63	-36.70	-60.93	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m = dBuV/m -  $20\log_{10}[120\pi]$  = dBuV/m - 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

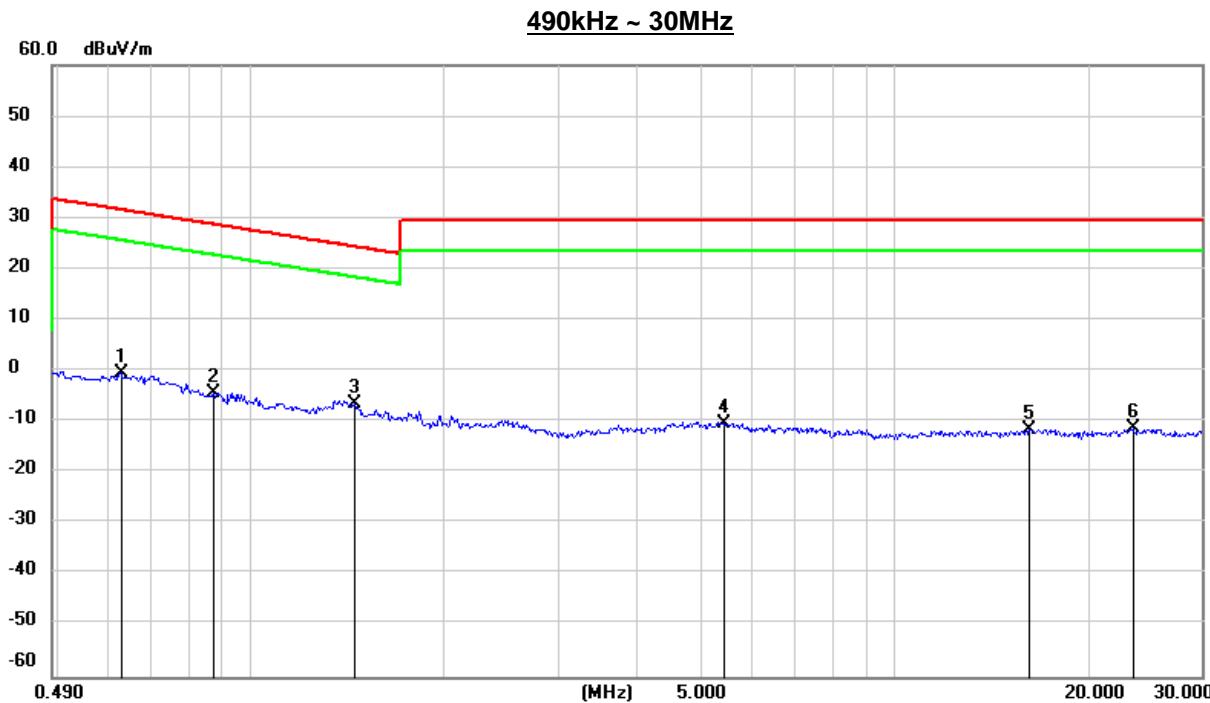

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6270	61.65	-62.09	-0.44	31.66	-51.94	-19.84	-32.10	peak
2	0.8750	57.93	-62.19	-4.26	28.76	-55.76	-22.74	-33.02	peak
3	1.4454	55.59	-62.08	-6.49	24.40	-57.99	-27.10	-30.89	peak
4	5.4180	51.16	-61.43	-10.27	29.54	-61.77	-21.96	-39.81	peak
5	16.1890	49.45	-60.97	-11.52	29.54	-63.02	-21.96	-41.06	peak
6	23.4783	49.24	-60.56	-11.32	29.54	-62.82	-21.96	-40.86	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m = dBuV/m -  $20\log_{10}[120\pi]$  = dBuV/m - 51.5).


2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes had been tested, but only the worst data recorded in the report.

## 8.4. SPURIOUS EMISSIONS BELOW 1 GHz

### SPURIOUS EMISSIONS BELOW 1GHZ (WORST-CASE HIGH CHANNEL, VERTICAL)

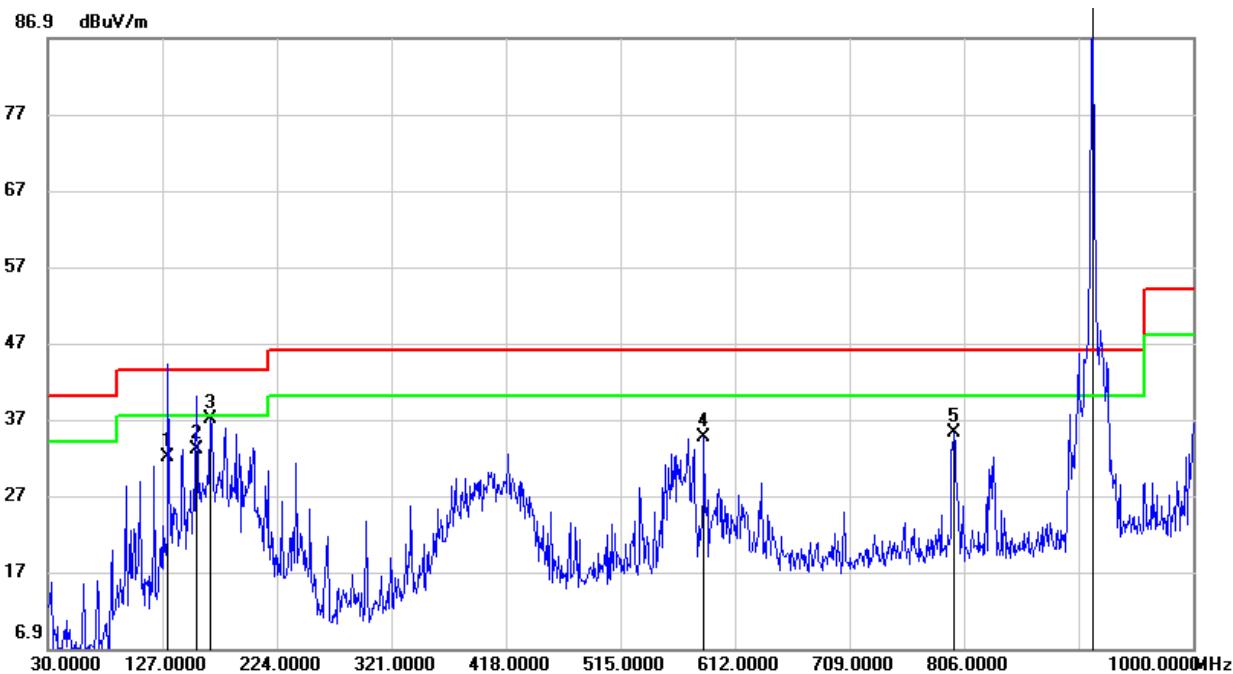


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	131.8500	51.48	-19.54	31.94	43.50	-11.56	QP
2	156.1000	50.96	-18.01	32.95	43.50	-10.55	QP
3	167.7400	54.13	-17.10	37.03	43.50	-6.47	QP
4	585.8100	43.74	-9.15	34.59	46.00	-11.41	QP
5	797.2700	40.74	-5.60	35.14	46.00	-10.86	QP
6	916.0000	95.52	-4.02	91.50	/	/	Fundamental

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

3. About the Fundamental emission test result please refer to section 8.2.

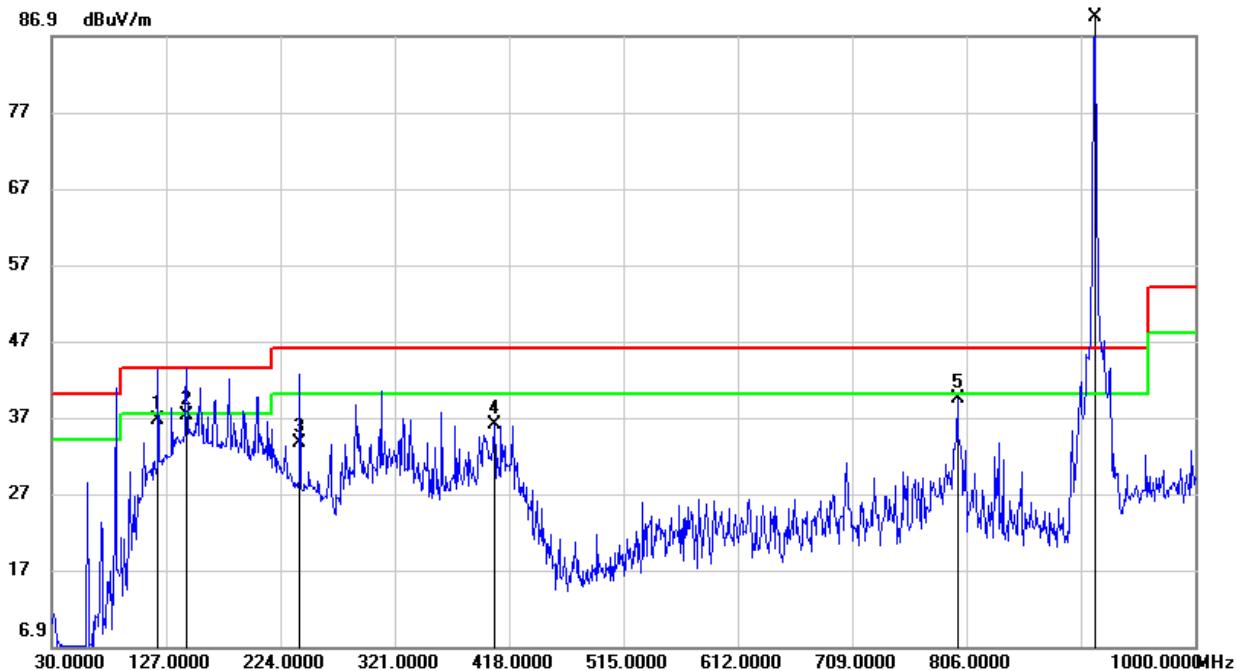**SPURIOUS EMISSIONS BELOW 1GHz (WORST-CASE HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	120.2100	57.42	-20.74	36.68	43.50	-6.82	QP
2	144.4600	55.96	-18.67	37.29	43.50	-6.21	QP
3	240.4900	50.54	-16.99	33.55	46.00	-12.45	QP
4	405.3900	48.75	-12.65	36.10	46.00	-9.90	QP
5	798.2400	44.93	-5.57	39.36	46.00	-6.64	QP
6	916.0000	93.56	-4.02	89.54	/	/	Fundamental

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

3. About the Fundamental emission test result please refer to section 8.2.

Note: All the modes had been tested, but only the worst data recorded in the report.

## 8.5. SPURIOUS EMISSIONS 1 ~ 10GHz

### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

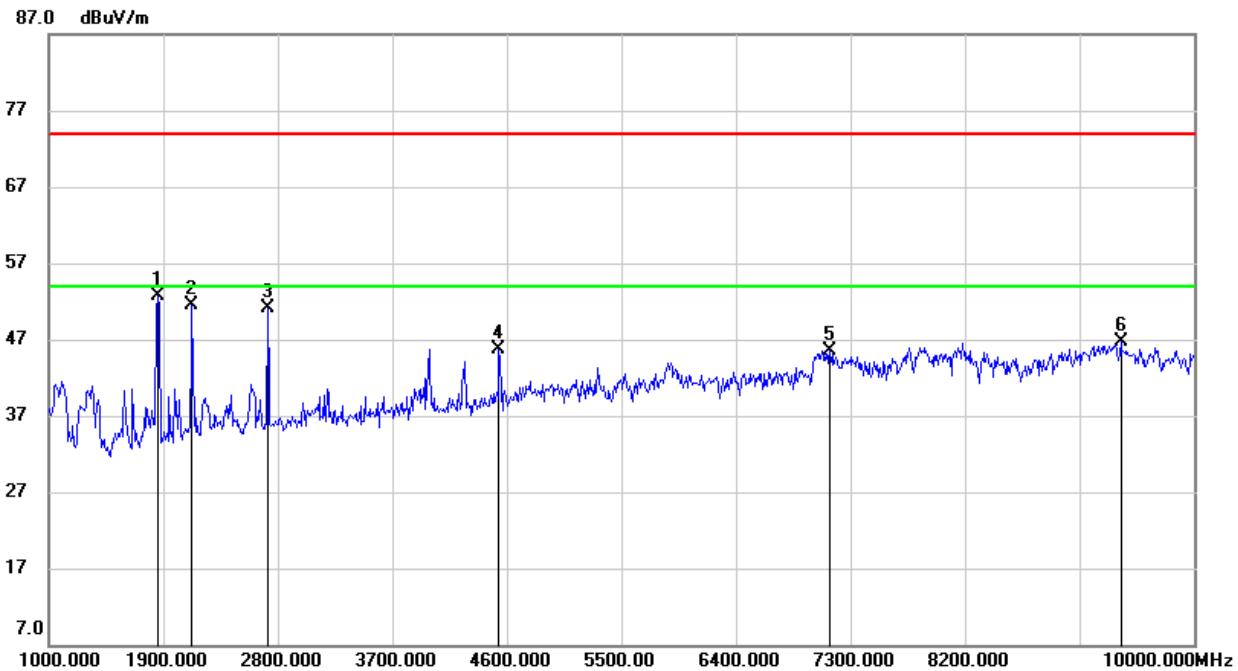


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1855.000	63.30	-10.67	52.63	74.00	-21.37	peak
2	2125.000	61.41	-9.95	51.46	74.00	-22.54	peak
3	2719.000	58.82	-7.74	51.08	74.00	-22.92	peak
4	4537.000	47.42	-1.70	45.72	74.00	-28.28	peak
5	7138.000	40.21	5.22	45.43	74.00	-28.57	peak
6	9424.000	37.52	9.26	46.78	74.00	-27.22	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

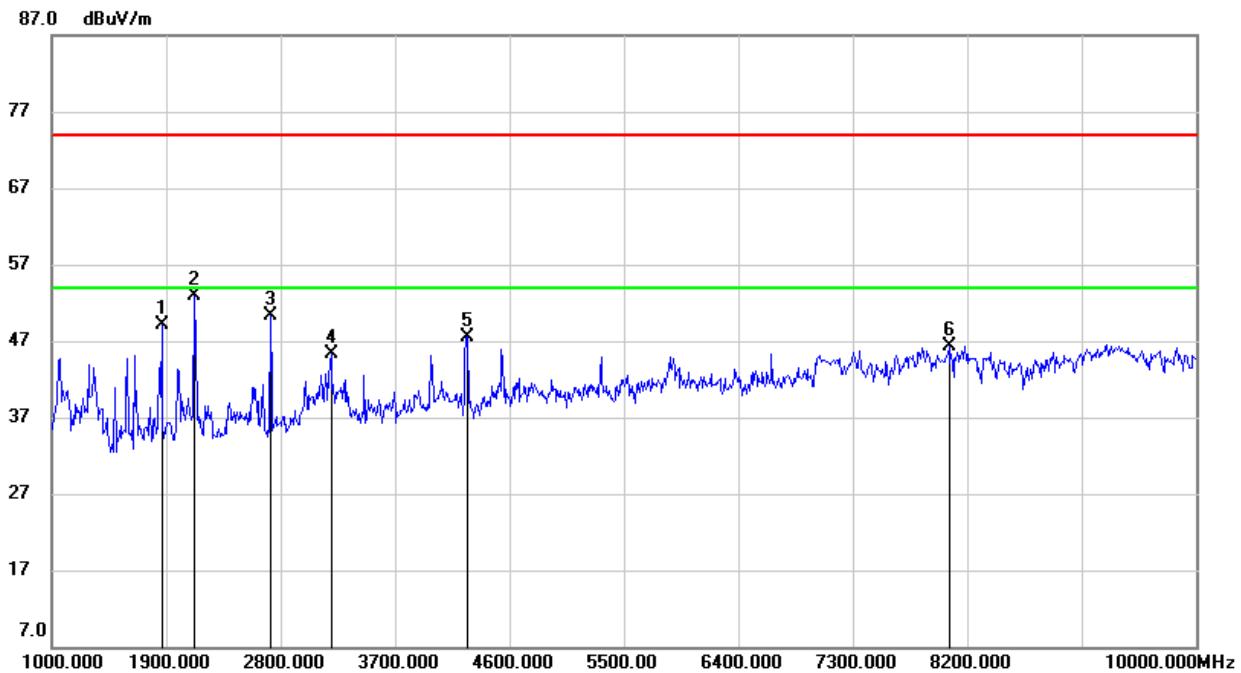
**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct (dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	1864.000	59.78	-10.68	49.10	74.00	-24.90	peak
2	2125.000	62.88	-9.95	52.93	74.00	-21.07	peak
3	2719.000	58.12	-7.74	50.38	74.00	-23.62	peak
4	3196.000	51.33	-6.00	45.33	74.00	-28.67	peak
5	4267.000	50.57	-2.99	47.58	74.00	-26.42	peak
6	8056.000	39.46	6.88	46.34	74.00	-27.66	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

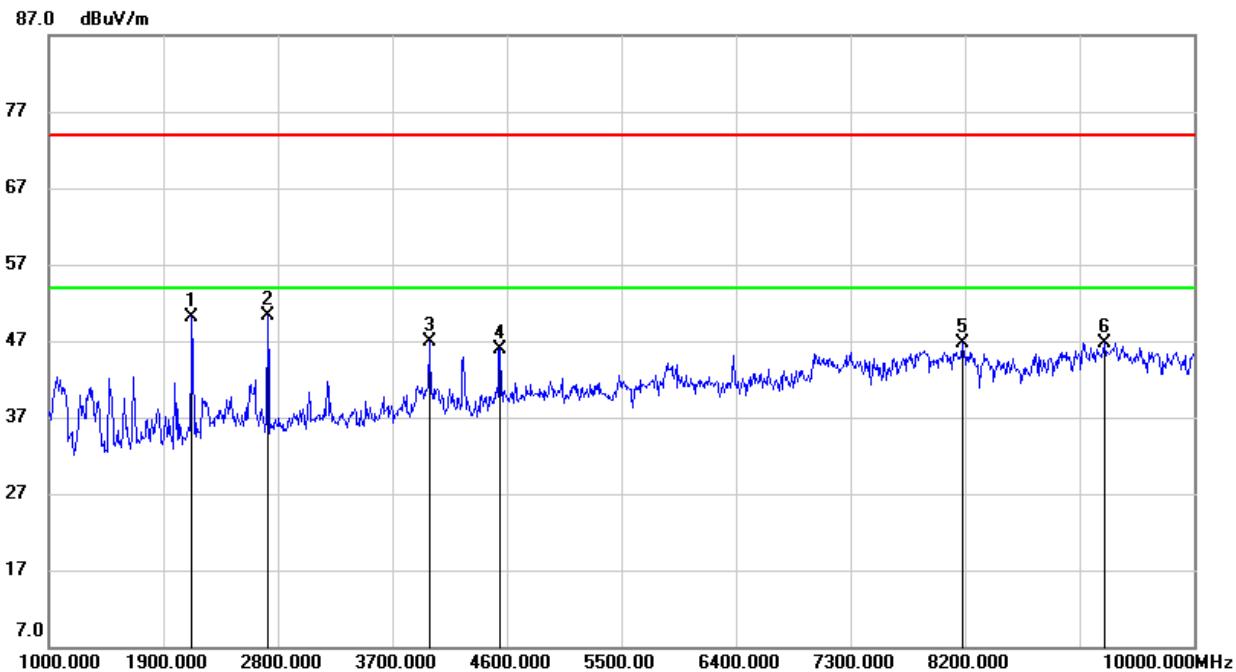
**HARMONICS AND SPURIOUS EMISSIONS (MIDDLE CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2125.000	60.09	-9.95	50.14	74.00	-23.86	peak
2	2719.000	57.96	-7.74	50.22	74.00	-23.78	peak
3	3988.000	51.00	-4.17	46.83	74.00	-27.17	peak
4	4546.000	47.61	-1.68	45.93	74.00	-28.07	peak
5	8182.000	38.90	7.80	46.70	74.00	-27.30	peak
6	9298.000	38.02	8.65	46.67	74.00	-27.33	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

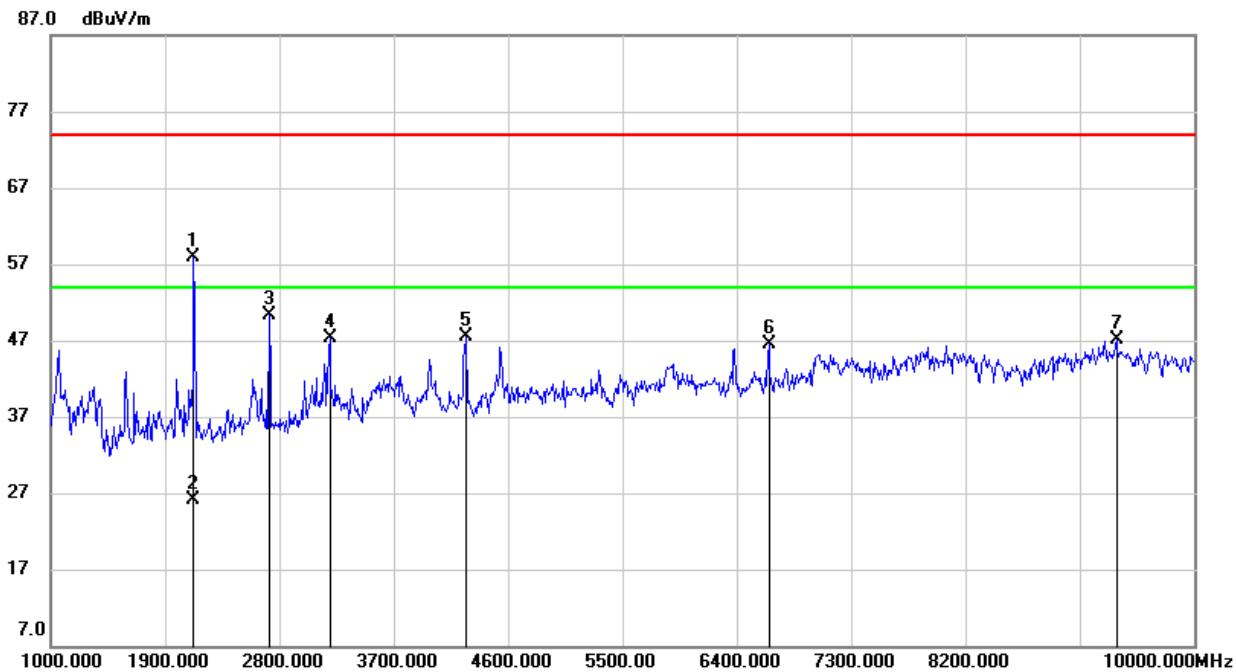**HARMONICS AND SPURIOUS EMISSIONS (MIDDLE CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2125.000	67.83	-9.95	57.88	74.00	-16.12	peak
2	2125.000	36.00	-9.95	26.05	54.00	-27.95	AVG
3	2719.000	57.96	-7.74	50.22	74.00	-23.78	peak
4	3196.000	53.29	-6.00	47.29	74.00	-26.71	peak
5	4267.000	50.58	-2.99	47.59	74.00	-26.41	peak
6	6652.000	41.91	4.57	46.48	74.00	-27.52	peak
7	9388.000	37.91	9.15	47.06	74.00	-26.94	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

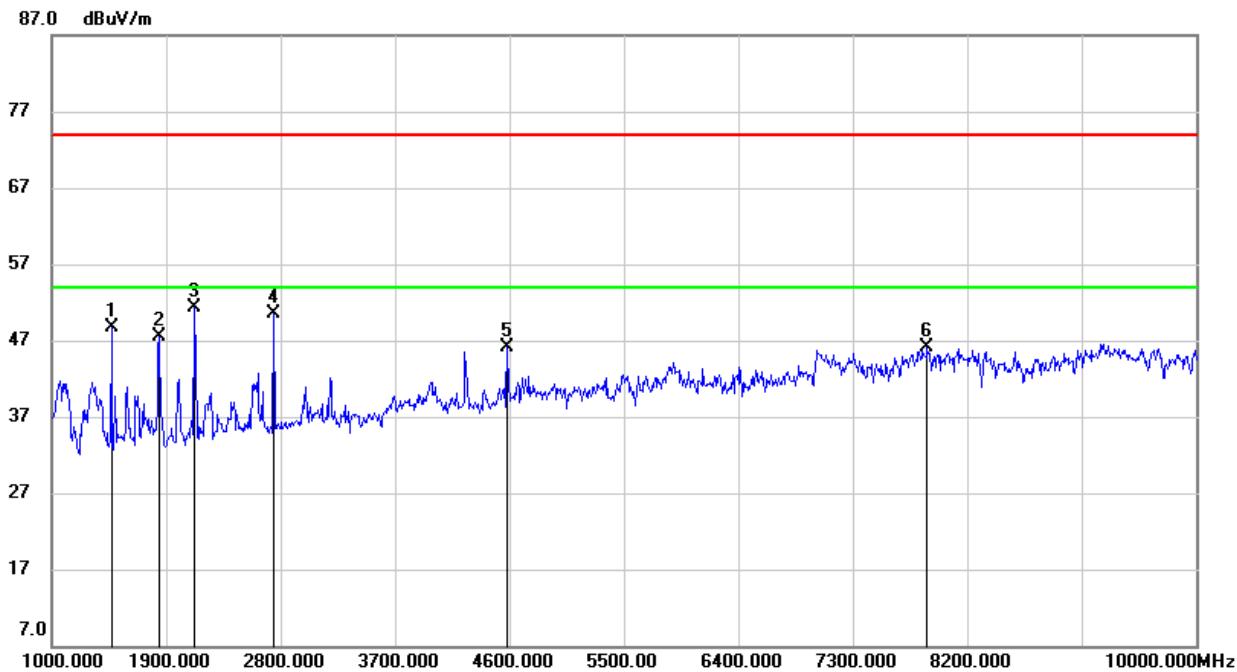
**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1468.000	61.63	-12.93	48.70	74.00	-25.30	peak
2	1846.000	58.26	-10.68	47.58	74.00	-26.42	peak
3	2125.000	61.28	-9.95	51.33	74.00	-22.67	peak
4	2746.000	58.03	-7.55	50.48	74.00	-23.52	peak
5	4582.000	47.70	-1.62	46.08	74.00	-27.92	peak
6	7885.000	39.53	6.60	46.13	74.00	-27.87	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

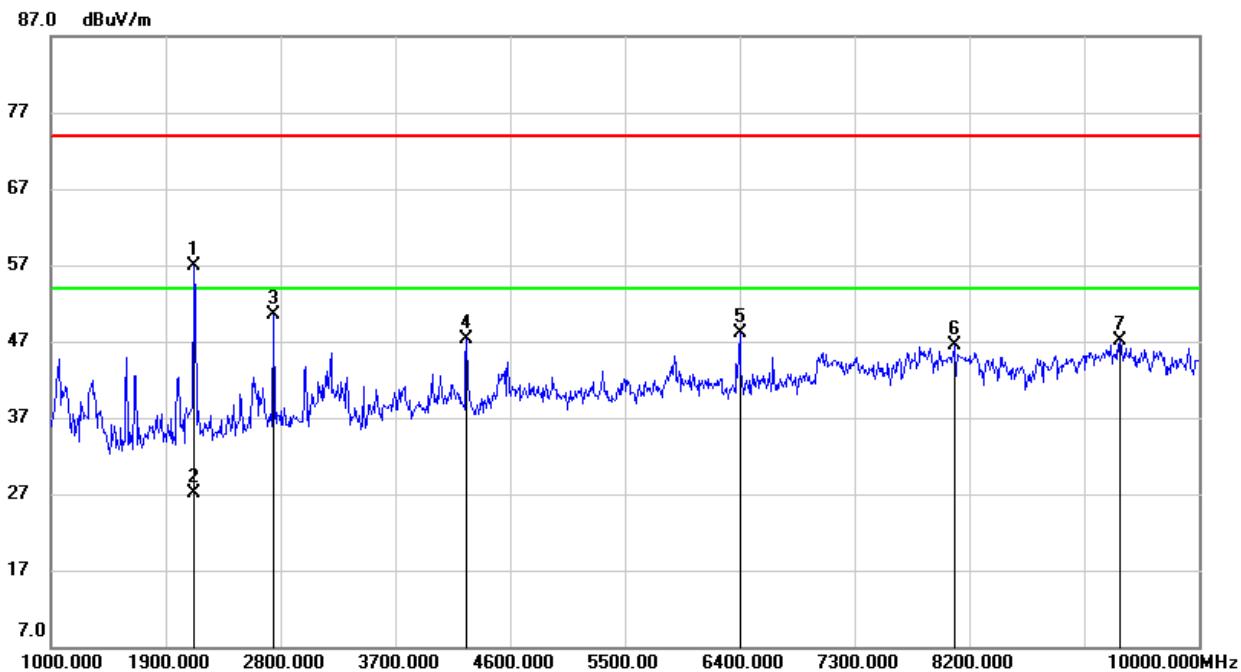**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2127.817	66.79	-9.93	56.86	74.00	-17.14	peak
2	2127.817	37.11	-9.93	27.18	54.00	-26.82	AVG
3	2746.000	58.02	-7.55	50.47	74.00	-23.53	peak
4	4258.000	50.33	-2.95	47.38	74.00	-26.62	peak
5	6400.000	44.39	3.66	48.05	74.00	-25.95	peak
6	8083.000	39.31	7.14	46.45	74.00	-27.55	peak
7	9379.000	38.07	9.10	47.17	74.00	-26.83	peak

Note: 1. Result = Reading + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

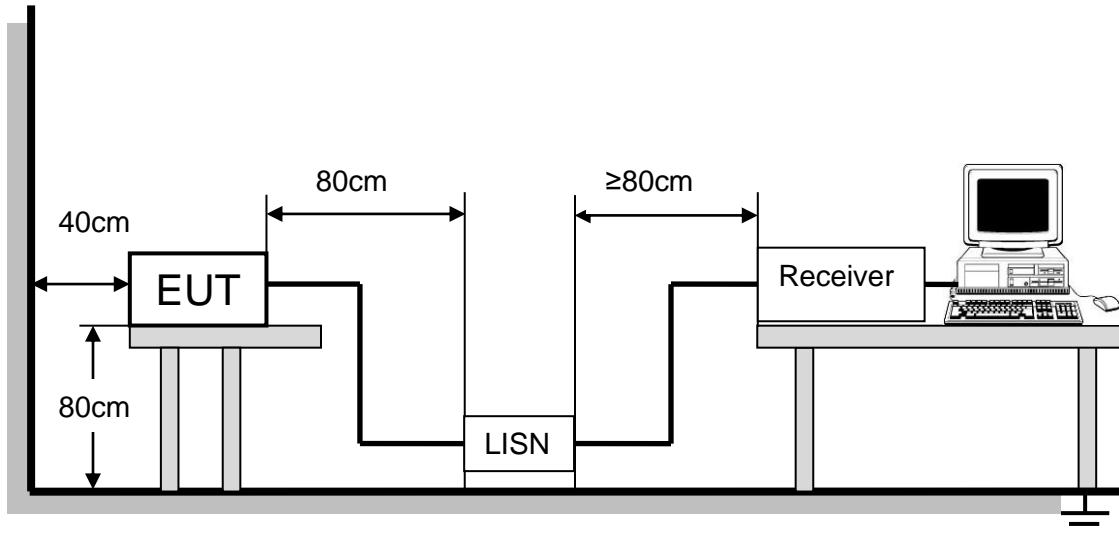


The EUT is put on a table of non-conducting material that is 80mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


### TEST ENVIRONMENT

Temperature	20°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC120V, 60Hz

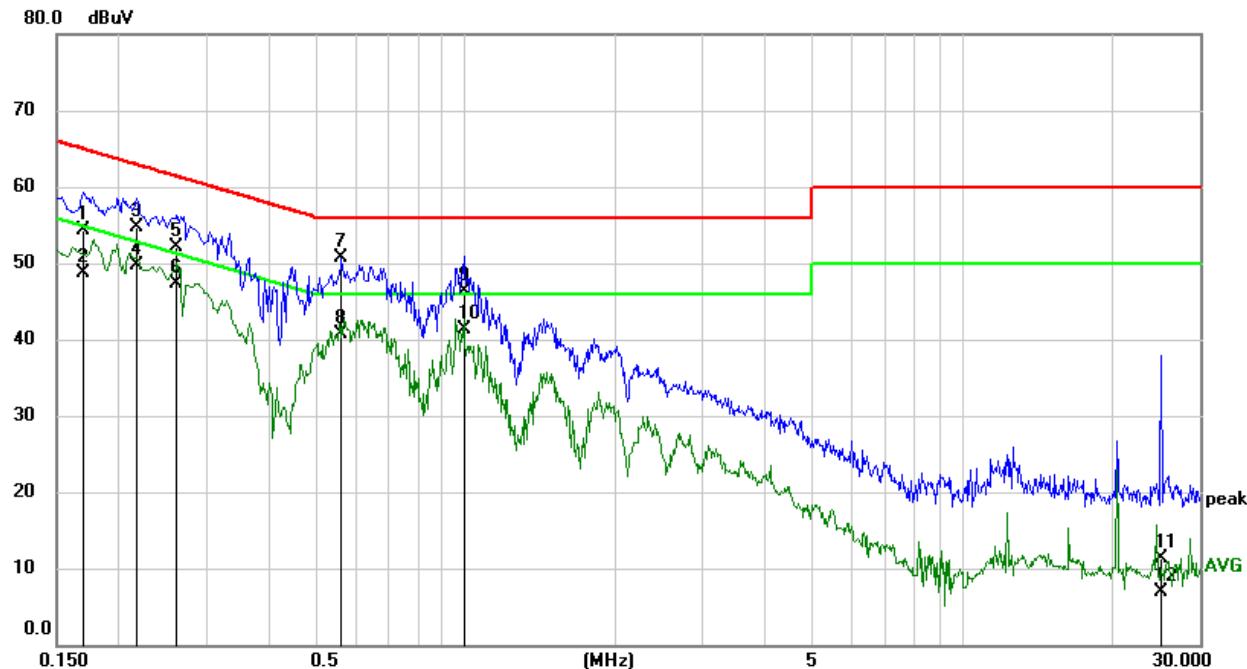**TEST RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)****LINE N RESULTS**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1700	44.69	9.59	54.28	64.96	-10.68	QP
2	0.1700	39.10	9.59	48.69	54.96	-6.27	AVG
3	0.2179	45.10	9.59	54.69	62.90	-8.21	QP
4	0.2179	40.21	9.59	49.80	52.90	-3.10	AVG
5	0.2620	42.51	9.59	52.10	61.37	-9.27	QP
6	0.2620	37.75	9.59	47.34	51.37	-4.03	AVG
7	0.5620	41.07	9.59	50.66	56.00	-5.34	QP
8	0.5620	31.17	9.59	40.76	46.00	-5.24	AVG
9	0.9939	36.72	9.60	46.32	56.00	-9.68	QP
10	0.9939	31.62	9.60	41.22	46.00	-4.78	AVG
11	25.0740	0.61	10.60	11.21	60.00	-48.79	QP
12	25.0740	-3.61	10.60	6.99	50.00	-43.01	AVG

Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

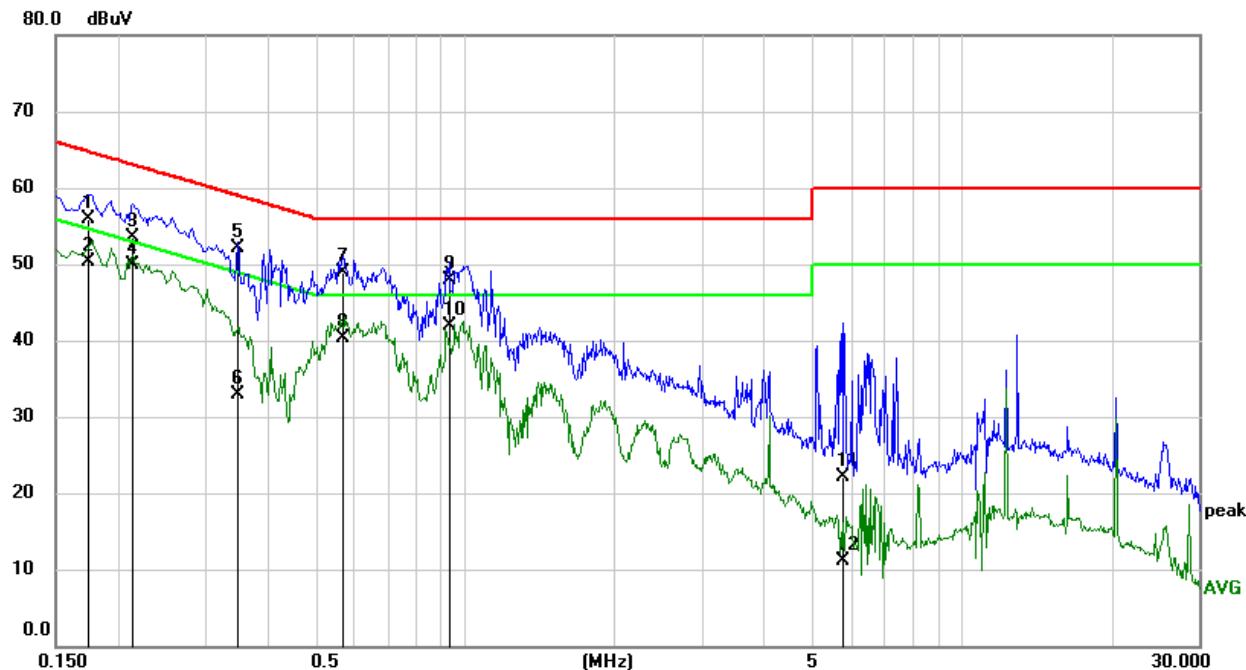**LINE L RESULTS**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1739	46.27	9.60	55.87	64.77	-8.90	QP
2	0.1739	40.69	9.60	50.29	54.77	-4.48	AVG
3	0.2139	43.89	9.59	53.48	63.05	-9.57	QP
4	0.2139	40.28	9.59	49.87	53.05	-3.18	AVG
5	0.3500	42.49	9.59	52.08	58.96	-6.88	QP
6	0.3500	23.26	9.59	32.85	48.96	-16.11	AVG
7	0.5700	39.40	9.59	48.99	56.00	-7.01	QP
8	0.5700	30.69	9.59	40.28	46.00	-5.72	AVG
9	0.9300	38.39	9.59	47.98	56.00	-8.02	QP
10	0.9300	32.28	9.59	41.87	46.00	-4.13	AVG
11	5.7900	12.52	9.65	22.17	60.00	-37.83	QP
12	5.7900	1.43	9.65	11.08	50.00	-38.92	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modes had been tested, but only the worst data recorded in the report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### RESULTS

Complies

**END OF REPORT**