



## Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V05

Report Template Revision Date: 2021-11-03

# RF Exposure Evaluation Report

**Report No.:** CQASZ20230600948E -02  
**Applicant:** Shenzhen Itian Technology Co.,Ltd.  
**Address of Applicant:** 6F, Building D, Phase 2nd, Anfeng Industrial Park, Dalang Street, Longhua District, Shenzhen, China  
**Equipment Under Test (EUT):**  
**Product:** POWER BANK  
**Model No.:** V11A, V11S  
**Test Model No.:** V11A  
**Brand Name:** ITIAN  
**FCC ID:** 2AUDO-V11AV11S  
**Standards:** 47 CFR Part 1.1307  
47 CFR Part 1.1310  
KDB 680106 D01 RF Exposure Wireless Charging Base App v03r01  
**Date of Receipt:** 2023-6-1  
**Date of Test:** 2023-6-1 to 2023-6-16  
**Date of Issue:** 2023-6-26  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:**

( Joe Wang )

**Reviewed By:**

( Timo Lei )

**Approved By:**

( Jack Ai )



## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230600948E -02	Rev.01	Initial report	2023-6-26

## 2 Contents

	Page
<b>1 VERSION .....</b>	<b>2</b>
<b>2 CONTENTS .....</b>	<b>3</b>
.....	3
<b>3 GENERAL INFORMATION .....</b>	<b>4</b>
3.1 CLIENT INFORMATION .....	4
3.2 GENERAL DESCRIPTION OF EUT .....	4
3.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	4
3.4 TEST ENVIRONMENT .....	5
3.5 DESCRIPTION OF SUPPORT UNITS .....	5
3.6 TEST LOCATION .....	6
3.7 TEST FACILITY .....	6
3.8 EQUIPMENT LIST .....	6
<b>4 RF EXPOSURE EVALUATION .....</b>	<b>7</b>
4.1 RF EXPOSURE COMPLIANCE REQUIREMENT .....	7
4.1.1 <i>Limits</i> .....	7
4.1.2 <i>Test Procedure</i> .....	7
4.1.3 <i>Test Setup</i> .....	8
4.1.4 <i>Test Results</i> .....	9
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>16</b>

### 3 General Information

#### 3.1 Client Information

Applicant:	Shenzhen Itian Technology Co.,Ltd.
Address of Applicant:	6F, Building D, Phase 2nd, Anfeng Industrial Park, Dalang Street, Longhua District, Shenzhen, China
Manufacturer:	Shenzhen Itian Technology Co.,Ltd.
Address of Manufacturer:	6F, Building D, Phase 2nd, Anfeng Industrial Park, Dalang Street, Longhua District, Shenzhen, China
Factory:	Shenzhen Itian Technology Co.,Ltd.
Address of Factory:	6F, Building D, Phase 2nd, Anfeng Industrial Park, Dalang Street, Longhua District, Shenzhen, China

#### 3.2 General Description of EUT

Product Name:	POWER BANK
Model No.:	V11A, V11S
Test Model No.:	V11A
Brand Name:	ITIAN
Software Version:	V11-V1
Hardware Version:	V11-V12
EUT Power Supply:	DC 9V 2A

#### 3.3 Product Specification subjective to this standard

Equipment Category:	Non-ISM frequency
Operation Frequency range:	110kHz~205kHz
Modulation Type:	Induction
Antenna Type:	Induction coil
Antenna Gain:	0dBi

Note:

1. In section 15.31(m), regards to the operating frequency range less 1 MHz.
2. Model No.: V11A, V11S

The circuit design, layout, components used and internal wiring are all the same, except for the color difference

### 3.4 Test Environment

Operating Environment:	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
Test Mode:	
Mode a:	Keep the EUT Wireless Out Put 3W

### 3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Apple Watch	Apple	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

### 3.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

### 3.7 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

### 3.8 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-520	SB9873	2022/9/9	2023/9/8
Magnetic field probe	HIOKI	3470	SB9058/04	2022/9/9	2023/9/8
E-field probe	Narda	EF0391	SB9059	2022/9/9	2023/9/8

## 4 RF Exposure Evaluation

### 4.1 RF Exposure Compliance Requirement

#### 4.1.1 Limits

According to FCC Part1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in part1.1307(b)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.


Note 4: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit .

#### 4.1.2 Test Procedure


For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm(Top) and 15cm(Edge). E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm(Top) and 15cm(Edge) measured from the center of the probe(s) to the edge of the device.

### 4.1.3 Test Setup

For mobile exposure conditions:

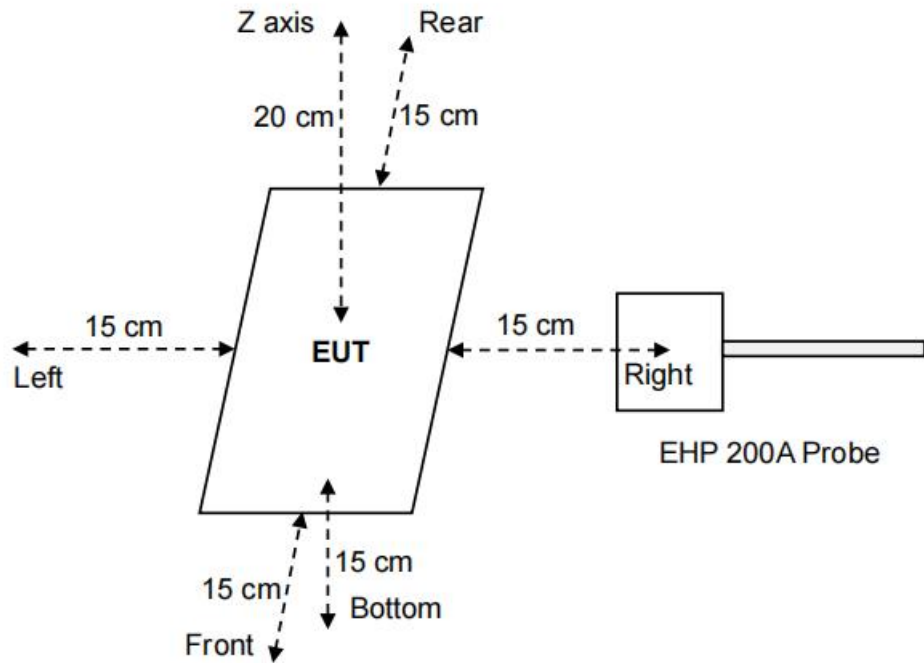

For portable exposure conditions:

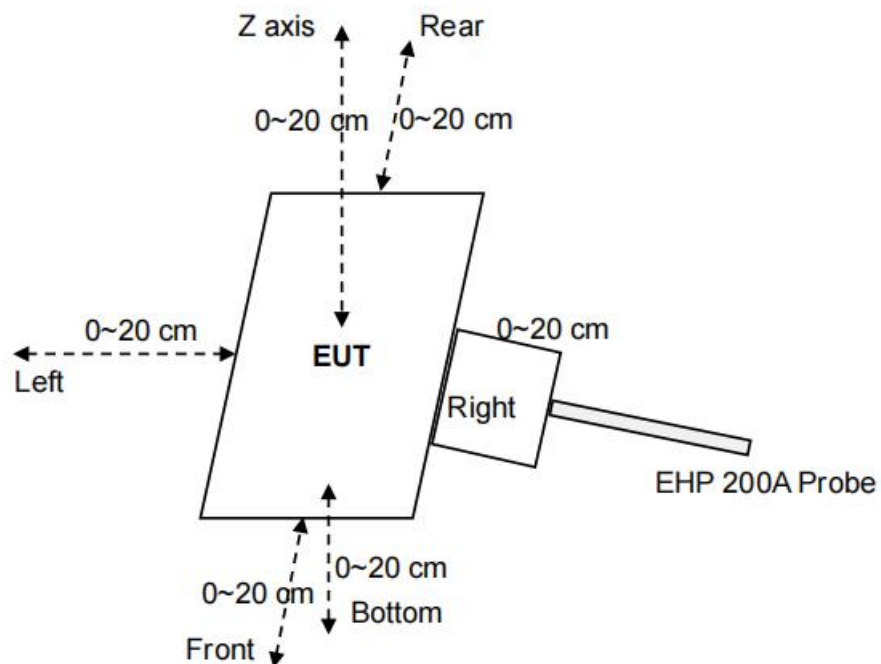

Note: Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting



from as close as possible out to 20 cm

#### 4.1.4 Test Results

The EUT does comply with item 5 KDB680106 D01 v03r01.

(1) Power transfer frequency is less than 1 MHz.

(Conform)

(2) Output power from each primary coil is less than or equal to 15 watts.

(Conform)

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

(Conform)

(4) Client device is placed directly in contact with the transmitter.

(Conform)

(5) . Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

(Conform)

(7) the H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm were also evaluated for portable use condition.

Test condition: Mode a

H-field strength test result:

test distance: 0cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.7726	1.63	76.3%
	Left	0.8356		
	Right	0.7445		
	Front	0.4841		
	Rear	1.2430		
	Bottom	0.8870		

test distance: 2cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.5815	1.63	73.7%
	Left	0.7300		
	Right	0.5382		
	Front	0.3153		
	Rear	1.2006		
	Bottom	0.7571		

test distance: 4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1246	1.63	59.8%
	Left	0.2248		
	Right	0.1549		
	Front	0.0908		
	Rear	0.9753		
	Bottom	0.5019		

test distance: 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1004	1.63	45.7%
	Left	0.1952		
	Right	0.1330		
	Front	0.0710		
	Rear	0.7446		
	Bottom	0.2436		

test distance: 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0766	1.63	28.4%
	Left	0.0877		
	Right	0.0743		
	Front	0.0744		
	Rear	0.4633		
	Bottom	0.0790		

test distance: 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0834	1.63	26.0%
	Left	0.0833		
	Right	0.0504		
	Front	0.0403		
	Rear	0.4240		
	Bottom	0.0829		

test distance: 12cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0496	1.63	4.60%
	Left	0.0378		
	Right	0.0542		
	Front	0.0603		
	Rear	0.0749		
	Bottom	0.0510		

test distance: 14cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0490	1.63	2.76%
	Left	0.0396		
	Right	0.0442		
	Front	0.0380		
	Rear	0.0450		
	Bottom	0.0535		

test distance: 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	2.74%
	Left	0.0404		
	Right	0.0402		
	Front	0.0436		
	Rear	0.0446		
	Bottom	0.0412		


test distance: 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	4.36%
	Left	0.0488		
	Right	0.0504		
	Front	0.0600		
	Rear	0.0711		
	Bottom	0.0493		

test distance: 20cm


Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0408	1.63	2.50%
	Left	0.0396		
	Right	0.0467		
	Front	0.0283		
	Rear	0.0408		
	Bottom	0.0313		

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

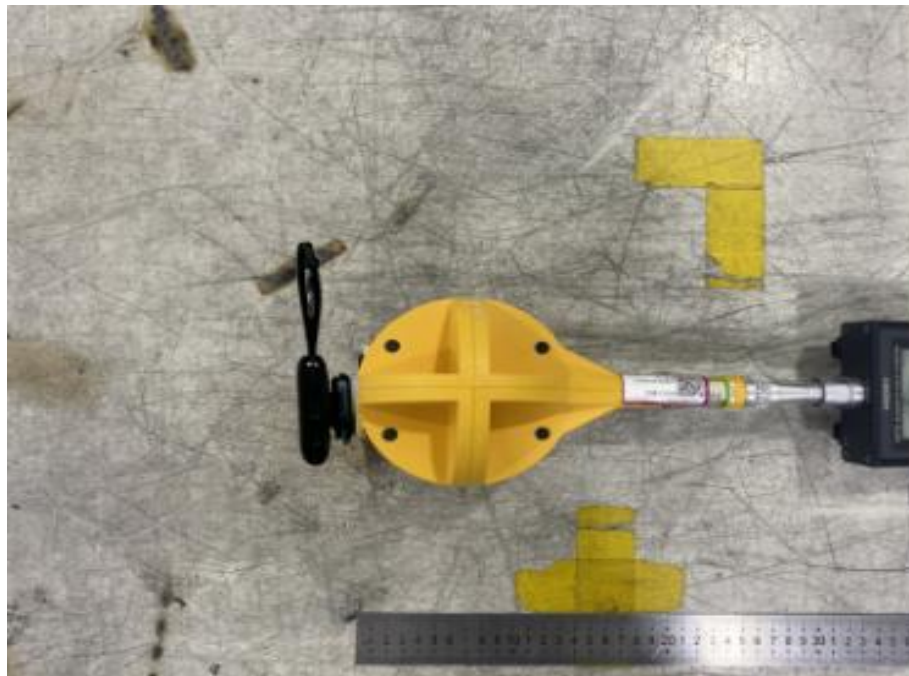





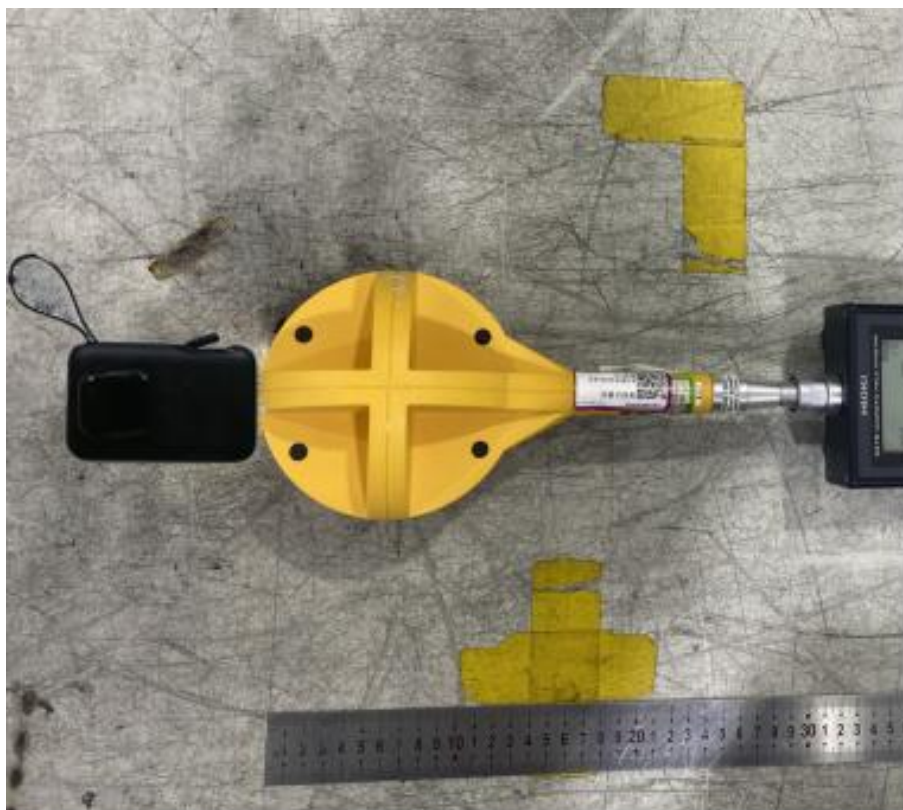

\*\*\* END OF REROPT \*\*\*