

## FCC 15.247 2.4 GHz Test Report

for

**Tokyo Drawing Ltd.**

**2-36-12, Sanno, Ota-ku, Tokyo Japan**

**Product Name : EXBeacon**  
**Model Name : TDW00979**  
**Brand : Todraw**  
**FCC ID : 2AUDX-BLE0001**

**Prepared by: : AUDIX Technology Corporation,  
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.  
The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
<b>1. REVISION RECORD OF TEST REPORT .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
3.1. Description of Application .....	7
3.2. Description of EUT .....	8
3.3. Antenna Information .....	9
3.4. EUT Specifications Assessed in Current Report.....	9
3.5. Descriptions of Key Components.....	9
3.6. Data Rate Relative to Output Power.....	10
3.7. Test Configuration.....	10
3.8. Tested Supporting System List.....	12
3.9. Setup Configuration.....	12
3.10. Operating Condition of EUT .....	13
3.11. Description of Test Facility .....	13
3.12. Measurement Uncertainty .....	13
<b>4. MEASUREMENT EQUIPMENT LIST.....</b>	<b>14</b>
4.1. Conducted Emission Measurement .....	14
4.2. Radiated Emission Measurement .....	15
4.3. RF Conducted Measurement .....	16
<b>5. CONDUCTED EMISSION.....</b>	<b>17</b>
5.1. Block Diagram of Test Setup .....	17
5.2. Conducted Emission Limit.....	17
5.3. Test Procedure .....	17
5.4. Test Results .....	17
<b>6. RADIATED EMISSION .....</b>	<b>18</b>
6.1. Block Diagram of Test Setup .....	18
6.2. Radiated Emission Limits.....	19
6.3. Test Procedure .....	20
6.4. Measurement Result Explanation.....	21
6.5. Test Results .....	21
<b>7. 6dB BANDWIDTH .....</b>	<b>22</b>
7.1. Block Diagram of Test Setup .....	22
7.2. Specification Limits.....	22
7.3. Test Procedure .....	22
7.4. Test Results .....	22
<b>8. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>23</b>
8.1. Block Diagram of Test Setup .....	23
8.2. Specification Limits.....	23
8.3. Test Procedure .....	24
8.4. Test Results .....	24
<b>9. EMISSION LIMITATIONS .....</b>	<b>25</b>

---

9.1. Block Diagram of Test Setup .....	25
9.2. Specification Limits.....	25
9.3. Test Procedure .....	25
9.4. Test Results .....	26
<b>10. POWER SPECTRAL DENSITY .....</b>	<b>27</b>
10.1. Block Diagram of Test Setup .....	27
10.2. Specification Limits.....	27
10.3. Test Procedure .....	27
10.4. Test Results .....	27
<b>11. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>28</b>

APPENDIX A TEST DATA AND PLOTS  
APPENDIX B TEST PHOTOGRAPHS

## TEST REPORT CERTIFICATION

Applicant : Tokyo Drawing Ltd.  
Manufacturer : Tokyo Drawing Ltd.  
Factory : Tokyo Drawing Ltd.  
EUT Description  
(1) Product : EXBeacon  
(2) Model : TDW00979  
(3) Brand : Todraw  
(4) Power Supply: (1)DC 5V, 2A (Via AC Adapter)  
(2)DC 5V or 3V (Via DC Power Supply)

Applicable Standards:

47 CFR FCC Part 15 Subpart C  
ANSI C63.10:2013

**Audix Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2019. 09. 11

Reviewed by:  (Annie Yu/Administrator)

Approved by:  (Ben Cheng/Manager)

## 1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2019. 09. 11	Original Report	EM-F190284

## 2. SUMMARY OF TEST RESULTS

<b>Rule</b>	<b>Description</b>	<b>Results</b>
15.207	Conducted Emission	<b>PASS</b>
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	<b>PASS</b>
15.247(a)(2)	6dB Bandwidth	<b>PASS</b>
15.247(b)(3)	Maximum Peak Output Power	<b>PASS</b>
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	<b>PASS</b>
15.247 (e)	Peak Power Spectral Density	<b>PASS</b>
15.203	Antenna Requirement	<b>Compliance</b>

### 3. GENERAL INFORMATION

#### 3.1. Description of Application

Applicant	Tokyo Drawing Ltd. 2-36-12, Sanno, Ota-ku, Tokyo Japan
Manufacturer	Tokyo Drawing Ltd. 2-36-12, Sanno, Ota-ku, Tokyo Japan
Factory	Tokyo Drawing Ltd. 2-36-12, Sanno, Ota-ku, Tokyo Japan
Product	EXBeacon
Model	TDW00979
Brand	Todraw

### 3.2. Description of EUT

Test Model	TDW00979
Serial Number	N/A
Power Rating	(1)DC 5V, 2A (Via AC Adapter) (2)DC 5V or 3V (Via DC Power Supply)
RF Features	BLE
Transmit Type	1T1R
Sample Status	Production
Date of Receipt	2019. 08. 05
Date of Test	2019. 08. 07 ~ 09. 11
Interface Ports of EUT	<ul style="list-style-type: none"><li>• One DC Input Port</li></ul>
Accessories Supplied	<ul style="list-style-type: none"><li>• AC Adapter</li></ul>



### 3.3. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	---	Todraw	MicroStripAntenna	2400	1.0
				2440	0.8
				2480	0.4

### 3.4. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1/2

Channel List							
BLE							
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

### 3.5. Descriptions of Key Components

Item	Supplier	Model / Type	Character
BLE Module	TAIYO YUDEN	EYSHCNZWZ	---
AC Adapter	UNIFIVE	UU311-0520	I/P: AC 100-240V, 50/60Hz, 0.3A O/P: DC 5V, 2A Power Cord: Unshielded, Undetachable, 1.5m (Wall-Mount 2C)

### 3.6. Data Rate Relative to Output Power


BLE			
Channel	Modulation	Date Rate(Mbps)	Power(dBm)
17	GFSK	2	4.19

Note: Above results are assessed in peak power.

### 3.7. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
BLE	---	1.000	---

Note: When duty cycle is less than 98% (0.98) that duty cycle factor  $10\log(1/x)$  is needed to add in conducted test items measured in average detector.

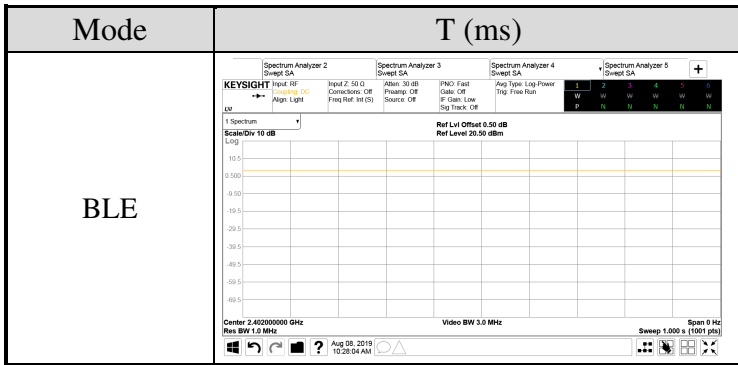

Power Source	Voltage (Vdc)	Test Voltage
CN331	5	DC 5V (via DC Power Supply)
CN301	3	3V (via DC Power Supply)
CN351	5	AC 120V, 60Hz (via AC Adapter)

AC Conduction	
Test Case	Normal operation

Item	Mode	Data Rate	Test Channel	
Radiated Test Case	Radiated Band Edge <sup>Note</sup>	BLE	2Mbps	37/39
	Radiated Spurious Emission <sup>Note</sup>	BLE	2Mbps	37/17/39
Conducted Test Case	6dB/Occupied Bandwidth	BLE	1Mbps	37/17/39
		BLE	2Mbps	37/17/39
	Peak Output Power	BLE	1Mbps	37/17/39
		BLE	2Mbps	37/17/39
	Band Edge	BLE	2Mbps	37/39
	Spurious Emission	BLE	2Mbps	37/17/39
Peak Power Spectral Density	BLE	2Mbps	37/17/39	
Remark: According to the peak output power measured, the 2Mbps is the worst mode for measuring other conducted tests.				

Note :  Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:  Lie  Side  Stand

### 3.8. Tested Supporting System List

#### 3.8.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	Notebook PC	hp	TPN-Q189	5CD8175992	Contains FCC ID: PD93168NG Contains IC: 1000M-3168NG
2.	DC Power Supply	TOP WARD	3303A	721773	N/A

#### 3.8.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	USB Cable: Shielded, Detachable, 1.5m Adapter: Chicony, M/N CPA09-A065N1, DC Cord : Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord : Unshielded, Detachable, 1.8m
2.	Power Wire: Unshielded, Detachable, 0.5m Power Wire : Unshielded, Detachable, 1.8m*2

### 3.9. Setup Configuration


#### 3.9.1. EUT Configuration for Power Line & Radiated Emission

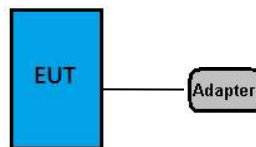


#### 3.9.2. EUT Configuration for Radiated Emission

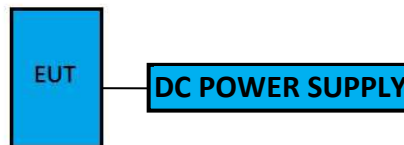

or

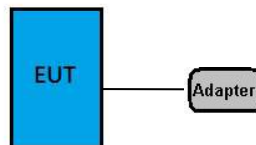

#### 3.9.3. EUT Configuration for RF Conducted Test Items

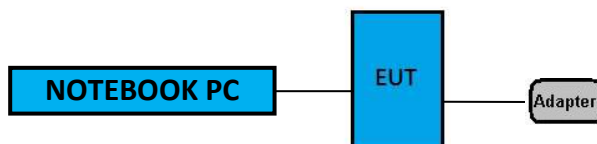

### 3.10. Operating Condition of EUT

Test program “putty” is used for enabling EUT BLE function under continues transmitting and choosing data rate/ channel.

### 3.11. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.7 Shielded Room (2) No.3 3m Semi Anechoic Chamber (3) Fully Anechoic Chamber

### 3.12. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.50dB
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty =  $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101276	2019. 03. 23	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2019. 07. 10	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-1539-3	2019. 01. 22	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	101495	2019. 01. 12	1 Year
5.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.7 S/R	2019. 04. 20	1 Year
6.	Signal Cable	Thermax/CD T	RG-142	CE-07	2019. 05. 24	1 Year
7.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

## 4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2019. 01. 30	1 Year
2.	Spectrum Analyzer	Agilent	N9010A-526	MY52220368	2018. 11. 02	1 Year
3.	Test Receiver	R&S	ESCI7	100923	2019. 03. 27	1 Year
4.	Amplifier	HP	8449B	3008A02678	2019. 03. 07	1 Year
5.	Amplifier	HP	8447D	2944A06669	2019. 05. 16	1 Year
6.	Bilog Antenna	TESEQ	CBL6112D	33820	2019. 01. 19	1 Year
7.	Loop Antenna	R&S	HFH2-Z2	891847/27	2017. 12. 18	2 Years
8.	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00135902	2019. 03. 13	1 Year
9.	Horn Antenna	COM-POWER	AH-840	101092	2019 .05. 14	1 Year
10.	2.4GHz Notch Filter	K&L	7NSL10-2441.5/E130.5-O/O	1	2019. 07. 23	1 Year
11.	3GHz Notch Filter	Microwave	H3G018G1	484796	2018. 08. 22	1 Year
12.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.3 3m A/C	2019. 04. 20	1 Year
13.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2019. 04. 20	1 Year
14.	Signal Cable	HUBER+SUHNER	S07212BD	ACC3CL	2019. 05. 24	1 Year
15.	RF Signal Cable	EMCI	EMC 104	180606	2019. 02. 22	1 Year
16.	RF Signal Cable	HUBER+SUHNER	SUCOFLEX 104	MY11671/4	2019. 02. 22	1 Year
17.	RF Signal Cable	HUBER+SUHNER	SUCOFLEX 104	326778/4	2019. 02. 22	1 Year
18.	RF Signal Cable	HUBER+SUHNER	SUCOFLEX 104	MY11662/4	2019. 02. 22	1 Year
19.	RF Signal Cable	HUBER+SUHNER	SUCOFLEX 102	MY1493/2	2019. 02. 01	1 Year
20.	RF Signal Cable	HUBER+SUHNER	SUCOFLEX 102	MY1495/2	2019. 02. 01	1 Year
21.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.
22.	Test Software	Audix	e3	V6.110601	N.C.R.	N.C.R.

### 4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2019. 05. 06	1 Year
2.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2019. 04. 20	1 Year




## 5. CONDUCTED EMISSION

### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block Diagram of EUT

Indicated as section 3.9

#### 5.1.2. Shielded Room Setup Diagram

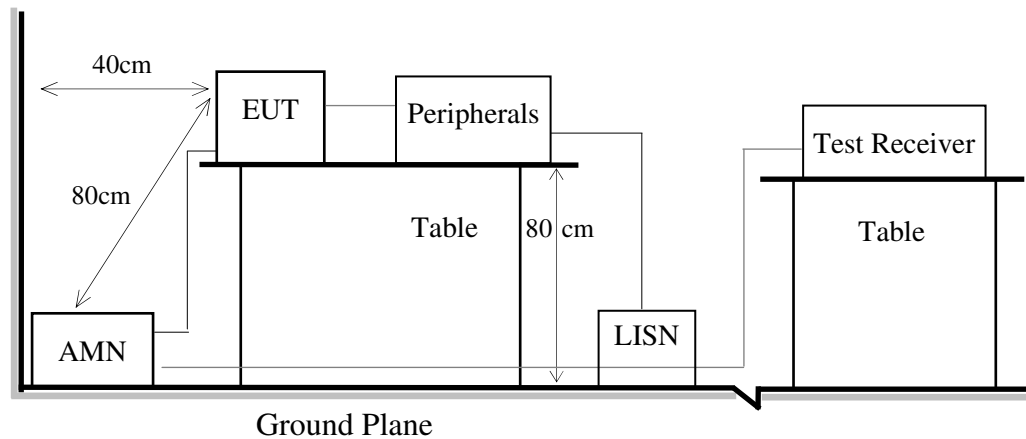

### 5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB $\mu$ V	56 ~ 46 dB $\mu$ V
500kHz ~ 5MHz	56 dB $\mu$ V	46 dB $\mu$ V
5MHz ~ 30MHz	60 dB $\mu$ V	50 dB $\mu$ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

### 5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

### 5.4. Test Results

Please refer to Appendix A.


## 6. RADIATED EMISSION

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of EUT

Indicated as section 3.9


#### 6.1.2. Setup Diagram for 9kHz-30MHz

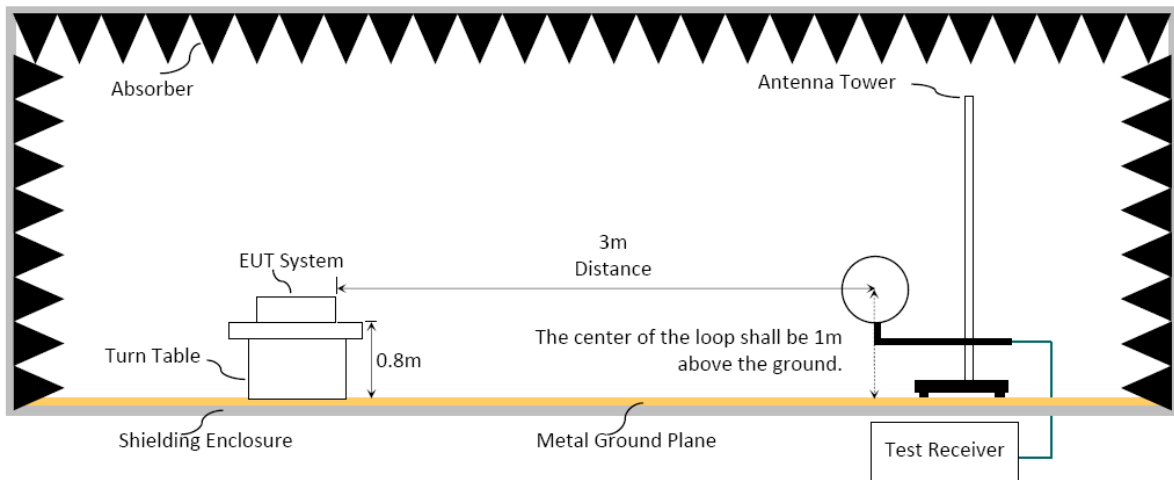

#### 6.1.3. Setup Diagram for 30-1000 MHz

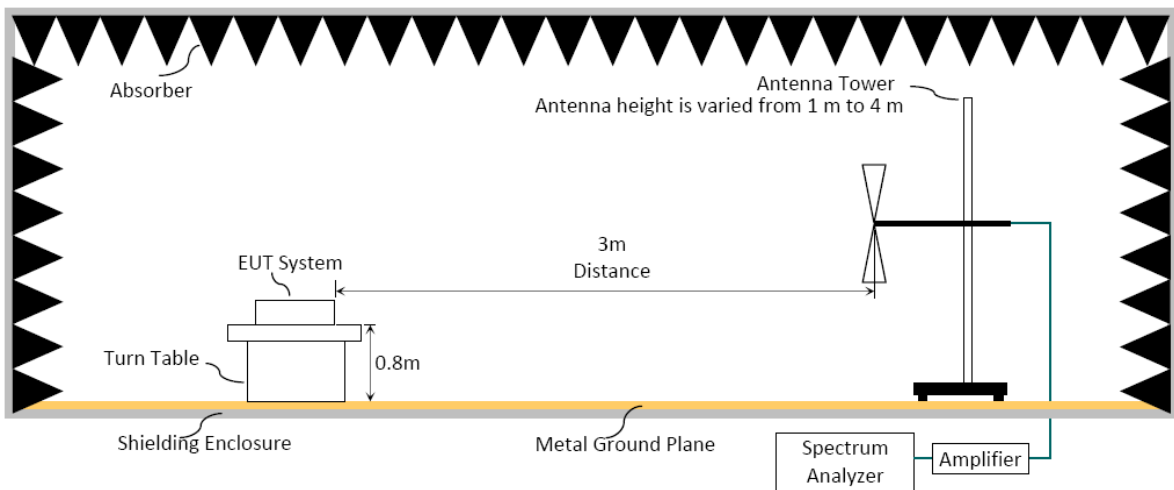

### 6.1.4. Setup Diagram for above 1GHz

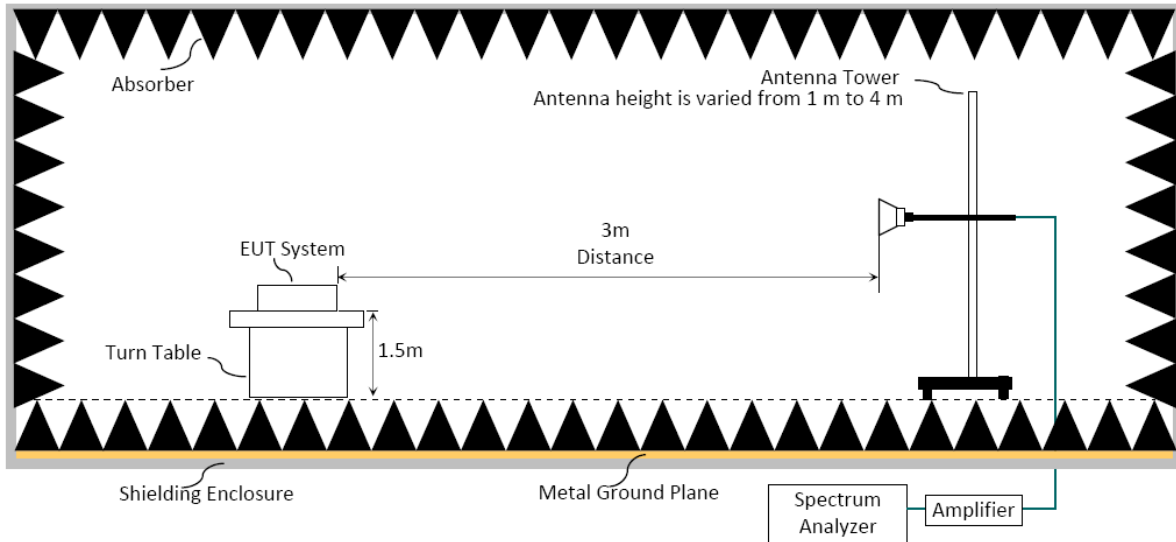

## 6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

### 6.3. Test Procedure

#### Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)  
Q.P. (490kHz-30MHz)

#### Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

#### Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

#### Frequency above 1GHz to 10th harmonic (up to 25 GHz):

##### Peak Detector:

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

**Average Detector:****■ Option 1:**

(1) RBW = 1MHz

(2) VBW  $\geq$  1/ T.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting (kHz)
BLE	1.00	1.000000	10Hz

N/A: 1/ T is not implemented when duty cycle presented in section 3.7 is  $\geq$ 98 %.

(1) Detector = Peak.

(2) Sweep time = auto.

(3) Trace mode = max hold.

(4) Allow sweeps to continue until the trace stabilizes.

**□ Option 2:**


Average Emission Level = Peak Emission Level + D.C.C.F.

**6.4. Measurement Result Explanation****■** Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading**■** Average Emission Level = Antenna Factor + Cable Loss + Meter Reading**□** Average Emission Level = Peak Emission Level + DCCFDuty Cycle Correction Factor (DCCF) =  $20\log(TX_{on}/TX_{on+off})$  presented in section 3.7**□** ERP = Peak Emission Level - 95.2dB - 2.14dB**6.5. Test Results**

Please refer to Appendix A.

## 7. 6dB BANDWIDTH

### 7.1. Block Diagram of Test Setup

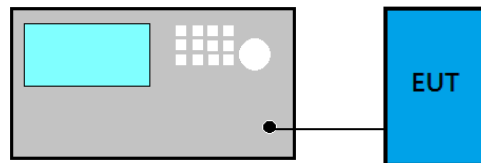

### 7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

### 7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.


### 7.4. Test Results

Please refer to Appendix A


## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1. Block Diagram of Test Setup

- For WLAN Function

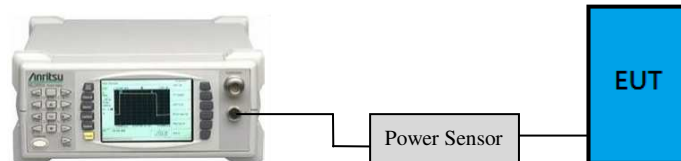

- For BLE Function

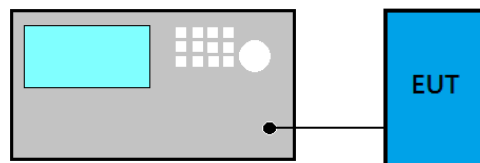

### 8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

### 8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

**■ PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

**■ Maximum peak conducted output power method:**

- (1) Set the RBW  $\geq$  DTS bandwidth
- (2) Set VBW  $\geq 3 \times$  RBW
- (3) Set span  $\geq 3 \times$  RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

**Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .

**Method AVGSA-2 (Spectrum channel power)**

- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .


### 8.4. Test Results

Please refer to Appendix A



## 9. EMISSION LIMITATIONS

### 9.1. Block Diagram of Test Setup

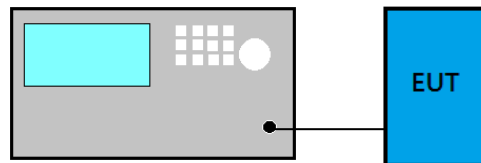

### 9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

### 9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### ■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

#### ■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

#### 9.4. Test Results

Please refer to Appendix A

## 10. POWER SPECTRAL DENSITY

### 10.1. Block Diagram of Test Setup

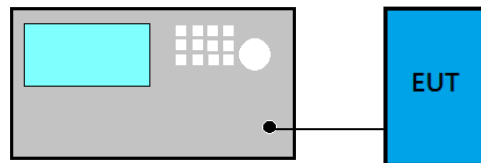

### 10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

### 10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

#### ■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### □ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 10.4. Test Results

Please refer to Appendix A



## **11.DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**



*Audix Technology Corp.*  
*No. 53-11, Dingfu, Linkou, Dist.,*  
*New Taipei City 244, Taiwan*

*Tel: +886 2 26099301*  
*Fax: +886 2 26099303*

---

# APPENDIX A

## TEST DATA AND PLOTS

(Model: TDW00979)

---

---


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	11
A.2.3 Emissions in Non-restricted Frequency Bands:.....	11
<b>A.3 6dB BANDWIDTH</b> .....	<b>12</b>
A.3.1 Emission Bandwidth Result.....	12
A.3.2 Measurement Plots .....	13
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>14</b>
A.4.1 Peak Output Power .....	14
A.4.2 Measurement Plots .....	15
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>16</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>19</b>
A.6.1 Power Spectral Density Result .....	19
A.6.2 Measurement Plots .....	19

## A.1 CONDUCTED EMISSION

Test Date	2019/08/19	Temp./Hum.	26°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

Data: 2 File: D:\test data\REPORT\2019\C1M1908XX\C1M1908038\C1M1908038-C-D-RF.EM6 (2)

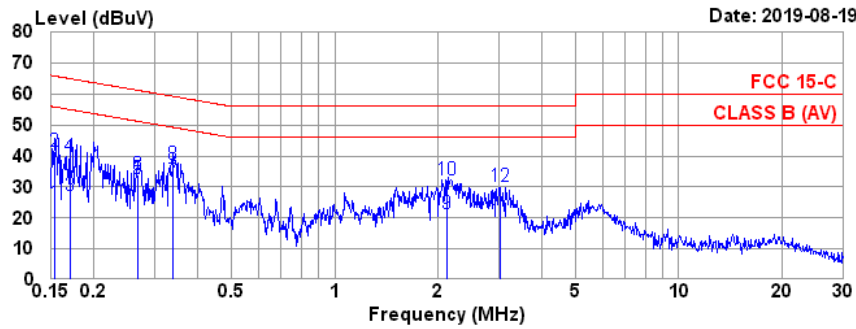


Site no. : No.7 Shielded Room Data no. : 2  
 Condition : ESH2-Z5 366(ADAPTER) Phase : NEUTRAL  
 Limit : FCC 15-C  
 Env. / Ins. : 26°C / 50% ESCI (1276) Engineer : GARY-LIN  
 EUT : TDW00979  
 Power Rating : 120Vac/60Hz  
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.153	0.15	0.04	9.86	14.87	24.92	55.82	30.90	Average
2	0.153	0.15	0.04	9.86	31.36	41.41	65.82	24.41	QP
3	0.170	0.15	0.04	9.86	17.26	27.31	54.94	27.63	Average
4	0.170	0.15	0.04	9.86	29.58	39.63	64.94	25.31	QP
5	0.267	0.16	0.03	9.86	22.49	32.54	51.20	18.66	Average
6	0.267	0.16	0.03	9.86	23.96	34.01	61.20	27.19	QP
7	0.339	0.17	0.04	9.86	21.76	31.83	49.22	17.39	Average
8	0.339	0.17	0.04	9.86	27.09	37.16	59.22	22.06	QP
9	2.127	0.24	0.07	9.86	11.07	21.24	46.00	24.76	Average
10	2.127	0.24	0.07	9.86	22.25	32.42	56.00	23.58	QP
11	3.022	0.27	0.09	9.86	8.77	18.99	46.00	27.01	Average
12	3.022	0.27	0.09	9.86	20.14	30.36	56.00	25.64	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2019/08/19	Temp./Hum.	26°C/50%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

Data: 1 File: D:\test data\REPORT\2019\C1M1908XXX\C1M1908038\C1M1908038-C-D-RF.EM6 (2) Date: 2019-08-19

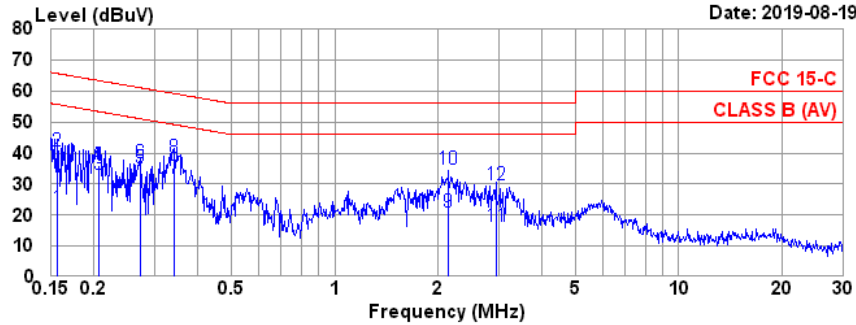

Site no. : No.7 Shielded Room Data no. : 1  
 Condition : ESH2-Z5 366(ADAPTER) Phase : LINE  
 Limit : FCC 15-C  
 Env. / Ins. : 26°C / 50% ESCI (1276) Engineer : GARY-LIN  
 EUT : TDW00979  
 Power Rating : 120Vac/60Hz  
 Test Mode : Operating

	AMN	Cable	Pulse	Emission		Limits	Margin	Remark
Freq. (MHz)	Factor (dB)	Loss (dB)	Att. (dB)	Reading (dBμV)	Level (dBμV)	(dBμV)	(dB)	
1	0.156	0.06	0.04	9.86	12.06	55.65	33.63	Average
2	0.156	0.06	0.04	9.86	30.72	65.65	24.97	QP
3	0.207	0.06	0.03	9.86	23.26	53.32	20.11	Average
4	0.207	0.06	0.03	9.86	26.14	63.32	27.23	QP
5	0.272	0.07	0.03	9.86	25.29	51.07	15.82	Average
6	0.272	0.07	0.03	9.86	26.81	61.07	24.30	QP
7	0.341	0.08	0.04	9.86	21.84	49.18	17.36	Average
8	0.341	0.08	0.04	9.86	28.68	59.18	20.52	QP
9	2.133	0.14	0.07	9.86	11.04	46.00	24.89	Average
10	2.133	0.14	0.07	9.86	24.61	56.00	21.32	QP
11	2.946	0.17	0.08	9.86	6.12	46.00	29.77	Average
12	2.946	0.17	0.08	9.86	19.46	56.00	26.43	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



## A.2 RADIATED EMISSION

Test Date	2019/08/07 ~ 09/02	Temp./Hum.	23 ~ 25°C/47 ~ 50%
Test Voltage	(1)AC 120V, 60Hz (via AC Adapter) (2)DC 3V (via DC Power Supply) (3)DC 5V (via DC Power Supply)		

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Mode	BLE	Frequency	TX 2440MHz
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
30.97	24.63	0.46	1.28	26.37	40.00	13.63	Peak
142.52	17.45	1.03	7.20	25.68	43.50	17.82	Peak
429.64	22.74	1.94	1.52	26.20	46.00	19.80	Peak
586.78	24.59	2.34	1.73	28.66	46.00	17.34	Peak
672.14	25.36	2.53	1.86	29.75	46.00	16.25	Peak
809.88	26.48	2.85	2.10	31.43	46.00	14.57	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
42.61	18.03	0.54	19.87	38.44	40.00	1.56	Peak
52.31	13.84	0.60	18.05	32.49	40.00	7.51	Peak
132.82	17.91	0.99	6.89	25.79	43.50	17.71	Peak
263.77	18.90	1.46	3.18	23.54	46.00	22.46	Peak
504.33	23.67	2.12	2.49	28.28	46.00	17.72	Peak
869.05	26.95	2.96	1.57	31.48	46.00	14.52	Peak

Mode	BLE	Frequency	TX 2440MHz
Test Voltage	DC 3V (via DC Power Supply)		

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
129.91	18.03	0.97	29.33	20.38	43.50	23.12	Peak
426.73	22.70	1.93	29.99	26.28	46.00	19.72	Peak
572.23	24.44	2.31	30.79	28.71	46.00	17.29	Peak
643.04	25.11	2.47	30.63	29.38	46.00	16.62	Peak
861.29	26.88	2.95	30.11	31.52	46.00	14.48	Peak
956.35	27.58	3.16	29.53	32.10	46.00	13.90	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.91	23.50	0.47	35.28	30.94	40.00	9.06	Peak
50.37	14.26	0.59	41.13	27.69	40.00	12.31	Peak
165.80	16.03	1.12	40.39	29.75	43.50	13.75	Peak
179.38	15.28	1.17	37.41	26.13	43.50	17.37	Peak
860.32	26.88	2.94	30.39	31.78	46.00	14.22	Peak
934.04	27.44	3.11	29.51	31.83	46.00	14.17	Peak

Mode	BLE	Frequency	TX 2440MHz
Test Voltage	DC 5V (via DC Power Supply)		

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
183.26	15.41	1.18	32.89	21.76	43.50	21.74	Peak
472.32	23.29	2.04	30.24	26.99	46.00	19.01	Peak
601.33	24.74	2.38	30.64	28.89	46.00	17.11	Peak
752.65	26.02	2.72	29.89	29.96	46.00	16.04	Peak
833.16	26.67	2.89	30.10	31.17	46.00	14.83	Peak
945.68	27.51	3.13	29.41	31.85	46.00	14.15	Peak


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.91	23.50	0.47	34.28	29.94	40.00	10.06	Peak
50.37	14.26	0.59	40.61	27.17	40.00	12.83	Peak
164.83	16.10	1.12	39.61	29.04	43.50	14.46	Peak
180.35	15.28	1.17	37.34	26.06	43.50	17.44	Peak
810.85	26.48	2.85	30.56	31.34	46.00	14.66	Peak
950.53	27.56	3.15	29.97	32.50	46.00	13.50	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

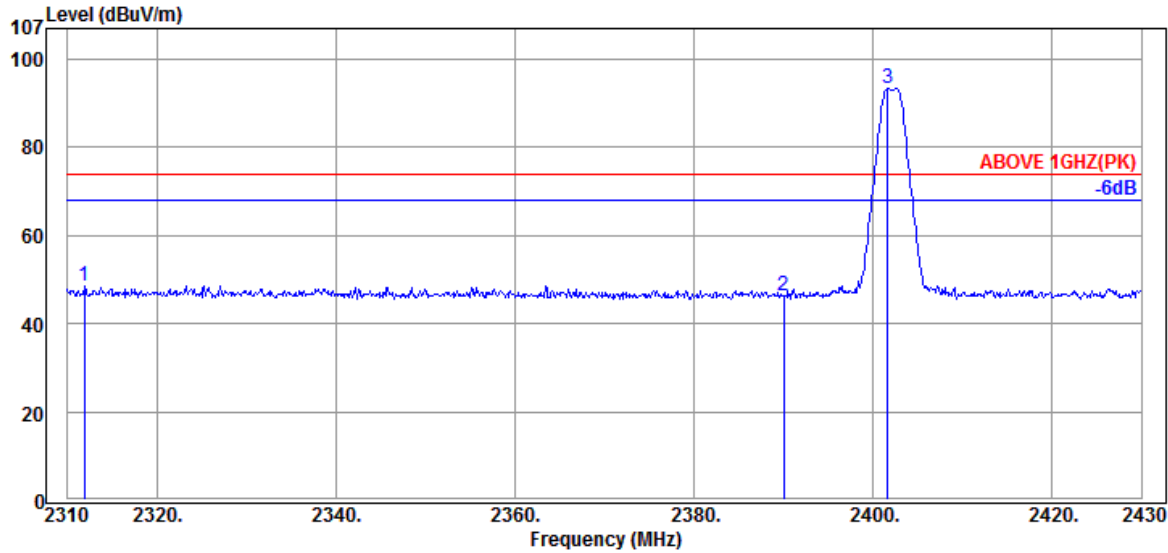

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2311.92	32.00	8.15	8.37	48.52	74.00	25.48	Peak
2390.04	32.00	8.17	6.29	46.46	74.00	27.54	Peak
2401.68	32.00	8.17	53.19	93.36	---	---	Peak

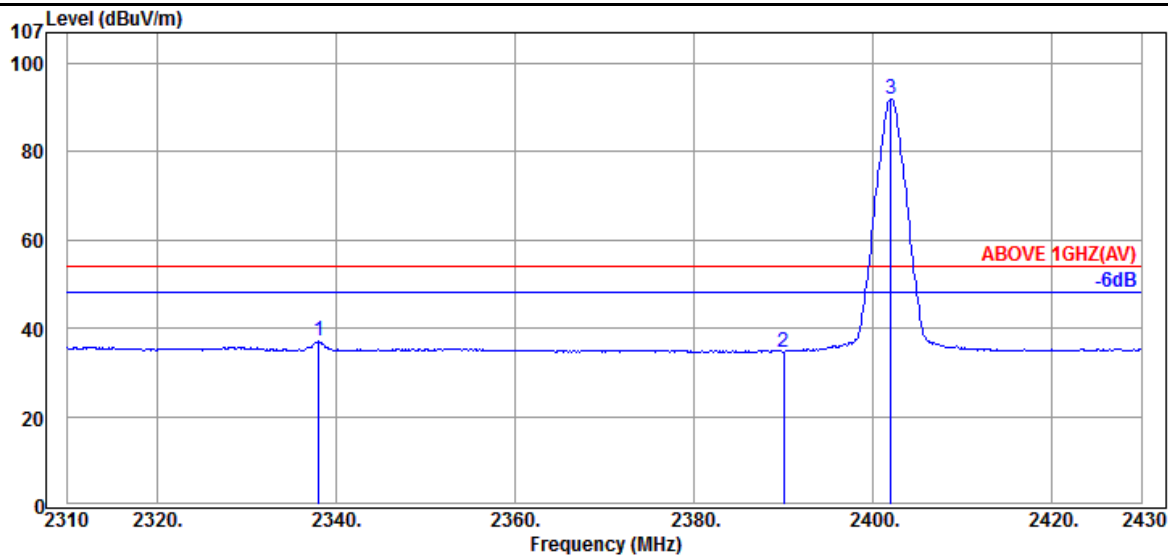

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2338.08	32.00	8.16	-3.19	36.97	54.00	17.03	Average
2390.04	32.00	8.17	-5.54	34.63	54.00	19.37	Average
2402.04	32.00	8.17	51.69	91.86	---	---	Average

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

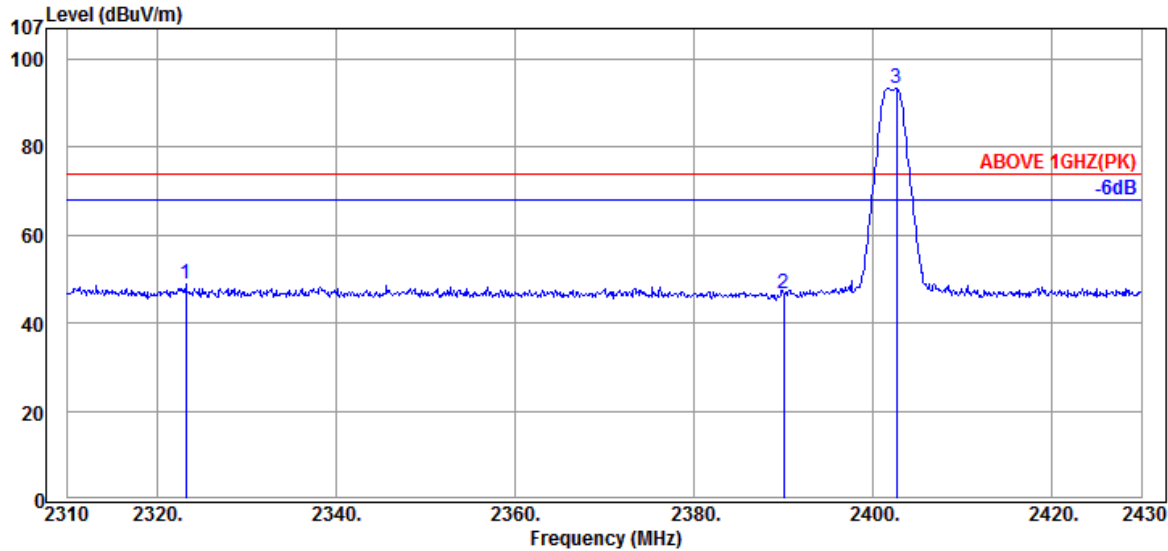

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2323.20	32.00	8.15	8.62	48.77	74.00	25.23	Peak
2390.04	32.00	8.17	6.41	46.58	74.00	27.42	Peak
2402.64	32.23	8.18	53.00	93.41	---	---	Peak

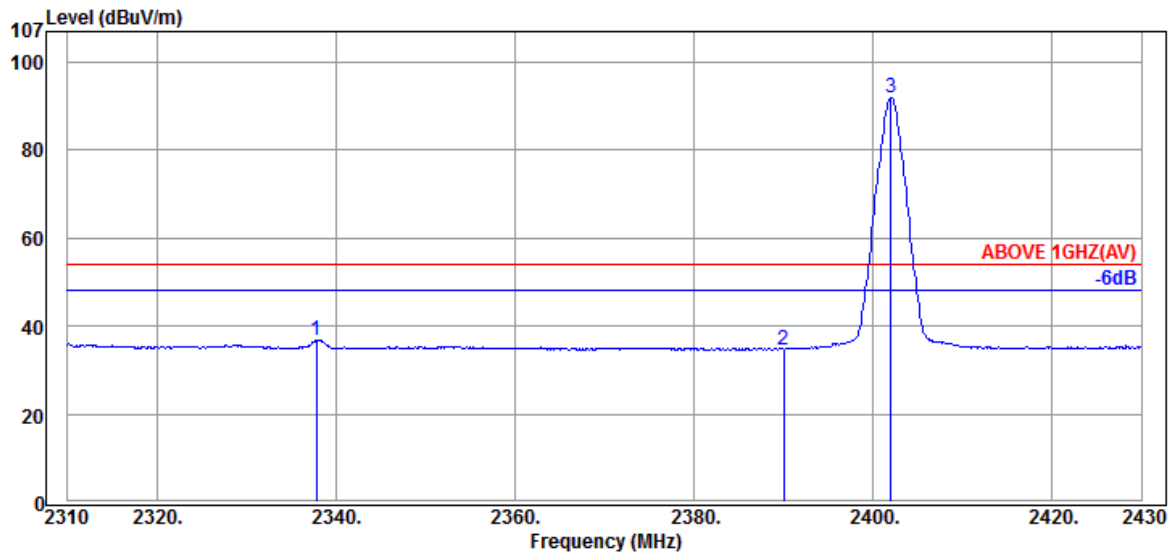

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2337.84	32.00	8.16	-3.26	36.90	54.00	17.10	Average
2390.04	32.00	8.17	-5.49	34.68	54.00	19.32	Average
2402.04	32.00	8.17	51.71	91.88	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

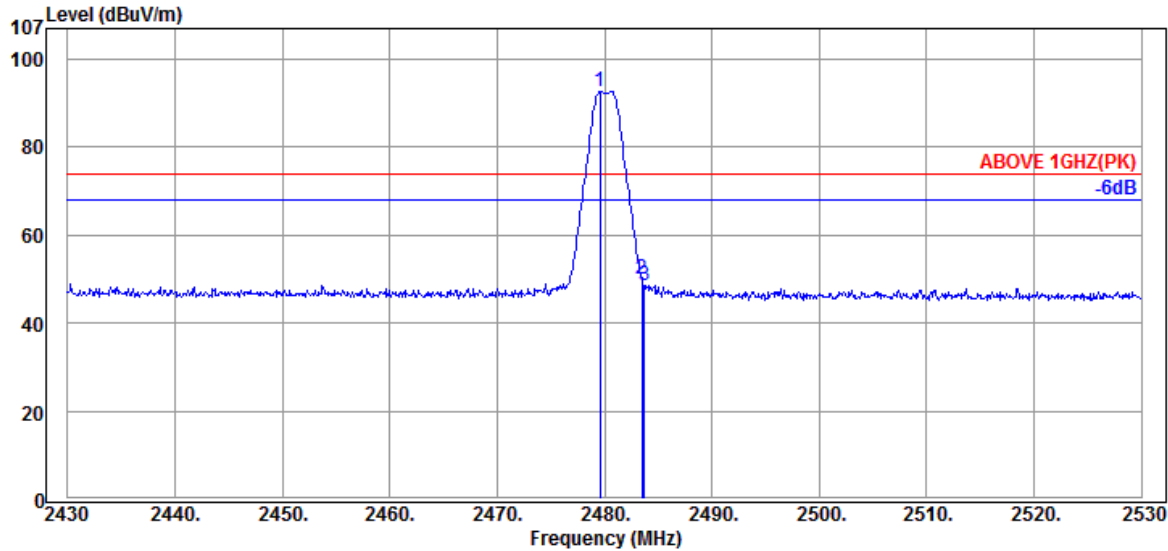

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.60	32.57	8.20	51.90	92.67	---	---	Peak
2483.50	32.57	8.20	9.24	50.01	74.00	23.99	Peak
2483.70	32.57	8.20	7.92	48.69	74.00	25.31	Peak

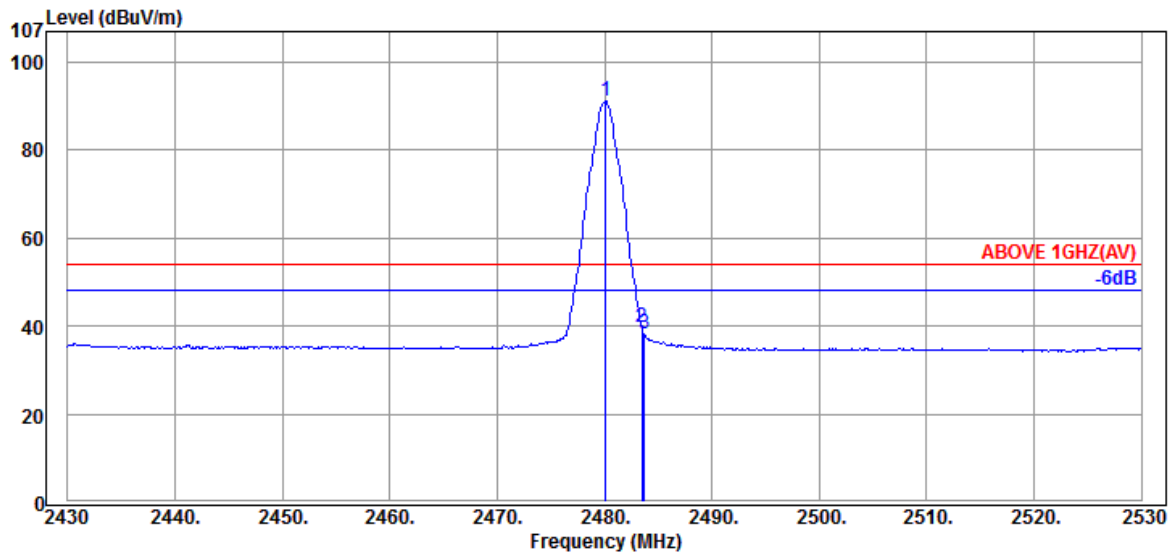

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.10	32.57	8.20	50.53	91.30	---	---	Average
2483.50	32.57	8.20	-1.03	39.74	54.00	14.26	Average
2483.70	32.57	8.20	-2.43	38.34	54.00	15.66	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

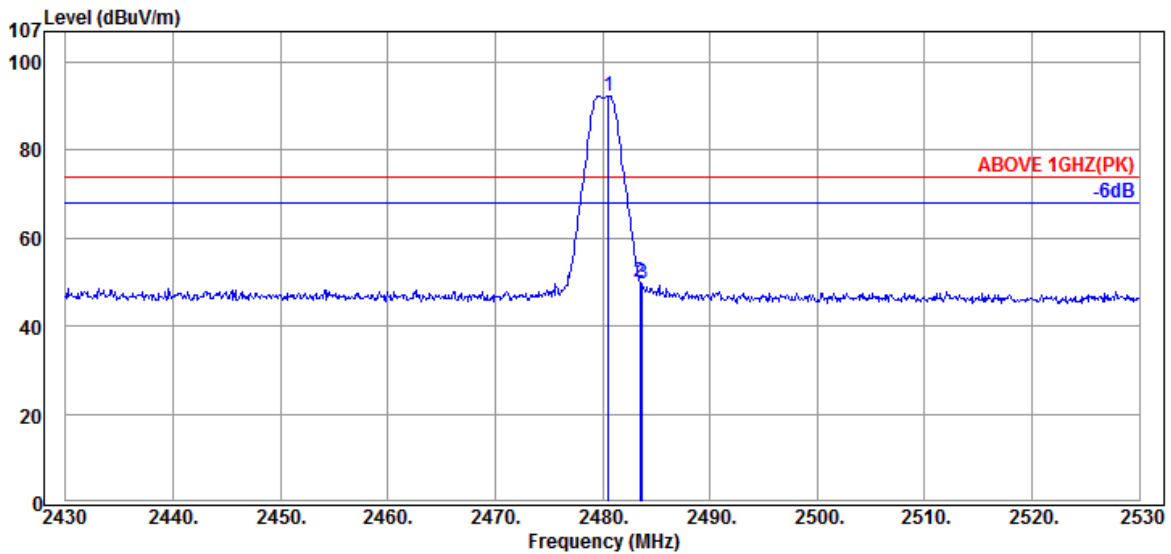

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.60	32.57	8.20	51.61	92.38	---	---	Peak
2483.50	32.57	8.20	9.36	50.13	74.00	23.87	Peak
2483.70	32.57	8.20	8.90	49.67	74.00	24.33	Peak

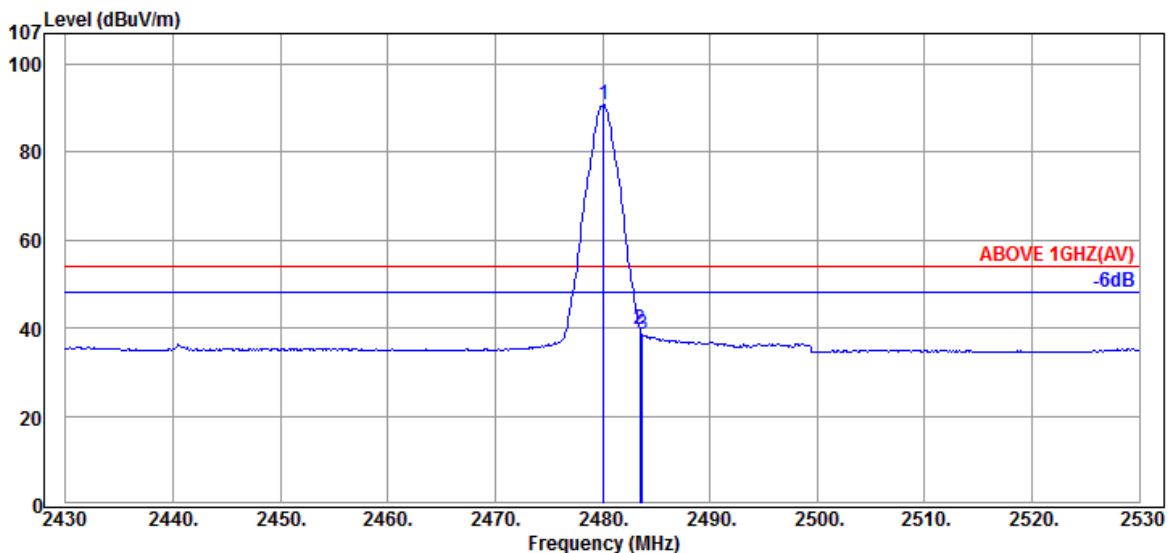

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.10	32.57	8.20	49.98	90.75	---	---	Average
2483.50	32.57	8.20	-1.00	39.77	54.00	14.23	Average
2483.70	32.57	8.20	-2.07	38.70	54.00	15.30	Average

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4806.00	33.90	10.32	-0.60	43.62	54.00	10.38	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.00	33.90	10.32	0.37	44.59	54.00	9.41	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.00	34.37	10.38	-1.16	43.59	54.00	10.41	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.00	34.37	10.38	-0.86	43.89	54.00	10.11	Peak

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.27	10.46	-0.37	44.36	54.00	9.64	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.00	34.27	10.46	-0.19	44.54	54.00	9.46	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a) general radiated emissions limits is not required.




## A.3 6dB BANDWIDTH

Test Date	2019/08/08 ~ 09/11	Temp./Hum.	25°C/50 ~ 54%
Cable Loss	---	Test Voltage	AC 120V, 60Hz (via AC Adapter)

### A.3.1 Emission Bandwidth Result

Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Occupied (99%) Bandwidth (MHz) (Reference only)	Limit
BLE (Mbps: 1M)	2402	0.7239	1.0729	>500kHz
	2440	0.7118	1.0683	
	2480	0.7102	1.0747	
BLE (Mbps: 2M)	2402	1.438	2.0893	
	2440	1.467	2.1042	
	2480	1.313	2.0930	

**A.3.2 Measurement Plots**

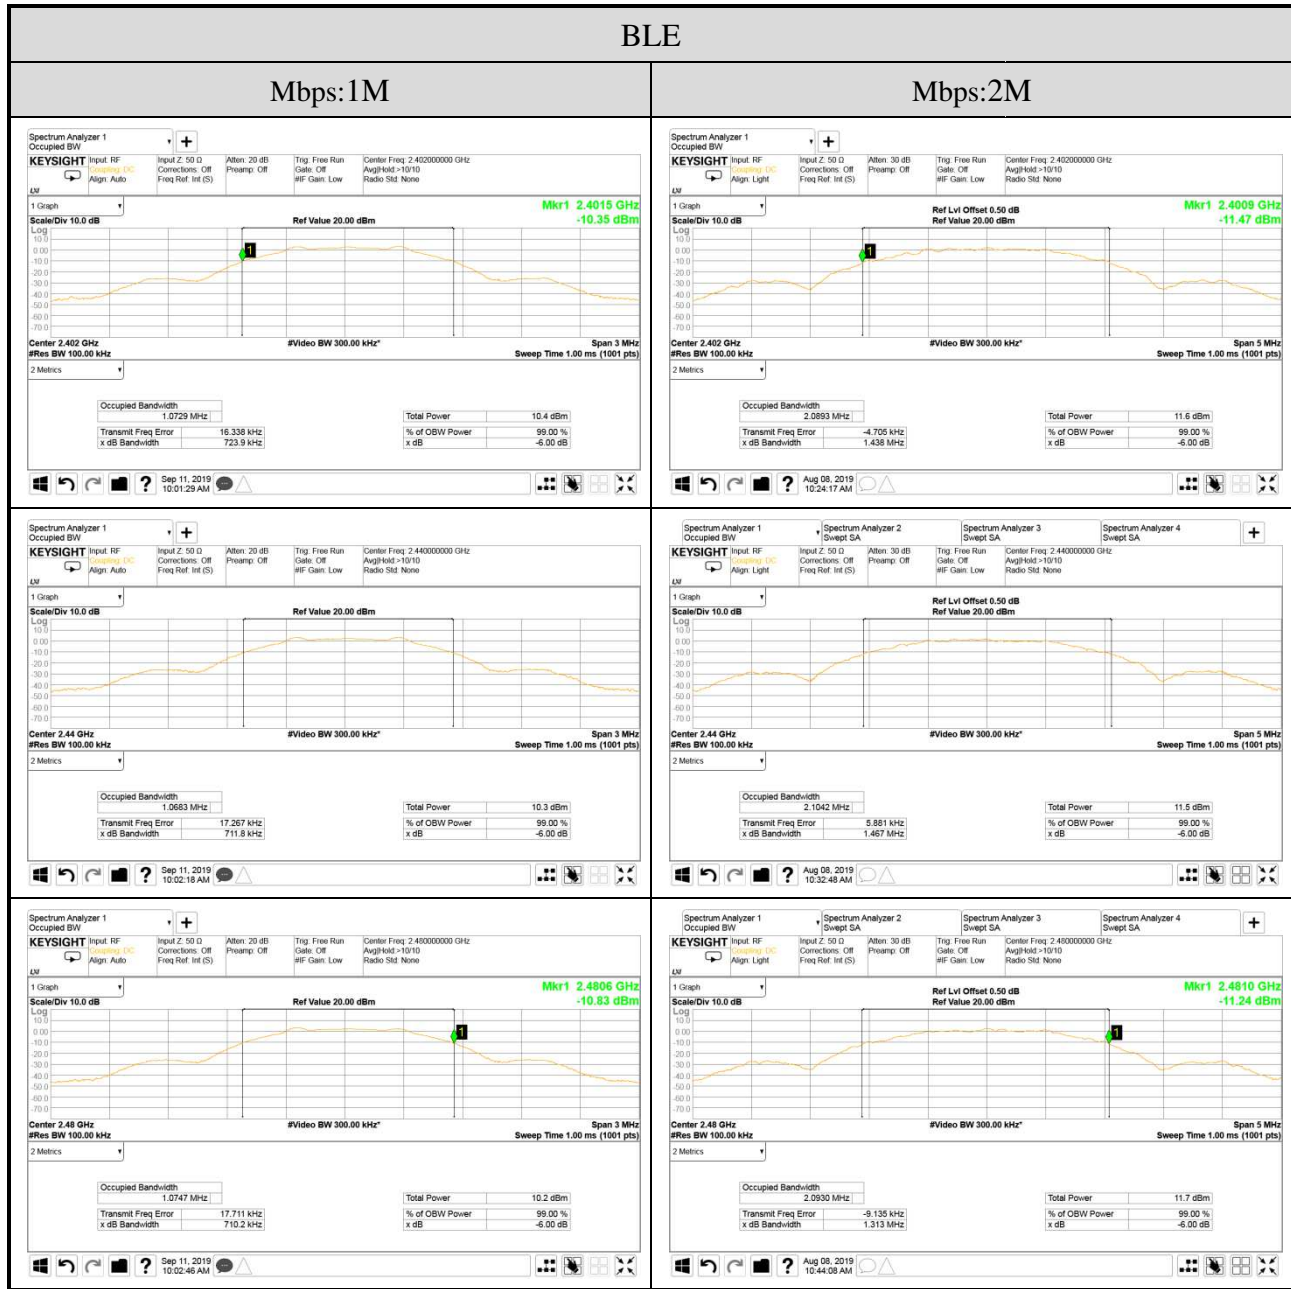

## A.4 MAXIMUM PEAK OUTPUT POWER


Test Date	2019/08/08	Temp./Hum.	25°C/54%
Cable Loss	0.5dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)

### A.4.1 Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Antenna Gain (dBi)	Output Power (E.I.R.P.)		Limit
		(dBm)	(W)		(dBm)	(W)	
BLE (Mbps: 1M)	2402	4.05	0.003	1.0	5.05	0.003	< 30dBm (1W) (Maximum Peak Output Power) < 36dBm (4W) (E.I.R.P)
	2440	4.17	0.003		5.17	0.003	
	2480	4.04	0.003		5.04	0.003	
BLE (Mbps: 2M)	2402	4.08	0.003		5.08	0.003	
	2440	4.19	0.003		5.19	0.003	
	2480	4.08	0.003		5.08	0.003	


Note: The results have been included cable loss.

A.4.2 Measurement Plots

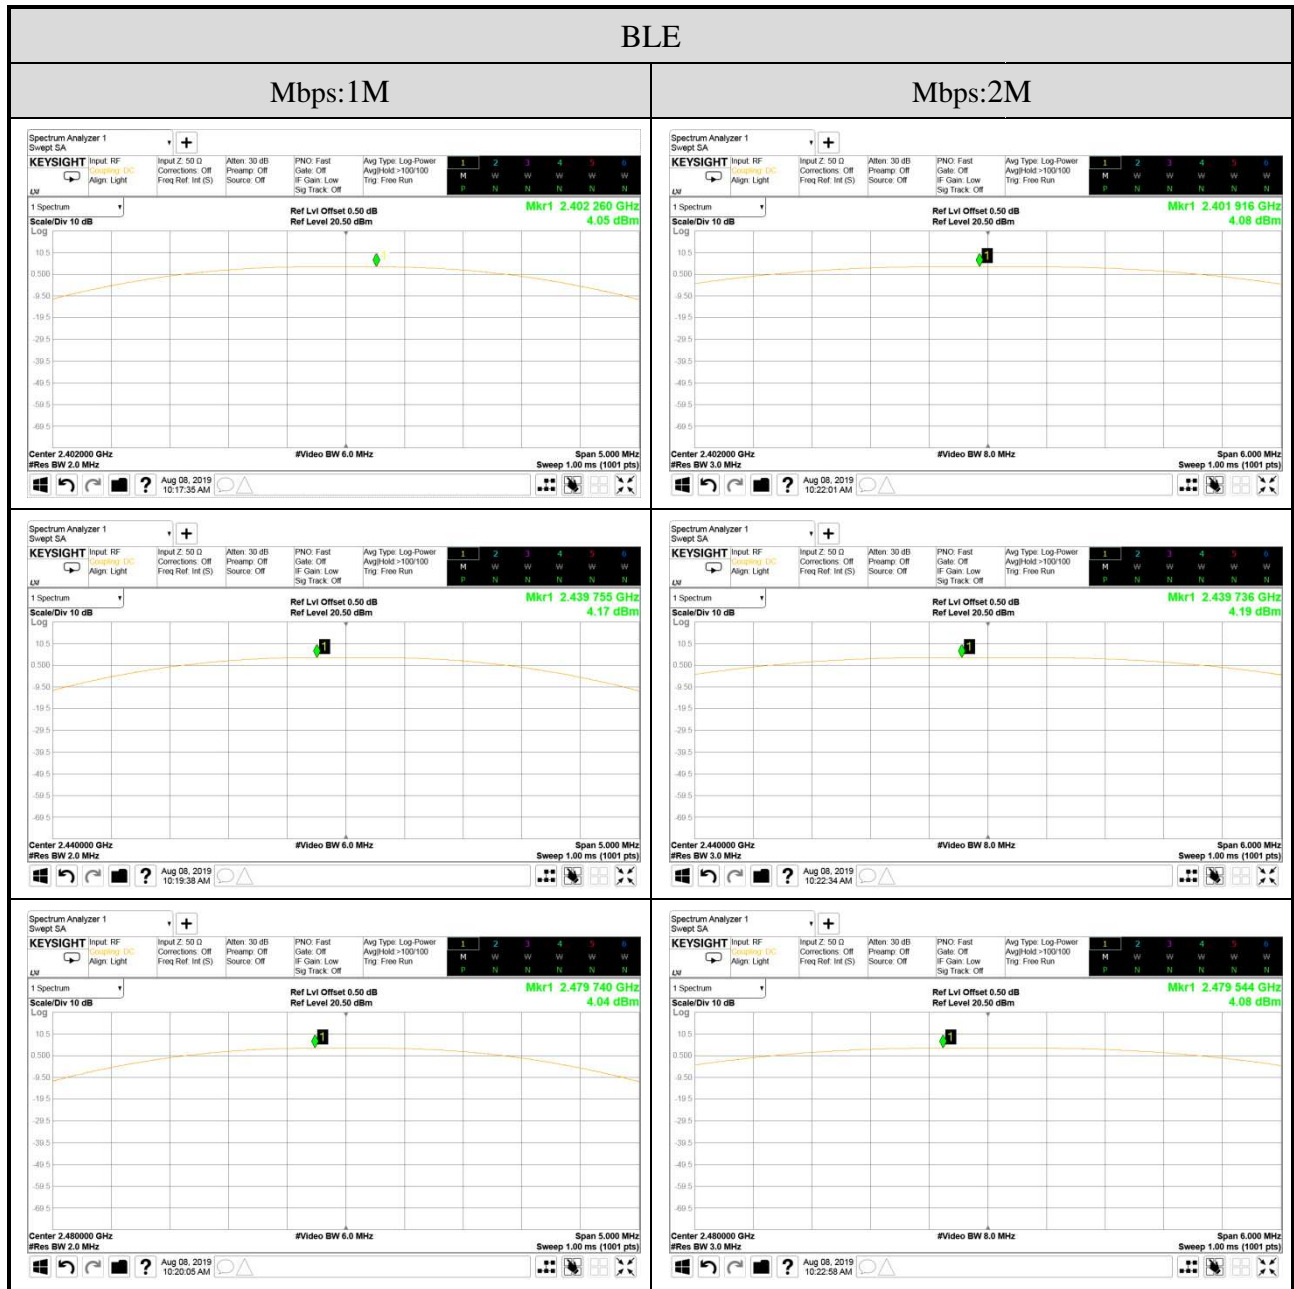

## A.5 EMISSION LIMITATIONS





Test Date	2019/08/08	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2402MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)	0		

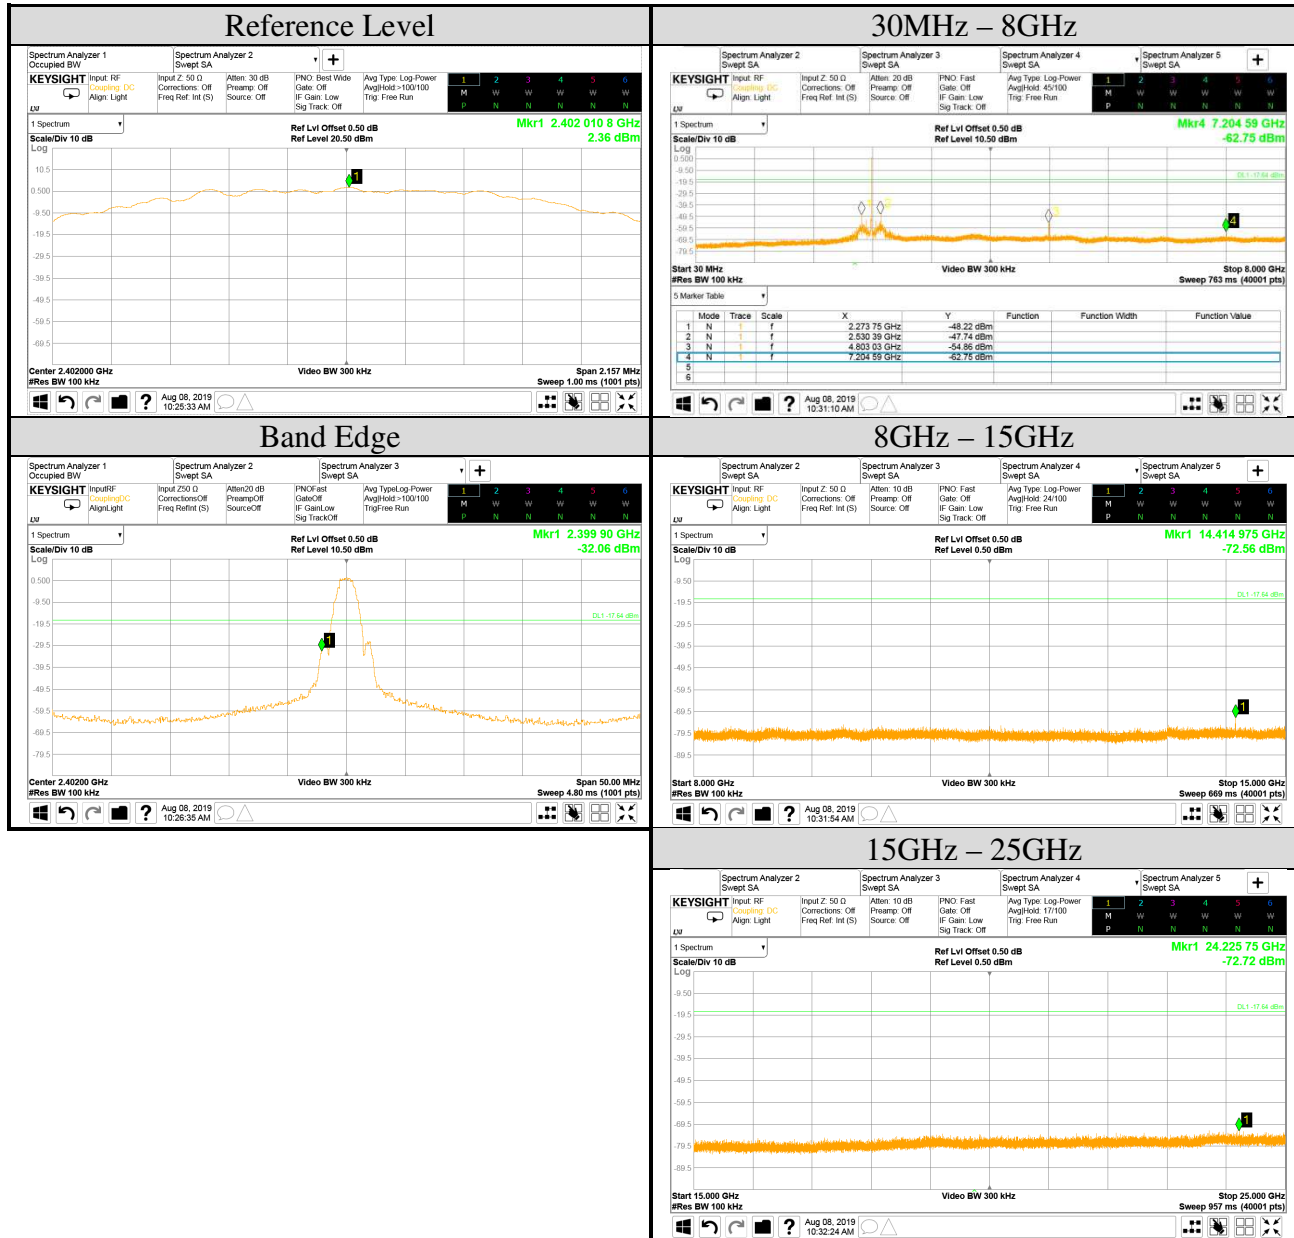

**Audix Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**






Test Date	2019/08/08	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2440MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)	0		

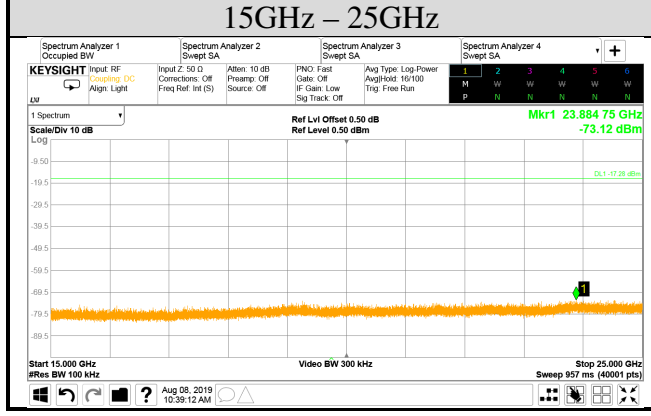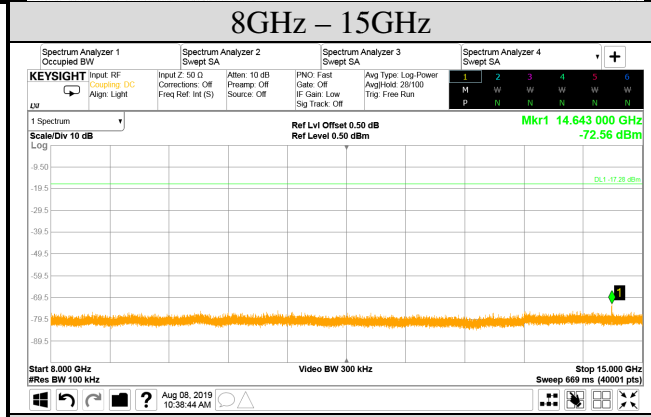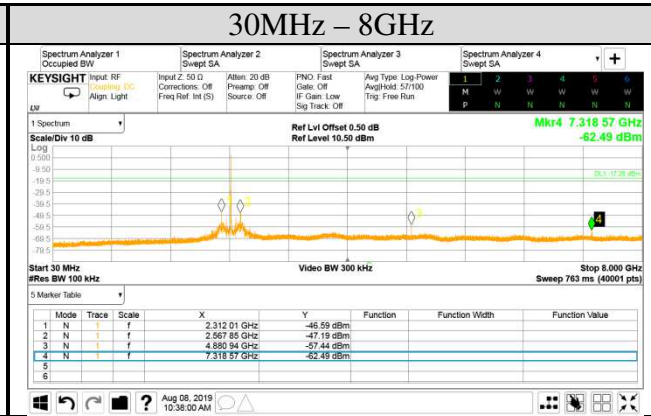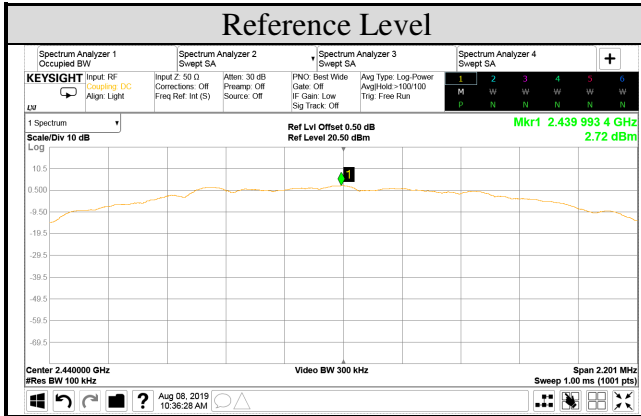

**Audix Technology Corp.**  
 No. 53-11, Dingfu, Linkou, Dist.,  
 New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

Test Date	2019/08/08	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Mode	BLE	Frequency	TX 2480MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0

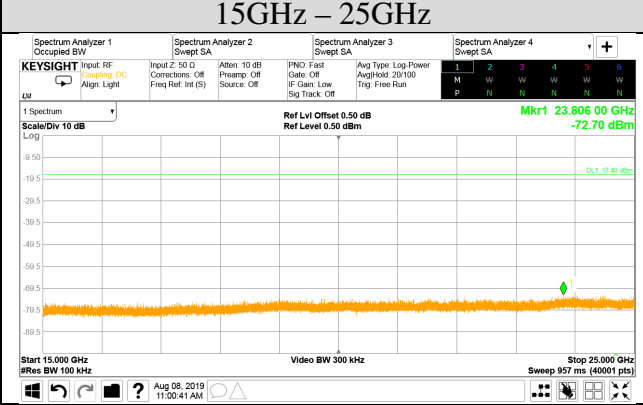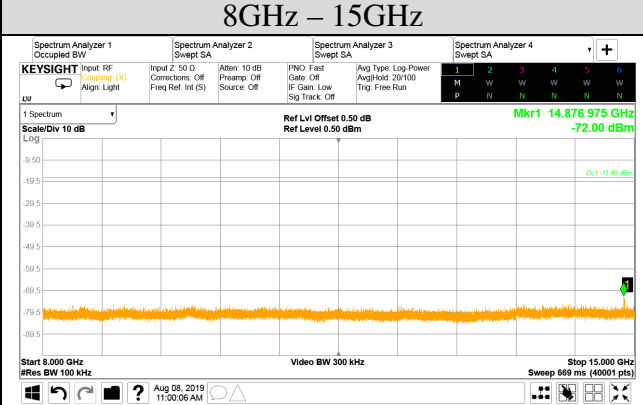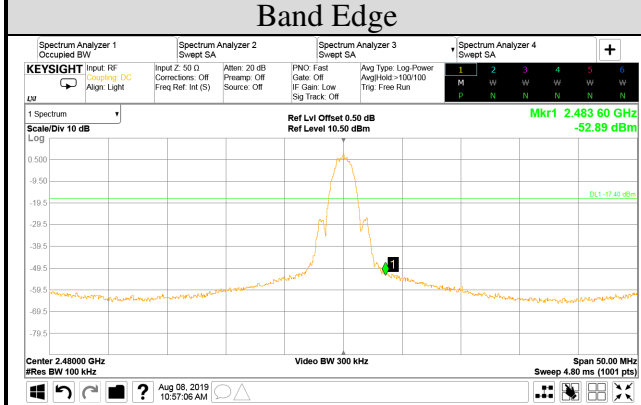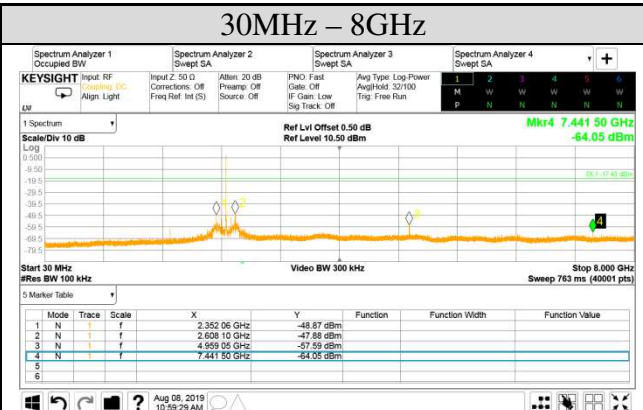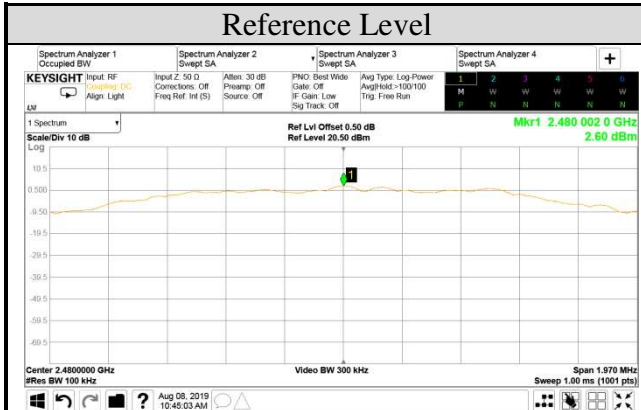

## A.6 POWER SPECTRAL DENSITY

Test Date	2019/08/08	Temp./Hum.	25°C/54%
Cable Loss	0.50dB	Test Voltage	AC 120V, 60Hz (via AC Adapter)
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		0


### A.6.1 Power Spectral Density Result

Mode	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
BLE	2402	2.36	<8 dBm/3kHz
	2440	2.72	
	2480	2.60	

Note: 1. All results have been included cable loss and Simultaneous Factor.

2. For KDB558074 D01V04, in the test result, when RBW set at 100kHz is stricter than 3kHz.

### A.6.2 Measurement Plots

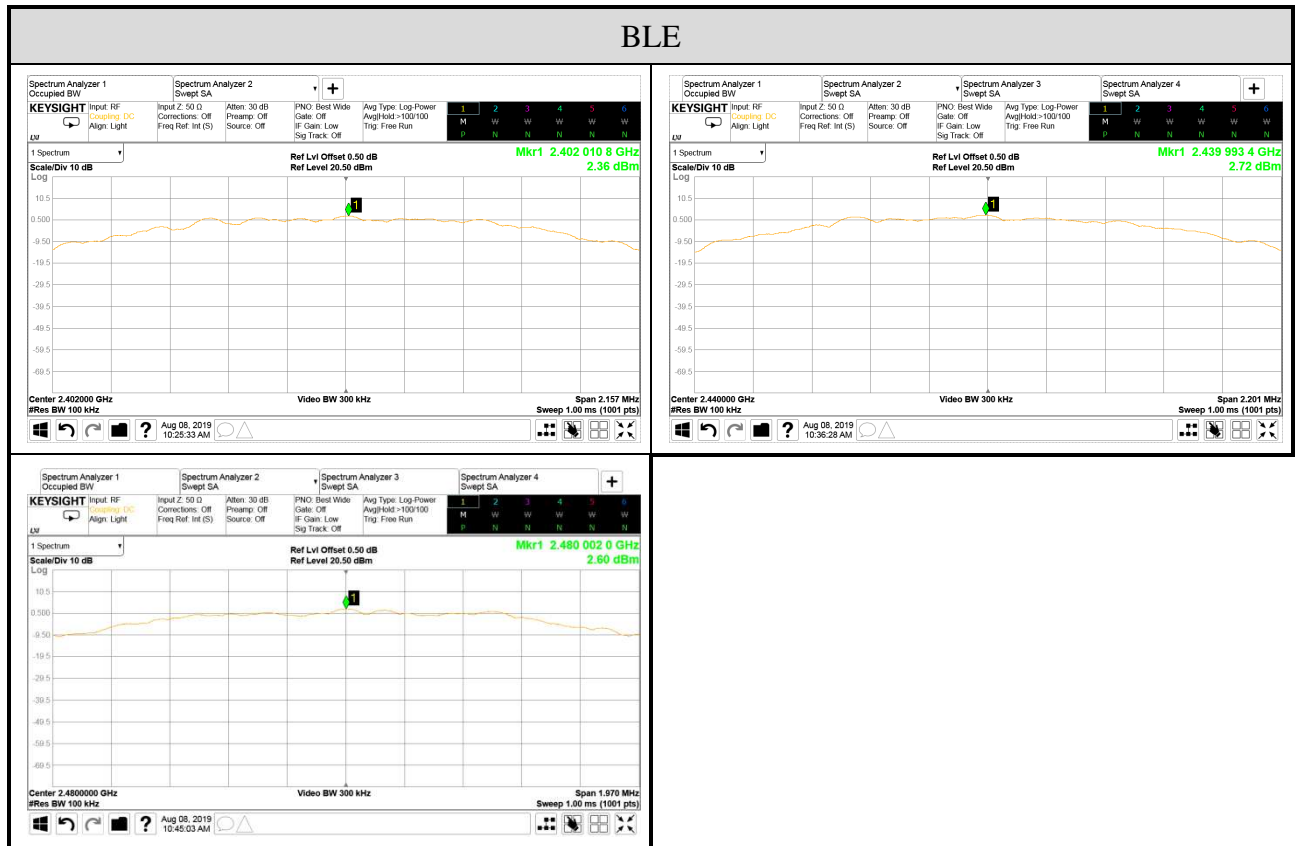

Note: All results have been included cable loss and Simultaneous Factor.





**Audix Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

---

# APPENDIX B

## TEST PHOTOGRAPHS

(Model: TDW00979)