

# EMC TEST REPORT

FCC ID: 2AUHG-FM-OYC-BL

**Report No.** : SSP24040272-1E

**Applicant** : ARTIKA FOR LIVING INC

**Product Name** : Orly vanity

**Model Name** : VAN-OYC-BL

**Test Standard** : FCC Part 15 Subpart B

**Date of Issue** : 2024-07-08







**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	ARTIKA FOR LIVING INC	
Address of Applicant.....:	1756 50th avenue, Lachine, Qc, CanadaH8T 2V5	
<b>Manufacturer</b> .....:	ZHONGSHAN C5 LIGHTING CO LTD	
Address of Manufacturer.....:	1# Henglong Road, Tongyi Industrial Area, Cao San, Guzhen, Zhongshan, Guangdong, China. Z. P 528421	
<b>Product Name</b> .....:	Orly vanity	
<b>Brand Name</b> .....:	-	
<b>Main Model</b> .....:	VAN-OYC-BL	
<b>Series Models</b> .....:	VAN-OYC-XXXXXX	
<b>Test Standard</b> .....:	FCC Part 15 Subpart B ANSI C63.4-2014	
<b>Date of Test</b> .....	2024-05-20 to 2024-05-23	
<b>Test Result</b> .....:	PASS	
<b>Tested By</b> .....	 _____	(Choco Qiu)
<b>Reviewed By</b> .....:	 _____	(Lieber Ouyang)
<b>Authorized Signatory</b> .....:	 _____	(Lahm Peng)
		
<p>Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.</p>		

**CONTENTS**

**1. General Information.....5**

    1.1 Product Information .....5

    1.2 Test Setup Information.....5

    1.3 Compliance Standards.....6

    1.4 Test Facilities.....6

    1.5 Measurement Uncertainty.....6

    1.6 List of Test and Measurement Instruments .....7

**2. Summary of Test Results .....8**

**3. Conducted Emissions .....9**

    3.1 Standard and Limit.....9

    3.2 Test Procedure.....9

    3.3 Test Data and Results .....9

**4. Radiated Disturbance.....12**

    4.1 Standard and Limit.....12

    4.2 Test Procedure.....12

    4.3 Test Data and Results .....12

**Revision History**

Revision	Issue Date	Description	Revised By
V1.0	2024-07-08	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	Orly vanity
Trade Name:	-
Main Model:	VAN-OYC-BL
Series Models:	VAN-OYC-XXXXXX
Class of Equipment:	<input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B
Highest Internal Frequency:	<108MHz
Rated Voltage:	AC 120V/60Hz 26W
<p>Note 1: The test data is gathered from a production sample, provided by the manufacturer.</p> <p>Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer, The suffix "XXXXXX" can be A to Z and/or 0 to 9 and/or blank denotes commercial code.</p>	

### 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Working	AC 120V/60Hz	
TM2	-	-	
TM3	-	-	
TM4	-	-	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
-	-	-	-
-	-	-	-
-	-	-	-
<p>The equipment under test (EUT) was configured to measure its highest possible emission and immunity level. The test modes were adapted according to the operation manual for use.</p>			

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
AZLA Certificate No.:	6893.01
FCC Registration No.:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

### 1.5 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Disturbance	9kHz ~30MHz	±1.64 dB
Radiated Disturbance	30MHz ~ 1GHz	±3.32 dB
Radiated Disturbance	1GHz ~ 18GHz	±3.50 dB

## 1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
<b>Conducted Emissions</b>					
AMN	ROHDE&SCHWARZ	ENV216	101097	2023-10-21	2024-10-20
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2023-07-31	2024-07-30
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
<b>Radiated Emissions</b>					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2023-07-31	2024-07-30
Amplifier	SCHWARZBECK	BBV 9743B	00251	2023-07-31	2024-07-30
Amplifier	HUABO	YXL0518-2.5-45	--	2023-07-31	2024-07-30
Loop Antenna	DAZE	ZN30900C	21104	2023-08-07	2024-08-06
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2023-08-07	2024-08-06
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2023-08-07	2024-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A

## 2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.107	Conducted Emissions	Passed
FCC Part 15.109	Radiated Emissions	Passed
<p>Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable</p>		



### 3. Conducted Emissions

#### 3.1 Standard and Limit


According to the rule FCC Part 15.107, Conducted limit, the limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66 to 56	56 to 46
0.5-5	73	60	56	46
5-30	73	60	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

#### 3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

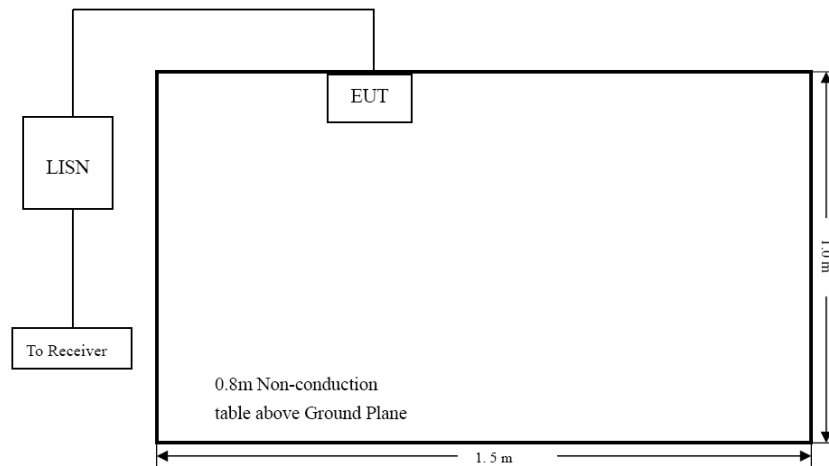


Test Setup Block Diagram

#### 3.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.107 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions	
Tested Model:	VAN-OYC-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

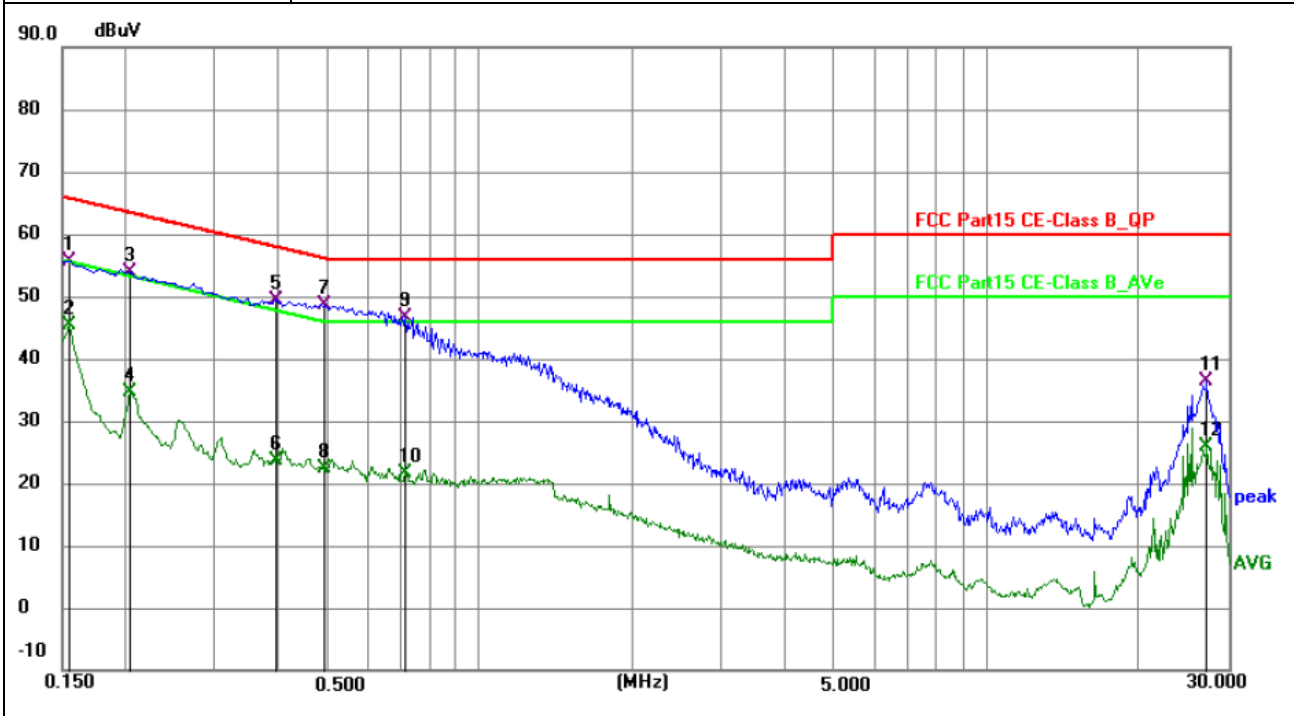

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1545	46.29	9.42	55.71	65.75	-10.04	QP	P	
2	0.1545	35.90	9.42	45.32	55.75	-10.43	AVG	P	
3	0.2040	44.30	9.60	53.90	63.45	-9.55	QP	P	
4	0.2040	24.99	9.60	34.59	53.45	-18.86	AVG	P	
5	0.3955	39.44	9.89	49.33	57.95	-8.62	QP	P	
6	0.3955	13.63	9.89	23.52	47.95	-24.43	AVG	P	
7 *	0.4920	38.78	9.95	48.73	56.13	-7.40	QP	P	
8	0.4920	12.34	9.95	22.29	46.13	-23.84	AVG	P	
9	0.7125	36.92	9.62	46.54	56.00	-9.46	QP	P	
10	0.7125	11.90	9.62	21.52	46.00	-24.48	AVG	P	
11	27.2400	26.10	10.34	36.44	60.00	-23.56	QP	P	
12	27.2400	15.54	10.34	25.88	50.00	-24.12	AVG	P	

Test Plots and Data of Conducted Emissions	
Tested Model:	VAN-OYC-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Live
Remark:	

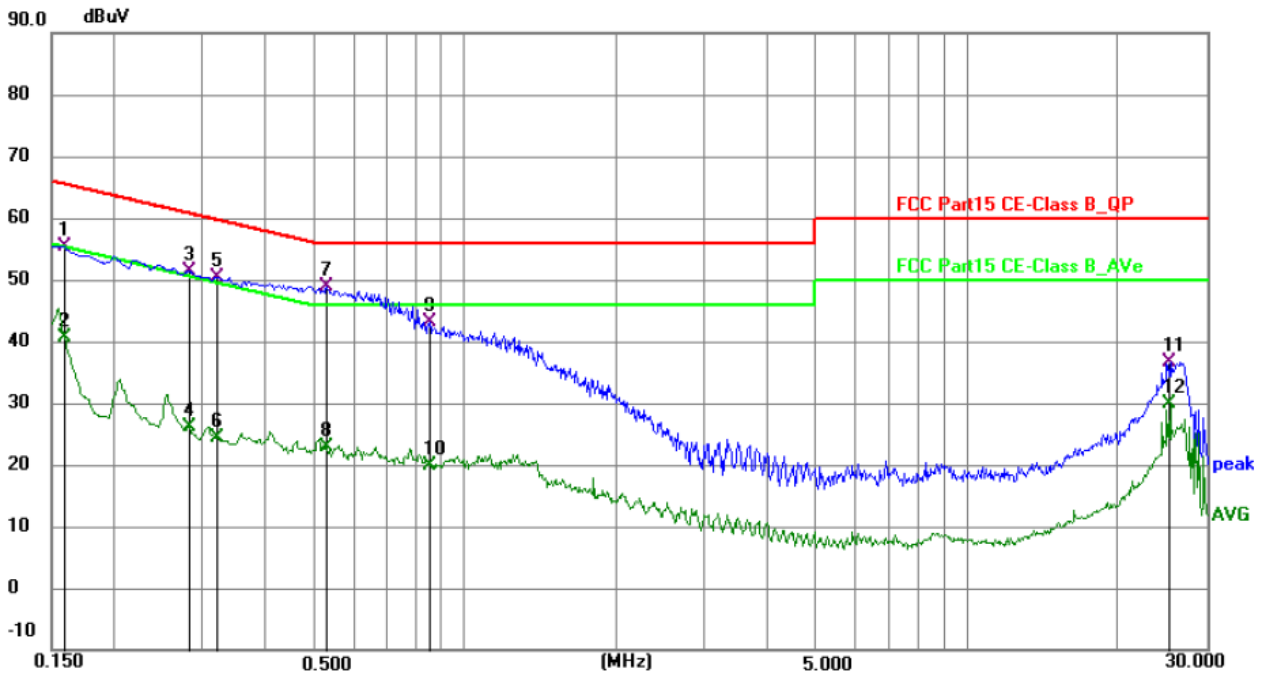

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	46.09	9.17	55.26	65.52	-10.26	QP	P	
2	0.1590	31.35	9.17	40.52	55.52	-15.00	AVG	P	
3	0.2805	41.77	9.68	51.45	60.80	-9.35	QP	P	
4	0.2805	16.41	9.68	26.09	50.80	-24.71	AVG	P	
5	0.3209	40.64	9.78	50.42	59.68	-9.26	QP	P	
6	0.3209	14.54	9.78	24.32	49.68	-25.36	AVG	P	
7 *	0.5280	38.88	9.94	48.82	56.00	-7.18	QP	P	
8	0.5280	12.86	9.94	22.80	46.00	-23.20	AVG	P	
9	0.8520	33.25	9.79	43.04	56.00	-12.96	QP	P	
10	0.8520	10.15	9.79	19.94	46.00	-26.06	AVG	P	
11	25.4444	26.37	10.28	36.65	60.00	-23.35	QP	P	
12	25.4444	19.54	10.28	29.82	50.00	-20.18	AVG	P	

## 4. Radiated Disturbance

### 4.1 Standard and Limit


According to the rule FCC Part 15.109, Radiated emission limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (3m)	Class B (3m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-88	50	40
88-216	54.0	43.5
216-960	57.0	46
Above 960	60	54

Note: The more stringent limit applies at transition frequencies.

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

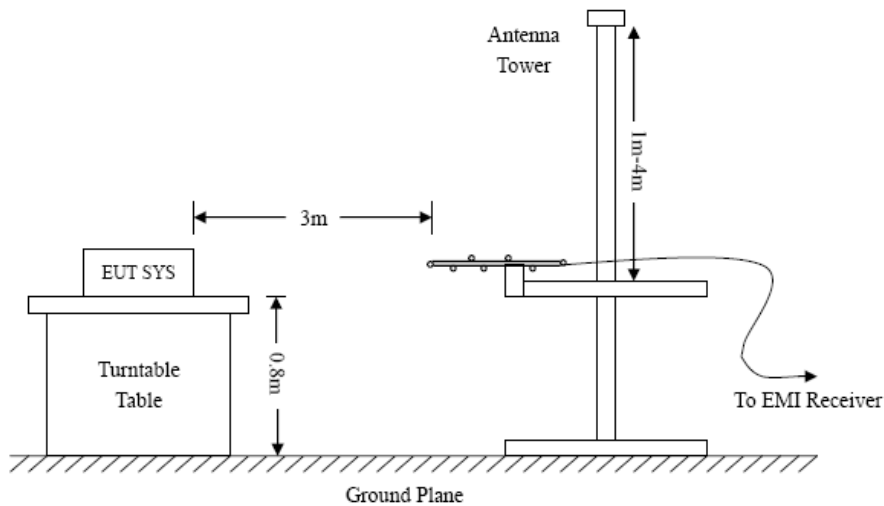


Test Setup Block Diagram

### 4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.109 standard limit for a Class B device, and with the worst case as below:


Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Radiated Emissions	
Tested Model:	VAN-OYC-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

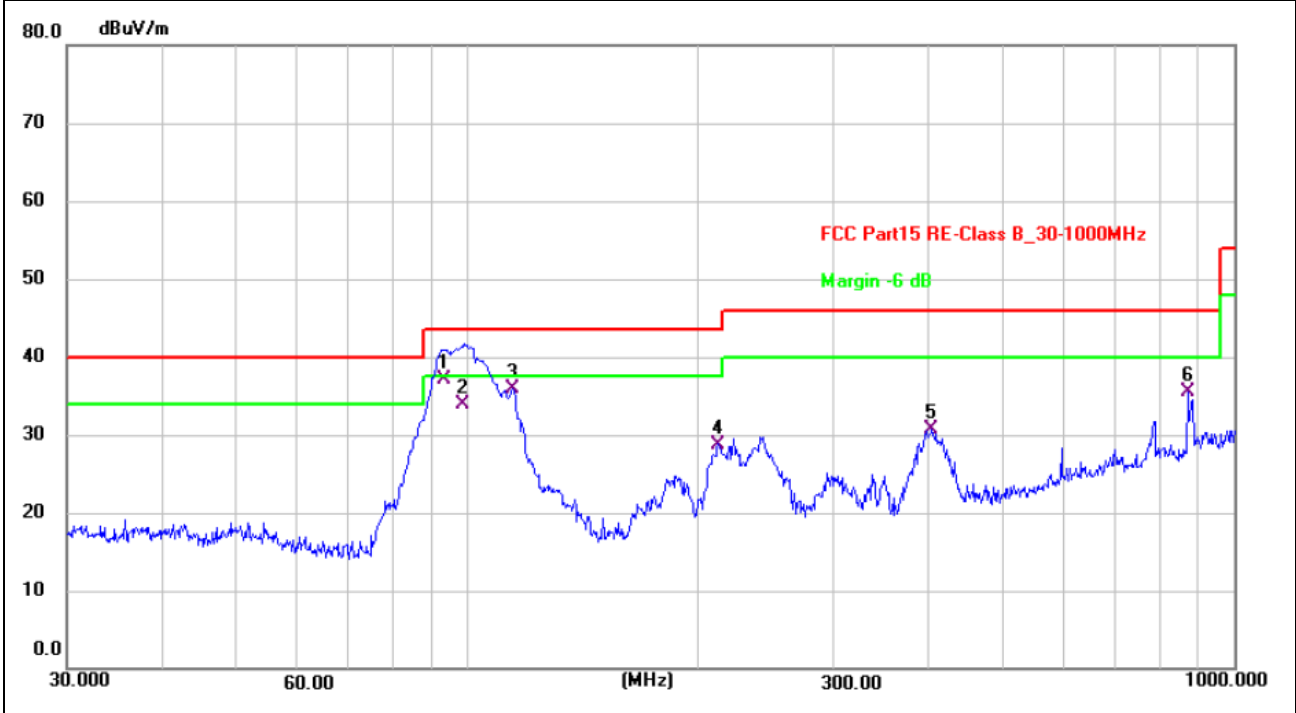

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	93.2573	50.17	-13.16	37.01	43.50	-6.49	QP	199	10	P	
2	98.7119	46.61	-12.74	33.87	43.50	-9.63	QP	199	349	P	
3	114.5146	47.15	-11.27	35.88	43.50	-7.62	QP	100	22	P	
4	212.2695	40.34	-11.54	28.80	43.50	-14.70	QP	199	133	P	
5	403.2500	36.57	-5.81	30.76	46.00	-15.24	QP	100	206	P	
6	869.1302	32.96	2.55	35.51	46.00	-10.49	QP	100	359	P	

Test Plots and Data of Radiated Emissions	
Tested Model:	VAN-OYC-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

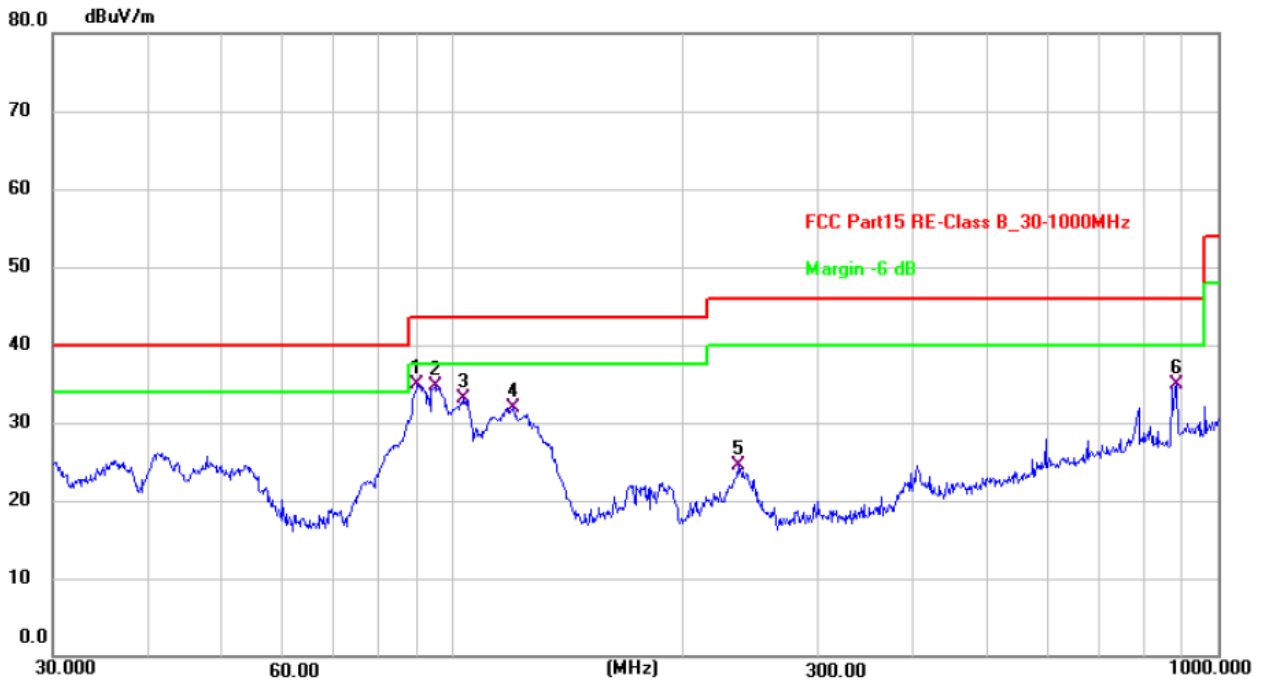

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	89.9047	48.27	-13.40	34.87	43.50	-8.63	QP	199	42	P	
2	94.7601	47.82	-13.05	34.77	43.50	-8.73	QP	199	63	P	
3	103.0800	45.56	-12.39	33.17	43.50	-10.33	QP	199	84	P	
4	119.8556	42.50	-10.61	31.89	43.50	-11.61	QP	100	101	P	
5	235.8164	34.65	-10.18	24.47	46.00	-21.53	QP	199	12	P	
6	884.5029	31.80	3.15	34.95	46.00	-11.05	QP	199	12	P	