

FCC TEST REPORT

For

Wyze Labs, Inc.

Wyze Sense Keypad

Test Model: WSKP1

Prepared for : Wyze Labs, Inc.
Address : 5808 Lake Washington Blvd NE Ste 300, Kirkland, Washington
98033, United States

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 26, 2021
Number of tested samples : 1
Serial number : Prototype
Date of Test : January 26, 2021 ~ March 8, 2021
Date of Report : March 8, 2021

**FCC TEST REPORT
FCC CFR 47 PART 15 C(15.249)**

Report Reference No. : **LCS210126017AEA**

Date of Issue : March 8, 2021

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name..... : **Wyze Labs, Inc.**

Address : 5808 Lake Washington Blvd NE Ste 300, Kirkland, Washington
98033, United States

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **Wyze Sense Keypad**

Trade Mark..... : WYZE

Test Model..... : WSKP1

Ratings : DC 4.5V By 3*AA Battery

Result : **Positive**

Compiled by:

Lh Li

Supervised by:

Jin Wang

Approved by:

Gavin Liang

Lh Li/ Administrators

Jin Wang/ Technique principal

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS210126017AEA	<u>March 8, 2021</u> Date of issue
--	---------------------------------------

Test Model.....	: WSKP1
EUT.....	: Wyze Sense Keypad
Applicant.....	: Wyze Labs, Inc.
Address.....	: 5808 Lake Washington Blvd NE Ste 300, Kirkland, Washington 98033, United States
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: TianJin HuaLai Technology Co., Ltd.
Address.....	: 8/F, Huaqiao Chuangye building, No. 10, Jinping Road, Ya'an Road, Nankai District, Tianjin, China
Telephone.....	: /
Fax.....	: /
Factory.....	: TianJin HuaLai Technology Co., Ltd.
Address.....	: 8/F, Huaqiao Chuangye building, No. 10, Jinping Road, Ya'an Road, Nankai District, Tianjin, China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	March 8, 2021	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
1.3. EXTERNAL I/O CABLE	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	7
2. TEST METHODOLOGY	8
2.1. EUT CONFIGURATION	8
2.2. EUT EXERCISE	8
2.3. GENERAL TEST PROCEDURES	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1. JUSTIFICATION	9
3.2. EUT EXERCISE SOFTWARE.....	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS.....	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP	9
4. SUMMARY OF TEST RESULTS.....	10
5. TEST RESULT	11
5.1. RADIATED EMISSION MEASUREMENT.....	11
5.2. 99% AND 20DB BANDWIDTH MEASUREMENT	22
5.3. AC POWER LINE CONDUCTED EMISSIONS (NOT APPLICABLE).....	24
5.4. ANTENNA REQUIREMENTS.....	25
6. LIST OF MEASURING EQUIPMENTS	26
7. TEST SETUP PHOTOGRAPHS OF EUT.....	27
8. EXTERIOR PHOTOGRAPHS OF THE EUT.....	27
9. INTERIOR PHOTOGRAPHS OF THE EUT	27

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Wyze Sense Keypad
Test Model	:	WSKP1
Model Number	:	WSKP1
Hardware Version	:	PIR3U-V2 V1.4
Software Version	:	0.0.0.23
Power Supply	:	DC 4.5V By 3*AA Battery
906.8		
Frequency Range	:	906.8 MHz
Modulation Type	:	ASK
Antenna Description	:	Internal Antenna, 0.9 dBi

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10:2013 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX mode.

***Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

Channel List and Frequency			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	906.8	--	--

Mode of Operations	Transmitting Frequency (MHz)
ASK	906.8
For Conducted Emission	
Test Mode	N/A
For Radiated Emission	
Test Mode	TX Mode

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, expiatory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition by software provided by application.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document.

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.205, §15.249(d)	Emissions at Restricted Band	Compliant
§15.215	99% and 20dB Bandwidth	Compliant
§15.207(a)	AC Line Conducted Emissions	N/A*
§15.203	Antenna Requirements	Compliant

Remark:

1. Note 1 – Test results inside test report;
2. Note 2 – N/A*: Not Applicable!

5. TEST RESULT

5.1. Radiated Emission Measurement

5.1.1. Standard Applicable

- 1). According to §15.249 (d): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

- 2). According to §15.249 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

5.1.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.1.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.1.4. Test Setup Layout

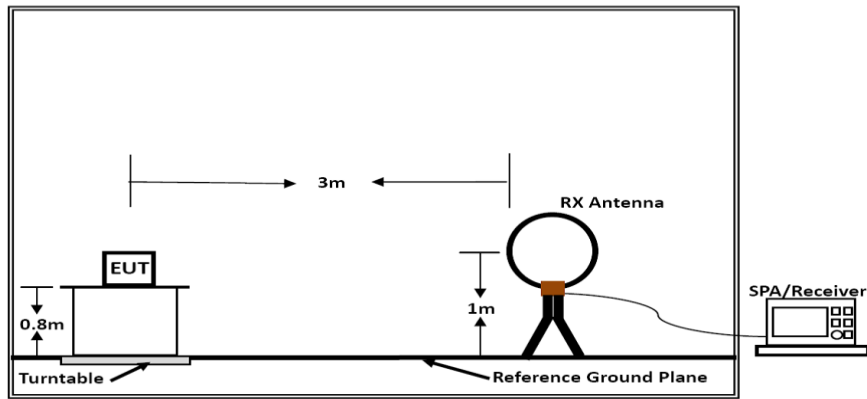

Below 30MHz

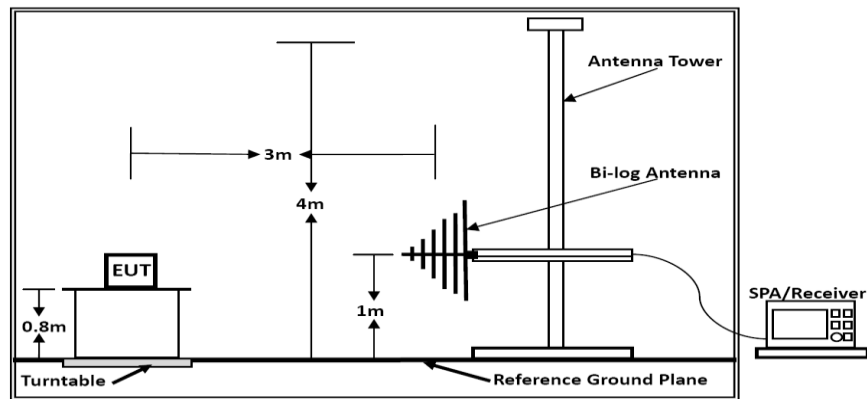

Below 1GHz

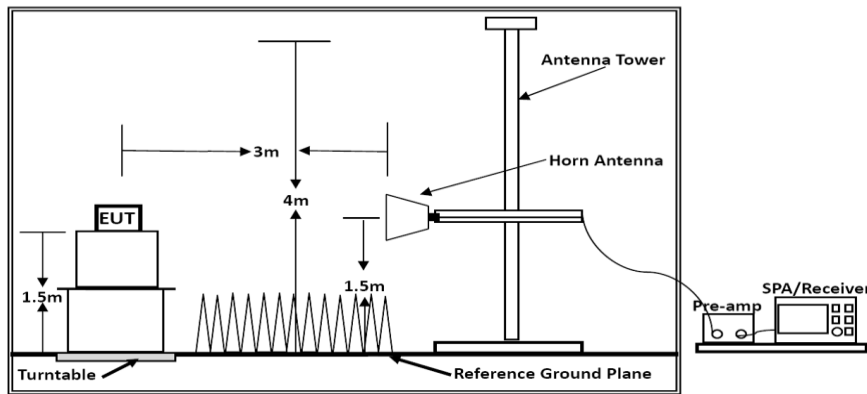

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	23.1°C	Humidity	50.6%
Test Engineer	Jay Li	Configurations	TX

Freq. (MHz)	Level (dBUV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
 Limit line = specific limits (dBUV) + distance extrapolation factor.

5.1.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23.1°C	Humidity	50.6%
Test Engineer	Jay Li	Configurations	TX


Horizontal

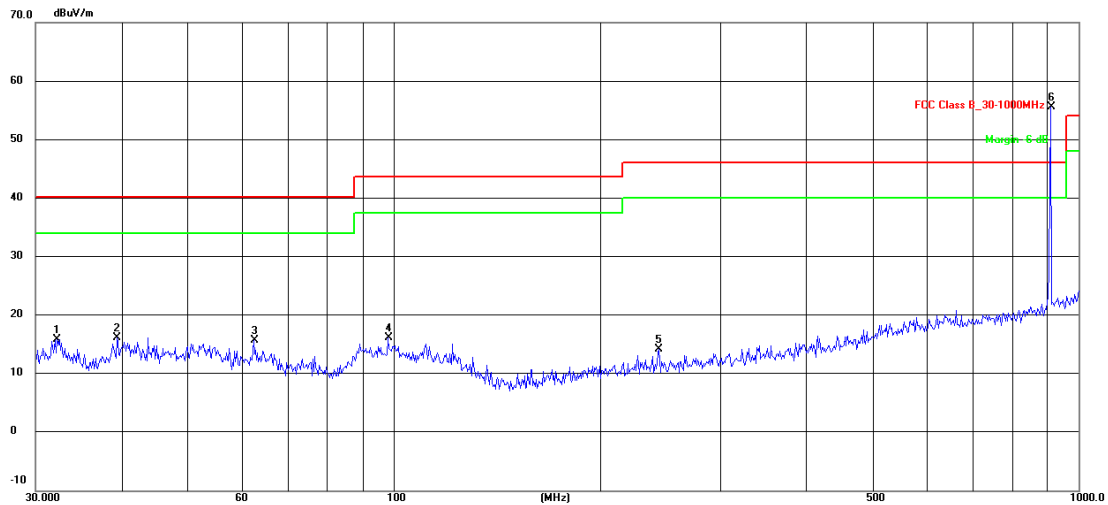

Limit:	FCC Class B_30-1000MHz	Antenna::Horizontal	Temperature(C):23.1(C)
Power Rating:	DC 4.5V		Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Det.
1	32.2925	47.56	-31.65	15.91	40.00	-24.09	QP
2	39.4371	46.15	-30.03	16.12	40.00	-23.88	QP
3	62.4314	46.49	-30.68	15.81	40.00	-24.19	QP
4	98.1419	43.88	-27.68	16.20	43.50	-27.30	QP
5	244.2321	43.72	-29.48	14.24	46.00	-31.76	QP
6 *	906.8	73.82	-18.19	55.63	94.00	-38.37	QP

Vertical

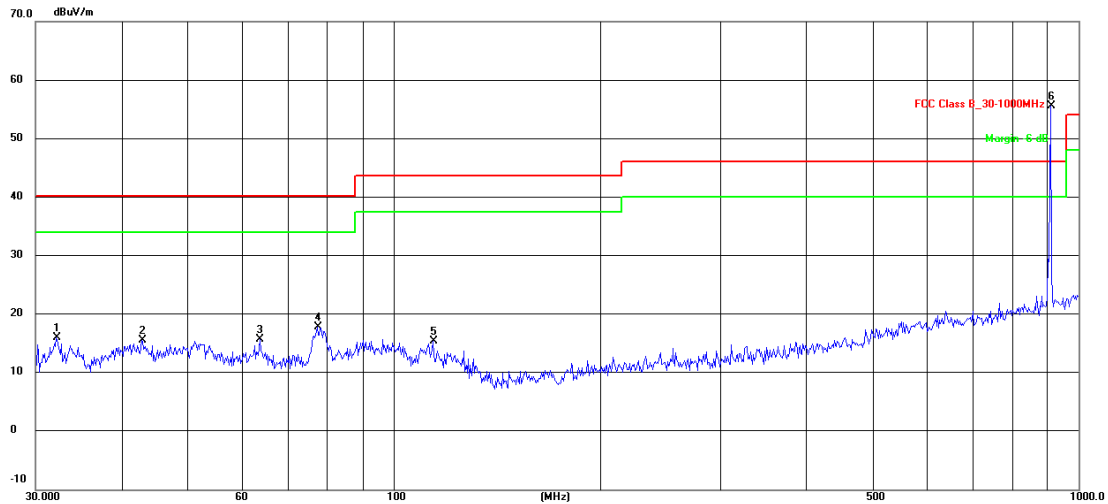

Limit:	FCC Class B_30-1000MHz	Antenna::Vertical	Temperature(C):23.1(C)
Power Rating:	DC 4.5V		Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	32.1795	47.71	-31.65	16.06	40.00	-23.94	QP
2	42.8998	44.97	-29.32	15.65	40.00	-24.35	QP
3	63.7588	46.70	-30.90	15.80	40.00	-24.20	QP
4	77.3212	50.44	-32.53	17.91	40.00	-22.09	QP
5	114.1138	43.79	-28.42	15.37	43.50	-28.13	QP
6 *	906.8	73.82	-18.19	55.63	94.00	-38.37	QP

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (TX).
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
- 4). For the fundamental emission limit at 906.8MHz, please refer to following page.

5.1.8. Results of the Fundamental Frequency (906.8MHz)

Temperature	23.1°C	Humidity	50.6%
Test Engineer	Jay Li	Configurations	TX Mode

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Pol.
906.8	73.82	-18.19	55.63	94.00	-38.37	QP	Horizontal
906.8	73.82	-18.19	55.63	94.00	-38.37	QP	Vertical

5.1.9. Results of Radiated Emissions (Above 1GHz)

Temperature	23.1°C	Humidity	50.6%
Test Engineer	Jay Li	Configurations	TX

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
TX-Mode									
1813.600	53.49	33.06	35.04	2.10	53.61	74.00	-20.39	Peak	Horizontal
1813.600	41.75	33.06	35.04	2.10	41.87	54.00	-12.13	Average	Horizontal
1813.600	51.13	33.06	35.04	2.10	51.25	74.00	-22.75	Peak	Vertical
1813.600	49.63	33.06	35.04	2.10	49.75	54.00	-4.25	Average	Vertical
2720.400	59.16	33.11	35.09	2.68	59.86	74.00	-14.14	Peak	Horizontal
2720.400	40.78	33.11	35.09	2.68	41.48	54.00	-12.52	Average	Horizontal
2720.400	62.89	33.11	35.09	2.68	63.59	74.00	-10.41	Peak	Vertical
2720.400	43.23	33.11	35.09	2.68	43.93	54.00	-10.07	Average	Vertical
3627.200	60.16	33.03	35.07	3.10	61.22	74.00	-12.78	Peak	Horizontal
3627.200	39.91	33.03	35.07	3.10	40.97	54.00	-13.03	Average	Horizontal
3627.200	60.09	33.03	35.07	3.10	61.15	74.00	-12.85	Peak	Vertical
3627.200	43.30	33.03	35.07	3.10	44.36	54.00	-9.64	Average	Vertical
4534.000	50.59	33.26	35.14	3.94	52.65	74.00	-21.35	Peak	Horizontal
4534.000	46.54	33.26	35.14	3.94	48.60	54.00	-5.40	Average	Horizontal
4534.000	56.23	33.26	35.14	3.94	58.29	74.00	-15.71	Peak	Vertical
4534.000	47.20	33.26	35.14	3.94	49.26	54.00	-4.74	Average	Vertical

Notes:


- 1). Measuring frequencies from 9 KHz~10th harmonic (ex. 10GHz), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.
- 3). No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Corrected Reading: Measured = Reading Level + Ant. Fac. + Cab. Loss - Pre.Fac.

5.1.10. Results for Restricted Band Edge Testing

Temperature	23.1°C	Humidity	50.6%
Test Engineer	Jay Li	Configurations	TX

Test Frequency Range: 900MHz-920MHz


Horizontal

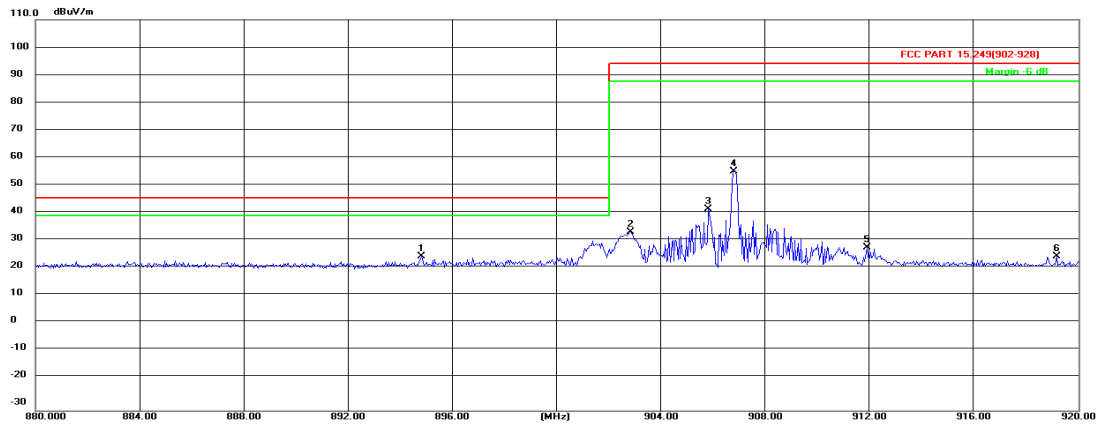

Limit:	FCC PART 15.249(902-928)	Antenna::Horizontal	Temperature(C):23.1(C)
Power Rating:	DC 4.5V		Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1 *	894.8000	43.75	-18.34	25.41	46.00	-20.59	QP
2	902.8400	52.21	-18.25	33.96	94.00	-60.04	QP
3	905.8000	60.40	-18.23	42.17	94.00	-51.83	QP
4	906.8000	74.01	-18.22	55.79	94.00	-38.21	QP
5	911.8800	46.80	-18.17	28.63	94.00	-65.37	QP
6	919.1600	43.48	-18.10	25.38	94.00	-68.62	QP

Vertical

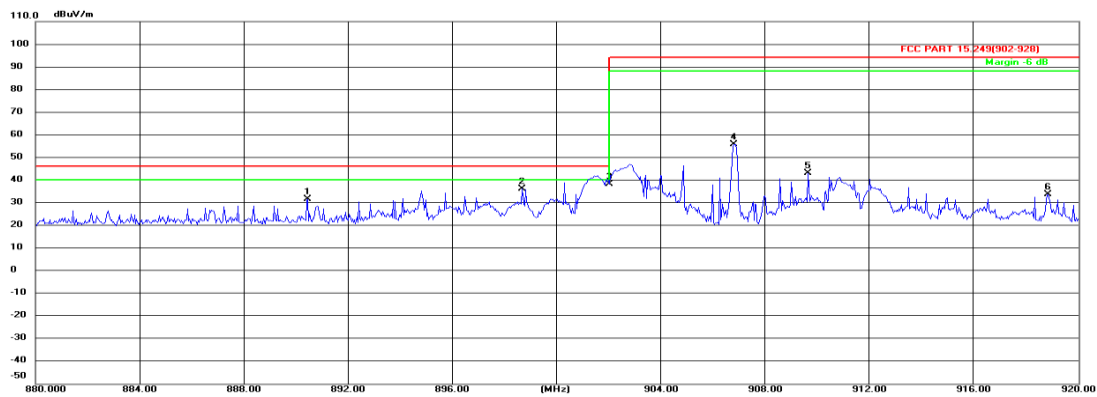


Limit:	FCC PART 15.249(902-928)	Antenna::Vertical	Temperature(C):23.1(C)
Power Rating:	DC 4.5V		Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	890.4400	50.04	-18.40	31.64	46.00	-14.36	QP
2	898.6800	54.50	-18.30	36.20	46.00	-9.80	QP
3 *	902.0000	56.58	-18.27	38.31	46.00	-7.69	QP
4	906.8000	73.96	-18.22	55.74	94.00	-38.26	QP
5	909.6400	61.33	-18.19	43.14	94.00	-50.86	QP
6	918.8400	51.84	-18.10	33.74	94.00	-60.26	QP

Test Frequency Range: 904MHz-960MHz


Horizontal

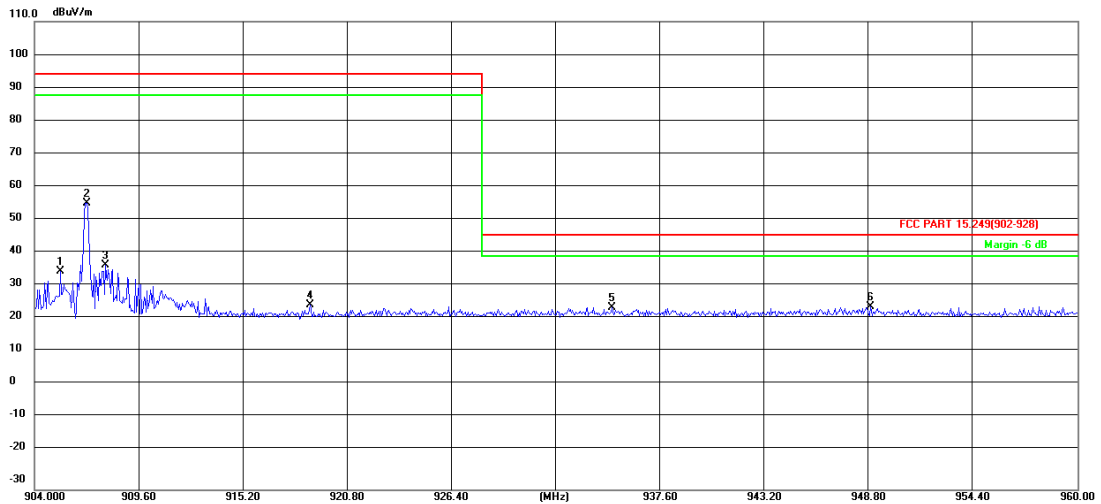

Limit: FCC PART 15.249(902-928) Antenna::Horizontal Temperature(C):23.1(C)
 Power Rating: DC 4.5V Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	905.4000	53.63	-18.23	35.40	94.00	-58.60	QP
2	906.8000	73.97	-18.22	55.75	94.00	-38.25	QP
3	907.8080	55.51	-18.20	37.31	94.00	-56.69	QP
4	918.7840	43.46	-18.10	25.36	94.00	-68.64	QP
5	935.0240	42.51	-17.94	24.57	46.00	-21.43	QP
6 *	948.9120	42.65	-17.81	24.84	46.00	-21.16	QP

Vertical

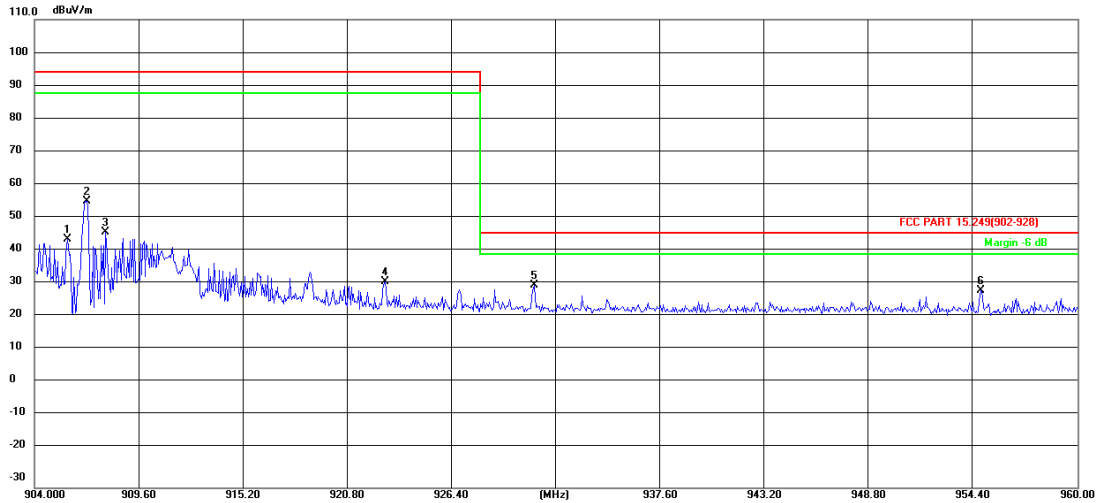

Limit: FCC PART 15.249(902-928) Antenna::Vertical Temperature(C):23.1(C)
 Power Rating: DC 4.5V Humidity(%):50.6%

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	905.7920	62.64	-18.23	44.41	94.00	-49.59	QP
2	906.8000	74.02	-18.22	55.80	94.00	-38.20	QP
3	907.8080	64.60	-18.20	46.40	94.00	-47.60	QP
4	922.8160	49.64	-18.05	31.59	94.00	-62.41	QP
5 *	930.8240	48.73	-17.99	30.74	46.00	-15.26	QP
6	954.7920	46.75	-17.75	29.00	46.00	-17.00	QP

5.2. 99% and 20dB Bandwidth Measurement


5.2.1. Limit

No Limit

5.2.2. Test Procedures

- a. Place the EUT on the table and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- c. Set to the maximum power setting and enable the EUT transmit continuously.
- d. For 99% and 20dB bandwidth measurement, use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
 RBW/VBW=10 KHz/ 30KHz; Sweep = auto; Detector function = peak; Trace = max hold.

5.2.3. Test Setup Layout

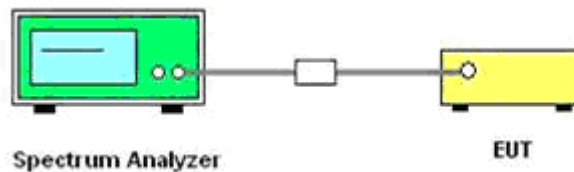

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.2.5. Test Result of 99% and 20 dB Bandwidth Measurement

Temperature	23.6°C	Humidity	55%
Test Engineer	Jay Li	Configurations	TX

Test Mode	Frequency (MHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)	Limits	Verdict
TX	906.8	46.253	48.69	Non-specified	PASS

Remark:

1. Test results including cable loss;
2. Please refer to following plots;

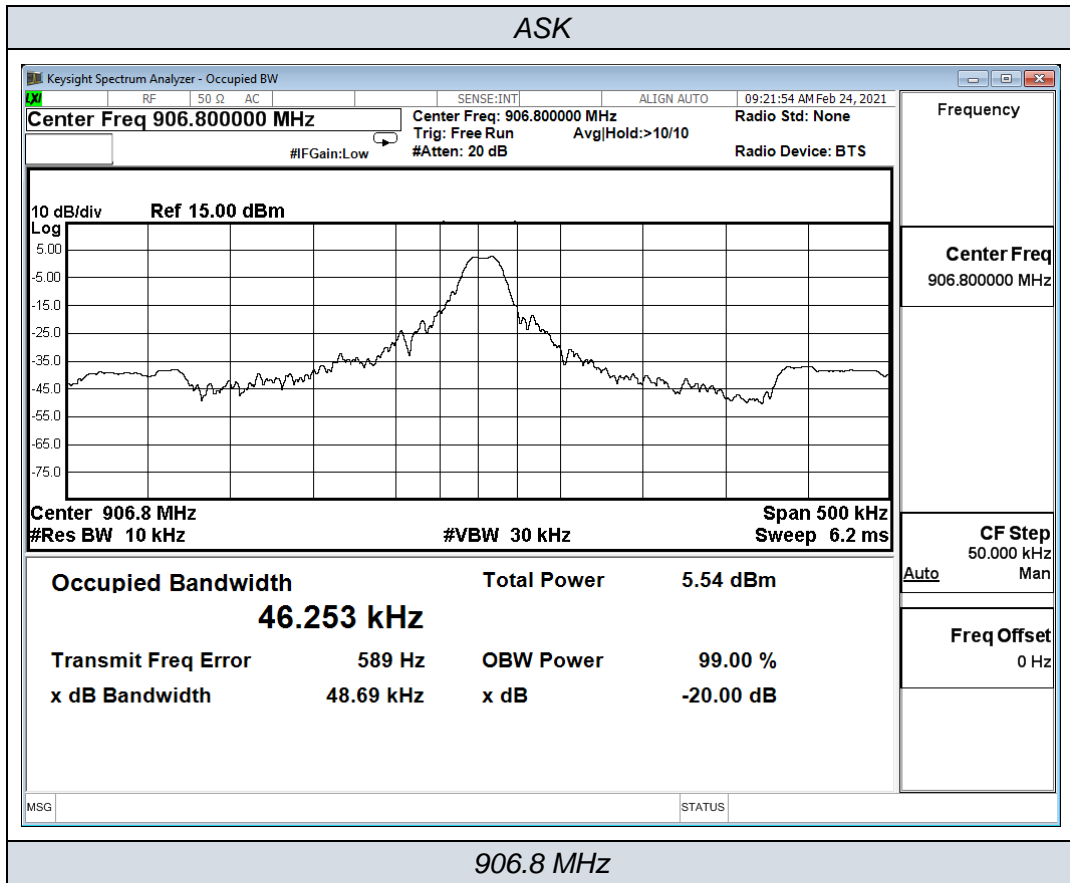

5.3. AC Power Line Conducted Emissions (Not Applicable)


5.3.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.3.2 Block Diagram of Test Setup

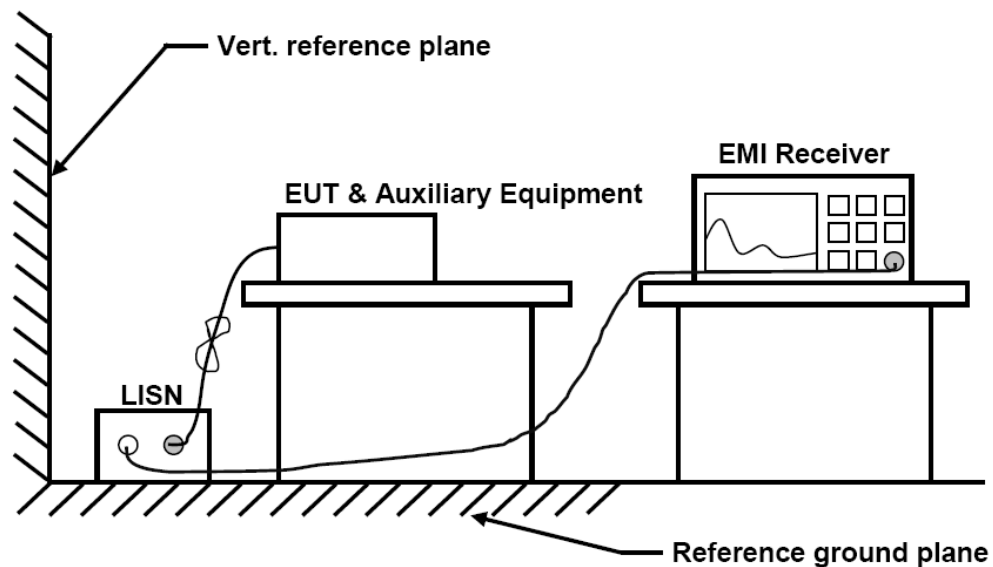

5.3.3 Test Results

Not Applicable.

The EUT is powered by 3*AA battery.

5.4. Antenna Requirements

5.4.1 Standard Applicable

According to antenna requirement of §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.4.2 Antenna Connected Construction

5.4.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.4.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0.9 dBi (Max.), and the antenna is an Internal Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.4.2.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2020-06-22	2021-06-21
2	Power Sensor	R&S	NRV-Z81	100458	2020-06-22	2021-06-21
3	Power Sensor	R&S	NRV-Z32	10057	2020-06-22	2021-06-21
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2020-06-22	2021-06-21
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020-11-22	2021-11-21
7	DC Power Supply	Agilent	E3642A	N/A	2020-11-14	2021-11-13
8	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
9	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2020-09-27	2021-09-26
10	Positioning Controller	MF	MF7082	MF78020803	2020-06-22	2021-06-21
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018-07-26	2021-07-25
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-07-26	2021-07-25
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018-07-02	2021-07-01
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2018-09-21	2021-09-20
15	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2020-06-22	2021-06-21
16	EMI Test Receiver	R&S	ESR 7	101181	2020-06-22	2021-06-21
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2020-11-14	2021-11-13
18	Broadband Preamplifier	/	BP-01M18G	P190501	2020-06-22	2021-06-21
19	RF Cable-R03m	Jye Bao	RG142	CB021	2020-06-22	2021-06-21
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2020-06-22	2021-06-21
21	6dB Attenuator	/	100W/6dB	1172040	2020-06-22	2021-06-21
22	3dB Attenuator	/	2N-3dB	/	2020-06-22	2021-06-21
23	EMI Test Receiver	R&S	ESPI	101840	2020-06-22	2021-06-21
24	Artificial Mains	R&S	ENV216	101288	2020-06-22	2021-06-21
25	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2020-06-22	2021-06-21

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----