



# SAR Test Report



## For


**Applicant Name:** Shenzhen Eview GPS Technology  
**Address:** Rm 201, building1-A, Nankechuang yuangu, Dalang, Longhua District, Shenzhen, China  
**EUT Name:** Personal Safety Watch  
**Brand Name:** N/A  
**Model Number:** EV-06X

## Issued By

**Company Name:** BTF Testing Lab (Shenzhen) Co., Ltd.  
**Address:** F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

**Report Number:** BTF230418R02101  
**Test Standards:** 47 CFR Part 2.1093 IEEE1528-2013 IEEE C95.1-2019  
KDB 447498 D01 KDB 447498 D04 KDB 865664 D01  
KDB 865664 D02 KDB 941225 D05 KDB 248227 D01  
KDB 648474 D04 KDB 690783 D01  
**FCC ID:** 2AUMJEV-06X  
**Test Conclusion:** Pass  
**Test Date:** 2023-04-17 to 2023-04-18  
**Date of Issue:** 2023-04-19

**Prepared By:**   
Monica Zhou / Project Engineer  
**Date:** 2023-04-19  
**Approved By:**   
Ryan.CJ / EMC Manager  
**Date:** 2023-04-19



*Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.*

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-04-19	Original
<i>Note:</i>	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

Table of Contents

1.	Introduction.....	4
1.1	<b>Identification of Testing Laboratory</b> .....	4
1.2	<b>Identification of the Responsible Testing Location</b> .....	4
1.3	<b>Laboratory Condition</b> .....	4
1.4	<b>Announcement</b> .....	4
2.	Product Information.....	5
2.1	<b>Application Information</b> .....	5
2.2	<b>Manufacturer Information</b> .....	5
2.3	<b>Factory Information</b> .....	5
2.4	<b>General Description of Equipment under Test (EUT)</b> .....	5
2.5	<b>Equipment under Test Ancillary Equipment</b> .....	5
2.6	<b>Technical Information</b> .....	5
3.	Summary of Test Results.....	6
3.1	<b>Test Standards</b> .....	6
3.2	<b>Device Category and SAR Limit</b> .....	7
3.3	<b>Test Result Summary</b> .....	7
3.4	<b>Test Uncertainty</b> .....	8
4.	Measurement System.....	10
4.1	<b>Specific Absorption Rate (SAR) Definition</b> .....	10
4.2	<b>MVG SAR System</b> .....	10
5.	System Verification.....	14
5.1	<b>Purpose of System Check</b> .....	14
5.2	<b>System Check Setup</b> .....	15
6.	TEST POSITION CONFIGURATIONS.....	15
6.1	<b>Wrist-worn &amp; Front-of-face Exposure Conditions</b> .....	15
7.	Measurement Procedure.....	16
7.1	<b>Measurement Process Diagram</b> .....	16
7.2	<b>SAR Scan General Requirement</b> .....	17
7.3	<b>Measurement Procedure</b> .....	18
7.4	<b>Area &amp; Zoom Scan Procedure</b> .....	18
8.	Conducted RF Output Power.....	19
8.1	<b>LTE</b> .....	19
8.2	<b>Wi-Fi</b> .....	23
8.3	<b>Bluetooth</b> .....	23
9.	Test Exclusion Consideration.....	24
9.1	<b>SAR Test Exclusion Consideration Table</b> .....	24
10.	Test Result.....	25
11.	SAR Measurement Variability.....	26
12.	Simultaneous Transmission.....	26
12.1	<b>Simultaneous Transmission Mode Considerations</b> .....	26
12.2	<b>Sum SAR of Simultaneous Transmission</b> .....	27
13.	Test Equipment List.....	28
	ANNEX A Simulating Liquid Verification Result.....	29
	ANNEX B System Check Result.....	29
	ANNEX C Test Data.....	38
	ANNEX D SAR Test Setup Photos.....	56
	ANNEX E EUT External and Internal Photos.....	56
	ANNEX F Calibration Report.....	56

## 1. Introduction

### 1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

### 1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101,201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1330

### 1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

### 1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2. Product Information

### 2.1 Application Information

Company Name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building1-A, Nankechuang yuangu, Dalang, Longhua District, Shenzhen, China

### 2.2 Manufacturer Information

Company Name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building1-A, Nankechuang yuangu, Dalang, Longhua District, Shenzhen, China

### 2.3 Factory Information

Company Name:	Shenzhen Eview GPS Technology
Address:	Rm 201, building1-A, Nankechuang yuangu, Dalang, Longhua District, Shenzhen, China

### 2.4 General Description of Equipment under Test (EUT)

EUT Name	Personal Safety Watch
Under Test Model Name	EV-06X
Hardware Version	EV-06X_V2.0
Software and Firmware Version	V2.0.3.200
Sample No.	BTFSN230307E002

### 2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Rated Voltage	3.8V

### 2.6 Technical Information

Network and Wireless connectivity	4G Network FDD LTE Band 2/4/12 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) Bluetooth (EDR+BLE)
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	LTE, WLAN, Bluetooth		
Frequency Range	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 12	TX: 698 ~ 716 MHz	RX: 728 ~ 746 MHz
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	Bluetooth	2402 ~ 2480 MHz	
Antenna Type	WWAN: LDS PIFA Antenna WLAN: LDS PIFA Antenna BT: LDS PIFA Antenna		
Hotspot Function	Not Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input type="checkbox"/> Production unit	<input checked="" type="checkbox"/> Identical prototype	

### 3. Summary of Test Results

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB 447498 D01	General RF Exposure Guidance v06
5	KDB 447498 D04	Interim General RF Exposure Guidance v01
6	KDB 865664 D01	SAR measurement 100MHz to 6GHz v01r04
7	KDB 865664 D02	RF Exposure Reporting v01r02
8	KDB 941225 D05	SAR for LTE Devices v02r05
9	KDB 248227 D01	802.11 Wi-Fi SAR v02r02
10	KDB 648474 D04	Handset SAR v01r03
11	KDB 690783 D01	SAR Listings on Grant v01r03

### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:  
**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.  
**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Wrist-worn 10-g SAR (0 mm Gap)	LTE Band 2	0.375	PCT	0.375
	LTE Band 4	0.344		
	LTE Band 12	0.335		
	WLAN 2.4 GHz	0.542	DTS	
	Bluetooth	0.080	DSS	
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)
Next-to-mouth 1-g SAR (10 mm Gap)	LTE Band 2	0.234	PCT	0.234
	LTE Band 4	0.215		
	LTE Band 12	0.204		
	WLAN 2.4 GHz	0.116	DTS	
	Bluetooth	0.118	DSS	

\*This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (4.0W/kg for wrist-worn/1.6 W/kg for next-to-mouth) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Wrist-worn 10-g SAR (0 mm Gap)	LTE Band 2 + 2.4G Wifi	0.917	4.0	Pass
Next-to-mouth 1-g SAR (10 mm Gap)	LTE Band 2 + 2.4G Wifi	0.350	1.6	Pass



### 3.4 Test Uncertainty

#### 3.4.1 Measurement uncertainty evaluation for SAR test

#### Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
<b>Test sample Related</b>								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
<b>Phantom and Tissue Parameters</b>								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

\* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+- %)	10 g Ui (+- %)	Vi veff
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	√3	0	0	0.00	0.00	∞
Boundary effect	1	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1	R	√3	1	1	0.58	0.58	∞
Modulation response	0	N	√3	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	0	0	0.00	0.00	∞
Integration Time	1.4	R	√3	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
<b>Dipole</b>								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	√3	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	√3	1	1	1.15	1.15	∞
<b>Phantom and Tissue Parameters</b>								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

## 4. Measurement System

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person’s awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,  
ρ is the mass density of the tissue and E is the RMS electrical field strength.

### 4.2 MVG SAR System

#### 4.2.1 SAR system diagram

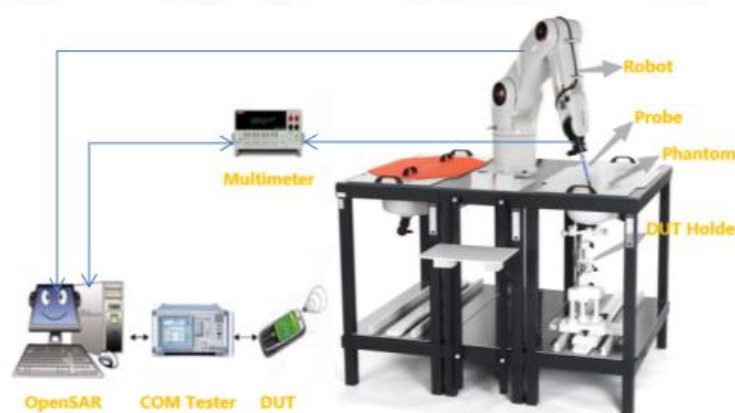

#### 4.2.2 Robot



- A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System
- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
  - Must be able to set the probe orthogonal of the surface of the phantom ( $\pm 30^\circ$ ).
  - Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

#### 4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for  $f \geq 4\text{GHz}$ .
- Probe linearity:  $< 0.25\text{dB}$ .
- Axial Isotropy:  $< 0.25\text{dB}$ .
- Spherical Isotropy:  $< 0.50\text{dB}$ .
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than  $20^\circ$ .



#### 4.2.4 Phantoms

##### **SAM Phantom**

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



**SAM Phantom**

The thickness of the phantom amounts to  $2\text{ mm} \pm 0.2\text{ mm}$ . The materials for the phantom do not affect the radiation of the device under test (DUT) :  $\epsilon_r' < 5$   
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

**TWIN SAM phantom**

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

**ELLIPTICAL Phantom**

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




**ELLI Phantom**

The shape of the phantom is an ellipse with length  $600\text{ mm} \pm 5\text{ mm}$  and width  $400\text{ mm} \pm 5\text{ mm}$ .  
The phantom shell is made of low-loss and low-permittivity material, having loss tangent  $\tan \delta \leq 0.05$  and relative permittivity:  
 $\epsilon_r' \leq 5$  for  $f \leq 3\text{ GHz}$   
 $3 \leq \epsilon_r' \leq 5$  for  $f > 3\text{ GHz}$   
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of  $\pm 0.2\text{ mm}$ .

**Technical & mechanical characteristics**

Shell thickness	$2\text{ mm} \pm 0.2\text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

#### 4.2.5 Device Holder

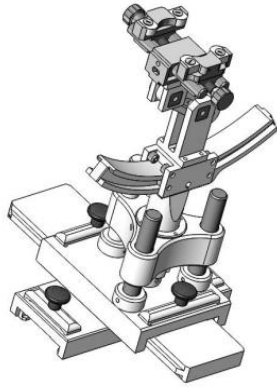

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005

*(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)*

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


#### 4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth



Body Liquid Depth

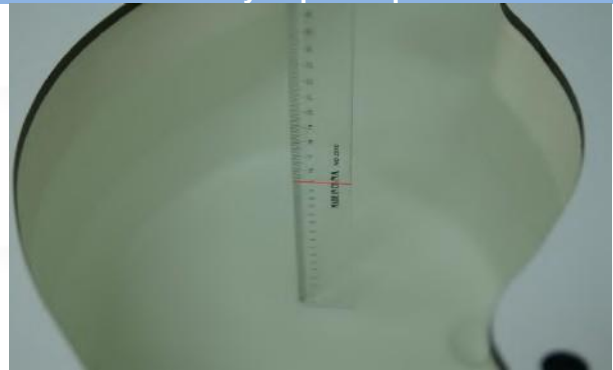

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water (%)	DGBE (%)			Salt (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20


## 5. System Verification

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.



## 5.2 System Check Setup

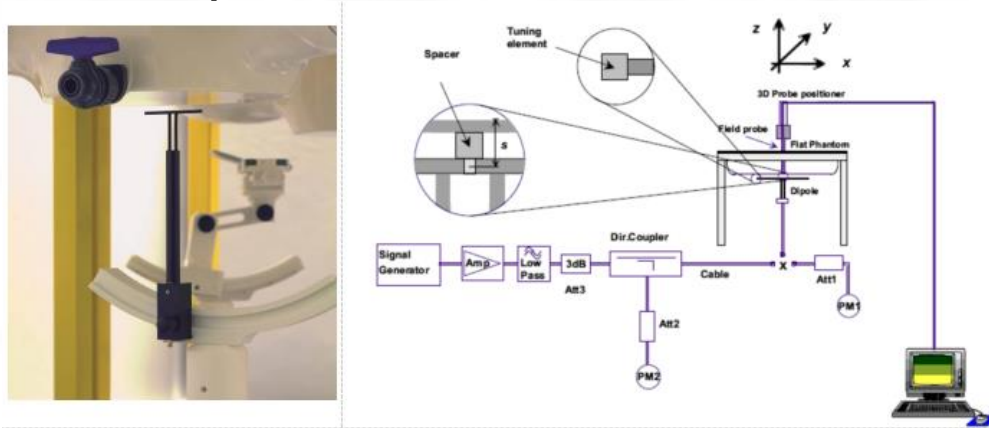

## 6. TEST POSITION CONFIGURATIONS

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, wristwatches are tested for SAR compliance in wrist-worn and front-of-face use configurations described in the following subsections.

### 6.1 Wrist-worn & Front-of-face Exposure Conditions

Transmitters that are built-in within a wristwatch, or similar wrist-worn devices, typically operate in “speakerphone mode” for voice communication, with the device worn on the wrist and positioned next to the mouth. Operations next to the mouth requires 1-g SAR measurement, while the wrist-worn condition requires 10-g extremity SAR measurement. SAR test exemptions for 10-g extremity with the wrist and 1-g with face exposure condition may be applied. When SAR evaluation is required, next-to-mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom to measure head SAR. The wrist bands shall be strapped together to represent normal use conditions. SAR for wrist exposure is evaluated with the back of the device positioned in direct contact against a flat phantom filled with body tissue-equivalent medium. The wrist bands shall be unstrapped and touching the phantom. The space introduced between the transmitter and the flat phantom must be representative of actual use conditions.

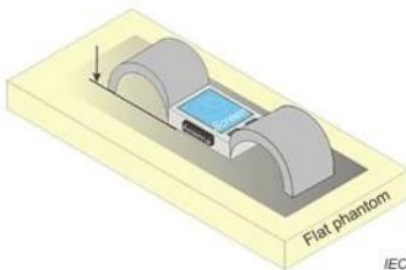


Figure 12 – Test position for limb-worn devices

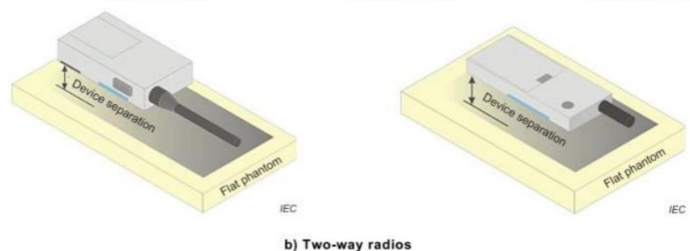



Figure 10 – Test positions for front-of-face devices



## 7. Measurement Procedure

### 7.1 Measurement Process Diagram

Body SAR

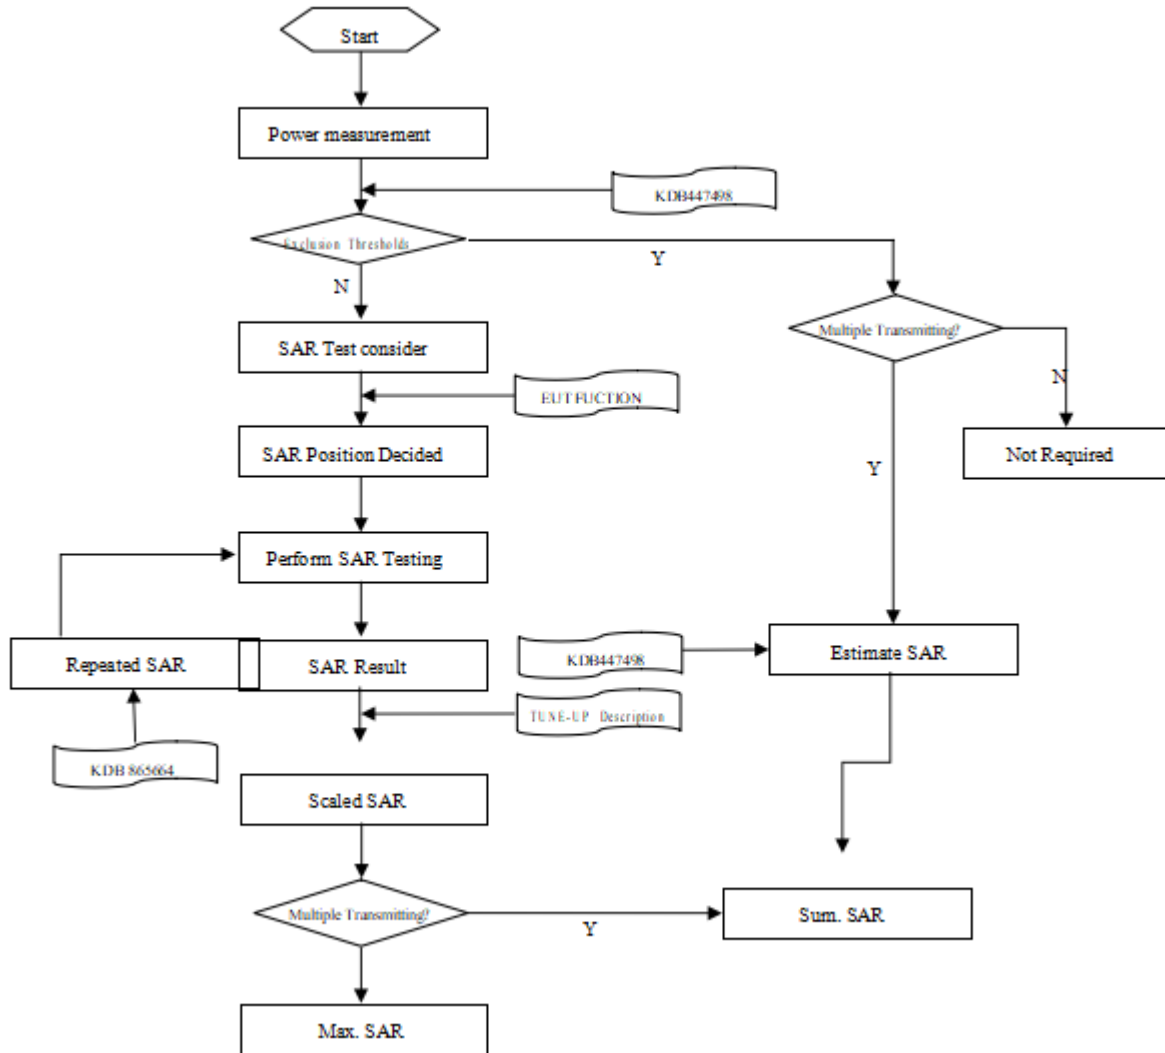

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	5–6 GHz: ≤ 2 mm
				3–4 GHz: ≤ 3 mm
	Δz Zoom (n>1): between subsequent points		4–5 GHz: ≤ 2.5 mm	
				5–6 GHz: ≤ 2 mm
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note: 1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details. 2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8. Conducted RF Output Power

### 8.1 LTE

Band 2

LTE-FDD Band 2					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
1.4MHz	QPSK	1	0	24.50	24.17	24.32	23.60
			2	24.50	24.19	24.33	23.56
			5	24.50	24.12	24.34	23.61
		3	0	24.50	24.26	24.42	24.26
			2	24.50	24.23	24.40	24.27
			3	24.50	24.22	24.41	24.28
	16QAM	1	0	23.50	23.42	23.40	23.32
			2	24.00	23.55	23.09	22.92
			5	24.00	23.54	23.04	22.91
		3	0	24.00	23.55	23.08	22.91
			2	24.00	23.34	23.42	23.54
			3	24.00	23.34	23.38	23.58
3MHz	QPSK	1	0	24.00	23.35	23.38	23.59
			2	24.00	23.35	23.38	23.59
			5	22.50	22.46	22.45	22.36
		8	0	24.00	23.46	23.40	23.36
			4	23.50	23.45	23.35	23.45
			7	23.50	23.47	23.34	23.45
	16QAM	1	0	23.50	23.46	23.40	23.36
			7	24.00	23.31	23.12	23.87
			14	24.00	23.21	23.10	23.79
		8	0	24.00	23.15	23.09	23.77
			4	23.00	22.44	22.64	22.60
			7	23.00	22.43	22.59	22.59
5MHz	QPSK	1	0	23.00	22.44	22.59	22.58
			13	23.00	22.43	22.59	22.47
			24	23.00	22.43	22.59	22.47
		12	0	23.00	22.43	22.59	22.47
			6	23.50	23.43	23.42	23.43
			13	23.50	23.43	23.42	23.43
	16QAM	1	0	23.50	23.46	23.44	23.46
			13	24.00	23.43	23.76	23.22
			24	24.00	23.38	23.51	23.00
		12	0	23.00	23.43	23.73	23.07
			6	23.00	22.49	22.63	22.50
			13	23.00	22.47	22.59	22.44
10MHz	QPSK	1	0	23.00	22.53	22.61	22.49
			13	23.00	22.53	22.61	22.49
			24	23.00	22.53	22.61	22.49
		25	0	25.00	24.71	24.50	24.35
			13	25.00	24.51	24.31	23.86
			24	25.00	24.73	24.51	24.06
	16QAM	1	0	23.50	23.45	23.47	23.49
			6	23.50	23.43	23.39	23.44
			13	23.50	23.43	23.42	23.43
		25	0	23.50	23.46	23.44	23.46
			13	24.00	23.43	23.76	23.22
			24	24.00	23.38	23.51	23.00
10MHz	QPSK	1	0	23.00	23.43	23.76	23.22
			13	24.00	23.38	23.51	23.00
			24	24.00	23.43	23.73	23.07
		25	0	23.00	22.49	22.63	22.50
			6	23.00	22.47	22.59	22.44
			13	23.00	22.47	22.59	22.44
	16QAM	1	0	23.00	22.53	22.61	22.49
			13	23.00	22.53	22.61	22.49
			24	23.00	22.53	22.61	22.49
		25	0	24.00	24.09	24.05	23.99
			25	24.00	23.87	23.87	23.86
			49	24.50	24.11	24.10	24.01
16QAM	25	0	24.00	23.49	23.47	23.60	
		13	24.00	23.49	23.44	23.51	
		25	24.00	23.57	23.44	23.52	
	50	0	24.00	23.56	23.46	23.58	
		25	24.00	23.52	23.33	23.06	
		49	23.50	23.44	23.23	23.03	
16QAM	1	0	24.00	23.51	23.29	23.04	
		25	24.00	23.51	23.29	23.04	
		49	24.00	23.51	23.29	23.04	
	25	0	23.00	22.54	22.68	22.70	
		13	23.00	22.58	22.63	22.61	
		25	23.00	22.63	22.61	22.61	
10MHz	QPSK	1	0	23.00	22.57	22.62	22.60
			25	23.00	22.57	22.62	22.60
			49	23.00	22.57	22.62	22.60
		25	0	23.00	22.57	22.62	22.60
			25	23.00	22.57	22.62	22.60
			49	23.00	22.57	22.62	22.60

LTE-FDD Band 2					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
15MHz	QPSK	1	0	24.00	23.86	23.76	23.74
			38	24.00	23.91	23.88	23.75
			74	24.00	23.85	23.80	23.61
		36	0	23.50	23.40	23.38	23.36
			18	23.50	23.47	23.39	23.45
			39	24.00	23.51	23.39	23.43
	16QAM	75	0	24.00	23.48	23.42	23.53
			0	23.50	23.44	23.18	23.28
			38	23.50	23.49	23.22	23.30
		36	74	23.50	23.39	23.17	23.18
			0	23.00	22.47	22.59	22.58
			18	23.00	22.51	22.58	22.51
20MHz	QPSK	1	0	24.00	23.70	23.80	23.91
			50	24.00	23.78	23.89	23.82
			99	24.00	23.79	23.86	23.76
		50	0	24.00	23.47	23.52	23.49
			25	24.00	23.58	23.46	23.42
			50	24.00	23.53	23.50	23.47
	16QAM	100	0	24.00	23.51	23.48	23.39
			0	24.00	23.20	23.24	23.66
			50	24.00	23.20	23.28	23.59
		50	99	24.00	23.14	23.28	23.56
			0	23.00	22.46	22.68	22.63
			25	23.00	22.56	22.58	22.55
16QAM	100	50	23.00	22.53	22.63	22.45	
		0	23.00	22.51	22.66	22.54	

Band 4

LTE-FDD Band 4					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19957	20176	20393
					1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	23.50	23.27	23.08	22.96
			2	23.50	23.33	23.17	23.04
			5	23.50	23.25	23.08	22.92
		3	0	23.50	23.38	23.21	23.10
			2	23.50	23.32	23.20	23.03
			3	23.50	23.35	23.21	23.04
	16QAM	6	0	22.50	22.39	22.26	22.11
			0	22.50	22.13	22.25	22.14
			2	22.50	22.27	22.37	22.28
		3	5	22.50	22.11	22.29	22.17
			0	22.50	22.18	22.12	21.98
			2	22.50	22.11	22.09	21.93
3MHz	QPSK	15	3	22.50	22.16	22.10	21.91
			0	21.50	21.44	21.20	21.18
			0	22.50	22.16	21.79	21.97
		8	7	22.50	22.30	21.90	22.03
			14	22.50	22.15	21.77	21.92
			0	21.50	21.29	21.09	21.03
	16QAM	15	4	21.50	21.39	21.22	21.08
			7	21.50	21.32	21.15	21.02
			0	21.50	21.28	21.04	20.95

LTE-FDD Band 4					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976	20176	20375
					1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	23.50	23.34	23.29	23.06
			13	23.50	23.48	23.38	23.19
			24	23.50	23.30	23.19	23.03
		12	0	22.50	22.28	22.19	22.08
			6	22.50	22.34	22.23	22.14
			13	22.50	22.35	22.21	22.05
	16QAM	25	0	22.50	22.34	22.20	22.08
			0	22.50	22.39	22.34	22.25
			13	23.00	22.52	22.49	22.39
		12	24	22.50	22.35	22.33	22.28
			0	21.50	21.27	21.22	21.17
			6	21.50	21.38	21.28	21.19
25	13	21.50	21.35	21.30	21.14		
	0	21.50	21.38	21.32	21.12		
	0	21.50	21.38	21.32	21.12		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20000	20176	20350
					1715.0MHz	1732.5MHz	1750.0MHz
10MHz	QPSK	1	0	23.50	23.36	23.33	23.08
			25	23.50	23.36	23.35	23.11
			49	23.50	23.30	23.23	23.01
		25	0	22.50	22.24	22.13	22.10
			13	22.50	22.39	22.28	22.13
			25	22.50	22.33	22.22	22.01
	16QAM	50	0	22.50	22.33	22.22	22.07
			0	23.00	22.53	22.18	22.27
			25	23.00	22.54	22.16	22.33
		25	49	23.00	22.50	22.15	22.29
			0	21.50	21.26	21.20	21.14
			13	21.50	21.40	21.31	21.14
50	25	21.50	21.29	21.29	21.03		
	0	21.50	21.29	21.23	21.06		
	0	21.50	21.29	21.23	21.06		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20025	20176	20325
					1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	23.50	23.28	23.30	23.07
			38	23.50	23.41	23.38	23.20
			74	23.50	23.21	23.19	23.04
		36	0	22.50	22.25	22.16	22.11
			18	22.50	22.34	22.20	22.16
			39	22.50	22.27	22.22	22.07
	16QAM	75	0	22.50	22.29	22.22	22.14
			0	22.50	22.45	22.17	22.37
			38	23.00	22.54	22.26	22.48
		36	74	22.50	22.36	22.08	22.32
			0	21.50	21.26	21.13	21.16
			18	21.50	21.32	21.20	21.21
75	39	21.50	21.28	21.21	21.11		
	0	21.50	21.22	21.21	21.12		
	0	21.50	21.22	21.21	21.12		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20176	20300
					1720.0MHz	1732.5MHz	1745.0MHz
20MHz	QPSK	1	0	23.50	23.34	23.14	23.14
			50	<b>23.50</b>	<b>23.48</b>	23.23	23.26
			99	23.50	23.27	22.97	23.08
		50	0	22.50	22.28	22.20	22.08
			25	22.50	<b>22.38</b>	22.27	22.17
			50	22.50	22.29	22.30	22.04
	16QAM	100	0	22.50	22.27	22.23	22.03
			0	22.50	22.42	22.21	22.22
			1	23.00	22.59	22.35	22.35
		50	99	22.50	22.32	22.09	22.18
			0	21.50	21.26	21.27	21.09
			25	21.50	21.37	21.36	21.24
100	50	21.50	21.29	21.36	21.08		
	0	21.50	21.28	21.24	21.01		
	0	21.50	21.28	21.24	21.01		

Band 12

LTE-FDD Band 12					Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23017	23095	23173
					699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	23.00	22.90	22.98	22.96
			2	23.50	22.96	23.07	23.00
			5	23.50	22.84	23.01	22.99
		3	0	23.50	23.07	23.14	23.17
			2	23.50	23.08	23.16	23.21
			3	23.50	23.07	23.15	23.18
	16QAM	6	0	22.50	22.14	22.17	22.18
			0	22.50	22.08	22.03	22.01
			1	22.50	22.17	22.07	22.07
		3	2	22.50	22.06	22.05	21.95
			0	22.50	22.07	22.23	22.36
			3	22.50	22.06	22.23	22.45
6	0	21.50	22.04	22.23	22.40		
0	21.50	21.28	21.25	21.34	21.34		
3MHz	QPSK	1	0	23.00	22.78	22.83	22.87
			7	23.50	22.87	23.00	23.05
			14	23.00	22.75	22.85	22.94
		8	0	22.50	22.07	22.10	22.15
			4	22.50	22.02	22.13	22.17
			7	22.50	21.95	22.11	22.15
	16QAM	15	0	22.50	22.00	22.10	22.12
			0	22.50	22.35	22.07	21.95
			7	22.50	22.46	22.20	22.09
		8	14	22.50	22.34	22.06	21.97
			0	21.50	21.30	21.13	21.30
			4	21.50	21.30	21.24	21.30
7	21.50	21.23	21.14	21.29			
15	0	21.50	21.23	21.17	21.25		
5MHz	QPSK	1	0	23.50	23.05	23.12	23.16
			13	23.50	23.23	23.29	23.33
			24	23.50	23.17	23.15	23.22
		12	0	22.50	22.18	22.12	22.26
			6	22.50	22.17	22.20	22.28
			13	22.50	22.19	22.19	22.27
	16QAM	25	0	22.50	22.24	22.19	22.30
			0	22.00	21.90	22.42	22.27
			13	23.00	22.13	22.54	22.41
		1	24	22.50	22.05	22.44	22.34
			0	21.50	21.27	21.22	21.38
			6	21.50	21.25	21.36	21.37
13	21.50	21.28	21.33	21.34			
25	0	21.50	21.36	21.31	21.40		
10MHz	QPSK	1	0	23.50	23.12	23.10	23.22
			25	23.50	23.25	23.26	23.33
			49	23.50	23.22	23.22	23.33
		25	0	22.50	22.22	21.97	22.16
			13	22.50	22.28	22.29	22.31
			25	22.50	22.35	22.10	22.25
	16QAM	50	0	22.50	22.33	22.11	22.24
			0	23.00	22.68	22.35	22.23
			1	23.00	22.86	22.46	22.36
		25	49	23.00	22.83	22.47	22.37
			0	21.50	21.36	21.19	21.42
			13	21.50	21.49	21.43	21.49
25	22.00	21.56	21.30	21.41			
50	0	21.50	21.40	21.14	21.42		
10MHz	QPSK	1	0	23.50	23.12	23.10	23.22
			25	23.50	23.25	23.26	23.33
			49	23.50	23.22	23.22	23.33
		25	0	22.50	22.22	21.97	22.16
			13	22.50	22.28	22.29	22.31
			25	22.50	22.35	22.10	22.25
	16QAM	50	0	22.50	22.33	22.11	22.24
			0	23.00	22.68	22.35	22.23
			1	23.00	22.86	22.46	22.36
		25	49	23.00	22.83	22.47	22.37
			0	21.50	21.36	21.19	21.42
			13	21.50	21.49	21.43	21.49
25	22.00	21.56	21.30	21.41			
50	0	21.50	21.40	21.14	21.42		



### 8.2 Wi-Fi

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4 (2.4-2.4835)	802.11b	1	2412	20.29	20.50	No
		6	2437	<b>20.62</b>	<b>21.00</b>	Yes
		11	2462	20.62	21.00	No
	802.11g	1	2412	23.90	24.00	No
		6	2437	23.82	24.00	No
		11	2462	23.87	24.00	No
	802.11n(HT20)	1	2412	23.69	24.00	No
		6	2437	23.74	24.00	No
		11	2462	23.67	24.00	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2W/kg.

### 8.3 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
			GFSK	7.50	6.55
	π/4QPSK	6.50	5.92	6.33	6.42
	8DPSK	6.50	5.74	6.15	6.22

BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	20	39
			2402MHz	2440MHz	2480MHz
			1Mbps	-1.50	-1.86
	2Mbps	1.50	-2.01	-1.69	-1.74

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Power thresholds (mW)	RF exposure evaluation required
78	2.480	7.50	5.62	0	2.72	Yes
78	2.480	7.50	5.62	10	10.17	No

- Note**
- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances ≤ 40 cm are determined by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad \text{(B. 2)}$$

where

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad \text{(B. 1)}$$


$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20 \text{ cm}}$  is per Formula (B.1).

- \*When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

## 9. Test Exclusion Consideration

Antenna information:

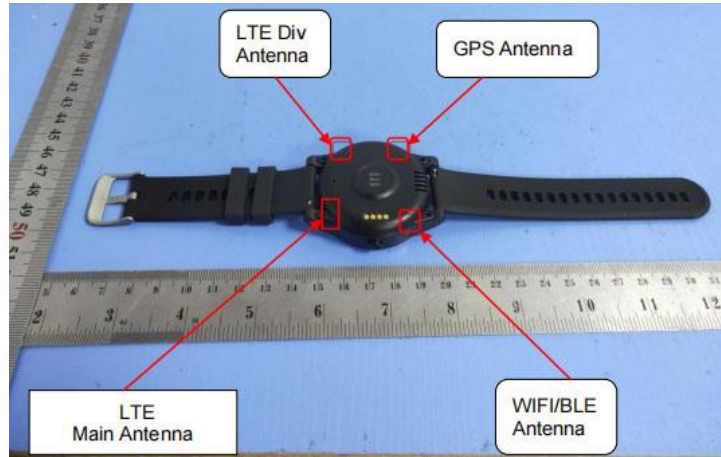

WWAN Main Antenna	LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
<p>Note:</p> <ol style="list-style-type: none"> <li>1. According to KDB 447498 D04 Interim General RF Exposure Guidance v01, wristwatches are tested for SAR compliance in wrist-worn and front-of-face use configurations.</li> <li>2. Operations next to the mouth requires 1-g SAR measurement, while the wrist-worn condition requires 10-g extremity SAR measurement.</li> <li>3. SAR test exemptions for 10-g extremity with the wrist (with the back of the device positioned in direct contact against a flat phantom) and 1-g with face exposure condition (with the front of the device positioned in 10 mm from a flat phantom) may be applied.</li> </ol>	

### 9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm

Mode	Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Estimated SAR (W/kg)
BT	78	2.480	7.50	5.62	0	/
	78	2.480	7.50	5.62	10	0.118

## 10. Test Result

Wrist-worn											
Band	Mode	Test Position with 0 mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)	Limit (W/Kg)
2.4G Wifi	802.11b	Back	6	2437	20.62	21.00	-1.390	0.497	1.091	<b>0.542</b>	4.0
BT	GFSK	Back	78	2480	7.15	7.50	-1.970	0.074	1.084	0.080	
Next-to-mouth											
Band	Mode	Test Position with 10 mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
2.4G Wifi	802.11b	Front	6	2437	20.62	21.00	-1.440	0.106	1.091	0.116	1.6

**Note:**

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10<sup>1</sup>{(tune-up limit power(dBm) - Ave.power power (dBm))/10}, where tune-up limit is the maximum rated power among all production units. Reported SAR(W/kg)=Measured SAR (W/kg)\*Scaling Factor.

Wrist-worn													
Band	Mode	Test Position with 0 mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)	Limit (W/Kg)
LTE Band 2	QPSK (20MHz)	Back	19100	1900	1	0	23.91	24.00	-0.150	0.367	1.021	<b>0.375</b>	4.0
					50	0	23.49	23.50	-1.200	0.352	1.002	0.353	
LTE Band 4	QPSK (20MHz)	Back	20050	1720	1	50	23.48	23.50	-2.950	0.342	1.005	<b>0.344</b>	
					50	25	22.38	22.50	0.520	0.328	1.028	0.337	
LTE Band 12	QPSK (10MHz)	Back	23130	711	1	25	23.33	23.50	-2.080	0.322	1.040	<b>0.335</b>	
					25	13	22.31	22.50	-1.100	0.291	1.045	0.304	
Next-to-mouth													
Band	Mode	Test Position with 10 mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
LTE Band 2	QPSK (20MHz)	Front	19100	1900	1	0	23.91	24.00	-2.280	0.229	1.021	<b>0.234</b>	1.6
					50	0	23.49	23.50	-1.200	0.180	1.002	0.180	
LTE Band 4	QPSK (20MHz)	Front	20050	1720	1	50	23.48	23.50	-1.990	0.214	1.005	<b>0.215</b>	
					50	25	22.38	22.50	0.520	0.178	1.028	0.183	
LTE Band 12	QPSK (10MHz)	Front	23130	711	1	25	23.33	23.50	1.910	0.196	1.040	<b>0.204</b>	
					25	13	22.31	22.50	-1.100	0.158	1.045	0.165	

**Note:**

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor=10<sup>1</sup>{(tune-up limit power(dBm) - Ave.power power (dBm))/10}, where tune-up limit is the maximum rated power among all production units. Reported SAR(W/kg)=Measured SAR (W/kg)\*Scaling Factor.

## 11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is  $0.229 < 0.80$  W/kg, repeated measurement is not required.

## 12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

### 12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna, Wifi/BT antenna supports 2.4G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

NO.	Configuration	Wrist-worn	Next-to-mouth
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+BT	Yes	Yes

## 12.2 Sum SAR of Simultaneous Transmission

Wrist-worn

Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Back	1	<b>0.375</b>	0.542	0.080	<b>0.917</b>	0.455	N/A	N/A
		50	0.353	0.542	0.080	0.895	0.433	N/A	N/A
LTE Band 4 QPSK (20MHz)	Back	1	<b>0.344</b>	0.542	0.080	0.886	0.424	N/A	N/A
		50	0.337	0.542	0.080	0.879	0.417	N/A	N/A
LTE Band 12 QPSK (10MHz)	Back	1	<b>0.335</b>	0.542	0.080	0.877	0.415	N/A	N/A
		25	0.304	0.542	0.080	0.846	0.384	N/A	N/A

Next-to-mouth

Band	Test Position	RB allocation	Scaled			Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	Bluetooth				
LTE Band 2 QPSK (20MHz)	Back	1	<b>0.234</b>	0.116	0.118	<b>0.350</b>	0.352	N/A	N/A
		50	0.180	0.116	0.118	0.296	0.298	N/A	N/A
LTE Band 4 QPSK (20MHz)	Back	1	<b>0.215</b>	0.116	0.118	0.331	0.333	N/A	N/A
		50	0.183	0.116	0.118	0.299	0.301	N/A	N/A
LTE Band 12 QPSK (10MHz)	Back	1	<b>0.204</b>	0.116	0.118	0.320	0.322	N/A	N/A
		25	0.165	0.116	0.118	0.281	0.283	N/A	N/A

### 13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPG0365	2023/02/06	2024/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2022/11/24	2023/11/23
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2022/11/24	2023/11/23
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2022/11/24	2023/11/23
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2023/03/24	2024/03/23
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2023/03/24	2024/03/23
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2023/03/24	2024/03/23
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2023/03/24	2024/03/23
750MHz Validation Dipole	MVG	SID750	07/22 DIP 0G835-655	2023/02/06	2024/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2024/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2024/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2024/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	/	/
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2022/11/24	2023/11/23
Thermometer	Riters	DT-232	21A11	2023/03/24	2024/03/23
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	/	/	/	/
Open SAR test software	MVG	/	V5.3.5	/	/

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	$\epsilon_r$		$\sigma$ (s/m)		Delta ( $\epsilon_r$ )	Delta ( $\sigma$ )	Limit	Temp ( $^{\circ}$ C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.80	0.89	0.86	0.24%	3.37%	$\pm$ 5%	20.0	17/4/2023
1800	40.00	39.91	1.40	1.37	0.23%	2.14%	$\pm$ 5%	20.0	17/4/2023
1900	40.00	39.88	1.40	1.41	0.30%	-0.71%	$\pm$ 5%	20.0	18/3/2023
2450	39.20	39.08	1.80	1.81	0.31%	-0.56%	$\pm$ 5%	20.0	18/3/2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2  $^{\circ}$ C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

## ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	1g SAR (W/Kg)	10g SAR (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Deviation	10g SAR Deviation
750	16	0.138	0.092	8.63	5.75	8.25	5.38	4.55%	6.88%
1800	16	0.588	0.312	36.75	19.50	39.33	20.61	-6.56%	-5.39%
1900	16	0.630	0.322	39.38	20.13	40.97	20.7	-3.89%	-2.78%
2450	16	0.793	0.352	49.56	22.00	54.4	23.86	-8.89%	-7.80%



## System Performance Check Data (750 MHz)

### System check at 750 MHz

Date of measurement: 17/4/2023


#### **A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW

#### **B. Permittivity**

Frequency (MHz)	750.000
Relative permittivity (real part)	41.800
Relative permittivity (imaginary part)	21.460
Conductivity (S/m)	0.860

#### **C. SAR Surface and Volume**

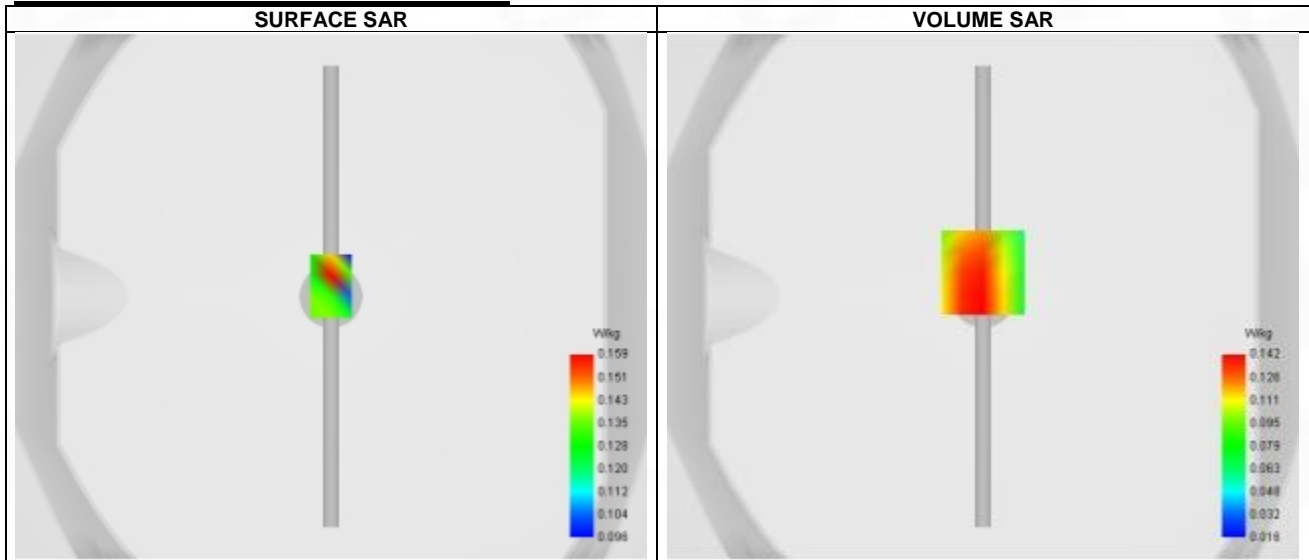


Maximum location: X=0.00, Y=9.00 ; SAR Peak: 0.20 W/kg

#### **D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.138
Variation (%)	-2.190
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.287	0.142	0.092	0.073	0.042

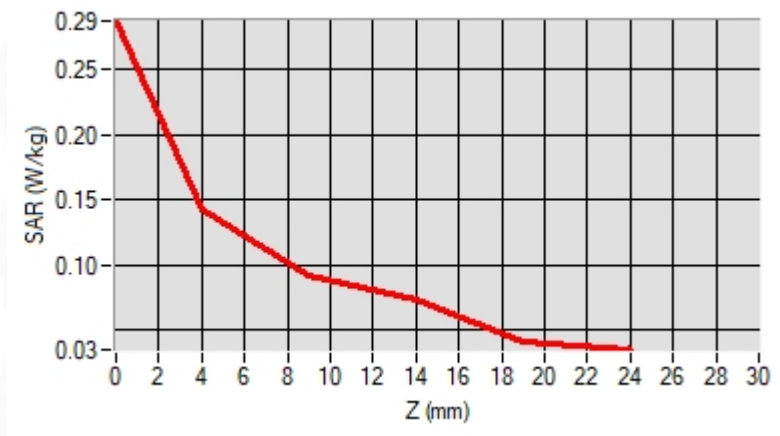

### F. 3D Image

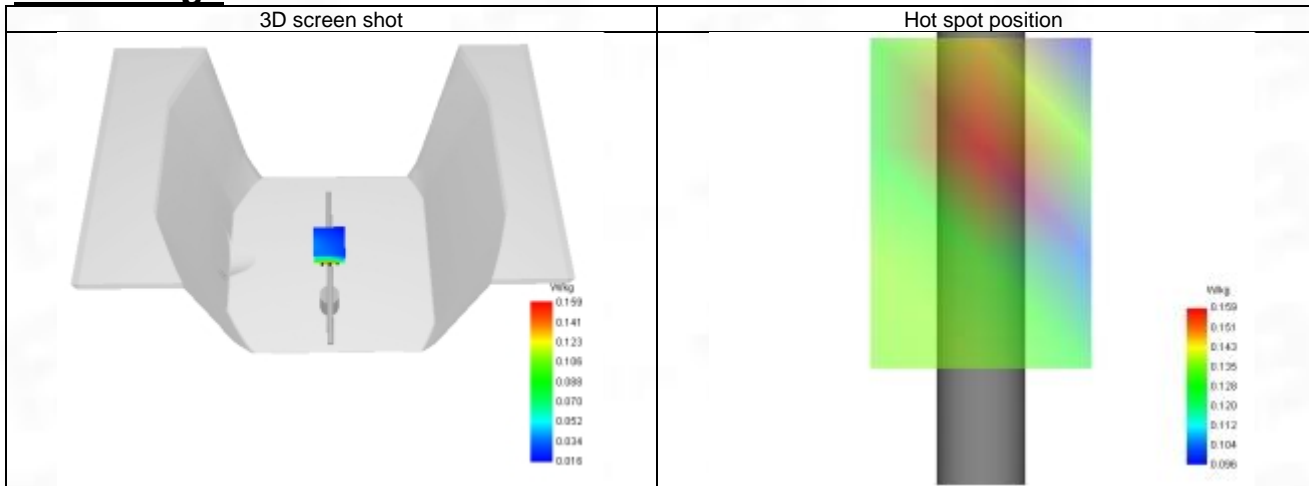

## System Performance Check Data (1800 MHz)

### System check at 1800 MHz

Date of measurement: 17/4/2023


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.910
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

#### C. SAR Surface and Volume

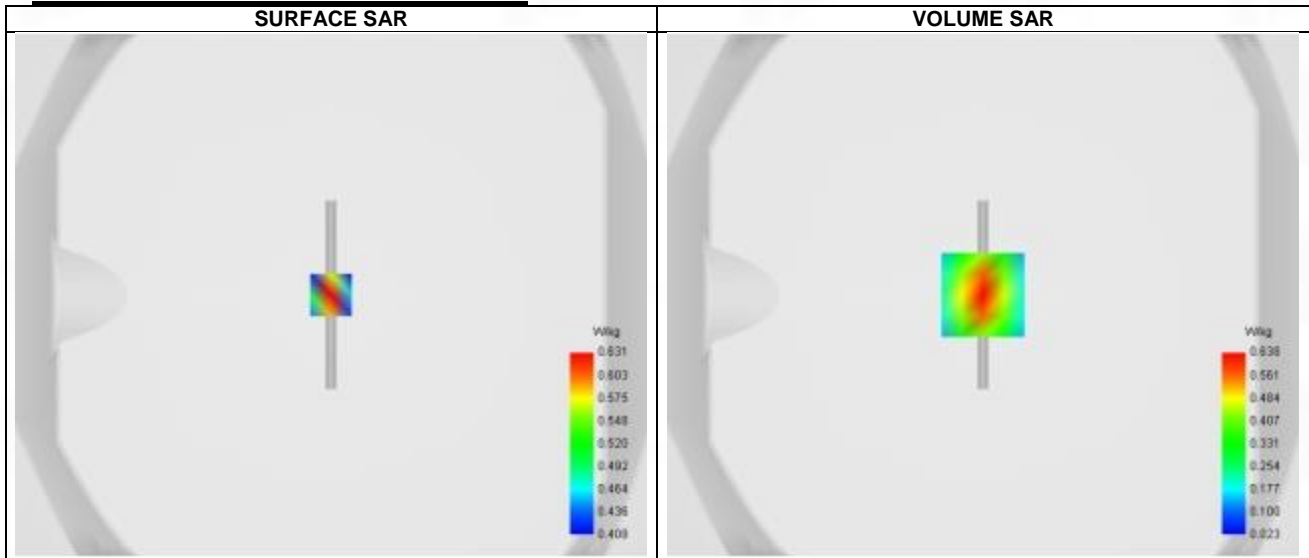


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

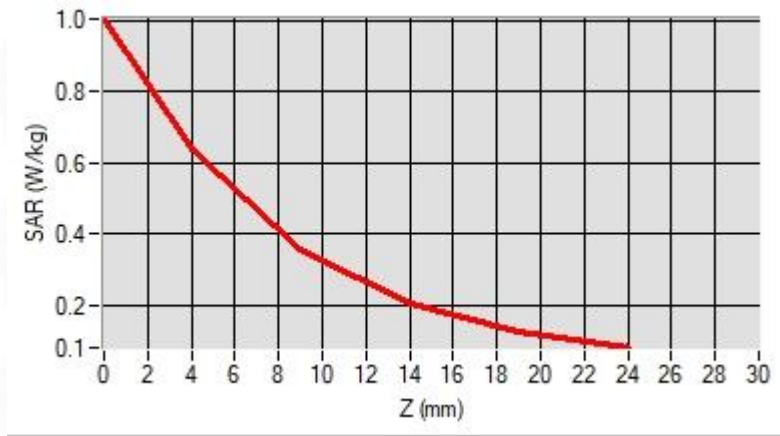

### F. 3D Image

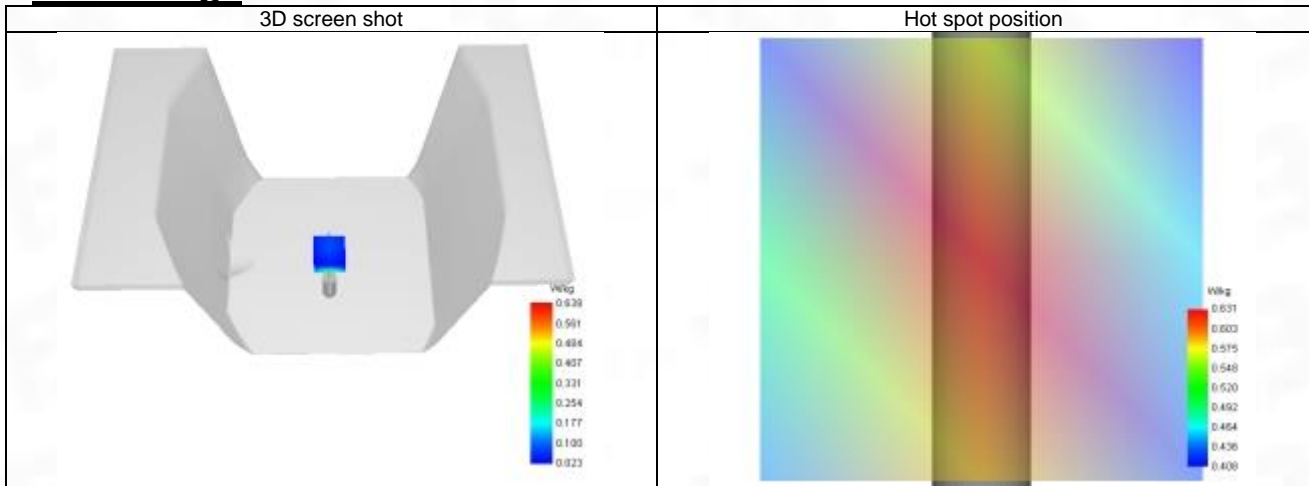

## System Performance Check Data (1900 MHz)

### System check at 1900 MHz

Date of measurement: 18/4/2023


#### **A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

#### **B. Permittivity**

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

#### **C. SAR Surface and Volume**

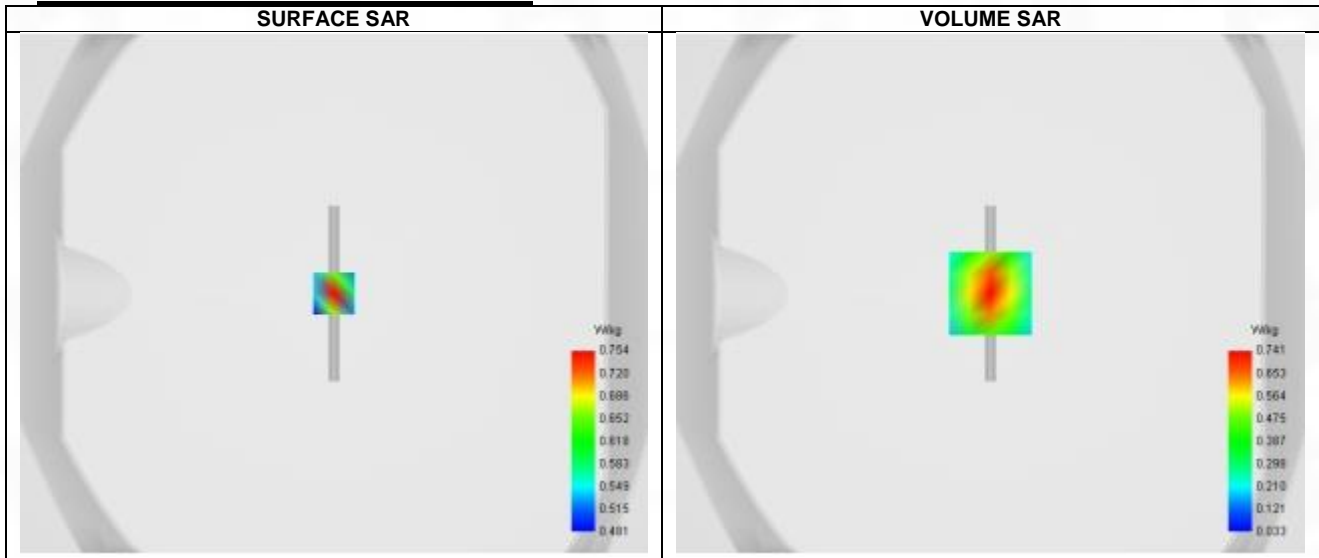


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

#### **D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

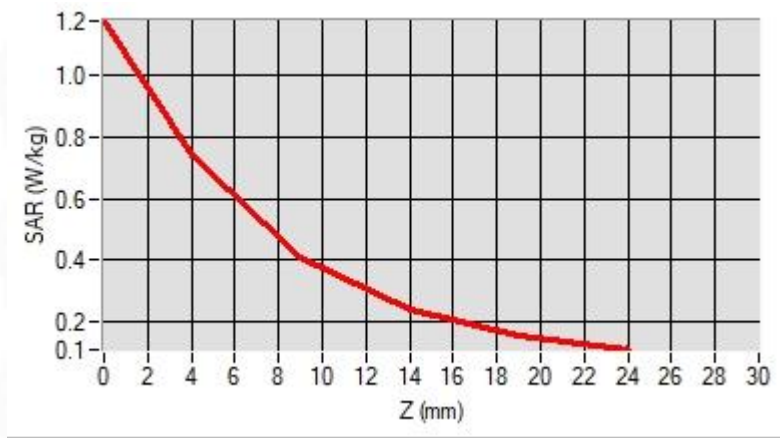

### F. 3D Image

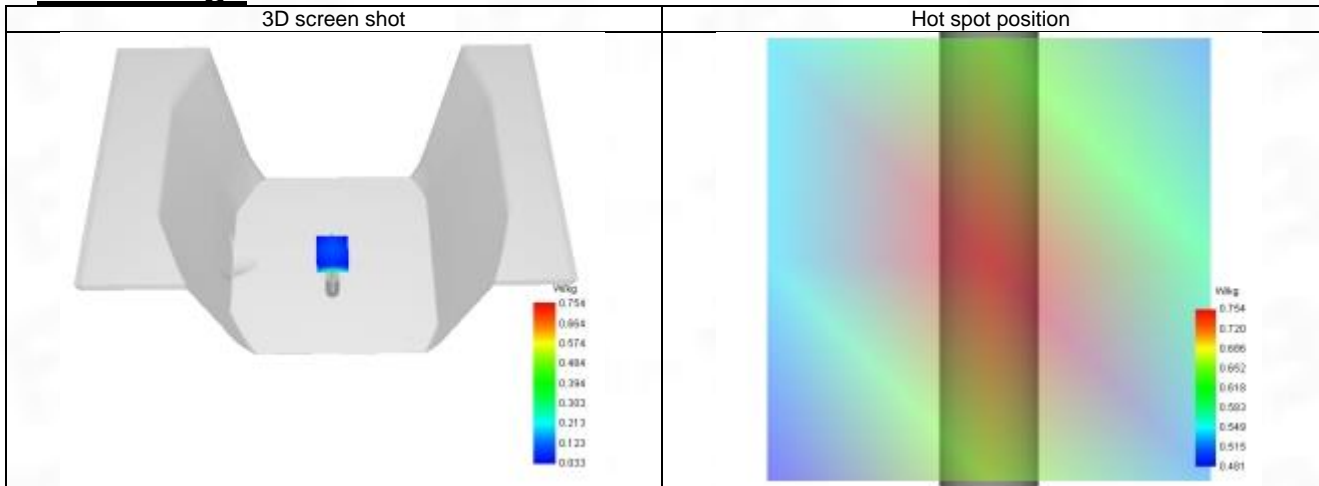

## System Performance Check Data (2450 MHz)

### System check at 2450 MHz

Date of measurement: 18/4/2023


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.080
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

#### C. SAR Surface and Volume

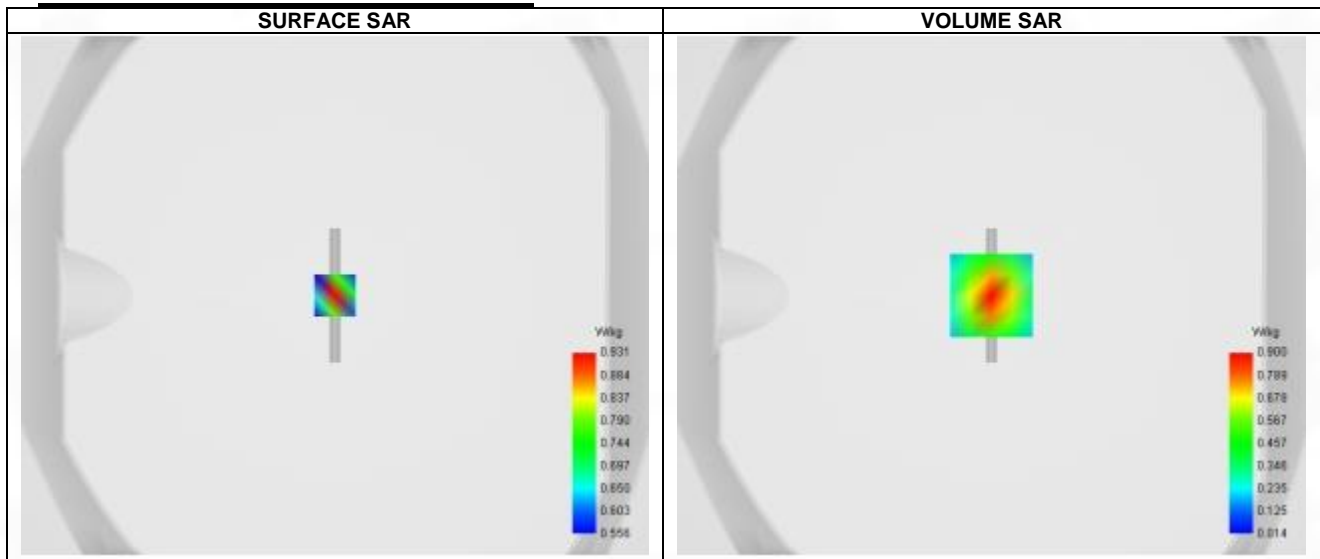

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg


#### D. SAR 1g & 10g

SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000




### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

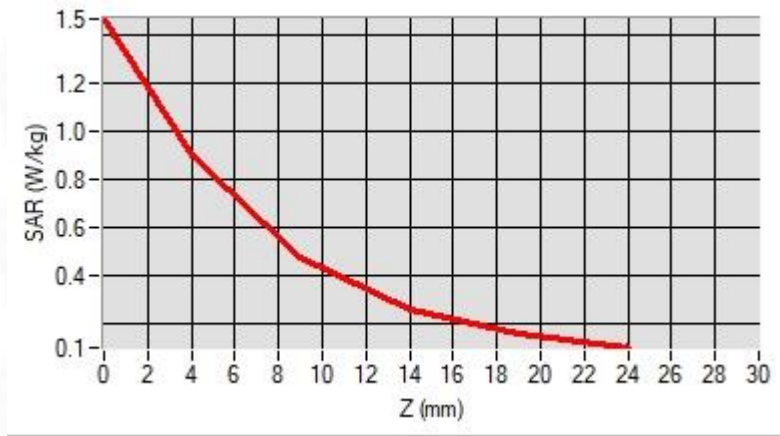

### F. 3D Image

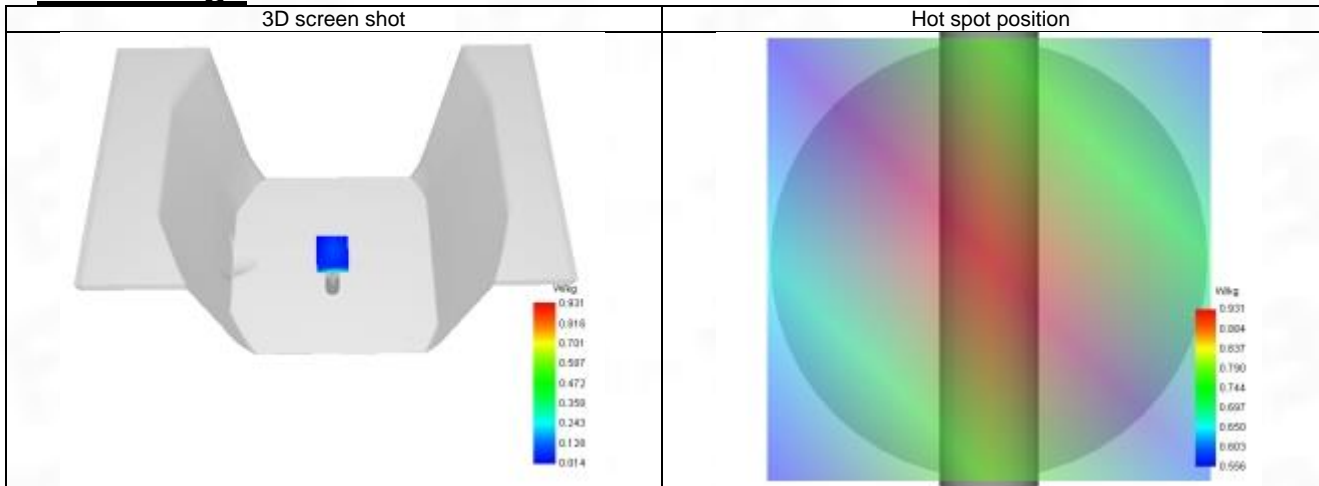

## ANNEX C Test Data

1-Wrist-worn with back position in dist. 0mm on Channel 6 in IEEE 802.11b ISM

### SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 18/4/2023


#### A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle (6)
Signal	IEEE 802.11

#### B. Permittivity

Frequency (MHz)	2437.000
Relative permittivity (real part)	39.097
Relative permittivity (imaginary part)	13.396
Conductivity (S/m)	1.796

#### C. SAR Surface and Volume

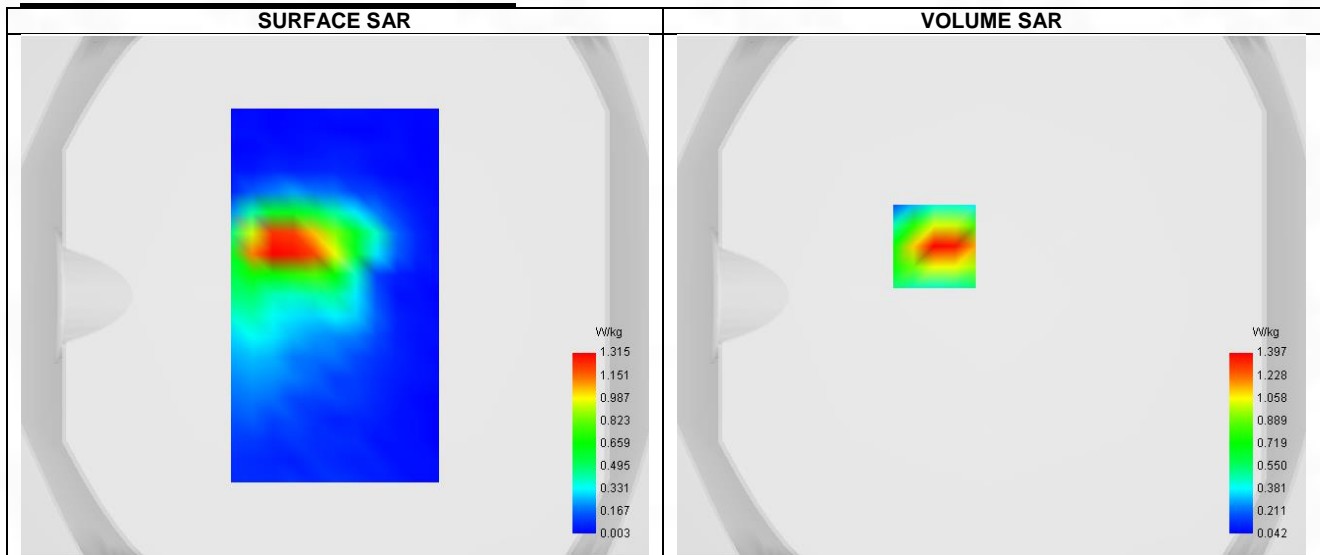


Maximum location: X=-22.00, Y=19.00 ; SAR Peak: 2.37 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.497
SAR 1g (W/Kg)	0.675
Variation (%)	-1.390
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.342	1.397	0.704	0.359	0.200

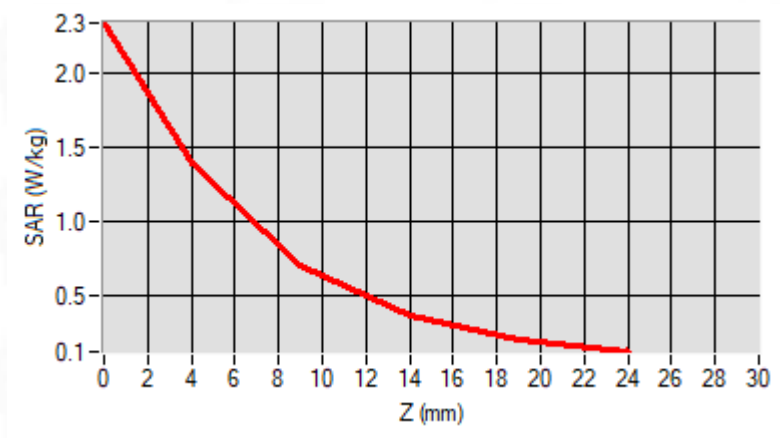

### F. 3D Image

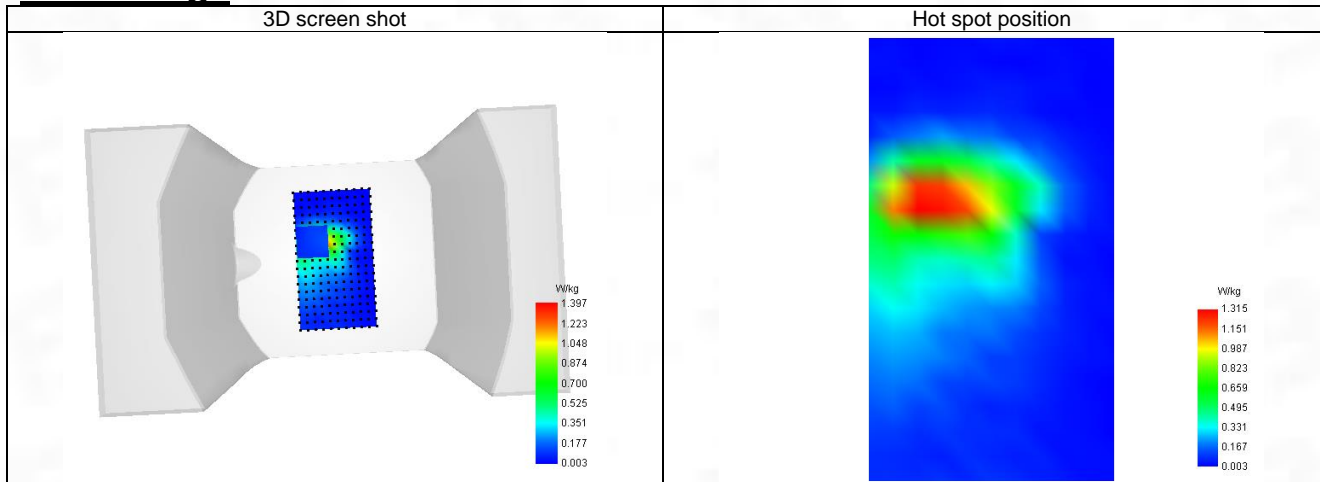

2-Wrist-worn with back position in dist. 0mm on Channel 78 in Bluetooth

**SAR Measurement at Bluetooth (Body, Validation Plane)**

Date of measurement: 18/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Higher (78)
Signal	Bluetooth

**B. Permittivity**

Frequency (MHz)	2480.000
Relative permittivity (real part)	39.040
Relative permittivity (imaginary part)	13.210
Conductivity (S/m)	1.842

**C. SAR Surface and Volume**

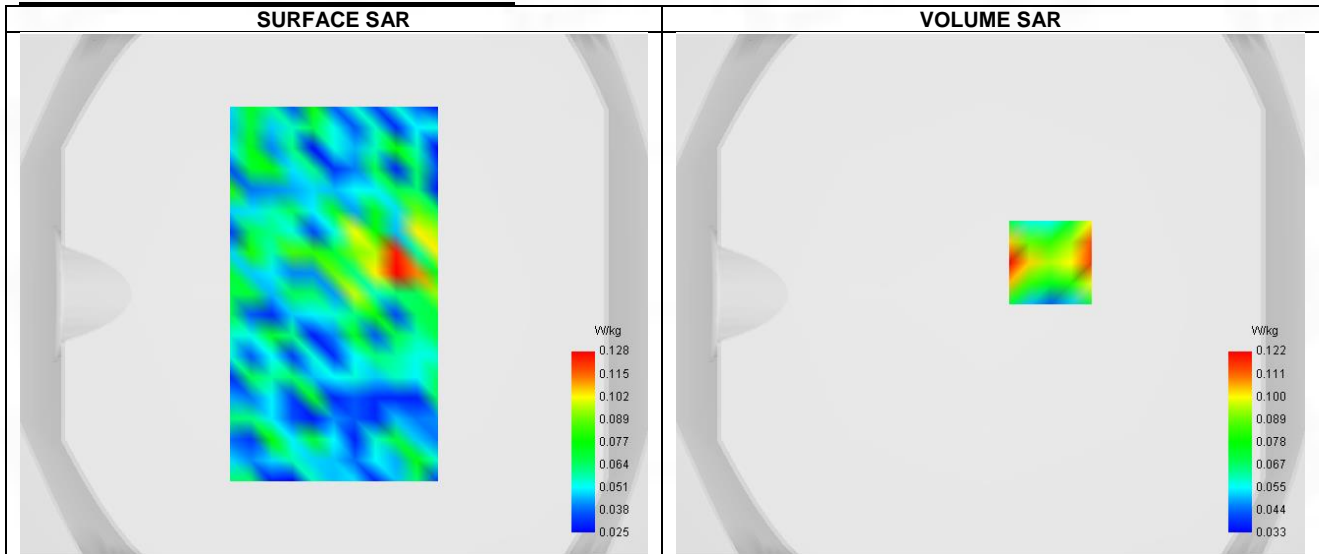


Maximum location: X=23.00, Y=12.00 ; SAR Peak: 0.21 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.108
Variation (%)	-1.970
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.355	0.122	0.061	0.056	0.033

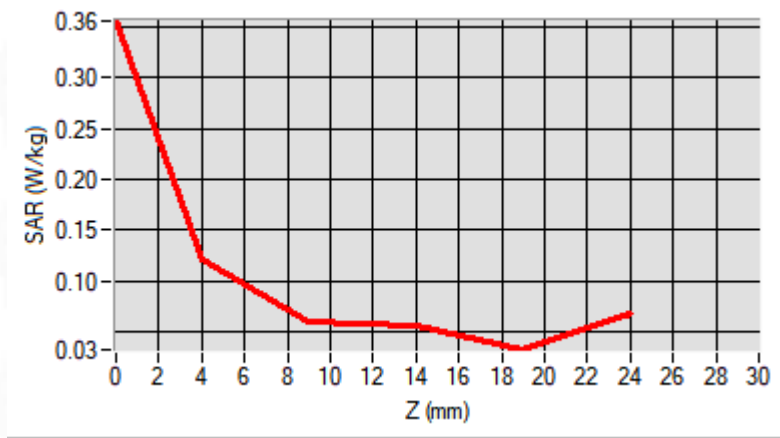

### F. 3D Image

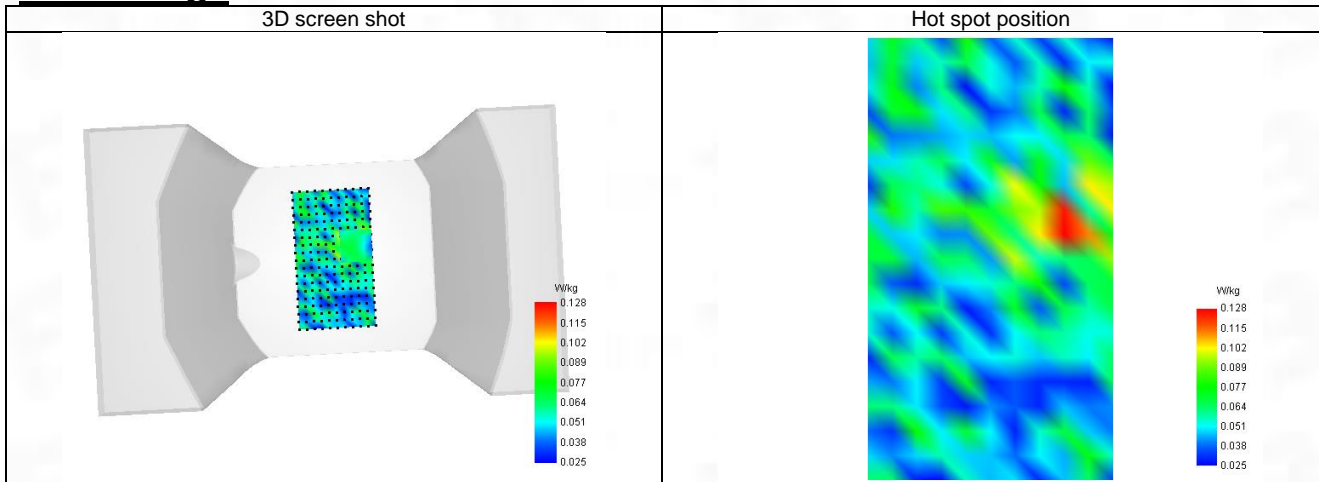

3-Next-to-mouth with Front position in dist. 10mm on Channel 6 in IEEE 802.11b ISM

**SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)**

Date of measurement: 18/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Middle (6)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	2437.000
Relative permittivity (real part)	39.097
Relative permittivity (imaginary part)	13.396
Conductivity (S/m)	1.796

**C. SAR Surface and Volume**

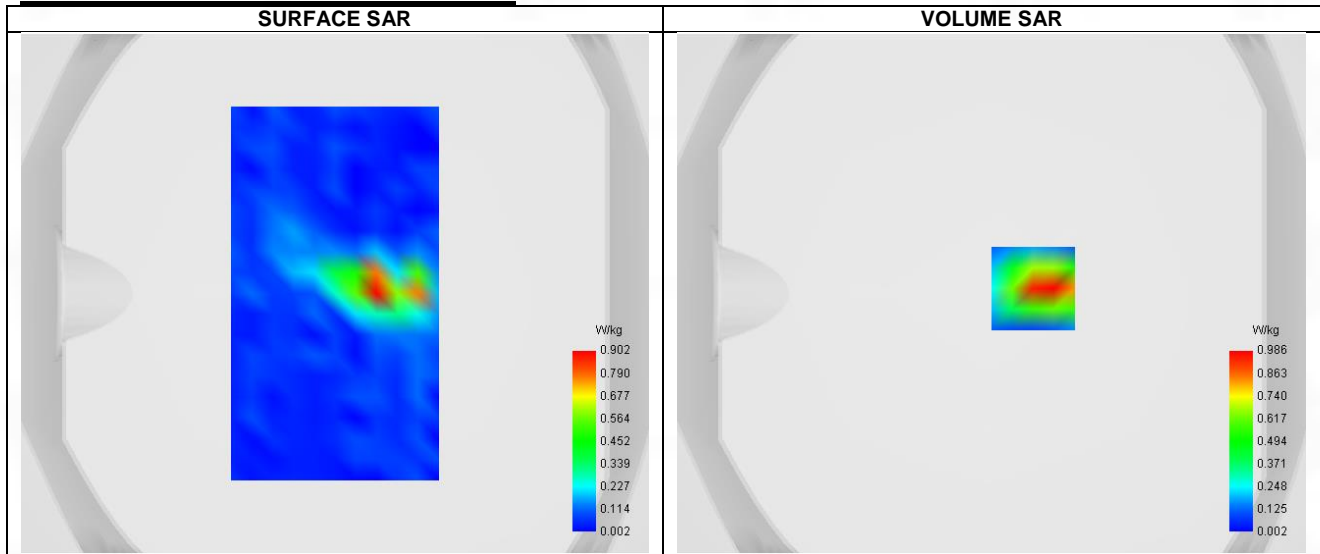


Maximum location: X=16.00, Y=2.00 ; SAR Peak: 1.66 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.299
Variation (%)	-1.440
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	2.00	7.00	12.00	17.00
SAR (W/Kg)	1.629	0.986	0.210	0.047	0.042

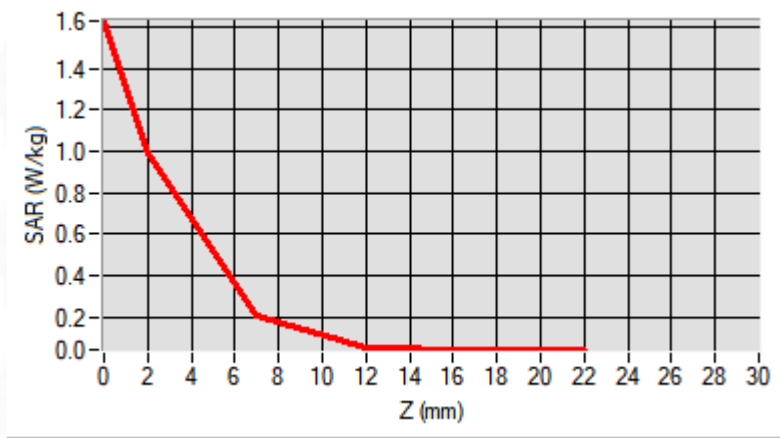

### F. 3D Image

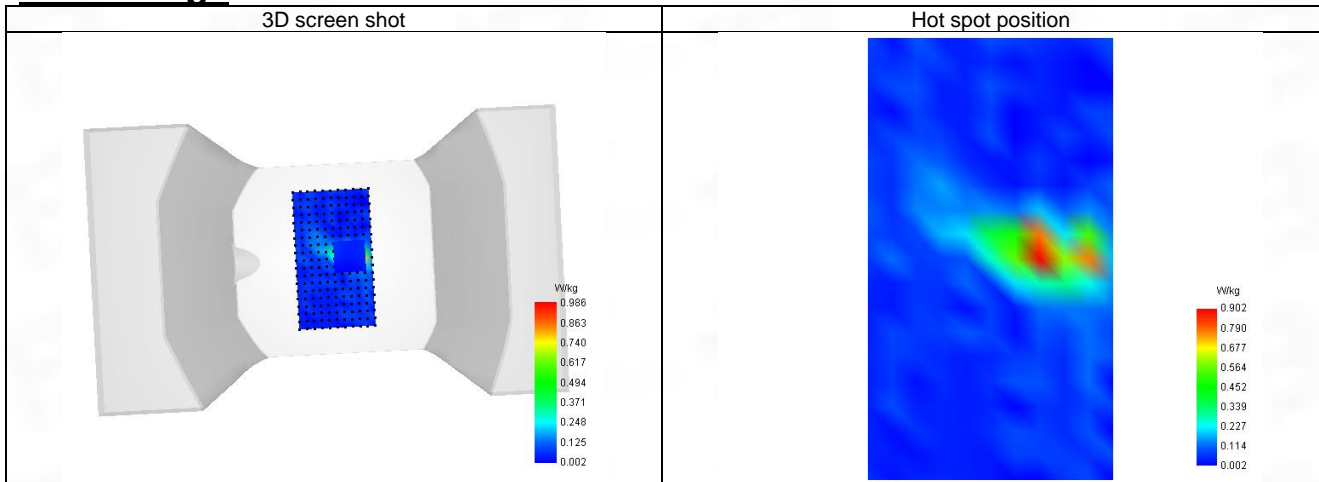



**4-Wrist-worn with back position in dist. 0mm on Channel 19100 in LTE band 2**

**SAR Measurement at LTE band 2 (Body, Validation Plane)**

Date of measurement: 18/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Higher (19100)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

**C. SAR Surface and Volume**

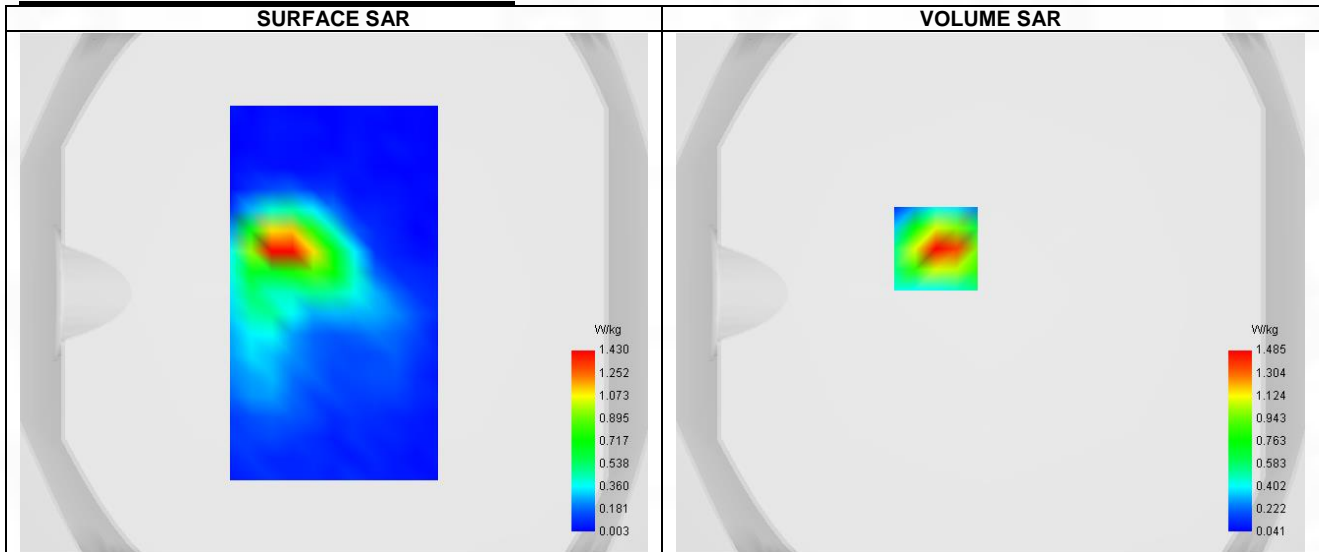


Maximum location: X=-21.00, Y=17.00 ; SAR Peak: 2.63 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.367
SAR 1g (W/Kg)	0.655
Variation (%)	-0.150
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.593	1.485	0.704	0.340	0.187

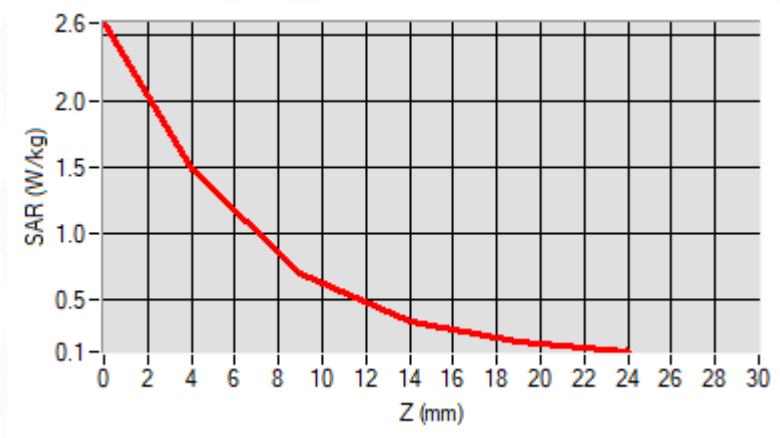

### F. 3D Image

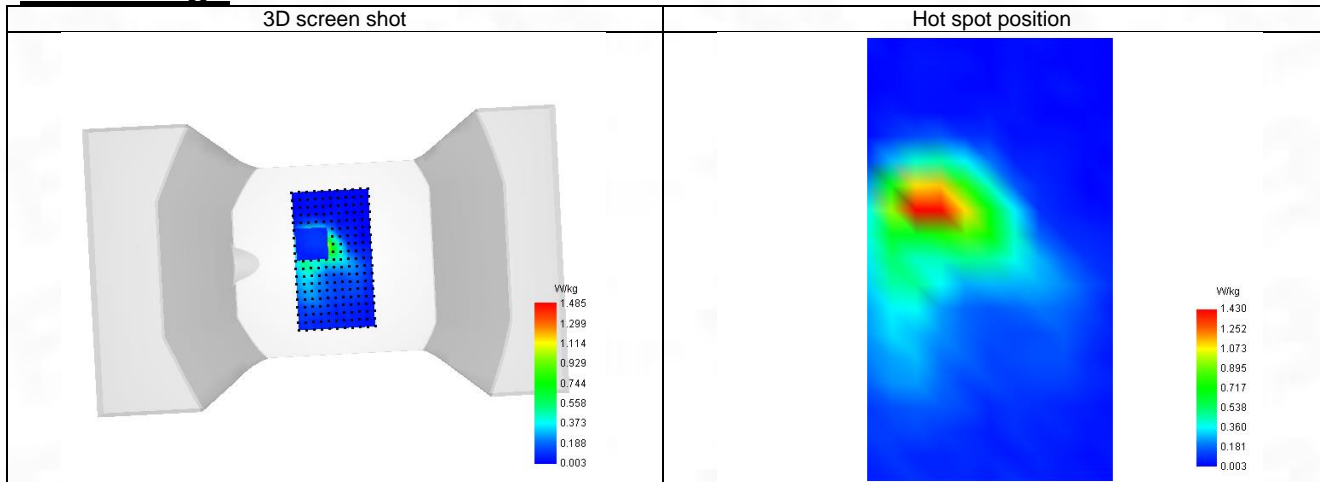

**5-Wrist-worn with back position in dist. 0mm on 20050 in LTE band 4**

**SAR Measurement at LTE band 4 (Body, Validation Plane)**

Date of measurement: 17/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Lower (20050)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

**B. Permittivity**

Frequency (MHz)	1720.000
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

**C. SAR Surface and Volume**

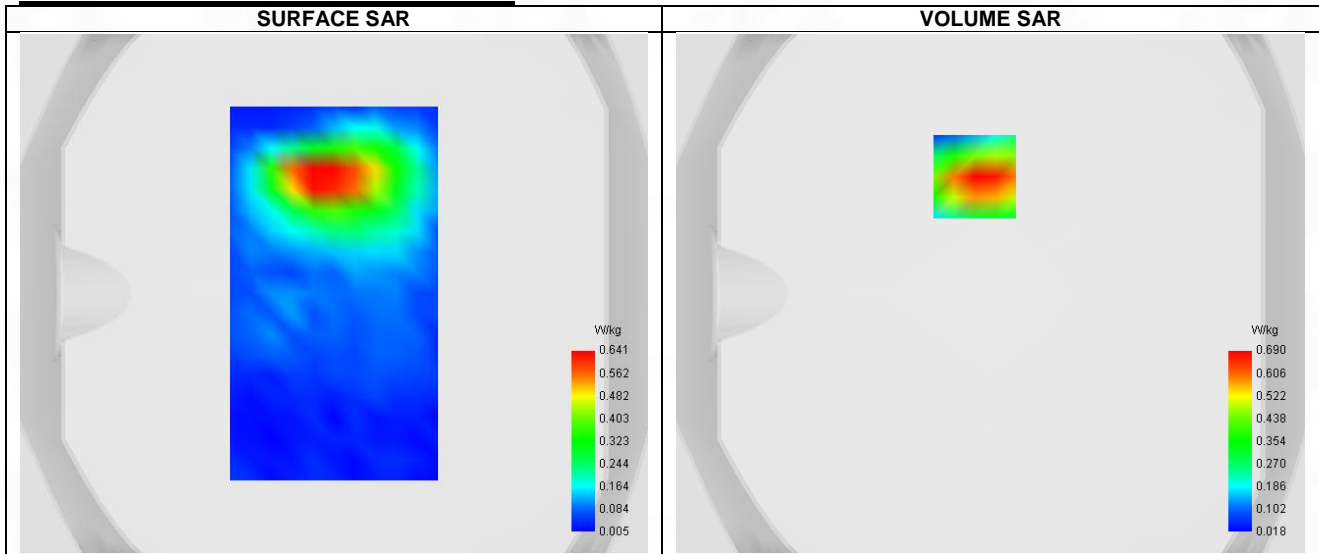


Maximum location: X=-6.00, Y=45.00 ; SAR Peak: 1.11 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.342
SAR 1g (W/Kg)	0.650
Variation (%)	-2.950
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.095	0.690	0.373	0.198	0.107

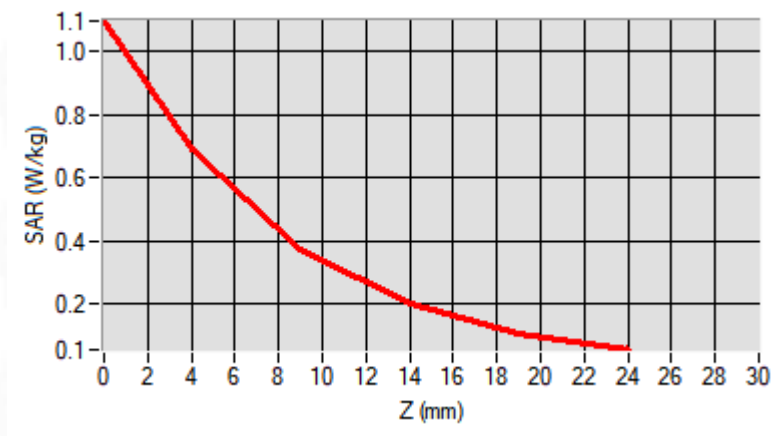

### F. 3D Image

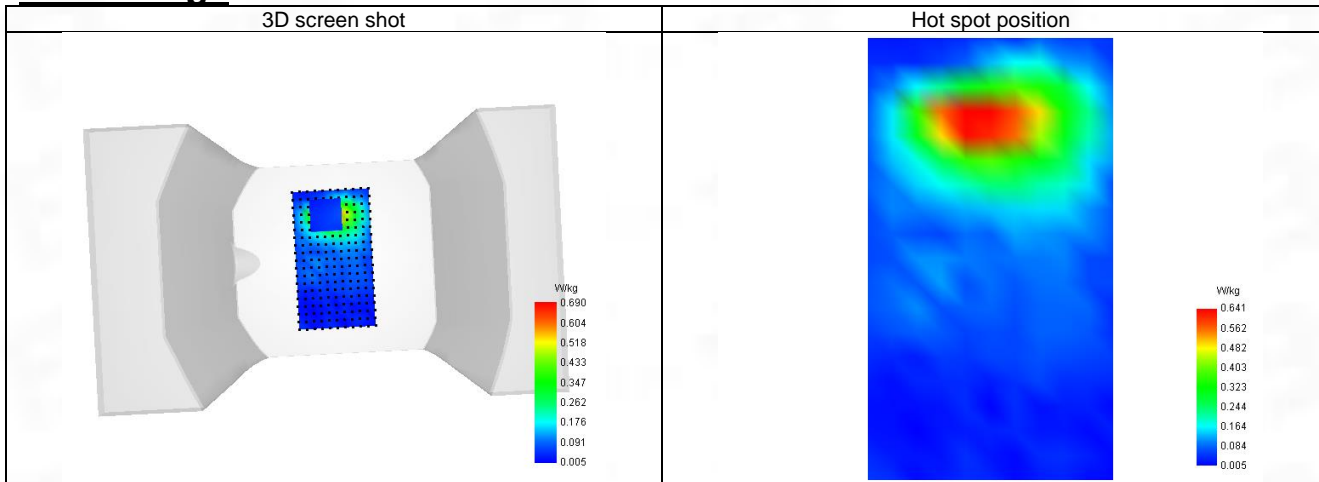

6-Wrist-worn with back position in dist. 0mm on Channel 23130 in LTE band 12

**SAR Measurement at LTE band 12 (Body, Validation Plane)**

Date of measurement: 17/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	Higher (23130)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

**B. Permittivity**

Frequency (MHz)	711.000
Relative permittivity (real part)	41.603
Relative permittivity (imaginary part)	19.297
Conductivity (S/m)	0.806

**C. SAR Surface and Volume**

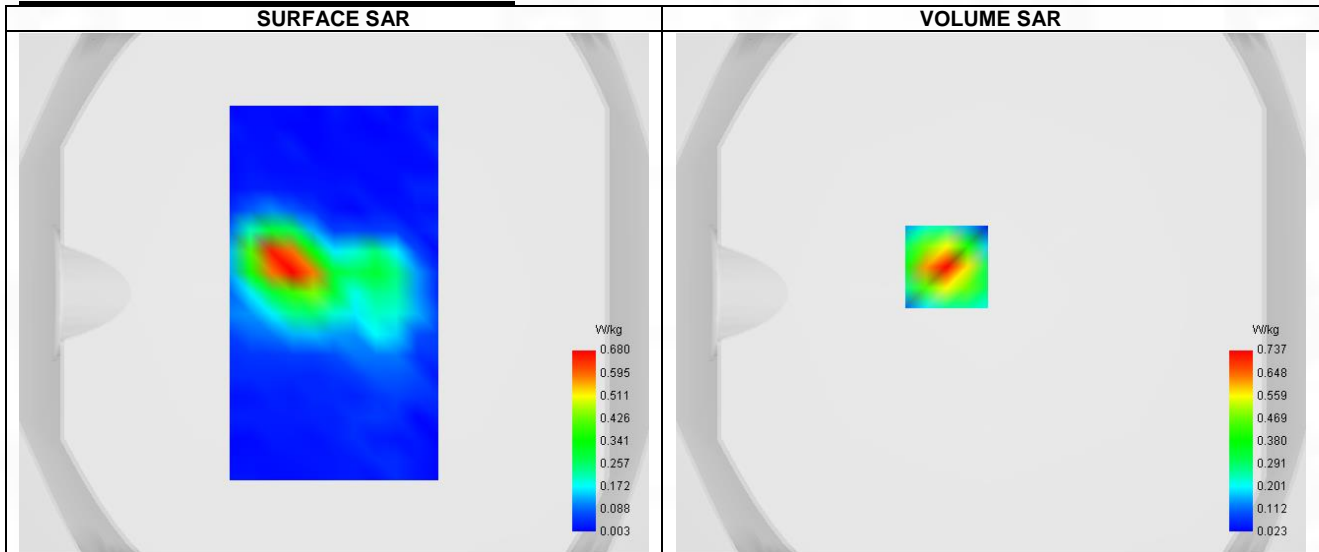


Maximum location: X=-17.00, Y=10.00 ; SAR Peak: 1.31 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.680
Variation (%)	-3.770
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.317	0.737	0.339	0.161	0.091

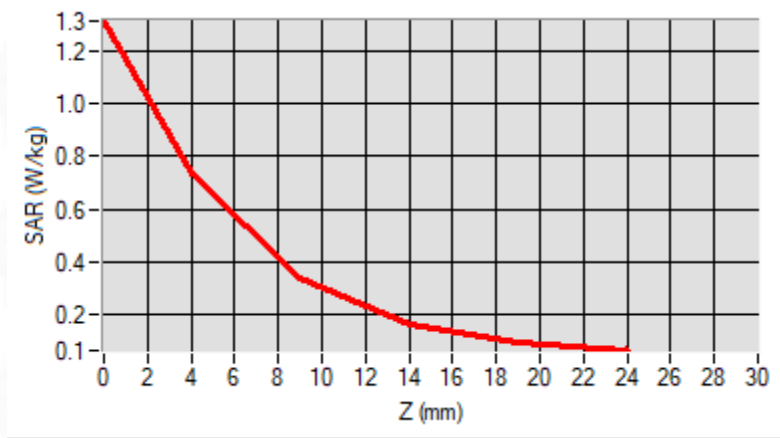

### F. 3D Image

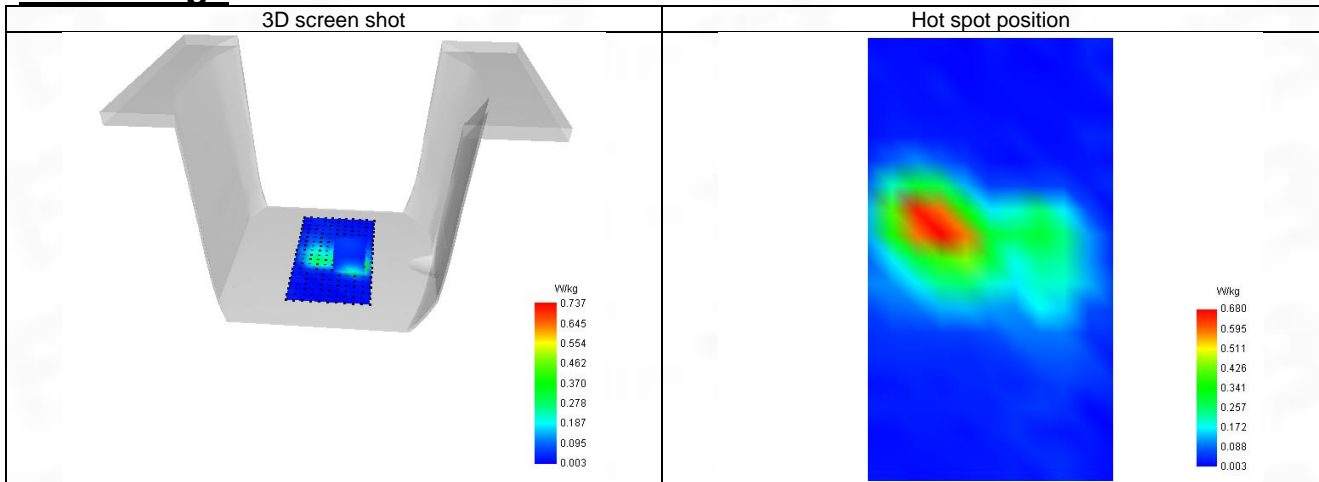

7-Next-to-mouth with Front position in dist. 10mm on Channel 19100 in LTE band 2

**SAR Measurement at LTE band 2 (Body, Validation Plane)**

Date of measurement: 18/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Higher (19100)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

**C. SAR Surface and Volume**

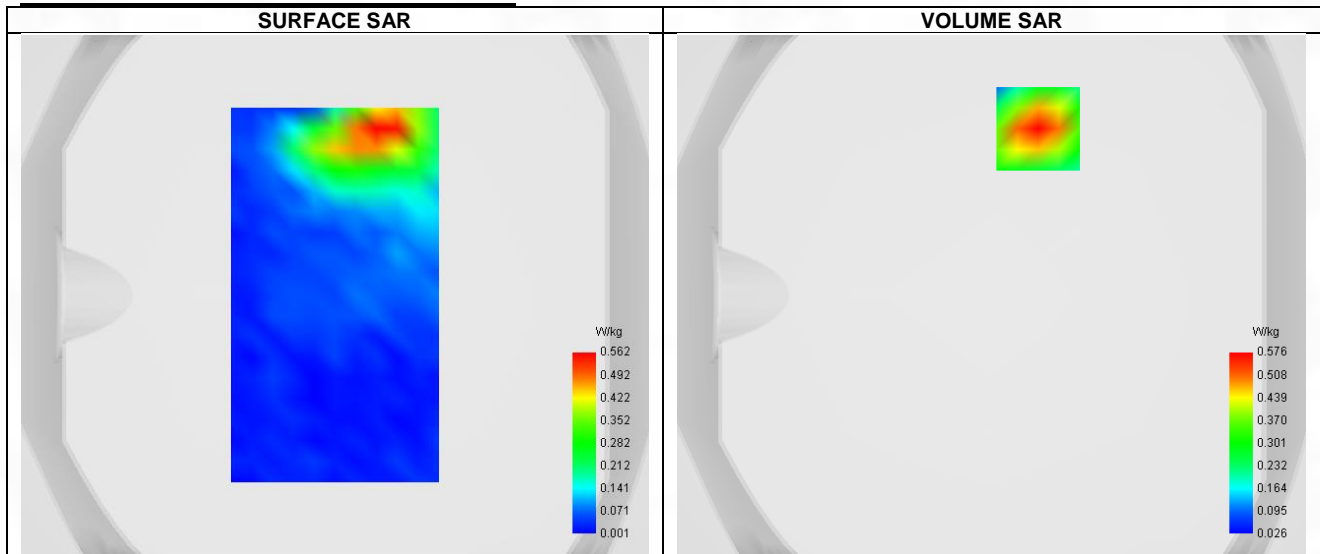

Maximum location: X=18.00, Y=64.00 ; SAR Peak: 0.85 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.229
SAR 1g (W/Kg)	0.355
Variation (%)	-2.280
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000




### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.844	0.576	0.351	0.212	0.129

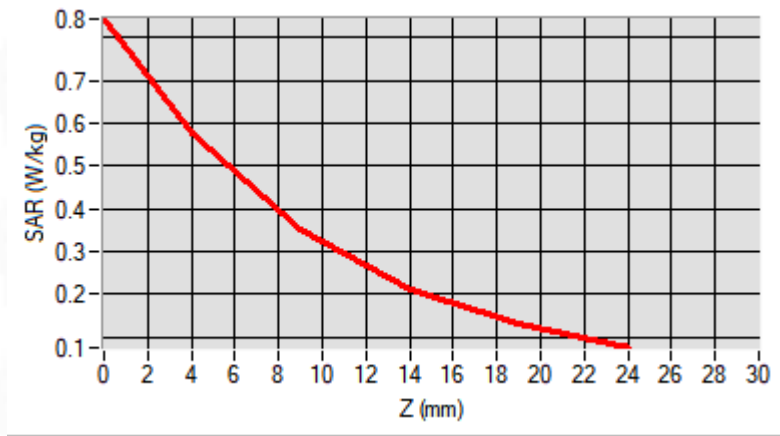

### F. 3D Image

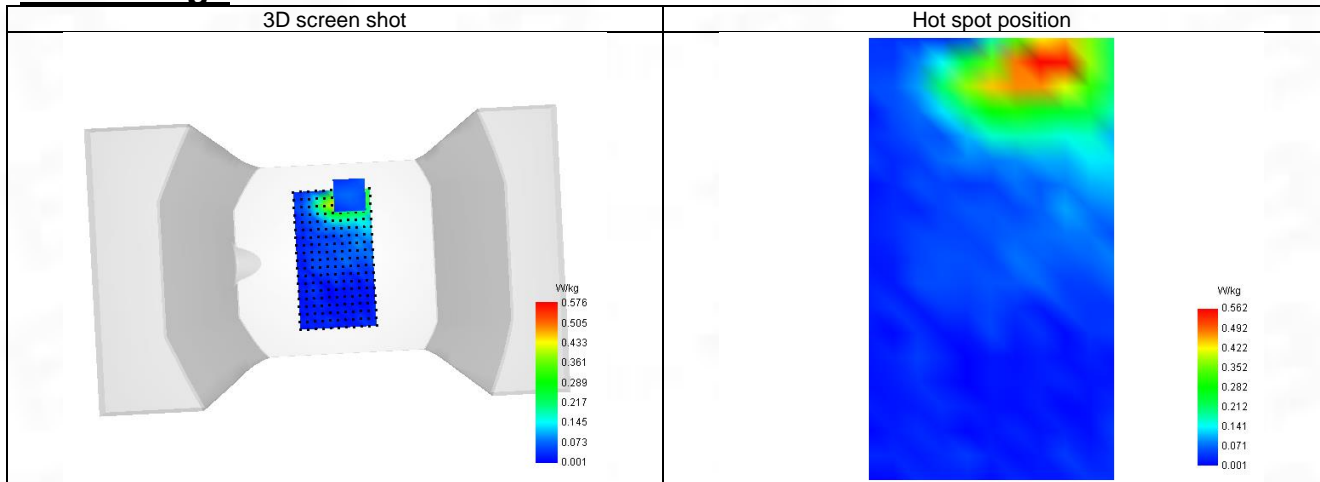

8-Next-to-mouth with Front position in dist. 10mm on Channel 20050 in LTE band 4

**SAR Measurement at LTE band 4 (Body, Validation Plane)**

Date of measurement: 17/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Lower (20050)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

**B. Permittivity**

Frequency (MHz)	1720.000
Relative permittivity (real part)	40.034
Relative permittivity (imaginary part)	13.966
Conductivity (S/m)	1.329

**C. SAR Surface and Volume**

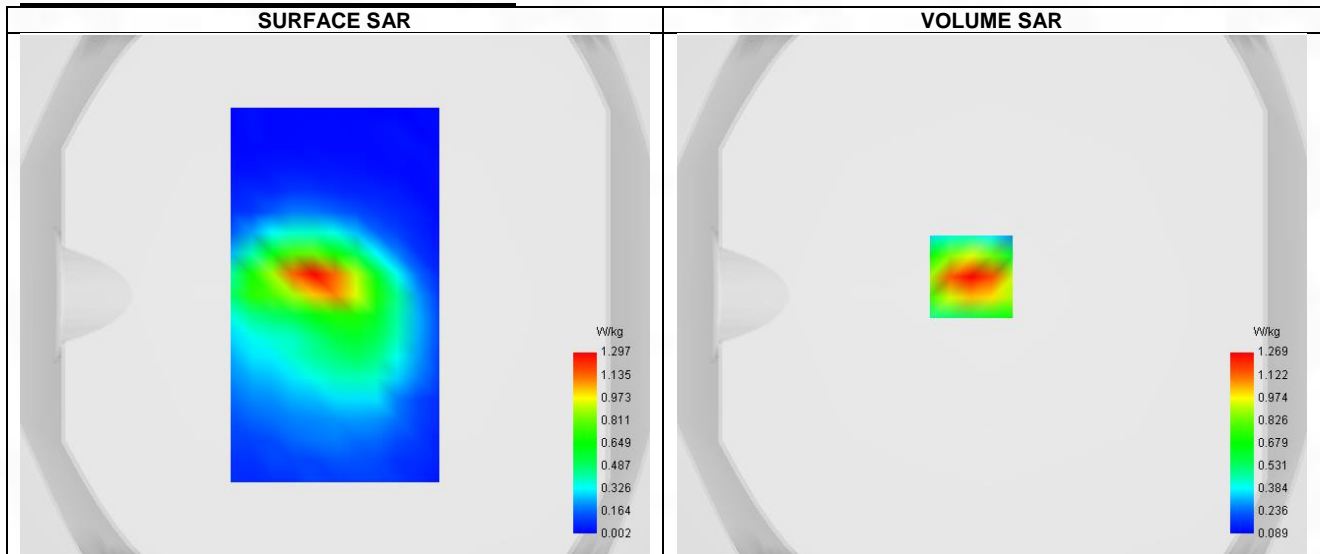


Maximum location: X=-8.00, Y=7.00 ; SAR Peak: 1.97 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.214
SAR 1g (W/Kg)	0.341
Variation (%)	-1.990
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.968	1.269	0.726	0.433	0.283

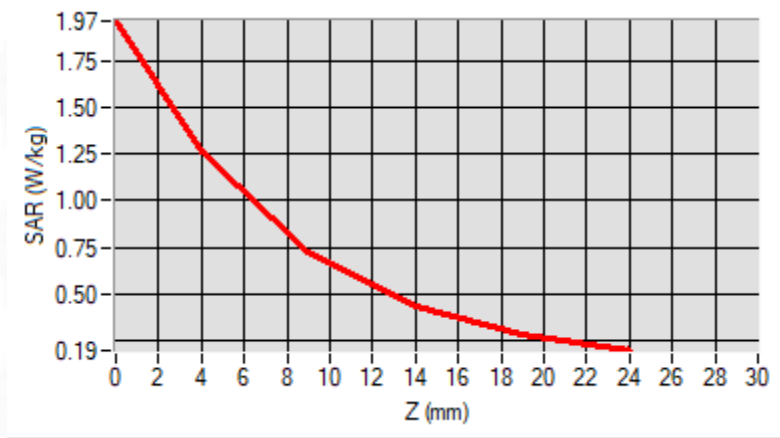

### F. 3D Image

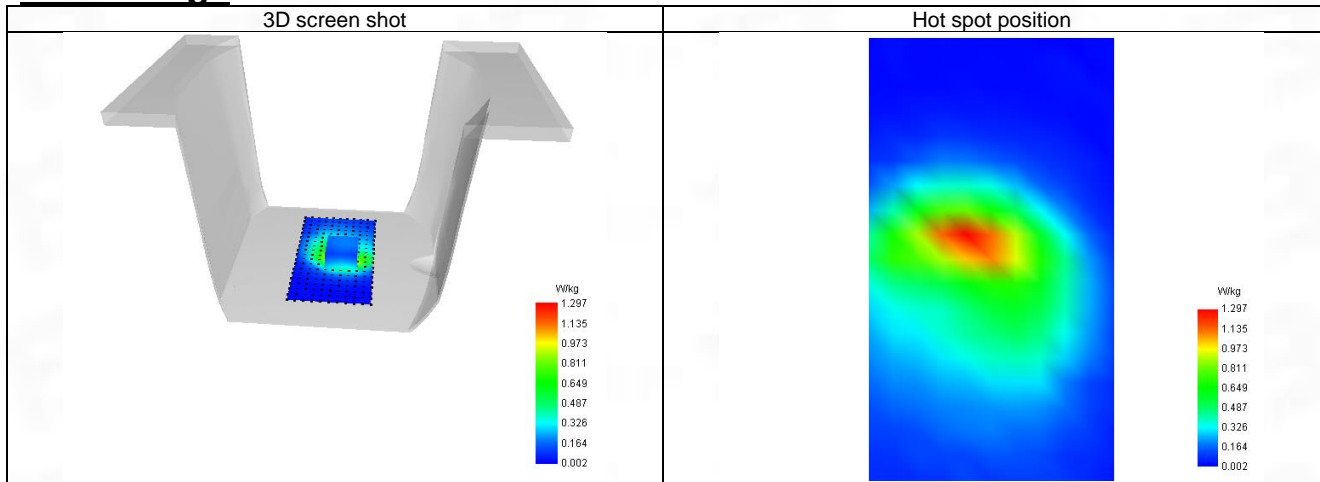

9-Next-to-mouth with Front position in dist. 10mm on Channel 23130 in LTE band 12

**SAR Measurement at LTE band 12 (Body, Validation Plane)**

Date of measurement: 17/4/2023


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.65
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels	Higher (23130)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

**B. Permittivity**

Frequency (MHz)	711.000
Relative permittivity (real part)	41.603
Relative permittivity (imaginary part)	19.297
Conductivity (S/m)	0.806

**C. SAR Surface and Volume**

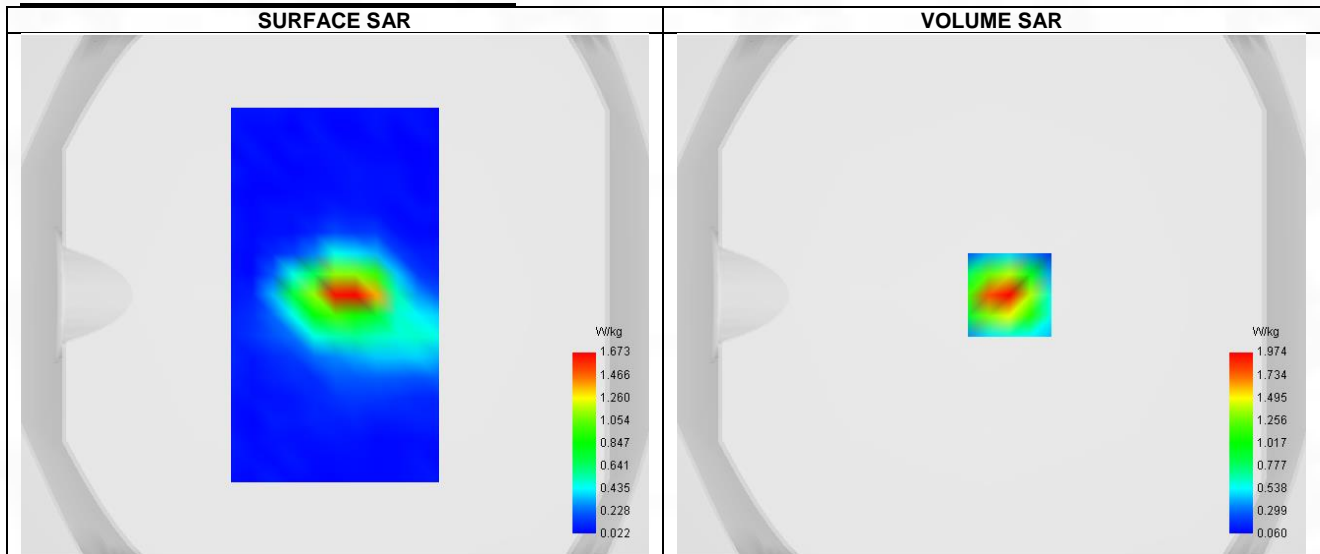


Maximum location: X=7.00, Y=0.00 ; SAR Peak: 3.72 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.196
SAR 1g (W/Kg)	0.302
Variation (%)	1.910
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

### E. Z Axis Scan



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.687	1.974	0.844	0.375	0.211

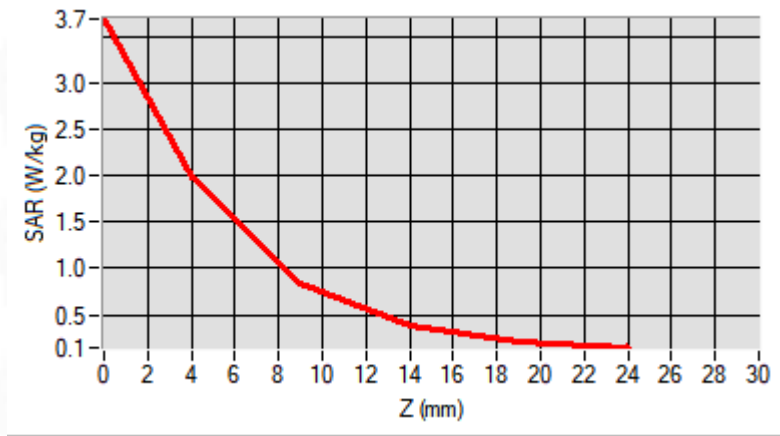

### F. 3D Image

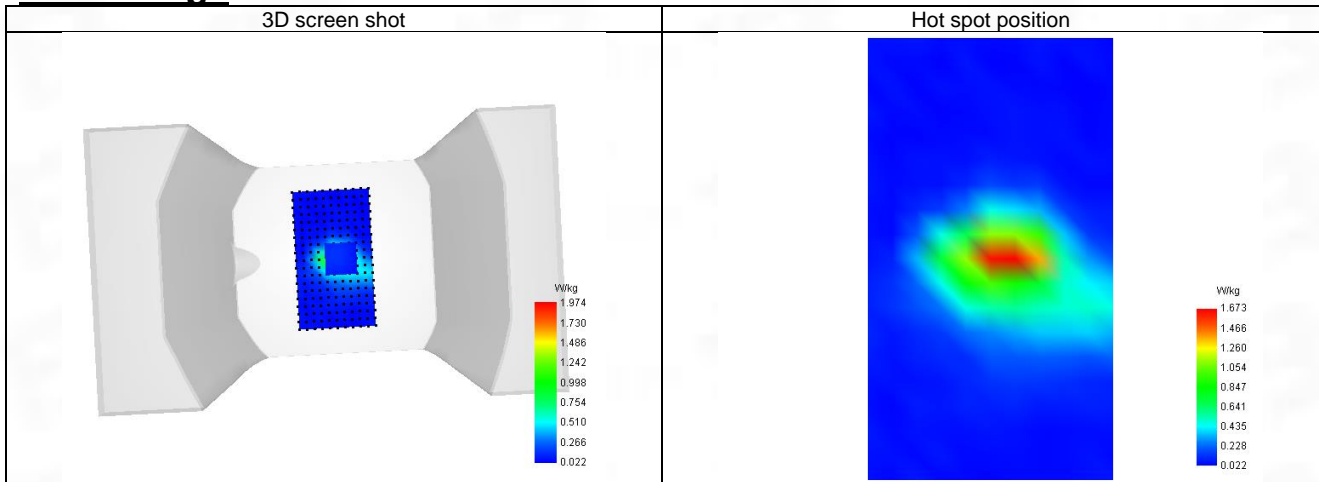

## ANNEX D SAR Test Setup Photos

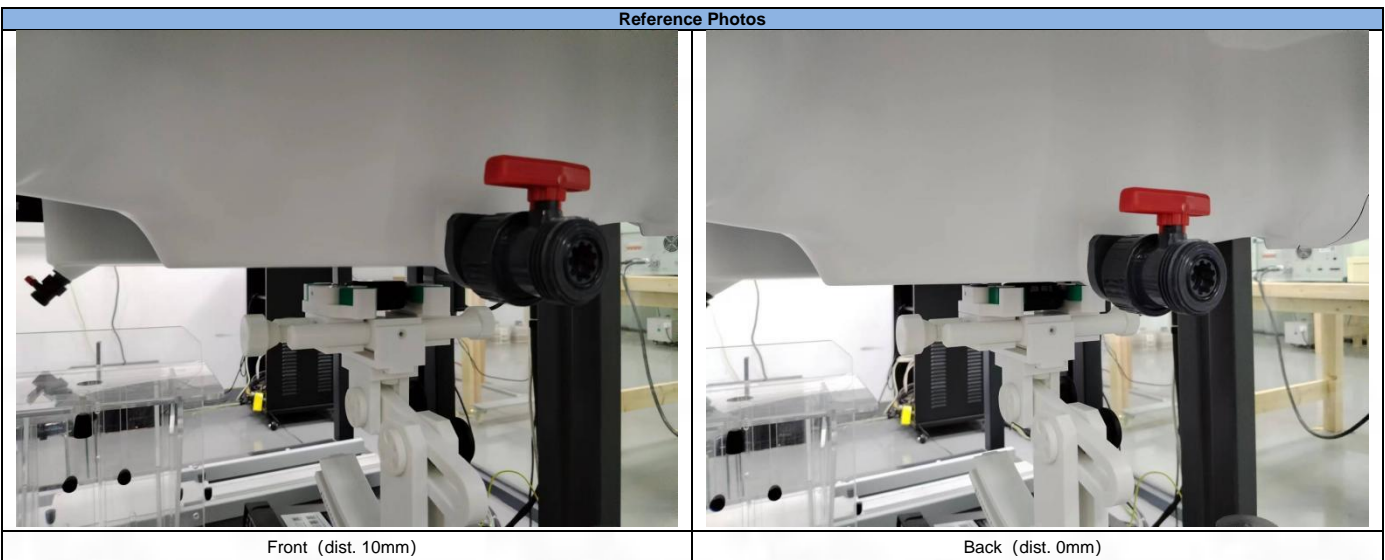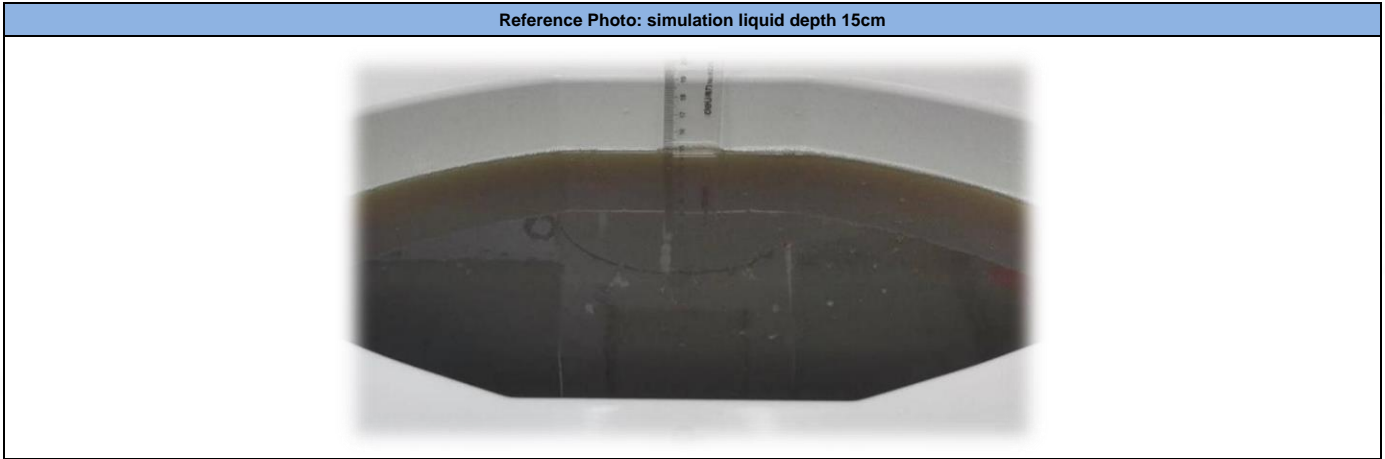

## ANNEX E EUT External and Internal Photos

Please refer to RF Report.

## ANNEX F Calibration Report

Please refer the document "CALIBRATION REPORT.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,  
Bao'an District, Shenzhen, China

[www.btf-lab.com](http://www.btf-lab.com)

**--END OF REPORT--**