

# FCC TEST REPORT

**Product Name:** 4K Android TV OTT Box  
**Trade Mark:** Entel  
**Model No.:** DIW585 UHD Entel  
**Add. Model No.:** N/A  
**Report Number:** 191023001RFC-3  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
**FCC ID:** 2AUWA-DV8235M3  
**Test Result:** PASS  
**Date of Issue:** December 4, 2019

Prepared for:

**Shenzhen SDMC Technology Co.,Ltd.**  
 7/F, W2-A, Hi-Tech, Industrial Park, Nanshan District, Shenzhen,  
 China

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
 16/F, Block A, Building 6, Baoneng Science and Technology Park,  
 Qingxiang Road No.1, Longhua New District, Shenzhen, China  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by

Eric Yu  
Team Leader



Reviewed by:

Kevin Liang  
Assistant Manager

Approved by:

Billy Li

Technical Director

Date:

December 4, 2019

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com [Http://www.uttlab.com](http://www.uttlab.com)

**Version**

Version No.	Date	Description
V1.0	December 4, 2019	Original



## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
<b>1.1 CLIENT INFORMATION</b> .....	<b>4</b>
<b>1.2 EUT INFORMATION</b> .....	<b>4</b>
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
<b>1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</b> .....	<b>5</b>
<b>1.4 OTHER INFORMATION</b> .....	<b>5</b>
<b>1.5 DESCRIPTION OF SUPPORT UNITS</b> .....	<b>5</b>
<b>1.6 TEST LOCATION</b> .....	<b>6</b>
<b>1.7 TEST FACILITY</b> .....	<b>6</b>
<b>1.8 DEVIATION FROM STANDARDS</b> .....	<b>6</b>
<b>1.9 ABNORMALITIES FROM STANDARD CONDITIONS</b> .....	<b>6</b>
<b>1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER</b> .....	<b>7</b>
<b>1.11 MEASUREMENT UNCERTAINTY</b> .....	<b>7</b>
<b>2. TEST SUMMARY</b> .....	<b>7</b>
<b>3. EQUIPMENT LIST</b> .....	<b>8</b>
<b>4. TEST CONFIGURATION</b> .....	<b>9</b>
<b>4.1 ENVIRONMENTAL CONDITIONS FOR TESTING</b> .....	<b>9</b>
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	9
4.1.2 RECORD OF NORMAL ENVIRONMENT.....	9
<b>4.2 TEST CHANNELS</b> .....	<b>9</b>
<b>4.3 EUT TEST STATUS</b> .....	<b>10</b>
<b>4.4 PRE-SCAN</b> .....	<b>10</b>
<b>4.5 TEST SETUP</b> .....	<b>11</b>
4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....	11
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	12
4.5.3 FOR CONDUCTED RF TEST SETUP .....	13
<b>4.6 SYSTEM TEST CONFIGURATION</b> .....	<b>13</b>
<b>4.7 DUTY CYCLE</b> .....	<b>14</b>
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>16</b>
<b>5.1 REFERENCE DOCUMENTS FOR TESTING</b> .....	<b>16</b>
<b>5.2 ANTENNA REQUIREMENT</b> .....	<b>16</b>
<b>5.3 CONDUCTED PEAK OUTPUT POWER</b> .....	<b>17</b>
<b>5.4 6 dB BANDWIDTH</b> .....	<b>18</b>
<b>5.5 POWER SPECTRAL DENSITY</b> .....	<b>22</b>
<b>5.6 CONDUCTED OUT OF BAND EMISSION</b> .....	<b>26</b>
<b>5.7 RADIATED SPURIOUS EMISSIONS</b> .....	<b>39</b>
<b>5.8 BAND EDGE MEASUREMENTS (RADIATED)</b> .....	<b>47</b>
<b>5.9 CONDUCTED EMISSION</b> .....	<b>58</b>
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b> .....	<b>61</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>61</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Shenzhen SDMC Technology Co.,Ltd.
<b>Address of Applicant:</b>	7/F, W2-A, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen SDMC Technology Co.,Ltd.
<b>Address of Manufacturer:</b>	7/F, W2-A, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, China

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	4K Android TV OTT Box		
<b>Model No.:</b>	DIW585 UHD Entel		
<b>Add. Model No.:</b>	N/A		
<b>Trade Mark:</b>	Entel		
<b>DUT Stage:</b>	Production Unit		
<b>EUT Supports Function:</b>	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.2	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
	5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac	
<b>Sample Received Date:</b>	October 25, 2019		
<b>Sample Tested Date:</b>	October 25, 2019 to November 22, 2019		

#### 1.2.2 Description of Accessories

Adaptor(1)	
<b>Model No.:</b>	NBS12F050200VE
<b>Input:</b>	100-240 V~50/60 Hz 0.3A
<b>Output:</b>	5V --- 2A
<b>DC Cable:</b>	1.80 Meter, Unshielded without ferrite

Cable (1)	
<b>Description:</b>	HDMI Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.5 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Band:</b>	2400 MHz to 2483.5 MHz	
<b>Frequency Range:</b>	2412 MHz to 2462 MHz	
<b>Support Standards:</b>	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	
<b>Type of Modulation:</b>	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK)	
<b>Data Rate:</b>	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7	
<b>Number of Channels:</b>	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20: 11	
<b>Channel Separation:</b>	5 MHz	
<b>Antenna Type:</b>	Chain 0	FPC Antenna
	Chain 1	FPC Antenna
<b>Antenna Gain:</b>	Chain 0	3.03 dBi
	Chain 1	3.55 dBi
<b>Directional gain:</b>	6.30 dBi	
<b>Maximum Peak Power:</b>	SISO_ Chain 0	IEEE 802.11b: 16.53 dBm IEEE 802.11g: 20.44 dBm IEEE 802.11n-HT20: 19.95 dBm
	SISO_ Chain 1	IEEE 802.11b: 17.68 dBm IEEE 802.11g: 21.38 dBm IEEE 802.11n-HT20: 21.75 dBm
	MIMO_ Chain 0+1	IEEE 802.11n-HT20: 23.50 dBm
<b>Normal Test Voltage:</b>	AC 120V/60Hz	

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
Note: f is the operating frequency (MHz); k is the operating channel.	

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
USB disk	Kingston	DTSE9	N/A	UnionTrust	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	N/A	VW3FAST5280	UnionTrust
Monitor	LG	U3202S	N/A	UnionTrust	UnionTrust
Micro SD	Kingston	16GB	N/A	UnionTrust	UnionTrust
DVD	GIEC	BDP-G4305	N/A	UnionTrust	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.15 Meter	UnionTrust
2	Ethernet Cable	RJ45	1.5 Unshielded without ferrite	UnionTrust
3	AV	AV	1.2 Unshielded without ferrite	UnionTrust
4	SPDIF	SPDIF	1.5 Unshielded without ferrite	UnionTrust

## 1.6 TEST LOCATION

---

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109  
 Telephone: +86 (0) 755 2823 0888  
 Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**FCC Accredited Lab.**

Designation Number: CN1194  
 Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

### 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013 Clause 11.8.1	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Clause 11.13	PASS

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 03, 2018	Dec. 03, 2019
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May 18, 2019	May 18, 2020
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 23, 2019	Jun. 23, 2020
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jan. 05, 2019	Jan. 05, 2020
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2019	Nov. 23, 2020
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 24, 2019	Nov. 23, 2020
<input type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Nov. 24, 2019	Nov. 23, 2020



## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	AC 120V/60Hz and AC 240V/50Hz	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	23.4	41.0	100.12	Bert Xiong
Conducted Peak Output Power	24.5	56.0	100.3	Hank Wu
6dB Bandwidth				
Power Spectral Density				
Conducted Out of Band Emission	23.0	68.0	99.7	Andy Lin
Radiated Spurious Emissions				
Band Edge Measurements (Radiated)				

### 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20	2412 MHz to 2462 MHz	Channel 1	Channel 7	Channel 11
		2412 MHz	2437 MHz	2462 MHz

### 4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.
IEEE 802.11n-HT20	2Tx	2. Keep the EUT in continuously transmitting with modulation test single.

Power Setting		
Mode	Channel 1 -11	
	Chain 0	Chain 1
IEEE 802.11b	0	0
IEEE 802.11g	0	0
IEEE 802.11n-HT20	0	0



Test Software
Test software name: Ampak RF Test Tool VER 5.3;


### 4.4 PRE-SCAN

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0


## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

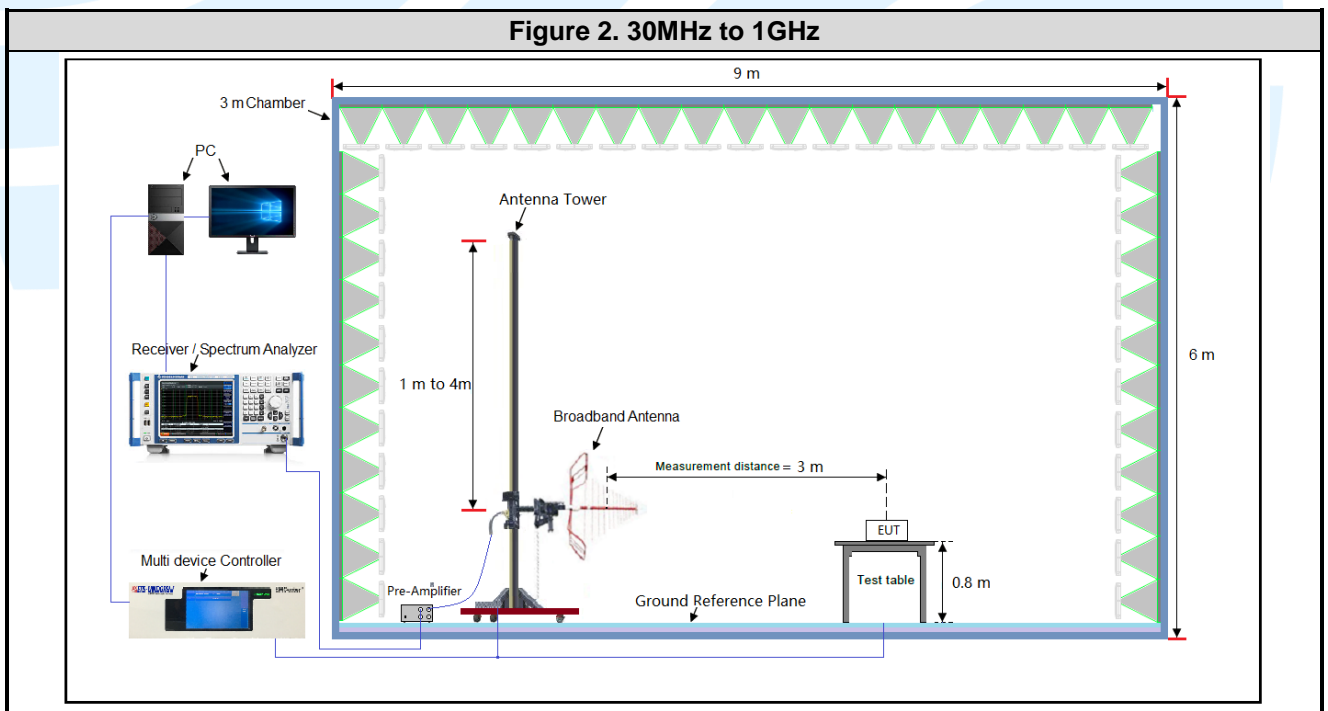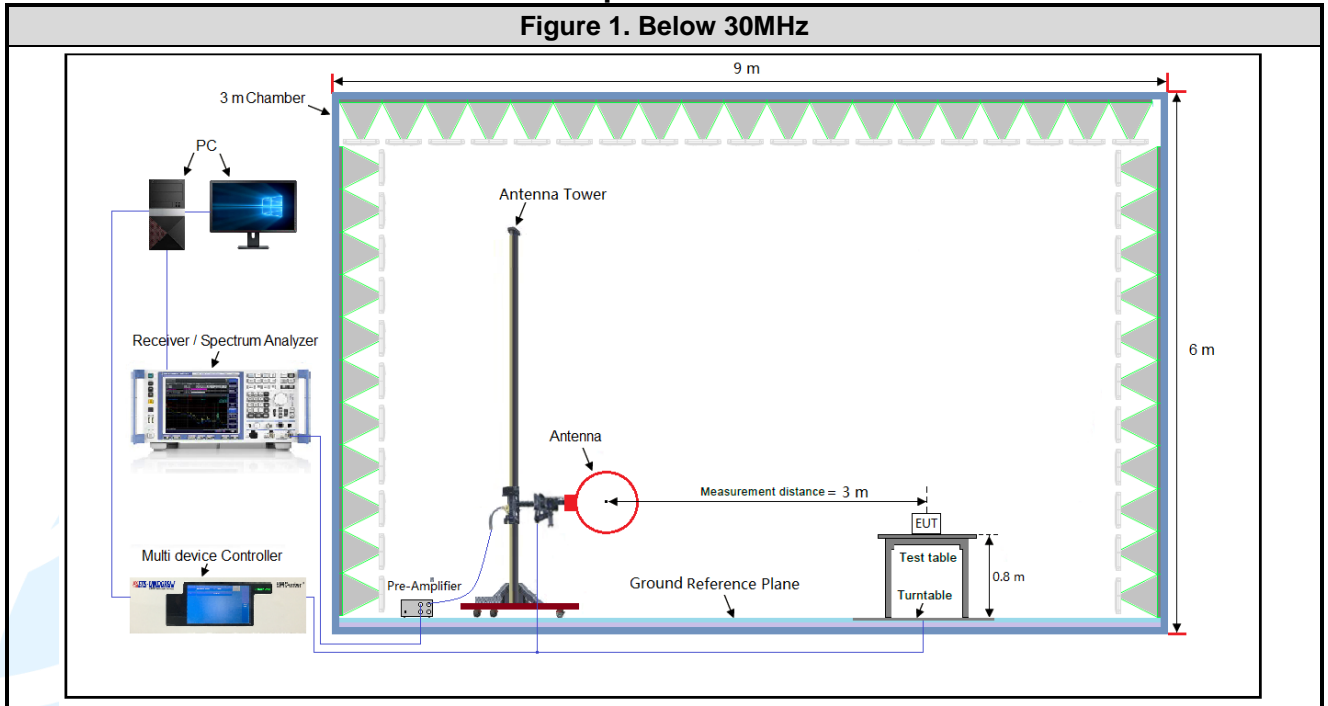


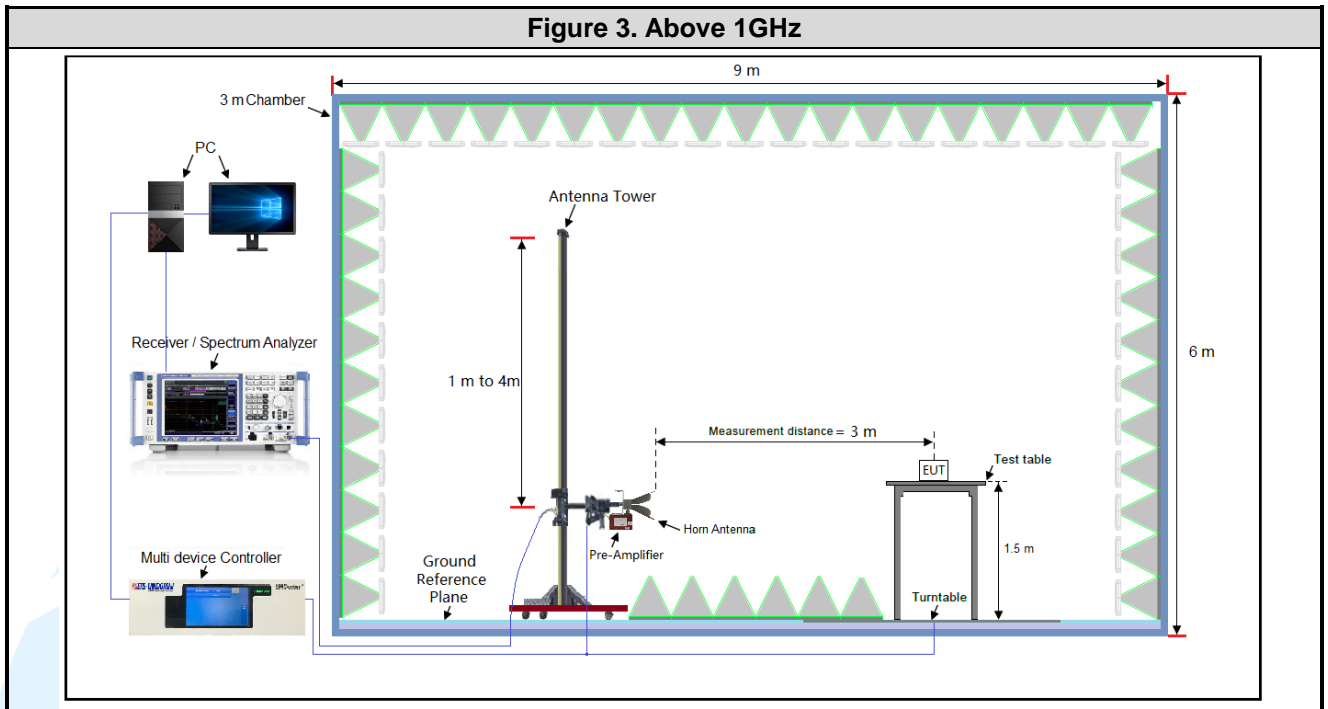

**4.5.2 For Conducted Emissions test setup**

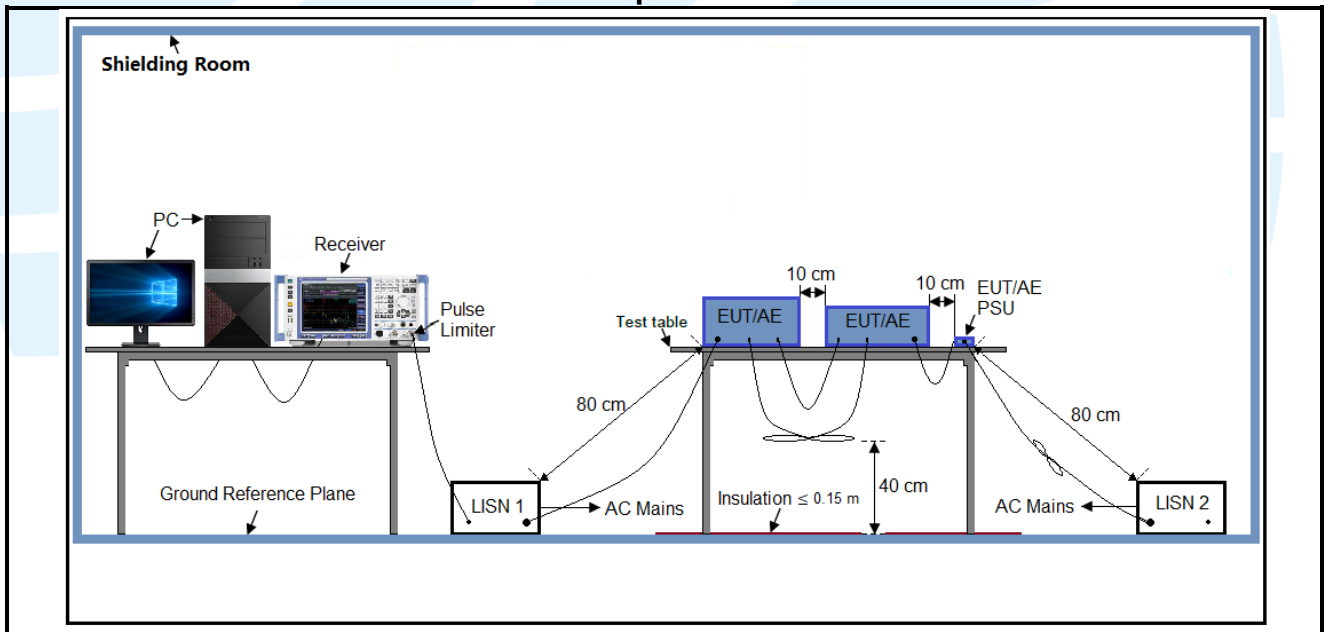

4.5.3 For Conducted RF test setup

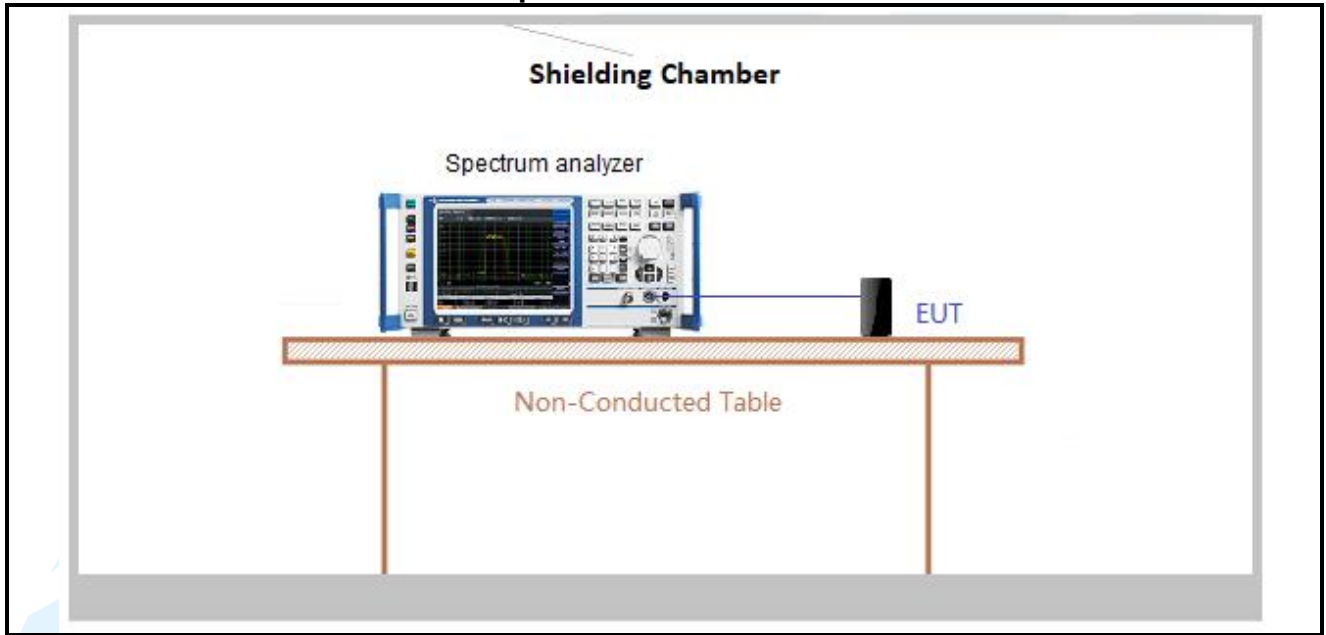

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	X axis
	1TX	Chain 1	X axis
	2TX	Chain 0+1	X axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

### 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


**Test Results**



Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	8.408	8.457	0.99	99.42	0.00	0.01	-0.05
IEEE 802.11g	6	1.390	1.435	0.97	96.86	0.14	0.72	-0.28
IEEE 802.11n-HT20	MCS0	1.300	1.340	0.97	97.01	0.13	0.77	-0.26

**Remark:**

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 \* log(1/ Duty cycle);
- 3) Average factor = 20 log<sub>10</sub> Duty Cycle.

The test plots as follows

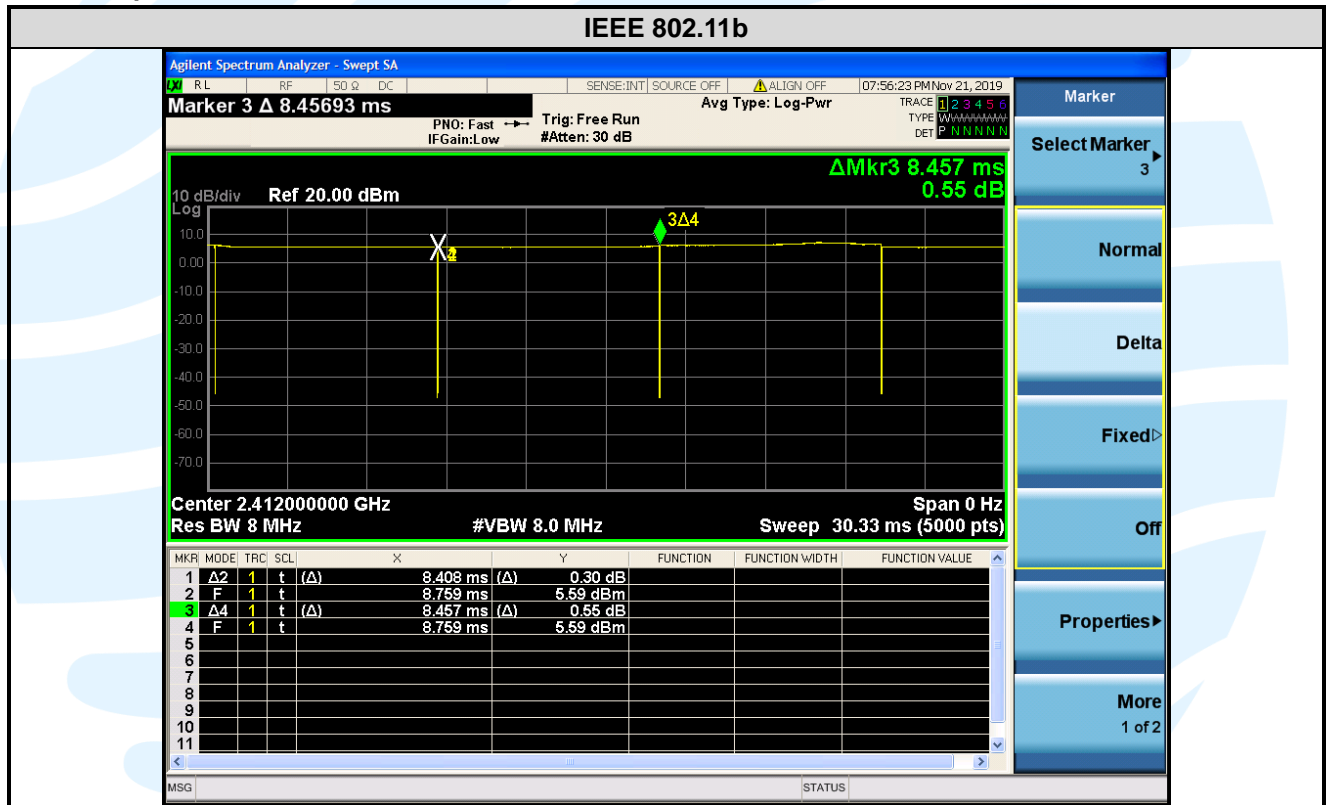

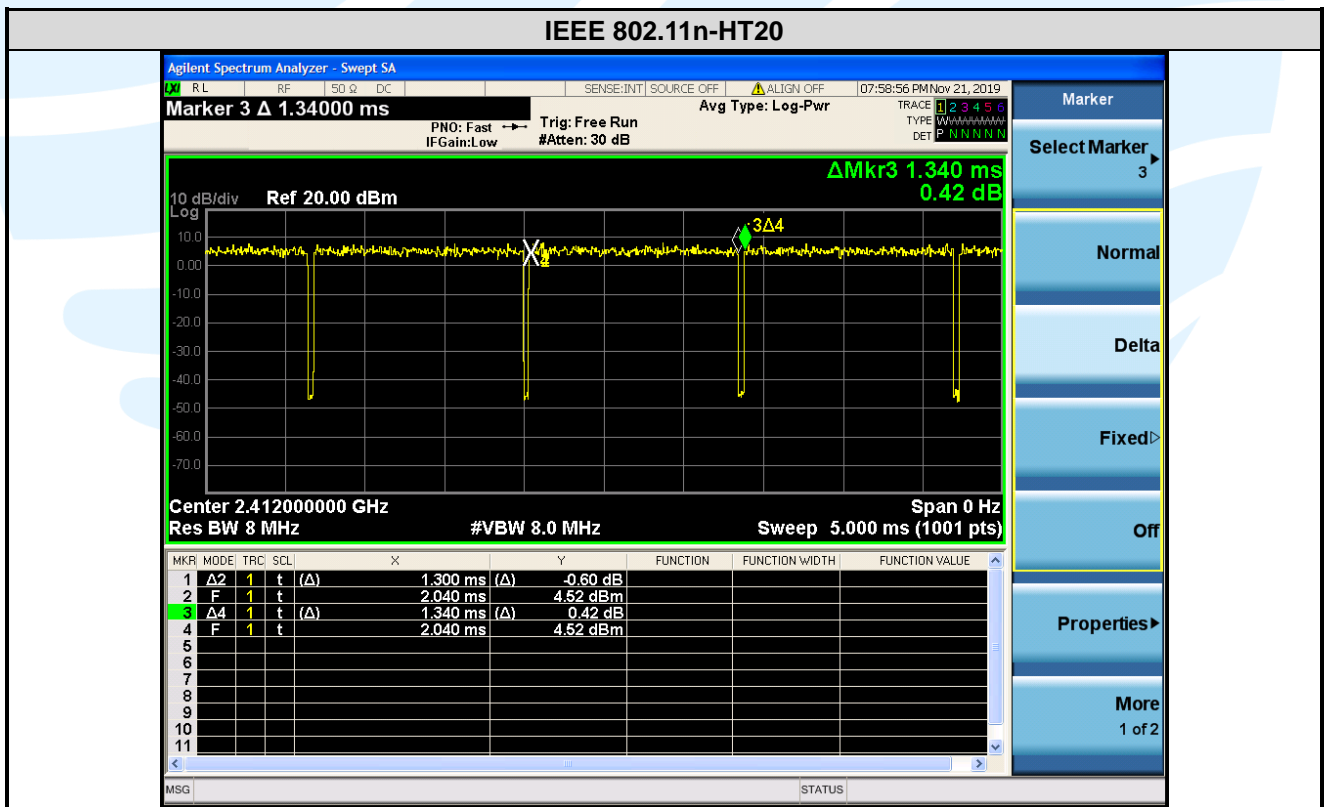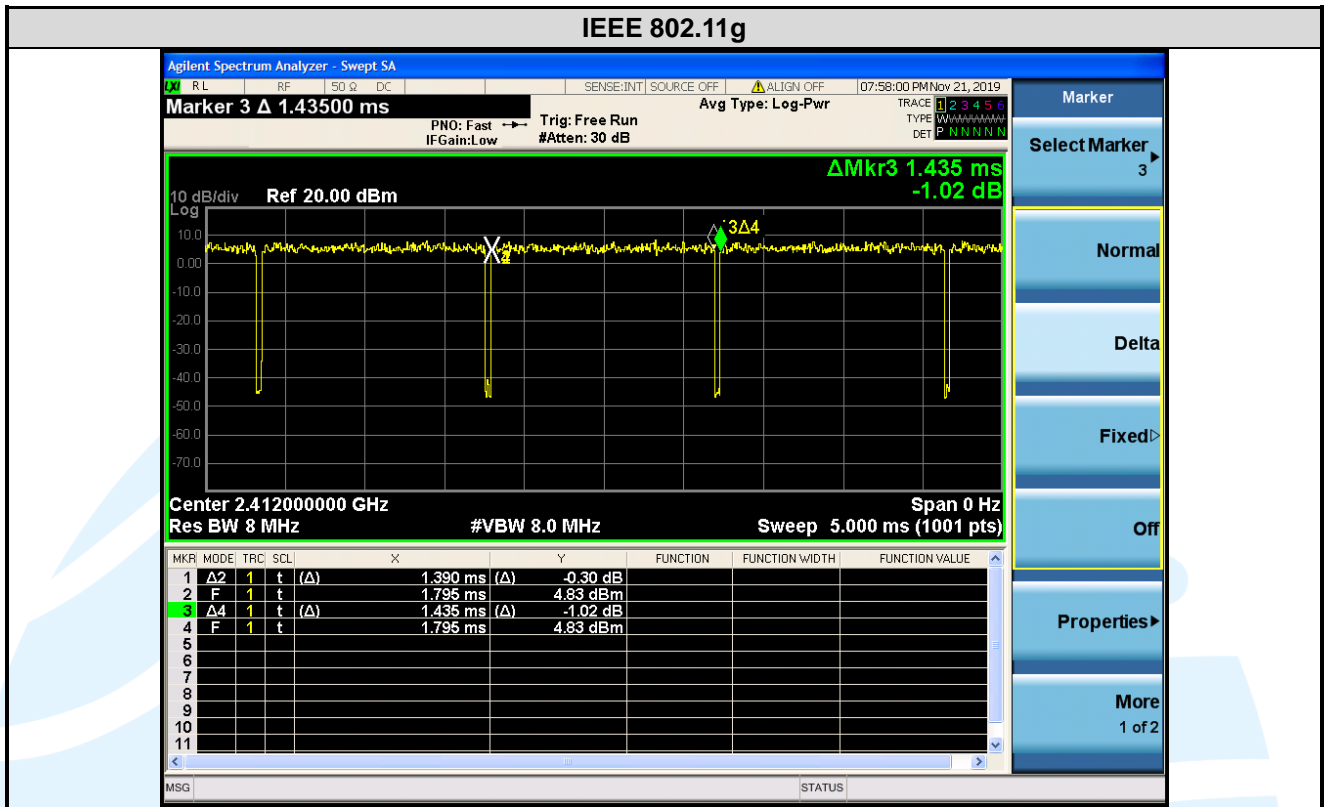

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.0

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules
5	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p><b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<p><b>EUT Antenna:</b> Both antenna in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other and the antenna gain of both chains is completely consistent, the best case directional gain of the antenna is <b>6.30</b> dBi (See section 5.3).</p>



### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)  
**Test Method:** ANSI C63.10-2013 Clause 11.9.1.3  
**Limit:** For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.  
**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

 Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.  
**Test Setup:** Refer to section 4.5.3 for details.  
**Instruments Used:** Refer to section 3 for details  
**Test Results:** Pass

Mode	Channel/ Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)				Pass / Fail
		SISO_ Chain 0	SISO_ Chain 1	Total Power MIMO_ Chain 0+1	Limit (dBm)	
IEEE 802.11b	1(2412)	16.53	17.29	---	30	Pass
	6(2437)	16.25	17.54	---	30	Pass
	11(2462)	16.00	17.68	---	30	Pass
IEEE 802.11g	1(2412)	20.44	20.69	---	30	Pass
	6(2437)	20.11	21.15	---	30	Pass
	11(2462)	19.41	21.38	---	30	Pass
IEEE 802.11n-HT20	1(2412)	19.95	20.75	23.38	30	Pass
	6(2437)	19.77	21.11	<b>23.50</b>	30	Pass
	11(2462)	19.22	21.33	23.41	30	Pass

**Remark:**

1. Power with Duty Factor = Measured Power + Duty Cycle Factor
2. Total (Chain 0+1) =  $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$
3. Directional gain and the maximum conducted output power limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.03	3.55	6.30	29.70
Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows: If transmit signals are correlated, then Directional gain = $10 \log[(10^{G1}/20 + 10^{G2}/20 + \dots + 10^{GN}/20)^2 / NANT]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]				

### 5.46 DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)

**Test Method:** ANSI C63.10-2013 Clause 11.8.1

**Limit:** For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
 Use the following spectrum analyzer settings:  
 a) Set RBW = 100 kHz.  
 b) Set the video bandwidth (VBW) ≥ 3 x RBW.  
 c) Detector = Peak.  
 d) Trace mode = max hold.  
 e) Sweep = auto couple.  
 f) Allow the trace to stabilize.  
 g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


**Test Setup:** Refer to section 4.5.3 for details.


**Instruments Used:** Refer to section 3 for details


**Test Results:**

Mode	Channel/ Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limit	Pass / Fail
<b>Chain 0</b>					
IEEE 802.11b	1(2412)	8.598	11.394	> 500 kHz	Pass
	6(2437)	8.593	11.102	> 500 kHz	Pass
	11(2462)	9.055	11.058	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.39	16.556	> 500 kHz	Pass
	6(2437)	16.38	16.558	> 500 kHz	Pass
	11(2462)	16.38	16.567	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.60	17.755	> 500 kHz	Pass
	6(2437)	17.63	17.743	> 500 kHz	Pass
	11(2462)	17.63	17.762	> 500 kHz	Pass
<b>Chain 1</b>					
IEEE 802.11b	1(2412)	9.069	11.523	> 500 kHz	Pass
	6(2437)	9.075	11.438	> 500 kHz	Pass
	11(2462)	9.064	11.275	> 500 kHz	Pass
IEEE 802.11g	1(2412)	16.39	16.565	> 500 kHz	Pass
	6(2437)	16.40	16.574	> 500 kHz	Pass
	11(2462)	16.39	16.576	> 500 kHz	Pass
IEEE 802.11n-HT20	1(2412)	17.66	17.751	> 500 kHz	Pass
	6(2437)	17.66	17.764	> 500 kHz	Pass
	11(2462)	17.67	17.756	> 500 kHz	Pass

The test plots as follows:

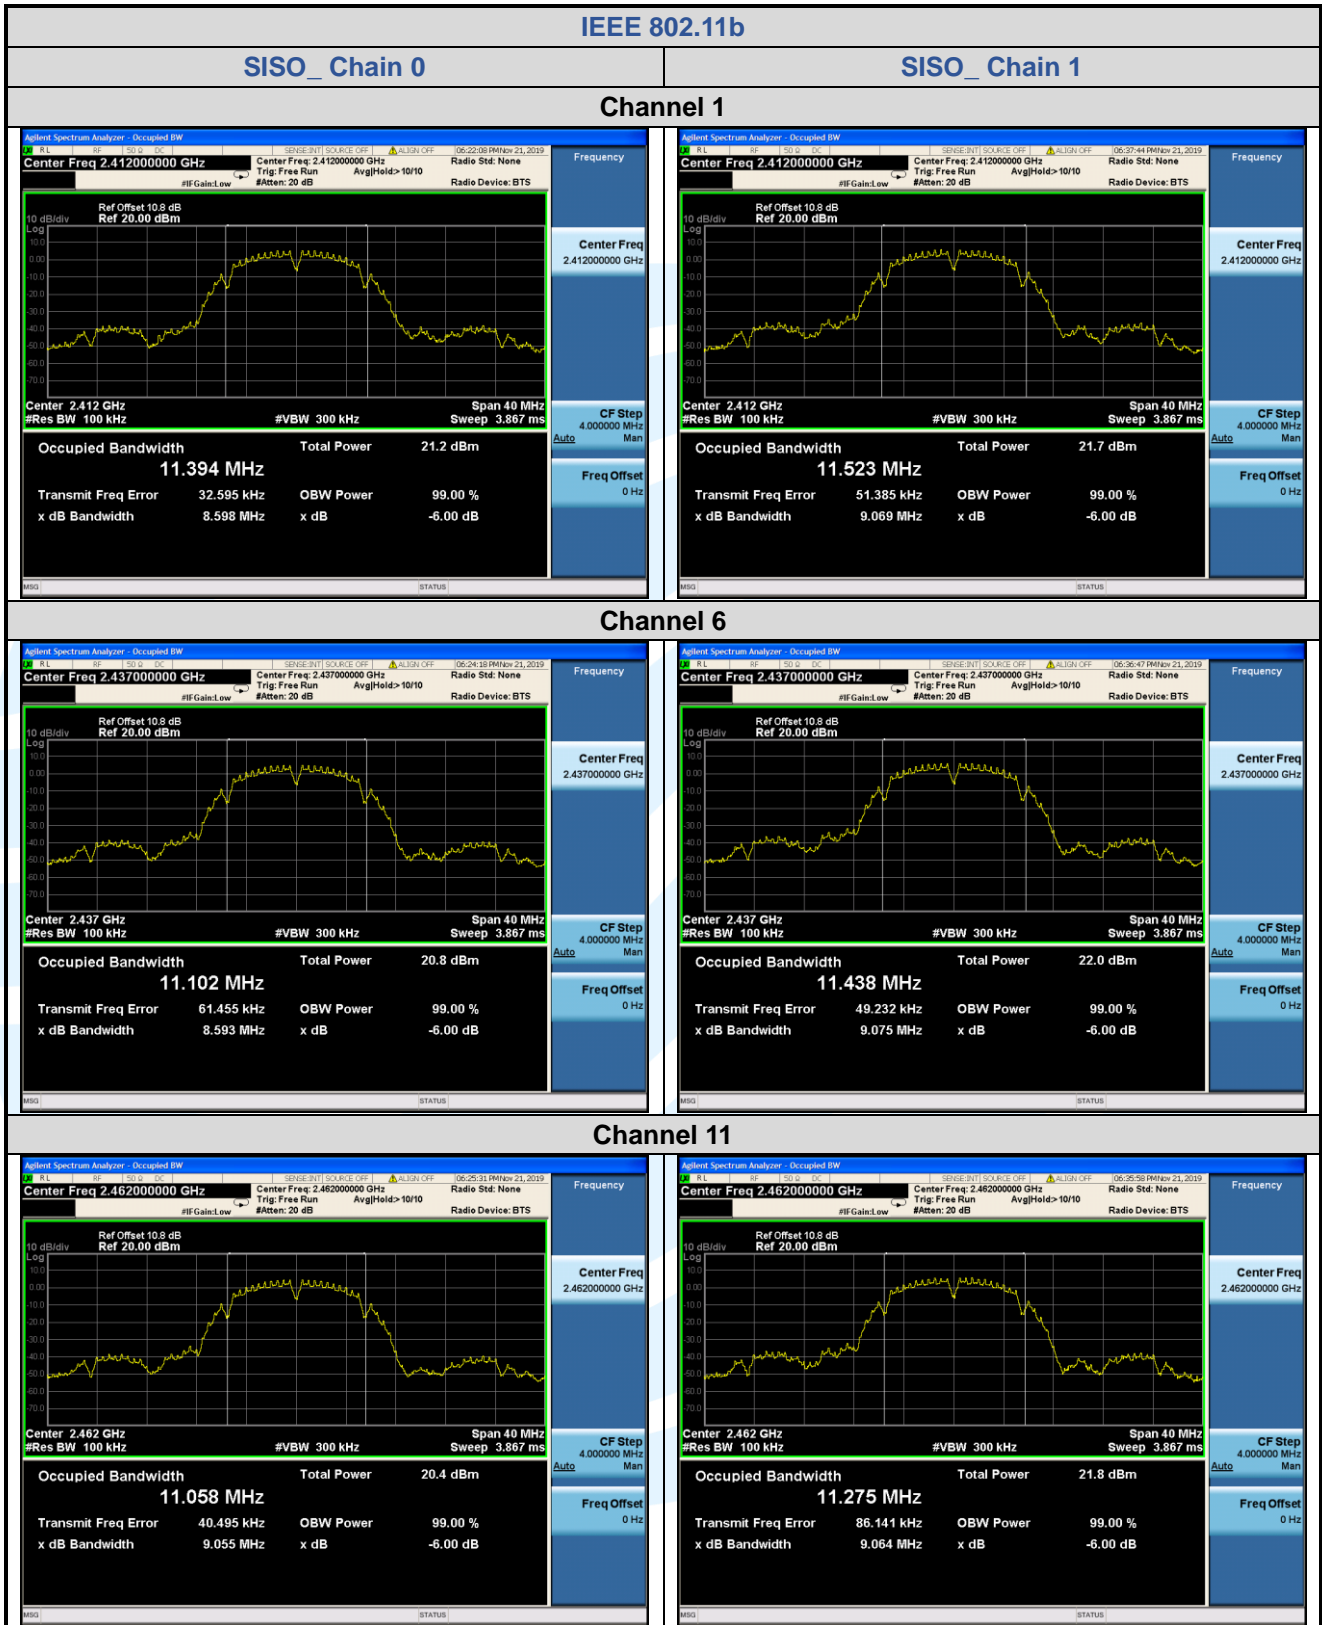

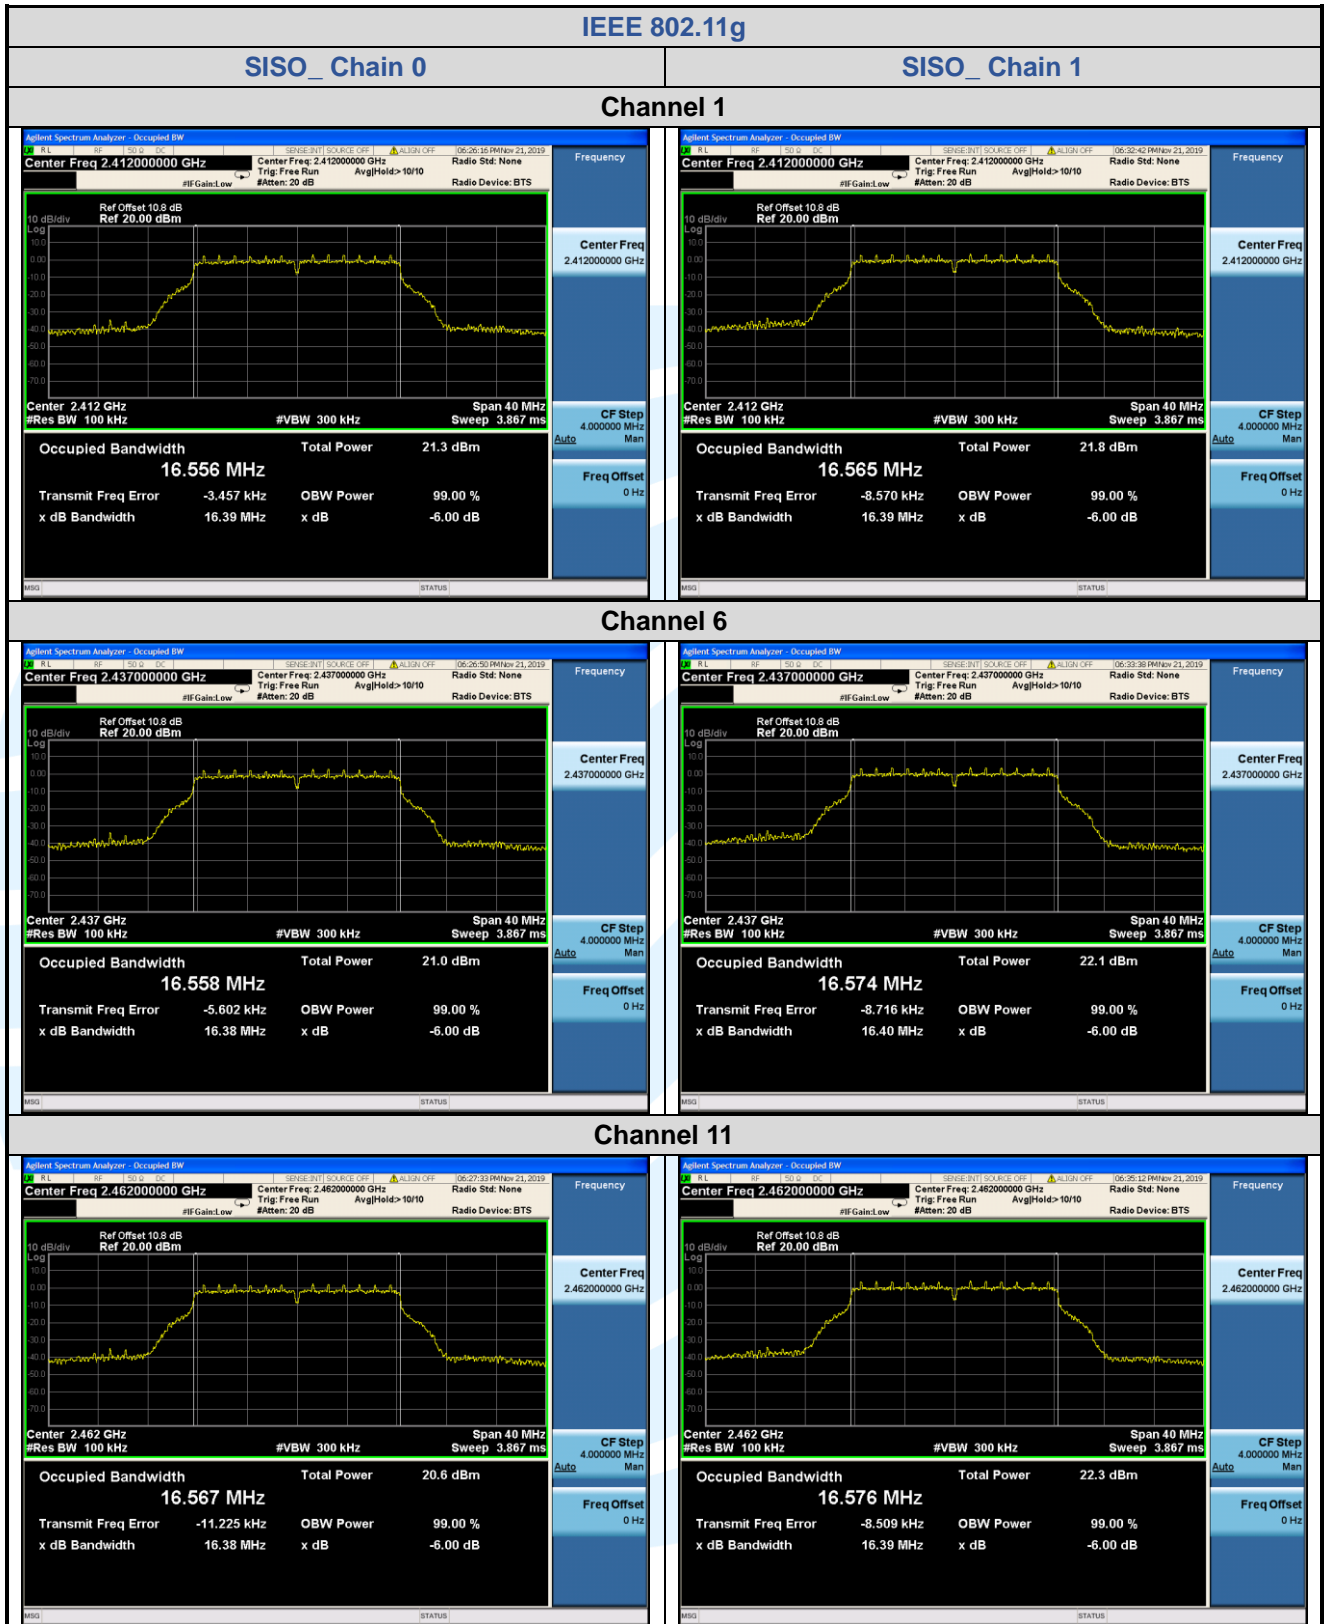

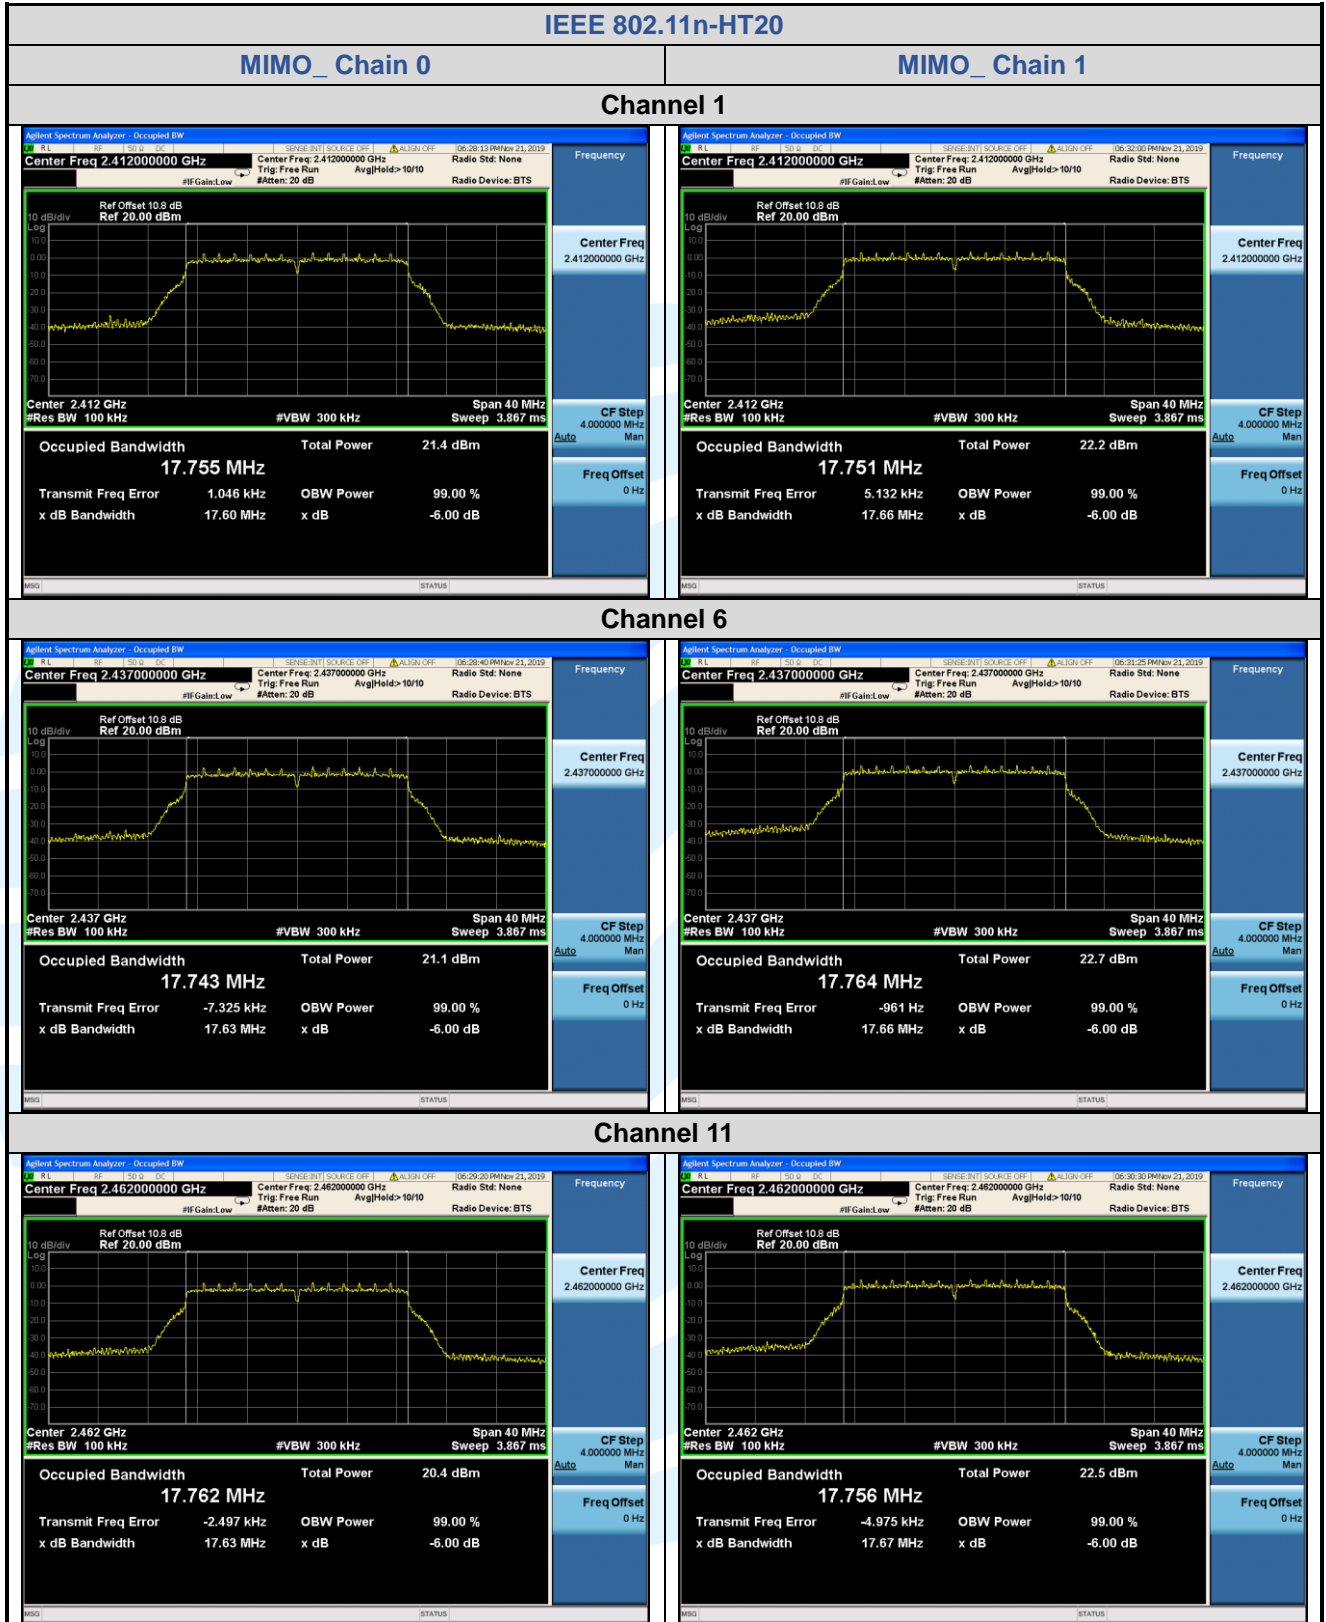

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.0

### 5.5 POWER SPECTRAL DENSITY

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (e)  
**Test Method:** ANSI C63.10-2013 Clause 11.10.2  
**Limit:** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.  
**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- Use the following spectrum analyzer settings:
- a) Set analyzer center frequency to DTS channel center frequency.
  - b) Set the span to 1.5 times the DTS bandwidth.
  - c) Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
  - d) Set the VBW  $\geq 3 \times \text{RBW}$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:**


Mode	Channel/ Frequency (MHz)	Power spectral density (dBm/3kHz)				Pass / Fail
		SISO_Chain 0	SISO_Chain 1	Total Power MIMO_Chain 0+1	Limit @3kHz (dBm)	
IEEE 802.11b	1(2412)	-8.659	-8.461	---	8	Pass
	6(2437)	-8.569	-8.589	---	8	Pass
	11(2462)	-9.547	-7.86	---	8	Pass
IEEE 802.11g	1(2412)	-10.609	-10	---	8	Pass
	6(2437)	-11.575	-9.857	---	8	Pass
	11(2462)	-11.458	-9.72	---	8	Pass
IEEE 802.11n-HT20	1(2412)	-11.869	-11.074	-8.44	8	Pass
	6(2437)	-10.887	-10.967	-7.92	8	Pass
	11(2462)	-11.101	-10.717	-7.89	8	Pass

Remark:

- Total (Chain 0+1) =  $10 \cdot \log[(10^{\text{Chain 0}/10}) + (10^{\text{Chain 1}/10})]$
- Directional gain and the maximum conducted power spectral density limit see table below:

Frequency Band	Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Peak Power Limit (dBm)
2400 MHz to 2483.5 MHz	3.03	3.55	6.30	7.70
Unequal antenna gains, with equal transmit powers. Directional gain is to be computed as follows: If transmit signals are correlated, then $\text{Directional gain} = 10 \log[(10^{G1}/20 + 10^{G2}/20 + \dots + 10^{GN}/20)^2 / \text{NANT}] \text{ dBi}$ [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]				

The test plots as follows:

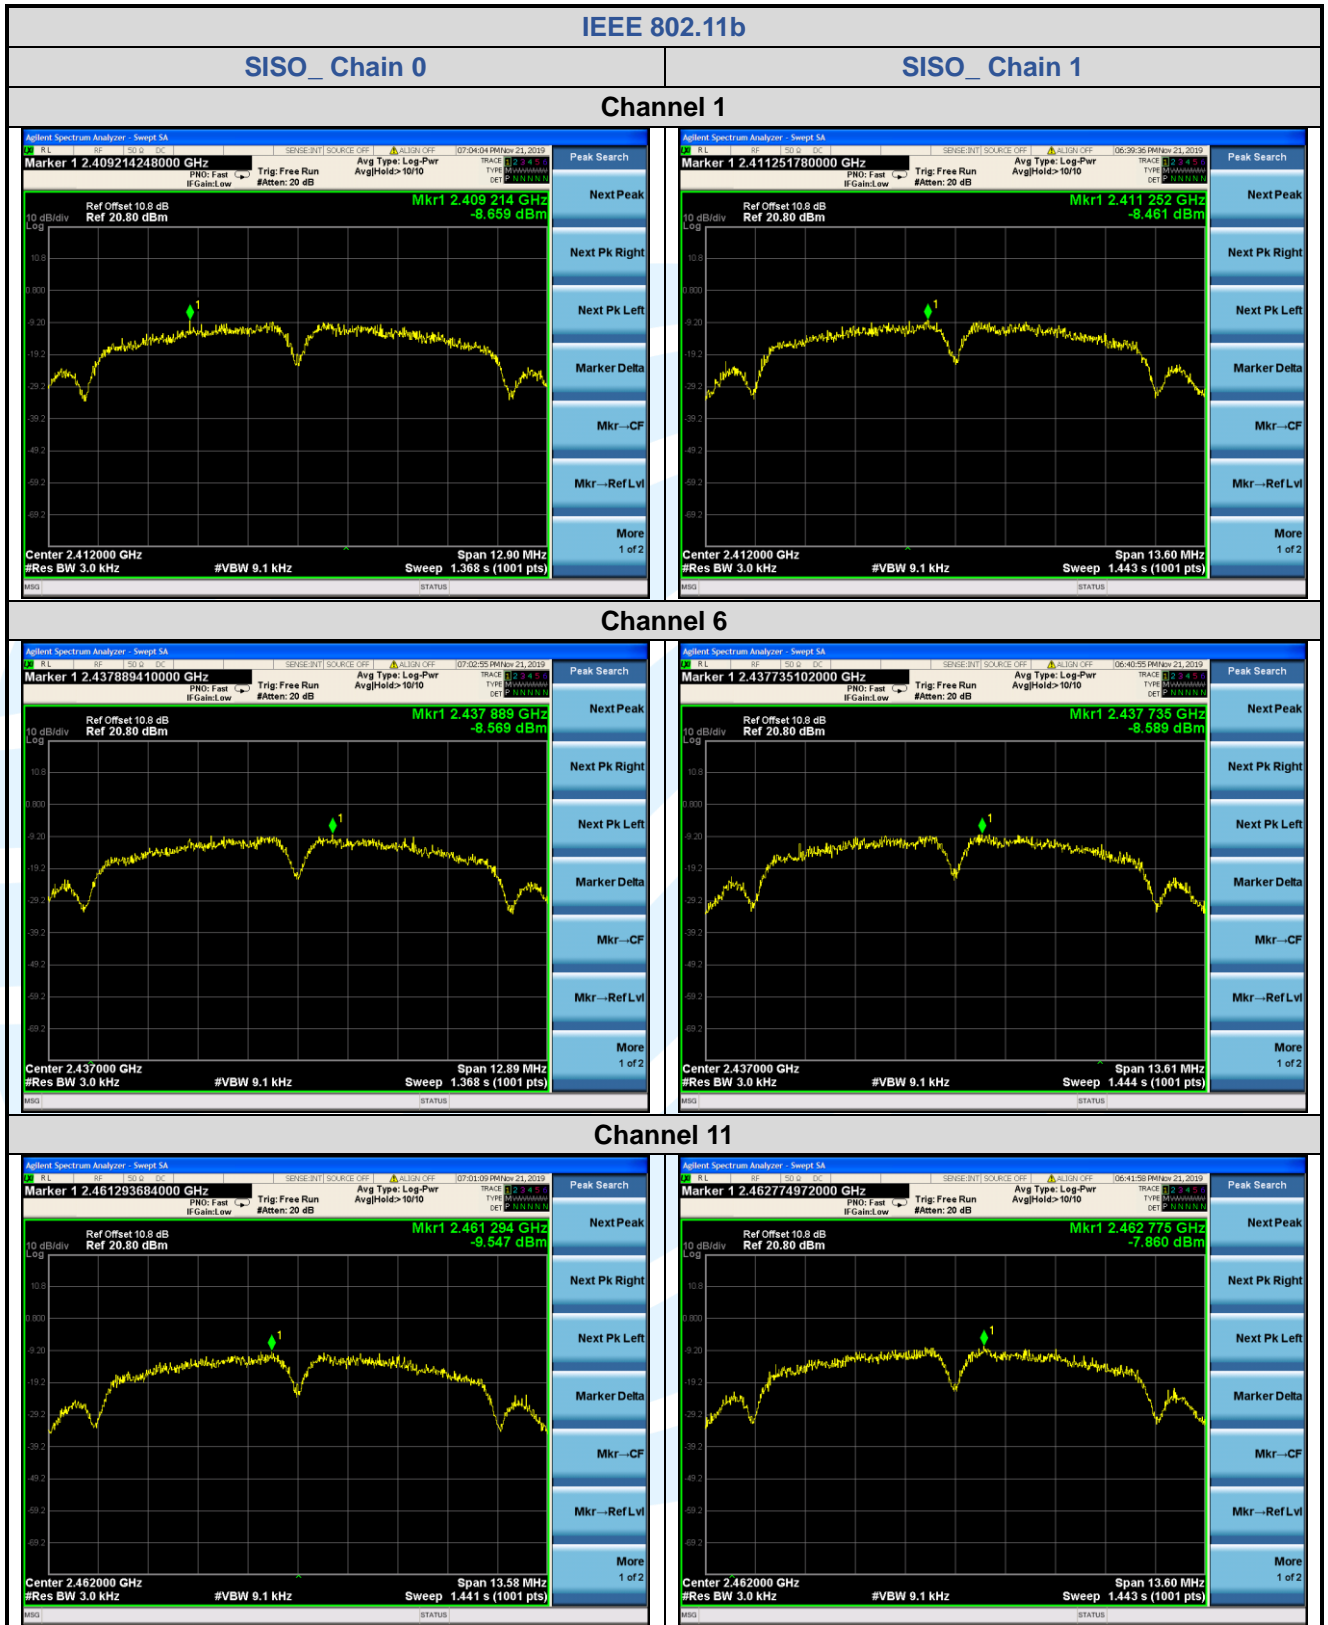

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.0

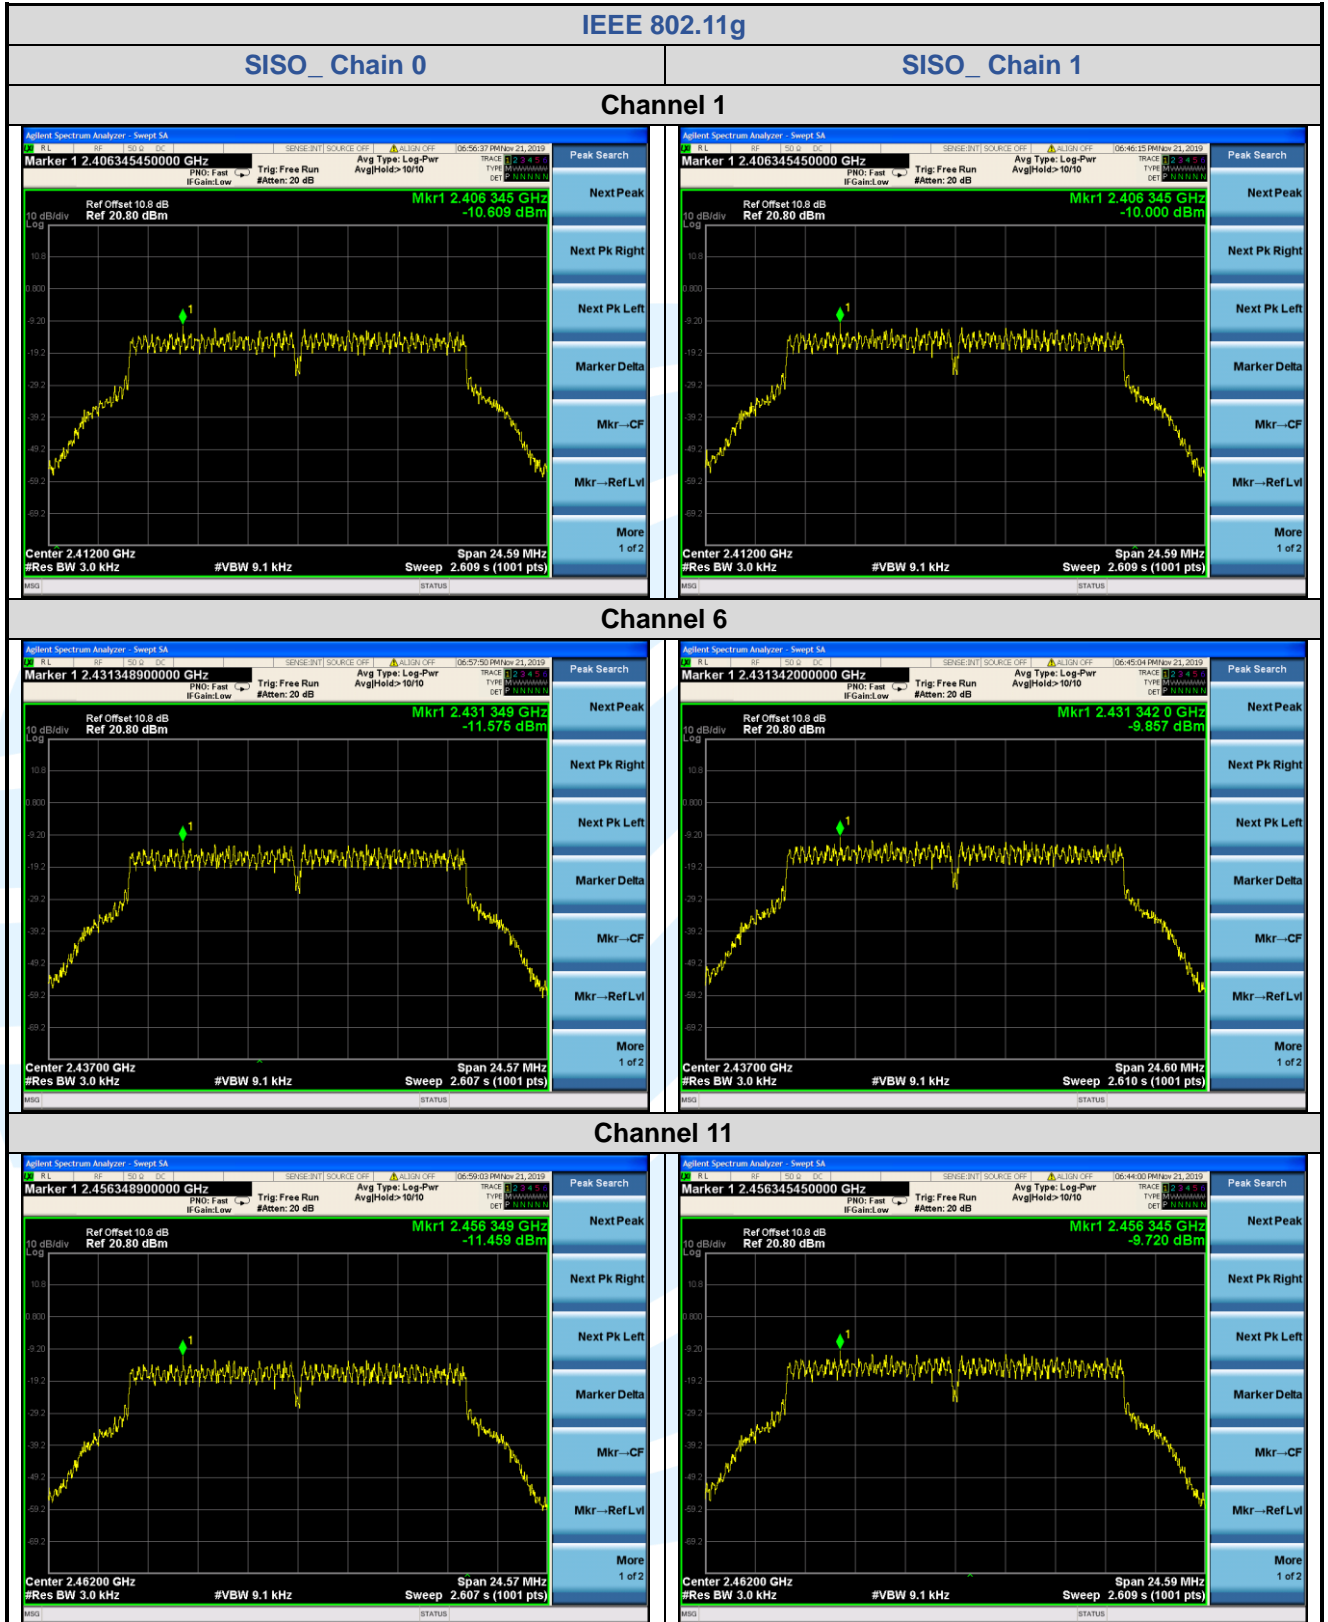

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

UTTR-RF-FCCPART15.247-V1.0



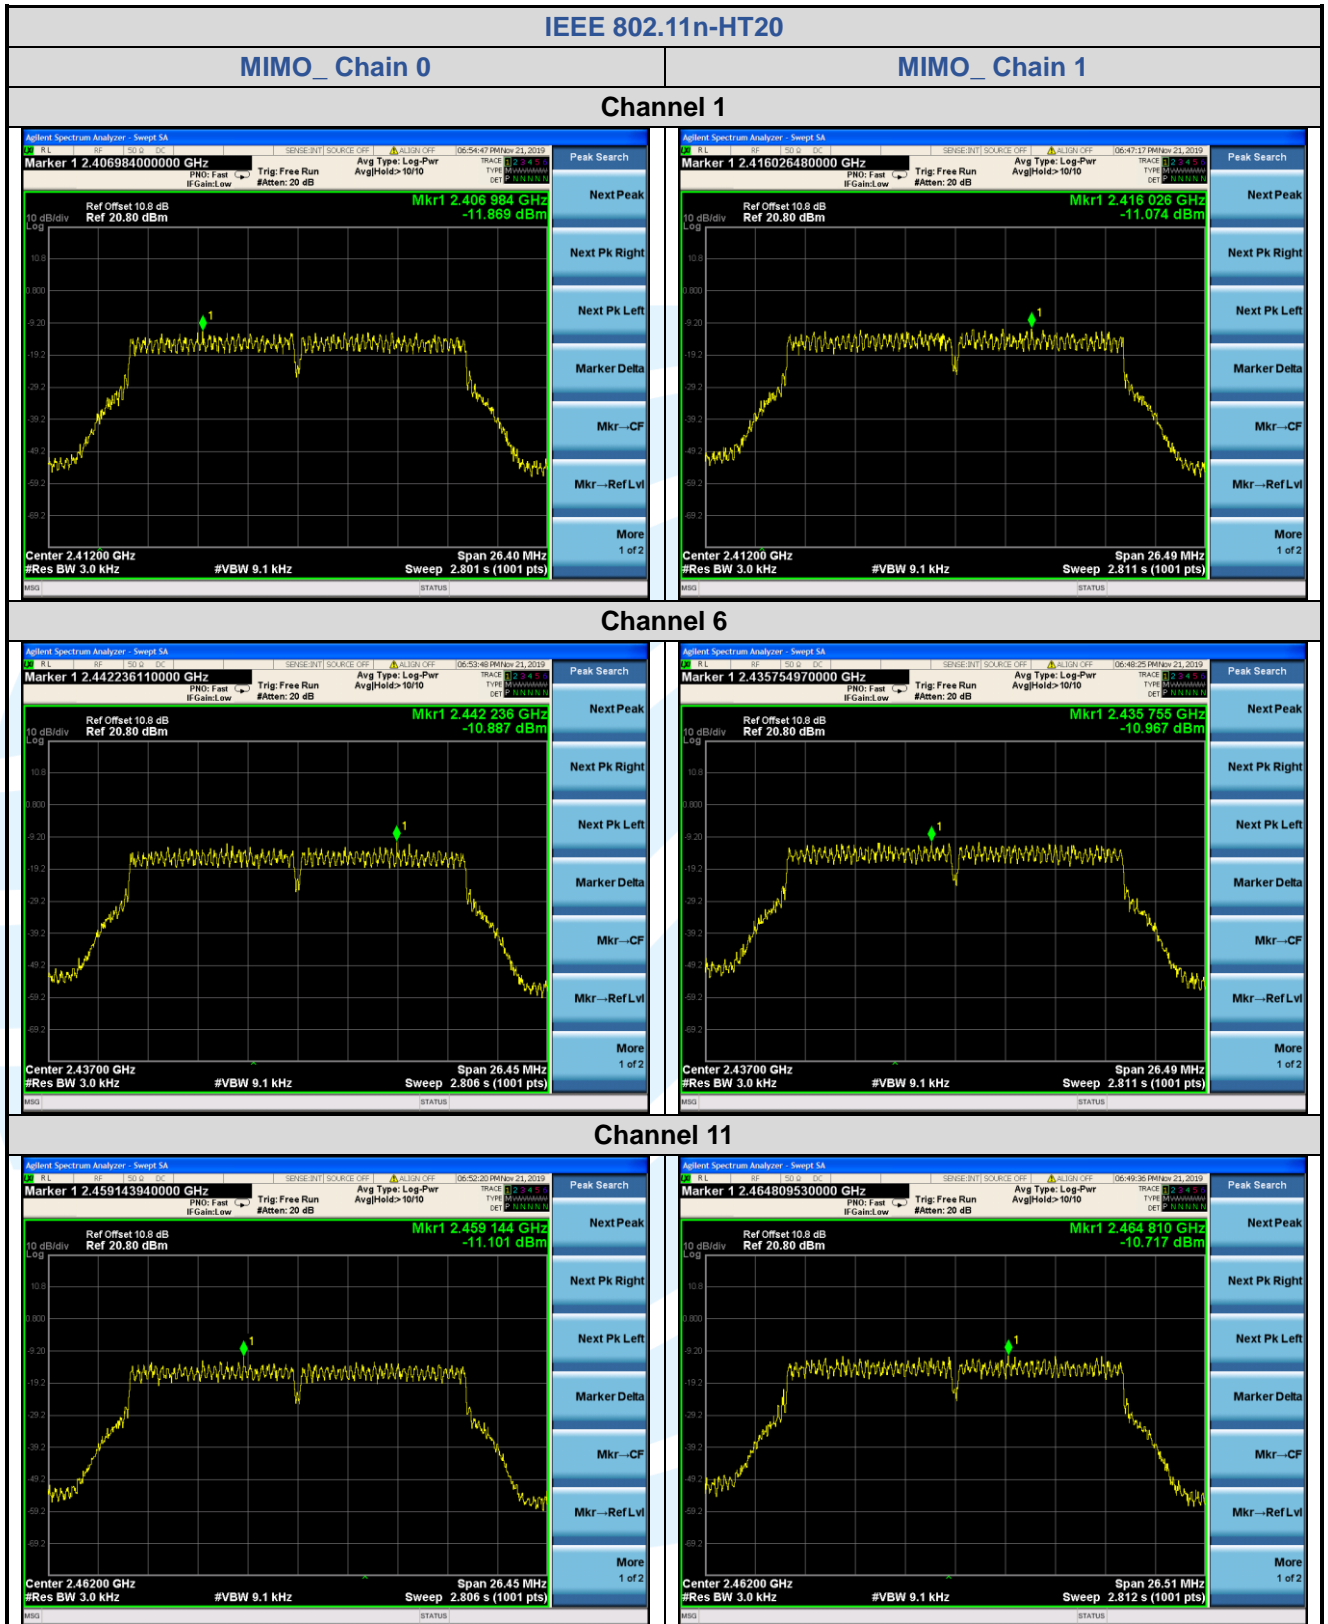

## 5.6 CONDUCTED OUT OF BAND EMISSION

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(d)
- Test Method:** ANSI C63.10-2013 Clause 11.11
- Limit:** In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:
- Step 1: Measurement Procedure REF**
- a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\geq 3 \times$  RBW.
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.
  - j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure OOBE**
- a) Set RBW = 100 kHz.
  - b) Set VBW  $\geq 300$  kHz.
  - c) Detector = peak.
  - d) Sweep = auto couple.
  - e) Trace Mode = max hold.
  - f) Allow trace to fully stabilize.
  - g) Use the peak marker function to determine the maximum amplitude level.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Results:** Pass