



FCC TEST REPORT

Test report

On Behalf of

DATO AI Technology Corporation

For

Smart Door Lock

**Model No.: L-F500, L-F400, L-F300,
L-F301, L-H300, L-B400, L-B200**

FCC ID: 2AUX8-L-F500

**Prepared for: DATO AI Technology Corporation
40 Wall Street, suite 3302, Manhattan, NY, 10005 USA**

**Prepared By: Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China**

Date of Test: Oct. 27, 2019 ~ Nov. 4, 2019

Date of Report: Nov. 4, 2019

Report Number: HK1911042777-2E



TEST RESULT CERTIFICATION

Applicant's name..... : DATO AI Technology Corporation
 Address : 40 Wall Street, suite 3302, Manhattan, NY, 10005 USA

Manufacture's Name..... : SHENZHEN DATO AI TECHNOLOGY CO.,LTD
 Address : Room1706, Oriental Technology Building, No.16 Keyuan Rd,
 Yuehai Street, Nanshan District, ShenZhen, CN

Product description

Trade Mark: N/A

Product name..... : Smart Door Lock

Model and/or type reference : L-F500, L-F400, L-F300, L-F301, L-H300, L-B400, L-B200

Standards..... : FCC Rules and Regulations Part 15 Subpart C Section 15.225
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test..... :

Date (s) of performance of tests..... : Oct. 27, 2019 ~ Nov. 4, 2019

Date of Issue..... : Nov. 4, 2019

Test Result : **Pass**

Testing Engineer : Gary Qian
 (Gary Qian)

Technical Manager : Eden Hu
 (Eden Hu)

Authorized Signatory : Jason Zhou
 (Jason Zhou)



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST FACILITY	4
1.2. MEASUREMENT UNCERTAINTY	4
2. EUT Description	5
3. General Information	6
3.1. TEST ENVIRONMENT AND MODE	6
3.2. DESCRIPTION OF SUPPORT UNITS	6
4. Test Results and Measurement Data	7
4.1. ANTENNA REQUIREMENT	7
4.2. CONDUCTED EMISSION	8
4.3. RADIATED EMISSION MEASUREMENT.....	11
4.4. OCCUPIED BANDWIDTH.....	17
4.5. FREQUENCY STABILITY	19
Appendix A: Photographs of Test Setup	21



1. Test Result Summary

Requirement	CFR 47 Section	Result
Conduction Emission, 0.15MHz to 30MHz	§15.207	PASS
Radiation Emission	§15.225, §15.205, §15.209, §15.35	PASS
Occupied Bandwidth	§ 15.215	PASS
Antenna requirement	§ 15.203	PASS
Frequency stability	§ 15.225	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.1. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.2. MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2



2. EUT Description

Equipment	Smart Door Lock
Model Name	L-F500
Serial No	L-F400, L-F300, L-F301, L-H300, L-B400, L-B200
Model Difference	All model's the function, software and electric circuit are the same, only with the product model named different. Test sample model: L-F500
FCC ID	2AUX8-L-F500
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Operation frequency	13.56MHz
Modulation Type	ASK
Power Source	4×AA
Power Rating	1. DC 6V from Battery 2. DC 5V from adapter with AC 120/240V 60Hz
Adapter Model	Model: HW-050500DFQ Input: 100-240V~, 50/60Hz, 0.5A Output: DC 5V



3. General Information

3.1. Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The new battery is used.	

Per-test mode.
We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. Only worse case is reported.
Final Test Mode:
According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo)

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Test Results and Measurement Data

4.1. Antenna Requirement

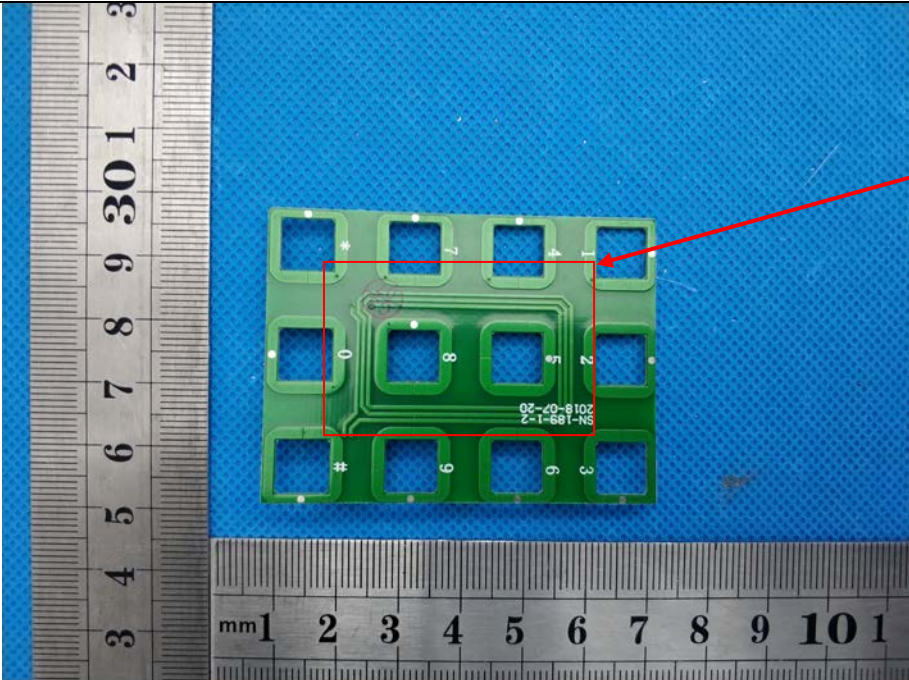Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	PCB Antenna
The antenna is Internal Antenna which permanently attached, and the best case gain of the antenna is 0dBi.	
	



4.2. Conducted Emission


4.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4:2014														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 														
Test Result:	PASS														

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
2. All modes of Low, Middle, and High channel were tested, only the worst result of Low Channel was reported as below:



Test Specification: Neutral

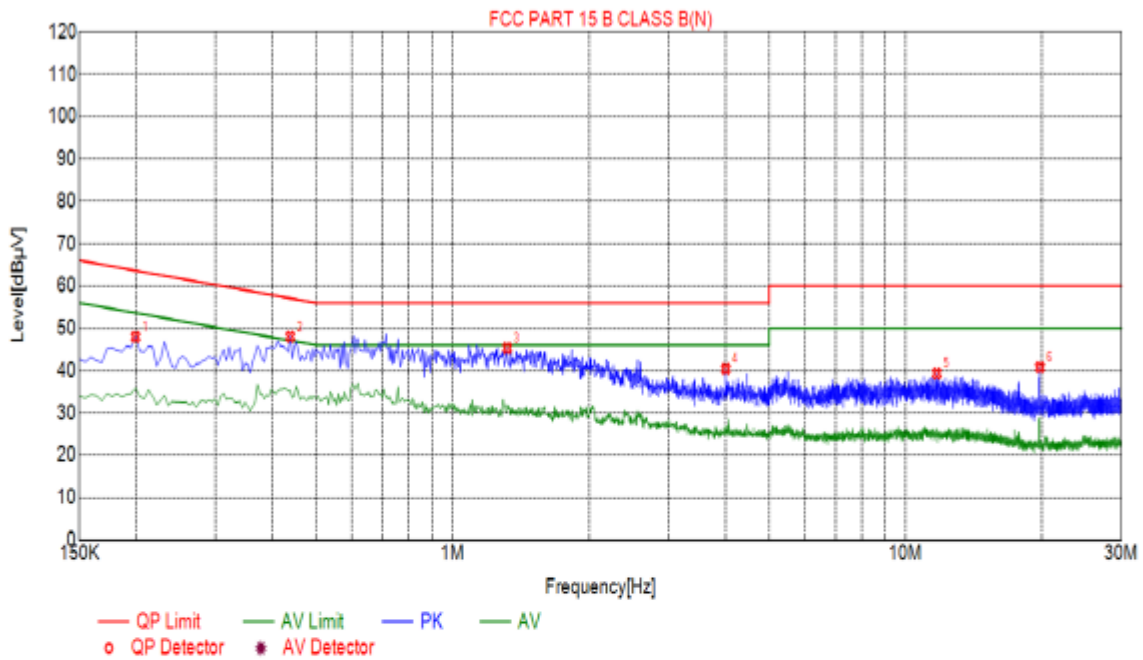


Suspected List						
NO.	F req. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1995	47.99	10.03	63.63	15.64	PK
2	0.4380	48.04	10.05	57.10	9.06	PK
3	1.3200	46.33	10.10	56.00	10.67	PK
4	4.0110	40.41	10.25	56.00	15.59	PK
5	11.7285	39.33	9.99	60.00	20.67	PK
6	19.8150	40.77	10.10	60.00	19.23	PK

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level



Test Specification: Line

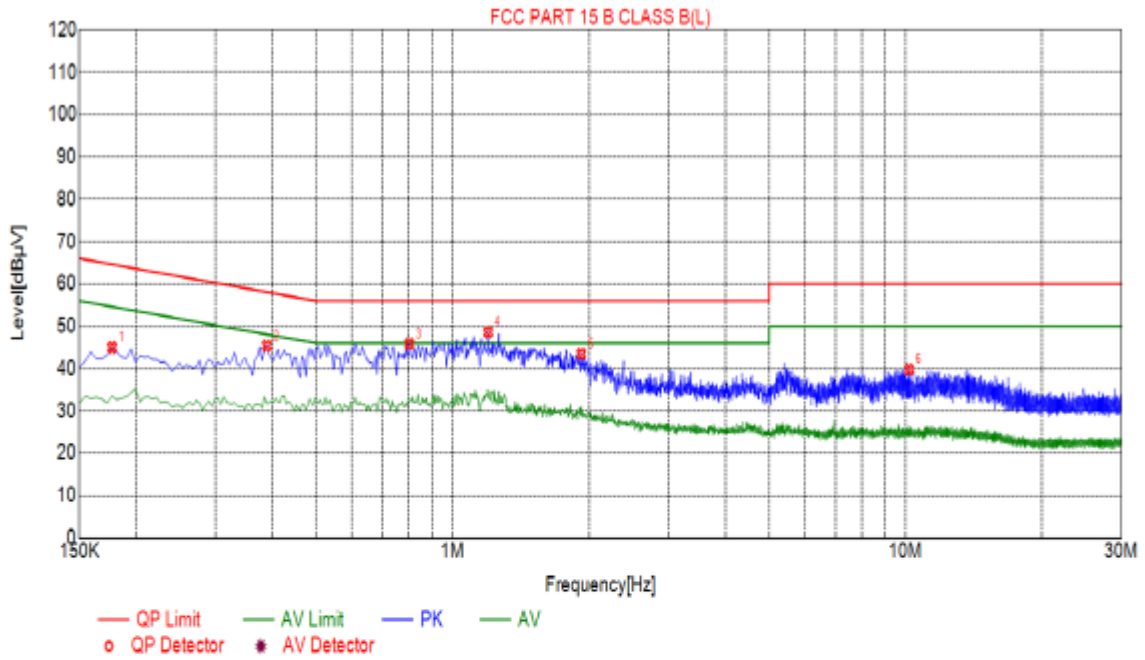

Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1770	45.02	10.05	64.63	19.61	PK
2	0.3885	45.39	10.04	58.10	12.71	PK
3	0.8025	45.86	10.06	56.00	10.14	PK
4	1.1985	48.63	10.09	56.00	7.37	PK
5	1.9230	43.49	10.14	56.00	12.51	PK
6	10.1850	39.86	10.05	60.00	20.14	PK

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level




4.3. Radiated Emission Measurement

4.3.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.225(a) and 15.209				
Test Method:	ANSI C63.10:2013				
Frequency Range:	9 kHz to 5 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 					

Test setup:


For radiated emissions below 30MHz

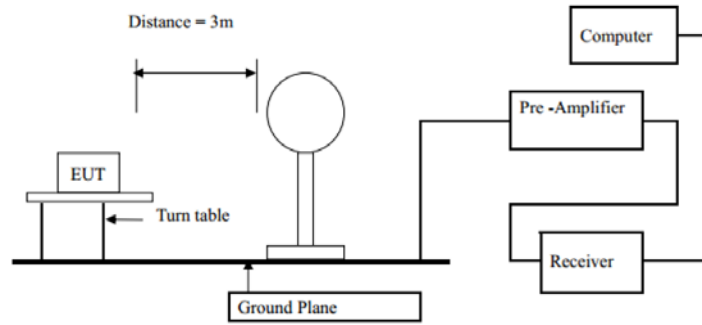

30MHz to 1GHz

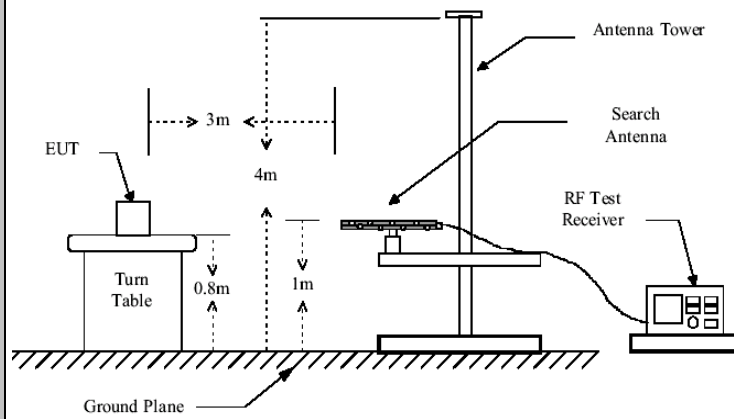

Above 1GHz

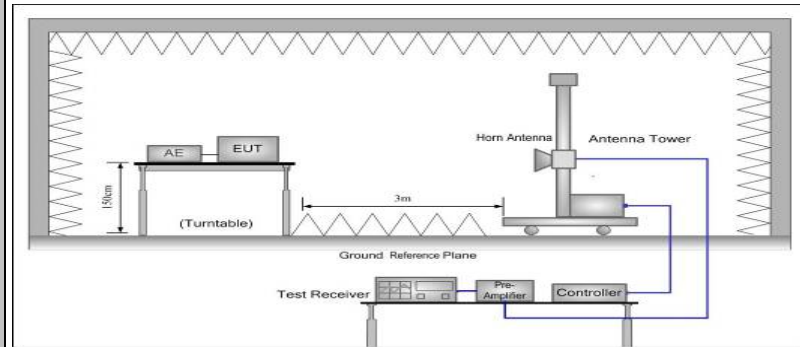

Test Mode:

Transmitting Mode

Test results:

PASS



4.3.2. Limit

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
 (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dBµV/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

4.3.3. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Dec. 27, 2018
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Dec. 27, 2018
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Dec. 27, 2018
Pre-amplifier	HP	8447D	2727A05017	Dec. 27, 2018
Loop antenna	ZHINAN	ZN30900A	12024	Dec. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Dec. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
Coax cable	HUAK	N/A	N/A	Dec. 27, 2018
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.3.4. Test Data

Field Strength of Fundamental

Frequency (MHz)	Reading (dBuV/m)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar (H/V)	Detector
13.29	46.44	15.82	62.26	80.51	-18.25	H	QP
13.29	46.08	15.82	61.90	80.51	-18.61	V	QP
13.41	46.43	15.82	62.25	80.51	-18.26	H	QP
13.41	46.08	15.82	61.90	80.51	-18.61	V	QP
13.71	46.42	15.82	62.24	80.51	-18.27	H	QP
13.71	46.09	15.82	61.91	80.51	-18.60	V	QP
13.90	45.98	15.82	61.80	80.51	-18.71	H	QP
13.90	48.36	15.82	64.18	80.51	-16.33	V	QP
13.56	88.18	12.33	100.51	124	-23.49	H	Peak
13.56	84.89	12.33	97.22	124	-26.78	V	Peak
13.47	53.80	15.82	69.62	90.47	-20.85	H	QP
13.47	52.17	15.82	67.99	90.47	-22.48	V	QP
13.553	53.78	15.82	69.60	90.47	-20.87	H	QP
13.553	52.16	15.82	67.98	90.47	-22.49	V	QP
13.567	53.77	15.82	69.59	90.47	-20.88	H	QP
13.567	52.20	15.82	68.02	90.47	-22.45	V	QP
13.68	50.34	15.82	66.16	90.47	-24.31	H	QP
13.68	49.37	15.82	65.19	90.47	-25.28	V	QP

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor


2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement



About 30MHz-1GHz

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported. The level of the peak emission are less than the average limit, so the average value is not reflected in the report.

Antenna polarity: H

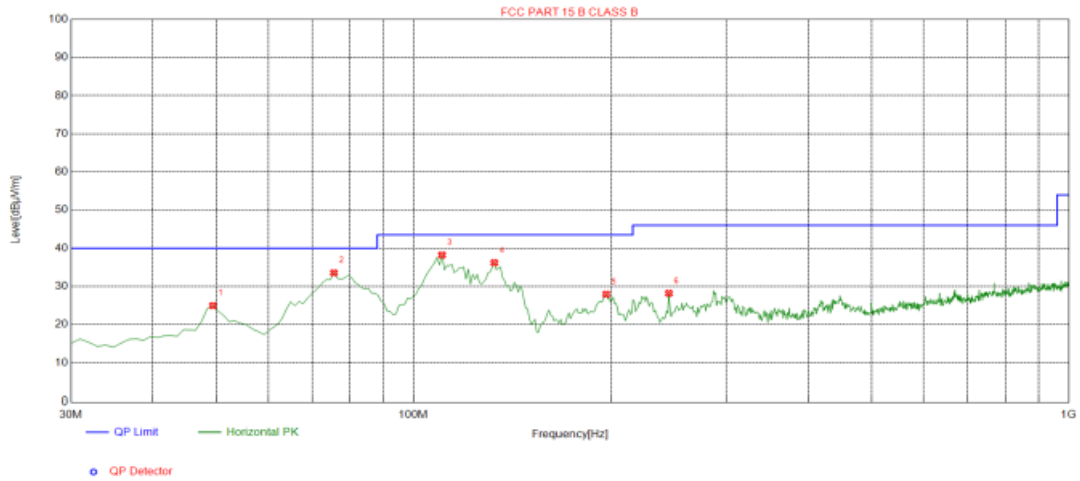


Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.4000	24.95	-13.65	40.00	15.05	100	274	Horizontal
2	75.5900	33.55	-18.68	40.00	6.45	100	278	Horizontal
3	110.510	38.23	-15.52	43.50	5.27	100	160	Horizontal
4	132.820	36.22	-18.74	43.50	7.28	100	13	Horizontal
5	196.840	27.96	-15.36	43.50	15.54	100	163	Horizontal
6	245.340	28.19	-13.61	46.00	17.81	100	319	Horizontal

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level



Antenna polarity: V

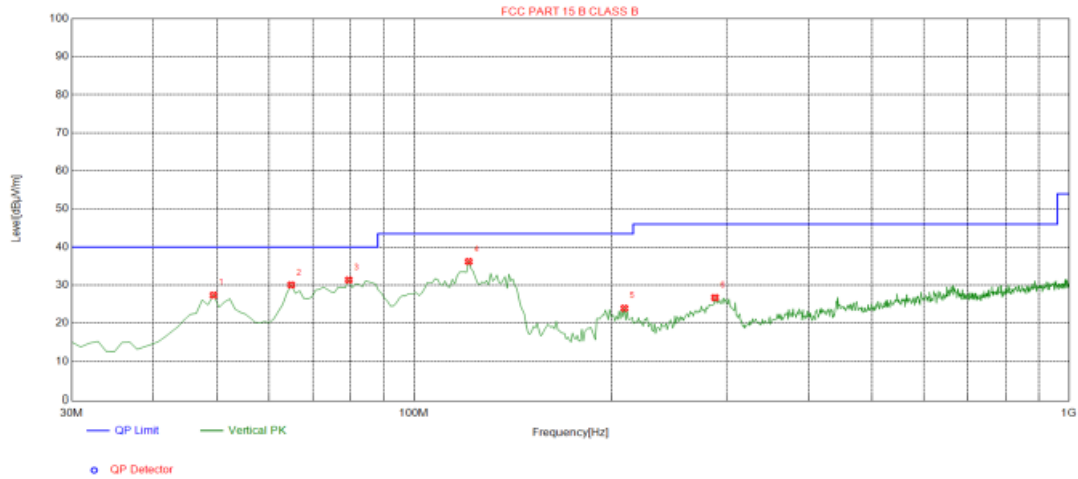

Suspected List


Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.4000	27.37	-13.65	40.00	12.63	100	237	Vertical
2	64.9200	30.06	-16.39	40.00	9.94	100	263	Vertical
3	79.4700	31.35	-19.37	40.00	8.65	100	342	Vertical
4	121.180	36.21	-17.27	43.50	7.29	100	336	Vertical
5	209.450	23.94	-14.81	43.50	19.56	100	345	Vertical
6	288.020	26.71	-12.92	46.00	19.29	100	329	Vertical

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level



4.4. Occupied Bandwidth

4.4.1. Test Specification

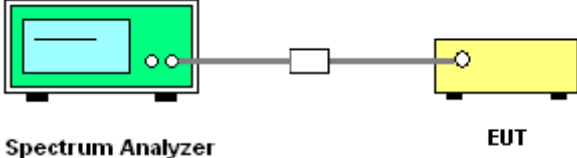Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; $RBW \geq 1\%$ of the 20 dB bandwidth; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting Mode
Test results:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Dec. 27, 2018


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.4.3. Test data

Test Channel (MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	2.692	N/A	PASS


Test plots as follows:

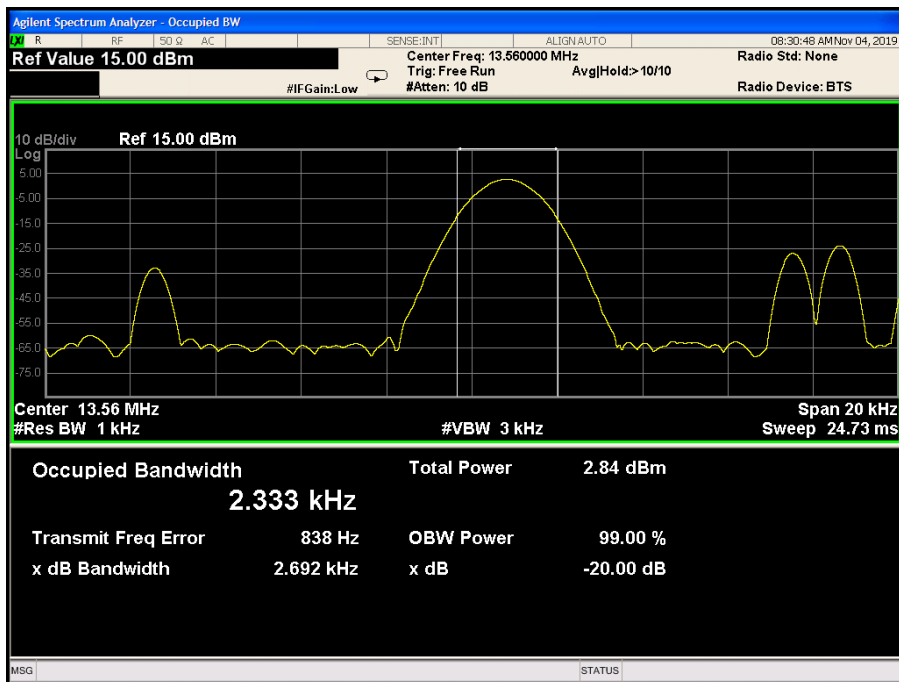



4.5. Frequency stability

4.5.1. Test Specification

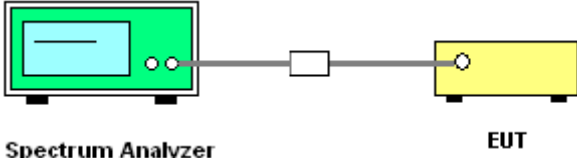Test Requirement:	FCC Part15 C Section 15.225
Test Method:	ANSI C63.10: 2013
Limit:	+/-0.01%
	<ol style="list-style-type: none">1. The equipment under test was connected to an external DC power supply and input rated voltage.2. RF output was connected to a spectrum analyzer.3. The EUT was placed inside the temperature chamber.4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.5. Turn EUT off and set the chamber temperature to - 20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test setup:	 <p>The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a screen and two small circular indicators. A cable connects it to a small white rectangular component, which is then connected to a yellow rectangular Equipment Under Test (EUT) on the right. Labels 'Spectrum Analyzer' and 'EUT' are placed below their respective components.</p>
Test Mode:	Transmitting Mode
Test results:	PASS


**4.5.2. Test Data**

Voltage (Vdc)	Temperature (°C)	Frequency (MHz)	Deviation (%)	Limit (%)
6	-20	13.56034	0.00251	+/-0.01
6	-10	13.56036	0.00271	
6	0	13.56044	0.00243	
6	10	13.56042	0.00276	
6	20	13.56033	0.00132	
6	30	13.56038	0.00446	
6	40	13.56018	0.00196	
6	50	13.56060	0.00308	
6.6	20	13.56027	0.00200	
5.4	20	13.56042	0.00308	



Appendix A: Photographs of Test Setup

Radiated Emission

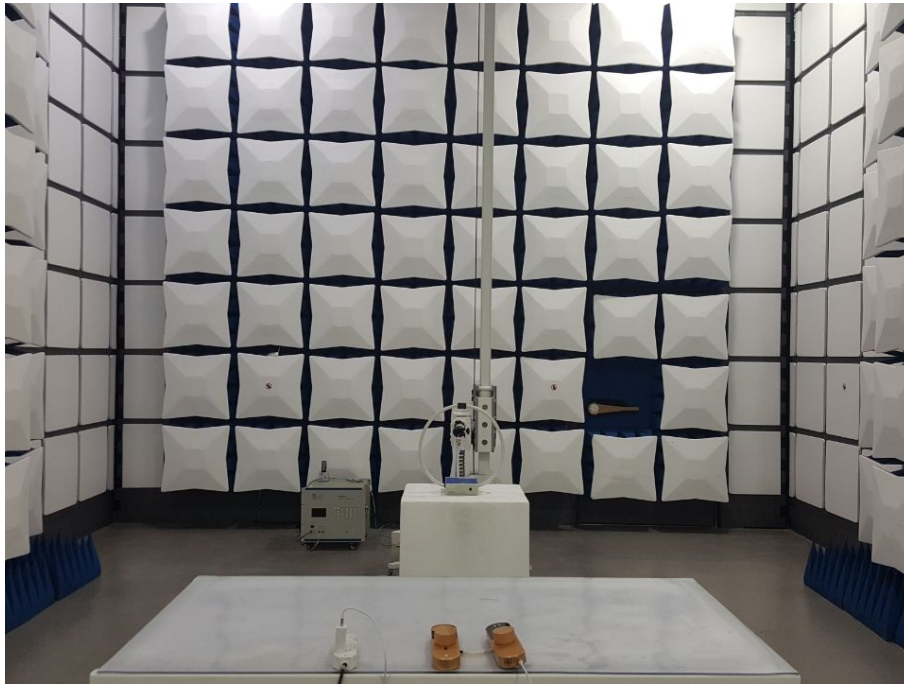

*******END OF REPORT*******