



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd.

FCC ID XMR201707BG96

Product LTE Cat M1 & Cat NB1 & EGPRS Module

Brand Quectel

Model BG96, BG96 MINIPCIE

Marketing Quectel BG96, Quectel BG96 MINIPCIE

Report No. R2007A0435-R6

Issue Date August 18, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR47 Part 27C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location	5
2	General Description of Equipment under Test	6
3	Applied Standards	7
4	Test Configuration	8
5	Test Information	10
5.1	RF Power Output	10
5.2	Effective Isotropic Radiated Power	13
5.3	Occupied Bandwidth	19
5.4	Band Edge Compliance	25
5.5	Peak-to-Average Power Ratio (PAPR)	44
5.6	Frequency Stability.....	46
5.7	Spurious Emissions at Antenna Terminals	53
5.8	Radiates Spurious Emission	69
6	Main Test Instruments	90
	ANNEX A: Product Change Description	92



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	Refer to the Original
2	Effective Isotropic Radiated power	27.50(d)(4) /27.50(b)(10) /27.50(c)(10)	Refer to the Original
3	Occupied Bandwidth	2.1049	Refer to the Original
4	Band Edge Compliance	27.53(h) /27.53(g)	Only test LTE Band
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	Refer to the Original
6	Frequency Stability	2.1055 / 27.54	Refer to the Original
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(h)/27.53(g)/27.53(f)	Refer to the Original
8	Radiates Spurious Emission	2.1053 /27.53(h)/27.53(g)/27.53(f)	Refer to the Original
Date of Testing: June 24, 2017~ July 3, 2017 and August10, 2020 ~ August12, 2020			
<p>Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

BG96, BG96 MINIPCIE (Report No.: R2007A0435-R6) is a variant model of BG96, BG96 MINIPCIE (Report No.: R1811A0536-R3). Test values partial duplicated from original for variant. There is only tested Band Edge Compliance of LTE Band for variant in this report. The detailed product change description please refers to the Statement letter_BG96.

BG96, BG96 MINIPCIE (Report No: R1811A0536-R3) is a variant model of BG96 (Report No: RXA1706-0199RF03R1).The detailed product change description please refers to the ANNEX A.



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China

General information

EUT Description			
Model:	BG96, BG96 MINIPCIE		
IMEI:	866425038291656		
Hardware Version:	R1.2		
Software Version:	BG96MAR04A01M1G		
Power Supply:	External power supply		
Antenna Type:	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Test Mode(s):	LTE Band 4; LTE Band 12, LTE Band 13;		
Test Modulation	QPSK 16QAM;		
LTE Category	M1		
Maximum E.I.R.P./ E.R.P.	LTE Band 4:	29.98dBm	
	LTE Band 12:	27.79dBm	
	LTE Band 13:	27.17dBm	
Rated Power Supply Voltage:	3.8V		
Extreme Voltage:	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature:	Lowest: -40°C Highest: +85°C		
Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 4	1710 ~1755	2110~2155
	LTE Band 12	699 ~ 716	729 ~ 746
	LTE Band 13	777 ~ 787	746 ~ 756
Note: 1. The information of the EUT is declared by the manufacturer.			

The series model number is: BG96 MINIPCIE. The difference of these models are have different marketing requirement.



3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C(2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT lie-down stand-up position (X, Y axis), lie-down position (Z axis),. Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detailin the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/12/13:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 4	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	LTE 12	○	○	○	○	-	-	○	○	○	○	○	○	○	○
	LTE 13	-	-	○	○	-	-	○	○	○	○	○	○	○	○
Effective Isotropic Radiated power	LTE 4	○	○	○	○	○	○	○	○	-	-	○	○	○	○
	LTE 12	○	○	○	○	-	-	○	○	-	-	○	○	○	○
	LTE 13	-	-	○	○	-	-	○	○	-	-	○	○	○	○
Occupied Bandwidth	LTE 4	○	○	○	○	○	○	○	○	-	-	○	-	○	-
	LTE 12	○	○	○	○	-	-	○	○	-	-	○	-	○	-
	LTE 13	-	-	○	○	-	-	○	○	-	-	○	-	○	-
Band Edge Compliance	LTE 4	○	○	○	○	○	○	○	○	○	-	○	○	-	○
	LTE 12	○	○	○	○	-	-	○	○	○	-	○	○	-	○
	LTE 13	-	-	○	○	-	-	○	○	○	-	○	○	-	○
Peak-to-Average Power Ratio	LTE 4	○	○	○	○	○	○	○	○	-	-	○	-	○	-
	LTE 12	○	○	○	○	-	-	○	○	-	-	○	-	○	-
	LTE 13	-	-	○	○	-	-	○	○	-	-	○	-	○	-
Frequency Stability	LTE 4	○	○	○	○	○	○	○	○	-	-	○	-	○	-
	LTE 12	○	○	○	○	-	-	○	○	-	-	○	-	○	-
	LTE 13	-	-	○	○	-	-	○	○	-	-	○	-	○	-
Spurious Emissions at Antenna Terminals	LTE 4	○	○	○	○	○	○	○	-	○	-	-	○	○	○
	LTE 12	○	○	○	○	-	-	○	-	○	-	-	○	○	○
	LTE 13	-	-	○	○	-	-	○	-	○	-	-	○	○	○



Radiates Spurious Emission	LTE 4	-	-	-	-	-	O	O	-	O	-	-	O	O	O
	LTE 12	-	-	-	O	-	-	O	-	O	-	-	O	O	O
	LTE 13	-	-	-	O	-	-	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5 Test Information

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

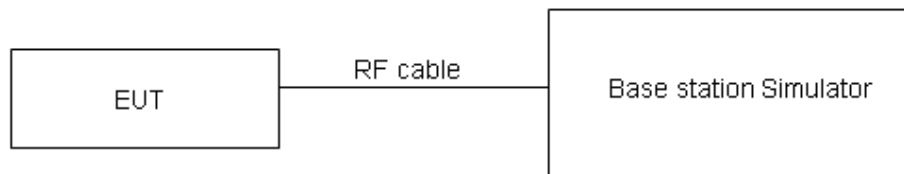

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.



Test Results

Mode	Bandwidth	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band4	1.4MHz	19957/1710.7	0	1#0	22.38	21.94
			0	6#0	22.13	22.06
		20175/1732.5	0	1#0	22.31	22.02
			0	6#0	22.09	22.03
		20393/1754.3	0	1#5	22.37	22.13
			0	6#0	22.23	22.21
	3MHz	19965/1711.5	0	1#0	22.40	21.97
			0	6#0	22.16	22.09
		20175/1732.5	0	1#0	22.35	22.04
			0	6#0	22.13	22.07
		20385/1753.5	1	1#5	22.40	22.16
			1	6#0	22.26	22.24
	5MHz	19975/1712.5	3	1#0	22.37	21.94
			0	6#0	22.14	22.07
		20175/1732.5	0	1#0	22.33	22.00
			0	6#0	22.12	22.03
		20375/1752.5	0	1#5	22.36	22.13
			3	6#0	22.24	22.19
	10MHz	20000/1715	3	1#0	22.39	21.96
			0	4#0	22.22	22.10
		20175/1732.5	0	1#0	22.34	22.03
			0	4#0	22.14	22.08
		20350/1750	4	1#5	22.39	22.15
			7	4#2	22.28	22.23
	15MHz	20025/1717.5	3	1#0	22.38	21.91
			0	6#0	22.20	22.07
		20175/1732.5	0	1#0	22.30	22.01
			0	6#0	22.10	22.03
		20325/1747.5	8	1#5	22.37	22.13
			11	6#0	22.23	22.19
	20MHz	20050/1720	3	1#0	22.35	21.89
			0	6#0	22.17	22.05
		20175/1732.5	0	1#0	22.26	21.97
			0	6#0	22.05	21.99
		20300/1745	12	1#5	22.34	22.08
			15	6#0	22.19	22.16



Mode	Bandwidth	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band12	1.4MHz	23017/699.7	0	1#0	22.74	23.23
			0	6#0	22.48	22.71
		23095/707.5	0	1#0	23.12	22.81
			0	6#0	22.66	22.90
		23173/715.3	0	1#5	23.37	23.02
			0	6#0	22.64	22.79
	3MHz	23025/700.5	0	1#0	22.76	23.25
			0	6#0	22.56	22.74
		23095/707.5	0	1#0	23.13	22.84
			0	6#0	22.68	22.95
		23165/714.5	1	1#5	23.40	23.04
			1	6#0	22.68	22.83
	5MHz	23035/701.5	3	1#0	22.75	23.20
			0	6#0	22.54	22.71
		23095/707.5	0	1#0	23.09	22.82
			0	6#0	22.64	22.90
		23155/713.5	0	1#5	23.38	23.02
			3	6#0	22.63	22.79
	10MHz	23060/704	3	1#0	22.72	23.18
			0	4#0	22.51	22.69
		23095/707.5	0	1#0	23.05	22.78
			0	4#0	22.59	22.86
		23130/711	4	1#5	23.35	22.97
			7	4#2	22.59	22.76

Mode	Bandwidth	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band13	5MHz	23205/779.5	3	1#0	23.10	23.81
			0	6#0	22.80	21.84
		23230/782	0	1#0	23.32	23.14
			0	6#0	22.68	22.19
		23255/784.5	0	1#5	23.11	23.72
			3	6#0	22.67	21.93
	10MHz	23230/782	0	1#0	23.07	23.70
			0	4#0	22.77	22.95

5.2 Effective Isotropic Radiated Power

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
 - a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
 - b) Key the transmitter, then rotate the EUT 360 azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
 - c) Replace the transmitter under test with a vertically polarized half-wavedipole (or an antenna whose gain is known relative to an ideal half-wavedipole). The center of the antenna should be at the same location as the center of the antenna under test.
 - d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
 - e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
 - f) The maximum ERP is the maximum value determined in the preceding step.
 - g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

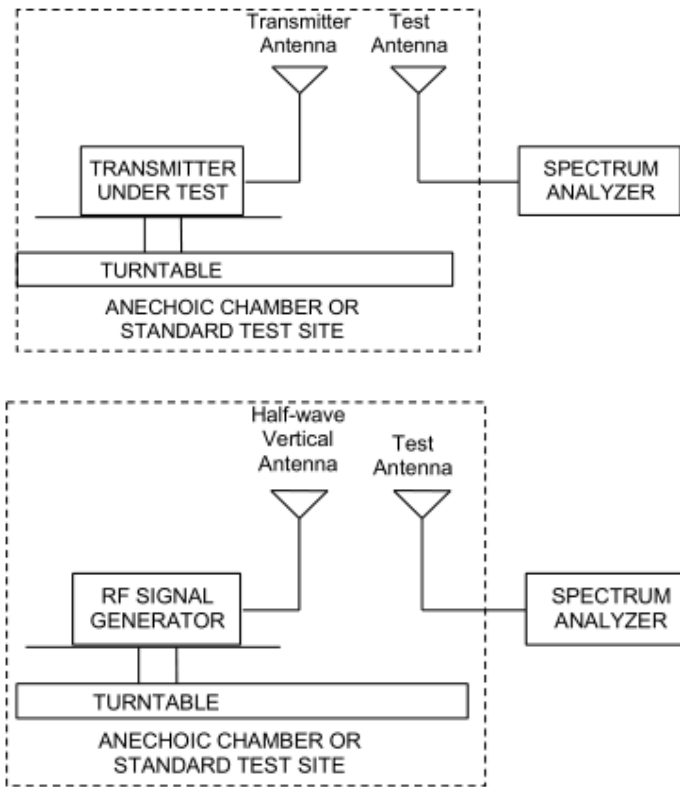

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Part 27.50(b)(10)Limit	$\leq 3 \text{ W}$ (34.77 dBm)
Part 27.50(c)(10)Limit	$\leq 3 \text{ W}$ (34.77 dBm)
Part 27.50(d)(4)Limit	$\leq 1 \text{ W}$ (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

**Test Results**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 4					
Band width	Channel/Frequency(MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4MHz (QPSK)	19957/1710.7	Horizontal	29.04	30	pass
	20175/1732.5	Horizontal	29.25	30	pass
	20393/1754.3	Horizontal	29.52	30	pass
3MHz (QPSK)	19965/1711.5	Horizontal	29.25	30	pass
	20175/1732.5	Horizontal	29.98	30	pass
	20385/1753.5	Horizontal	29.32	30	pass
5MHz (QPSK)	19975/1712.5	Horizontal	29.73	30	pass
	20175/1732.5	Horizontal	29.18	30	pass
	20375/1752.5	Horizontal	29.29	30	pass
10MHz (QPSK)	20000/1715	Horizontal	29.05	30	pass
	20175/1732.5	Horizontal	29.24	30	pass
	20350/1750	Horizontal	29.47	30	pass
15MHz (QPSK)	20025/1717.5	Horizontal	27.28	30	pass
	20175/1732.5	Horizontal	27.80	30	pass
	20325/1747.5	Horizontal	27.93	30	pass
20MHz (QPSK)	20050/1720	Horizontal	26.65	30	pass
	20175/1732.5	Horizontal	26.95	30	pass
	20300/1745	Horizontal	26.06	30	pass
1.4MHz (16QAM)	19957/1710.7	Horizontal	29.72	30	pass
	20175/1732.5	Horizontal	29.94	30	pass
	20393/1754.3	Horizontal	29.21	30	pass
3MHz (16QAM)	19965/1711.5	Horizontal	29.95	30	pass
	20175/1732.5	Horizontal	29.66	30	pass
	20385/1753.5	Horizontal	29.01	30	pass
5MHz (16QAM)	19975/1712.5	Horizontal	29.41	30	pass
	20175/1732.5	Horizontal	29.55	30	pass
	20375/1752.5	Horizontal	29.00	30	pass
10MHz (16QAM)	20000/1715	Horizontal	28.70	30	pass
	20175/1732.5	Horizontal	28.92	30	pass
	20350/1750	Horizontal	29.15	30	pass
15MHz (16QAM)	20025/1717.5	Horizontal	26.97	30	pass
	20175/1732.5	Horizontal	27.50	30	pass
	20325/1747.5	Horizontal	27.62	30	pass
20MHz (16QAM)	20050/1720	Horizontal	26.32	30	pass
	20175/1732.5	Horizontal	26.63	30	pass
	20300/1745	Horizontal	25.75	30	pass



LTE Band 12					
Band width	Channel/Frequency(MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4MHz (QPSK)	23017/699.7	Horizontal	25.51	34.7	pass
	23095/707.5	Horizontal	26.10	34.7	pass
	23173/715.3	Horizontal	26.92	34.7	pass
3MHz (QPSK)	23025/700.5	Horizontal	25.50	34.7	pass
	23095/707.5	Horizontal	26.79	34.7	pass
	23165/714.5	Horizontal	27.79	34.7	pass
5MHz (QPSK)	23035/701.5	Horizontal	25.36	34.7	pass
	23095/707.5	Horizontal	26.32	34.7	pass
	23155/713.5	Horizontal	27.30	34.7	pass
10MHz (QPSK)	23060/704	Horizontal	24.70	34.7	pass
	23095/707.5	Horizontal	25.44	34.7	pass
	23130/711	Horizontal	25.97	34.7	pass
1.4MHz (16QAM)	23017/699.7	Horizontal	25.18	34.7	pass
	23095/707.5	Horizontal	25.80	34.7	pass
	23173/715.3	Horizontal	27.60	34.7	pass
3MHz (16QAM)	23025/700.5	Horizontal	25.17	34.7	pass
	23095/707.5	Horizontal	26.45	34.7	pass
	23165/714.5	Horizontal	27.47	34.7	pass
5MHz (16QAM)	23035/701.5	Horizontal	25.07	34.7	pass
	23095/707.5	Horizontal	26.00	34.7	pass
	23155/713.5	Horizontal	26.98	34.7	pass
10MHz (16QAM)	23060/704	Horizontal	24.40	34.7	pass
	23095/707.5	Horizontal	25.10	34.7	pass
	23130/711	Horizontal	25.66	34.7	pass



LTE Band 13					
Band width	Channel/Frequency(MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
5MHz(QPSK)	23205/779.5	Horizontal	27.00	34.7	pass
	23230/782	Horizontal	26.97	34.7	pass
	23255/784.5	Horizontal	27.00	34.7	pass
10MHz(QPSK)	23230/782	Horizontal	26.86	34.7	pass
5MHz(16QAM)	23035/701.5	Horizontal	26.99	34.7	pass
	23095/707.5	Horizontal	26.96	34.7	pass
	23155/713.5	Horizontal	27.17	34.7	pass
10MHz(16QAM)	23230/782	Horizontal	26.55	34.7	pass

Note:1. EIRP= E.R.P+2.15

5.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/12/13 .

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

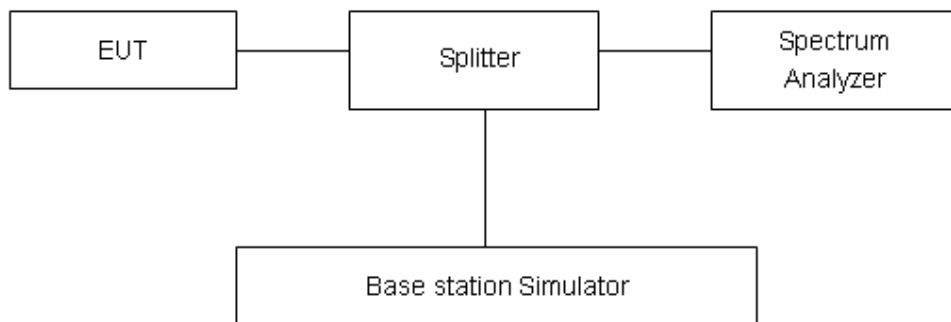

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.



Test Result

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Bandwidth(MHz)	
				99% Power	-26dBc
Band4	1.4MHz	QPSK	20175/1732.5	1.1180	1.345
		16QAM	20175/1732.5	0.93883	1.215
	3MHz	QPSK	20175/1732.5	1.15040	1.655
		16QAM	20175/1732.5	0.98073	1.337
	5MHz	QPSK	20175/1732.5	1.13010	1.472
		16QAM	20175/1732.5	1.0162	1.496
	10MHz	QPSK	20175/1732.5	1.1840	1.796
		16QAM	20175/1732.5	1.0660	1.795
	15MHz	QPSK	20175/1732.5	1.1955	1.894
		16QAM	20175/1732.5	1.0578	1.889
	20MHz	QPSK	20175/1732.5	1.2079	1.782
		16QAM	20175/1732.5	1.1125	1.862

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Bandwidth(MHz)	
				99% Power	-26dBc
Band12	1.4MHz	QPSK	23095/707.5	1.1082	1.332
		16QAM	23095/707.5	0.93878	1.195
	3MHz	QPSK	23095/707.5	1.1525	1.66
		16QAM	23095/707.5	0.98517	1.343
	5MHz	QPSK	23095/707.5	1.1445	1.506
		16QAM	23095/707.5	0.97604	1.423
	10MHz	QPSK	23095/707.5	1.2051	1.738
		16QAM	23095/707.5	1.0835	1.731

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Bandwidth(MHz)	
				99% Power	-26dBc
Band13	5MHz	QPSK	23230/782	1.149	1.481
		16QAM	23230/782	0.97695	1.356
	10MHz	QPSK	23230/782	1.1775	1.721
		16QAM	23230/782	1.0331	1.537



LTE Band 4 QPSK 1.4MHz CH-Middle



LTE Band 4 16QAM 1.4MHz CH-Middle



LTE Band 4 QPSK 3MHz CH-Middle



LTE Band 4 16QAM 3MHz CH-Middle












LTE Band 4 QPSK 5MHz CH-Middle








LTE Band 4 16QAM 5MHz CH-Middle



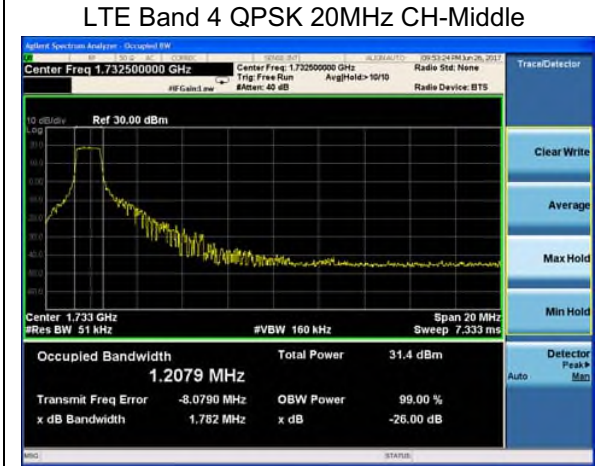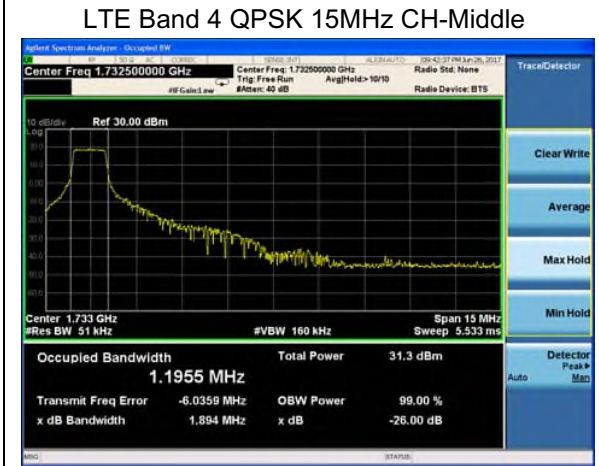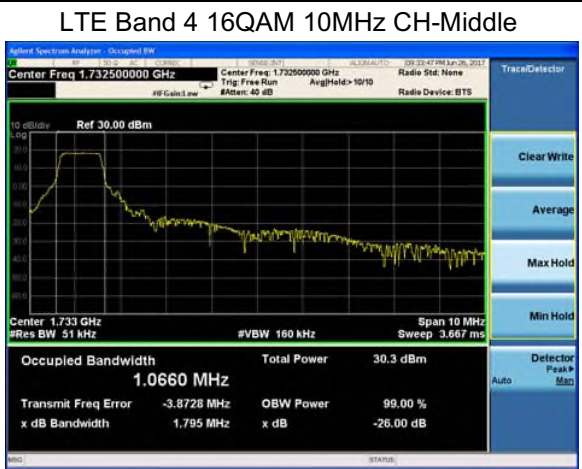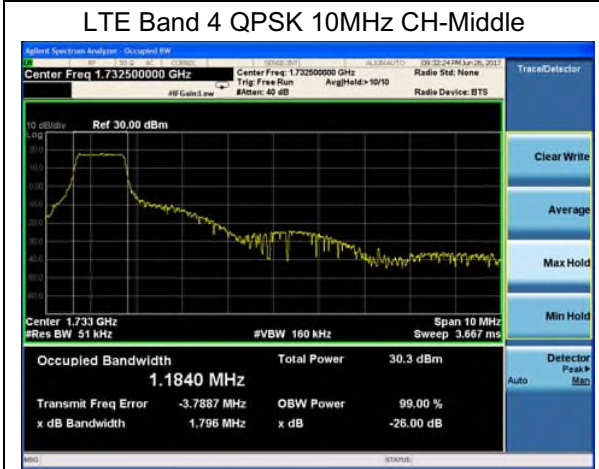

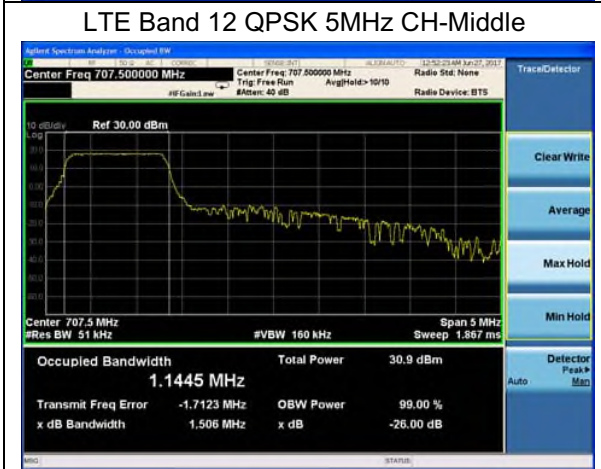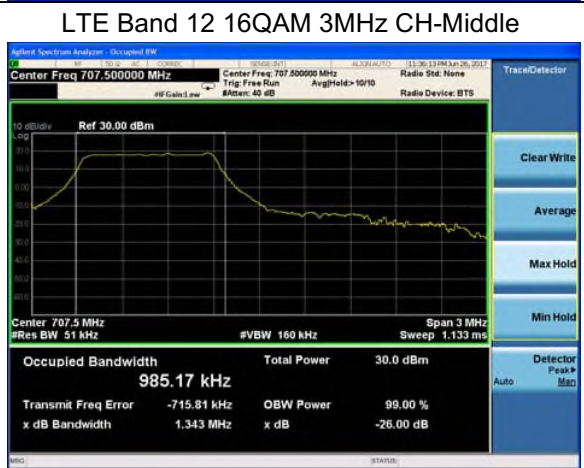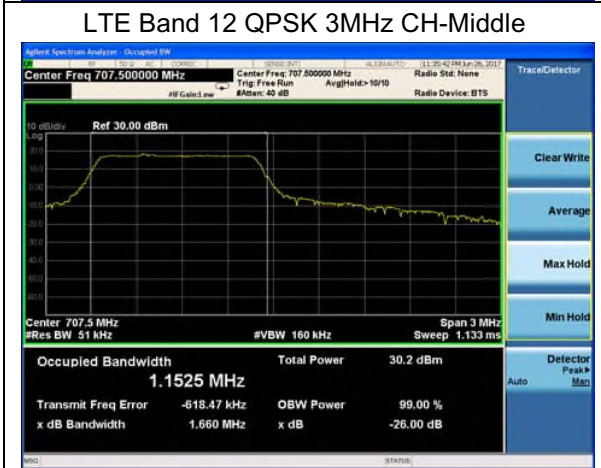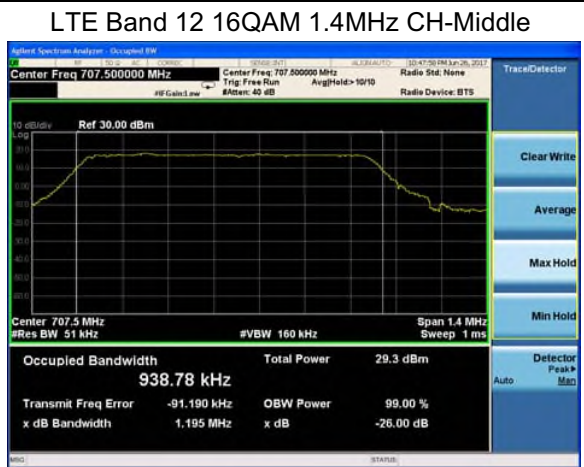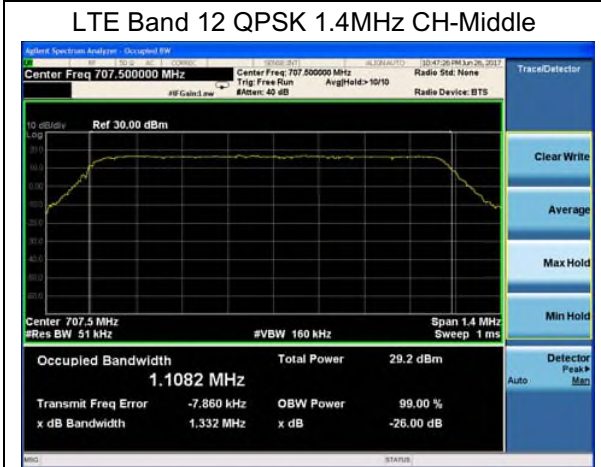

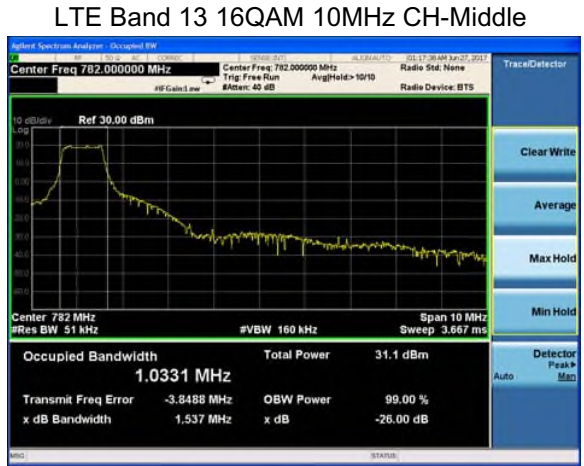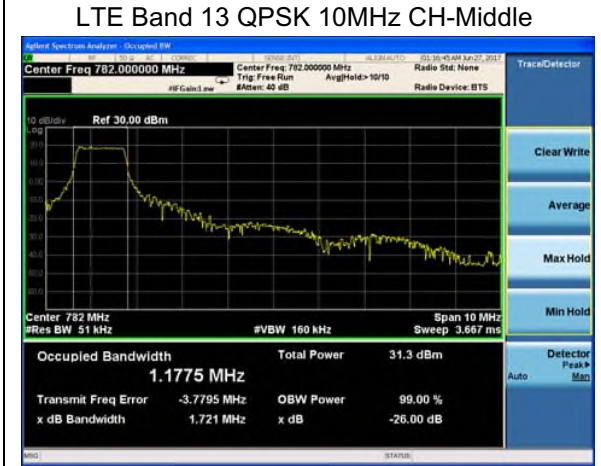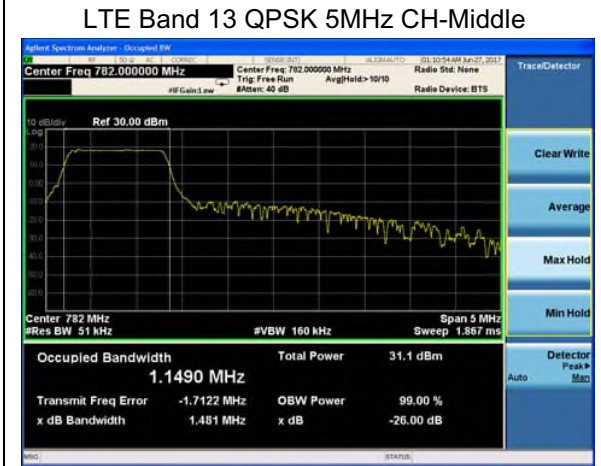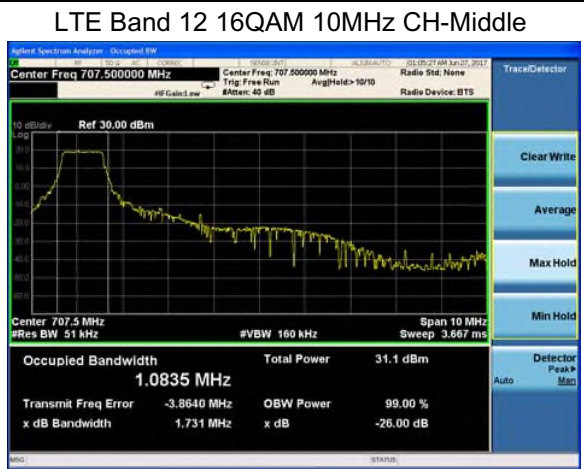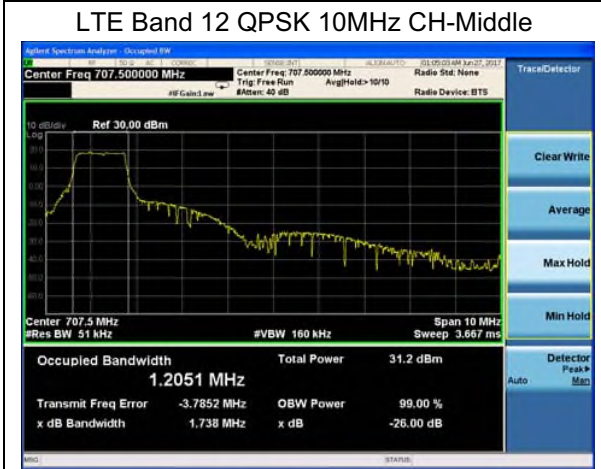

5.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/12.

RBW is set to 200 kHz, VBW is set to 3x RBW for LTE Band 13 (777MHz~788MHz).

RBW is set to 100 kHz, VBW is set to 3x RBW for LTE Band 13 (788MHz~793MHz).


on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

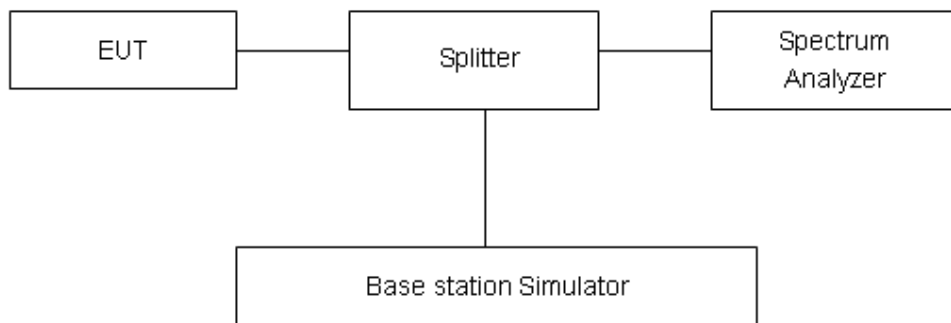

Limits

Rule Part 27.53(h) specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB”

Rule Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(m) (4) specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10 \log(P)]$ (dB)
= $[30 + 10 \log (P)]$ (dBm) - $[43 + 10 \log(P)]$ (dB) = -13dBm.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;



- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log$ (P) dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log$ (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Result

All the test traces in the plots shows the test results clearly.

Variant

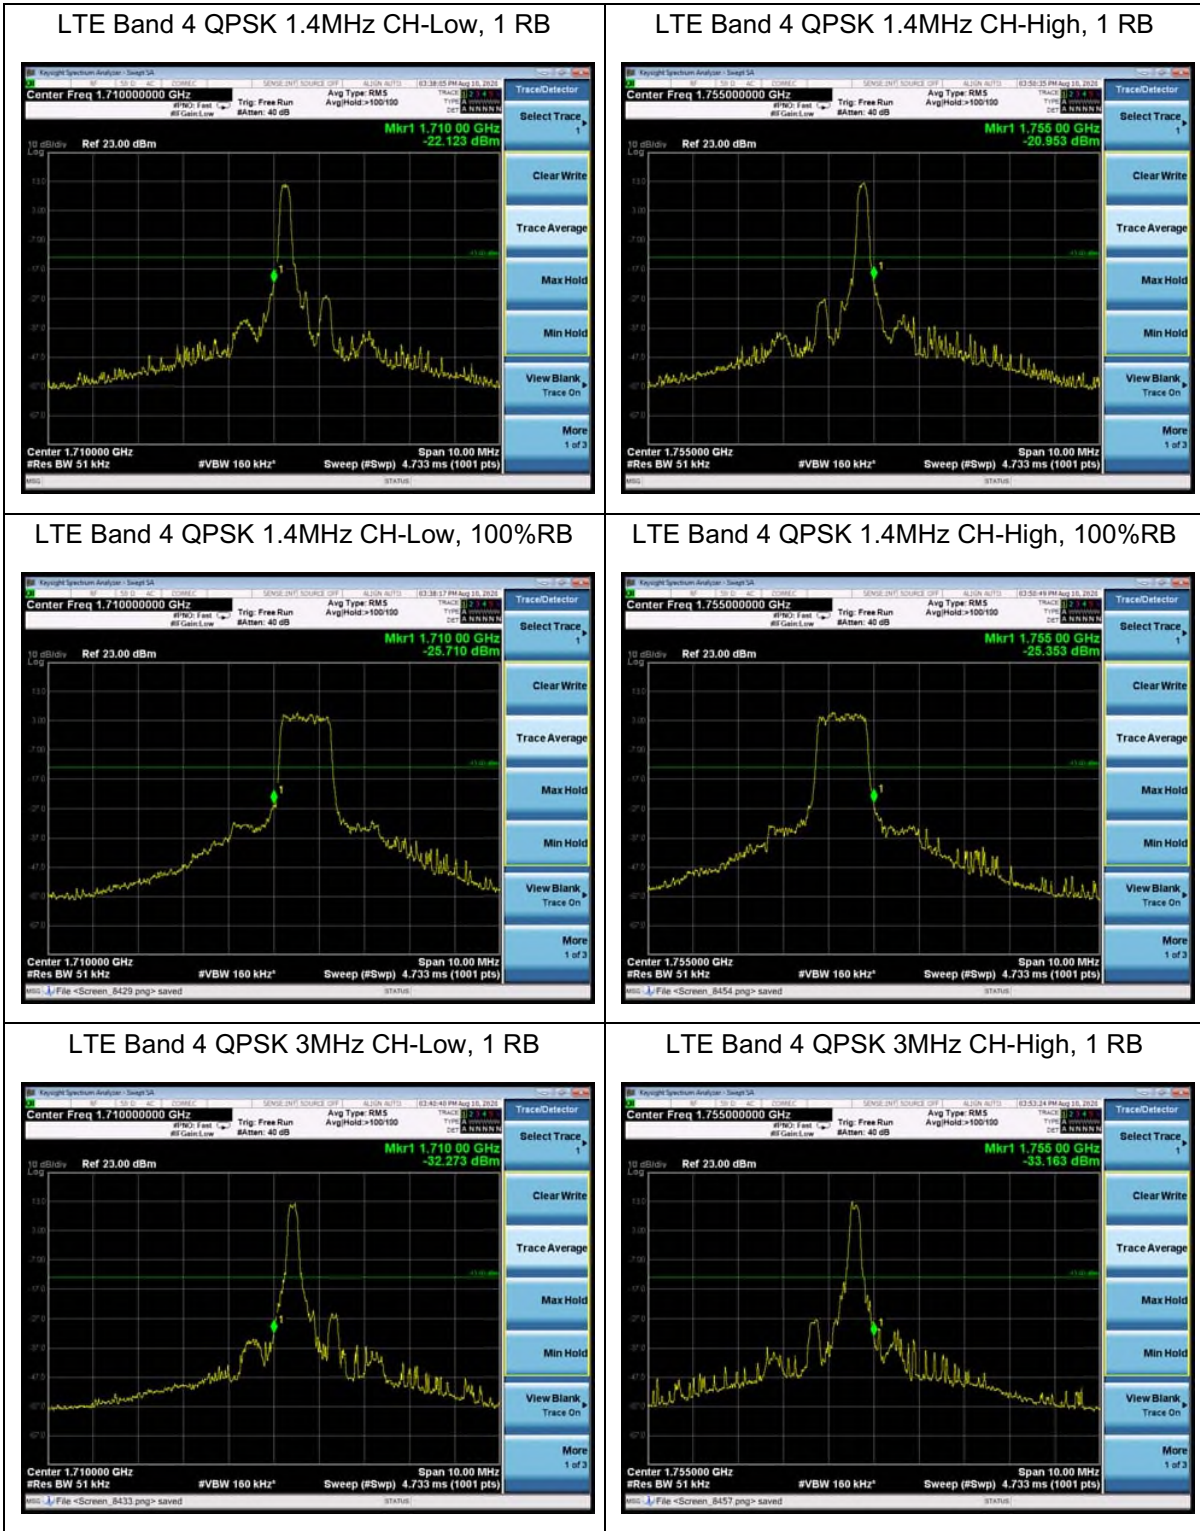




LTE Band 4 QPSK 3MHz CH-Low, 100%RB



LTE Band 4 QPSK 3MHz CH-High, 100%RB

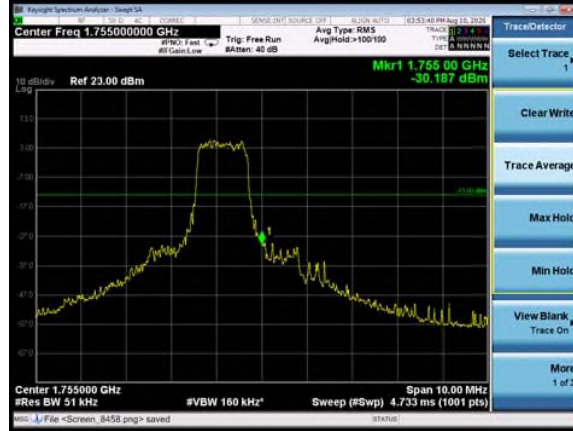

LTE Band 4 QPSK 5MHz CH-Low, 1 RB




LTE Band 4 QPSK 5MHz CH-High, 1 RB




LTE Band 4 QPSK 5MHz CH-Low, 100%RB




LTE Band 4 QPSK 5MHz CH-High, 100%RB

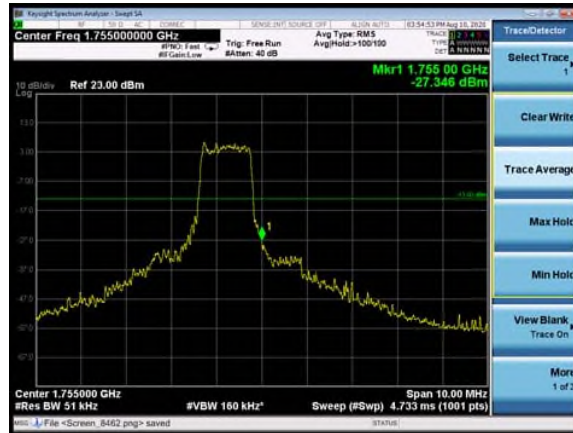


LTE Band 4 QPSK 10MHz CH-Low, 1 RB

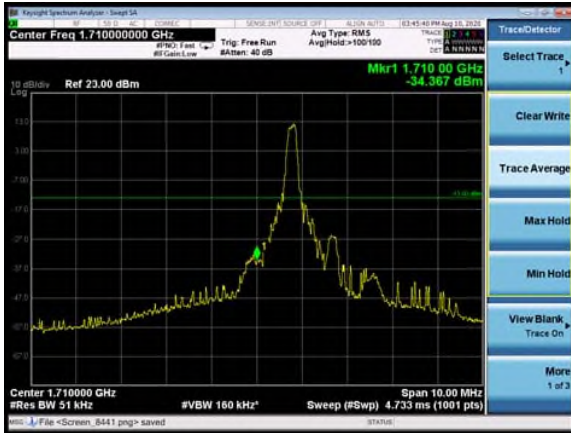


LTE Band 4 QPSK 10MHz CH-High, 1 RB

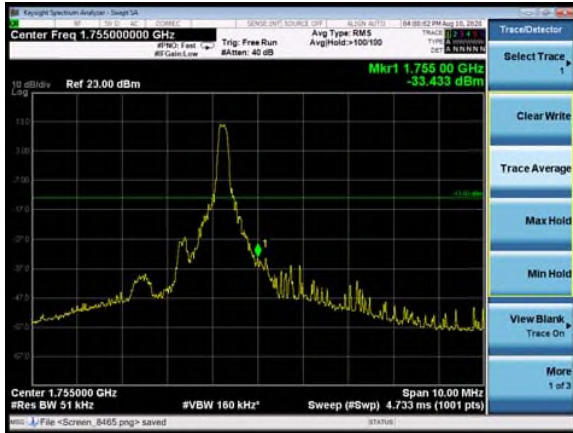


LTE Band 4 QPSK 10MHz CH-Low, 100%RB

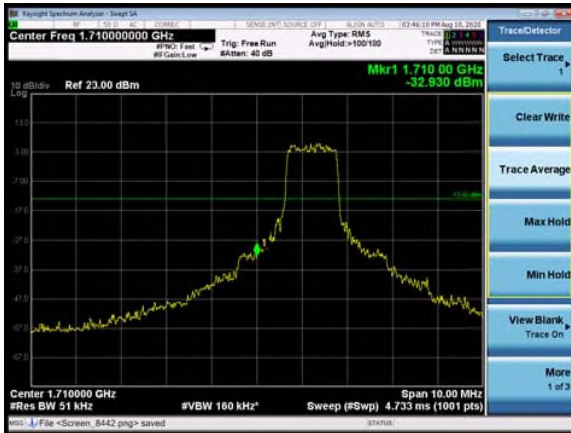

LTE Band 4 QPSK 10MHz CH-High, 100%RB

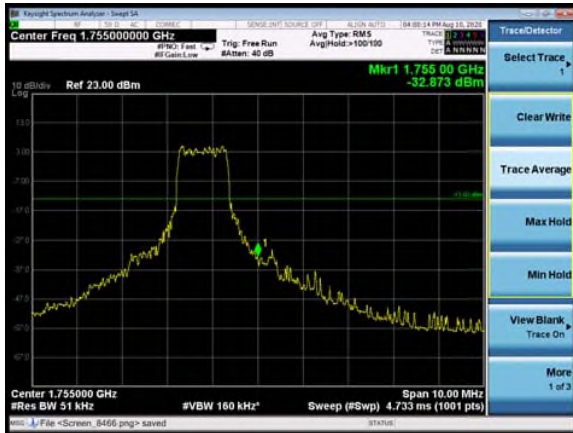


LTE Band 4 QPSK 15MHz CH-Low, 1 RB

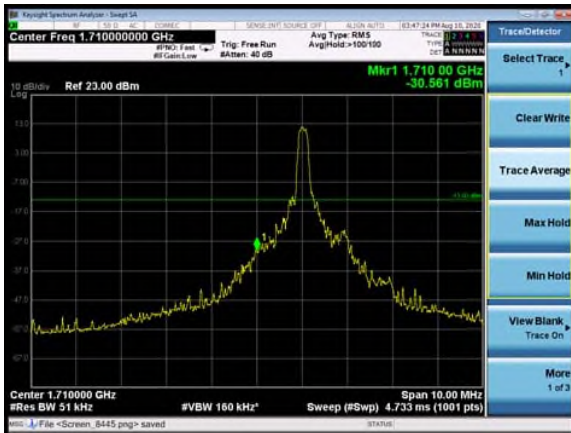


LTE Band 4 QPSK 15MHz CH-High, 1 RB




LTE Band 4 QPSK 15MHz CH-Low, 100%RB

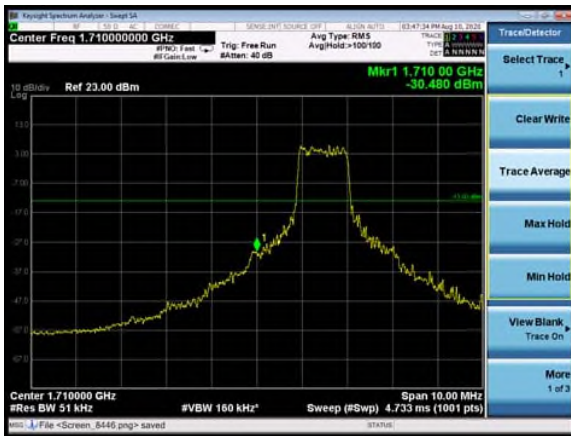


LTE Band 4 QPSK 15MHz CH-High, 100%RB

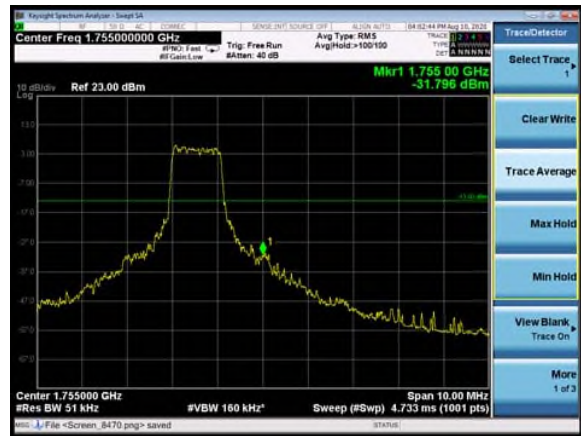


LTE Band 4 QPSK 20MHz CH-Low, 1 RB

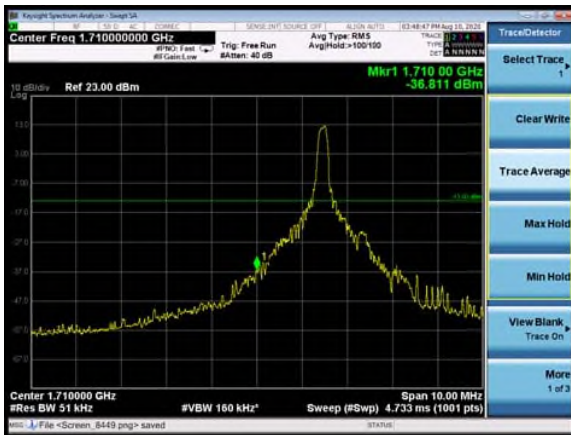


LTE Band 4 QPSK 20MHz CH-High, 1 RB

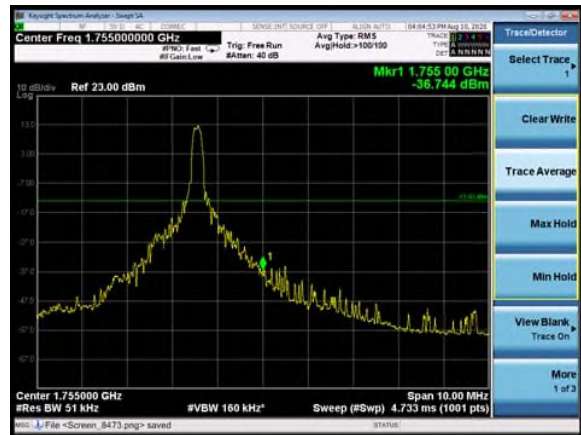


LTE Band 4 QPSK 20MHz CH-Low, 100%RB

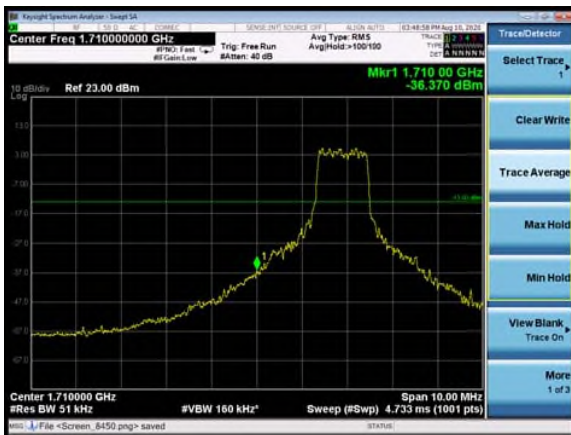

LTE Band 4 QPSK 20MHz CH-High, 100%RB

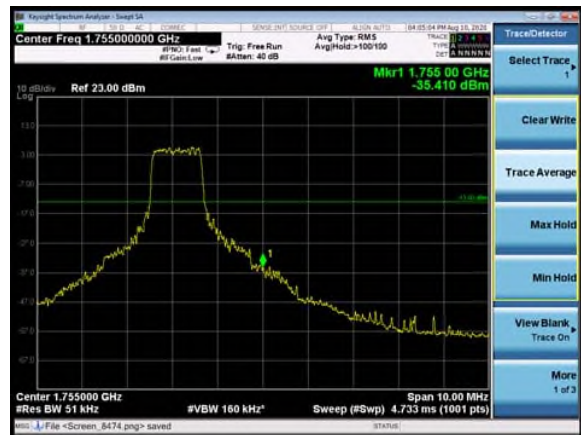


LTE Band 4 16QAM 1.4MHz CH-Low, 1 RB

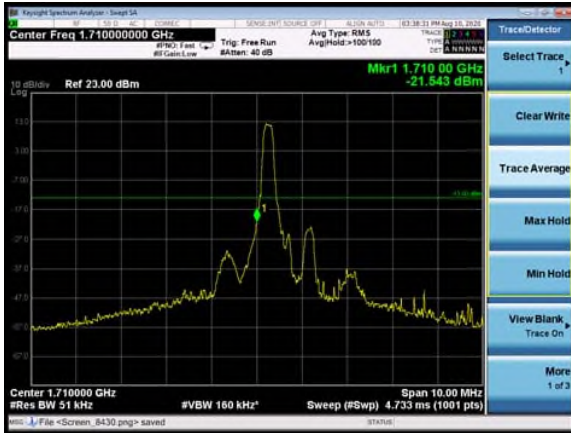


LTE Band 4 16QAM 1.4MHz CH-High, 1 RB




LTE Band 4 16QAM 1.4MHz CH-Low, 100%RB

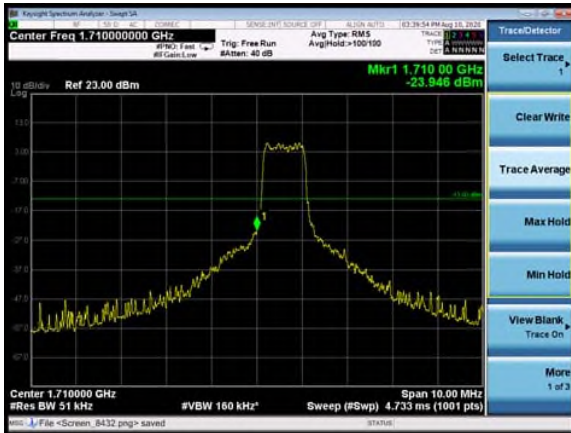

LTE Band 4 16QAM 1.4MHz CH-High, 100%RB

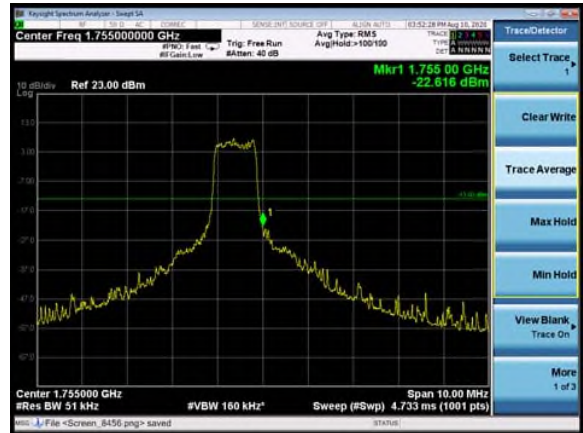


LTE Band 4 16QAM 3MHz CH-Low, 1 RB

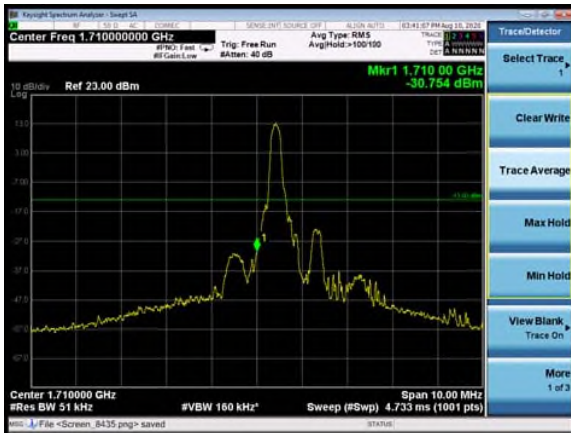


LTE Band 4 16QAM 3MHz CH-High, 1 RB



LTE Band 4 16QAM 3MHz CH-Low, 100%RB

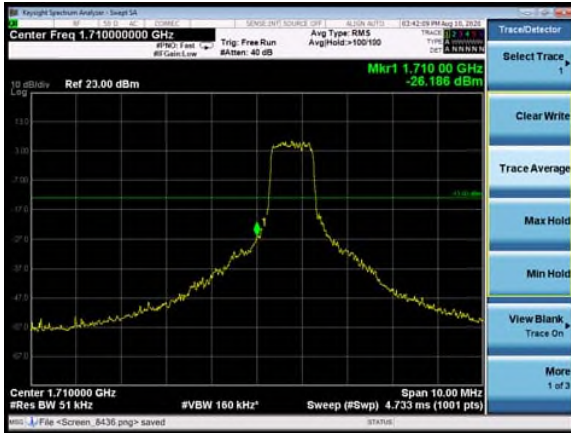


LTE Band 4 16QAM 3MHz CH-High, 100%RB

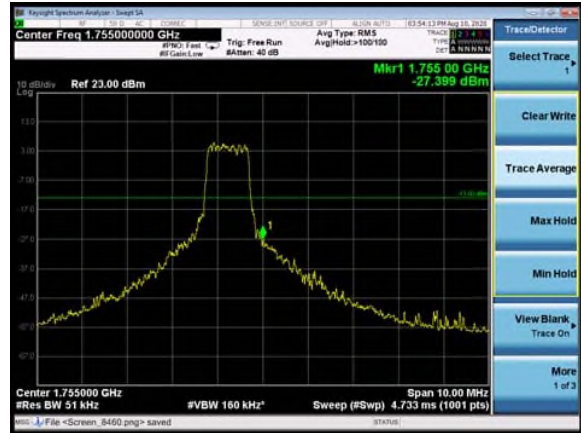

LTE Band 4 16QAM 5MHz CH-Low, 1 RB



LTE Band 4 16QAM 5MHz CH-High, 1 RB

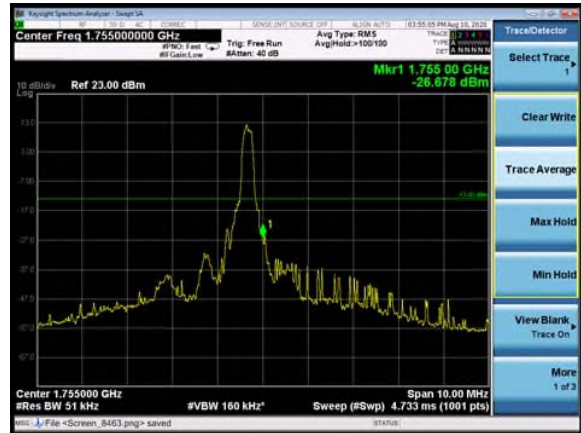


LTE Band 4 16QAM 5MHz CH-Low, 100%RB




LTE Band 4 16QAM 5MHz CH-High, 100%RB



LTE Band 4 16QAM 10MHz CH-Low, 1 RB

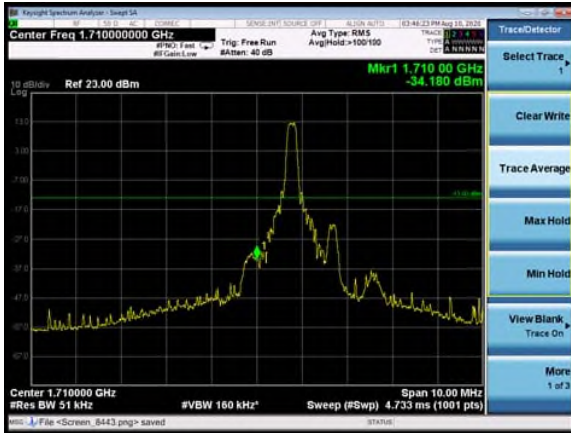


LTE Band 4 16QAM 10MHz CH-High, 1 RB

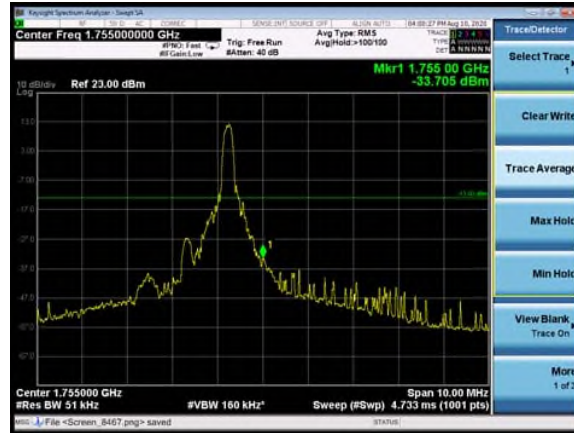


LTE Band 4 16QAM 10MHz CH-Low, 100%RB




LTE Band 4 16QAM 10MHz CH-High, 100%RB

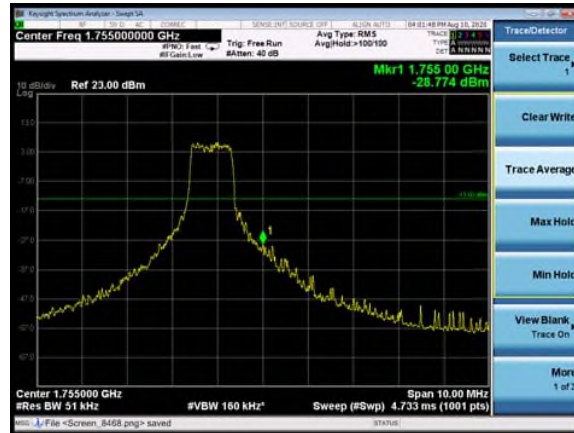


LTE Band 4 16QAM 15MHz CH-Low, 1 RB

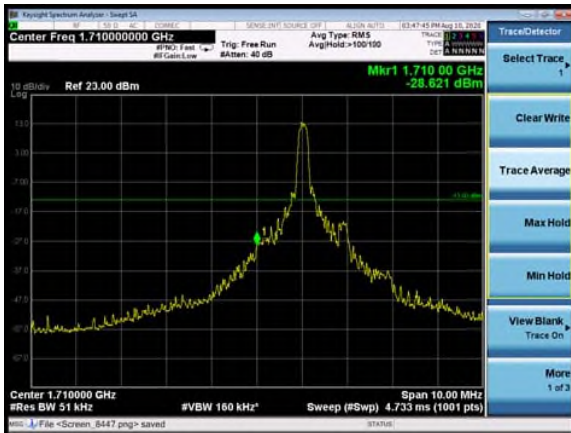


LTE Band 4 16QAM 15MHz CH-High, 1 RB

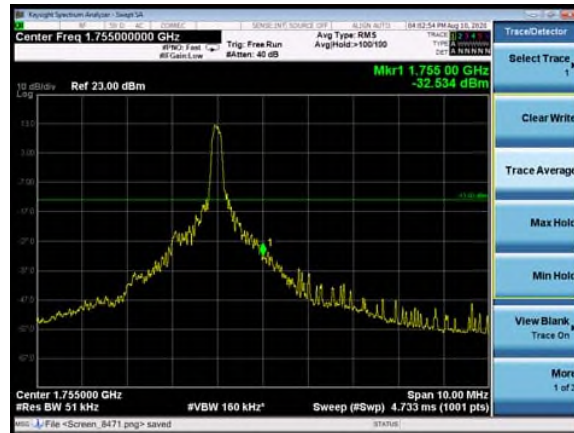


LTE Band 4 16QAM 15MHz CH-Low, 100%RB

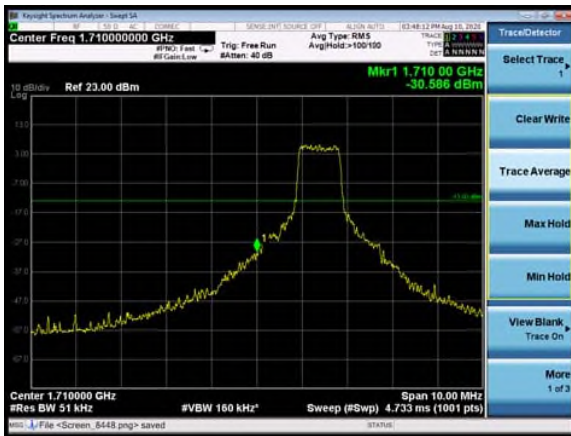


LTE Band 4 16QAM 15MHz CH-High, 100%RB

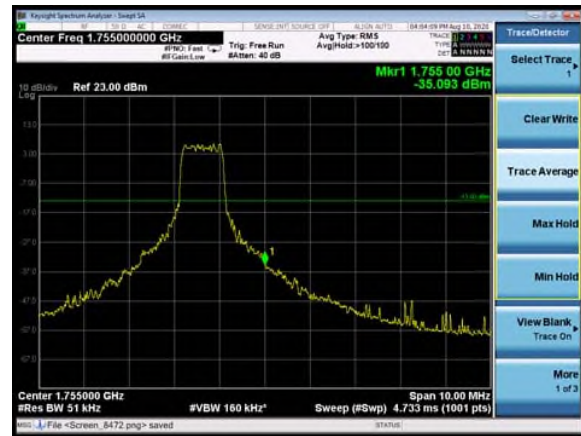


LTE Band 4 16QAM 20MHz CH-Low, 1 RB

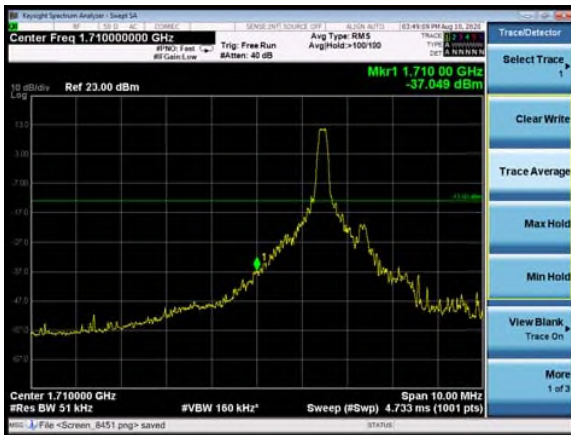


LTE Band 4 16QAM 20MHz CH-High, 1 RB

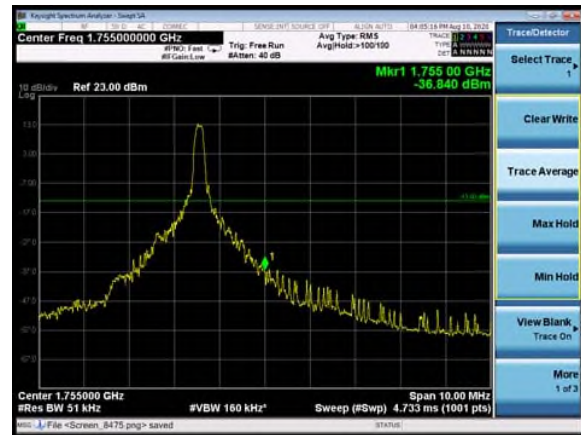


LTE Band 4 16QAM 20MHz CH-Low, 100%RB

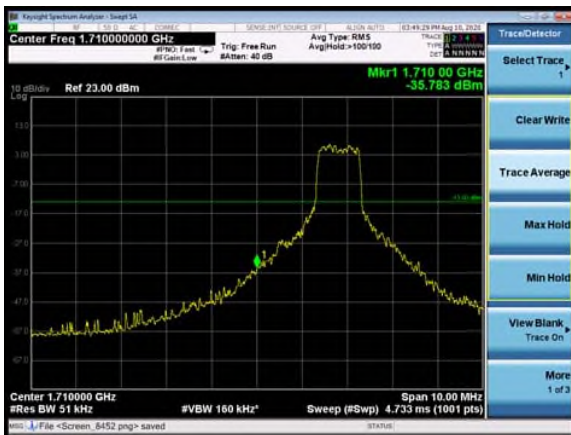


LTE Band 4 16QAM 20MHz CH-High, 100%RB

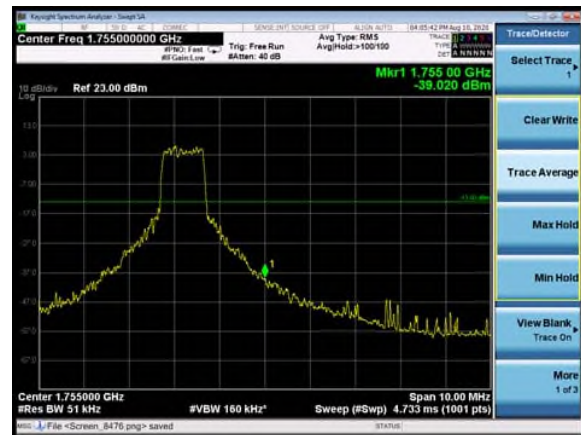


LTE Band 12 QPSK 1.4MHz CH-Low, 1 RB

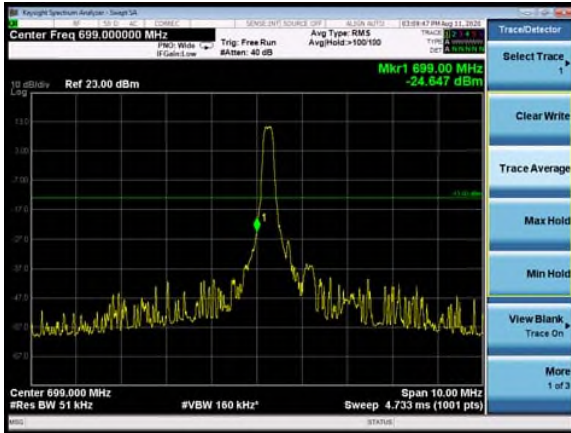


LTE Band 12 QPSK 1.4MHz CH-High, 1 RB

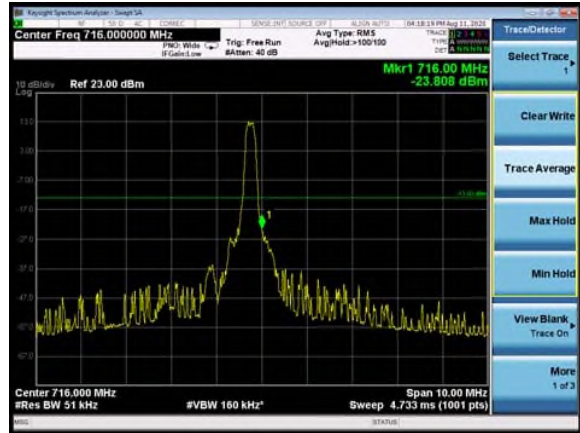


LTE Band 12 QPSK 1.4MHz CH-Low, 100%RB

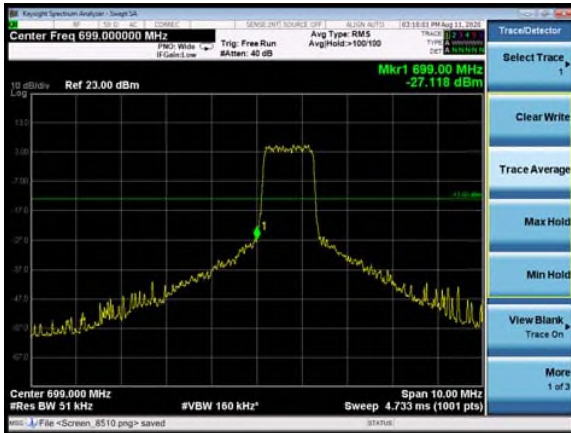


LTE Band 12 QPSK 1.4MHz CH-High, 100%RB

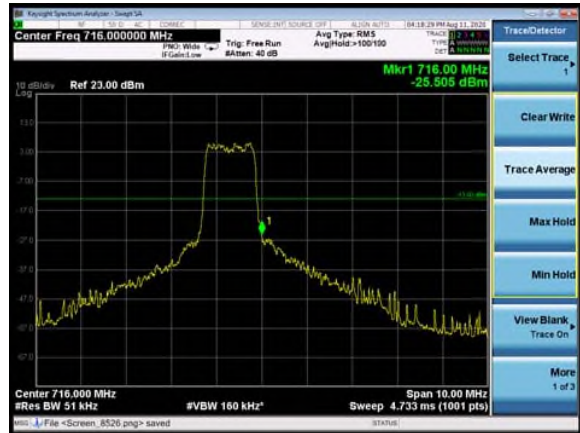


LTE Band 12 QPSK 3MHz CH-Low, 1 RB

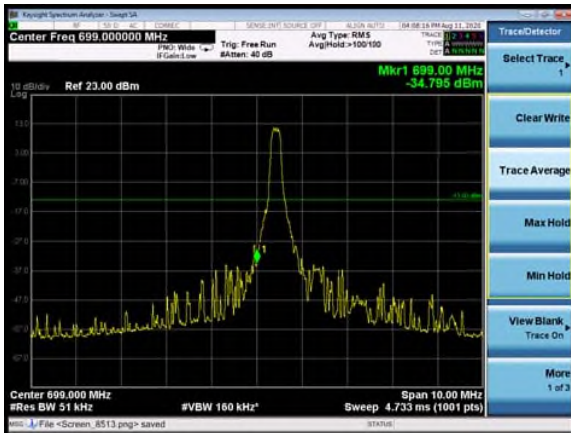


LTE Band 12 QPSK 3MHz CH-High, 1 RB

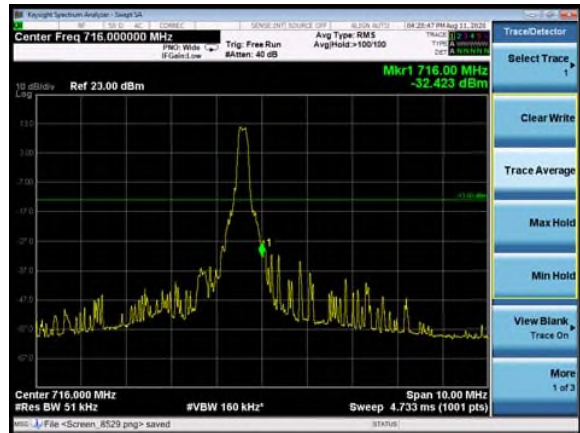


LTE Band 12 QPSK 3MHz CH-Low, 100%RB

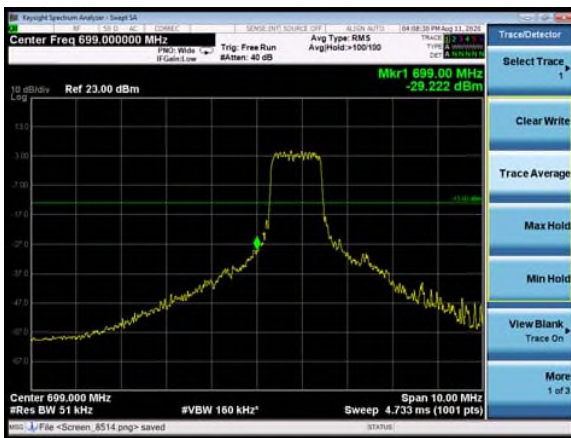


LTE Band 12 QPSK 3MHz CH-High, 100%RB

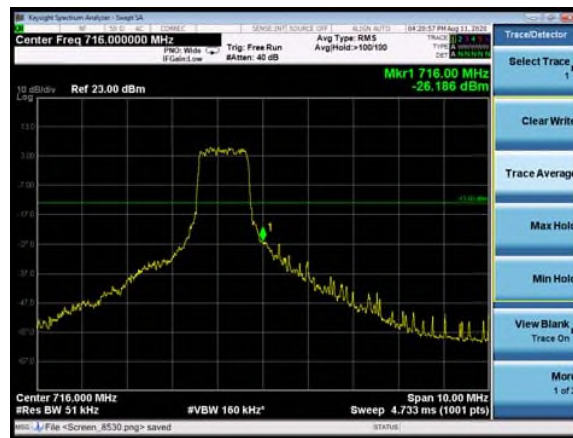


LTE Band 12 QPSK 5MHz CH-Low, 1 RB

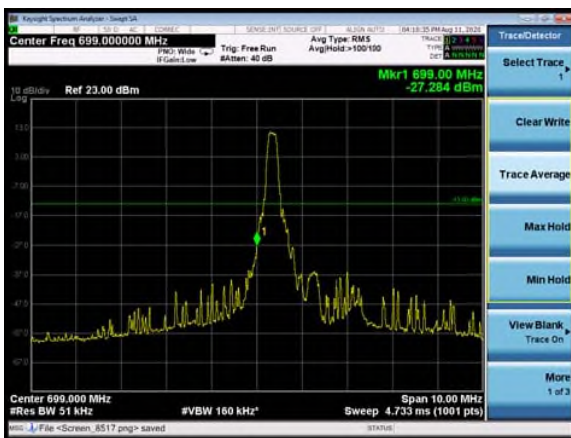


LTE Band 12 QPSK 5MHz CH-High, 1 RB

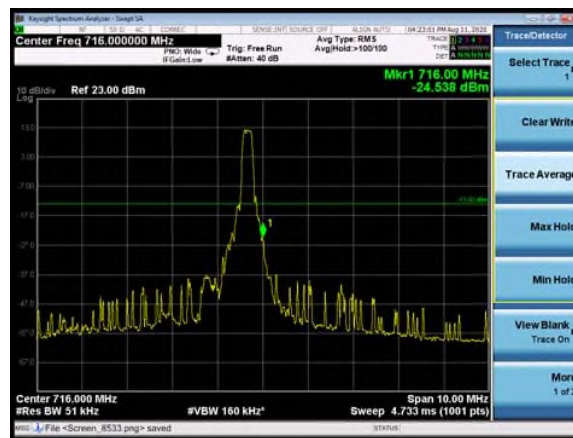


LTE Band 12 QPSK 5MHz CH-Low, 100%RB

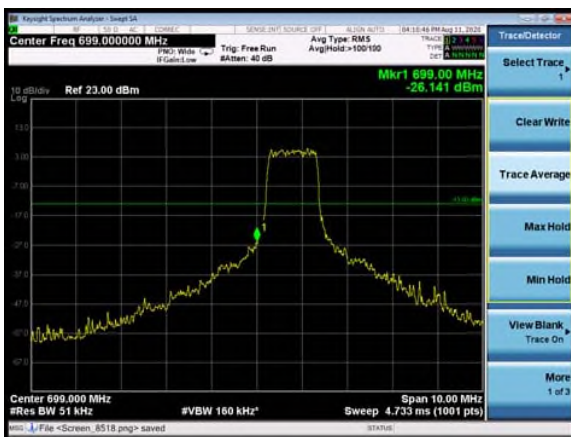


LTE Band 12 QPSK 5MHz CH-High, 100%RB

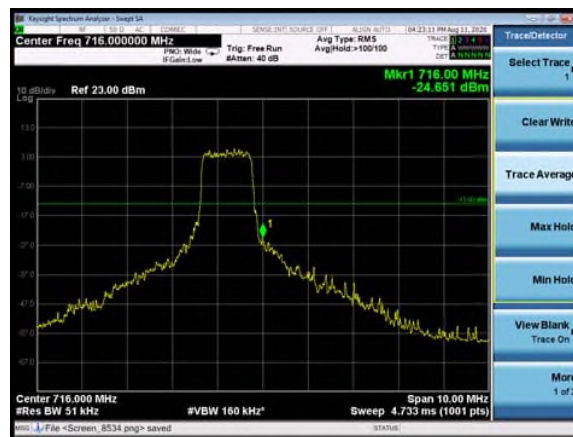


LTE Band 12 QPSK 10MHz CH-Low, 1 RB

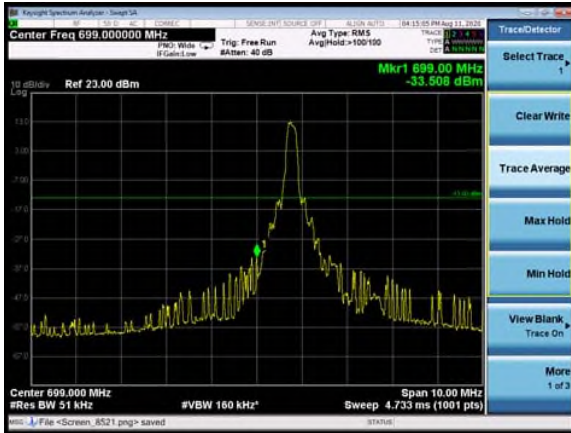


LTE Band 12 QPSK 10MHz CH-High, 1 RB

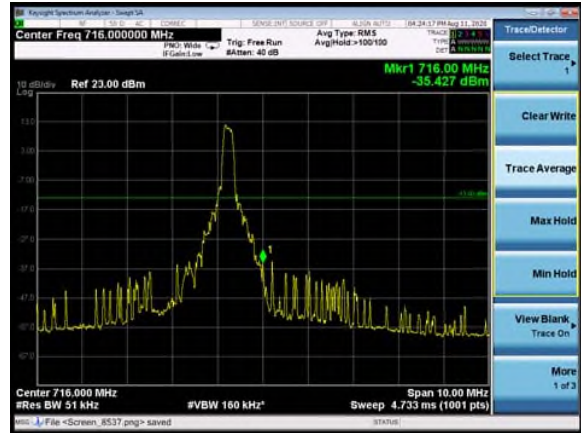


LTE Band 12 QPSK 10MHz CH-Low, 100%RB

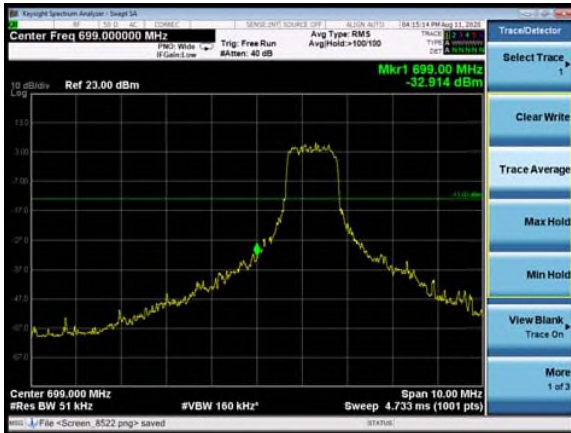

LTE Band 12 QPSK 10MHz CH-High, 100%RB

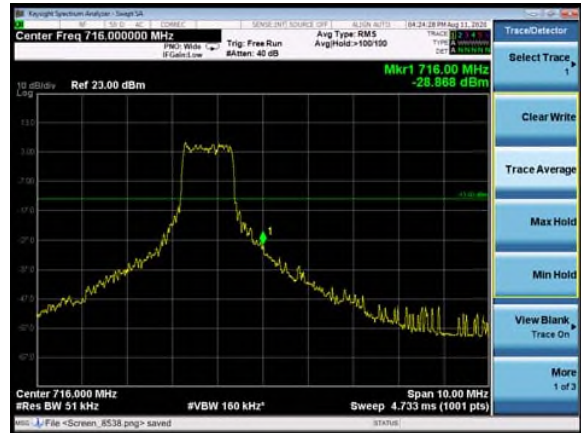


LTE Band 12 16QAM 1.4MHz CH-Low, 1 RB

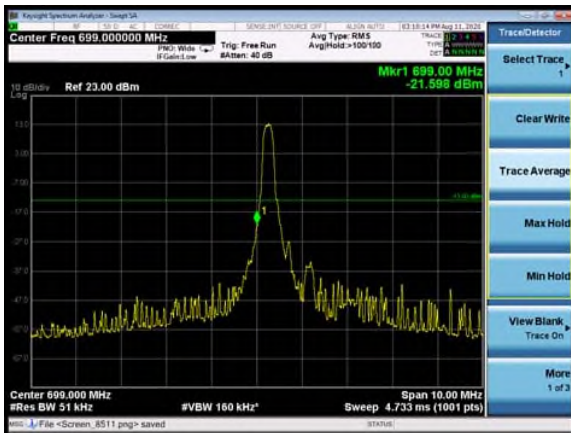


LTE Band 12 16QAM 1.4MHz CH-High, 1 RB




LTE Band 12 16QAM 1.4MHz CH-Low, 100%RB

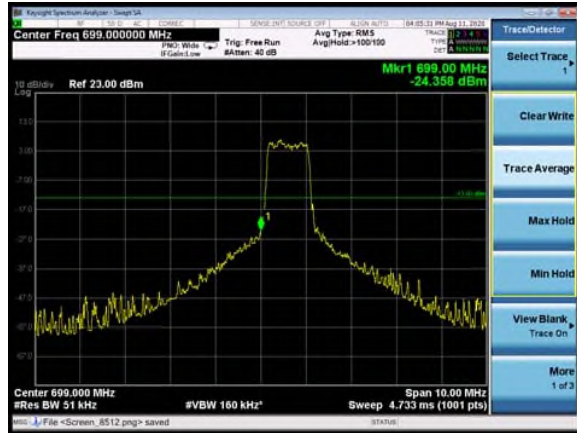


LTE Band 12 16QAM 1.4MHz CH-High, 100%RB

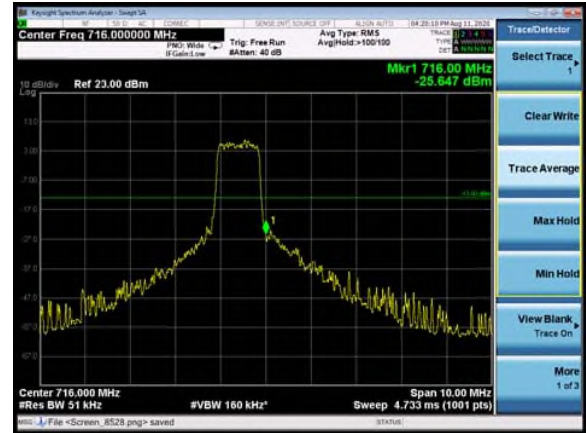


LTE Band 12 16QAM 3MHz CH-Low, 1 RB

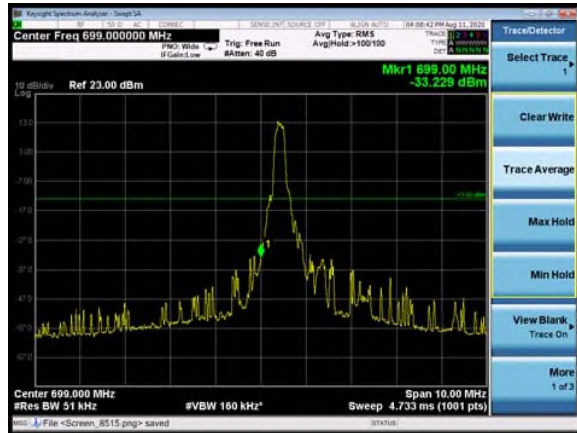


LTE Band 12 16QAM 3MHz CH-High, 1 RB

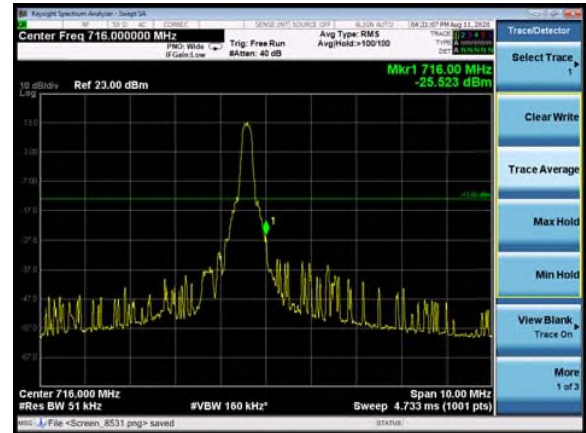


LTE Band 12 16QAM 3MHz CH-Low, 100%RB

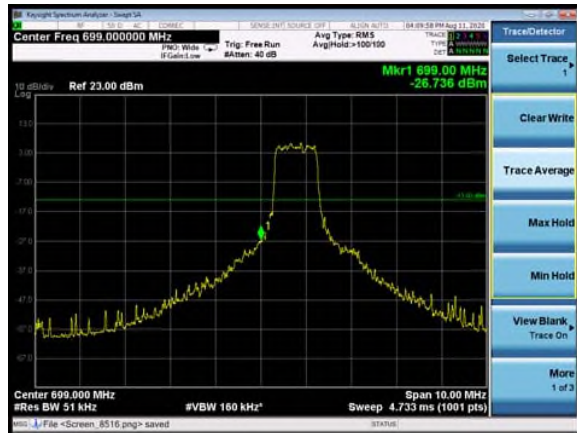


LTE Band 12 16QAM 3MHz CH-High, 100%RB

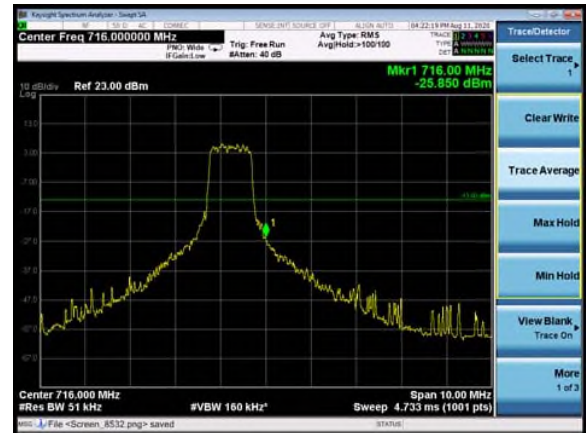


LTE Band 12 16QAM 5MHz CH-Low, 1 RB

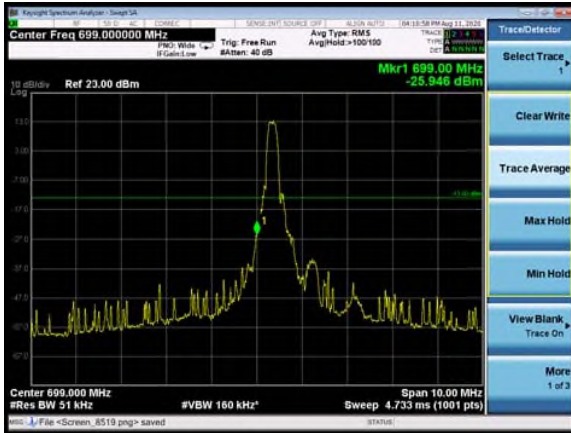


LTE Band 12 16QAM 5MHz CH-High, 1 RB

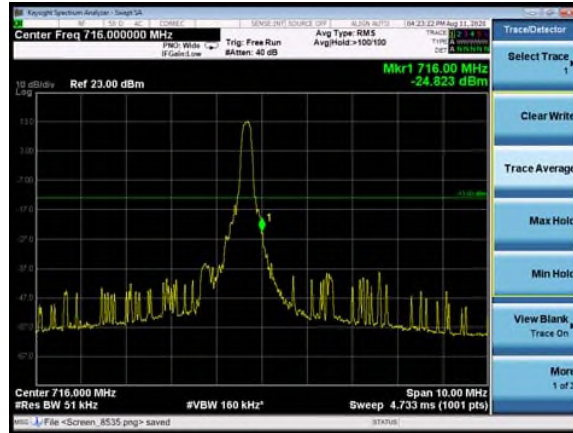


LTE Band 12 16QAM 5MHz CH-Low, 100%RB

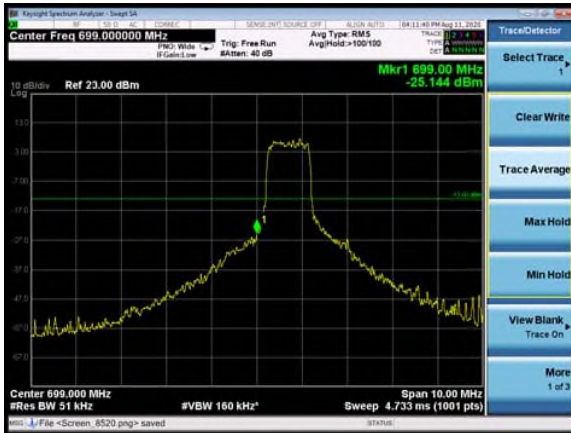


LTE Band 12 16QAM 5MHz CH-High, 100%RB

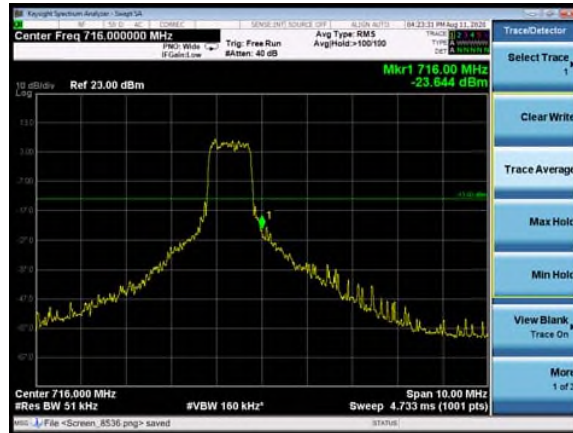

LTE Band 12 16QAM 10MHz CH-Low, 1 RB

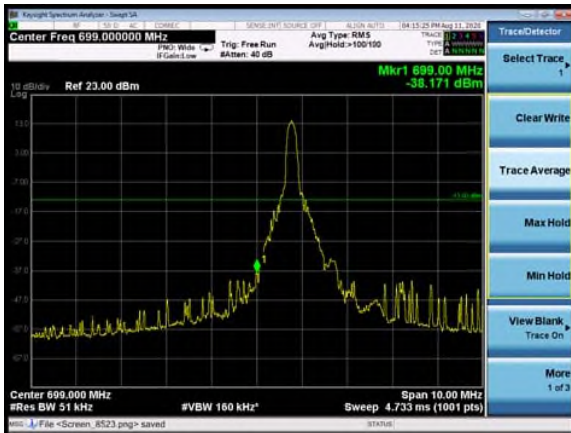


LTE Band 12 16QAM 10MHz CH-High, 1 RB

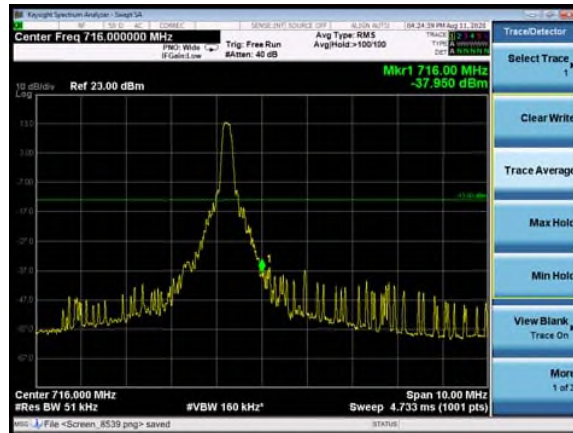




LTE Band 12 16QAM 10MHz CH-Low, 100%RB

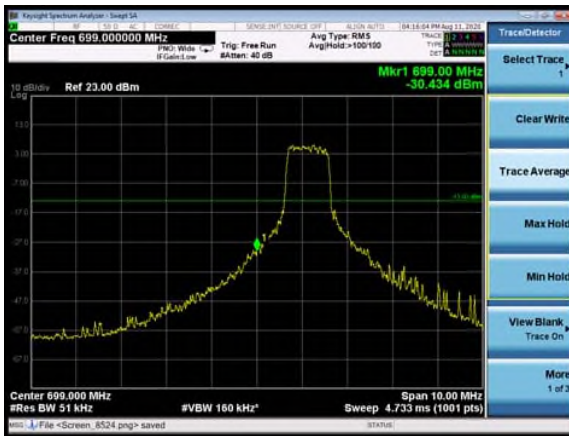


LTE Band 12 16QAM 10MHz CH-High, 100%RB

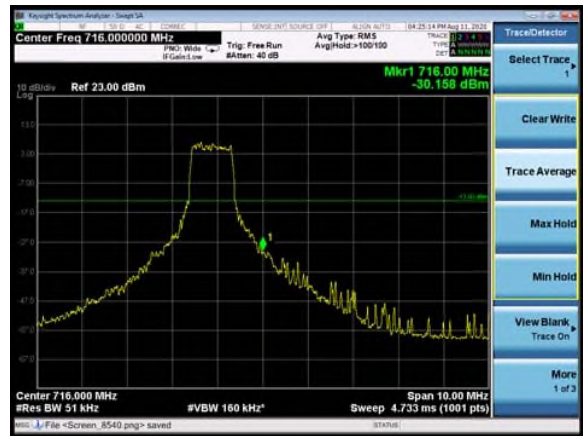

LTE Band 13 QPSK 5MHz CH-Low, 1 RB




LTE Band 13 QPSK 5MHz CH-High, 1 RB

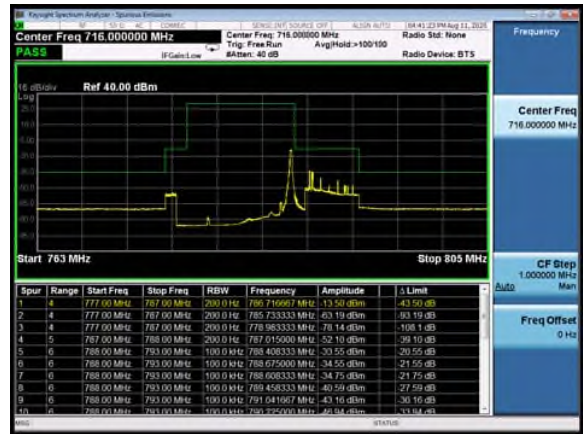

LTE Band 13 QPSK 5MHz CH-Low, 100%RB




LTE Band 13 QPSK 5MHz CH-High, 100%RB

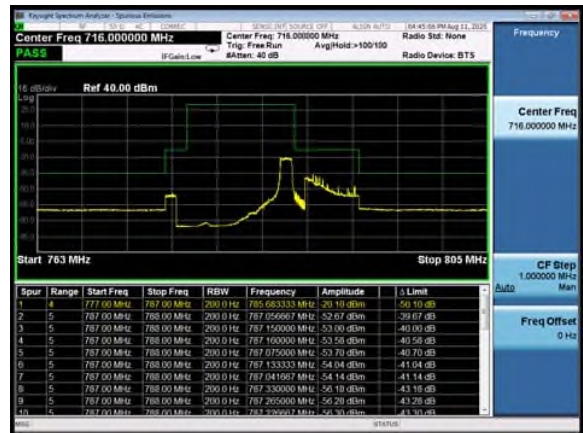




LTE Band 13 QPSK 10MHz CH-Low, 1 RB

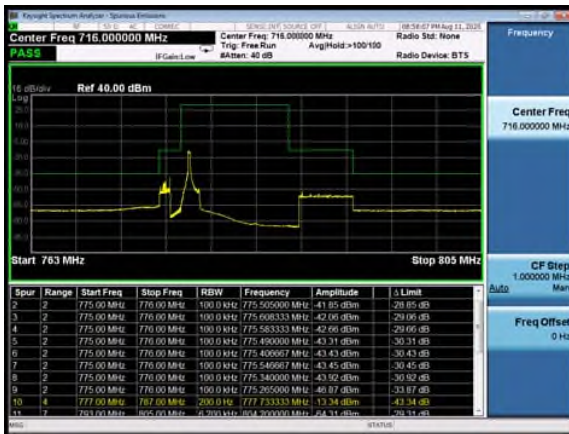


LTE Band 13 QPSK 10MHz CH-High, 1 RB

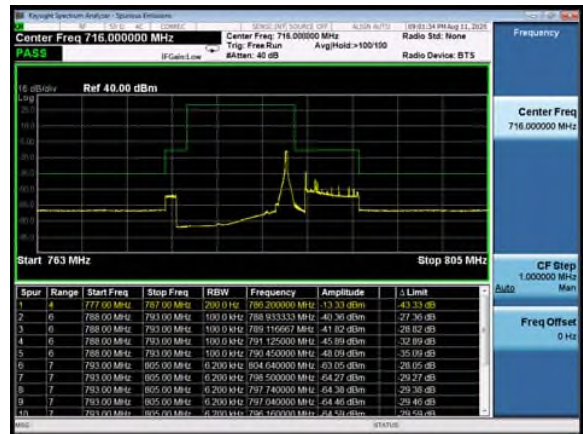

LTE Band 13 QPSK 10MHz CH-Low, 100%RB




LTE Band 13 QPSK 10MHz CH-High, 100%RB

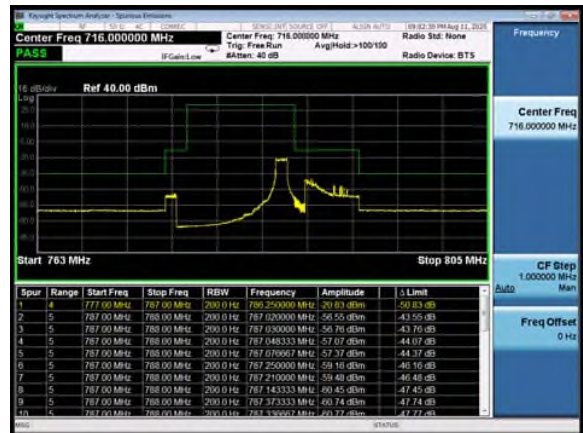

LTE Band 13 16QAM 5MHz CH-Low, 1RB



LTE Band 13 16QAM 5MHz CH-High, 1RB

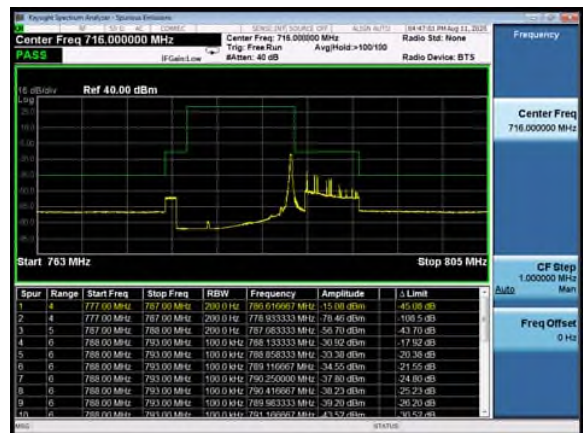




LTE Band 13 16QAM 5MHz CH- Low, 100%RB




LTE Band 13 16QAM 5MHz CH-High, 100%RB

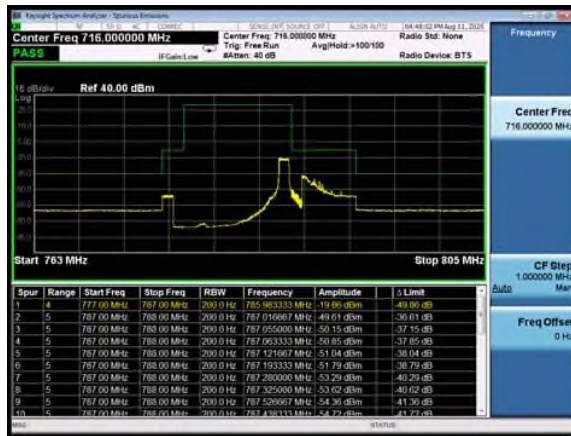

LTE Band 13 16QAM 10MHz CH-Low, 1RB



LTE Band 13 16QAM 10MHz CH-High, 1RB

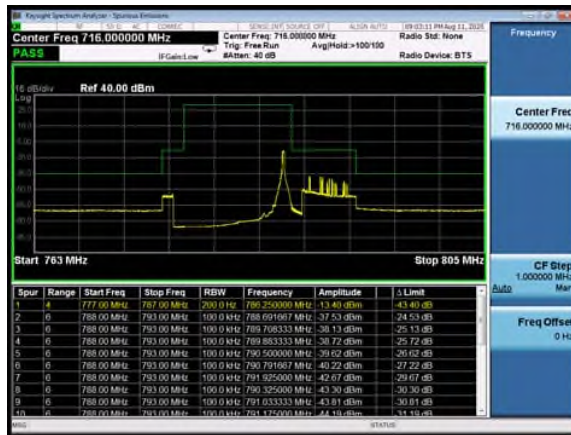

LTE Band 13 16QAM 10MHz CH- Low, 100%RB



LTE Band 13 16QAM 10MHz CH-High, 100%RB



5.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPK. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}$$

Test Setup

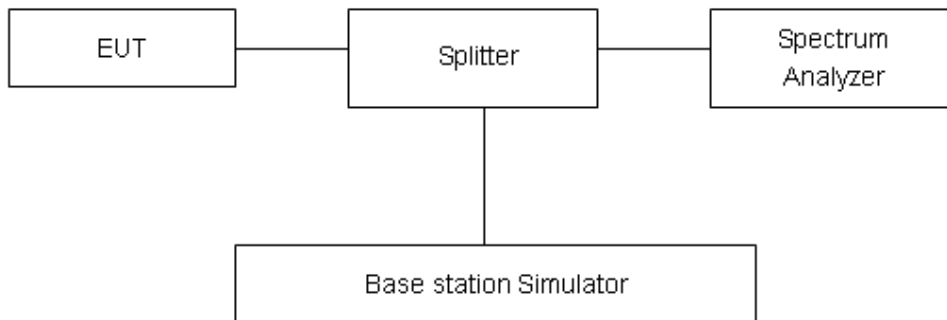

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE Band 4	1.4MHz	QPSK	20175/1732.5	33.37	22.09	11.28	≤13	PASS
		16QAM	20175/1732.5	34.13	22.03	12.10	≤13	PASS
	3MHz	QPSK	20175/1732.5	33.56	22.13	11.43	≤13	PASS
		16QAM	20175/1732.5	33.94	22.07	11.87	≤13	PASS
	5MHz	QPSK	20175/1732.5	32.06	22.12	9.94	≤13	PASS
		16QAM	20175/1732.5	32.62	22.03	10.59	≤13	PASS
	10MHz	QPSK	20175/1732.5	31.69	22.14	9.55	≤13	PASS
		16QAM	20175/1732.5	32.14	22.08	10.06	≤13	PASS
	15MHz	QPSK	20175/1732.5	30.77	22.10	8.67	≤13	PASS
		16QAM	20175/1732.5	30.68	22.03	8.65	≤13	PASS
20MHz	QPSK	20175/1732.5	30.92	22.05	8.87	≤13	PASS	
	16QAM	20175/1732.5	31.17	21.99	9.18	≤13	PASS	

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE Band1 2	1.4MHz	QPSK	23095/707.5	32.63	22.66	9.97	≤13	PASS
		16QAM	23095/707.5	34.21	22.90	11.31	≤13	PASS
	3MHz	QPSK	23095/707.5	32.56	22.68	9.88	≤13	PASS
		16QAM	23095/707.5	33.51	22.95	10.56	≤13	PASS
	5MHz	QPSK	23095/707.5	32.27	22.64	9.63	≤13	PASS
		16QAM	23095/707.5	33.75	22.90	10.85	≤13	PASS
	10MHz	QPSK	23095/707.5	31.88	22.59	9.29	≤13	PASS
		16QAM	23095/707.5	32.03	22.86	9.17	≤13	PASS

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE Band13	5MHz	QPSK	23230/782	32.64	22.68	9.96	≤13	PASS
		16QAM	23230/782	32.23	22.19	10.04	≤13	PASS
	10MHz	QPSK	23230/782	32.46	22.77	9.69	≤13	PASS
		16QAM	23230/782	32.68	22.95	9.73	≤13	PASS

5.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size.

(1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2)Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 Vand 4.3 V, with a nominal voltage of 3.8V.

Test setup

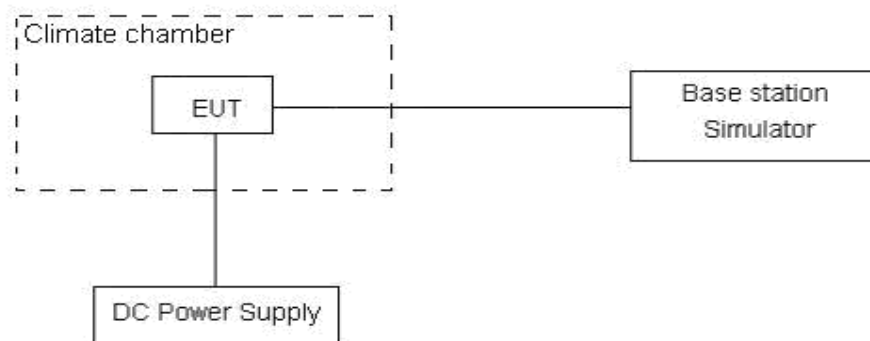

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.



Test Result

Bandwidth	Test status	LTE Band 4 Channel 20175 Test Results (ppm)	
		QPSK	16QAM
1.4MHz	-40°C/Normal Voltage	-0.00444	-0.01766
	-30°C/Normal Voltage	-0.00386	-0.01513
	-20°C/Normal Voltage	-0.00514	-0.02027
	-10°C/Normal Voltage	-0.00174	-0.01773
	0°C/Normal Voltage	-0.00164	-0.01986
	10°C/Normal Voltage	-0.00239	-0.00601
	20°C/Normal Voltage	0.00020	-0.00454
	30°C/Normal Voltage	-0.00166	-0.00570
	40°C/Normal Voltage	-0.00035	-0.00673
	50°C/Normal Voltage	0.00115	-0.01853
	60°C/Normal Voltage	-0.00061	-0.00405
	70°C/Normal Voltage	-0.00411	-0.01242
	80°C/Normal Voltage	-0.00212	-0.02252
	85°C/Normal Voltage	-0.00124	-0.00496
	20°C/Min Voltage	-0.00300	-0.00576
	20°C/Max Voltage	-0.00315	-0.00454
3MHz	-40°C/Normal Voltage	-0.00127	-0.00275
	-30°C/Normal Voltage	-0.00184	-0.00448
	-20°C/Normal Voltage	0.00117	0.01527
	-10°C/Normal Voltage	0.00008	0.01465
	0°C/Normal Voltage	-0.00119	-0.00583
	10°C/Normal Voltage	-0.00255	-0.01694
	20°C/Normal Voltage	-0.00071	-0.00506
	30°C/Normal Voltage	-0.00063	-0.00412
	40°C/Normal Voltage	-0.00178	-0.00533
	50°C/Normal Voltage	-0.00078	-0.00294
	60°C/Normal Voltage	-0.00163	-0.01732
	70°C/Normal Voltage	-0.00091	0.01451
	80°C/Normal Voltage	-0.00111	-0.00443
	85°C/Normal Voltage	0.00137	-0.00253
	20°C/Min Voltage	0.00068	-0.00301
	20°C/Max Voltage	-0.00234	-0.00293
5MHz	-40°C/Normal Voltage	0.00119	-0.00739
	-30°C/Normal Voltage	0.00248	-0.00478
	-20°C/Normal Voltage	0.00018	-0.00477
	-10°C/Normal Voltage	-0.00357	0.00540



	0°C/Normal Voltage	0.00002	-0.00554
	10°C/Normal Voltage	0.00259	-0.00377
	20°C/Normal Voltage	-0.00129	-0.00622
	30°C/Normal Voltage	-0.00012	-0.00676
	40°C/Normal Voltage	0.00036	0.00380
	50°C/Normal Voltage	-0.00119	-0.00579
	60°C/Normal Voltage	-0.00008	-0.00890
	70°C/Normal Voltage	-0.00115	-0.00618
	80°C/Normal Voltage	-0.00023	-0.00478
	85°C/Normal Voltage	-0.00179	-0.00302
	20°C/Min Voltage	-0.00188	0.00584
	20°C/Max Voltage	-0.00266	0.00141
10MHz	-40°C/Normal Voltage	0.00069	0.00372
	-30°C/Normal Voltage	0.00066	0.00297
	-20°C/Normal Voltage	-0.00119	0.01093
	-10°C/Normal Voltage	-0.00178	0.00982
	0°C/Normal Voltage	0.00127	0.00394
	10°C/Normal Voltage	0.00330	0.00301
	20°C/Normal Voltage	0.00152	0.01114
	30°C/Normal Voltage	0.00156	0.00070
	40°C/Normal Voltage	0.00224	0.01124
	50°C/Normal Voltage	0.00122	0.00386
	60°C/Normal Voltage	-0.00124	0.00870
	70°C/Normal Voltage	-0.00087	0.01063
	80°C/Normal Voltage	-0.00141	0.00606
	85°C/Normal Voltage	-0.00106	0.00305
	20°C/Min Voltage	-0.00190	0.00424
	20°C/Max Voltage	-0.00160	0.01408
15MHz	-40°C/Normal Voltage	0.00057	-0.00057
	-30°C/Normal Voltage	-0.00003	0.00023
	-20°C/Normal Voltage	0.00023	0.00077
	-10°C/Normal Voltage	-0.00110	-0.00147
	0°C/Normal Voltage	0.00182	-0.00067
	10°C/Normal Voltage	-0.00091	0.00086
	20°C/Normal Voltage	0.00169	-0.00042
	30°C/Normal Voltage	0.00042	-0.00301
	40°C/Normal Voltage	-0.00143	-0.00330
	50°C/Normal Voltage	0.00126	-0.00059
	60°C/Normal Voltage	0.00121	-0.00017
	70°C/Normal Voltage	-0.00056	-0.00046



	80°C/Normal Voltage	0.00105	0.00106
	85°C/Normal Voltage	0.00025	-0.00055
	20°C/Min Voltage	-0.00002	-0.00061
	20°C/Max Voltage	0.00123	-0.00216
20MHz	-40°C/Normal Voltage	-0.00081	-0.02835
	-30°C/Normal Voltage	-0.00053	-0.02789
	-20°C/Normal Voltage	-0.00130	-0.02891
	-10°C/Normal Voltage	0.00002	-0.02948
	0°C/Normal Voltage	-0.00100	-0.02863
	10°C/Normal Voltage	0.00290	-0.02879
	20°C/Normal Voltage	-0.00079	-0.02917
	30°C/Normal Voltage	-0.00088	-0.03142
	40°C/Normal Voltage	-0.00241	-0.03015
	50°C/Normal Voltage	0.00066	-0.02809
	60°C/Normal Voltage	0.00032	-0.02992
	70°C/Normal Voltage	-0.00111	-0.02986
	80°C/Normal Voltage	0.00077	-0.02887
	85°C/Normal Voltage	-0.00151	-0.03063
	20°C/Min Voltage	-0.00136	-0.02918
	20°C/Max Voltage	0.00297	-0.02678



Bandwidth	Test status	LTE Band 12Channel 23095 Test Results (ppm)	
		QPSK	16QAM
1.4M	-40°C/Normal Voltage	-0.00582	-0.00338
	-30°C/Normal Voltage	-0.00315	-0.01134
	-20°C/Normal Voltage	-0.00743	-0.00290
	-10°C/Normal Voltage	-0.01025	-0.00325
	0°C/Normal Voltage	-0.00144	-0.00519
	10°C/Normal Voltage	-0.00079	-0.00345
	20°C/Normal Voltage	-0.00287	-0.00647
	30°C/Normal Voltage	-0.00308	-0.00445
	40°C/Normal Voltage	-0.00445	-0.00366
	50°C/Normal Voltage	-0.00411	0.00037
	60°C/Normal Voltage	-0.00223	0.00114
	70°C/Normal Voltage	-0.00192	0.00225
	80°C/Normal Voltage	-0.00257	-0.00076
	85°C/Normal Voltage	-0.00143	-0.00016
	20°C/Min Voltage	0.00037	0.00018
	20°C/Max Voltage	-0.00075	-0.00814
3M	-40°C/Normal Voltage	-0.00160	-0.02580
	-30°C/Normal Voltage	-0.00225	-0.02440
	-20°C/Normal Voltage	-0.00334	-0.02595
	-10°C/Normal Voltage	-0.00411	-0.02786
	0°C/Normal Voltage	-0.00343	-0.02806
	10°C/Normal Voltage	-0.00035	-0.02717
	20°C/Normal Voltage	-0.00117	-0.03013
	30°C/Normal Voltage	-0.00107	-0.02297
	40°C/Normal Voltage	-0.00177	-0.02185
	50°C/Normal Voltage	0.00148	-0.03153
	60°C/Normal Voltage	-0.00040	-0.02669
	70°C/Normal Voltage	0.00119	-0.02451
	80°C/Normal Voltage	-0.00037	-0.02336
	85°C/Normal Voltage	-0.00083	-0.02500
	20°C/Min Voltage	-0.00392	-0.02601
	20°C/Max Voltage	-0.00034	-0.02301
5MHz	-40°C/Normal Voltage	-0.00300	-0.03608
	-30°C/Normal Voltage	-0.00358	-0.03801
	-20°C/Normal Voltage	-0.00165	-0.04188
	-10°C/Normal Voltage	-0.00182	-0.03238
	0°C/Normal Voltage	-0.00225	-0.02841



	10°C/Normal Voltage	-0.00376	-0.04006
	20°C/Normal Voltage	-0.00023	-0.02157
	30°C/Normal Voltage	-0.00059	-0.01495
	40°C/Normal Voltage	-0.00177	-0.01673
	50°C/Normal Voltage	-0.00110	-0.02314
	60°C/Normal Voltage	-0.00414	-0.02293
	70°C/Normal Voltage	0.00170	-0.02475
	80°C/Normal Voltage	0.00024	-0.01739
	85°C/Normal Voltage	-0.00040	-0.02205
	20°C/Min Voltage	0.00365	-0.03228
	20°C/Max Voltage	-0.00274	-0.03902
10MHz	-40°C/Normal Voltage	-0.00411	0.00379
	-30°C/Normal Voltage	-0.00327	0.00582
	-20°C/Normal Voltage	-0.00362	-0.00310
	-10°C/Normal Voltage	-0.00174	-0.00280
	0°C/Normal Voltage	-0.00083	-0.00351
	10°C/Normal Voltage	-0.00202	0.00114
	20°C/Normal Voltage	-0.00194	0.00220
	30°C/Normal Voltage	-0.00016	-0.00488
	40°C/Normal Voltage	-0.00100	-0.00423
	50°C/Normal Voltage	-0.00232	0.00377
	60°C/Normal Voltage	-0.00271	-0.00411
	70°C/Normal Voltage	-0.00400	-0.00150
	80°C/Normal Voltage	0.00120	0.00522
	85°C/Normal Voltage	-0.00137	0.00083
	20°C/Min Voltage	0.00259	-0.00408
20°C/Max Voltage	-0.00250	0.00533	



Bandwidth	Test status	LTE Band 13 Channel 23230 Test Results (ppm)	
		QPSK	16QAM
5MHz	-40°C/Normal Voltage	0.00022	-0.02604
	-30°C/Normal Voltage	-0.00203	-0.02249
	-20°C/Normal Voltage	-0.00272	-0.00797
	-10°C/Normal Voltage	-0.00165	0.03445
	0°C/Normal Voltage	-0.00018	0.03297
	10°C/Normal Voltage	-0.00093	-0.02716
	20°C/Normal Voltage	-0.00330	-0.03679
	30°C/Normal Voltage	-0.00271	-0.00685
	40°C/Normal Voltage	-0.00263	-0.00830
	50°C/Normal Voltage	-0.00049	-0.01060
	60°C/Normal Voltage	-0.00203	-0.01101
	70°C/Normal Voltage	0.00084	-0.01442
	80°C/Normal Voltage	0.00040	-0.02146
	85°C/Normal Voltage	-0.00301	-0.02216
	20°C/Min Voltage	-0.00225	-0.02006
	20°C/Max Voltage	-0.00334	-0.02955
10MHz	-40°C/Normal Voltage	-0.00396	-0.01558
	-30°C/Normal Voltage	-0.00301	-0.01306
	-20°C/Normal Voltage	-0.00224	-0.01606
	-10°C/Normal Voltage	-0.00465	-0.01453
	0°C/Normal Voltage	-0.00260	-0.01353
	10°C/Normal Voltage	-0.00377	-0.01633
	20°C/Normal Voltage	0.00173	-0.01482
	30°C/Normal Voltage	0.00276	-0.01651
	40°C/Normal Voltage	-0.00032	-0.01604
	50°C/Normal Voltage	-0.00161	-0.01311
	60°C/Normal Voltage	-0.00087	-0.01611
	70°C/Normal Voltage	-0.00093	-0.01573
	80°C/Normal Voltage	0.00185	-0.01488
	85°C/Normal Voltage	0.00023	-0.01517
	20°C/Min Voltage	-0.00132	-0.01306
	20°C/Max Voltage	-0.00390	-0.01573

5.7 Spurious Emissions at Antenna Terminals

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 1MHz and VBW 3MHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Test setup

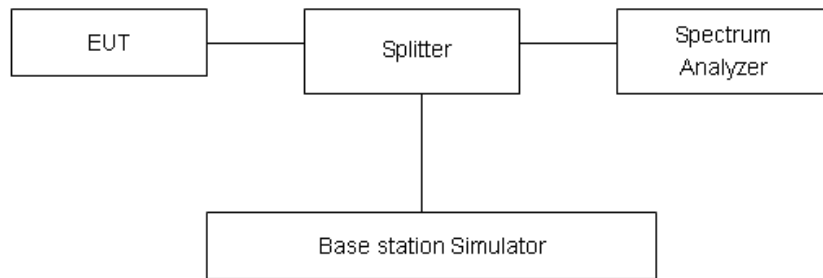

Limits

LTE -4 Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB..”

LTE -12 Rule Part 27.53 (g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

LTE -13 Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be



tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

LTE B4/12 Limit

Limit	-13 dBm
-------	---------

LTE B13 Limit

Limitout of the band 1559-1610 MHz	-13 dBm
Limitin the band 1559-1610 MHz	-40 dBm

Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB




Test Result: PASS


LTE Band 41.4MHz CH-Low30MHz~3GHz

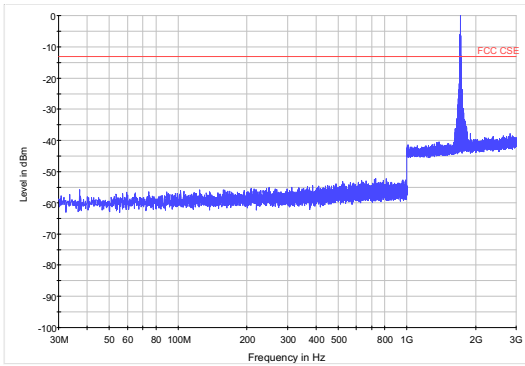


LTE Band 4 1.4MHz CH-Low3GHz~18GHz

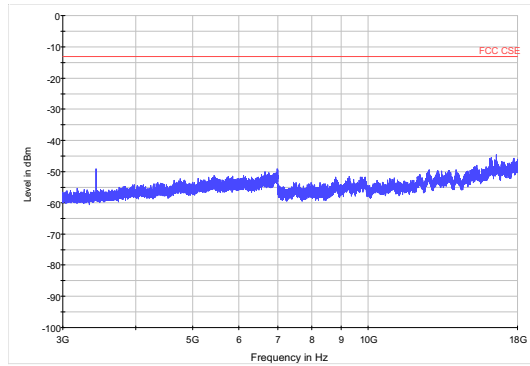


LTE Band 4 1.4MHz CH-Middle30MHz~3GHz

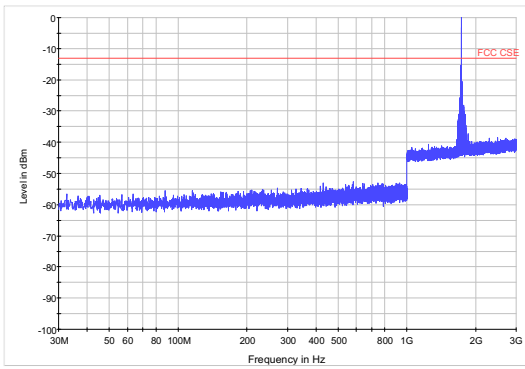


LTE Band 4 1.4MHz CH-Middle3GHz~18GHz

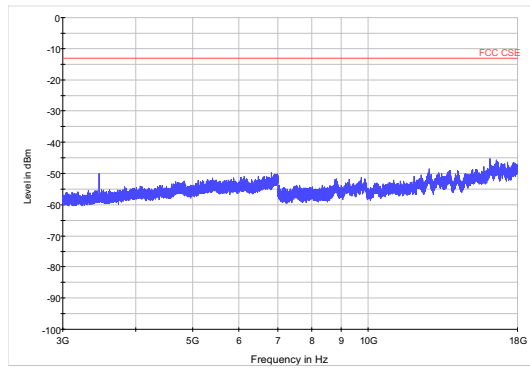


LTE Band 4 1.4MHz CH-High 30MHz~3GHz

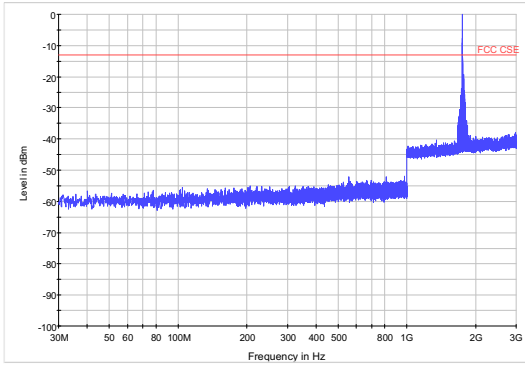


LTE Band 4 1.4MHz CH-High 3GHz~18GHz

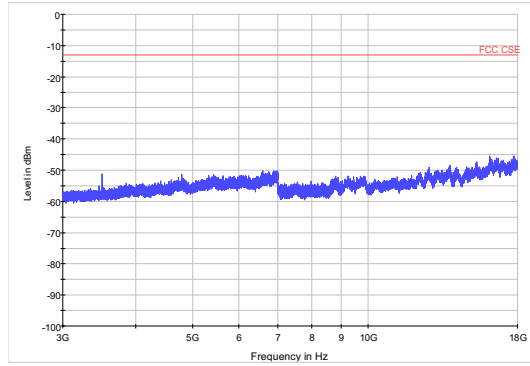

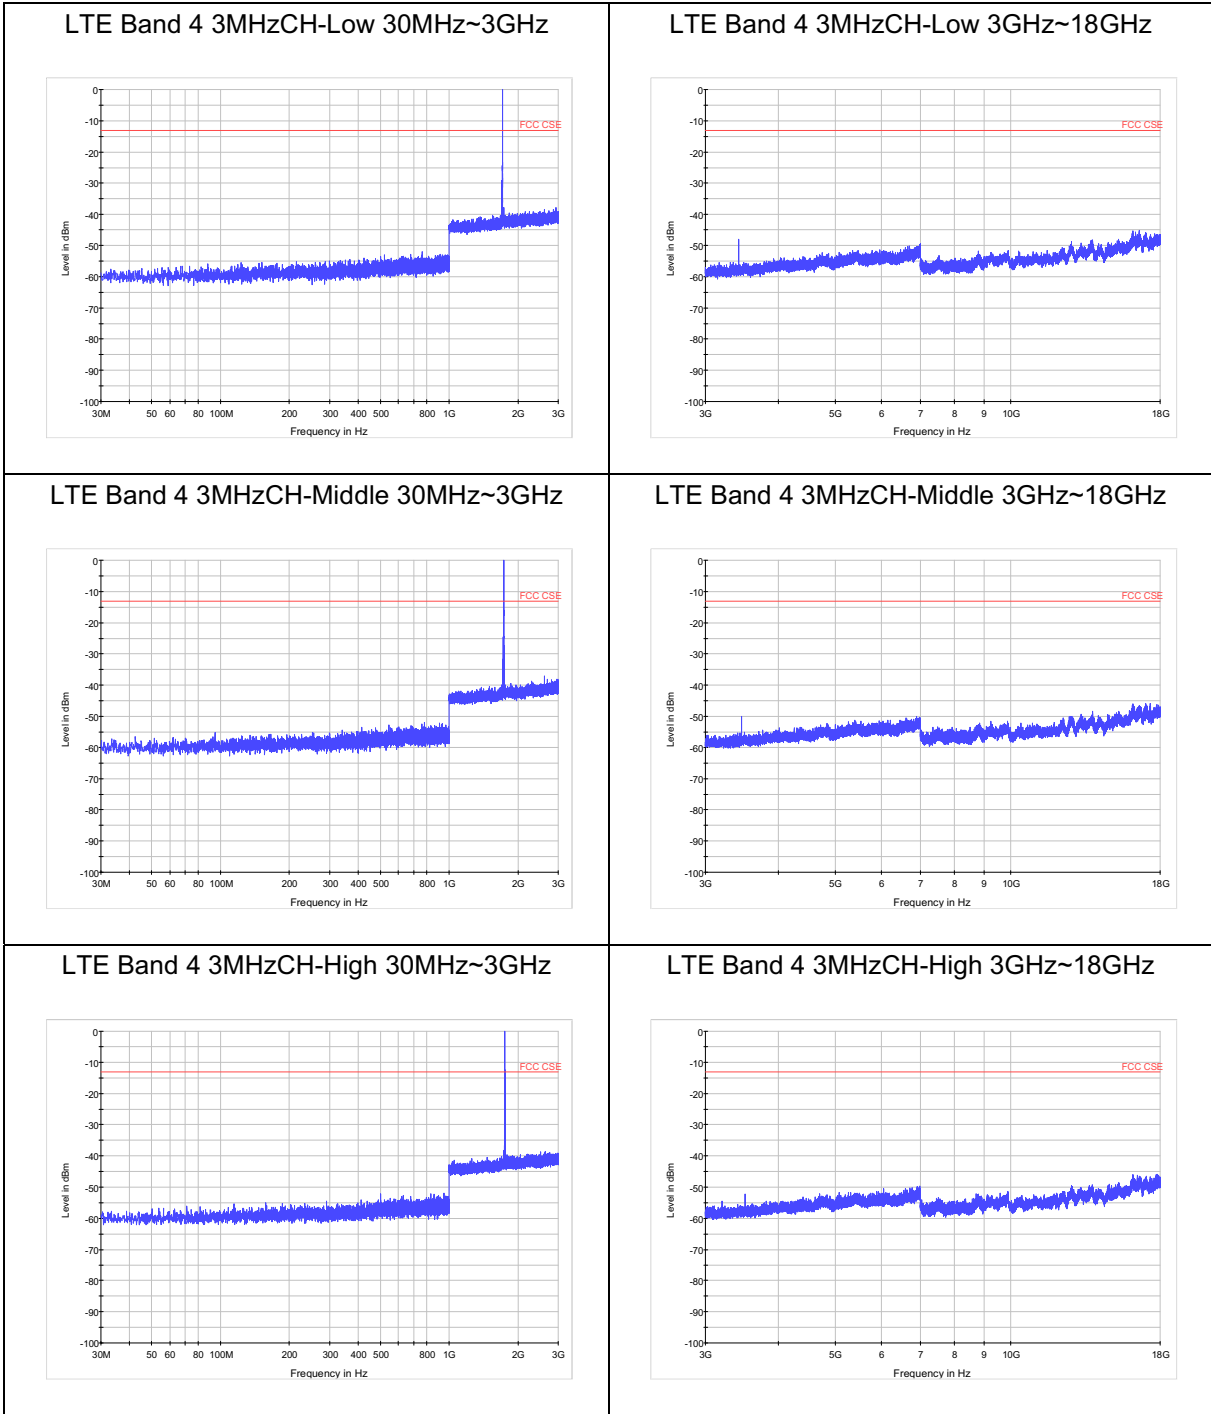





LTE Band 4 5MHz CH-Low 30MHz~3GHz

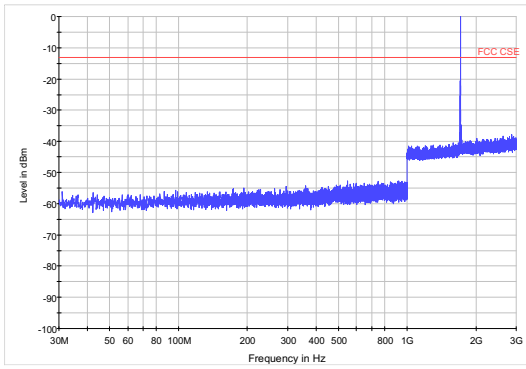


LTE Band 4 5MHz CH-Low 3GHz~18GHz

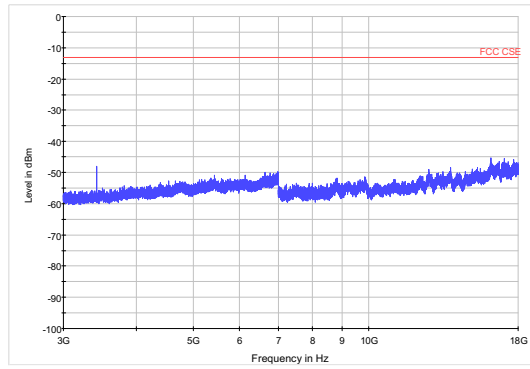


LTE Band 4 5MHz CH-Middle 30MHz~3GHz

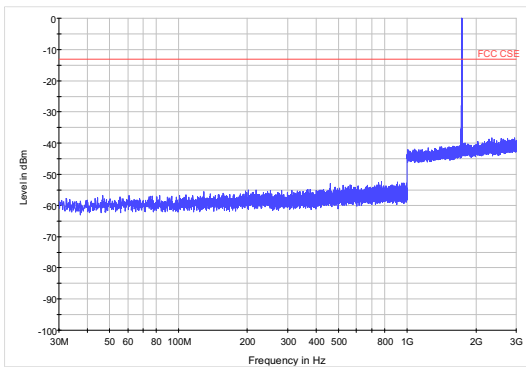


LTE Band 4 5MHz CH-Middle 3GHz~18GHz

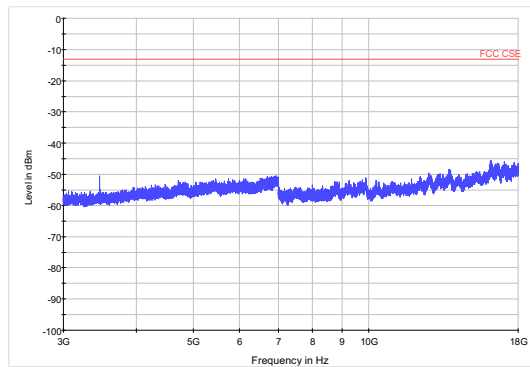

LTE Band 4 5MHz CH-High 30MHz~3GHz

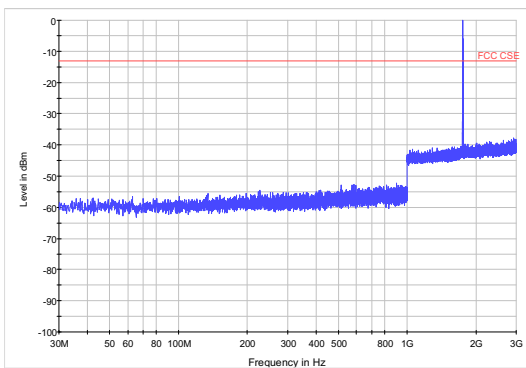


LTE Band 4 5MHz CH-High 3GHz~18GHz

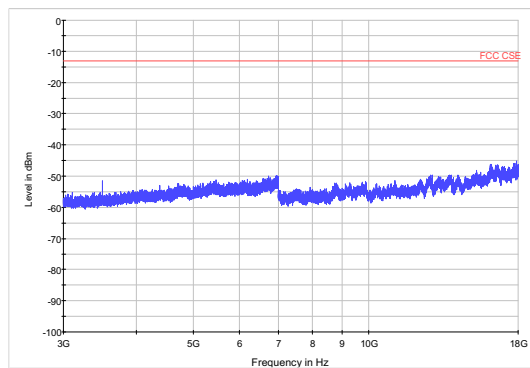





LTE Band 4 10MHz CH-Low 30MHz~3GHz

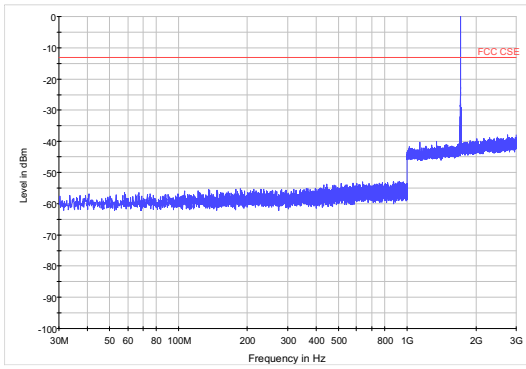


LTE Band 4 10MHz CH-Low 3GHz~18GHz

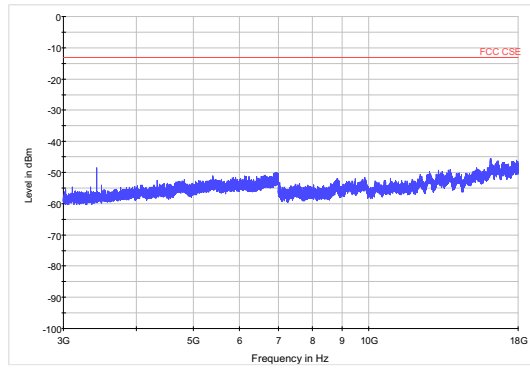


LTE Band 4 10MHz CH-Middle 30MHz~3GHz

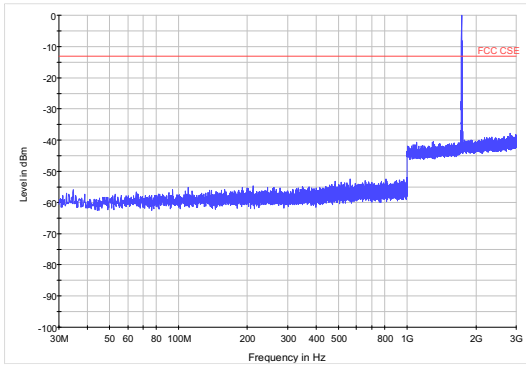


LTE Band 4 10MHz CH-Middle 3GHz~18GHz

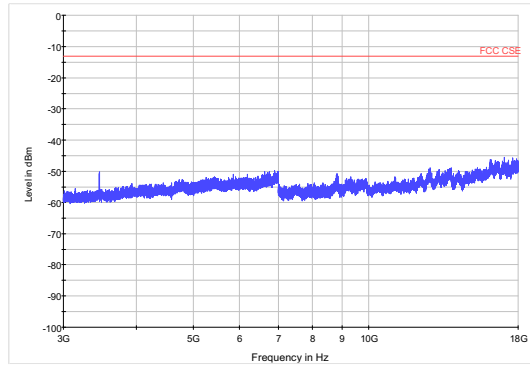

LTE Band 4 10MHz CH-High 30MHz~3GHz

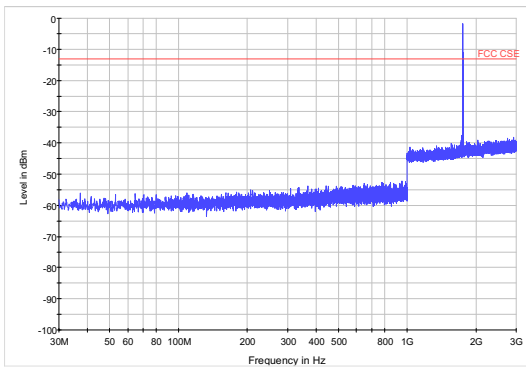


LTE Band 4 10MHz CH-High 3GHz~18GHz

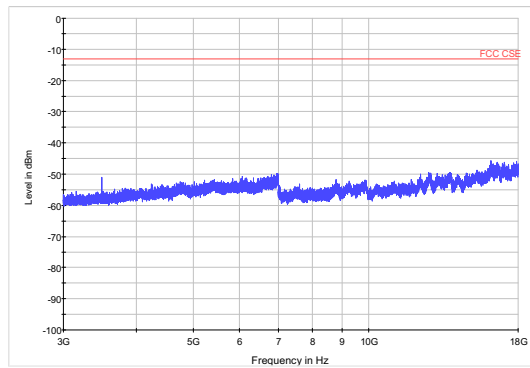





LTE Band 415MHz CH-Low30MHz~3GHz

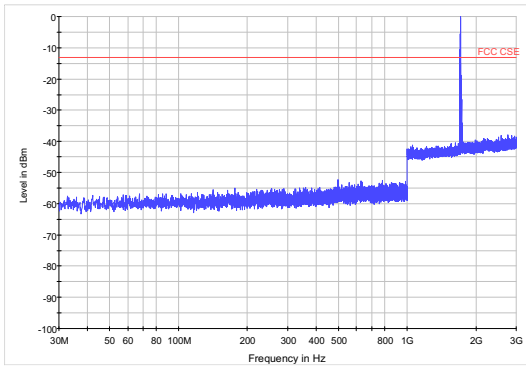


LTE Band 415MHz CH-Low3GHz~18GHz

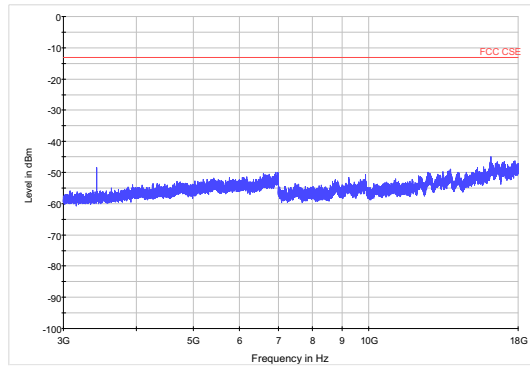


LTE Band 4 15MHz CH-Middle 30MHz~3GHz

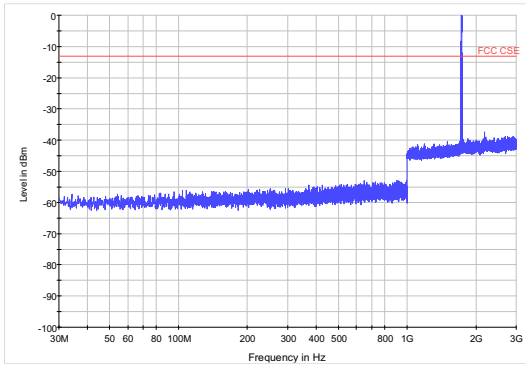


LTE Band 4 15MHz CH-Middle 3GHz~18GHz

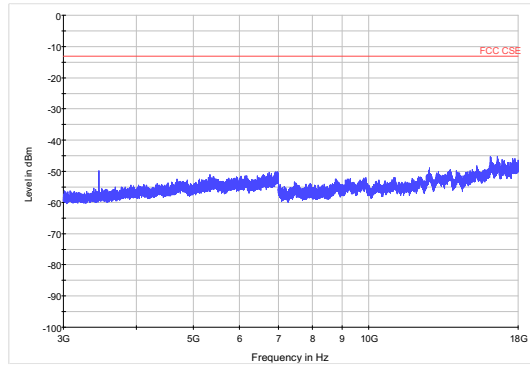

LTE Band 4 15MHz CH-High 30MHz~3GHz

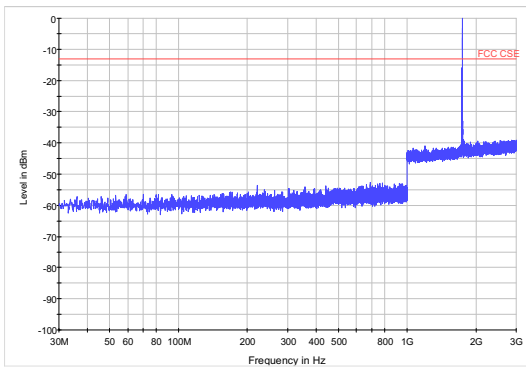


LTE Band 4 15MHz CH-High 3GHz~18GHz

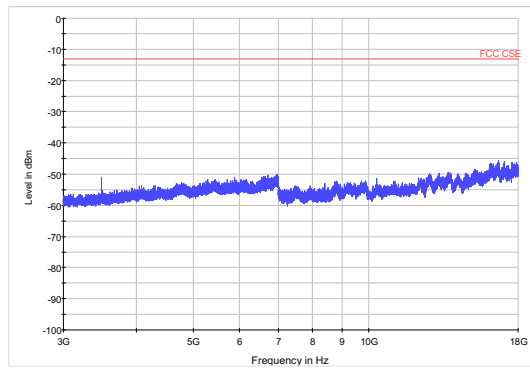





LTE Band 4 20MHz CH-Low30MHz~3GHz

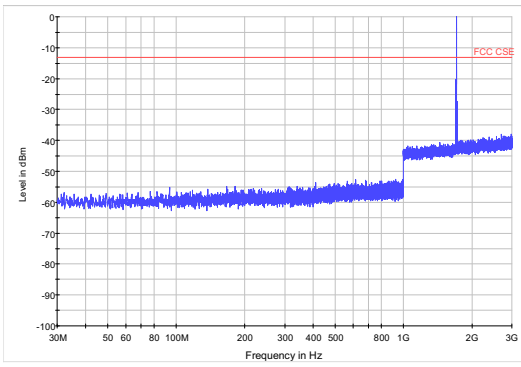


LTE Band 4 20MHz CH-Low3GHz~18GHz

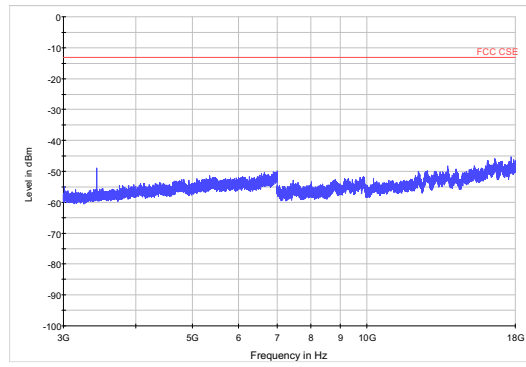


LTE Band 4 20MHz CH-Middle 30MHz~3GHz

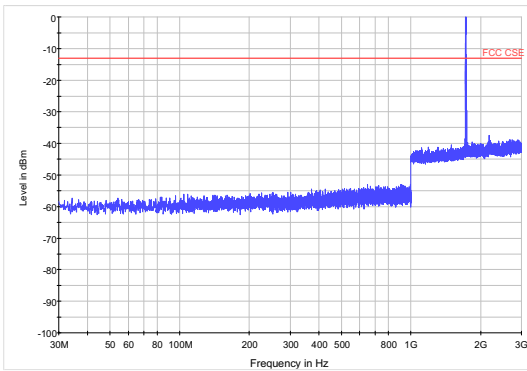

LTE Band 4 20MHz CH-Middle 3GHz~18GHz

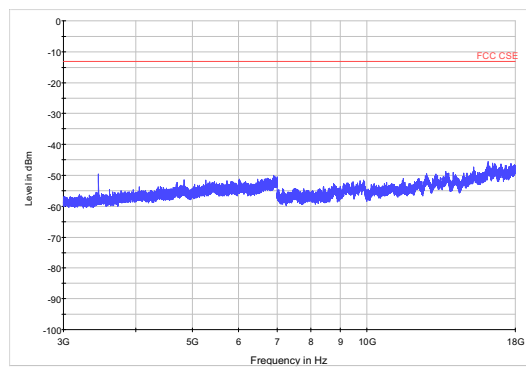

LTE Band 4 20MHz CH-High30MHz~3GHz

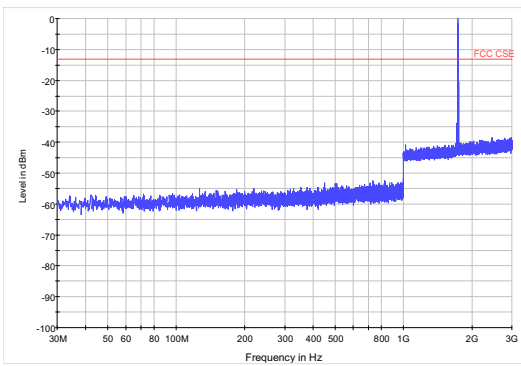

LTE Band 4 20MHz CH-High 3GHz~18GHz

