

ANTENNA TEST REPORT

Applicant	Apex Biotechnology Corp. No. 7, Li-Hsin Rd. V, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.
Brand	ApexBio
Manufacturer	Apex Biotechnology Corp. No. 7, Li-Hsin Rd. V, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.
Product Name	UASure II Link Blood Uric Acid Monitoring System
Model Name	UAM302
Report No	4790996517
Received Date	2023/10/2
Test Period	2023/10/3
Issued Date	2023/11/3

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Release Note

Rev.	Date	Revisions	Revised By
--	2023/11/3	-	-

Table of Contents

1. Description of Antenna.....	3
2. Test Frequency and Polarization	4
3. Test Location and Address.....	5
4. Measuring Instrument List (Test Equipment)	6
5. Test Connection Diagram and Condition	7
6. Test Procedure	8
7. Test Result.....	9
Appendix I : Photographs of Test Configuration	10
Appendix II : Photographs of the Antenna Outview	12
Appendix III : Antenna Pattern	13

1. Description of Antenna

Ant. No.	Brand Name	Model Name	Ant. Type	Operation Mode
1	APEX BIOTECHNOLOGY	APEX_UAM302 PCB ANT	PCB	Bluetooth LE

Note:

1. The EUT incorporates a SISO function. Physically, the EUT provides operation Mode as below:


Operation Mode	Tx,Rx Function
Bluetooth LE	1TX,1RX

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual.

2. Test Frequency and Polarization

The tests frequency is declared by manufacturer.

Band (MHz)	Test Frequency (MHz)
2400-2483.5	2402, 2440, 2480

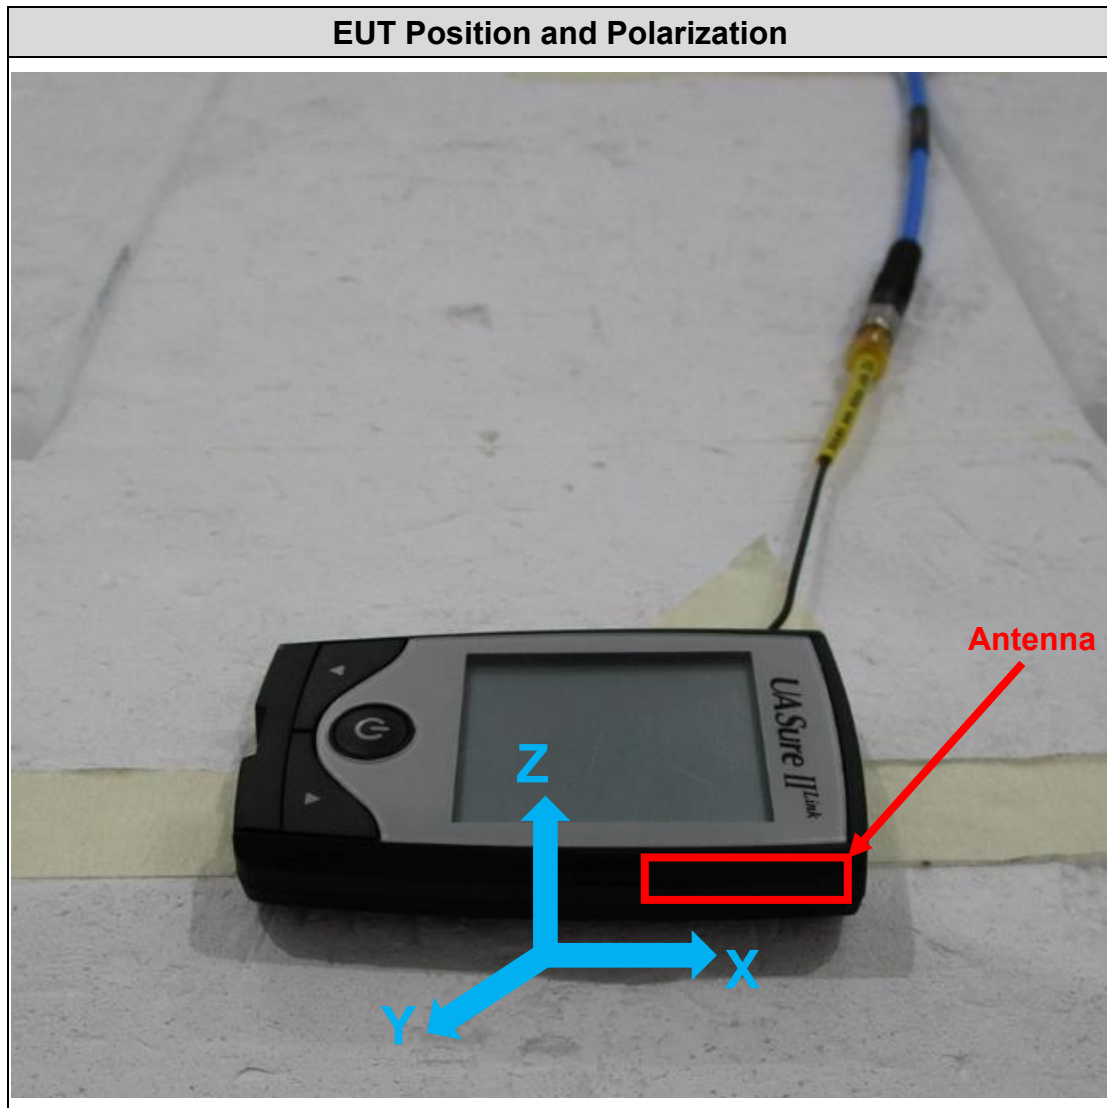

3. Test Location and Address

Test Location	Underwriters Laboratories Taiwan Co., Ltd.,
Address	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Description	All measurement facilities use to collect the measurement data are located at Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

4. Measuring Instrument List (Test Equipment)

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.


Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired Date
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	781	2022/12/30	2023/12/29
MXG Vector Signal Generator	Keysight Technologies	N5182B	MY56200244	2023/1/6	2024/1/5
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	2022/12/1	2023/11/30
Cables	Hanyitek	HPMC40KM90KF	CB038	2023/2/15	2024/2/14
Support Calibration Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired Date
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	01690	2022/12/21	2023/12/20

UL Software

Software	Version
Antenna Pattern Measurement System	1.0.0.0

5. Test Connection Diagram and Condition

Test Facility	Test Site No.	Environmental Condition	Test Date	Tested by
Fully Anechoic Chamber	1277	23.8°C/67.5%RH	2023/10/3	Waternil Guan

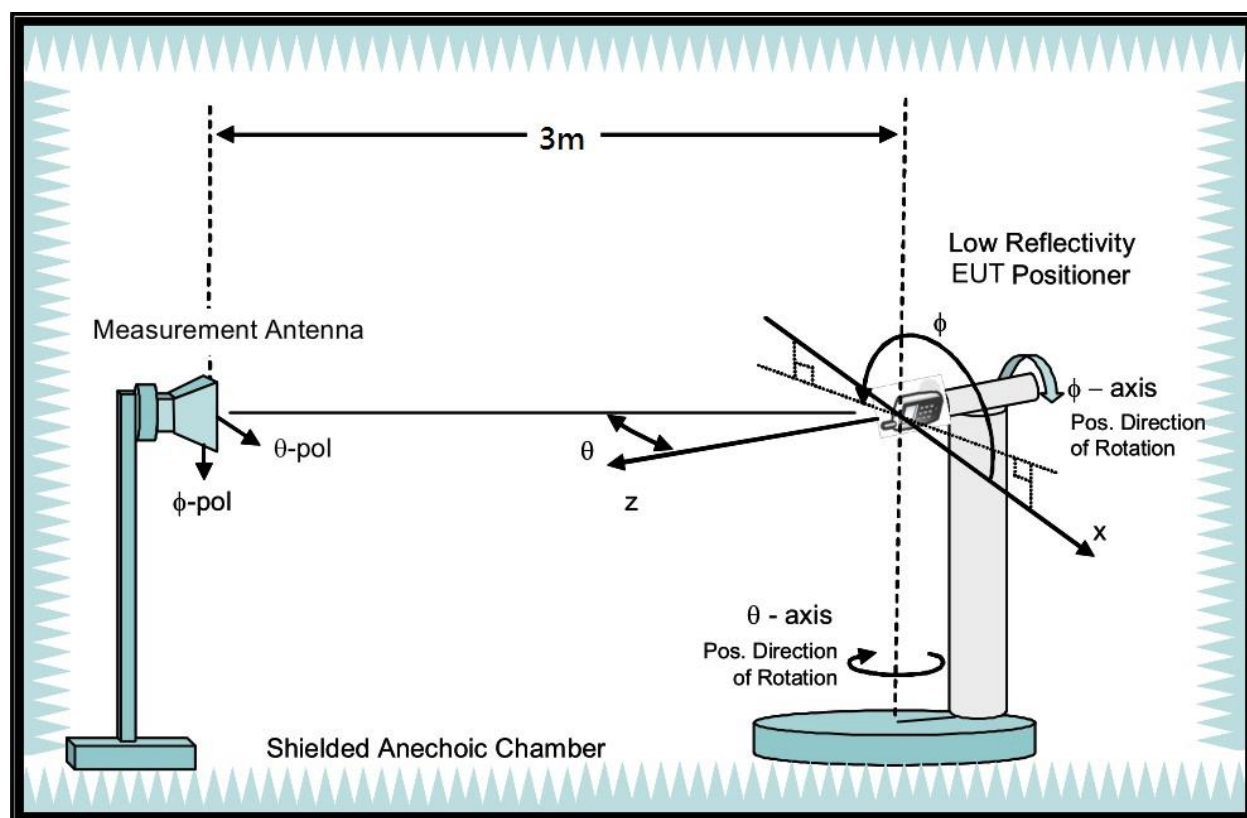

6. Test Procedure


1. Set the Calibration Antenna on multi-axis positioner and connect to signal generator for capture the correction factor.
2. Signal generator insertion normalize and calculate the standard antenna factor with spectrum analyzer.
3. Calibration Antenna change to the EUT's antenna.
4. The EUT is then stepped between 0 to 360 degrees along the theta axis.

7. Test Result

Maximum gain result refer below table:


Axis	Polarization	Test Freq. 2402 (MHz)	Test Freq. 2440 (MHz)	Test Freq. 2480 (MHz)
		Gain(dBi)	Gain(dBi)	Gain(dBi)
X-Y Plane	Vertical	-10.42	-8.53	-7.25
	Horizontal	0.33	0.48	0.87
X-Z Plane	Vertical	-6.08	-4.8	-4.3
	Horizontal	-5.08	-5.39	-5.13
Y-Z Plane	Vertical	-4.87	-4.79	-6.34
	Horizontal	-3.51	-3.36	-3.54

Appendix I : Photographs of Test Configuration

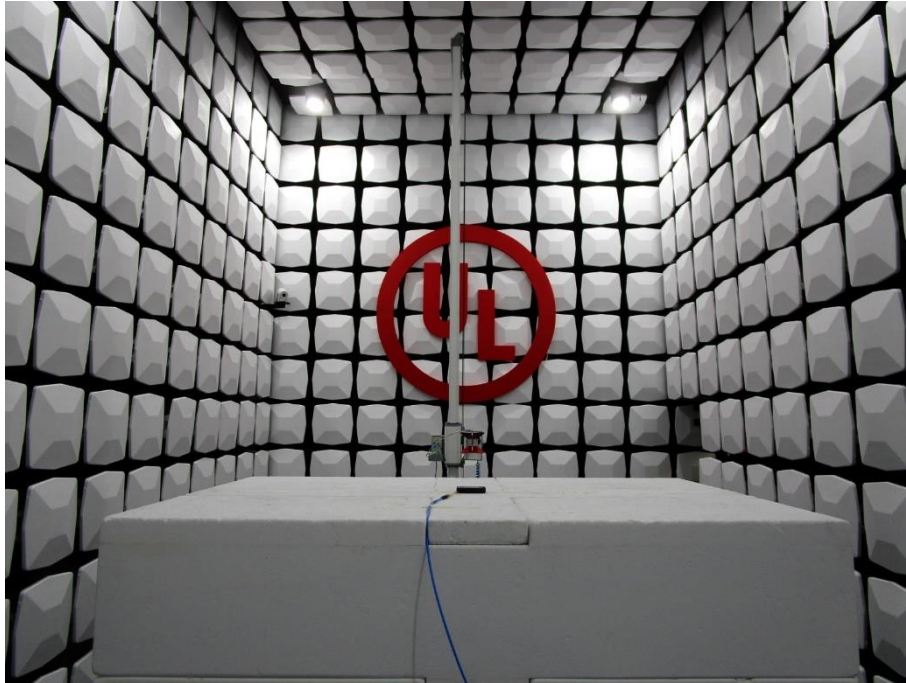





Appendix II : Photographs of the Antenna Outview

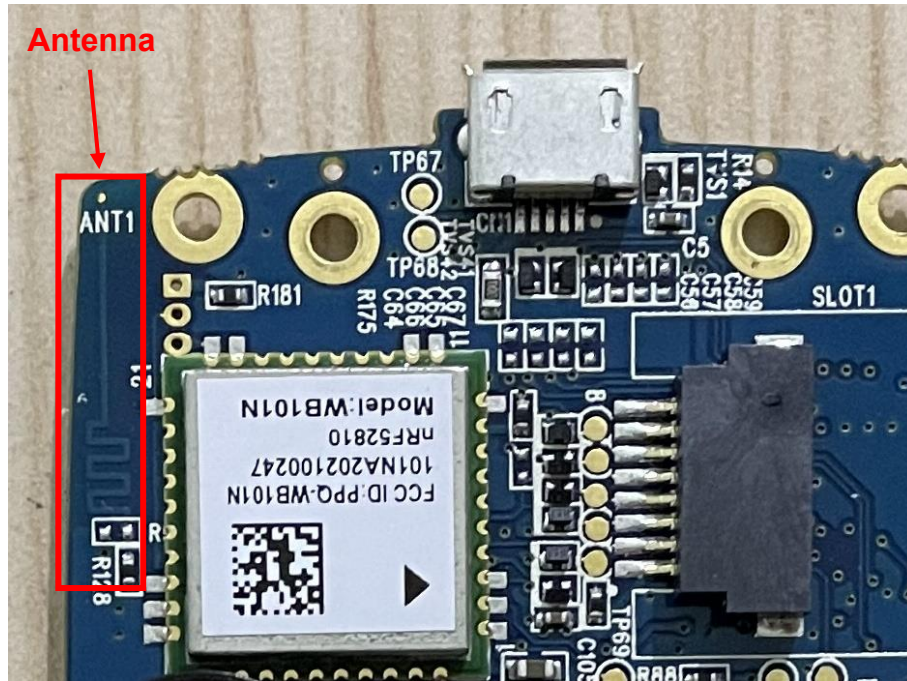


Appendix III : Antenna Pattern

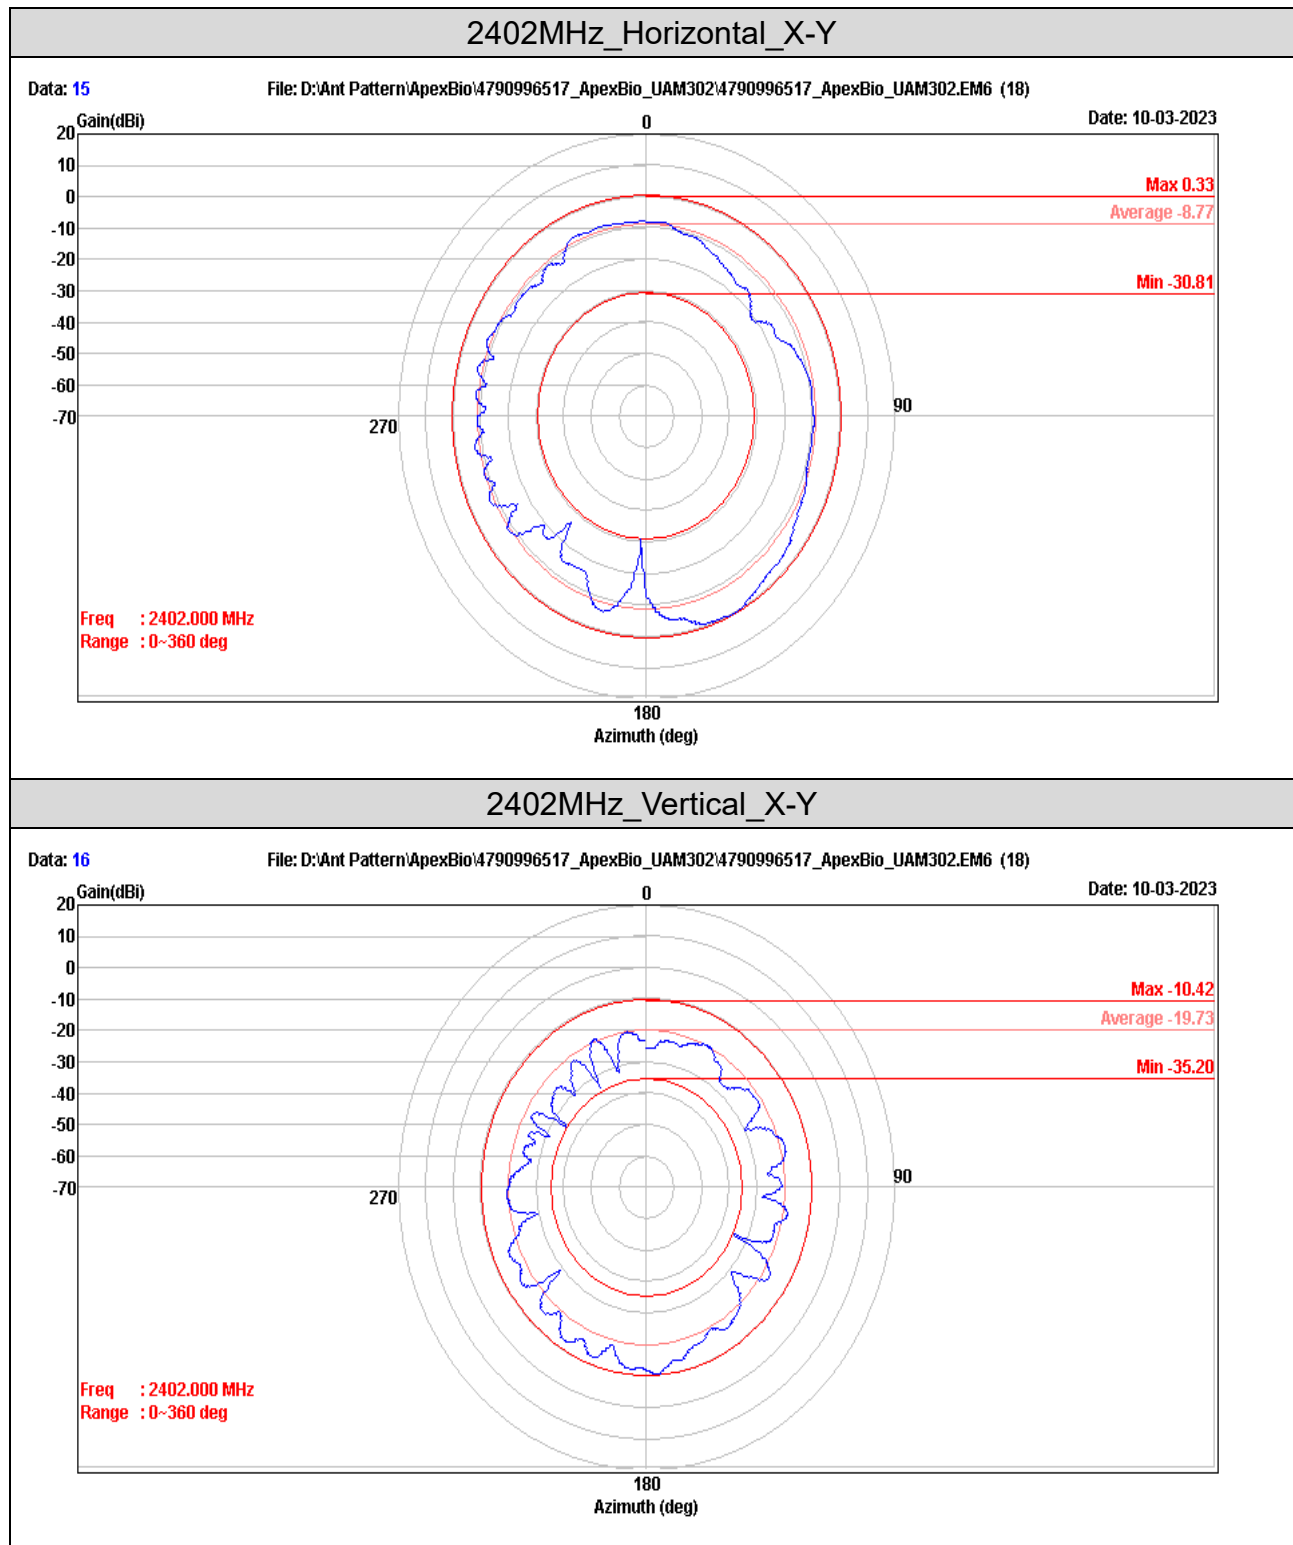


2440MHz_Horizontal_X-Y

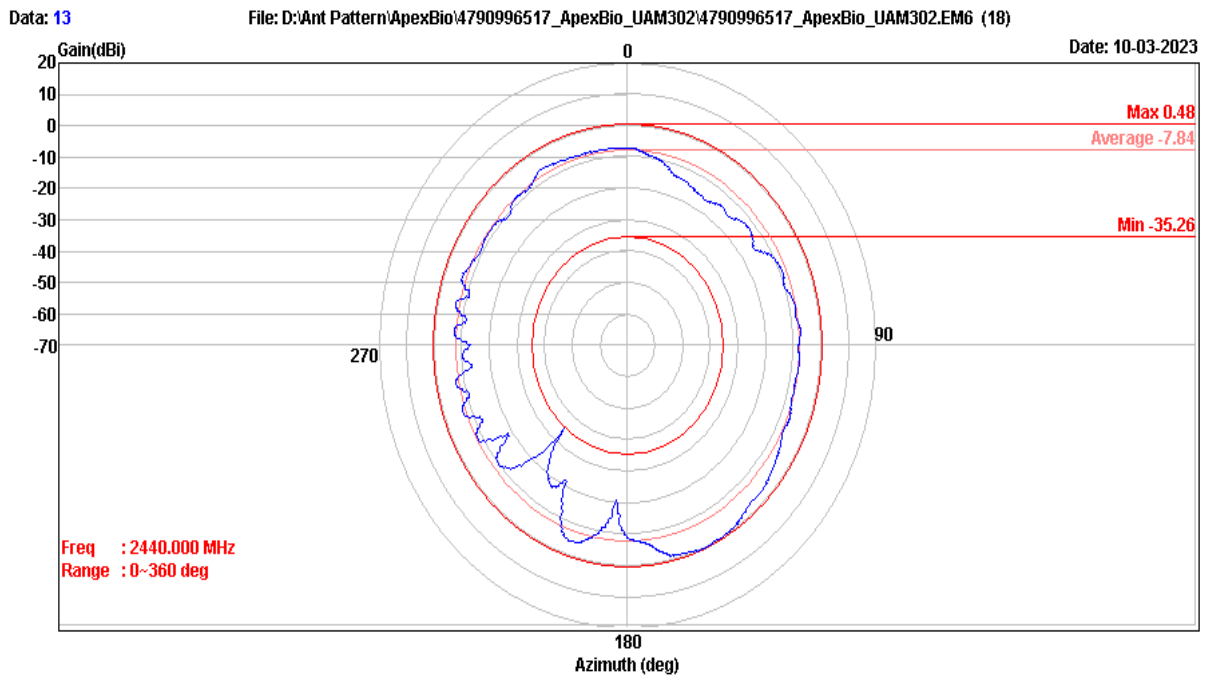


2440MHz_Vertical_X-Y

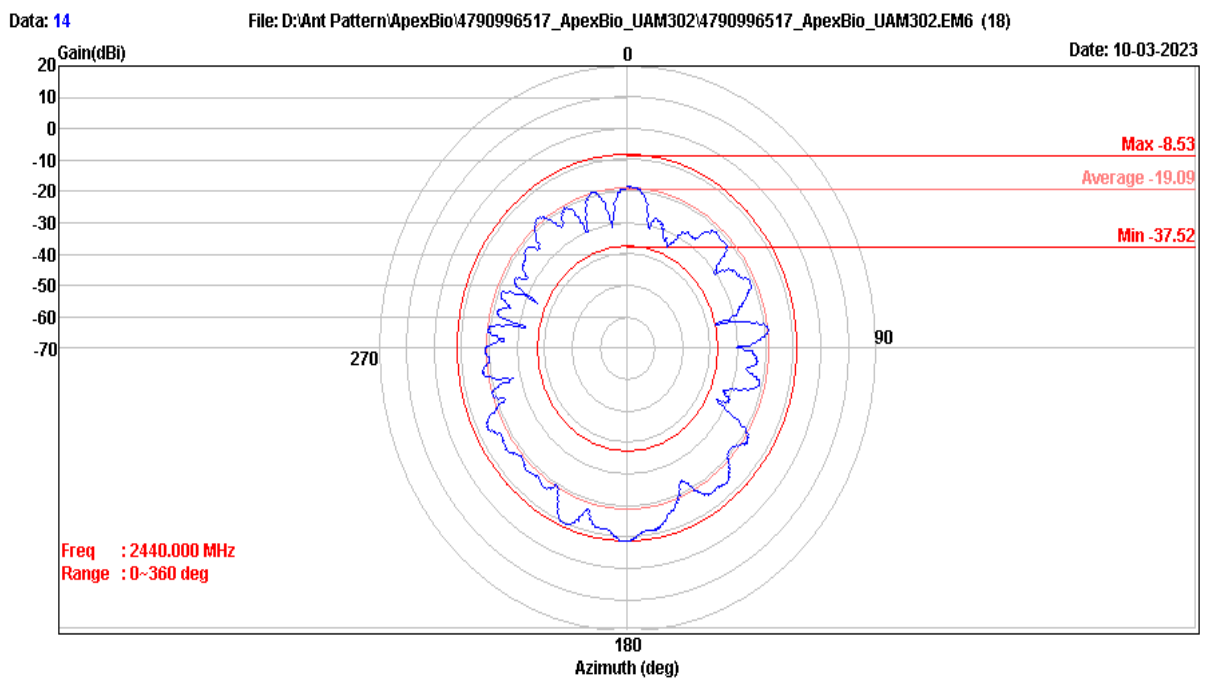


2480MHz_Horizontal_X-Y

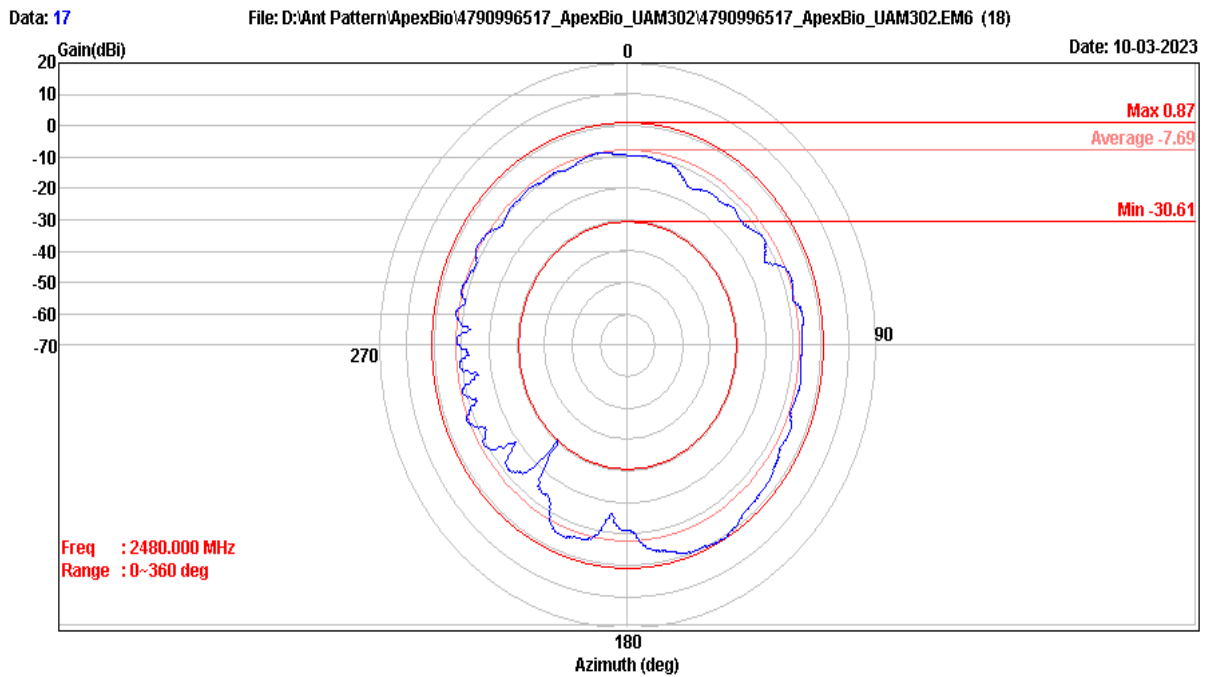


2480MHz_Vertical_X-Y

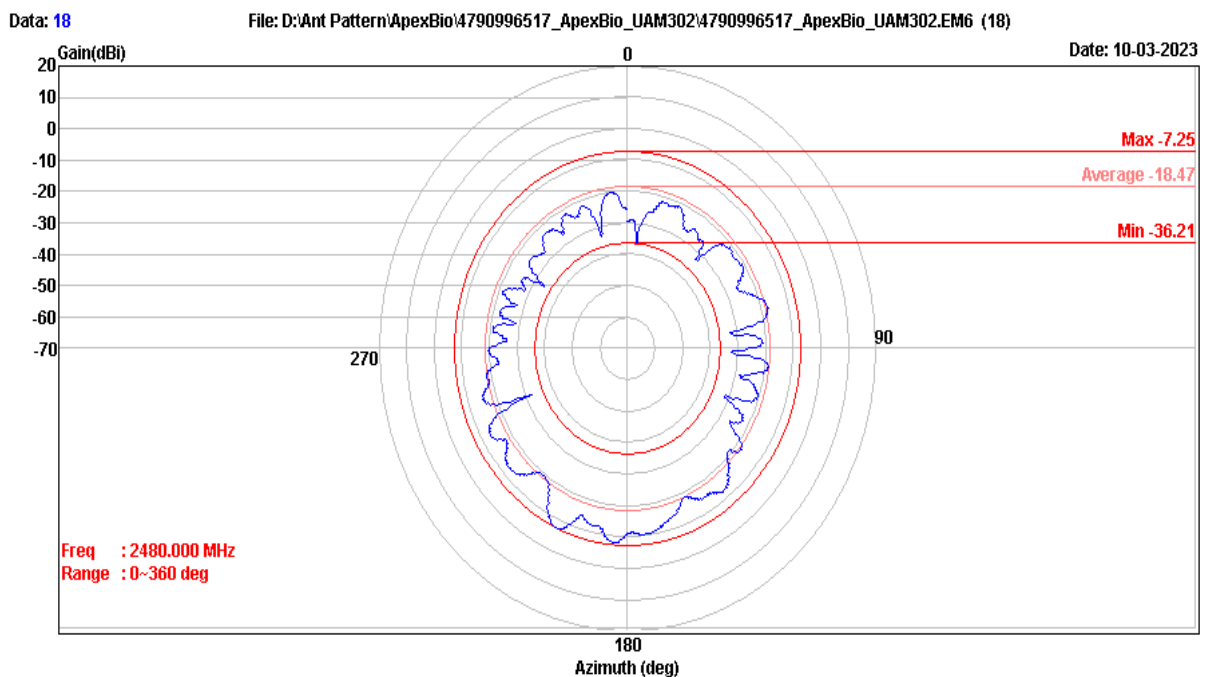


2402MHz_Horizontal_X-Z

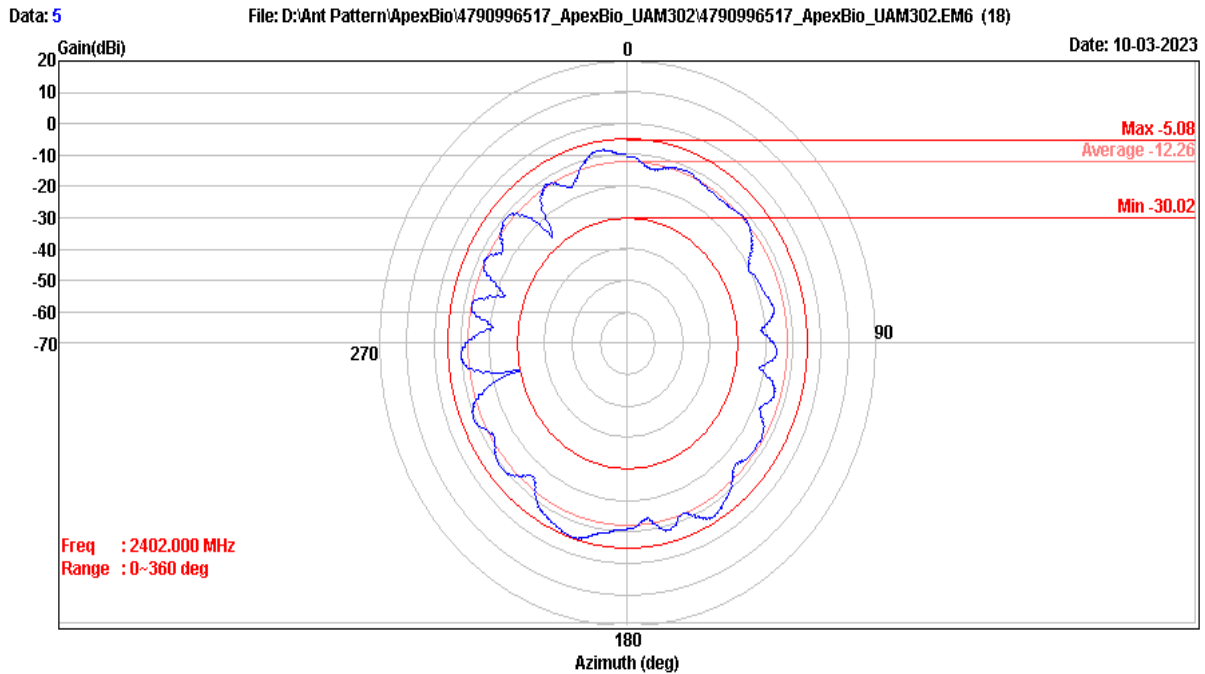


2402MHz_Vertical_X-Z

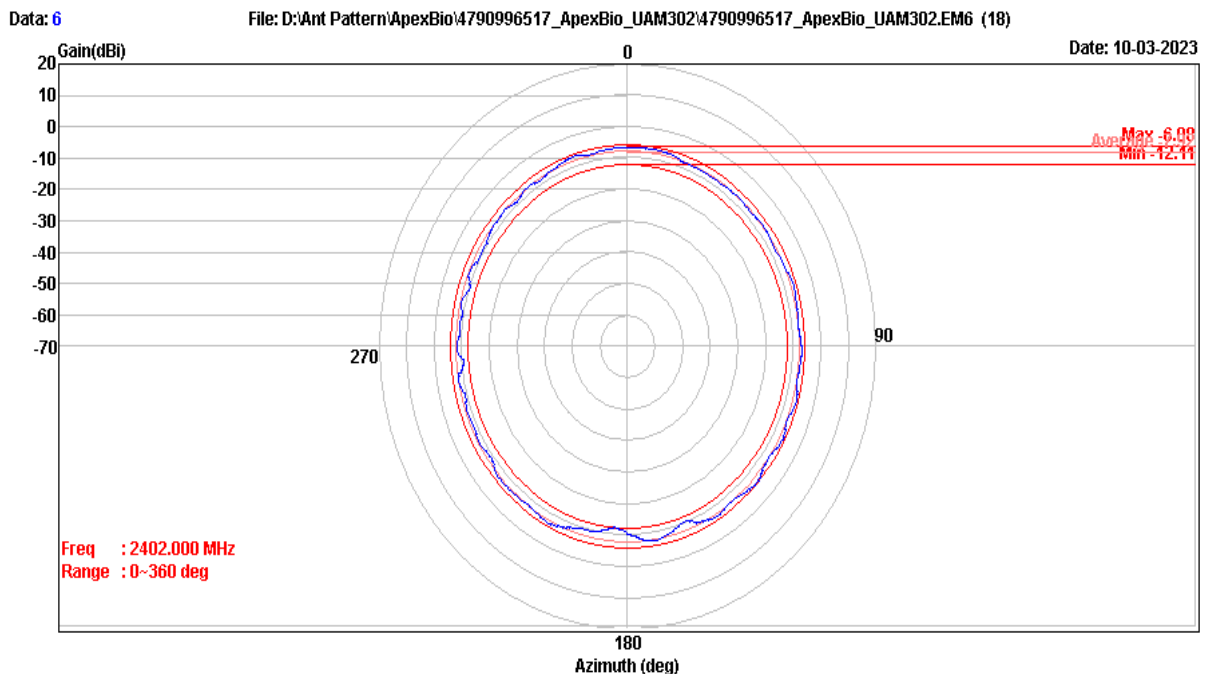


2440MHz_Horizontal_X-Z

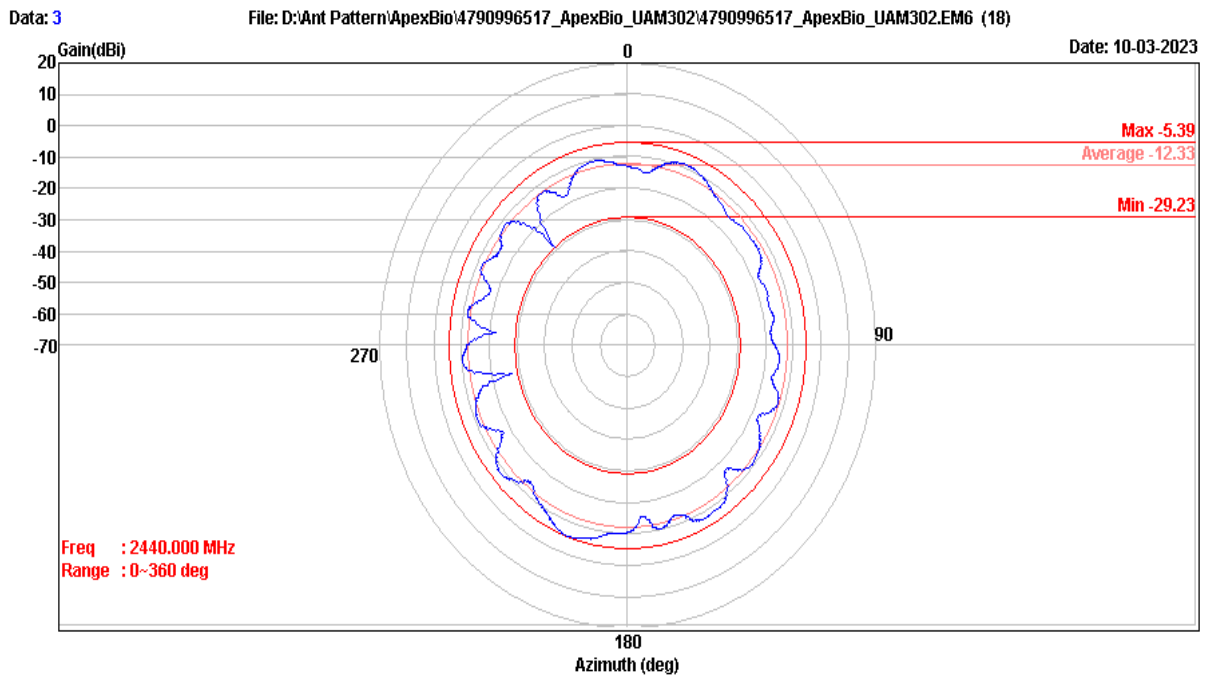


2440MHz_Vertical_X-Z

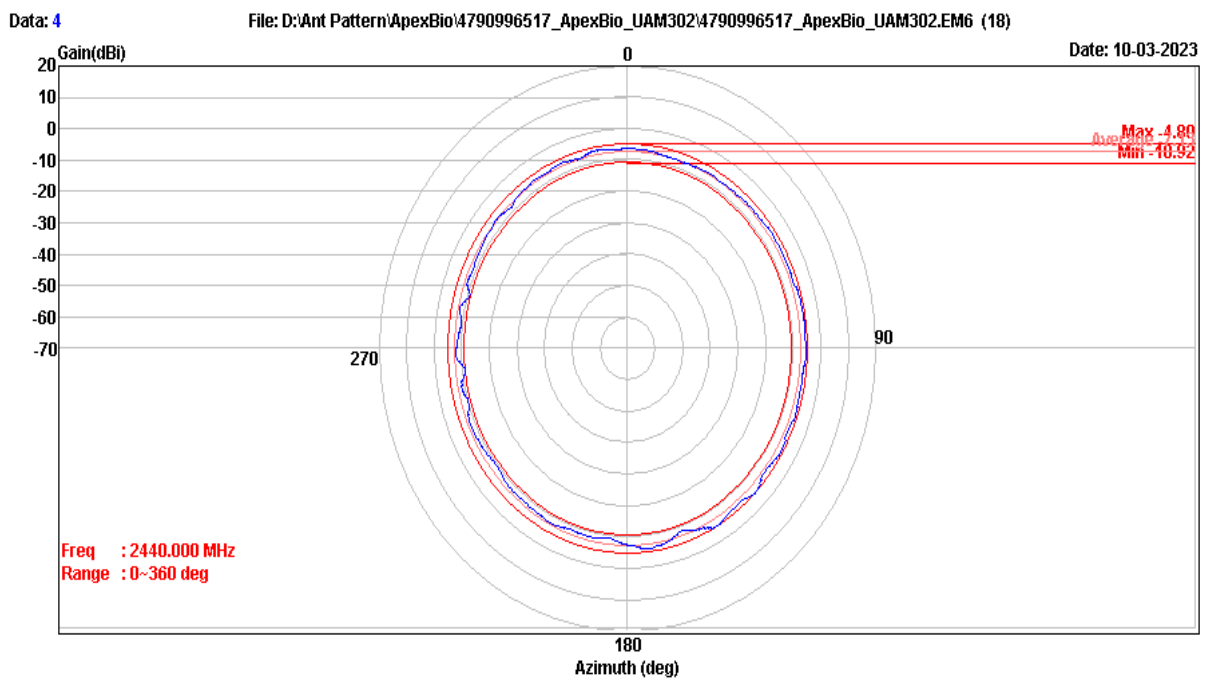


2480MHz_Horizontal_X-Z

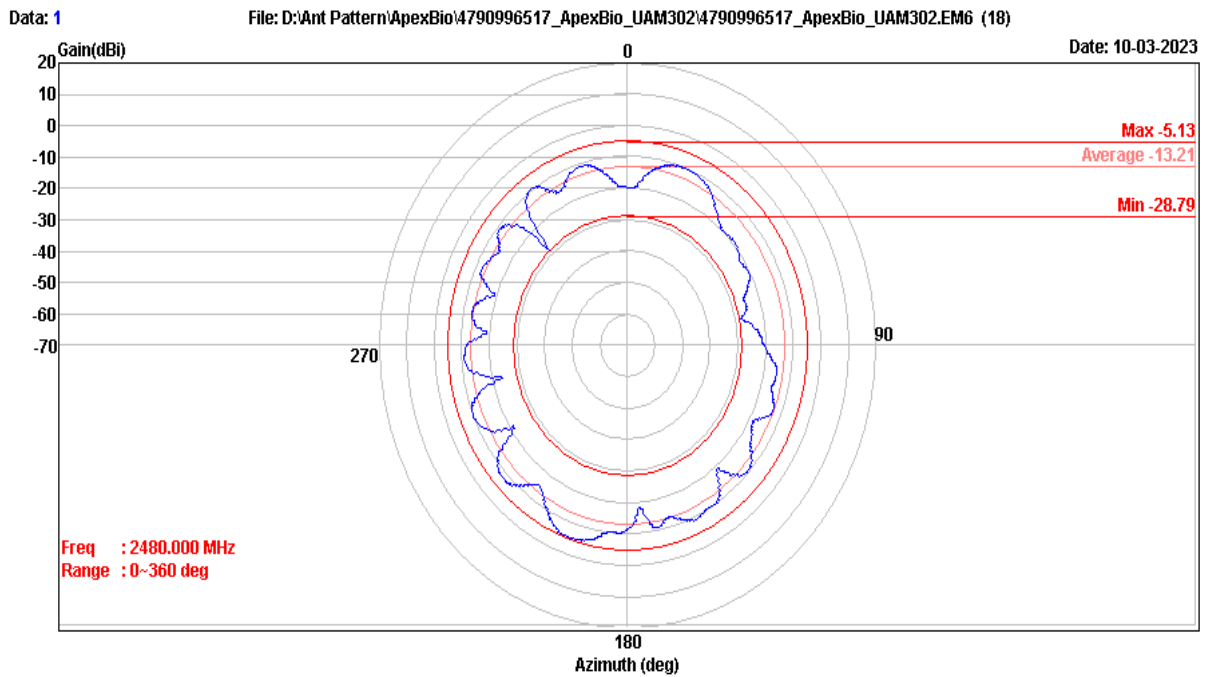


2480MHz_Vertical_X-Z

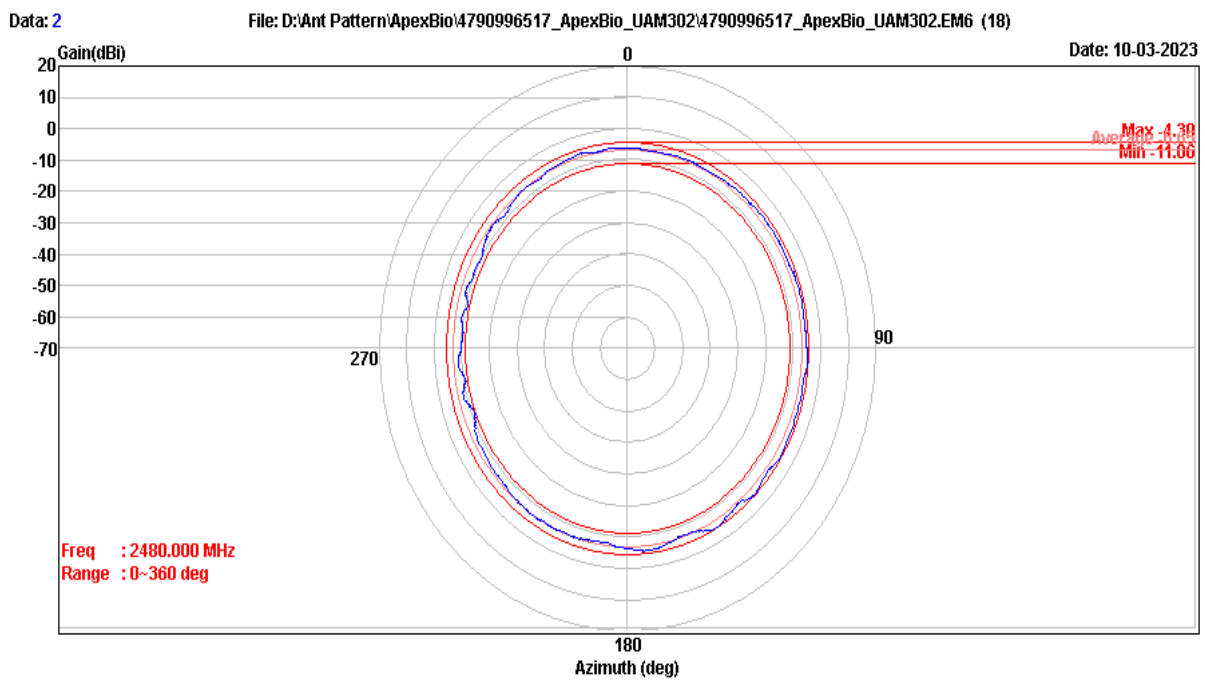


2402MHz_Horizontal_Y-Z

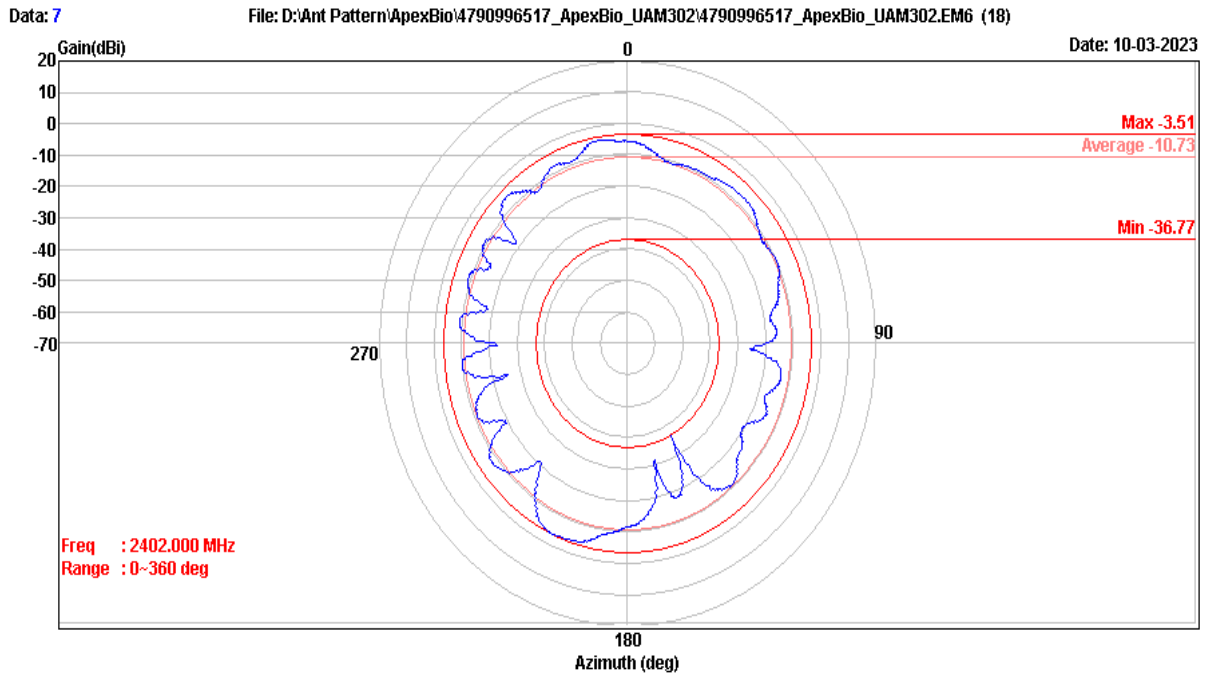


2402MHz_Vertical_Y-Z

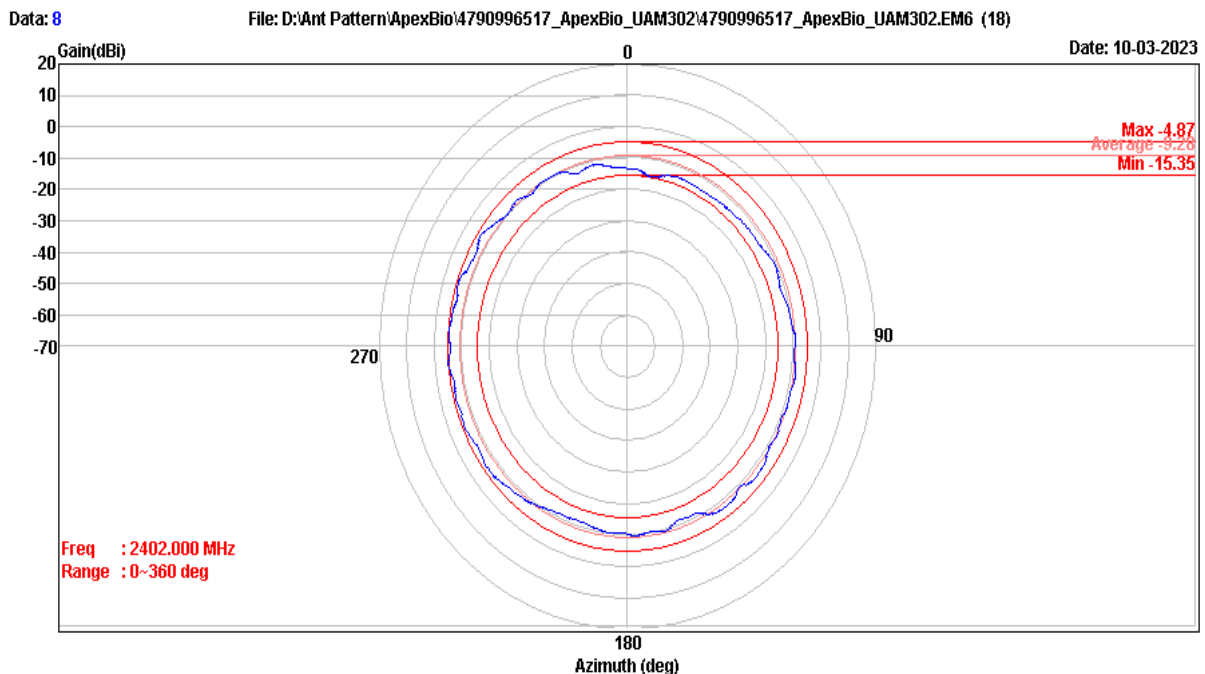


2440MHz_Horizontal_Y-Z

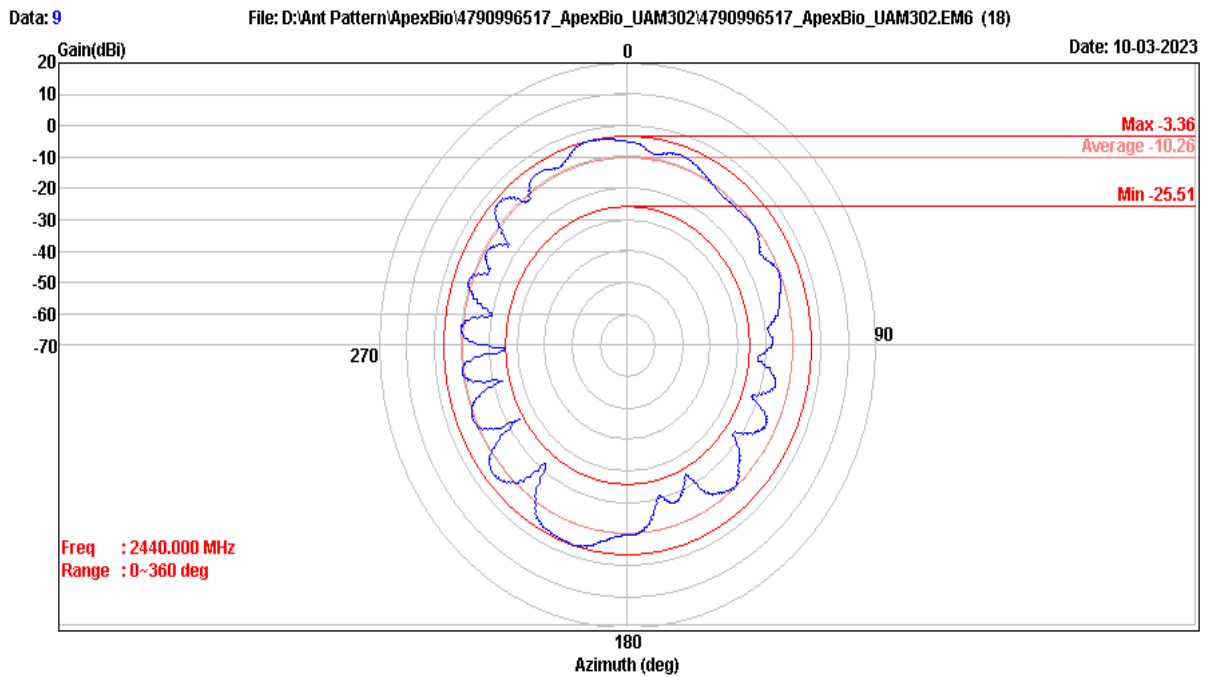


2440MHz_Vertical_Y-Z

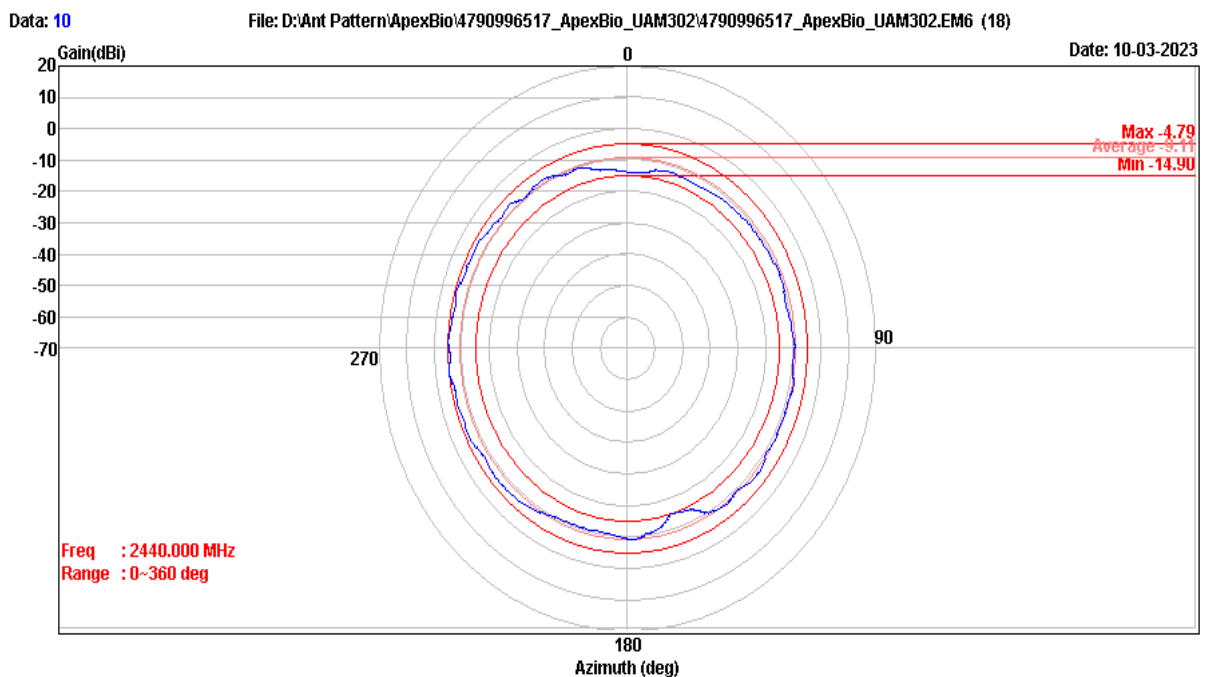

2480MHz_Horizontal_Y-Z

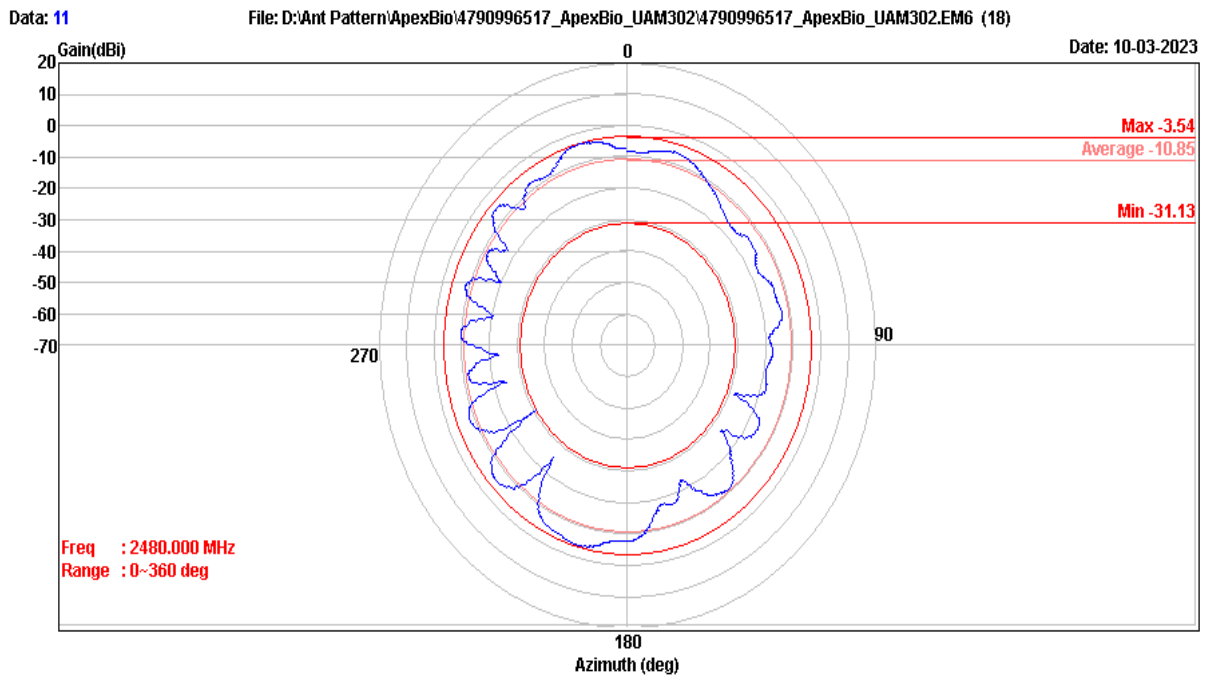

2480MHz_Vertical_Y-Z

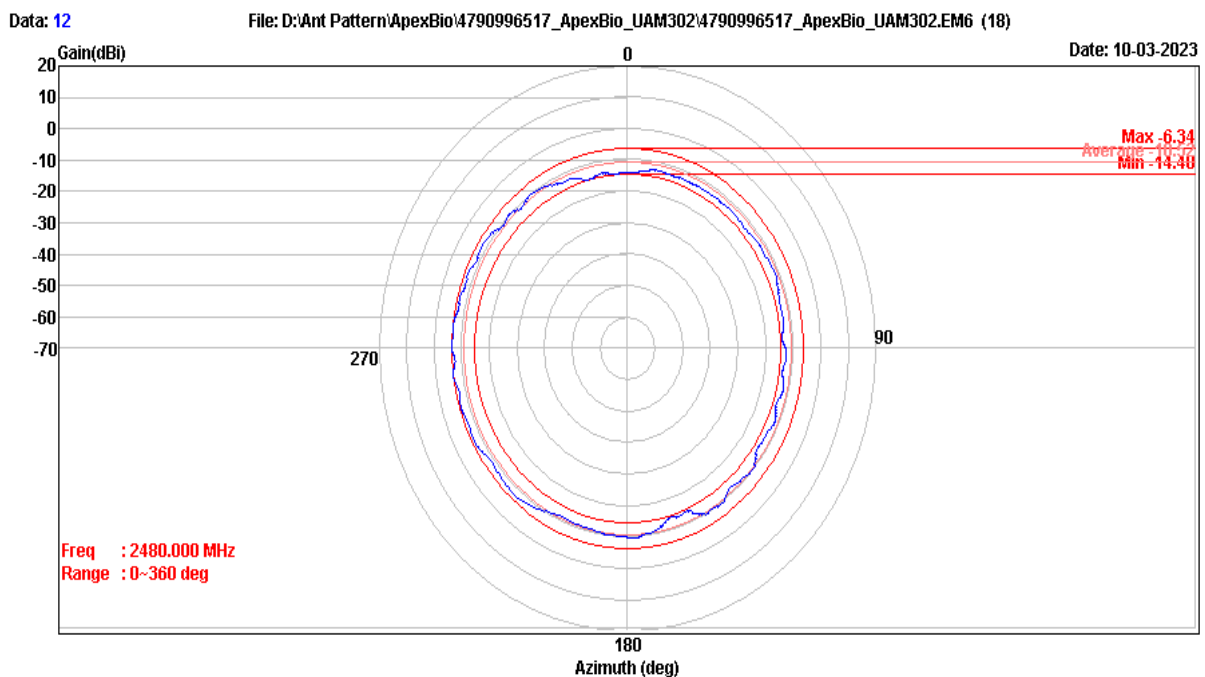

END OF REPORT