

TEST REPORT

Reference No...... : WTX24X03054925W001
FCC ID..... : 2AV4C-U280Q01FLUD
Applicant..... : Eaton Corporation
Address..... : 10000 Woodward Ave., Woodridge IL 60517, USA
Manufacturer..... : Intracom Asia Co., Ltd
Address..... : 4F., No.77, Sec. 1, Xintai 5th Rd., Xizhi Dist., | New Taipei City 221, Taiwan, R.O.C.
Product Name..... : 10W Wireless UnderDesk Charging Pad
Model No..... : U280-Q01FL-UD
Standards..... : FCC Part 15.207&15.209
Date of Receipt sample..... : 2024-03-18
Date of Test..... : 2024-03-18 to 2024-03-31
Date of Issue..... : 2024-03-31
Test Report Form No...... : WTX_Part 15_207_209W
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

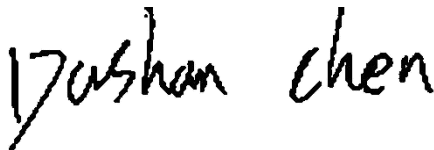

Dashan Chen

Approved by:



Jason Su

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE	12
3.2 TEST RESULT	12
4. CONDUCTED EMISSIONS	13
4.1 TEST PROCEDURE	13
4.2 BASIC TEST SETUP BLOCK DIAGRAM	13
4.3 ENVIRONMENTAL CONDITIONS	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. RADIATED EMISSION	16
5.1 STANDARD APPLICABLE	16
5.2 TEST PROCEDURE	16
5.3 TEST RECEIVER SETUP	18
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
5.5 ENVIRONMENTAL CONDITIONS	18
5.6 SUMMARY OF TEST RESULTS/PLOTS	18
6. OCCUPIED BANDWIDTH	25
6.1 STANDARD APPLICABLE	25
6.2 TEST PROCEDURE	25
6.3 ENVIRONMENTAL CONDITIONS	25
6.4 SUMMARY OF TEST RESULTS/PLOTS	25
APPENDIX PHOTOGRAPHS	27

Report version

Version No.	Date of issue	Description
Rev.00	2024-03-31	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	10W Wireless UnderDesk Charging Pad
Trade Name:	EATON Tripp Lite Series
Model No.:	U280-Q01FL-UD
Adding Model(s):	/
Rated Voltage:	Input: 24V-29V
Rated Current:	Input : 1A
Rated Power:	Wireless Output : 5W, 10W Total Output: 10W Max
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	115~205kHz
Antenna Type:	Coil Antenna

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.207: Conducted limits.

FCC Rules Part 15.209: Radiated emission limits; general requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, the equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Output 5W	Input:24V-29V
TM2	Wireless Charging	Output 10W	Input:24V-29V

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	1.15	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	QZT	QZT-2401000	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz ± 3.74 dB
		0.15-30MHz ± 3.34 dB
Radiated Emissions	Radiated	30-200MHz ± 4.52 dB
		0.2-1GHz ± 5.56 dB
		1-6GHz ± 3.84 dB
		6-18GHz ± 3.92 dB

1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2024-03-19	2025-03-18
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-02-24	2025-02-23
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2021-04-09	2024-04-08
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26

WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203 Antenna Requirement	Compliant
§15.207 (a) Conducted Emission	Compliant
§15.209 Radiated Emission	Compliant

N/A: not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a Coil antenna, fulfill the requirement of this section.


4. Conducted Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

4.2 Basic Test Setup Block Diagram

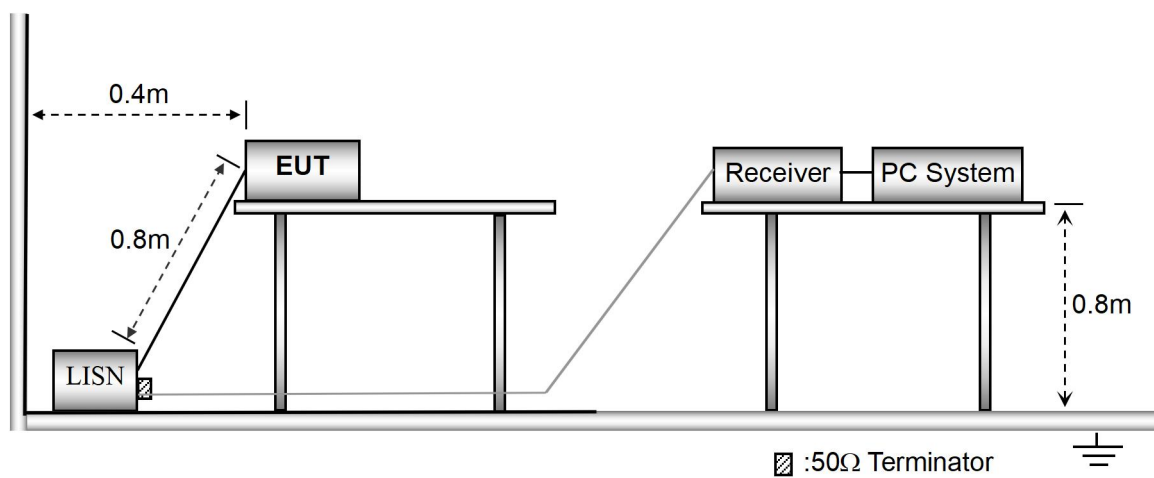


4.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	45 %
ATM Pressure:	1011 mbar


4.4 Summary of Test Results/Plots

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

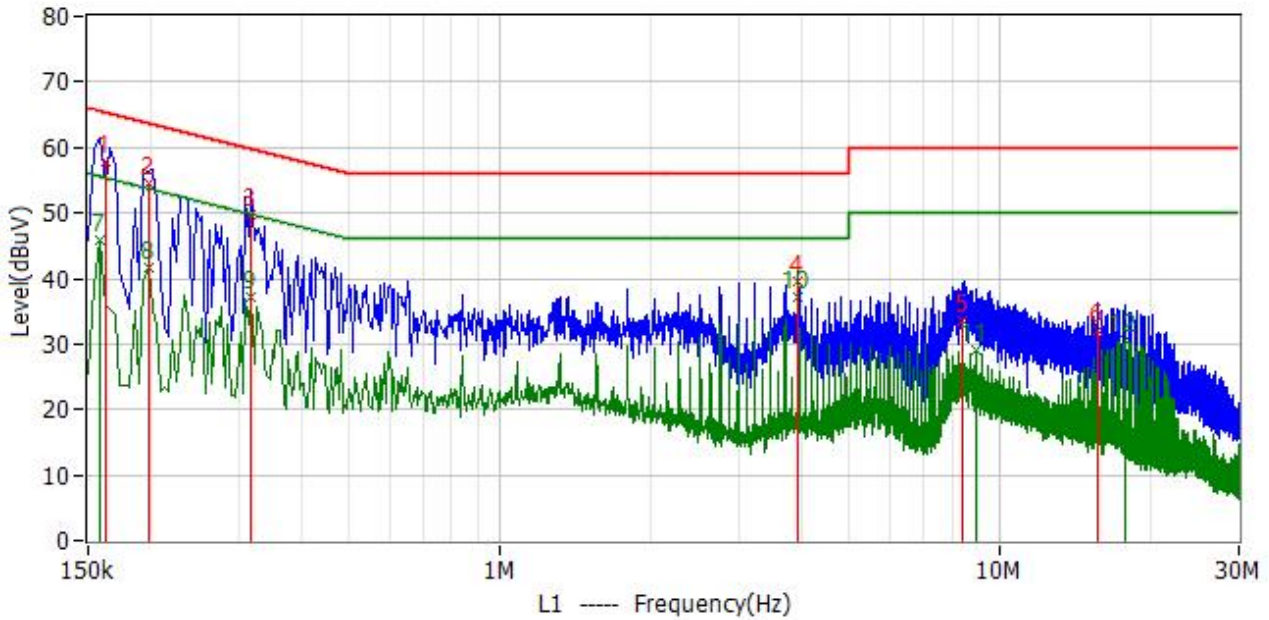

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	162.000kHz	48.0	9.9	57.9	65.4	-7.4	QP
2	198.000kHz	44.8	9.6	54.4	63.7	-9.3	QP
3	318.000kHz	39.6	10.1	49.7	59.8	-10.0	QP
4	3.954MHz	29.6	9.9	39.5	56.0	-16.5	QP
5	8.434MHz	23.9	9.8	33.7	60.0	-26.3	QP
6	15.690MHz	22.4	9.8	32.2	60.0	-27.8	QP
7*	158.000kHz	36.0	9.9	45.9	55.6	-9.7	AV
8*	198.000kHz	31.9	9.6	41.5	53.7	-12.2	AV
9*	318.000kHz	27.2	10.1	37.3	49.8	-12.5	AV
10*	3.954MHz	27.2	9.9	37.1	46.0	-8.9	AV
11*	8.982MHz	19.2	9.8	29.0	50.0	-21.0	AV
12*	17.846MHz	20.6	9.9	30.5	50.0	-19.5	AV

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

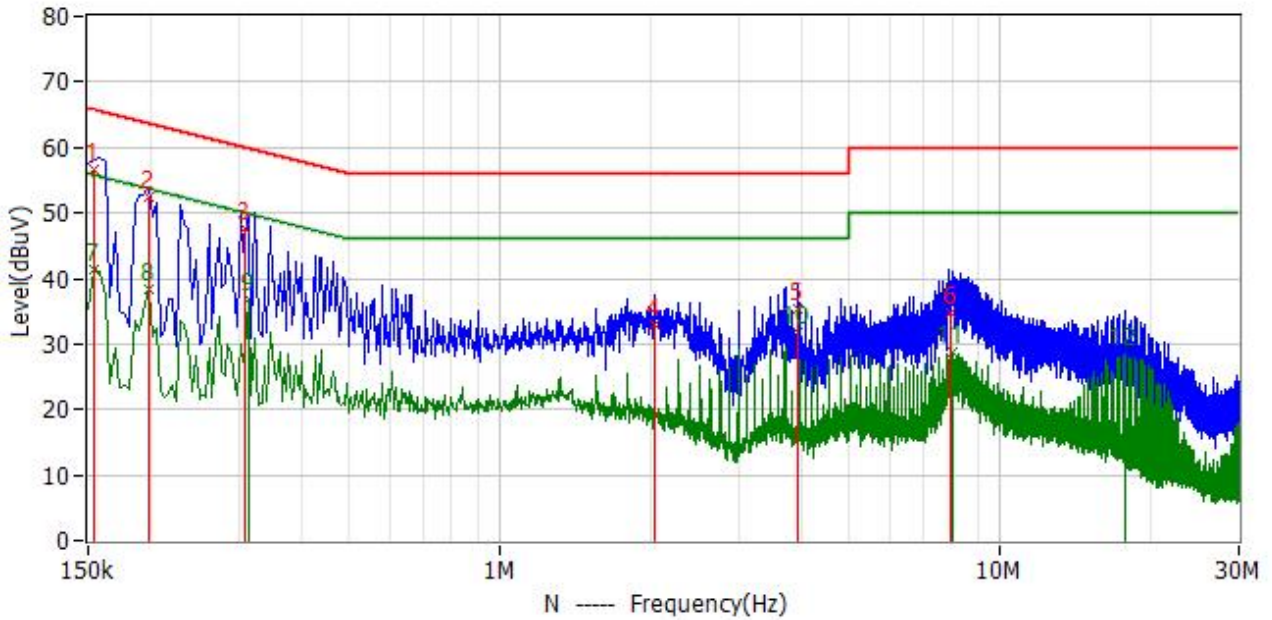

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Delta dB	Detector
1	154.000kHz	46.8	9.7	56.5	65.8	-9.3	QP
2	198.000kHz	42.6	9.7	52.3	63.7	-11.4	QP
3	310.000kHz	37.5	10.0	47.5	60.0	-12.5	QP
4	2.038MHz	23.3	9.7	33.0	56.0	-23.0	QP
5	3.950MHz	25.5	9.8	35.3	56.0	-20.7	QP
6	7.966MHz	24.9	9.8	34.7	60.0	-25.3	QP
7*	154.000kHz	31.7	9.7	41.4	55.8	-14.4	AV
8*	198.000kHz	28.7	9.7	38.4	53.7	-15.3	AV
9*	314.000kHz	26.9	10.0	36.9	49.9	-12.9	AV
10*	3.954MHz	22.0	9.8	31.8	46.0	-14.2	AV
11*	8.022MHz	18.9	9.9	28.8	50.0	-21.2	AV
12*	17.846MHz	18.6	9.8	28.4	50.0	-21.6	AV

5. RADIATED EMISSION

5.1 Standard Applicable


According to 15.209(a), radiated emission limits; general requirements.

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


5.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm. The test setup for emission measurement below 30MHz.

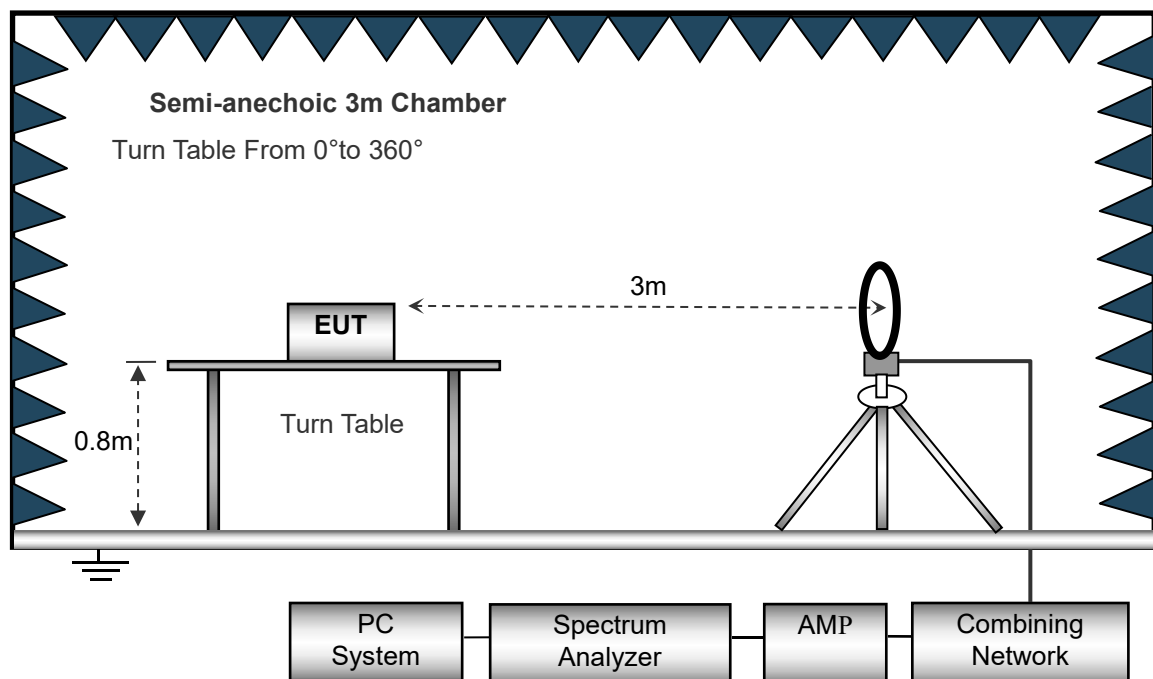

The test setup for emission measurement from 30MHz to 1GHz.

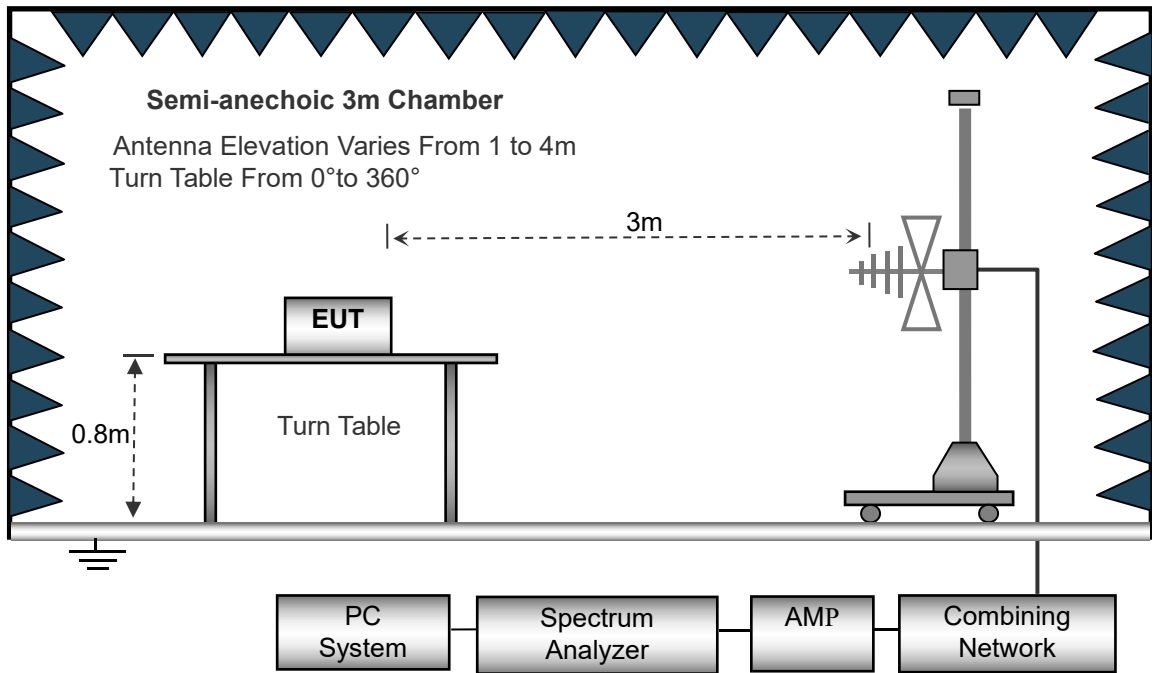

The test setup for emission measurement above 1GHz.

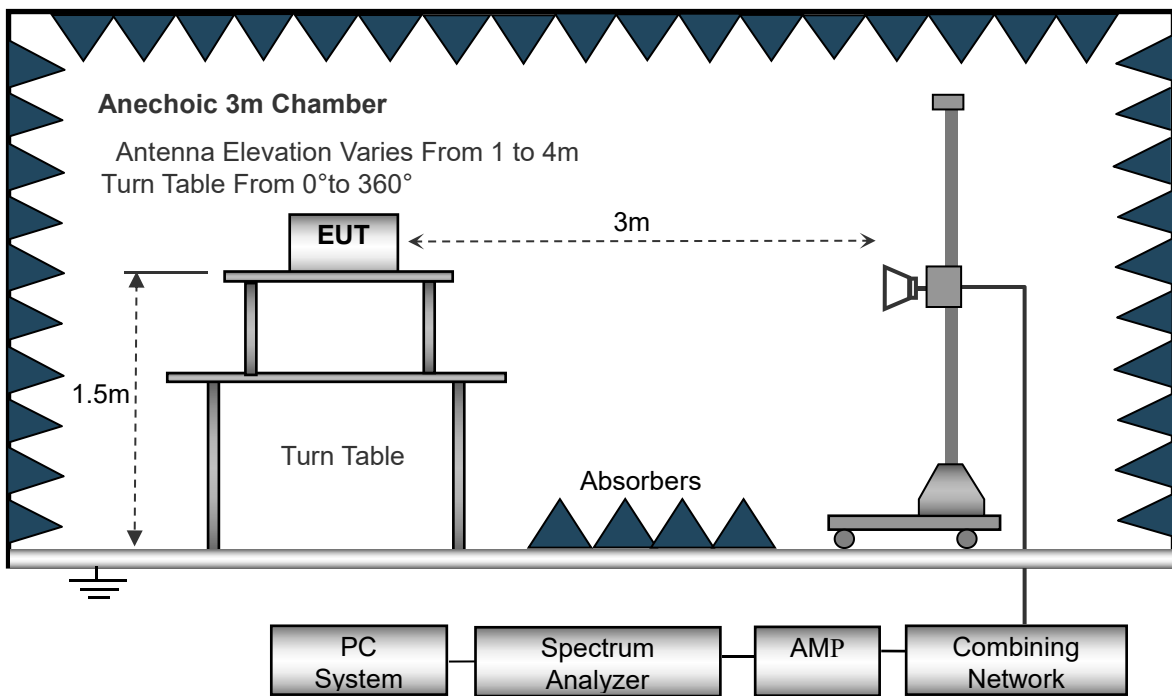

5.3 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10kHz,
 VBW =30kHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120kHz,
 VBW=300kHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.209(a) Limit}$$

5.5 Environmental Conditions


Temperature:	22.5 °C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

5.6 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Below 30MHz

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

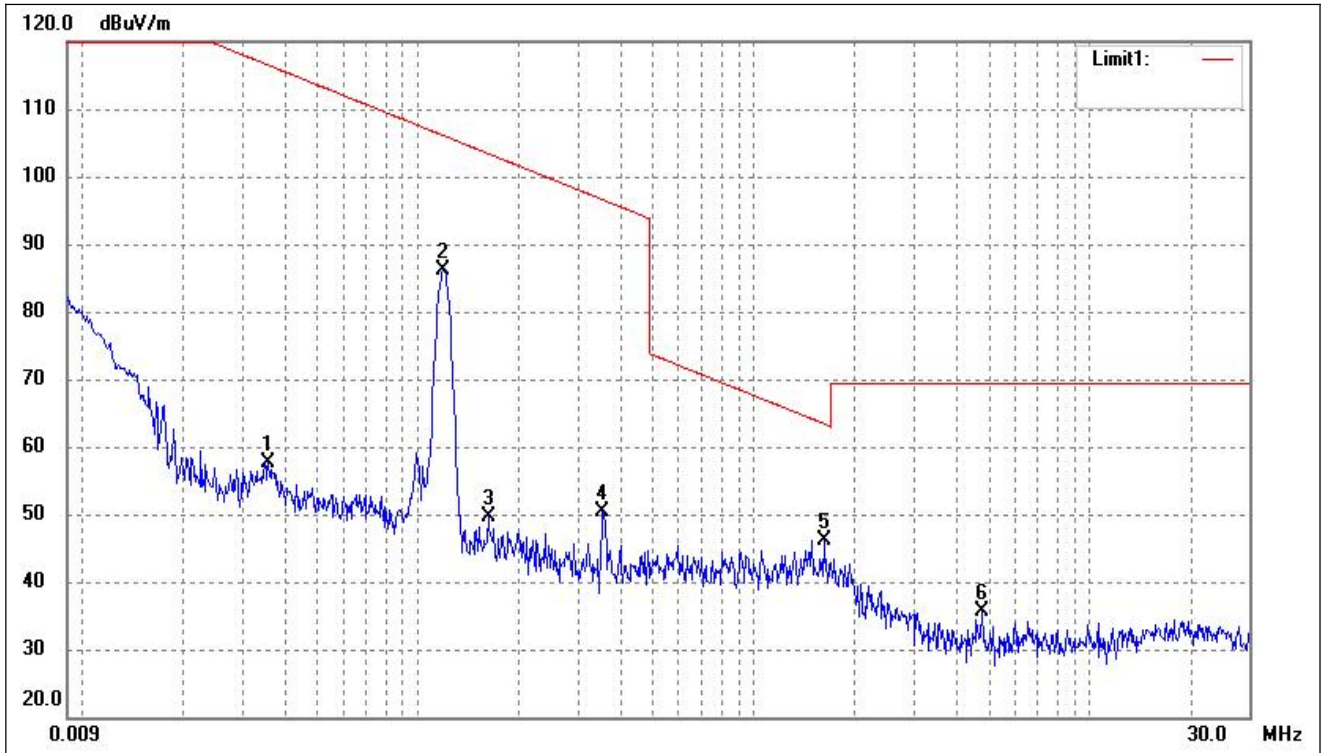

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0357	63.90	-6.20	57.70	116.54	-58.84	-	-	peak
2	0.1187	92.51	-6.50	86.01	106.11	-20.10	-	-	peak
3	0.1616	56.23	-6.48	49.75	103.43	-53.68	-	-	peak
4	0.3549	58.21	-7.75	50.46	96.60	-46.14	-	-	peak
5	1.6177	52.29	-6.10	46.19	63.46	-17.27	-	-	peak
6	4.7968	41.19	-5.56	35.63	69.50	-33.87	-	-	peak


Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

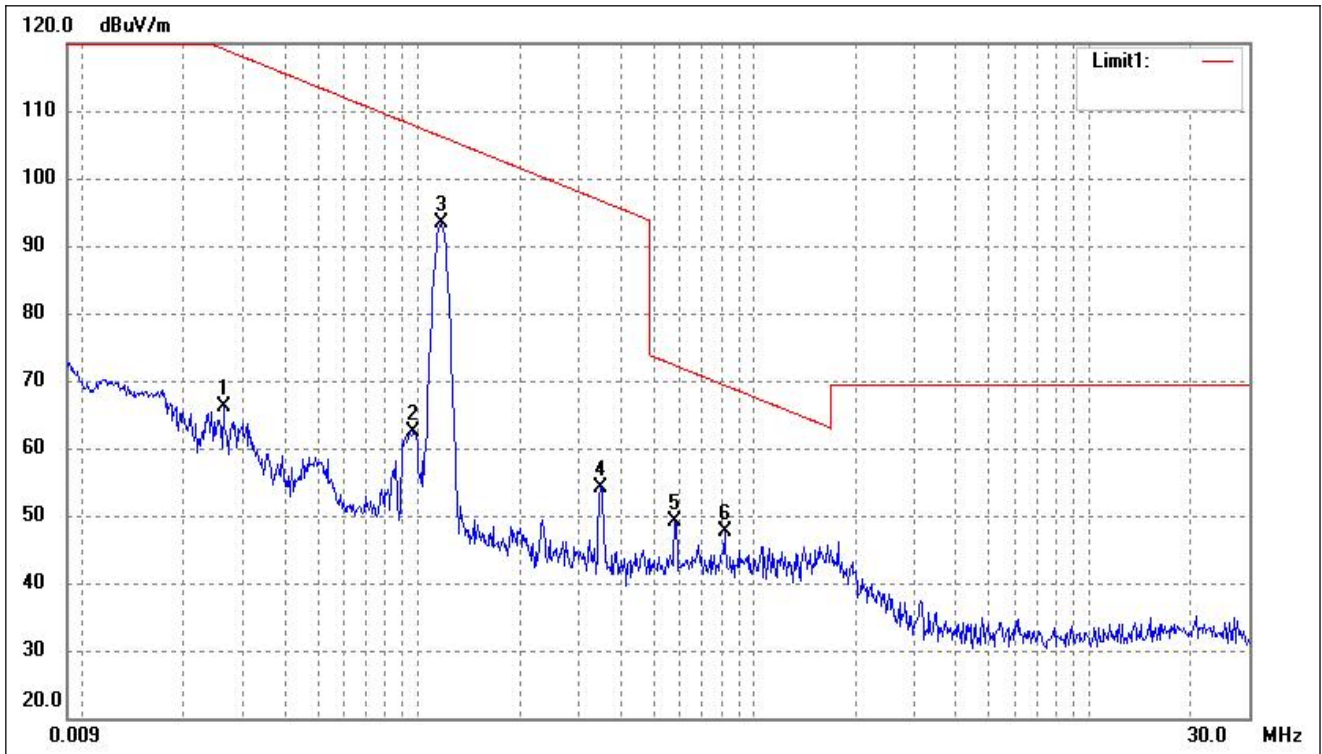

No.	Frequency (MHz)	Reading (dBuA)	Correct (dB)	Result (dBuA)	Limit (dBuA)	Margin (dB)	Degree ()	Height (cm)	Remark
1	0.0263	72.81	-6.70	66.11	119.19	-53.08	-	-	peak
2	0.0969	69.01	-6.58	62.43	107.87	-45.44	-	-	peak
3	0.1168	99.81	-6.51	93.30	106.25	-12.95	-	-	peak
4	0.3492	61.95	-7.76	54.19	96.74	-42.55	-	-	peak
5	0.5821	56.38	-7.17	49.21	72.31	-23.10	-	-	peak
6	0.8184	53.93	-6.36	47.57	69.36	-21.79	-	-	peak


➤ 30MHz-1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

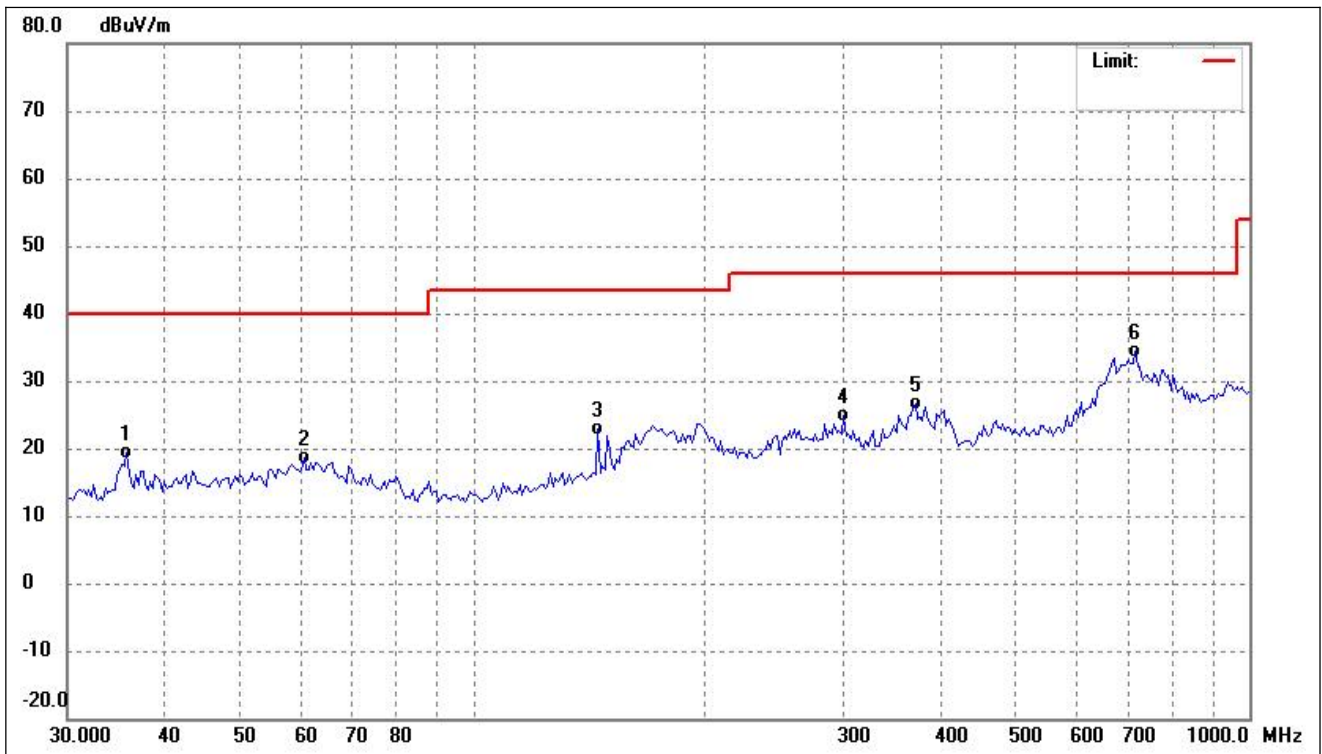


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.7617	32.76	-13.39	19.37	40.00	-20.63	-	-	QP
2	60.5769	31.60	-13.04	18.56	40.00	-21.44	-	-	QP
3	144.7899	35.90	-13.03	22.87	43.50	-20.63	-	-	QP
4	300.6988	37.15	-12.24	24.91	46.00	-21.09	-	-	QP
5	371.2679	37.30	-10.57	26.73	46.00	-19.27	-	-	QP
6	713.6917	39.12	-4.84	34.28	46.00	-11.72	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

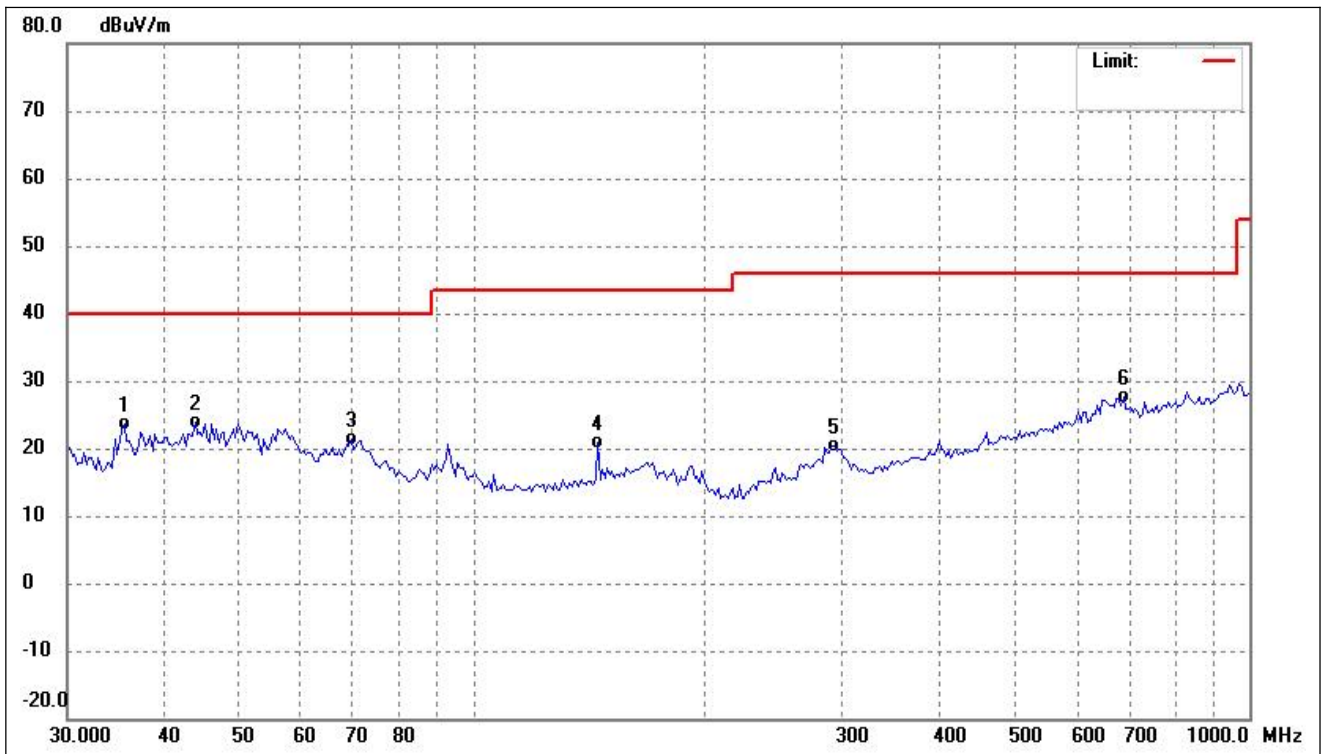


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.5112	37.18	-13.44	23.74	40.00	-16.26	-	-	QP
2	43.8452	36.44	-12.48	23.96	40.00	-16.04	-	-	QP
3	69.7179	36.12	-14.71	21.41	40.00	-18.59	-	-	QP
4	144.7899	34.03	-13.03	21.00	43.50	-22.50	-	-	QP
5	292.3643	32.97	-12.52	20.45	46.00	-25.55	-	-	QP
6	689.0510	32.68	-5.16	27.52	46.00	-18.48	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

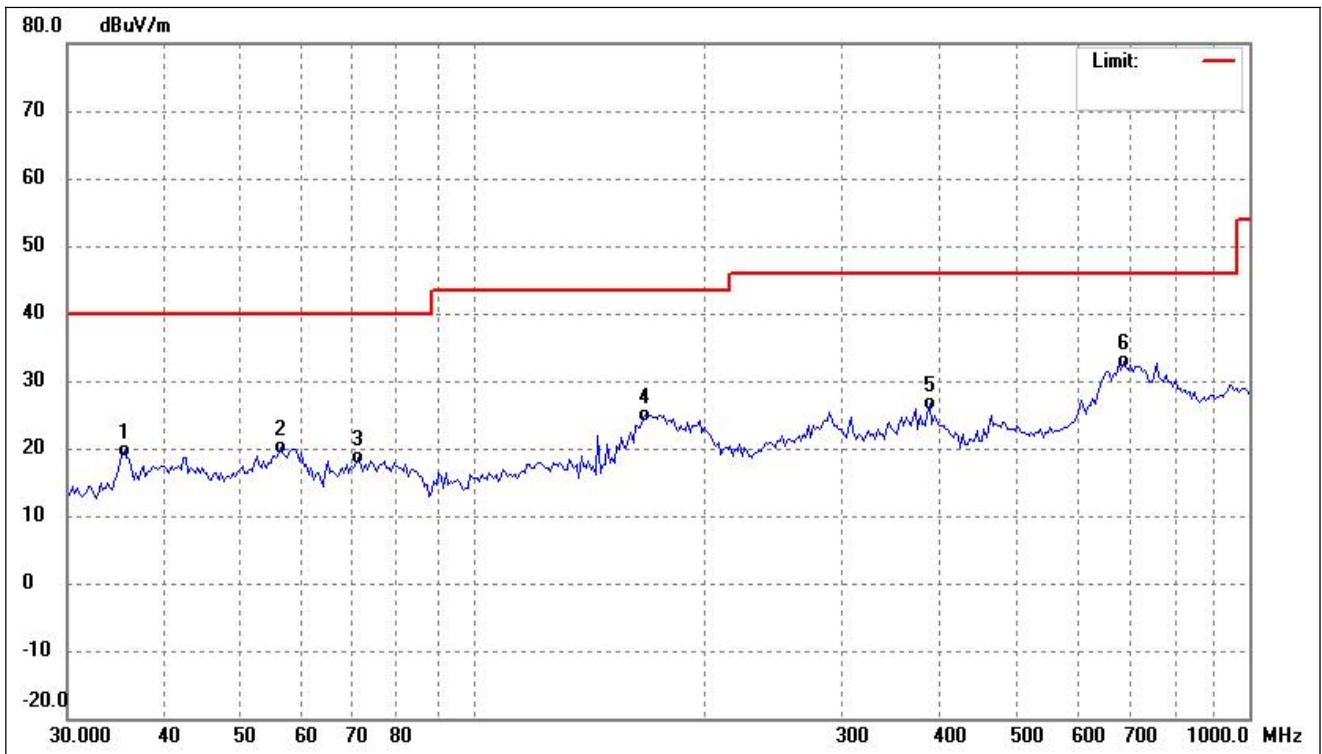

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.5112	33.16	-13.44	19.72	40.00	-20.28	-	-	QP
2	56.4662	32.79	-12.72	20.07	40.00	-19.93	-	-	QP
3	71.2033	33.75	-15.03	18.72	40.00	-21.28	-	-	QP
4	166.6385	37.79	-12.79	25.00	43.50	-18.50	-	-	QP
5	387.2565	36.94	-10.22	26.72	46.00	-19.28	-	-	QP
6	689.0510	37.97	-5.16	32.81	46.00	-13.19	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

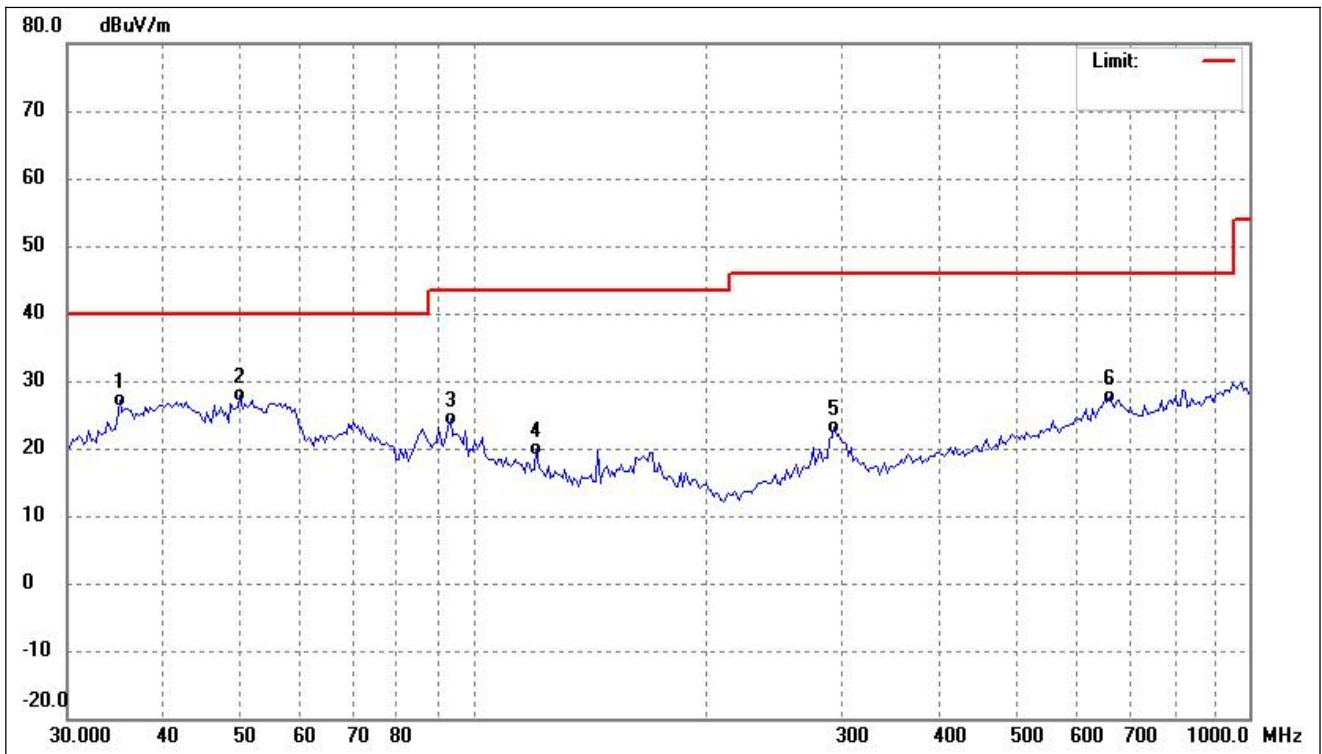

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.0157	40.65	-13.55	27.10	40.00	-12.90	-	-	QP
2	50.1080	39.88	-12.09	27.79	40.00	-12.21	-	-	QP
3	93.6532	41.20	-16.88	24.32	43.50	-19.18	-	-	QP
4	120.6118	34.31	-14.49	19.82	43.50	-23.68	-	-	QP
5	292.3643	35.55	-12.52	23.03	46.00	-22.97	-	-	QP
6	660.6025	32.97	-5.28	27.69	46.00	-18.31	-	-	QP

Remark: '- 'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

6. Occupied Bandwidth

6.1 Standard Applicable

According to 15.215,20dB emission bandwidth.

6.2 Test Procedure

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.


6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Test mode	Test Channel(kHz)	20dB Bandwidth(Hz)
TM1	119.054	27.00
TM2	117.654	27.00

Please refer to the attached plots.

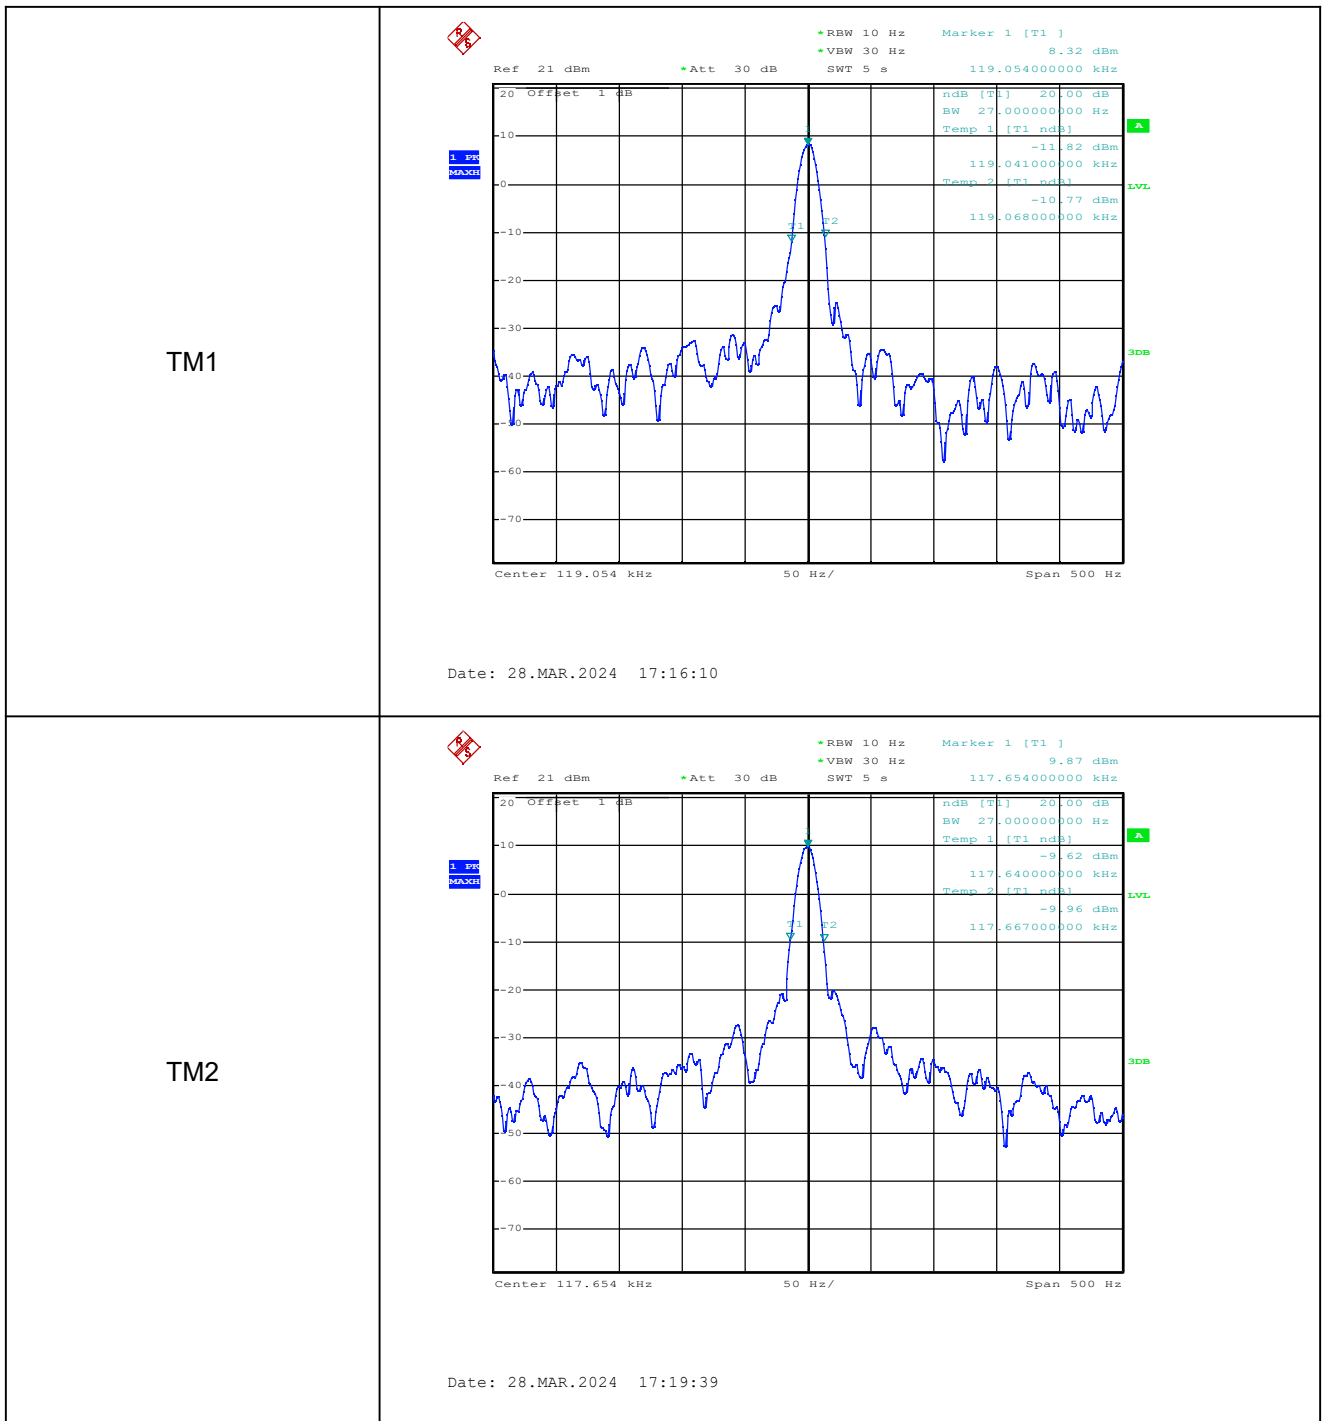

Note: The RBW of the analyzer measuring Bandwidth cannot be adjusted to 1%-5% OBW, the RBW of the test setting is the closest value.

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****