

# TEST REPORT

Reference No..... : WTX21X06057037W-2  
FCC ID ..... : 2AVFE-HTCHC06  
Applicant ..... : Fortune Ship International Industrial Limited  
Address ..... : Unit C, 24/F, Golden Bear Industrial Centre, 66-82 Chai Wan Kok Street,  
Tsuen Wan NT, HONGKONG  
Product Name ..... : Mobile phone holder  
Test Model. .... : HTC HC06  
Standards ..... : KDB 680106 D01 V03  
Date of Receipt sample .... : Jun. 11, 2021  
Date of Test..... : Jun. 11, 2021 to Jun. 22, 2021  
Date of Issue ..... : Jun. 22, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309

Tested by:



Jason Su / Project Engineer

Reviewed By:

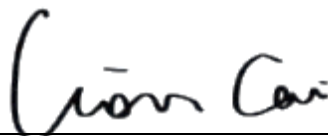

Lion Cai / RF Manager

Approved & Authorized By:



Silin Chen / Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
    1.2 TEST EQUIPMENT LIST AND DETAILS .....5  
**2. RF EXPOSURE TEST REPORT .....6**  
    2.1 STANDARD APPLICABLE.....6  
    2.2 TEST CONDITIONS .....6  
    2.3 TEST PROCEDURE.....7  
    2.4 TEST RESULT.....7  
    2.5 TEST SETUP PHOTOS.....10  
**APPENDIX PHOTOGRAPHS.....11**

**Report version**

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00      | Jun. 22, 2021 | Original    |
| /           | /             | /           |

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Fortune Ship International Industrial Limited  
 Address of applicant: Unit C, 24/F, Golden Bear Industrial Centre, 66-82  
 Chai Wan Kok Street, Tsuen Wan NT, HONGKONG

Manufacturer: Fortune Ship International Industrial Limited  
 Address of manufacturer: Unit C, 24/F, Golden Bear Industrial Centre, 66-82  
 Chai Wan Kok Street, Tsuen Wan NT, HONGKONG

| General Description of EUT   |                     |
|--|---------------------|
| Product Name:  | Mobile phone holder |
| Trade Name:  | HTC                 |
| Model No.:   | HTC HC06            |
| Adding Model(s):   | /                   |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> |                     |

| Technical Characteristics of EUT |                               |
|----------------------------------|-------------------------------|
| Frequency Range:                 | 110~205kHz                    |
| Modulation Type:                 | FSK                           |
| Antenna Type:                    | Coil Antenna                  |
| Rated Voltage:                   | Input: DC5V / DC9V /DC12V     |
| Rated Current:                   | Input:2A                      |
| Rated Power:                     | Output: 5W / 7.5W / 10W / 15W |

**1.2 Test Equipment List and Details**

| <b>Description</b>       | <b>Manufacturer</b> | <b>Model</b> | <b>Serial No.</b> | <b>Cal Date</b> | <b>Due Date</b> |
|--------------------------|---------------------|--------------|-------------------|-----------------|-----------------|
| MPE Measuring Instrument | Narda               | ELT-400      | M-0155/M-0170     | 2020-07-15      | 2021-07-14      |
| Broadband Field Meter    | Narda               | NBM-520      | D-1699            | 2020-06-21      | 2021-06-20      |

## 2. RF Exposure Test Report

### 2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


| Frequency range (MHz)  | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposure</b>         |                               |                               |                                     |                          |
| 0.3-3.0  | 614                           | 1.63                          | *100                                | 6                        |
| 3.0-30   | 1842/f                        | 4.89/f                        | *900/f <sup>2</sup>                 | 6                        |
| 30-300   | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1,500  |                               |                               | f/300                               | 6                        |
| 1,500-100,000  |                               |                               | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34   | 614                           | 1.63                          | *100                                | 30                       |
| 1.34-30  | 824/f                         | 2.19/f                        | *180/f <sup>2</sup>                 | 30                       |
| 30-300   | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1,500  |                               |                               | f/1500                              | 30                       |
| 1,500-100,000  |                               |                               | 1.0                                 | 30                       |

f = frequency in MHz \* = Plane-wave equivalent power density

### 2.2 Test Conditions

| Test Mode                    | Description       | Remark                    |
|------------------------------|-------------------|---------------------------|
| TM1                          | Wireless Charging | Input DC5V2A; Output 5W   |
| TM2                          | Wireless Charging | Input DC9V2A; Output 10W  |
| TM3                          | Wireless Charging | Input DC12V2A; Output 15W |
| TM4                          | Wireless Charging | Input DC5V2A; Output 7.5W |
| <b>Measurement Distance:</b> |                   |                           |
|                              |                   | 15 cm                     |

## 2.3 Test Procedure

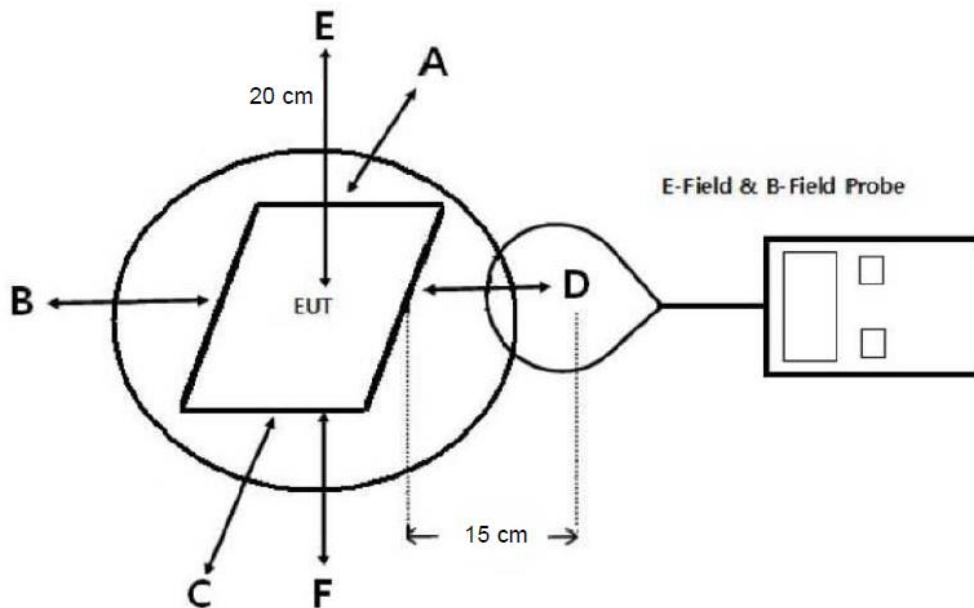

- The measurement probe was placed at test distance(15 cm for A,B,C,D,F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points(A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

## 2.4 Test Result

The EUT dose comply with item 5.2 of KDB 680106 D01V03

- Power transfer frequency is less than 1 MHz  
Yes, the device operate in the frequency range from 110kHz to 205kHz.
- Output power from each primary coil is less than or equal to 15 watts  
Yes, the maximum output power of the primary coil is less than 15W.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils  
Yes, the client device includes only single primary coils.
- Client device is inserted in or placed directly in contact with the transmitter  
Yes, Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, It is mobile exposure conditions only.

6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1, TM2, TM3, TM4 list, and the coils can't transmitted simultaneous.

*Test Mode: TM1*

| <b>Electric Field Emissions</b> |                            |                   |                        |
|---------------------------------|----------------------------|-------------------|------------------------|
| <b>Test Position</b>            | <b>Measure Value (V/m)</b> | <b>Limit(V/m)</b> | <b>50% Limit (V/m)</b> |
| Top                             | 21                         | 614               | 307                    |
| Bottom                          | 22                         | 614               | 307                    |
| Side 1                          | 21                         | 614               | 307                    |
| Side 2                          | 20                         | 614               | 307                    |
| Side 3                          | 23                         | 614               | 307                    |
| Side 4                          | 21                         | 614               | 307                    |
| <b>Magnetic Field Emissions</b> |                            |                   |                        |
| <b>Test Position</b>            | <b>Measure Value (A/m)</b> | <b>Limit(A/m)</b> | <b>50% Limit (A/m)</b> |
| Top                             | 0.16                       | 1.63              | 0.815                  |
| Bottom                          | 0.15                       | 1.63              | 0.815                  |
| Side 1                          | 0.13                       | 1.63              | 0.815                  |
| Side 2                          | 0.14                       | 1.63              | 0.815                  |
| Side 3                          | 0.14                       | 1.63              | 0.815                  |
| Side 4                          | 0.16                       | 1.63              | 0.815                  |



*Test Mode: TM2*

| <b>Electric Field Emissions</b> |                            |                   |                        |
|---------------------------------|----------------------------|-------------------|------------------------|
| <b>Test Position</b>            | <b>Measure Value (V/m)</b> | <b>Limit(V/m)</b> | <b>50% Limit (V/m)</b> |
| Top                             | 19                         | 614               | 307                    |
| Bottom                          | 18                         | 614               | 307                    |
| Side 1                          | 18                         | 614               | 307                    |
| Side 2                          | 19                         | 614               | 307                    |
| Side 3                          | 17                         | 614               | 307                    |
| Side 4                          | 16                         | 614               | 307                    |
| <b>Magnetic Field Emissions</b> |                            |                   |                        |
| <b>Test Position</b>            | <b>Measure Value (A/m)</b> | <b>Limit(A/m)</b> | <b>50% Limit (A/m)</b> |
| Top                             | 0.21                       | 1.63              | 0.815                  |
| Bottom                          | 0.22                       | 1.63              | 0.815                  |
| Side 1                          | 0.20                       | 1.63              | 0.815                  |
| Side 2                          | 0.23                       | 1.63              | 0.815                  |
| Side 3                          | 0.22                       | 1.63              | 0.815                  |
| Side 4                          | 0.24                       | 1.63              | 0.815                  |

*Test Mode: TM3*


| <b>Electric Field Emissions</b> |                            |                   |                        |
|---------------------------------|----------------------------|-------------------|------------------------|
| <b>Test Position</b>            | <b>Measure Value (V/m)</b> | <b>Limit(V/m)</b> | <b>50% Limit (V/m)</b> |
| Top                             | 29                         | 614               | 307                    |
| Bottom                          | 27                         | 614               | 307                    |
| Side 1                          | 28                         | 614               | 307                    |
| Side 2                          | 28                         | 614               | 307                    |
| Side 3                          | 26                         | 614               | 307                    |
| Side 4                          | 27                         | 614               | 307                    |
| <b>Magnetic Field Emissions</b> |                            |                   |                        |
| <b>Test Position</b>            | <b>Measure Value (A/m)</b> | <b>Limit(A/m)</b> | <b>50% Limit (A/m)</b> |
| Top                             | 0.26                       | 1.63              | 0.815                  |
| Bottom                          | 0.27                       | 1.63              | 0.815                  |
| Side 1                          | 0.29                       | 1.63              | 0.815                  |
| Side 2                          | 0.27                       | 1.63              | 0.815                  |
| Side 3                          | 0.28                       | 1.63              | 0.815                  |
| Side 4                          | 0.28                       | 1.63              | 0.815                  |

Test Mode: TM4

| Electric Field Emissions |                     |            |                 |
|--------------------------|---------------------|------------|-----------------|
| Test Position            | Measure Value (V/m) | Limit(V/m) | 50% Limit (V/m) |
| Top                      | 23                  | 614        | 307             |
| Bottom                   | 23                  | 614        | 307             |
| Side 1                   | 25                  | 614        | 307             |
| Side 2                   | 22                  | 614        | 307             |
| Side 3                   | 24                  | 614        | 307             |
| Side 4                   | 24                  | 614        | 307             |
| Magnetic Field Emissions |                     |            |                 |
| Test Position            | Measure Value (A/m) | Limit(A/m) | 50% Limit (A/m) |
| Top                      | 0.19                | 1.63       | 0.815           |
| Bottom                   | 0.18                | 1.63       | 0.815           |
| Side 1                   | 0.21                | 1.63       | 0.815           |
| Side 2                   | 0.20                | 1.63       | 0.815           |
| Side 3                   | 0.18                | 1.63       | 0.815           |
| Side 4                   | 0.18                | 1.63       | 0.815           |

Note: this EUT was tested in 3 orthogonal positions and the worst case position (D point) data was reported.

## 2.5 Test Setup photos

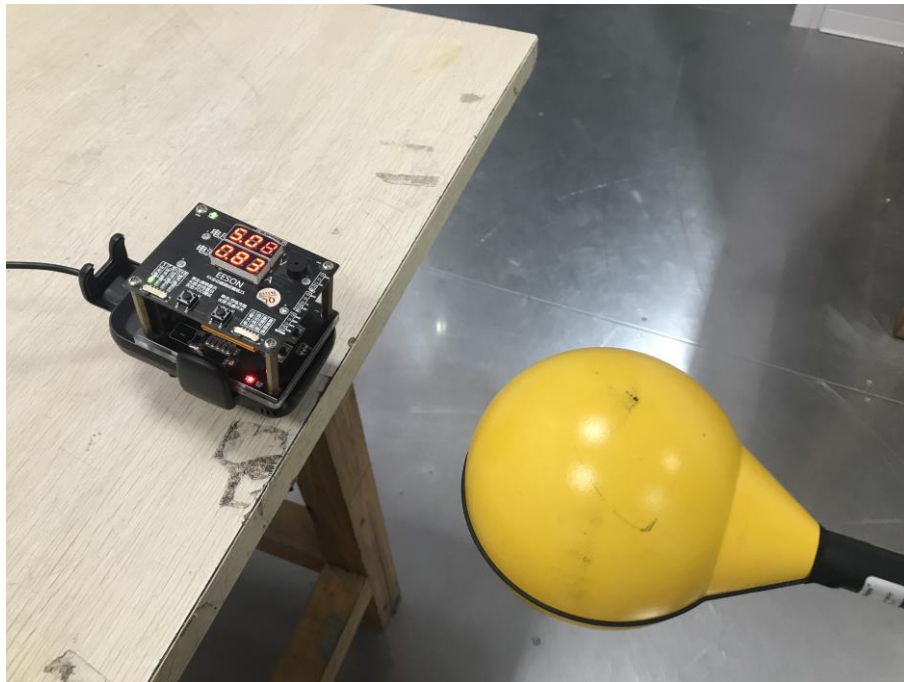

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***