

FCC Part 22H & 24E & 27 Measurement and Test Report

For

E-Z-GO Canada Ltd.d/b/a TEXTRON FLEET MANAGMENT

#1006 - 7495 132nd Street, Surrey, BC, V3W 1J8, Canada

FCC ID: 2AVII-TFMS

FCC Rules: FCC Part 22,FCC Part 24E, FCC Part 27

Product Description: TKV GPS

Tested Model: TFM10S

Report No.: WTX19X12086460W

Sample Receipt Date: 2019-12-11

Tested Date: 2019-12-11 to 2019-12-19

Issued Date: 2019-12-19

Tested By: Jason Su / Engineer



Reviewed By: Silin Chen / EMC Manager



Approved & Authorized By: Jandy So / PSQ Manager



Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
1.5 EUT SETUP AND TEST MODE.....	7
1.6 MEASUREMENT UNCERTAINTY.....	8
1.7 TEST EQUIPMENT LIST AND DETAILS.....	9
2. SUMMARY OF TEST RESULTS.....	11
3. RF EXPOSURE.....	12
3.1 STANDARD APPLICABLE.....	12
3.2 TEST RESULT.....	12
4. RF OUTPUT POWER.....	13
4.1 STANDARD APPLICABLE.....	13
4.2 TEST PROCEDURE.....	13
4.3 SUMMARY OF TEST RESULTS/PLOTS.....	13
5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	25
5.1 STANDARD APPLICABLE.....	25
5.2 TEST PROCEDURE.....	25
5.3 SUMMARY OF TEST RESULTS.....	25
6. EMISSION BANDWIDTH.....	26
6.1 STANDARD APPLICABLE.....	26
6.2 TEST PROCEDURE.....	26
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	26
7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....	27
7.1 STANDARD APPLICABLE.....	27
7.2 TEST PROCEDURE.....	28
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	28
8. SPURIOUS RADIATED EMISSIONS.....	29
8.1 STANDARD APPLICABLE.....	29
8.2 TEST PROCEDURE.....	30
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	30
9. FREQUENCY STABILITY.....	49
9.1 STANDARD APPLICABLE.....	49
9.2 TEST PROCEDURE.....	49
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	49



Report version

Version No.	Date of issue	Description
Rev.00	2019-12-19	Original
/	/	/


1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: E-Z-GO Canada Ltd.d/b/a TEXTRON FLEET MANAGEMENT
Address of applicant: #1006 - 7495 132nd Street, Surrey, BC, V3W 1J8, Canada

Manufacturer: SHENZHEN YITOA DIGITAL APPLIANCE CO.,LTD
Address of manufacturer: 7F-2 Unit,2Building,Financial Base,No.8 Kefa Road,Nanshan District,Shenzhen

General Description of EUT:	
Product Name:	TKV GPS
Brand Name:	
Model No.:	TFM10S
Adding Model(s):	TFM7S
Rated Voltage:	DC6.4V
Battery:	3000mAh
Adapter Model:	/
Software Version:	/
Hardware Version:	/
IMEI:	/
Device Category:	Portable Device
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model TFM10S, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT: Main board	
4G	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 12, 13, 17, 25
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 12: Tx: 699-716MHz, FDD-LTE Band 13: Tx: 777-787MHz, FDD-LTE Band 17: Tx: 704-716MHz FDD-LTE Band 25: Tx: 1850-1915MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 12: Rx: 729-746MHz, FDD-LTE Band 13: Rx: 746-756MHz, FDD-LTE Band 17: Rx: 734-746MHz FDD-LTE Band 25: Rx: 1930-1995MHz,
RF Output Power:	FDD-LTE Band 2: 23.06dBm, FDD-LTE Band 4: 23.66dBm, FDD-LTE Band 5: 23.74dBm, FDD-LTE Band 12: 23.54dBm, FDD-LTE Band 13: 23.29dBm, FDD-LTE Band 17: 23.42dBm FDD-LTE Band 25: 23.29dBm
Type of Emission:	FDD-LTE Band 2: 17M9G7D, 17M9W7D FDD-LTE Band 4: 17M9G7D, 17M9W7D FDD-LTE Band 5: 8M96G7D, 8M95W7D FDD-LTE Band 12: 8M96G7D, 8M95W7D FDD-LTE Band 13: 8M96G7D, 8M97W7D FDD-LTE Band 17: 8M96G7D, 8M96W7D FDD-LTE Band 25: 17M9G7D, 17M9W7D
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: 1.27dBi FDD-LTE Band 4: 1.28dBi, FDD-LTE Band 5: 0.03dBi, FDD-LTE Band 12: -0.87dBi, FDD-LTE Band 13: -0.67dBi, FDD-LTE Band 17:-0.83dBi, FDD-LTE Band 25: 1.27dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Rules Part 22: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Rules Part 24: PUBLIC MOBILE SERVICES

FCC Rules Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03r01: MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26 The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	FDD-LTE Band 2	Low, Middle, High Channels
TM2	FDD-LTE Band 4	Low, Middle, High Channels
TM3	FDD-LTE Band 5	Low, Middle, High Channels
TM4	FDD-LTE Band 12	Low, Middle, High Channels
TM5	FDD-LTE Band 13	Low, Middle, High Channels
TM6	FDD-LTE Band 17	Low, Middle, High Channels
TM7	FDD-LTE Band 25	Low, Middle, High Channels

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2019-04-30	2020-04-29
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2019-04-30	2020-04-29
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2019-04-30	2020-04-29
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2019-04-30	2020-04-29
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2019-04-30	2020-04-29
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2019-04-30	2020-04-29
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1055	RF Limiter	ATTEN	AT-BSF-0820~0920	/	2019-04-30	2020-04-29
SEMT-1056	RF Limiter	ATTEN	AT-BSF-1710~1910	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17



SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1
LTE Test System*	Tonscend	JS1120-1	V2.5

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§1.1307, §2.1091	RF Exposure	Compliant
§22.913(a), §24.232(c), §27.50(b)(c)(d)	RF Output Power	Compliant
§24.51, §27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §24.238(a), §27.53(c)(f)(g)(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a), §27.53(c)(f)(g)(h)	Spurious Radiation Emissions	Compliant
§2.917(a), §24.238(a), §27.53(c)(f)(g)(h)	Out of Band Emissions	Compliant
§22.355, §24.235, §27.54	Frequency Stability	Compliant



3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and§2.1091, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure report.

4. RF Output Power

4.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.


According to §27.50(b) (10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

According to §27.50(c)(10), portable stations (hand-held devices) in the 698-746 MHz band are limited to 3 watts ERP.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

4.2 Test Procedure

- Conducted output power test method:

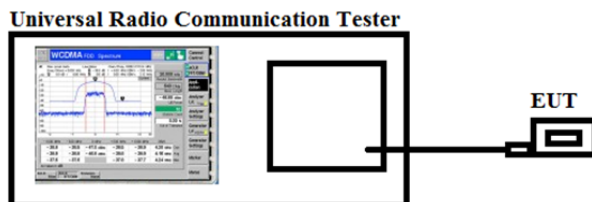

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

4.3 Summary of Test Results/Plots

Max. Radiated Power:

➤ FDD-LTE Band 2

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.48	<33.00	PASS
		H	14.52		
	MCH	V	20.35		PASS
		H	14.01		
	HCH	V	20.19		PASS
		H	14.37		
16QAM	LCH	V	19.56	<33.00	PASS
		H	13.02		
	MCH	V	19.39		PASS
		H	13.11		
	HCH	V	19.56		PASS
		H	13.17		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.13	<33.00	PASS
		H	14.47		
	MCH	V	20.65		PASS
		H	14.35		
	HCH	V	20.17		PASS
		H	14.05		
16QAM	LCH	V	20.69	<33.00	PASS
		H	14.21		
	MCH	V	20.36		PASS
		H	14.28		
	HCH	V	20.74		PASS
		H	14.31		
Channel Bandwidth: 5 MHz					

Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.65	<33.00	PASS
		H	13.02		
	MCH	V	19.32		PASS
		H	13.14		
	HCH	V	19.77		PASS
		H	13.45		
16QAM	LCH	V	19.31	<33.00	PASS
		H	13.05		
	MCH	V	19.08		PASS
		H	13.25		
	HCH	V	19.39		PASS
		H	13.14		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.87	<33.00	PASS
		H	12.41		
	MCH	V	19.82		PASS
		H	12.35		
	HCH	V	19.63		PASS
		H	12.78		
16QAM	LCH	V	19.42	<33.00	PASS
		H	12.35		
	MCH	V	19.76		PASS
		H	12.05		
	HCH	V	19.48		PASS
		H	12.36		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.63	<33.00	PASS
		H	12.41		
	MCH	V	19.48		PASS
		H	12.65		
	HCH	V	19.59		PASS
		H	12.28		
16QAM	LCH	V	19.31	<33.00	PASS
		H	12.17		
	MCH	V	19.87		PASS
		H	12.92		
	HCH	V	19.32		PASS

		H	12.63		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.36	<33.00	PASS
		H	13.41		
	MCH	V	20.47		PASS
		H	13.05		
	HCH	V	20.14		PASS
		H	13.28		
16QAM	LCH	V	20.74	<33.00	PASS
		H	13.37		
	MCH	V	20.02		PASS
		H	13.52		
	HCH	V	20.31		PASS
		H	13.14		

>

> FDD-LTE Band 4

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.11	<30.00	PASS
		H	14.41		
	MCH	V	20.31		PASS
		H	14.27		
	HCH	V	20.42		PASS
		H	14.36		
16QAM	LCH	V	20.28	<30.00	PASS
		H	14.28		
	MCH	V	20.16		PASS
		H	14.14		
	HCH	V	20.13		PASS
		H	14.37		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.28	<30.00	PASS
		H	12.47		
	MCH	V	19.74		PASS
		H	12.36		
	HCH	V	19.35		PASS
		H	13.02		
16QAM	LCH	V	19.87	<30.00	PASS

		H	13.11		
	MCH	V	19.05		PASS
		H	13.24		
	HCH	V	19.97		PASS
		H	13.27		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.35	<30.00	PASS
		H	12.78		
	MCH	V	19.47		PASS
		H	12.73		
	HCH	V	19.30		PASS
		H	12.62		
16QAM	LCH	V	20.74	<30.00	PASS
		H	13.05		
	MCH	V	20.15		PASS
		H	13.17		
	HCH	V	20.37		PASS
		H	13.25		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.42	<30.00	PASS
		H	14.35		
	MCH	V	20.11		PASS
		H	14.52		
	HCH	V	20.36		PASS
		H	14.14		
16QAM	LCH	V	20.17	<30.00	PASS
		H	14.36		
	MCH	V	20.22		PASS
		H	14.57		
	HCH	V	20.26		PASS
		H	14.74		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.64	<30.00	PASS
		H	14.20		
	MCH	V	20.17		PASS
		H	14.12		
	HCH	V	20.25		PASS

Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
16QAM	LCH	H	14.34	<30.00	PASS
		V	20.69		
	MCH	H	14.29		PASS
		V	20.74		
	HCH	H	14.47		PASS
		V	20.13		
		H	14.36		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.69	<30.00	PASS
		H	14.35		
	MCH	V	20.74		PASS
		H	14.05		
	HCH	V	20.32		PASS
		H	14.11		
16QAM	LCH	V	20.46	<30.00	PASS
		H	14.28		
	MCH	V	20.12		PASS
		H	14.38		
	HCH	V	20.32		PASS
		H	14.42		

>

> FDD-LTE Band 5

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.62	<38.45	PASS
		H	14.39		
	MCH	V	20.17		PASS
		H	14.57		
	HCH	V	20.51		PASS
		H	14.69		
16QAM	LCH	V	20.36	<38.45	PASS
		H	14.05		
	MCH	V	20.79		PASS
		H	14.13		
	HCH	V	20.46		PASS
		H	14.25		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.31	<38.45	PASS

	MCH	H	14.02		PASS
		V	20.17		
	HCH	H	14.25		PASS
		V	20.56		
16QAM	LCH	H	14.31	<38.45	PASS
		V	20.55		
	MCH	H	19.42		PASS
		V	20.47		
	HCH	H	19.34		PASS
		V	20.33		
		H	19.71		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.57	<38.45	PASS
		H	19.34		
	MCH	V	20.59		PASS
		H	19.58		
	HCH	V	20.53		PASS
		H	19.68		
16QAM	LCH	V	20.47	<38.45	PASS
		H	19.47		
	MCH	V	20.61		PASS
		H	19.36		
	HCH	V	20.12		PASS
		H	19.64		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.68	<38.45	PASS
		H	13.52		
	MCH	V	19.47		PASS
		H	13.21		
	HCH	V	20.06		PASS
		H	14.05		
16QAM	LCH	V	19.87	<38.45	PASS
		H	13.73		
	MCH	V	19.35		PASS
		H	13.54		
	HCH	V	19.63		PASS
		H	13.05		

➤

➤ FDD-LTE Band 12

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.39	<34.77	PASS
		H	14.54		
	MCH	V	20.14		PASS
		H	14.31		
	HCH	V	20.87		PASS
		H	14.05		
16QAM	LCH	V	20.23	<34.77	PASS
		H	14.22		
	MCH	V	20.25		PASS
		H	14.77		
	HCH	V	20.17		PASS
		H	14.32		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	19.75	<34.77	PASS
		H	13.27		
	MCH	V	19.32		PASS
		H	13.52		
	HCH	V	19.57		PASS
		H	13.39		
16QAM	LCH	V	19.69	<34.77	PASS
		H	13.51		
	MCH	V	19.75		PASS
		H	13.47		
	HCH	V	19.05		PASS
		H	13.38		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.11	<34.77	PASS
		H	14.74		
	MCH	V	20.36		PASS
		H	14.36		
	HCH	V	20.42		PASS
		H	14.02		
16QAM	LCH	V	20.79	<34.77	PASS
		H	15.11		
	MCH	V	19.97		PASS
		H	13.05		

Modulation	Channel	Channel Bandwidth: 10 MHz		Limit (dBm)	Verdict
		Antenna Polar	E.i.r.p [dBm]		
	HCH	V	19.78		PASS
		H	13.87		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.13	<34.77	PASS
		H	14.35		
	MCH	V	20.46		PASS
		H	14.11		
	HCH	V	20.85		PASS
		H	14.27		
16QAM	LCH	V	20.64	<34.77	PASS
		H	14.39		
	MCH	V	20.24		PASS
		H	14.80		
	HCH	V	20.36		PASS
		H	14.25		

➤

➤ FDD-LTE Band 13

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.74	<34.77	PASS
		H	14.07		
	MCH	V	20.13		PASS
		H	14.31		
	HCH	V	20.53		PASS
		H	14.15		
16QAM	LCH	V	20.48	<34.77	PASS
		H	14.57		
	MCH	V	20.97		PASS
		H	14.17		
	HCH	V	20.76		PASS
		H	14.39		

Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.r.p [dBm]	Limit (dBm)	Verdict
QPSK	MCH	V	19.86	<34.77	PASS
		H	13.05		
16QAM	MCH	V	19.22	<34.77	PASS
		H	13.24		

➤

➤ FDD-LTE Band 17

Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.64	<34.77	PASS
		H	13.51		
	MCH	V	20.53		PASS
		H	13.04		
	HCH	V	20.41		PASS
		H	13.54		
16QAM	LCH	V	20.46	<34.77	PASS
		H	14.17		
	MCH	V	20.62		PASS
		H	14.21		
	HCH	V	20.43		PASS
		H	14.26		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.76	<34.77	PASS
		H	13.87		
	MCH	V	20.85		PASS
		H	13.54		
	HCH	V	20.81		PASS
		H	13.05		
16QAM	LCH	V	20.19	<34.77	PASS
		H	13.87		
	MCH	V	20.64		PASS
		H	13.05		
	HCH	V	20.43		PASS
		H	13.54		

>

> FDD-LTE Band 25

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.64	<33.00	PASS
		H	13.54		
	MCH	V	20.43		PASS
		H	14.05		
	HCH	V	20.25		PASS
		H	14.11		
16QAM	LCH	V	20.39	<33.00	PASS
		H	14.35		

	MCH	V	20.45		PASS
		H	14.28		
	HCH	V	20.69		PASS
		H	14.36		
Channel Bandwidth: 3 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.98	<33.00	PASS
		H	14.02		
	MCH	V	20.39		PASS
		H	14.13		
	HCH	V	20.46		PASS
		H	14.28		
16QAM	LCH	V	20.32	<33.00	PASS
		H	14.39		
	MCH	V	20.47		PASS
		H	14.82		
	HCH	V	20.78		PASS
		H	14.32		
Channel Bandwidth: 5 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.05	<33.00	PASS
		H	14.39		
	MCH	V	20.11		PASS
		H	14.05		
	HCH	V	20.32		PASS
		H	14.13		
16QAM	LCH	V	20.46	<33.00	PASS
		H	14.21		
	MCH	V	20.45		PASS
		H	13.97		
	HCH	V	20.79		PASS
		H	13.89		
Channel Bandwidth: 10 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.32	<33.00	PASS
		H	13.96		
	MCH	V	20.42		PASS
		H	13.56		
	HCH	V	20.17		PASS
		H	13.78		



Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
16QAM	LCH	V	20.39	<33.00	PASS
		H	14.23		
	MCH	V	20.14		PASS
		H	14.11		
	HCH	V	20.25		PASS
		H	14.23		
Channel Bandwidth: 15 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.86	<33.00	PASS
		H	14.25		
	MCH	V	20.43		PASS
		H	14.39		
	HCH	V	20.32		PASS
		H	14.47		
16QAM	LCH	V	20.46	<33.00	PASS
		H	14.31		
	MCH	V	20.25		PASS
		H	14.25		
	HCH	V	20.79		PASS
		H	14.28		
Channel Bandwidth: 20 MHz					
Modulation	Channel	Antenna Polar	E.i.r.p [dBm]	Limit (dBm)	Verdict
QPSK	LCH	V	20.32	<33.00	PASS
		H	14.22		
	MCH	V	20.43		PASS
		H	14.13		
	HCH	V	20.25		PASS
		H	14.05		
16QAM	LCH	V	20.79	<33.00	PASS
		H	14.11		
	MCH	V	20.98		PASS
		H	14.39		
	HCH	V	20.73		PASS
		H	14.27		

Max. Conducted Output Power

Please refer to Appendix A: Average Power Output Data

Test result: Pass

5. Peak-to-average Ratio (PAR) of Transmitter

5.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

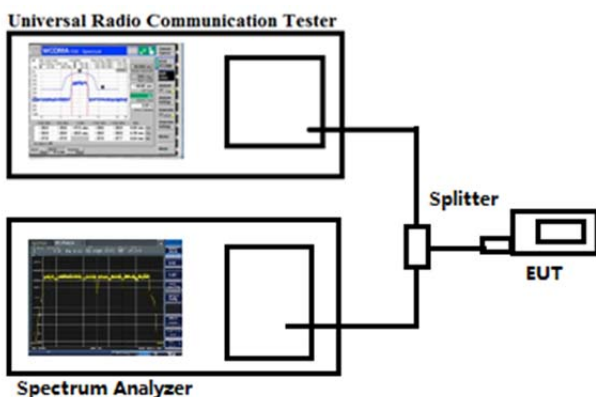

5.3 Summary of Test Results

Please refer to Appendix B: Peak-to-Average Ratio

Test result: Pass

6. Emission Bandwidth

6.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Configuration for the emission bandwidth testing:

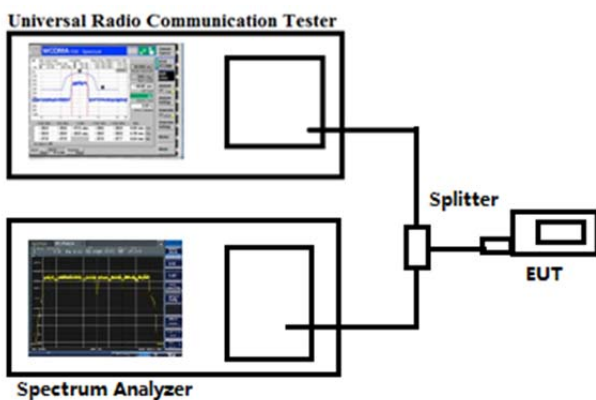

6.3 Summary of Test Results/Plots

Please refer to Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test result: Pass

7. Out of Band Emissions at Antenna Terminal

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.


According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

According to §27.53(m)(4), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10^{th} harmonic.

Test Configuration for the out of band emissions testing:

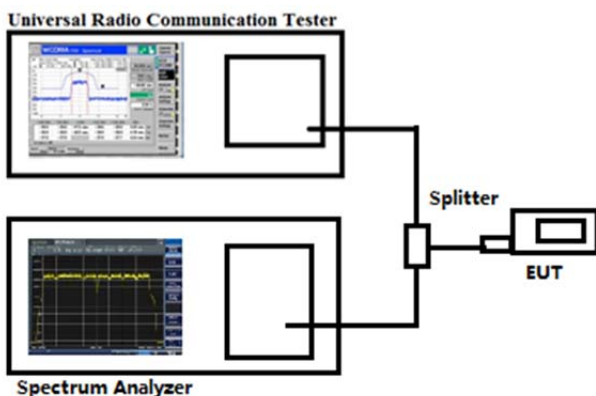

7.3 Summary of Test Results/Plots

Please refer to Appendix D & E: Band Edge & Conducted Spurious Emission

Test result: Pass

8. Spurious Radiated Emissions

8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

According to §27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53(g) the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA-603-E and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

$$\text{Spurious attenuation limit in dB} = 43 + 10 \text{ Log}_{10} (\text{power out in Watts})$$


8.3 Summary of Test Results/Plots

Note: 1. this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

2. All test modes (different bandwidth and different modulation) are performed, but only the worst case is recorded in this report.


➤ Spurious Emissions Below 1GHz

Test Mode	FDD_LTE Band 2	Polarity:	Horizontal
-----------	----------------	-----------	------------

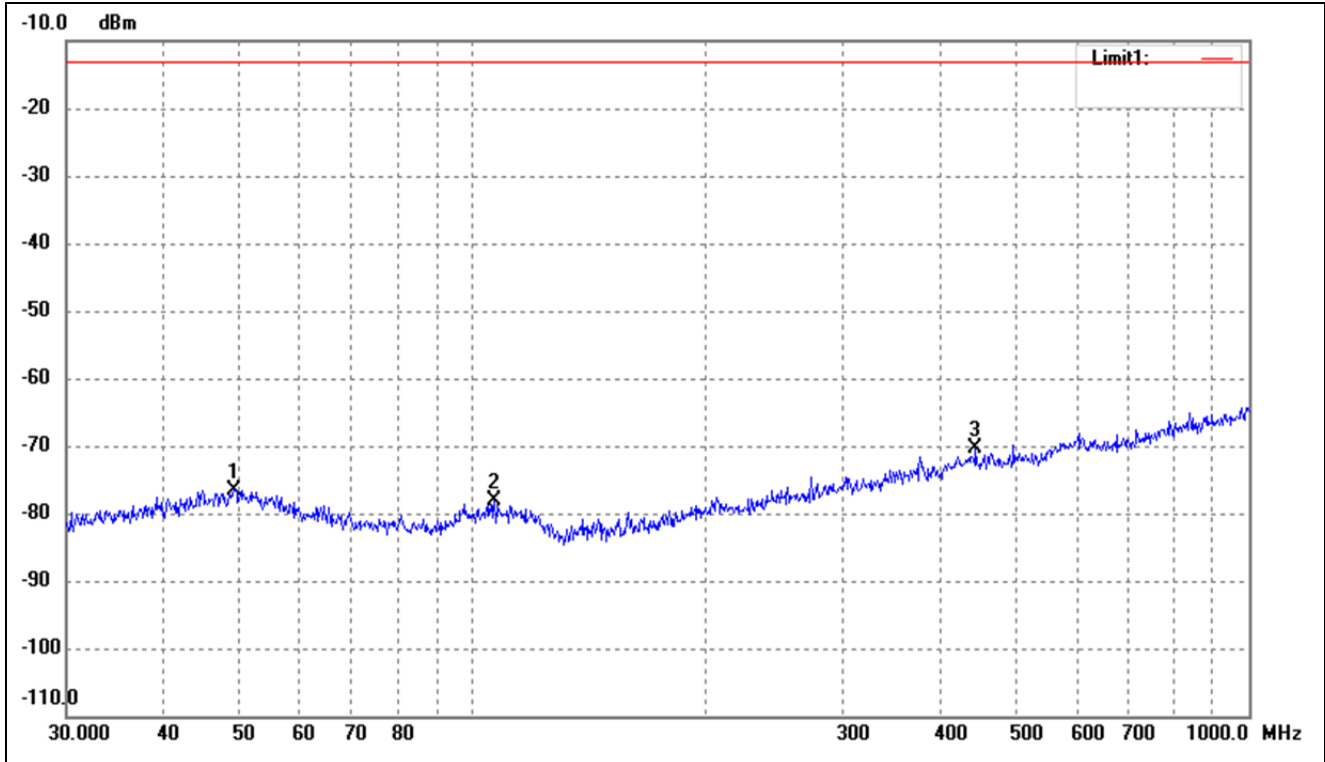


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.3594	-77.26	0.76	-76.50	-13.00	-63.50	ERP
2	106.7587	-76.78	-1.27	-78.05	-13.00	-65.05	ERP
3	444.8514	-75.94	5.52	-70.42	-13.00	-57.42	ERP

Test Mode	FDD_LTE Band 2	Polarity:	Vertical
-----------	----------------	-----------	----------

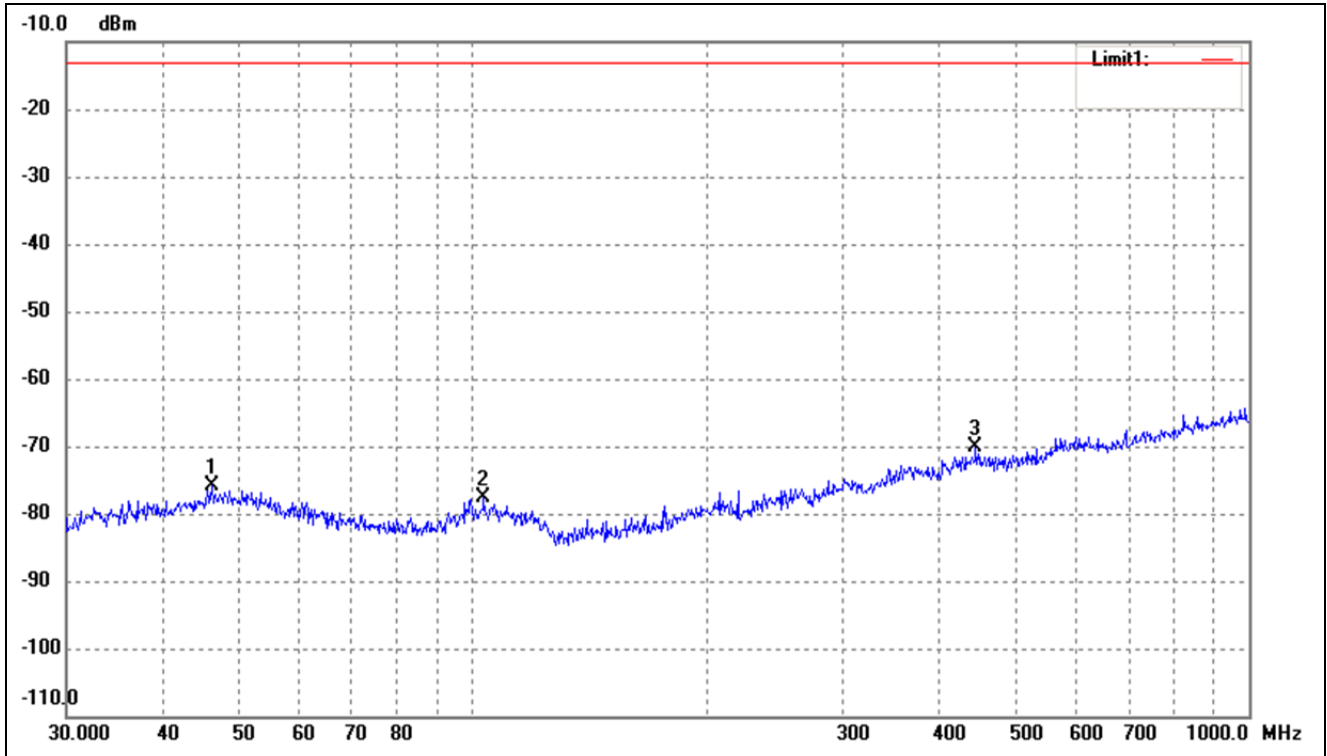


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.1780	-76.34	0.54	-75.80	-13.00	-62.80	ERP
2	103.4421	-76.41	-1.33	-77.74	-13.00	-64.74	ERP
3	444.8514	-75.65	5.52	-70.13	-13.00	-57.13	ERP

Test Mode	FDD_LTE Band 4	Polarity:	Horizontal
-----------	----------------	-----------	------------

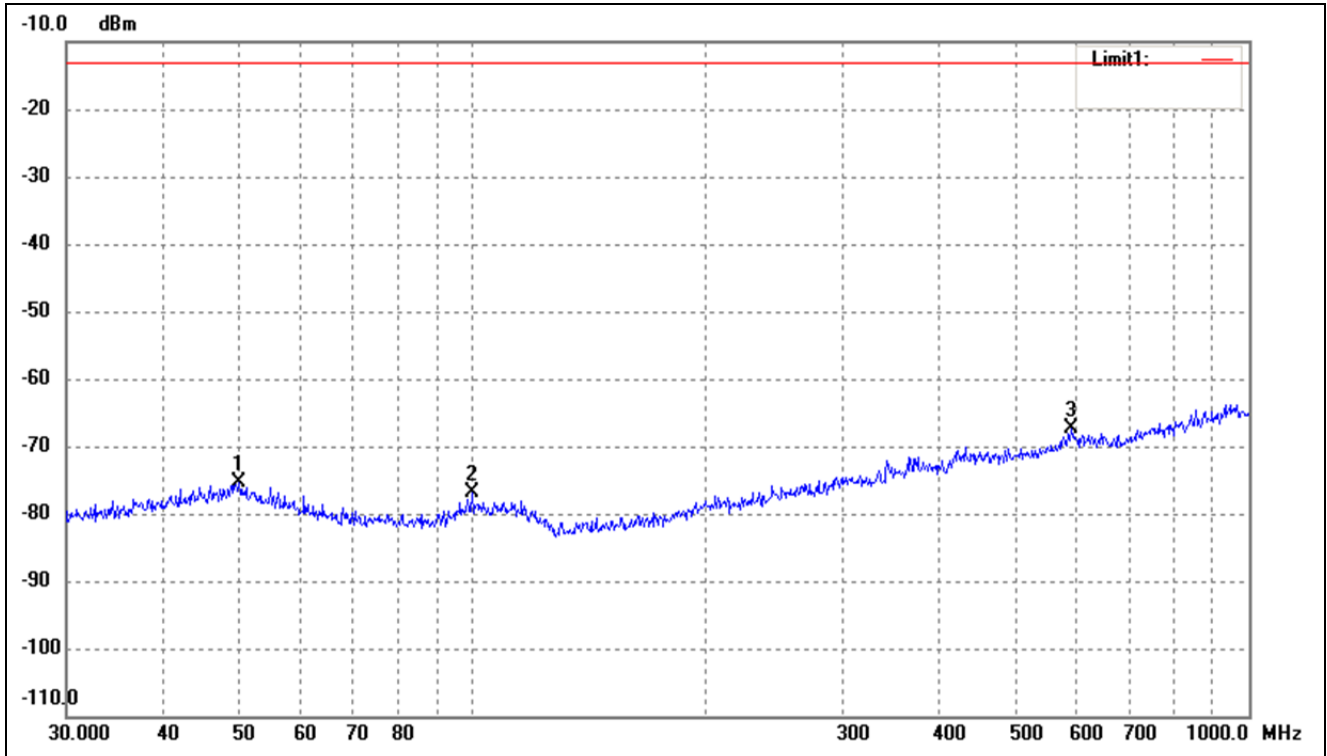


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.0566	-76.21	0.80	-75.41	-13.00	-62.41	ERP
2	99.8777	-75.41	-1.41	-76.82	-13.00	-63.82	ERP
3	590.9737	-75.13	7.69	-67.44	-13.00	-54.44	ERP

Test Mode	FDD_LTE Band 4	Polarity:	Vertical
-----------	----------------	-----------	----------

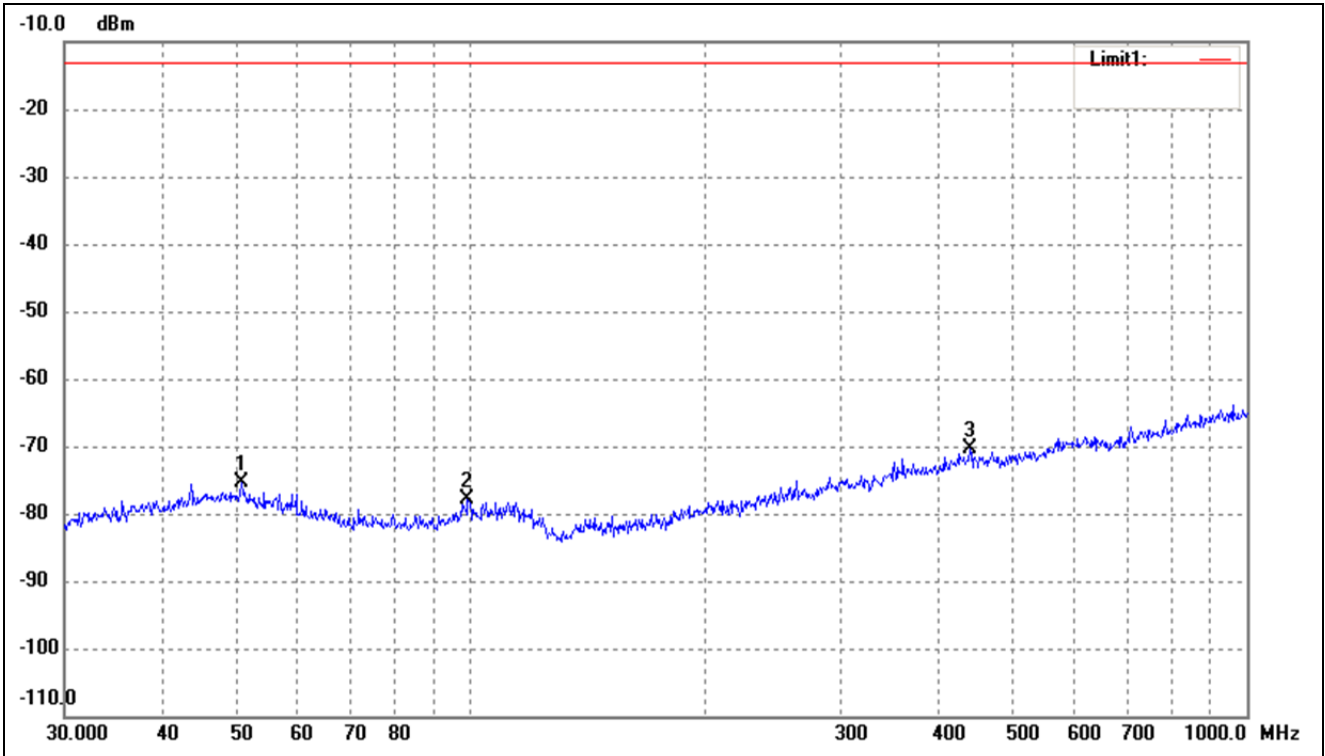


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.7637	-75.98	0.63	-75.35	-13.00	-62.35	ERP
2	99.1797	-76.30	-1.56	-77.86	-13.00	-64.86	ERP
3	440.1963	-76.03	5.60	-70.43	-13.00	-57.43	ERP

Test Mode	FDD_LTE Band 5	Polarity:	Horizontal
-----------	----------------	-----------	------------

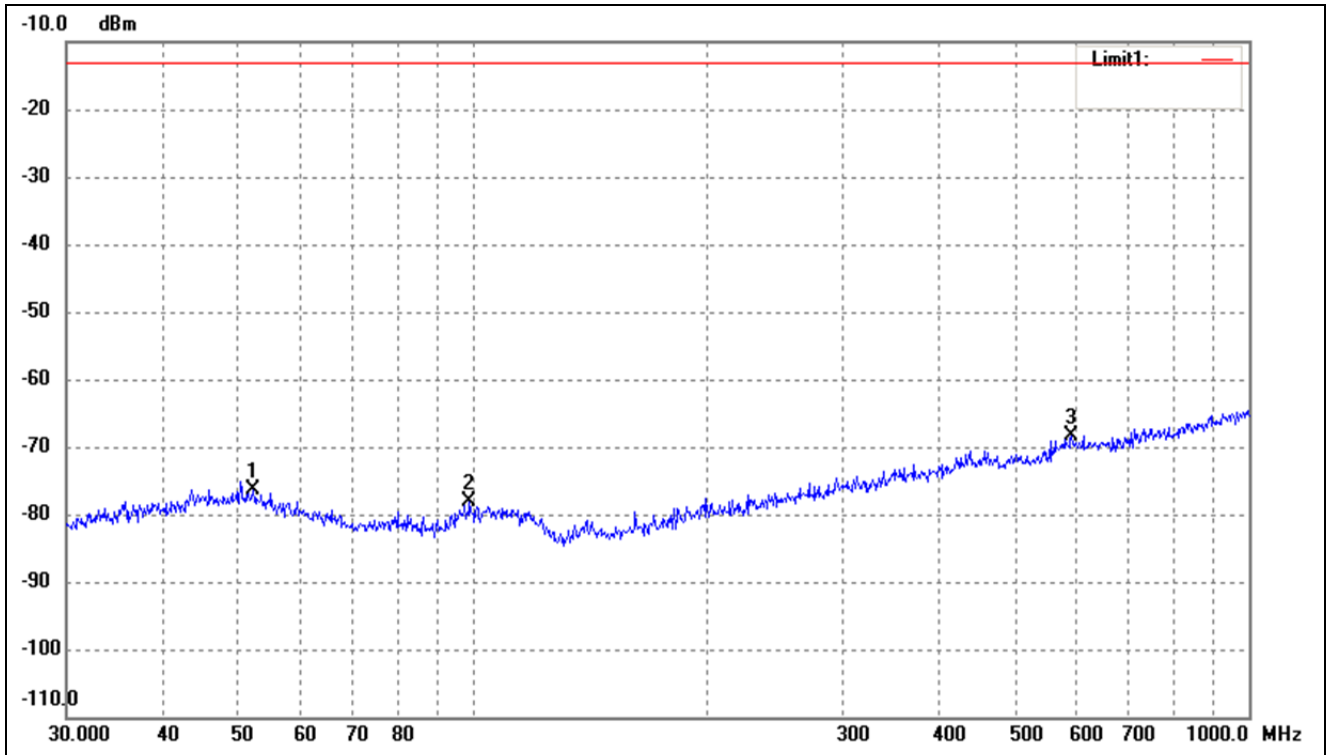


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.2079	-76.79	0.30	-76.49	-13.00	-63.49	ERP
2	99.1797	-76.47	-1.56	-78.03	-13.00	-65.03	ERP
3	590.9737	-76.07	7.69	-68.38	-13.00	-55.38	ERP

Test Mode	FDD_LTE Band 5	Polarity:	Vertical
-----------	----------------	-----------	----------

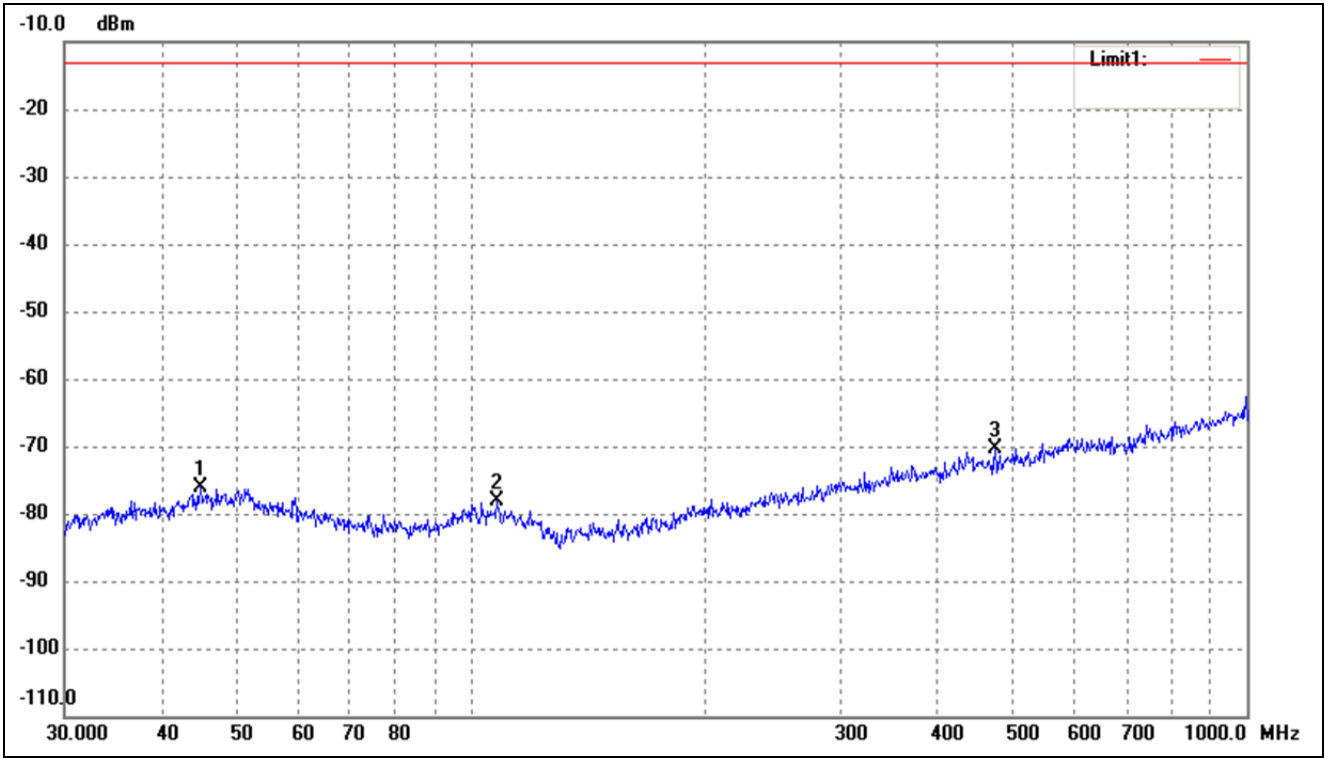


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.9006	-76.58	0.44	-76.14	-13.00	-63.14	ERP
2	108.2667	-76.87	-1.25	-78.12	-13.00	-65.12	ERP
3	473.8347	-75.50	5.20	-70.30	-13.00	-57.30	ERP

Test Mode	FDD_LTE Band 12	Polarity:	Horizontal
-----------	-----------------	-----------	------------

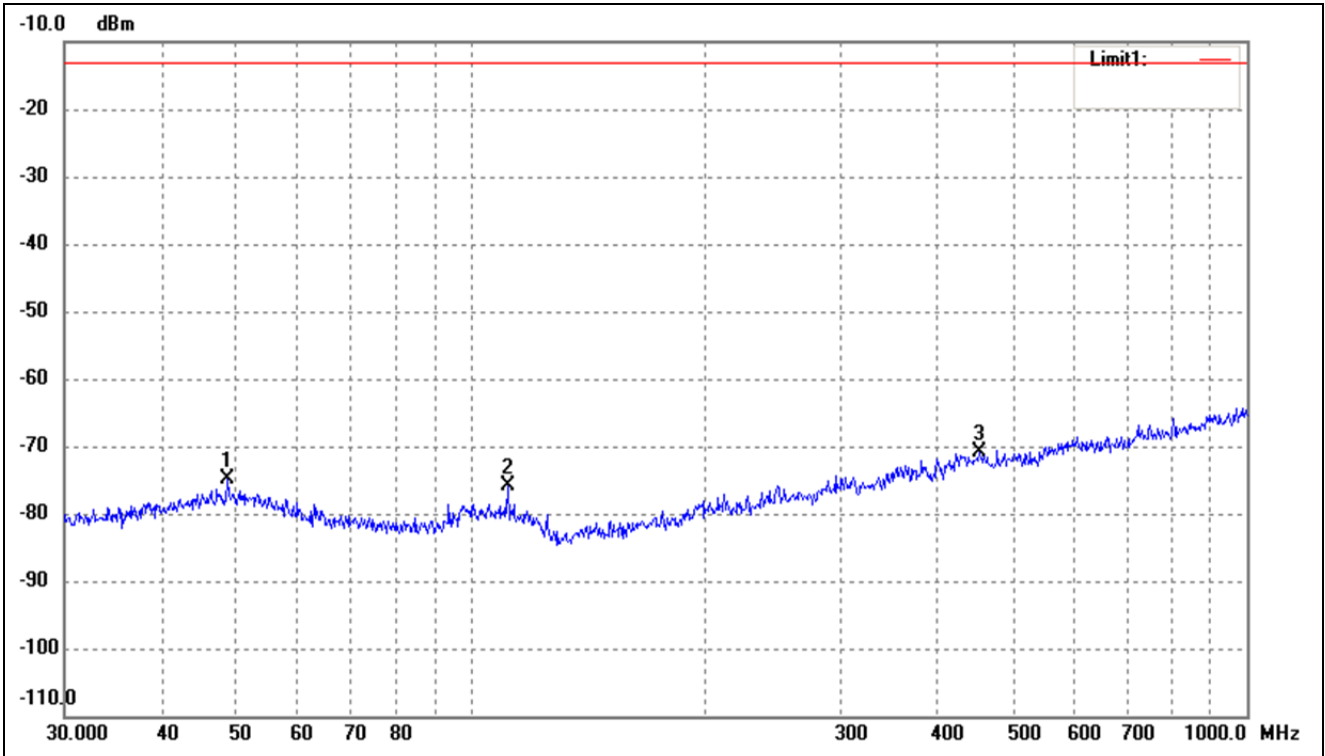


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.6719	-75.57	0.72	-74.85	-13.00	-61.85	ERP
2	111.7380	-74.54	-1.41	-75.95	-13.00	-62.95	ERP
3	452.7197	-76.16	5.37	-70.79	-13.00	-57.79	ERP

Test Mode	FDD_LTE Band 12	Polarity:	Vertical
-----------	-----------------	-----------	----------

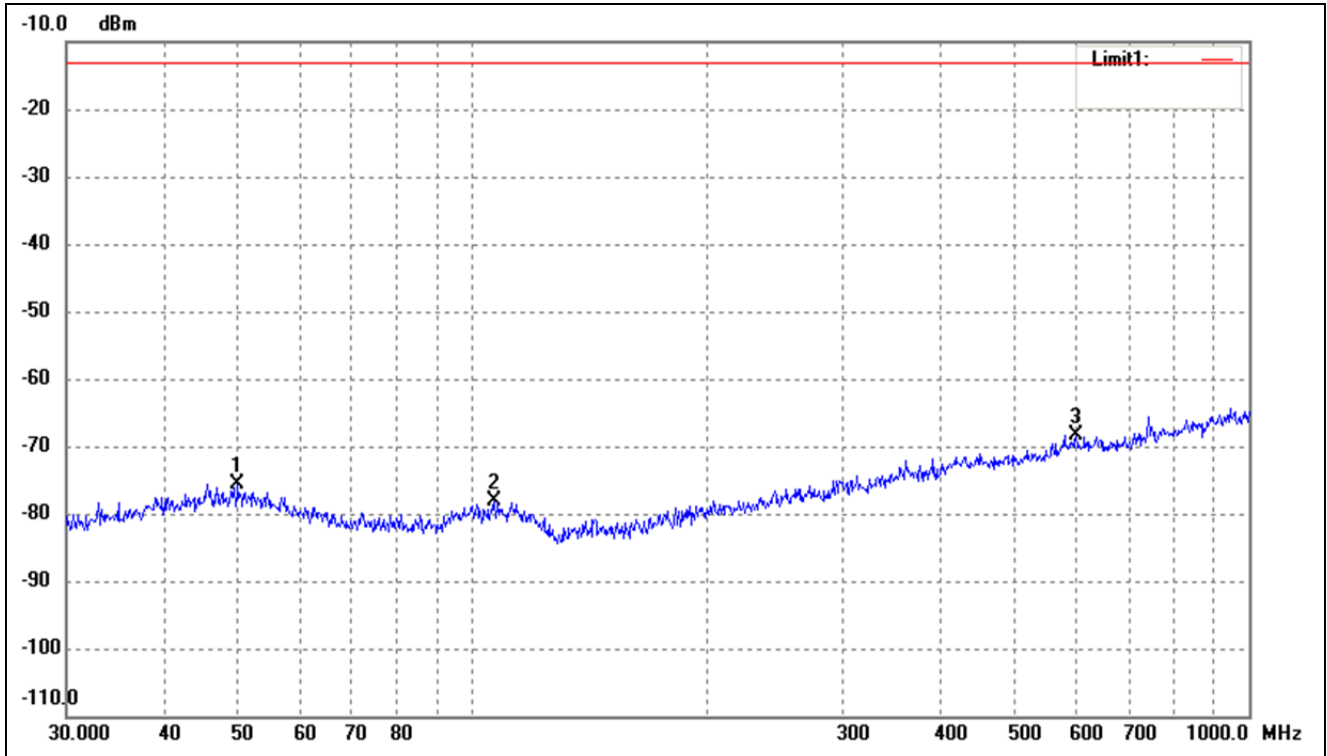


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.8814	-76.48	0.80	-75.68	-13.00	-62.68	ERP
2	106.7587	-76.82	-1.27	-78.09	-13.00	-65.09	ERP
3	599.3213	-76.03	7.77	-68.26	-13.00	-55.26	ERP

Test Mode	FDD_LTE Band 13	Polarity:	Horizontal
-----------	-----------------	-----------	------------

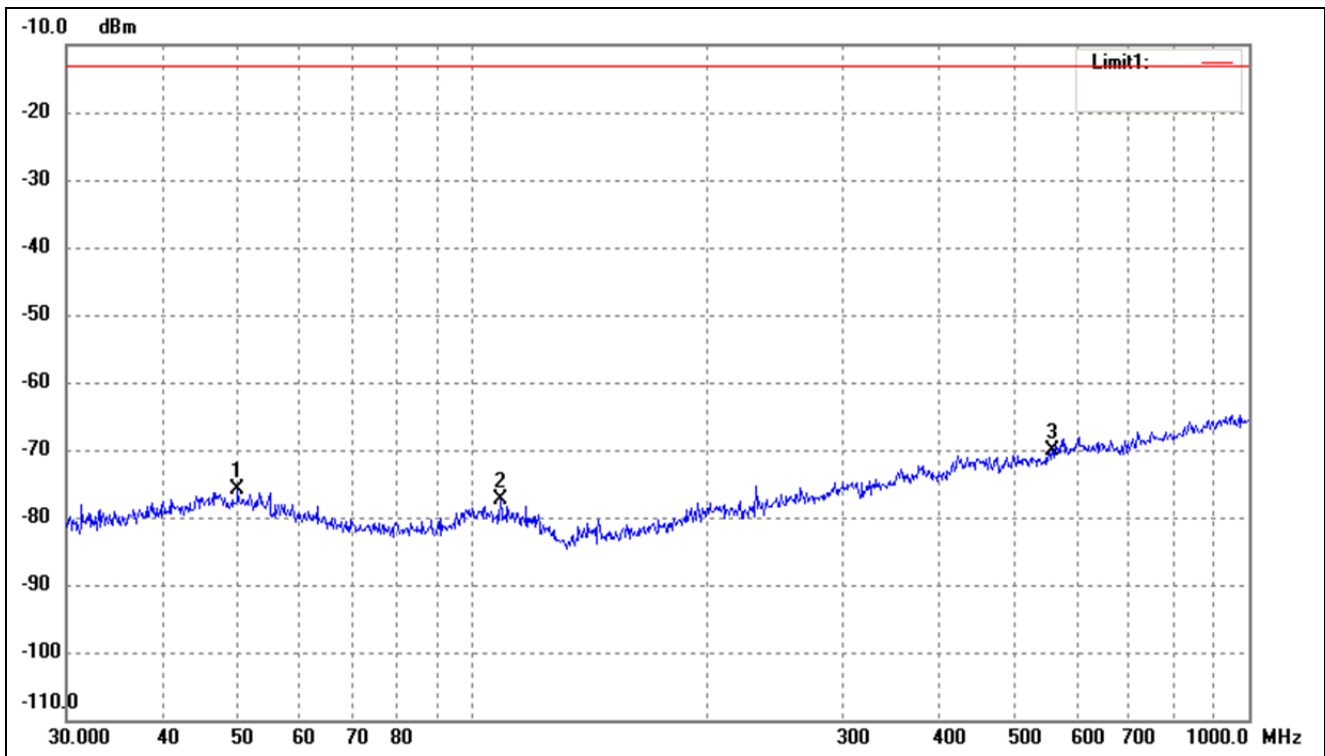


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.8814	-76.79	0.80	-75.99	-13.00	-62.99	ERP
2	108.6470	-76.18	-1.23	-77.41	-13.00	-64.41	ERP
3	558.7302	-76.86	6.73	-70.13	-13.00	-57.13	ERP

Test Mode	FDD_LTE Band 13	Polarity:	Vertical
-----------	-----------------	-----------	----------

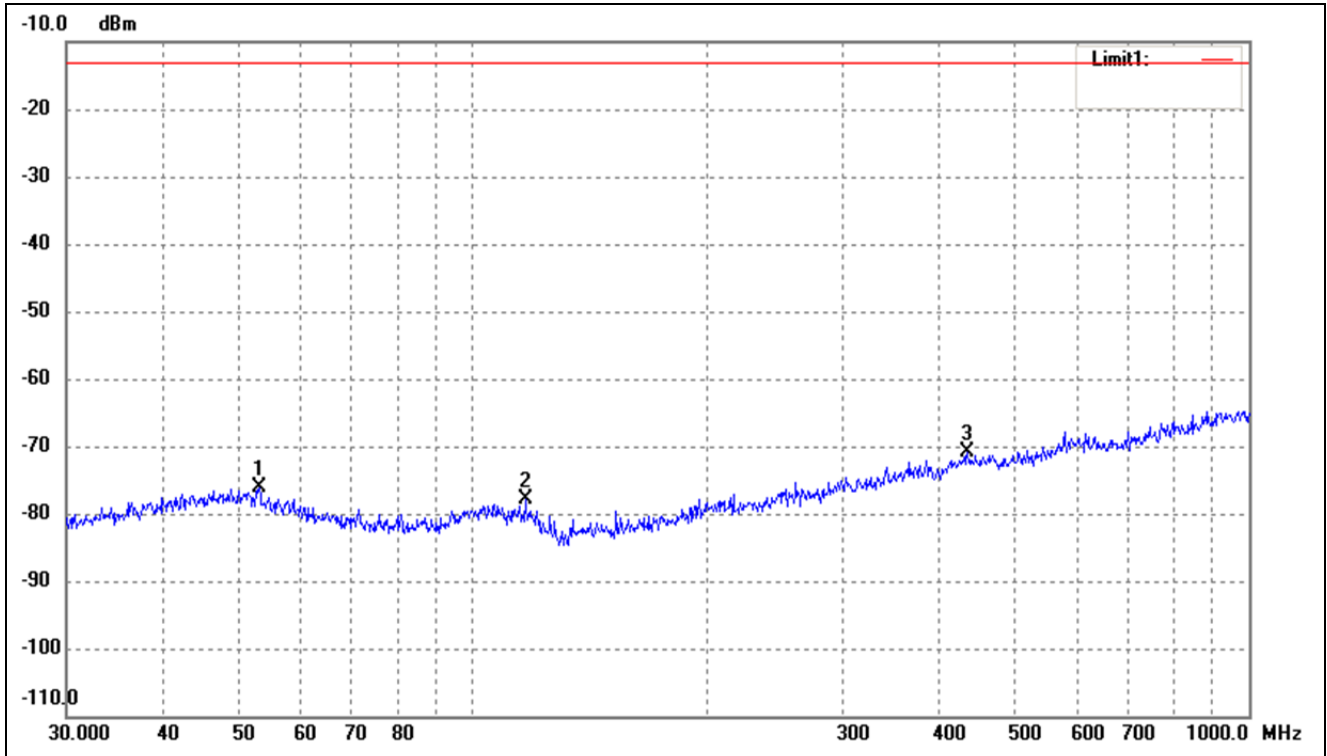


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.1313	-76.09	0.08	-76.01	-13.00	-63.01	ERP
2	116.9495	-75.94	-2.00	-77.94	-13.00	-64.94	ERP
3	434.0651	-76.50	5.60	-70.90	-13.00	-57.90	ERP

Test Mode	FDD_LTE Band 17	Polarity:	Vertical
-----------	-----------------	-----------	----------

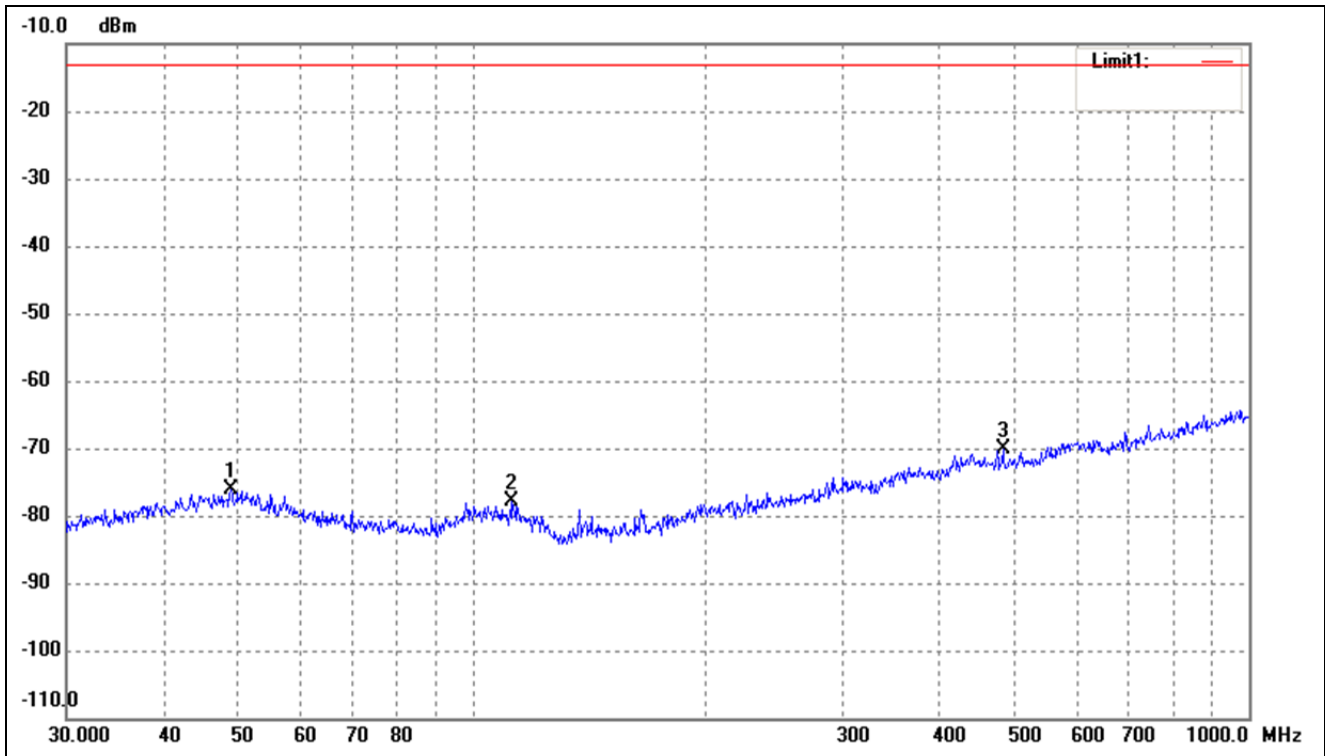


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.8429	-76.79	0.73	-76.06	-13.00	-63.06	ERP
2	112.5244	-76.31	-1.50	-77.81	-13.00	-64.81	ERP
3	482.2156	-75.55	5.37	-70.18	-13.00	-57.18	ERP

Test Mode	FDD_LTE Band 17	Polarity:	Vertical
-----------	-----------------	-----------	----------

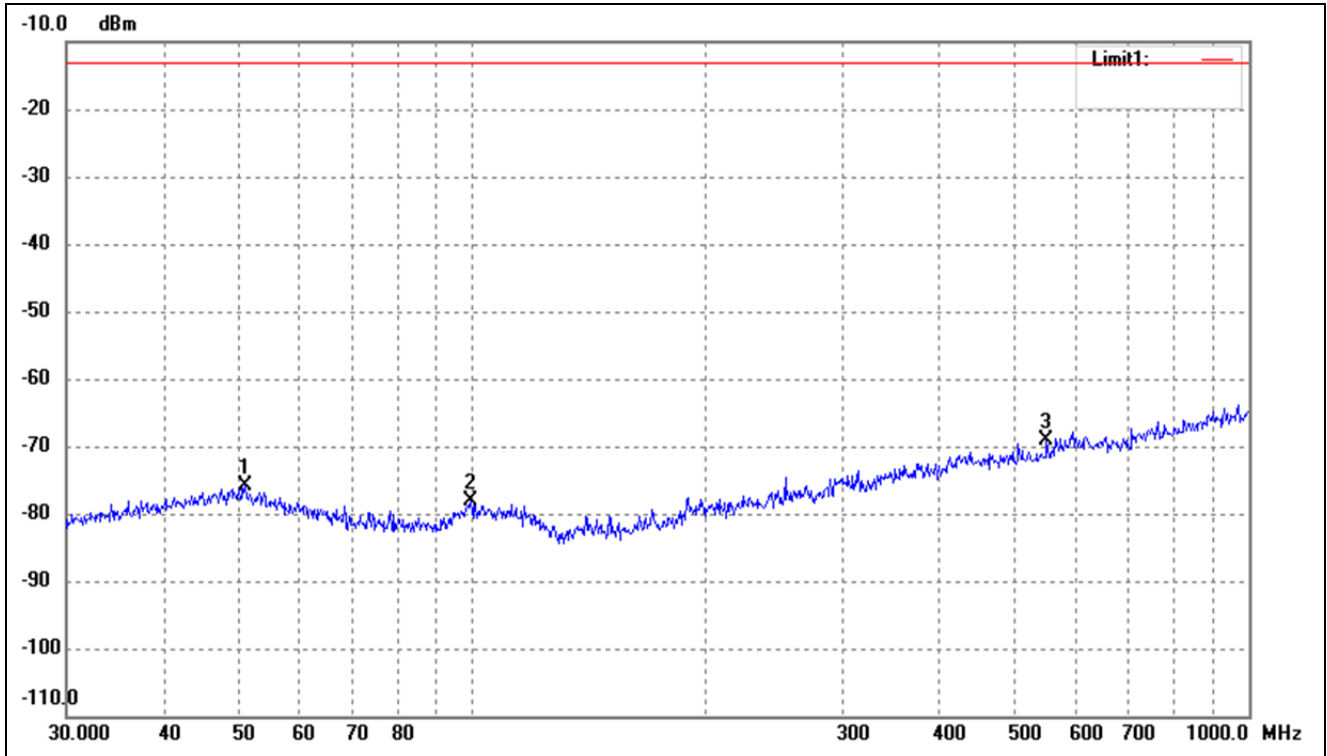


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.9420	-76.34	0.59	-75.75	-13.00	-62.75	ERP
2	99.5281	-76.74	-1.49	-78.23	-13.00	-65.23	ERP
3	549.0195	-75.35	6.27	-69.08	-13.00	-56.08	ERP

Test Mode	FDD_LTE Band 25	Polarity:	Vertical
-----------	-----------------	-----------	----------

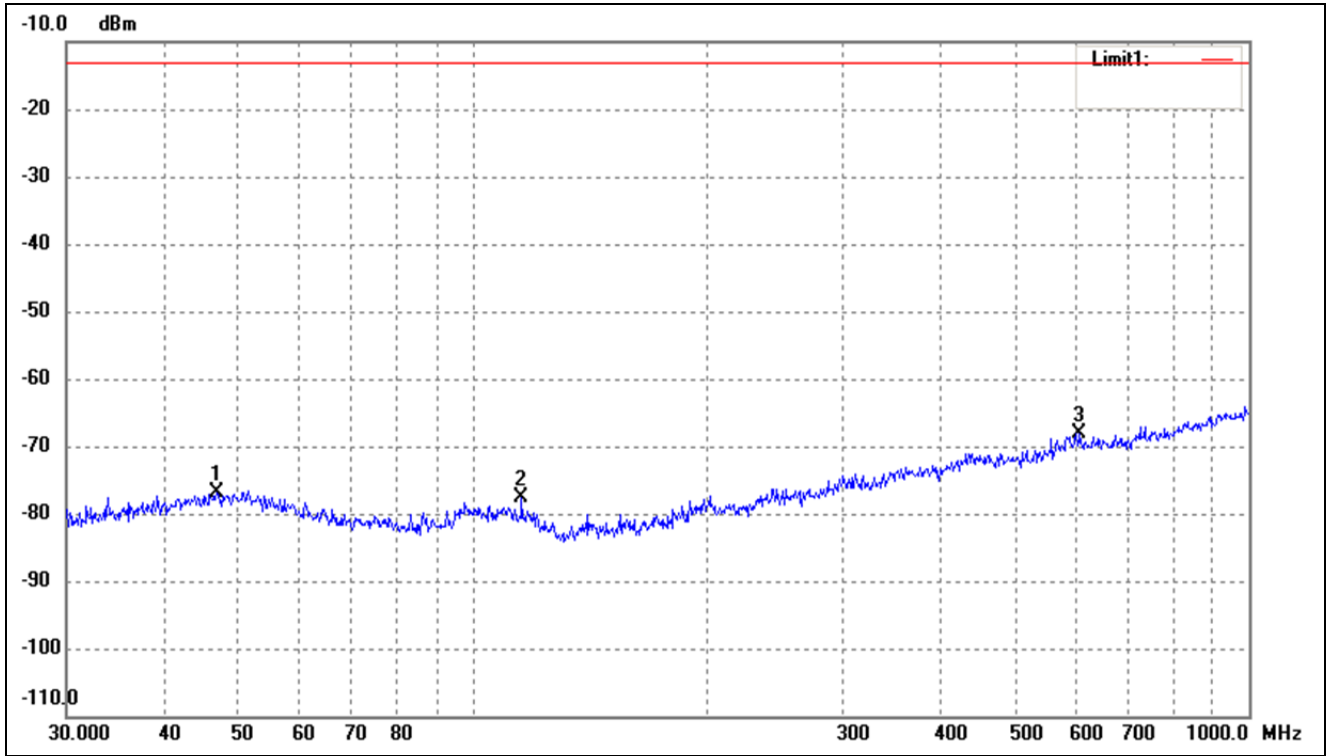

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.8303	-77.44	0.59	-76.85	-13.00	-63.85	ERP
2	115.7256	-75.86	-1.86	-77.72	-13.00	-64.72	ERP
3	605.6592	-75.84	7.75	-68.09	-13.00	-55.09	ERP

Test Mode	FDD_LTE Band 25	Polarity:	Vertical
-----------	-----------------	-----------	----------

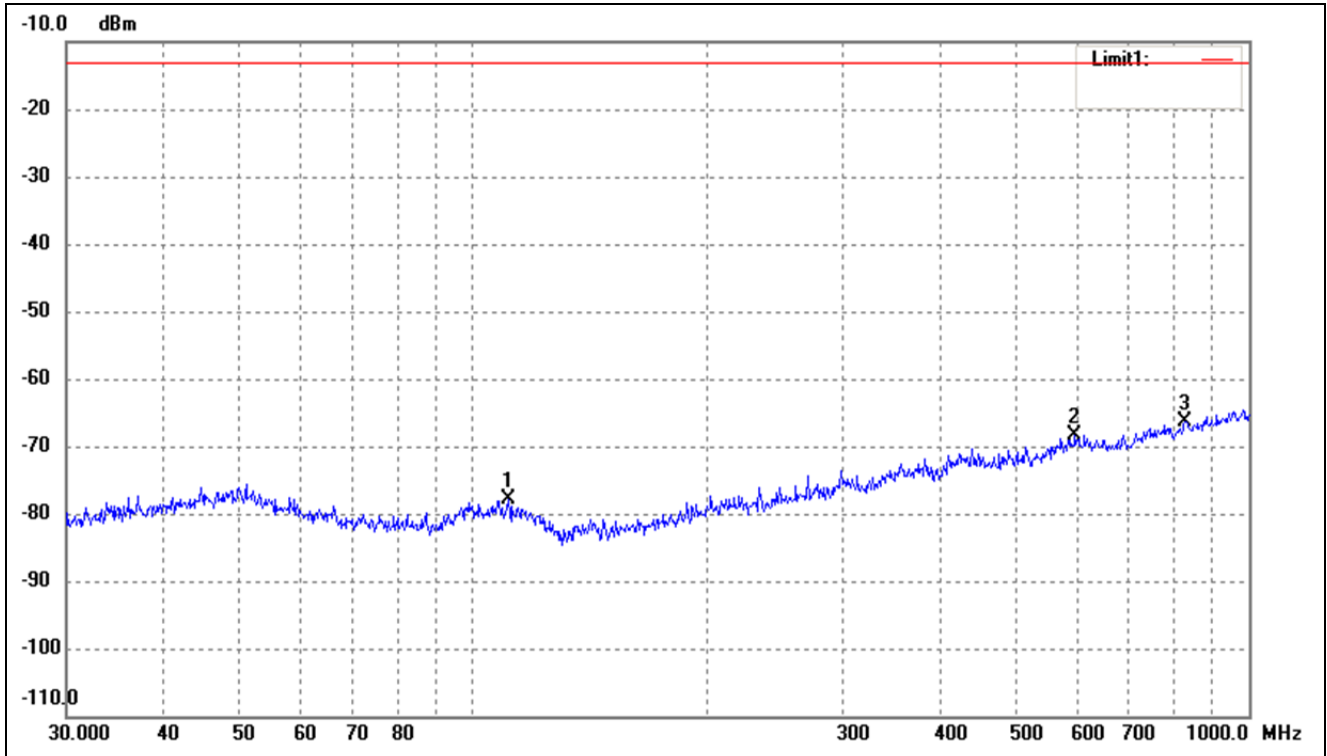

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	111.3468	-76.41	-1.37	-77.78	-13.00	-64.78	ERP
2	597.2234	-76.17	7.76	-68.41	-13.00	-55.41	ERP
3	827.4934	-76.70	10.21	-66.49	-13.00	-53.49	ERP

Note: Margin= (Reading+ Correct)- Limit

➤ Spurious Emissions Above 1GHz

For FDD_LTE Band 2 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.5MHz)						
3705.00	-33.09	10.17	-22.92	-13	-9.92	H
5557.50	-41.15	14.69	-26.46	-13	-13.46	H
3705.00	-35.68	10.17	-25.51	-13	-12.51	V
5557.50	-41	14.69	-26.31	-13	-13.31	V
Middle Channel (1880.0MHz)						
3760.00	-33.72	10.26	-23.46	-13	-10.46	H
5640.00	-40.73	14.78	-25.95	-13	-12.95	H
3760.00	-34.72	10.26	-24.46	-13	-11.46	V
5640.00	-40.54	14.78	-25.76	-13	-12.76	V
High Channel (1907.5MHz)						
3815.00	-35.91	10.59	-25.32	-13	-12.32	H
5722.50	-39.36	15.03	-24.33	-13	-11.33	H
3815.00	-35.3	10.59	-24.71	-13	-11.71	V
5722.50	-41.47	15.03	-26.44	-13	-13.44	V

For FDD_LTE Band 4 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.5MHz)						
3425.00	-34.85	12.03	-22.82	-13	-9.82	H
5137.50	-41.31	8.65	-32.66	-13	-19.66	H
3425.00	-35.34	12.03	-23.31	-13	-10.31	V
5137.50	-39.51	12.03	-27.48	-13	-14.48	V
Middle Channel (1732.5MHz)						
3465.00	-35.38	8.91	-26.47	-13	-13.47	H
5197.50	-40.46	12.29	-28.17	-13	-15.17	H
3465.00	-33.04	8.91	-24.13	-13	-11.13	V
5197.50	-41.19	12.29	-28.90	-13	-15.90	V
High Channel (1752.5MHz)						
3505.00	-35.97	9.11	-26.86	-13	-13.86	H
5257.50	-41.51	12.56	-28.95	-13	-15.95	H
3505.00	-35.95	9.11	-26.84	-13	-13.84	V
5257.50	-39.54	12.56	-26.98	-13	-13.98	V

For FDD_LTE Band 5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.7MHz)						
1649.40	-34.07	4.94	-29.13	-13	-16.13	H
2474.10	-42.31	8.46	-33.85	-13	-20.85	H
1649.40	-33.2	4.94	-28.26	-13	-15.26	V
2474.10	-42.44	8.46	-33.98	-13	-20.98	V
Middle Channel (836.5MHz)						
1673.00	-32.2	5.11	-27.09	-13	-14.09	H
2509.50	-41.29	8.54	-32.75	-13	-19.75	H
1673.00	-33.14	5.11	-28.03	-13	-15.03	V
2509.50	-40.41	8.54	-31.87	-13	-18.87	V
High Channel (848.3MHz)						
1696.60	-33.9	5.25	-28.65	-13	-15.65	H
2544.90	-39.21	8.57	-30.64	-13	-17.64	H
1696.60	-34.63	5.25	-29.38	-13	-16.38	V
2544.90	-42.38	8.57	-33.81	-13	-20.81	V

For FDD_LTE Band 12 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (669.7MHz)						
1339.40	-34.67	4.01	-30.66	-13	-17.66	H
2009.10	-41.34	7.32	-34.02	-13	-21.02	H
1339.40	-34.36	4.01	-30.35	-13	-17.35	V
2009.10	-41.96	7.32	-34.64	-13	-21.64	V
Middle Channel (707.5MHz)						
1415.00	-34.26	4.11	-30.15	-13	-17.15	H
2122.50	-41.42	7.54	-33.88	-13	-20.88	H
1415.00	-34.76	4.11	-30.65	-13	-17.65	V
2122.50	-39.44	7.54	-31.9	-13	-18.9	V
High Channel (715.3MHz)						
1430.6	-33.82	4.35	-29.47	-13	-16.47	H
2145.9	-39.28	7.88	-31.4	-13	-18.40	H
1430.6	-34.37	4.35	-30.02	-13	-17.02	V
2145.9	-40.33	7.88	-32.45	-13	-19.45	V

For FDD_LTE Band 13 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (779.5MHz)						
1559.00	-44.13	4.52	-48.65	-40	-8.65	H
2338.50	-39.88	7.96	-47.84	-13	-34.84	H
1559.00	-44.71	4.52	-49.23	-40	-9.23	V
2338.5	-40.78	7.96	-48.74	-13	-35.74	V
Middle Channel (782.0MHz)						
1564.00	-44.1	4.68	-48.78	-40	-8.78	H
2346.00	-39.23	8.02	-47.25	-13	-34.25	H
1564.00	-44.68	4.68	-49.36	-40	-9.36	V
2346.00	-40.69	8.05	-48.74	-13	-35.74	V
High Channel (784.5MHz)						
1569.00	-42.67	4.85	-47.52	-40	-7.52	H
2353.5	-39.11	8.26	-47.37	-13	-34.37	H
1569.00	-43.6	4.85	-48.45	-40	-8.45	V
2353.5	-39.6	8.26	-47.86	-13	-34.86	V

For FDD_LTE Band 17 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (706.5MHz)						
1413.00	-33.88	4.22	-29.66	-13	-16.66	H
2119.50	-39.72	7.42	-32.3	-13	-19.3	H
1413.00	-33.02	4.22	-28.8	-13	-15.8	V
2119.50	-41.05	7.42	-33.63	-13	-20.63	V
Middle Channel (710.0MHz)						
1420.00	-33.72	4.58	-29.14	-13	-16.14	H
2130.00	-39.66	7.69	-31.97	-13	-18.97	H
1420.00	-33.11	4.58	-28.53	-13	-15.53	V
2130.00	-42.11	7.69	-34.42	-13	-21.42	V
High Channel (713.5MHz)						
1427.00	-32.18	4.69	-27.49	-13	-14.49	H
2140.50	-41.15	7.87	-33.28	-13	-20.28	H
1427.00	-32.98	4.69	-28.29	-13	-15.29	V
2140.50	-41.1	7.87	-33.23	-13	-20.23	V

For FDD_LTE Band 25 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.7MHz)						
3701.40	-35.42	9.98	-25.44	-13	-12.44	H
5552.10	-41.24	13.49	-27.75	-13	-14.75	H
3701.40	-35.73	9.98	-25.75	-13	-12.75	V
5552.10	-40.94	13.49	-27.45	-13	-14.45	V
Middle Channel (1882.5MHz)						
3765.00	-35.43	10.11	-25.32	-13	-12.32	H
5647.50	-42.9	13.55	-29.35	-13	-16.35	H
3765.00	-33.94	10.11	-23.83	-13	-10.83	V
5647.50	-41.58	13.55	-28.03	-13	-15.03	V
High Channel (1914.3MHz)						
3828.60	-34.25	9.99	-24.26	-13	-11.26	H
5742.90	-41.83	13.51	-28.32	-13	-15.32	H
3828.60	-34.19	9.99	-24.20	-13	-11.20	V
5742.90	-42.08	13.51	-28.57	-13	-15.57	V

Note: $Result = Reading + Correct$, $Margin = Result - Limit$

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

9.3 Summary of Test Results/Plots

Note: 1.Normal Voltage NV=DC6.4V; Low Voltage LV=DC5.44V; High Voltage HV=DC7.36V

Please refer to Appendix F: Frequency Stability

Test result: Pass

******* END OF REPORT *******