



## Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)


Report Template Version: V05  
Report Template Revision Date: 2021-11-03

# TEST REPORT


**Report No.:** CQASZ20221202100E  
**Applicant:** Dongguan Shunlang Electronics Company Limited  
**Address of Applicant:** Floor5, Building2Shenxiang Industrial Park, Dabandi Cuntou Community Humen town, Dongguan China  
**Equipment Under Test (EUT):**  
**EUT Name:** White Noise Machine  
**Model No.:** W08  
**Test Model No.:** W08  
**Brand Name:** YORTOT  
**FCC ID:** 2AVMZ-W08  
**Standards:** 47 CFR Part 15, Subpart B, Class B  
**Date of Receipt:** 2022-12-15  
**Date of Test:** 2022-12-15 to 2022-12-29  
**Date of Issue:** 2023-1-3  
**Test Result:** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above


**Tested By:**

  
( Joe Wang )

**Reviewed By:**

  
( Timo Lei )

**Approved By:**

  
( Jack Ai )



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 1 Version

### Revision History of Report

Report No.	Version	Description	Issue Date
CQASZ20221202100E	Rev.01	Initial report	2023-1-3

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15B	ANSI C63.4-2014	PASS
Conducted Emission (150kHz to 30MHz)	47 CFR Part 15B	ANSI C63.4-2014	PASS

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

### 3 Contents

	Page
<b>1 VERSION .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 GENERAL INFORMATION .....</b>	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 TEST ENVIRONMENT AND MODE .....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 TEST LOCATION .....	6
4.6 DEVIATION FROM STANDARDS .....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	7
<b>5 EQUIPMENT LIST .....</b>	<b>8</b>
<b>6 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>9</b>
6.1 CONDUCTED EMISSIONS .....	9
6.2 RADIATED EMISSION .....	13
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>17</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT .....</b>	<b>18</b>

## 4 General Information

### 4.1 Client Information

Applicant:	Dongguan Shunlang Electronics Company Limited
Address of Applicant:	Floor5, Building2Shenxiang Industrial Park, Dabandi Cuntou Community Humen town, Dongguan China
Manufacturer:	Dongguan Shunlang Electronics Company Limited
Address of Manufacturer:	Floor5, Building2Shenxiang Industrial Park, Dabandi Cuntou Community Humen town, Dongguan China
Factory:	Dongguan Shunlang Electronics Company Limited
Address of Factory:	Floor5, Building2Shenxiang Industrial Park, Dabandi Cuntou Community Humen town, Dongguan China

### 4.2 General Description of EUT

Product Name:	White Noise Machine
Model No.:	W08
Test Model No.:	W08
Trade Mark:	YORTOT
EUT Power Supply:	Adapter:AC 120-240V,60Hz, DC 5V, 1A AAA battery DC 1.5V*3
Test Mode:	
Normal working	Keep the EUT in Normal working
Charging mode	Keep the EUT in Charging mode

### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
<b>Radiated Emission</b>	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
<b>Conducted Emission</b>	
Temperature:	22.1 °C
Humidity:	42 % RH
Atmospheric Pressure:	1009 mbar

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	CQA

2) cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

### 4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

### 4.6 Deviation from Standards

None.

### 4.7 Abnormalities from Standard Conditions

None.

### 4.8 Other Information Requested by the Customer

None.

#### 4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Conduction emission	3.74dB (9kHz to 150kHz)
		3.34dB (150kHz to 30MHz)
2	Radiated emission	5.12dB (Below 1GHz )
		4.60dB (Above 1GHz )
3	Temperature	0.8°C
4	Humidity	2.0%

## 5 Equipment List

Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
EMI Test Receiver	R&S	ESPI3	CQA-013	2022/9/9	2023/9/8
LISN	R&S	ENV216	CQA-003	2022/9/9	2023/9/8
Coaxial cable (9KHz~300MHz)	CQA	N/A	C021	2022/9/9	2023/9/8

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
Loop antenna	SCHWARZBECK	FMZB 1516	CQA-060	2021/9/16	2024/9/15
Horn Antenna	R&S	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
EMI Test Receiver	R&S	ESR7	CQA-005	2022/9/9	2023/9/8
Spectrum analyzer	R&S	FSU26	CQA-038	2022/9/9	2023/9/8
Preamplifier	MITEQ	AMF-6D- 02001800- 29-20P	CQA-036	2022/9/9	2023/9/8
Coaxial cable (1GHz~40GHz)	CQA	N/A	C007	2022/9/9	2023/9/8
Coaxial cable (9KHz~1GHz)	CQA	N/A	C013	2022/9/9	2023/9/8

### Test Software:

Test Site	Manufacturer	Software brand
Radiated Emissions test software	Audix	e3
Conducted Emissions test software	Audix	e3



## 6 Test results and Measurement Data

### 6.1 Conducted Emissions

**Test Requirement:** 47 CFR Part 15B

**Test Method:** ANSI C63.4

**Test frequency range:** 150kHz to 30MHz

**Limit:**


Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**Test Procedure:**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

**Test Setup:**

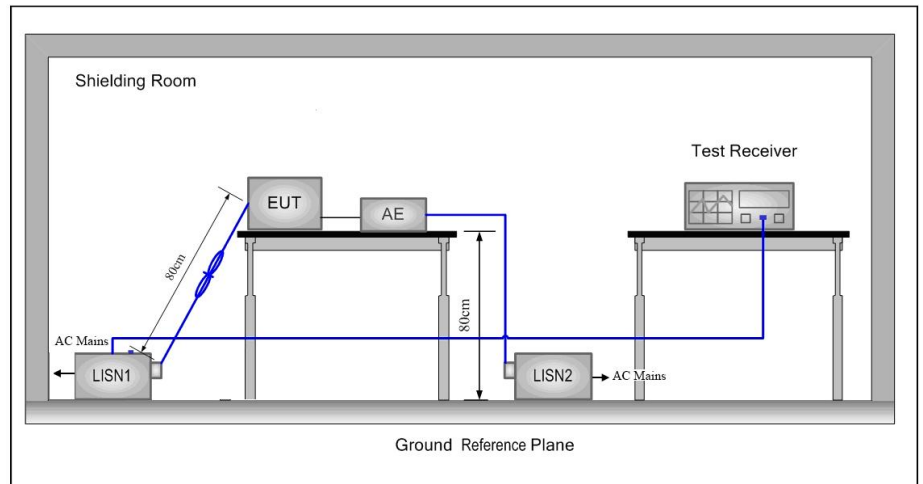

**Instruments Used:**

Refer to section 5 for details

**Test Mode:**

Charging mode

**Test Results:**


Pass

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

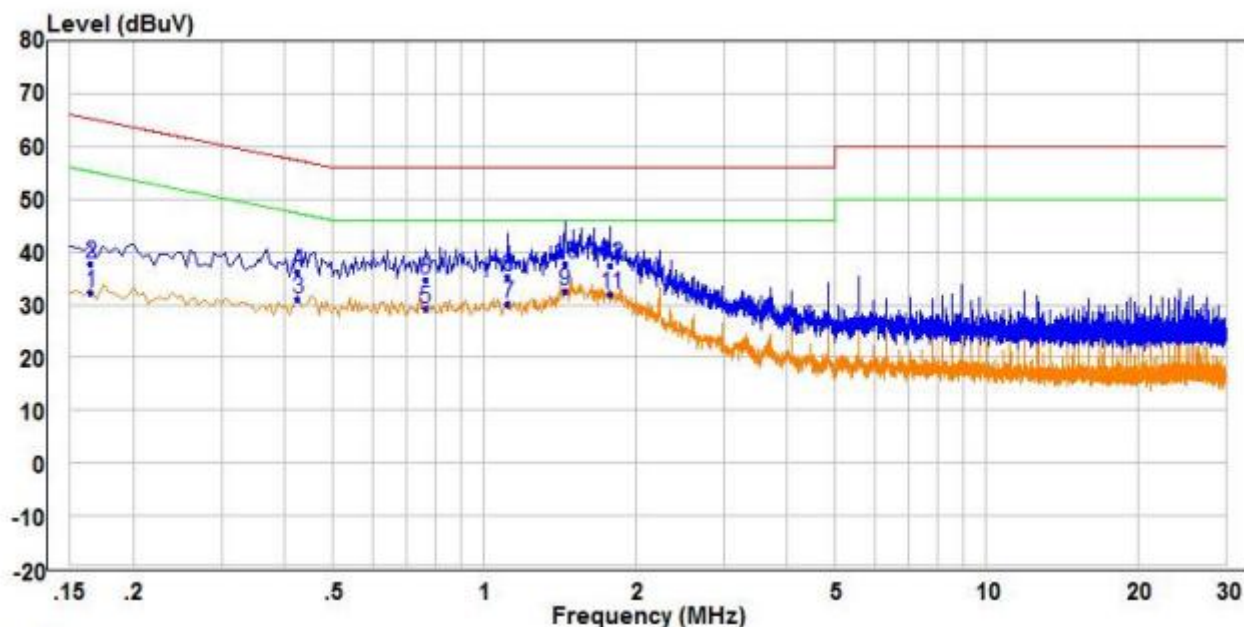

	Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	0.165	22.50	9.67	32.17	55.21	-23.04	Average Line
2	0.165	28.12	9.67	37.79	65.21	-27.42	QP Line
3	0.425	21.42	9.63	31.05	47.35	-16.30	Average Line
4	0.425	26.54	9.63	36.17	57.35	-21.18	QP Line
5	0.765	19.42	9.86	29.28	46.00	-16.72	Average Line
6	0.765	24.75	9.86	34.61	56.00	-21.39	QP Line
7	1.115	20.29	10.01	30.30	46.00	-15.70	Average Line
8	1.115	25.33	10.01	35.34	56.00	-20.66	QP Line
9 PP	1.450	21.73	10.74	32.47	46.00	-13.53	Average Line
10 QP	1.450	27.17	10.74	37.91	56.00	-18.09	QP Line
11	1.785	20.78	11.33	32.11	46.00	-13.89	Average Line
12	1.785	26.25	11.33	37.58	56.00	-18.42	QP Line

Neutral line:

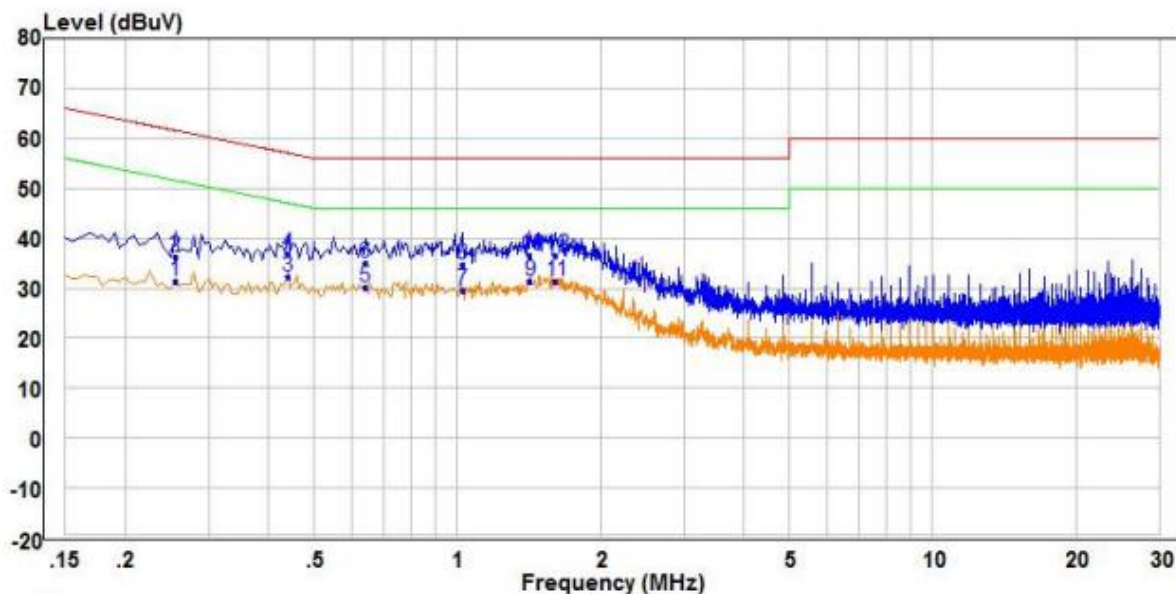

	Read Freq	Read Level	Factor	Limit Level	Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.255	21.79	9.53	31.32	51.59	-20.27	Average	Neutral
2	0.255	26.79	9.53	36.32	61.59	-25.27	QP	Neutral
3	0.440	22.57	9.64	32.21	47.06	-14.85	Average	Neutral
4	0.440	27.20	9.64	36.84	57.06	-20.22	QP	Neutral
5	0.640	20.32	9.84	30.16	46.00	-15.84	Average	Neutral
6	0.640	25.08	9.84	34.92	56.00	-21.08	QP	Neutral
7	1.025	19.84	9.70	29.54	46.00	-16.46	Average	Neutral
8	1.025	24.97	9.70	34.67	56.00	-21.33	QP	Neutral
9	1.425	21.61	9.72	31.33	46.00	-14.67	Average	Neutral
10 QP	1.425	26.96	9.72	36.68	56.00	-19.32	QP	Neutral
11 PP	1.615	21.69	9.73	31.42	46.00	-14.58	Average	Neutral
12	1.615	26.68	9.73	36.41	56.00	-19.59	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## 6.2 Radiated Emission

**Test Requirement:** 47 CFR Part 15B

**Test Method:** ANSI C63.4

**Test site:** Measurement Distance: 3m (Semi-Anechoic Chamber)

**Receiver setup:**

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value

**Limit:**

Frequency	Limit (dB $\mu$ V/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

**Test Procedure:**

### Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber ( Above 18GHz the distance is 1 meter).
- h. Repeat above procedures until all frequencies measured was complete.

**Test Setup:**

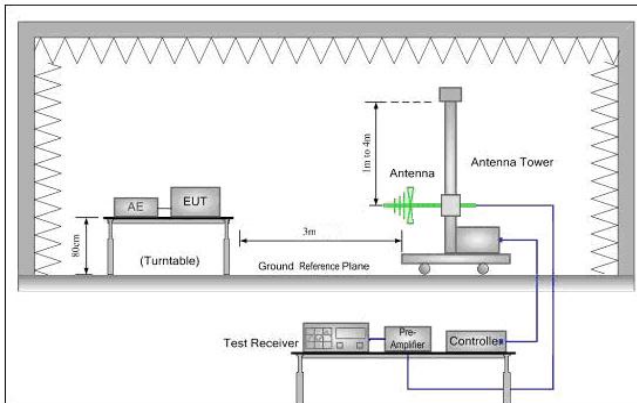


Figure 1. 30MHz to 1GHz

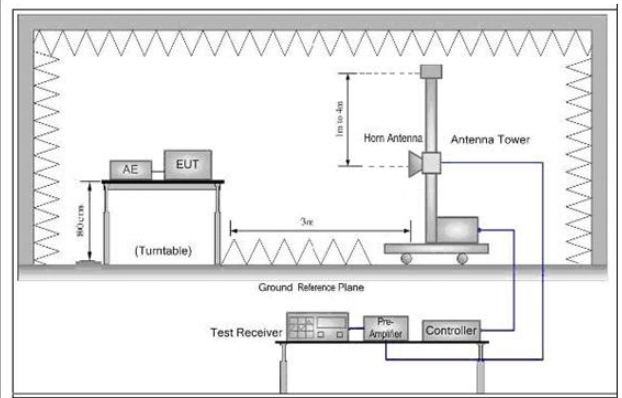


Figure 2. Above 1 GHz

**Instruments Used:** Refer to section 5 for details


**Test Mode:** Normal working, Charging mode

**Test Status:** Pretest the EUT at different test mode and found the Charging mode which is worst case, the test worst case mode is recorded in the report.

**Test Results:** Pass


Below 1GHz

Horizontal

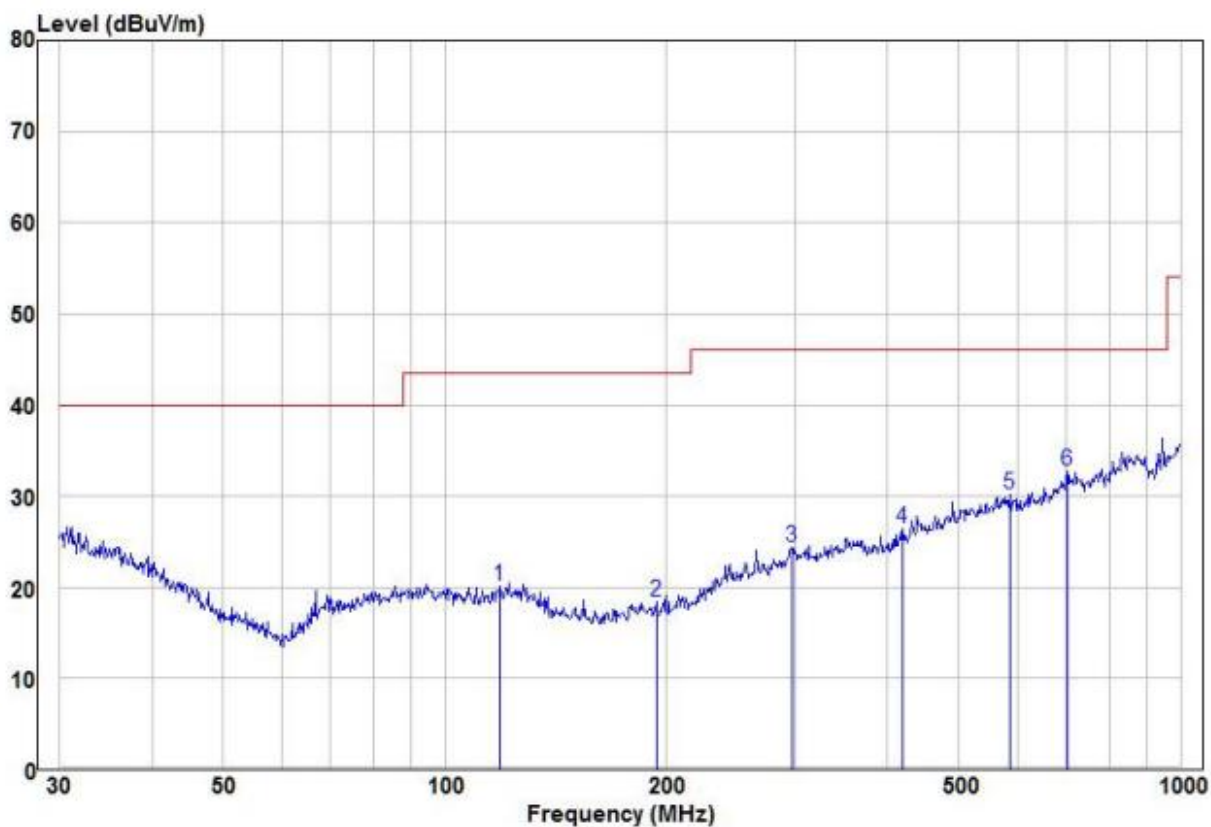

	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	119.02	9.47	10.65	20.12	43.50	-23.38	Peak	HORIZONTAL
2	193.77	10.20	8.17	18.37	43.50	-25.13	Peak	HORIZONTAL
3	296.18	10.79	13.60	24.39	46.00	-21.61	Peak	HORIZONTAL
4	419.11	10.73	15.75	26.48	46.00	-19.52	Peak	HORIZONTAL
5	586.84	11.45	18.67	30.12	46.00	-15.88	Peak	HORIZONTAL
6 pp	701.76	11.72	21.10	32.82	46.00	-13.18	Peak	HORIZONTAL

Vertical

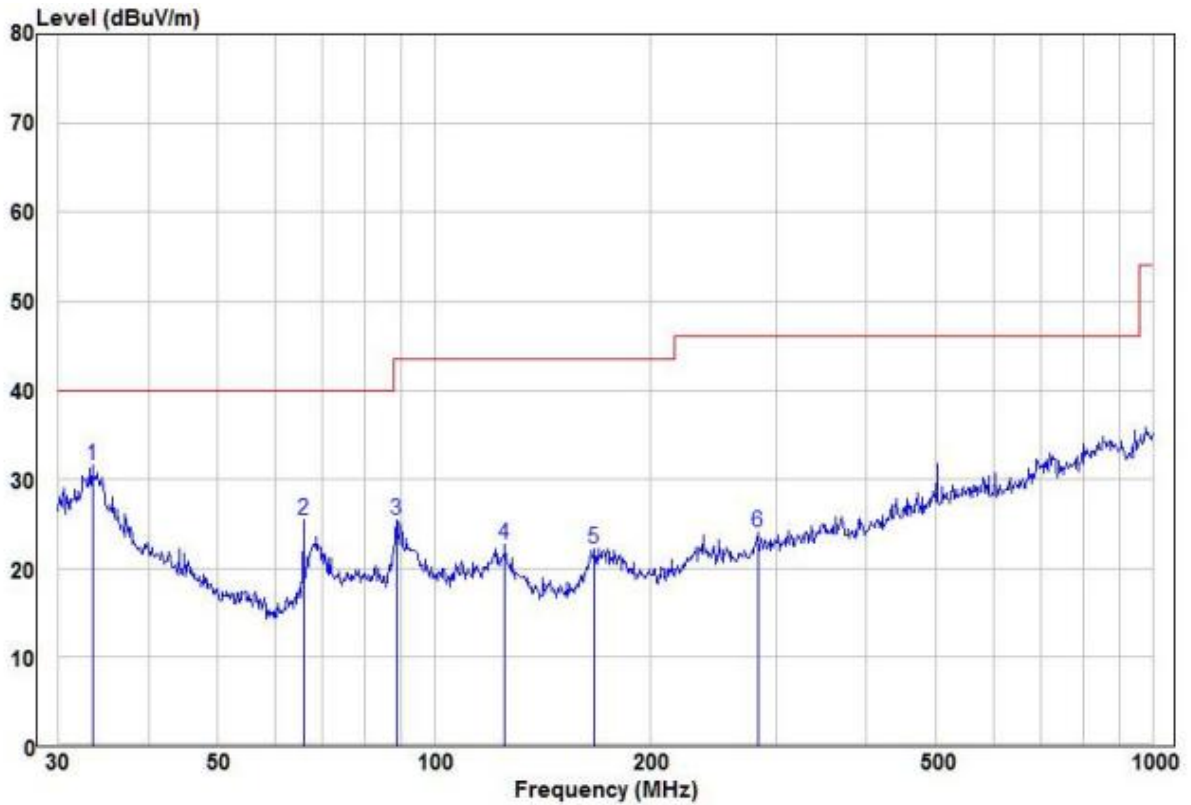


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	33.44	16.62	15.01	31.63	40.00	-8.37 Peak	VERTICAL
2	65.80	18.67	6.84	25.51	40.00	-14.49 Peak	VERTICAL
3	88.65	15.44	9.98	25.42	43.50	-18.08 Peak	VERTICAL
4	125.45	12.24	10.49	22.73	43.50	-20.77 Peak	VERTICAL
5	167.24	14.49	7.67	22.16	43.50	-21.34 Peak	VERTICAL
6	281.99	10.85	13.13	23.98	46.00	-22.02 Peak	VERTICAL



## APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

**Radiated emission Test Setup (30MHz~1GHz)**

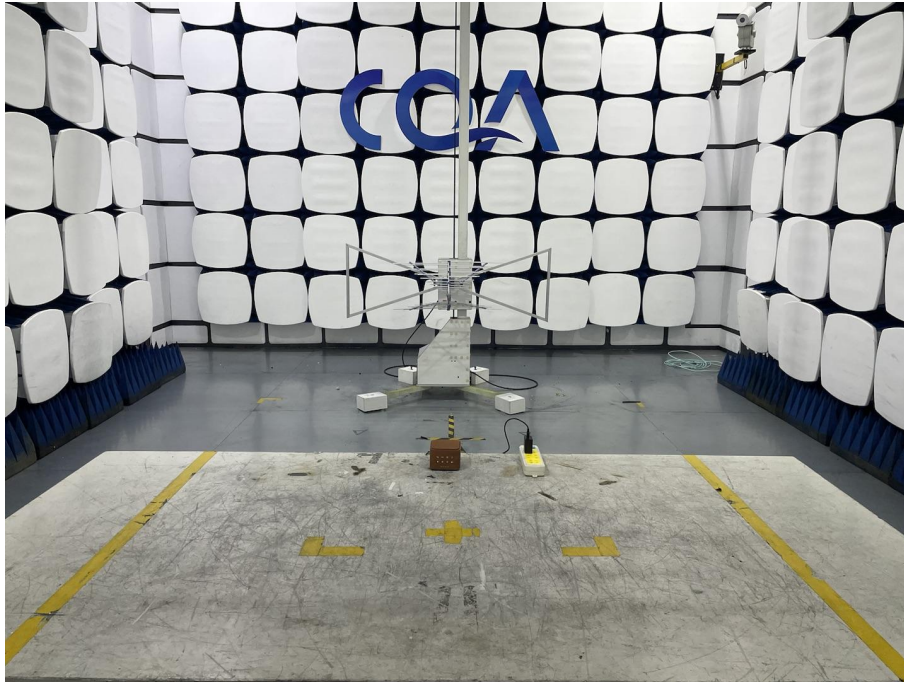

**Conducted Emissions Test Setup**



## APPENDIX 2 PHOTOGRAPHS OF EUT

