



FCC TEST REPORT

FCC ID: 2AVRV-DG3200

On Behalf of

DP AUDIO VIDEO LLC

32inch Rollable Smart Touchscreen TV

Model No.: DG3200RTV, OR3200RTV, WH32pro, CR3200RTV

Prepared for : DP AUDIO VIDEO LLC
Address : 1001 Gayley Avenue P.O Box 24857, Los Angeles, CA, USA
90024

Prepared By : Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West
Address : Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong,
China

Report Number : psi2404032-C01-R04
Date of Receipt : April 11, 2024
Date of Test : April 11, 2024-May 15, 2024
Date of Report : May 15, 2024
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY.....	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS	7
2.6	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8	ADDITIONAL INSTRUCTIONS	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA.....	9
4.1	ANTENNA REQUIREMENT:	9
4.2	CONDUCTED EMISSIONS	10
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	13
4.4	TRANSMIT POWER	51
4.5	POWER SPECTRAL DENSITY	68
4.6	BAND EDGE.....	84
4.7	RADIATED EMISSION	98
4.8	FREQUENCY STABILITY	104

TEST REPORT DECLARATION

Applicant : DP AUDIO VIDEO LLC
Address : 1001 Gayley Avenue P.O Box 24857, Los Angeles, CA, USA 90024
Manufacturer : Shenzhen Weihejia Electronics Technology Co.,LTD
Address : Block 102, Building 9, Xihu Industrial park, Xikeng community, Yuanshan street,
Longgang district, Shenzhen
EUT Description : 32inch Rollable Smart Touchscreen TV
(A) Model No. : DG3200RTV, OR3200RTV, WH32pro, CR3200RTV
(B) Trademark : DURAGO, ORCATV, CORE INNOVATIONS

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang

Test Engineer



Approved by (name + signature).....:

Simple Guan

Project Manager



Date of issue.....:

May 15, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 15, 2024	Initial released Issue	Felix Pang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4 RSS-Gen Issue 5	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 RSS-GEN(8.8), ANSI C63.10	PASS
occupied bandwidth	Section 15.407 (e)	PASS
Peak Transmit Power	Section 15.407(a), RSS-247 5.4(2)	PASS
Power Spectral Density	Section 15.407(a), RSS-247 5.2(2)	PASS
Undesirable Emission	Section 15.407(b), RSS-247 5.5	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 RSS-Gen(8.9), RSS-247(5.5), ANSI C63.10	PASS
Band Edge	15.205, RSS-247 Issue 2, ANSI C63.10	PASS
Frequency Stability	15.407(f), RSS-GEN(6.11)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V) 2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V) 4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V) 4.30dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : 32inch Rollable Smart Touchscreen TV
Model : DG3200RTV, OR3200RTV, WH32pro, CR3200RTV
Diff : There is no difference except the name of the model. All tests are made with the DG3200RTV model.
Test Voltage : DC 18V from adapter, DC 12.8V from battery

Radio Technology : 5G WIFI

Operation : 802.11a/n(HT20)/ac(HT20): 5180~5240MHz, 5745~5825MHz
Frequency : 802.11n(HT40)/ac(HT40): 5190~5230MHz, 5755~5795MHz
802.11ac(HT80): 5210MHz, 5775MHz

Channel separation : 20MHz for 802.11a/ 802.11ac20/ 802.11n(HT20)
40MHz for 802.11ac40/ 802.11n(HT40)
80MHz for 802.11ac80

Modulation technology: : IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK, 256QAM)

Antenna Type : Internal antenna, Maximum Gain is 2.46dBi.

Software version : V1.0
Hardware version : V1.0

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission
Registration Number: 916281

2.4 Description of Support Units

Accessories : POWER ADAPTER
Manufacturer : N/A
Model : BCT180600-157ED
Input : 100-240V~ Max 1.6A 50/60Hz
Output : DC 18.0V/6.0A

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

3 Test Instruments list

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2023.12.19	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2023.12.19	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2023.12.19	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2023.04.03	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2022.12.26	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2023.12.19	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2022.12.26	2 Year
9.	Amplifier	SKET	LAPA_01G18G-45dB	SK2022032901	/	2023.12.19	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2022.12.25	2 Year
11.	Amplifier	SKET	LNPA_0118G-45	SK2020010801	/	2023.12.19	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-1111533-Fz	/	2023.12.19	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P008	/	2023.12.19	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2023.12.19	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2023.12.19	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10A	202211251638		2023.12.19	1 Year

For Test Software Information


Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal antenna, max gain 2.46dBi, for 5180~5240MHz; 5745~5825MHz	
	


4.2 Conducted Emissions

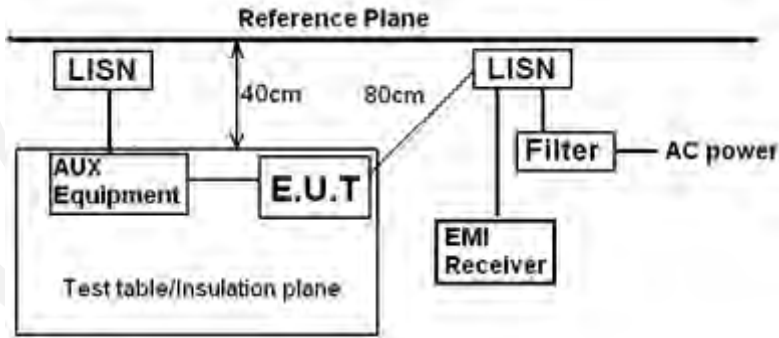Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height= 0.1m		
Test Instruments:	Refer to section 3.0 for details		
Test mode:	Refer to section 2.2 for details		
Test results:	Pass		

Measurement Data


An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

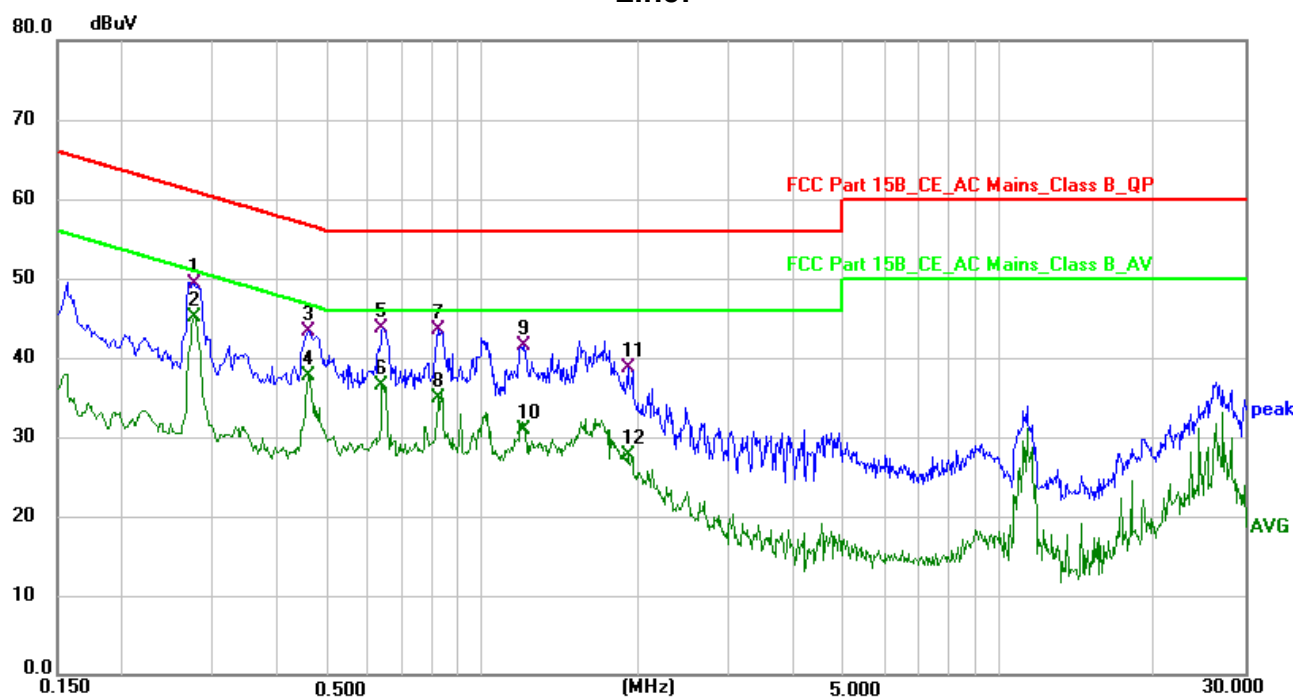

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2757	39.33	9.98	49.31	60.94	-11.63	QP	P
2 *	0.2757	35.18	9.98	45.16	50.94	-5.78	AVG	P
3	0.4580	33.59	9.79	43.38	56.73	-13.35	QP	P
4	0.4580	27.88	9.79	37.67	46.73	-9.06	AVG	P
5	0.6419	34.10	9.57	43.67	56.00	-12.33	QP	P
6	0.6419	26.87	9.57	36.44	46.00	-9.56	AVG	P
7	0.8220	34.02	9.42	43.44	56.00	-12.56	QP	P
8	0.8220	25.56	9.42	34.98	46.00	-11.02	AVG	P
9	1.1980	32.12	9.41	41.53	56.00	-14.47	QP	P
10	1.1980	21.51	9.41	30.92	46.00	-15.08	AVG	P
11	1.9180	29.25	9.39	38.64	56.00	-17.36	QP	P
12	1.9180	18.25	9.39	27.64	46.00	-18.36	AVG	P

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

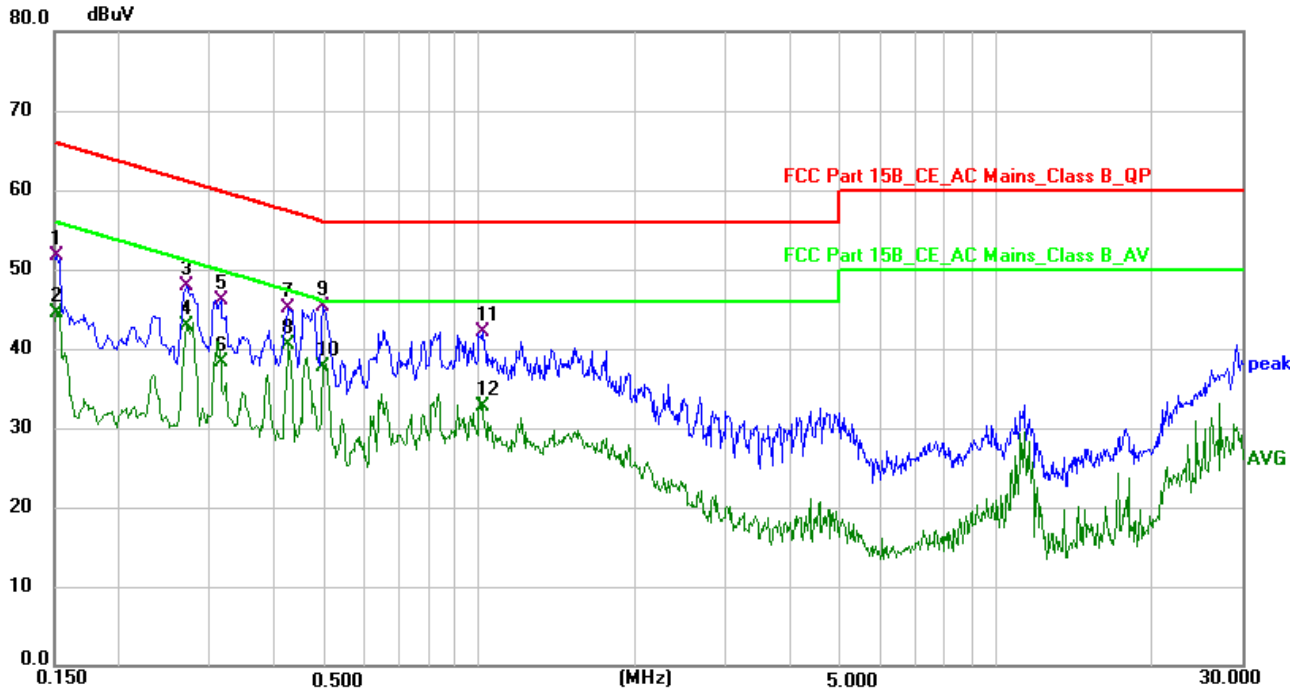
Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1514	42.01	9.78	51.79	65.92	-14.13	QP	P
2	0.1514	34.72	9.78	44.50	55.92	-11.42	AVG	P
3	0.2700	38.13	9.86	47.99	61.12	-13.13	QP	P
4	0.2700	33.13	9.86	42.99	51.12	-8.13	AVG	P
5	0.3140	36.33	9.75	46.08	59.86	-13.78	QP	P
6	0.3140	28.47	9.75	38.22	49.86	-11.64	AVG	P
7	0.4260	35.55	9.61	45.16	57.33	-12.17	QP	P
8 *	0.4260	30.84	9.61	40.45	47.33	-6.88	AVG	P
9	0.4980	35.55	9.78	45.33	56.03	-10.70	QP	P
10	0.4980	27.86	9.78	37.64	46.03	-8.39	AVG	P
11	1.0140	32.58	9.51	42.09	56.00	-13.91	QP	P
12	1.0140	23.27	9.51	32.78	46.00	-13.22	AVG	P

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.


4.3 Emission Bandwidth and 99% Occupied Bandwidth

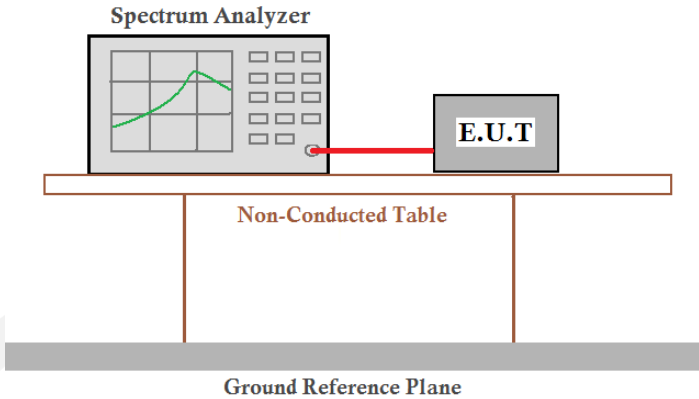
Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Measurement Data:


Band 1 (5150-5250 MHz):


Condition	Antenna	Modulation	Frequency(MHz)	26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
HVNT	ANT1	802.11a	5180.00	25.40	16.43
HVNT	ANT1	802.11a	5200.00	28.09	16.60
HVNT	ANT1	802.11a	5240.00	31.39	16.88
HVNT	ANT1	802.11n(HT20)	5180.00	25.32	17.59
HVNT	ANT1	802.11n(HT20)	5200.00	30.75	17.69
HVNT	ANT1	802.11n(HT20)	5240.00	32.71	17.87
HVNT	ANT1	802.11ac(VHT20)	5180.00	22.76	17.58
HVNT	ANT1	802.11ac(VHT20)	5200.00	29.41	17.71
HVNT	ANT1	802.11ac(VHT20)	5240.00	34.30	17.93
HVNT	ANT1	802.11n(HT40)	5190.00	68.91	36.30
HVNT	ANT1	802.11n(HT40)	5230.00	70.47	36.58
HVNT	ANT1	802.11ac(VHT40)	5190.00	62.21	36.16
HVNT	ANT1	802.11ac(VHT40)	5230.00	68.74	36.62
HVNT	ANT1	802.11ac(VHT80)	5210.00	135.78	76.72

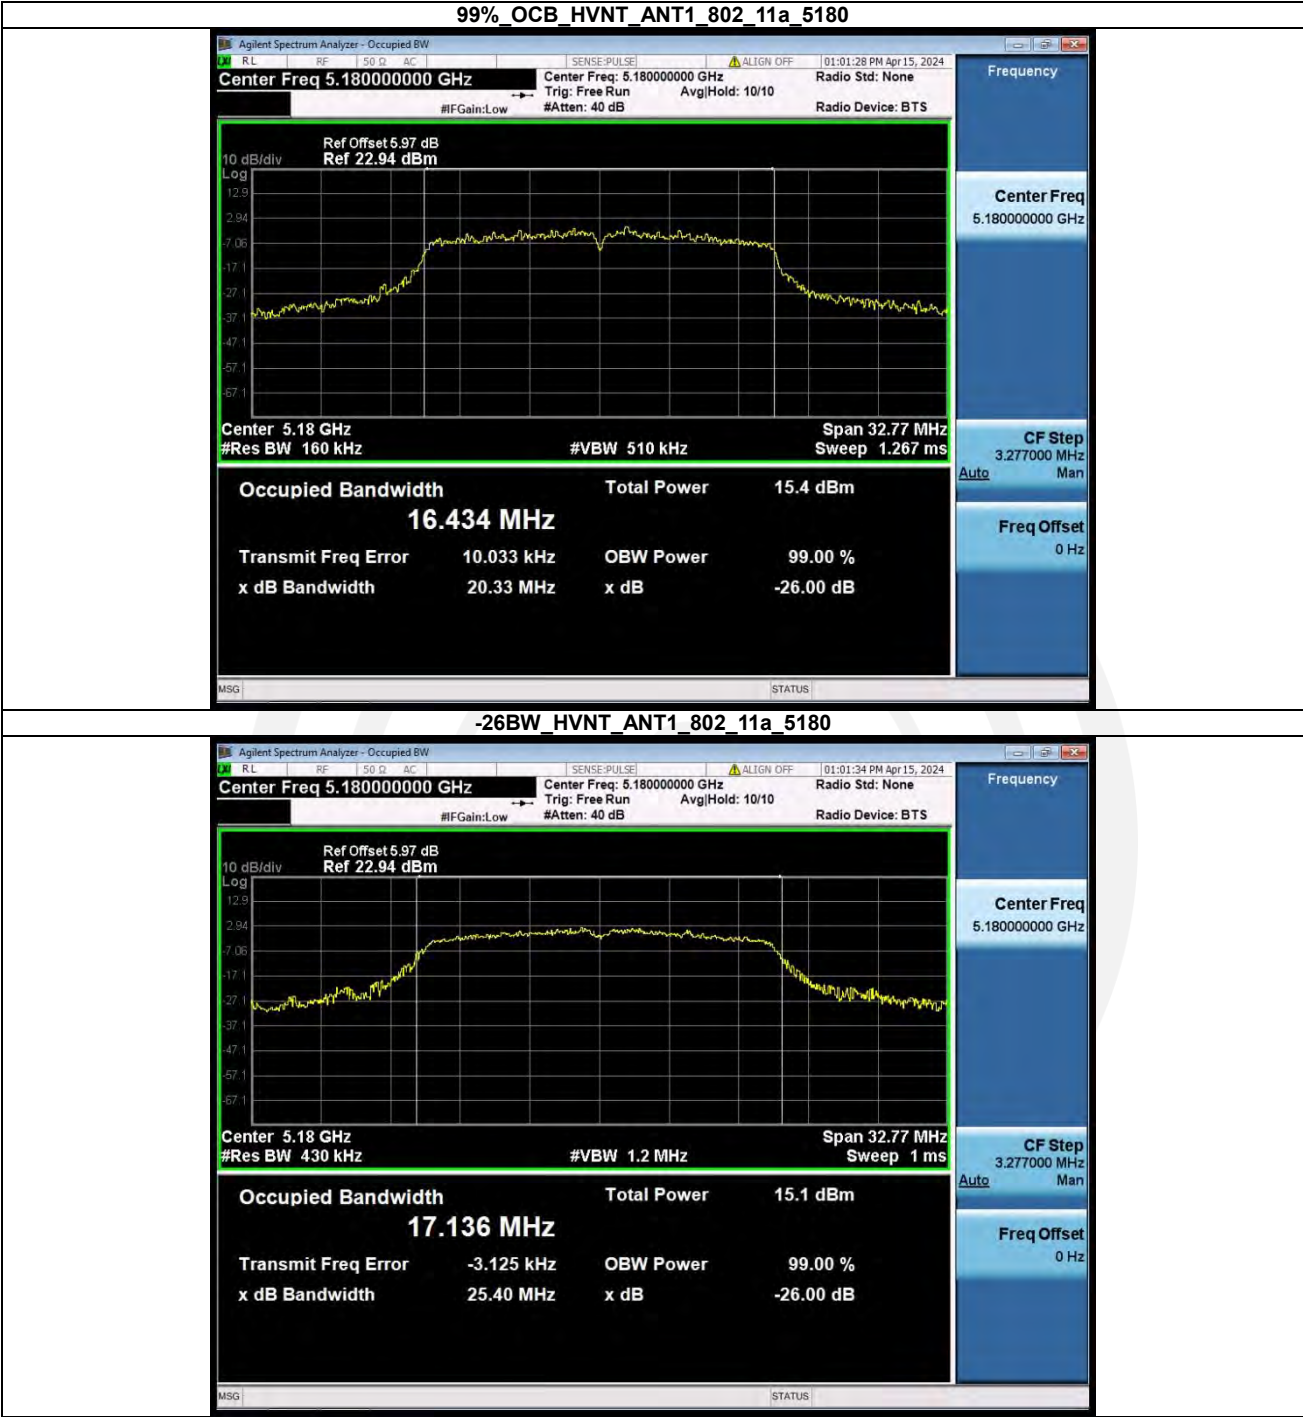


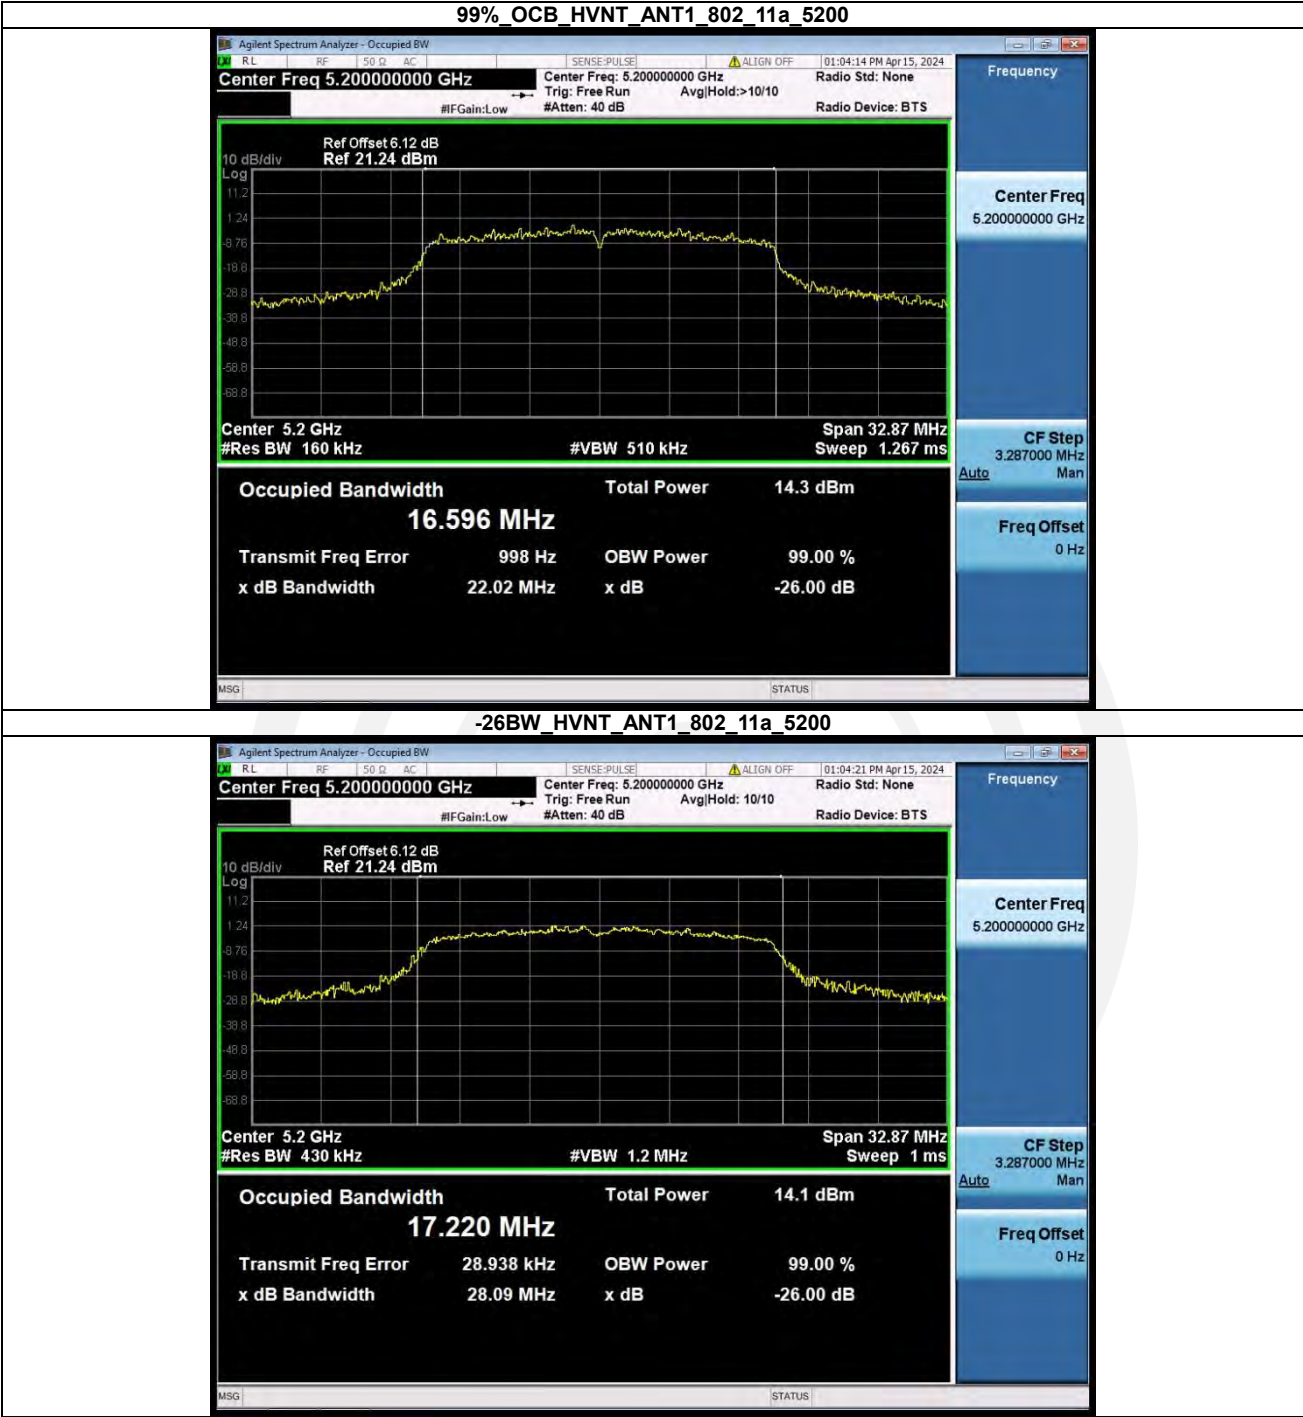


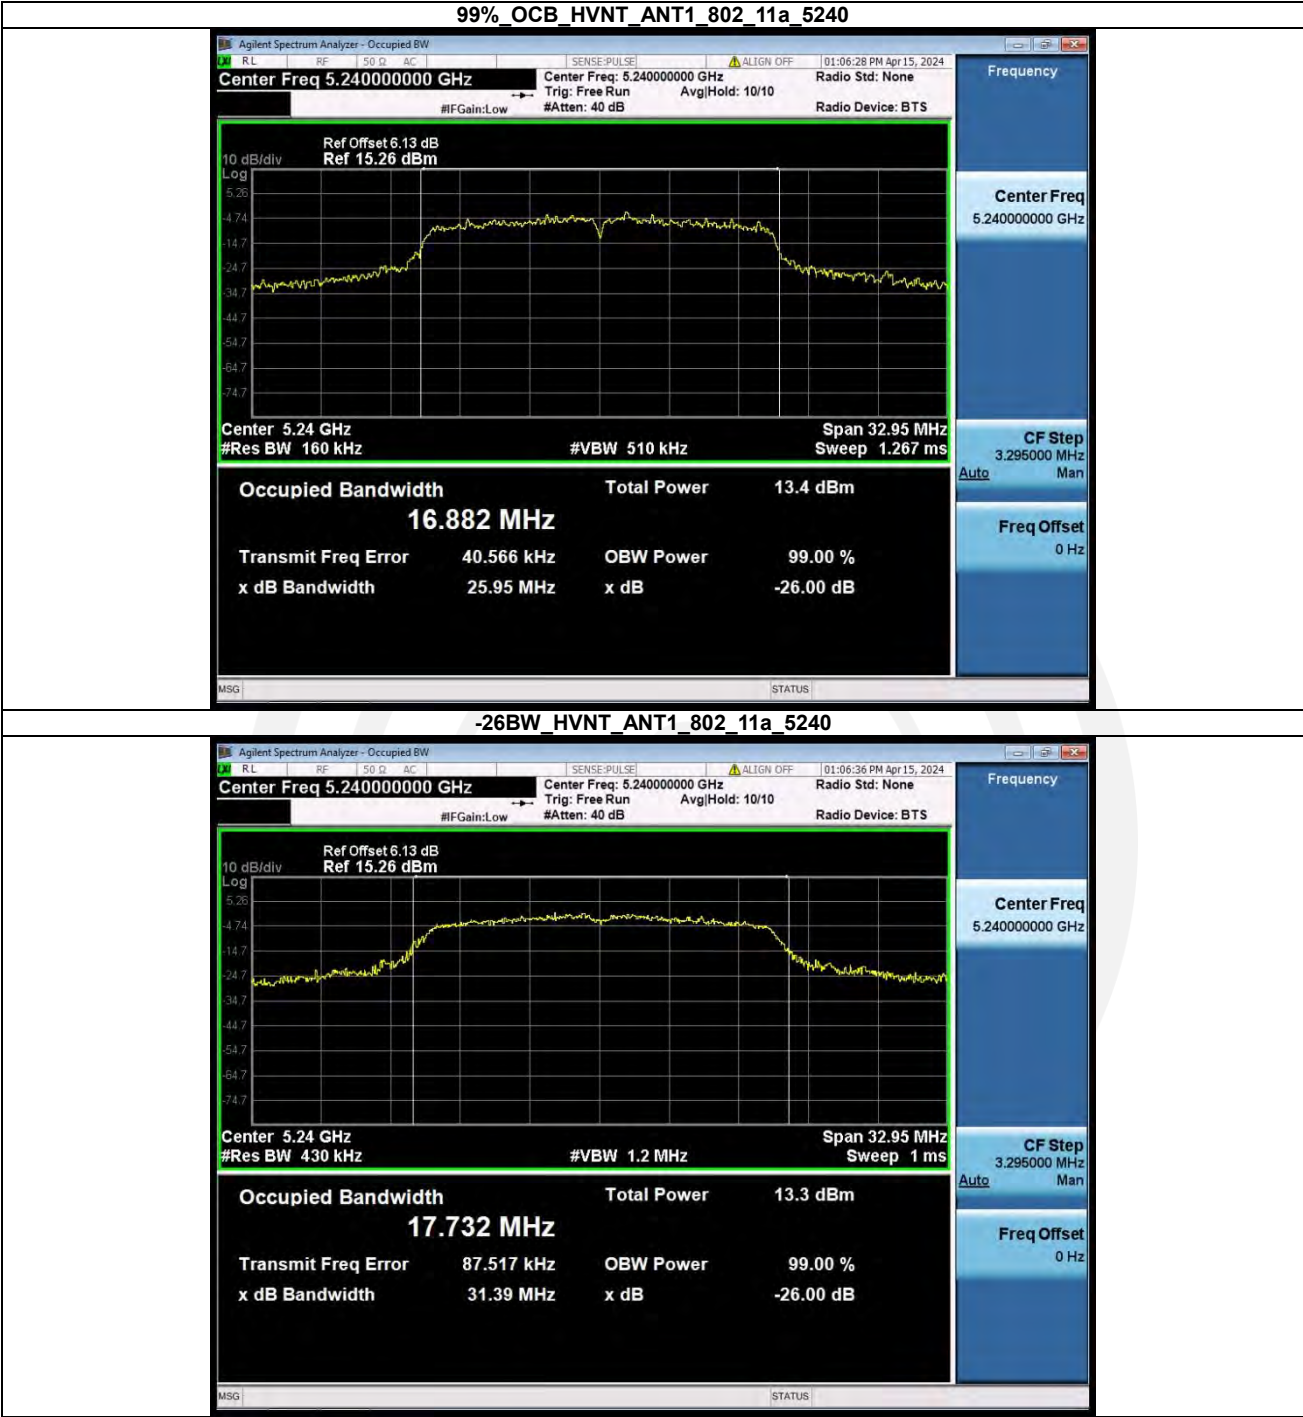


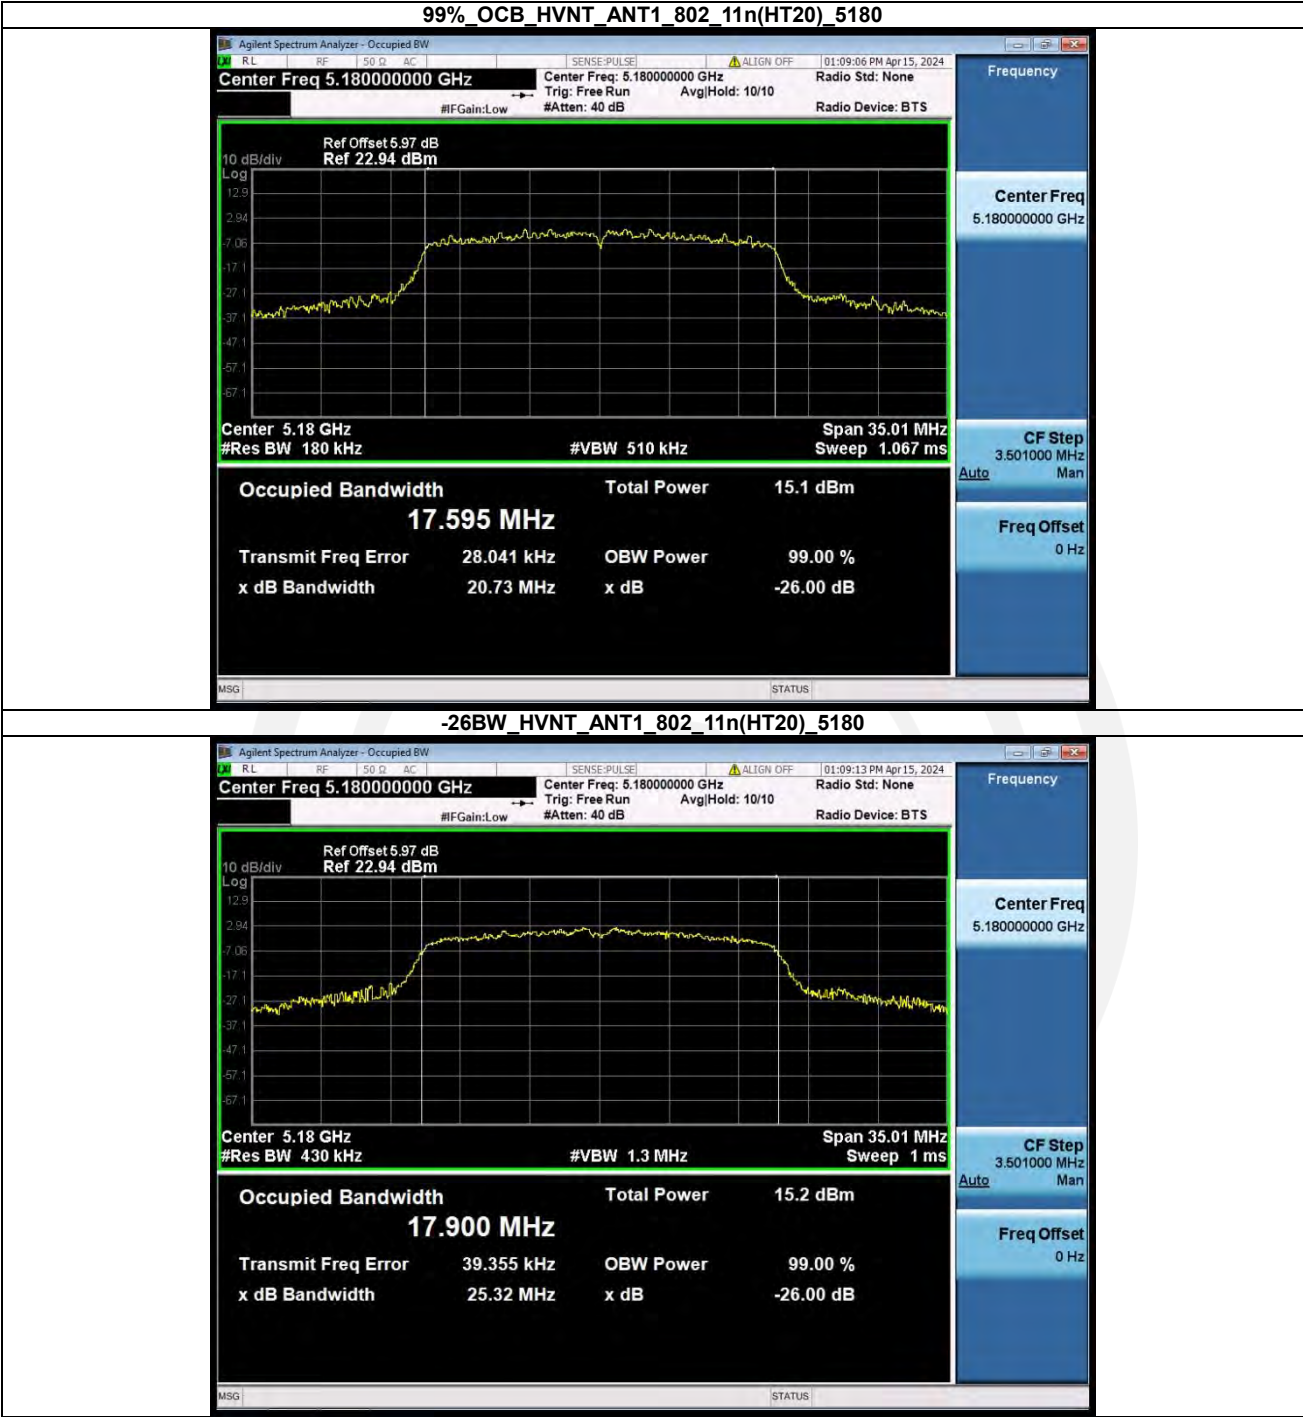


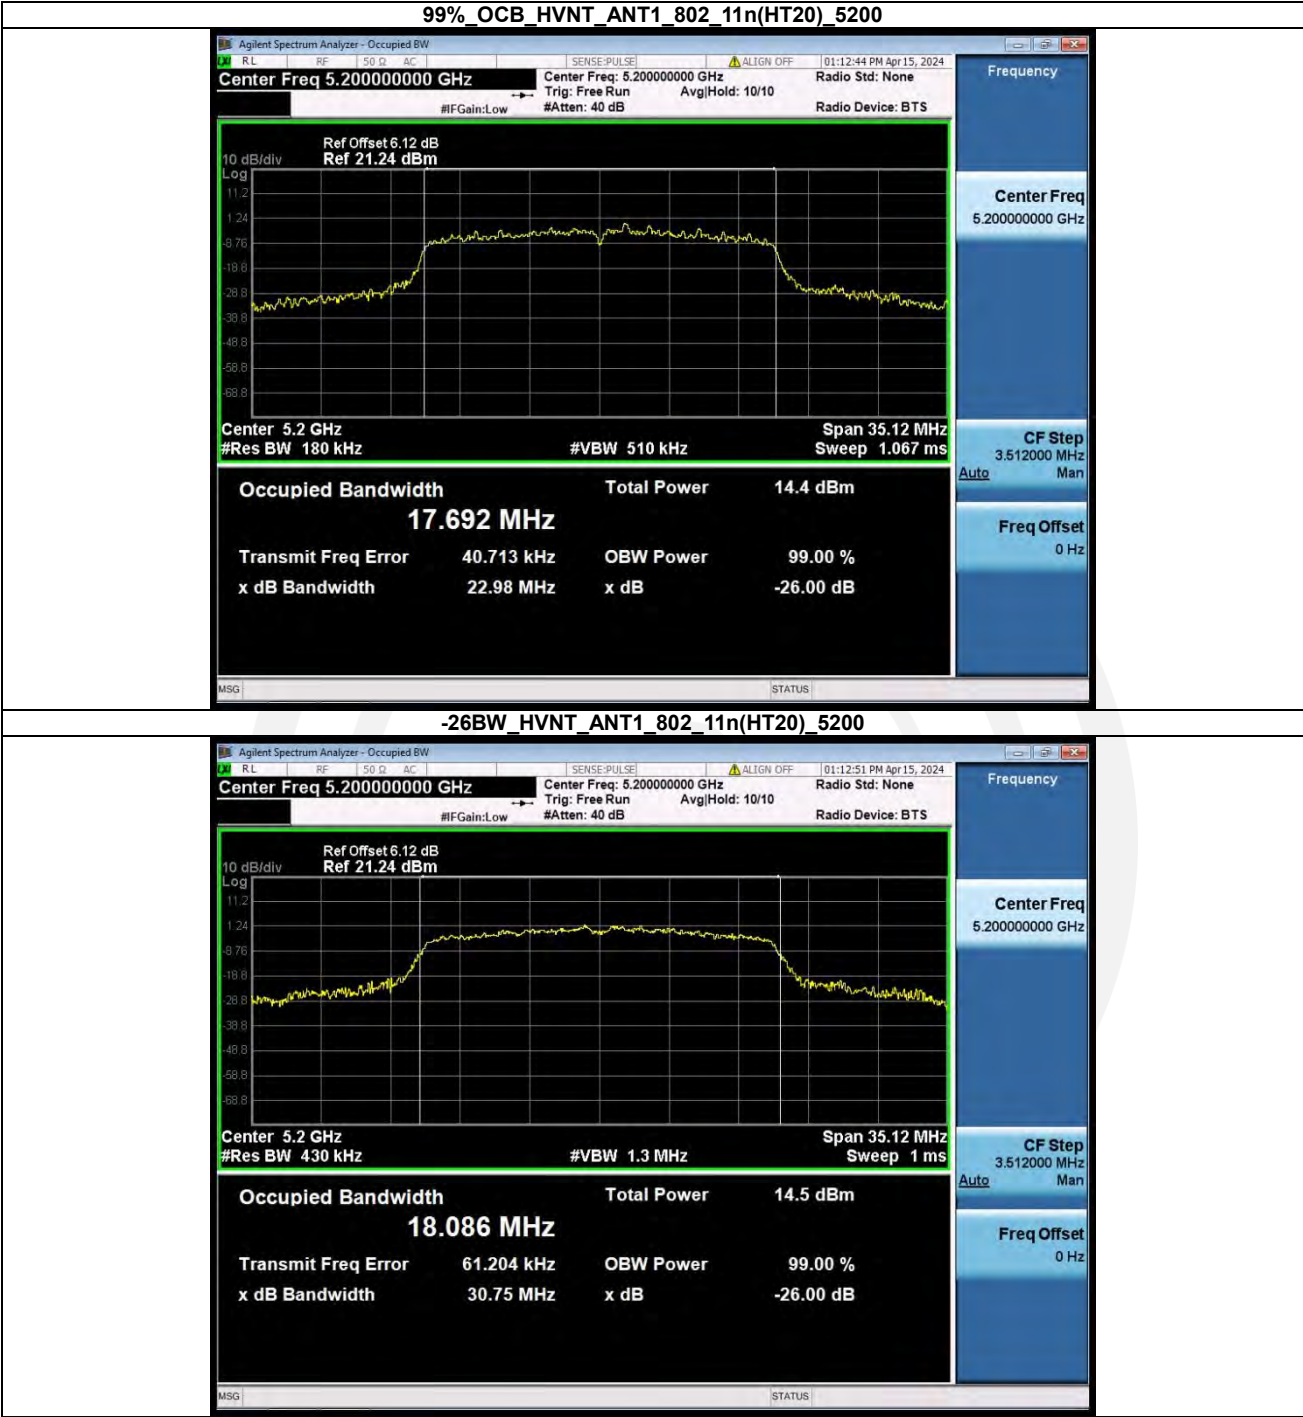


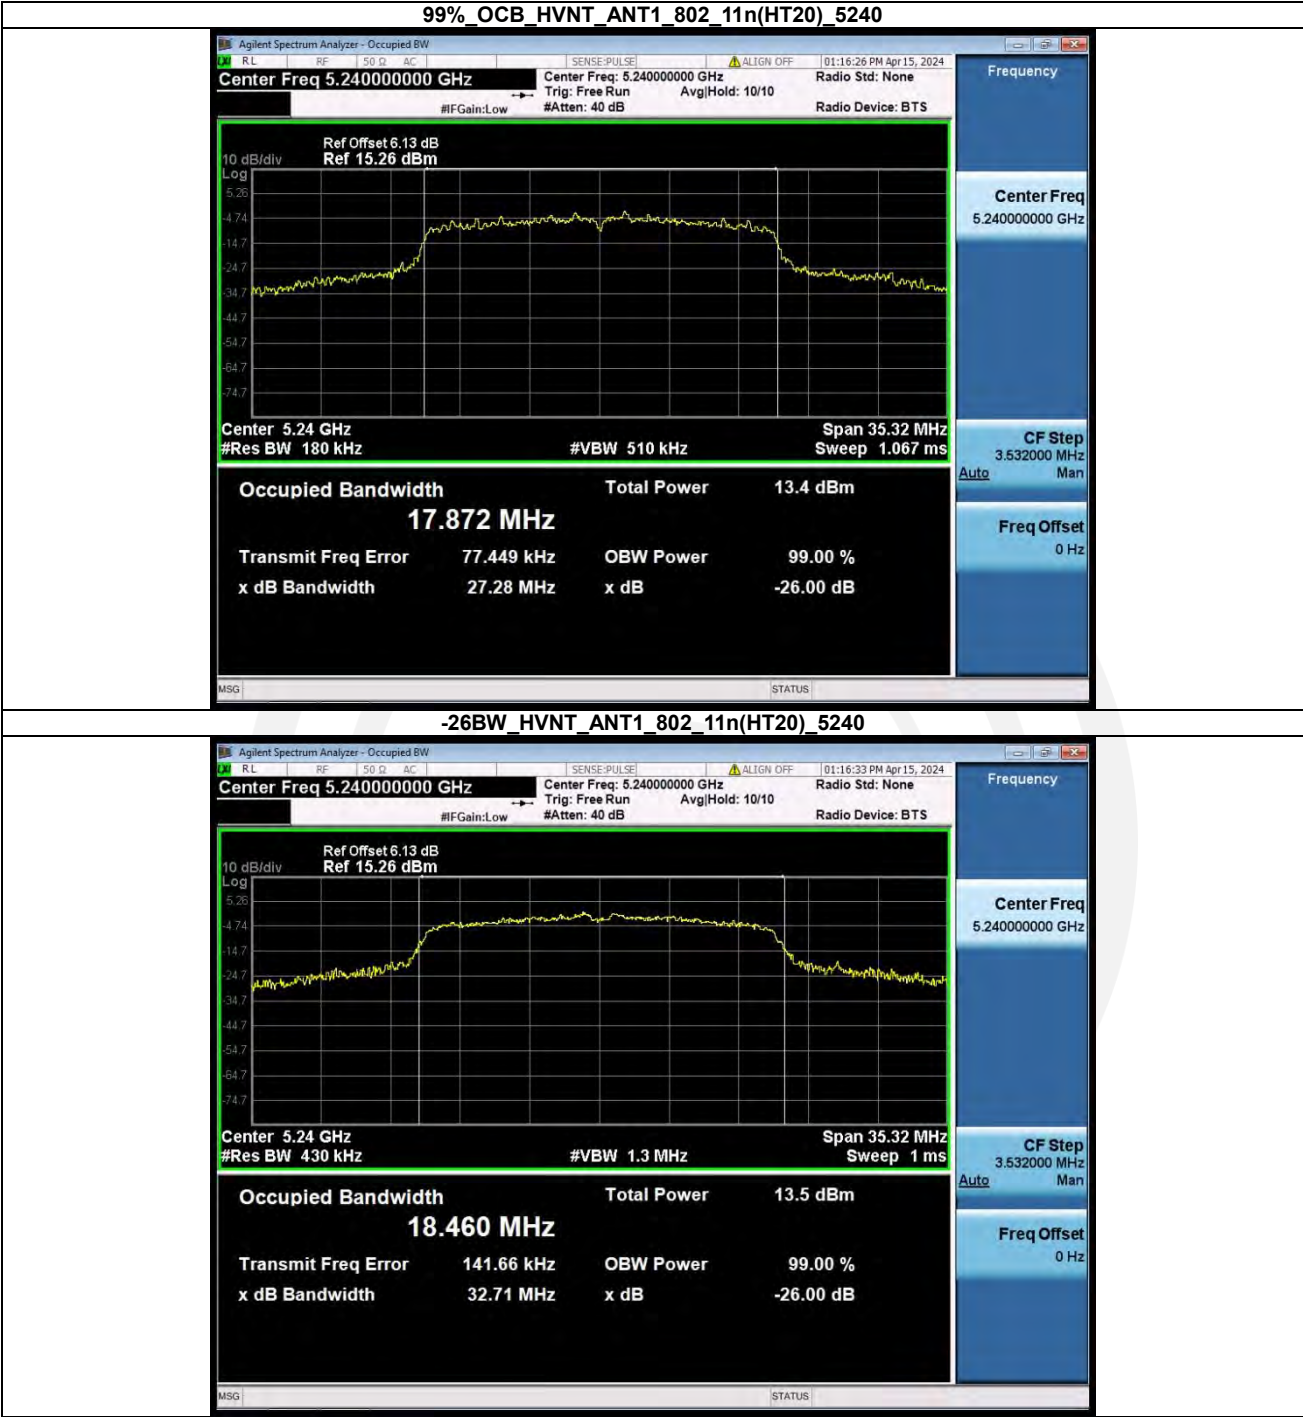


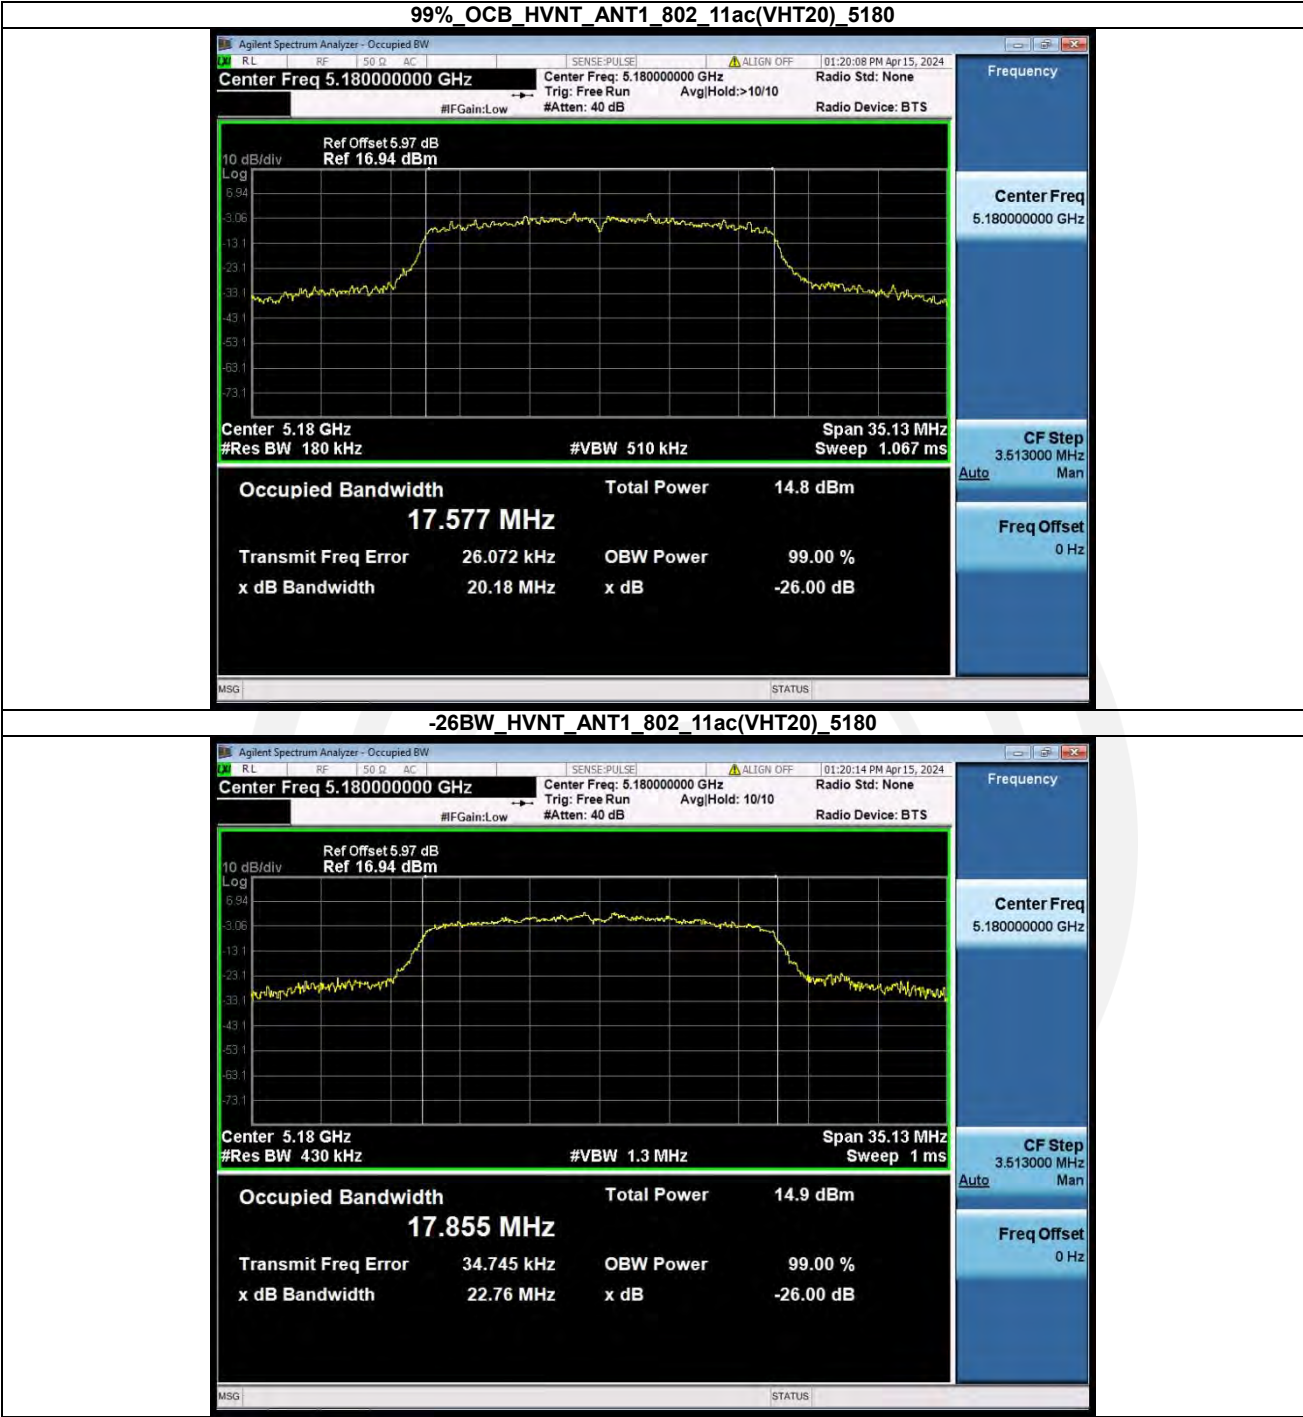


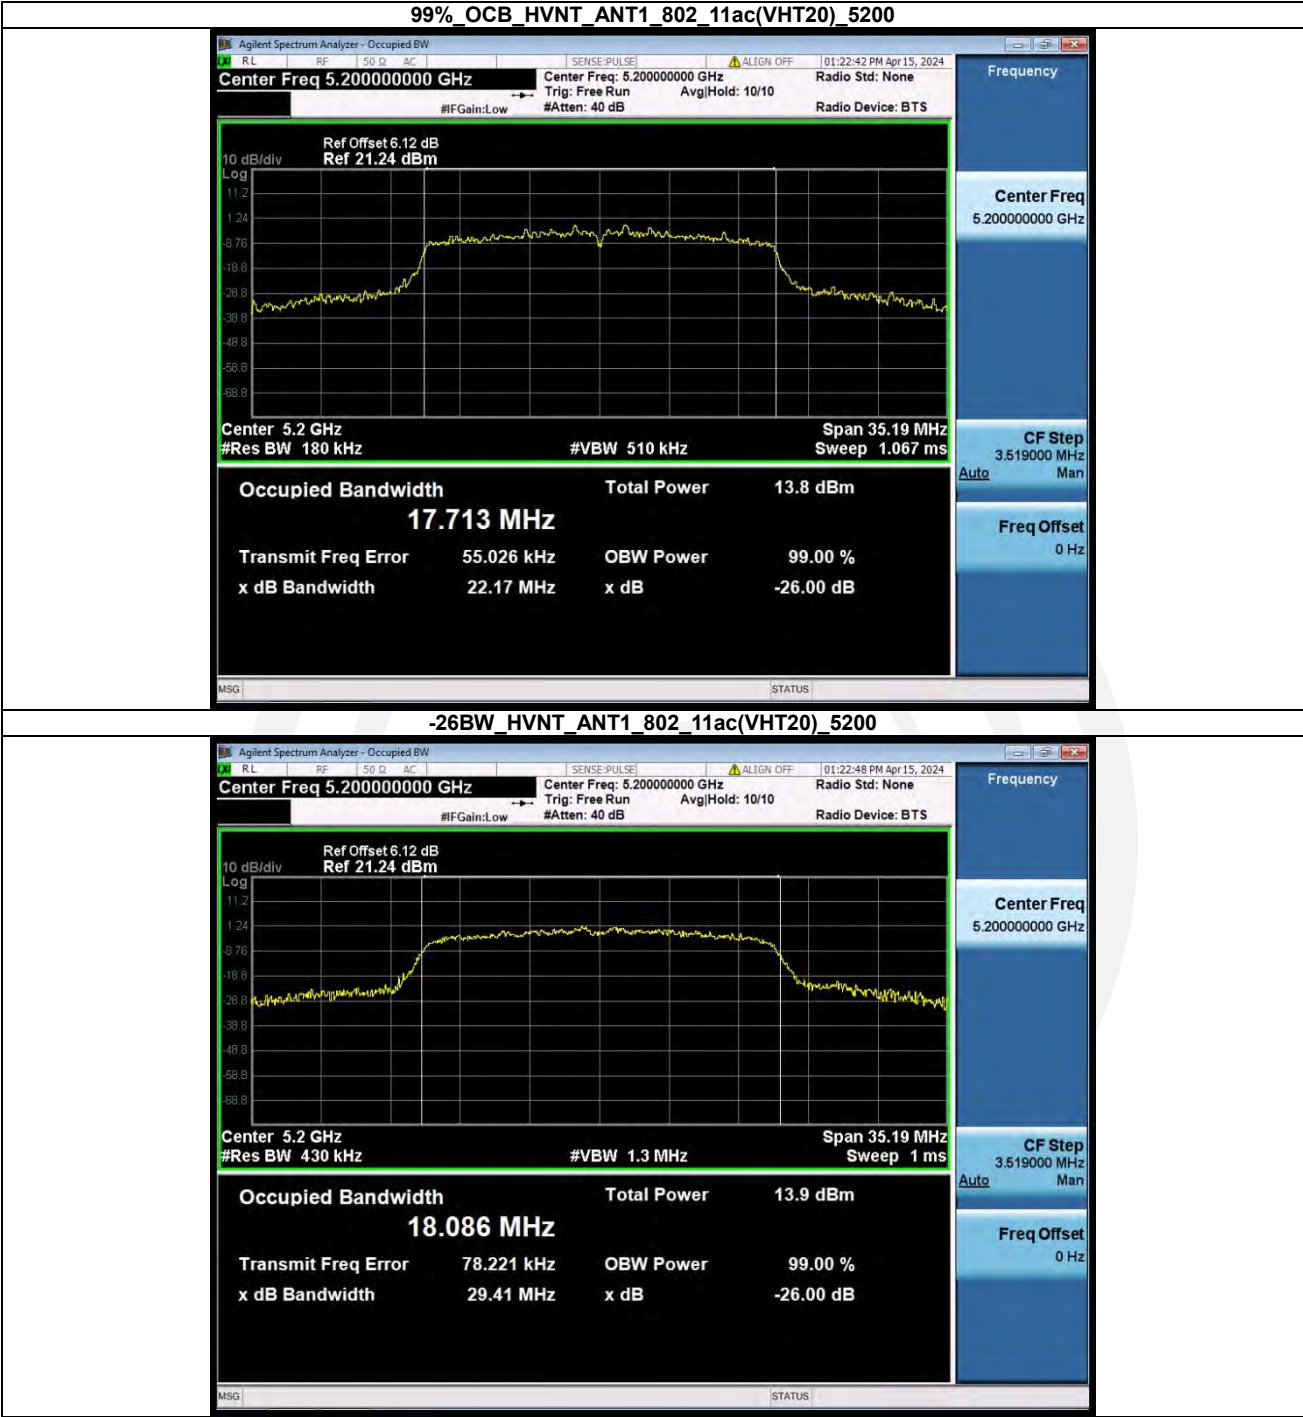


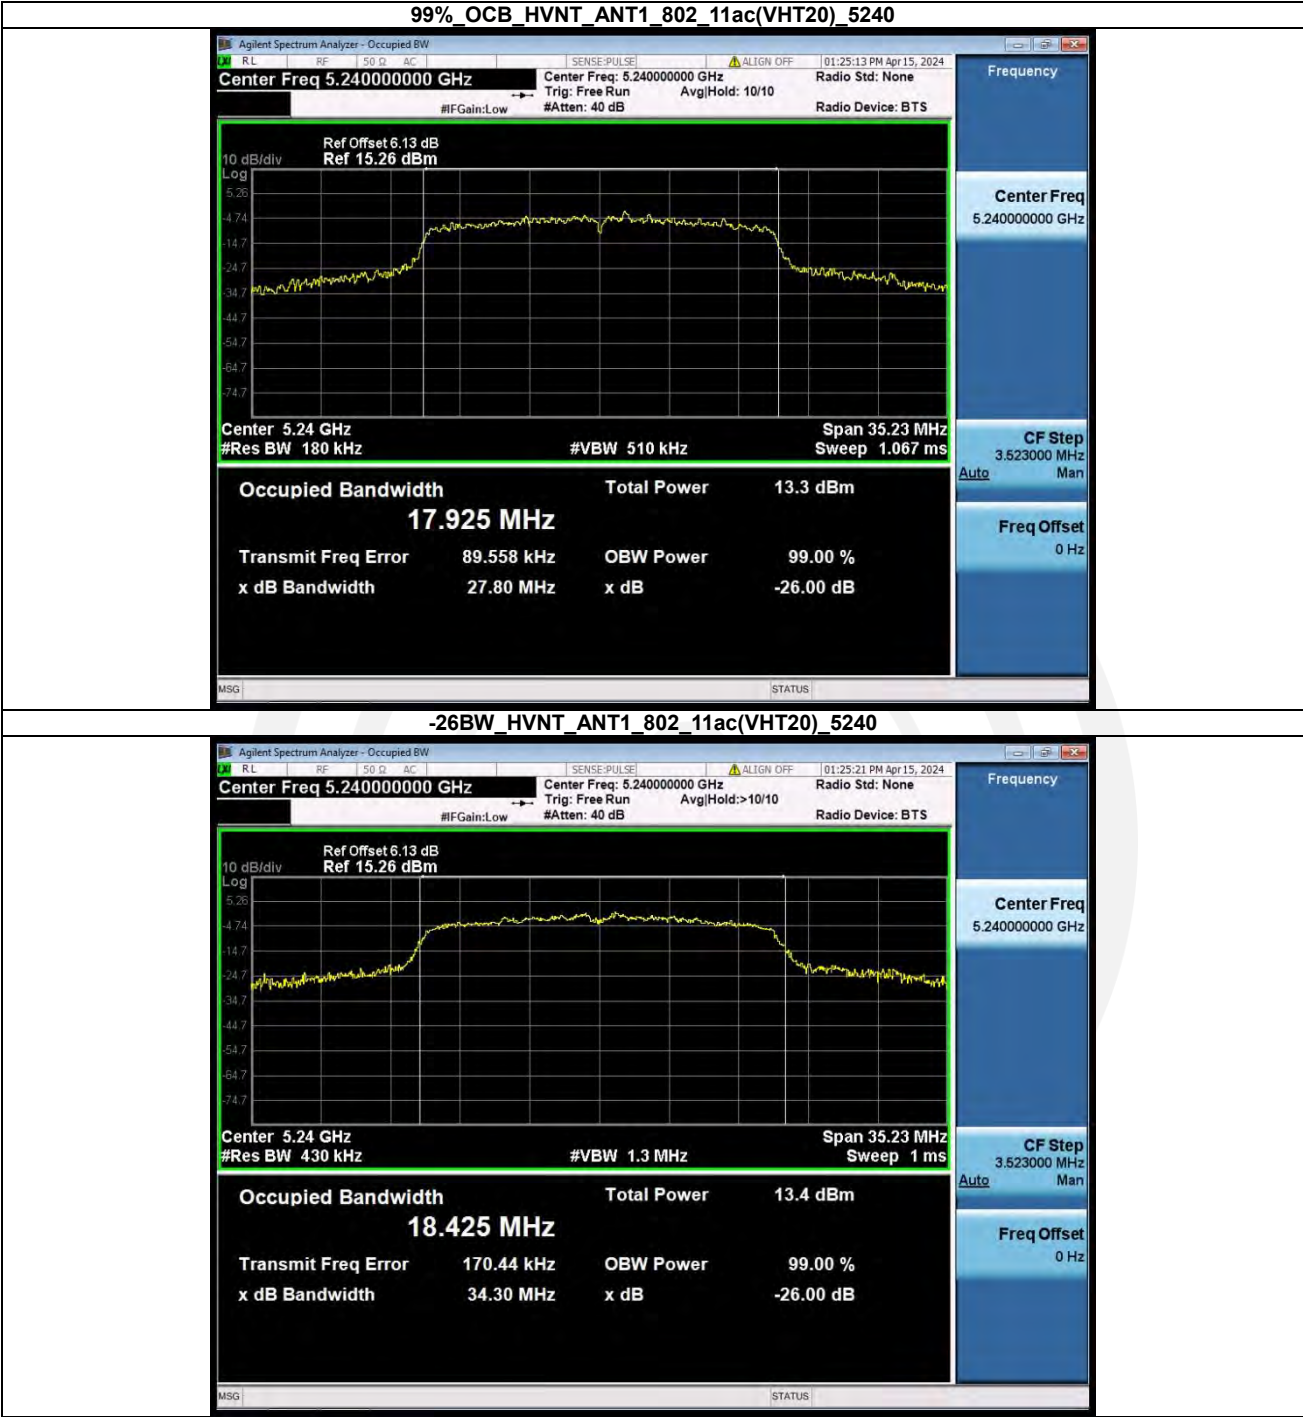


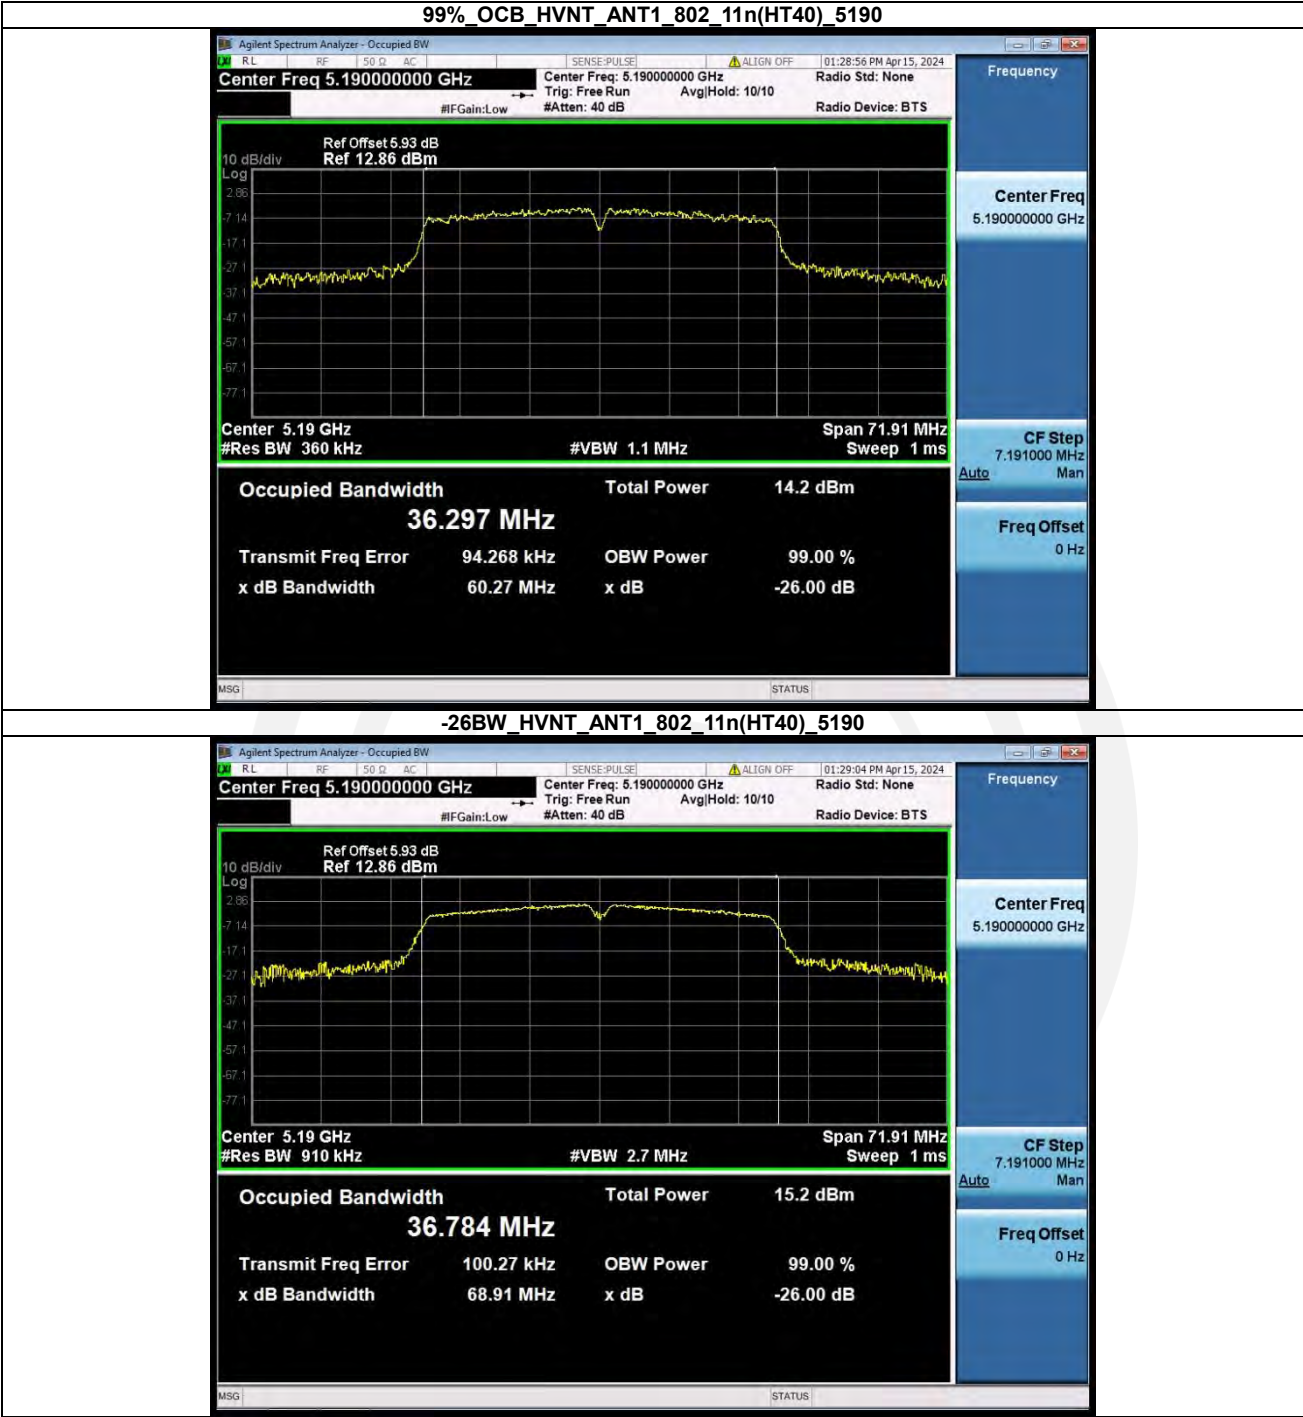

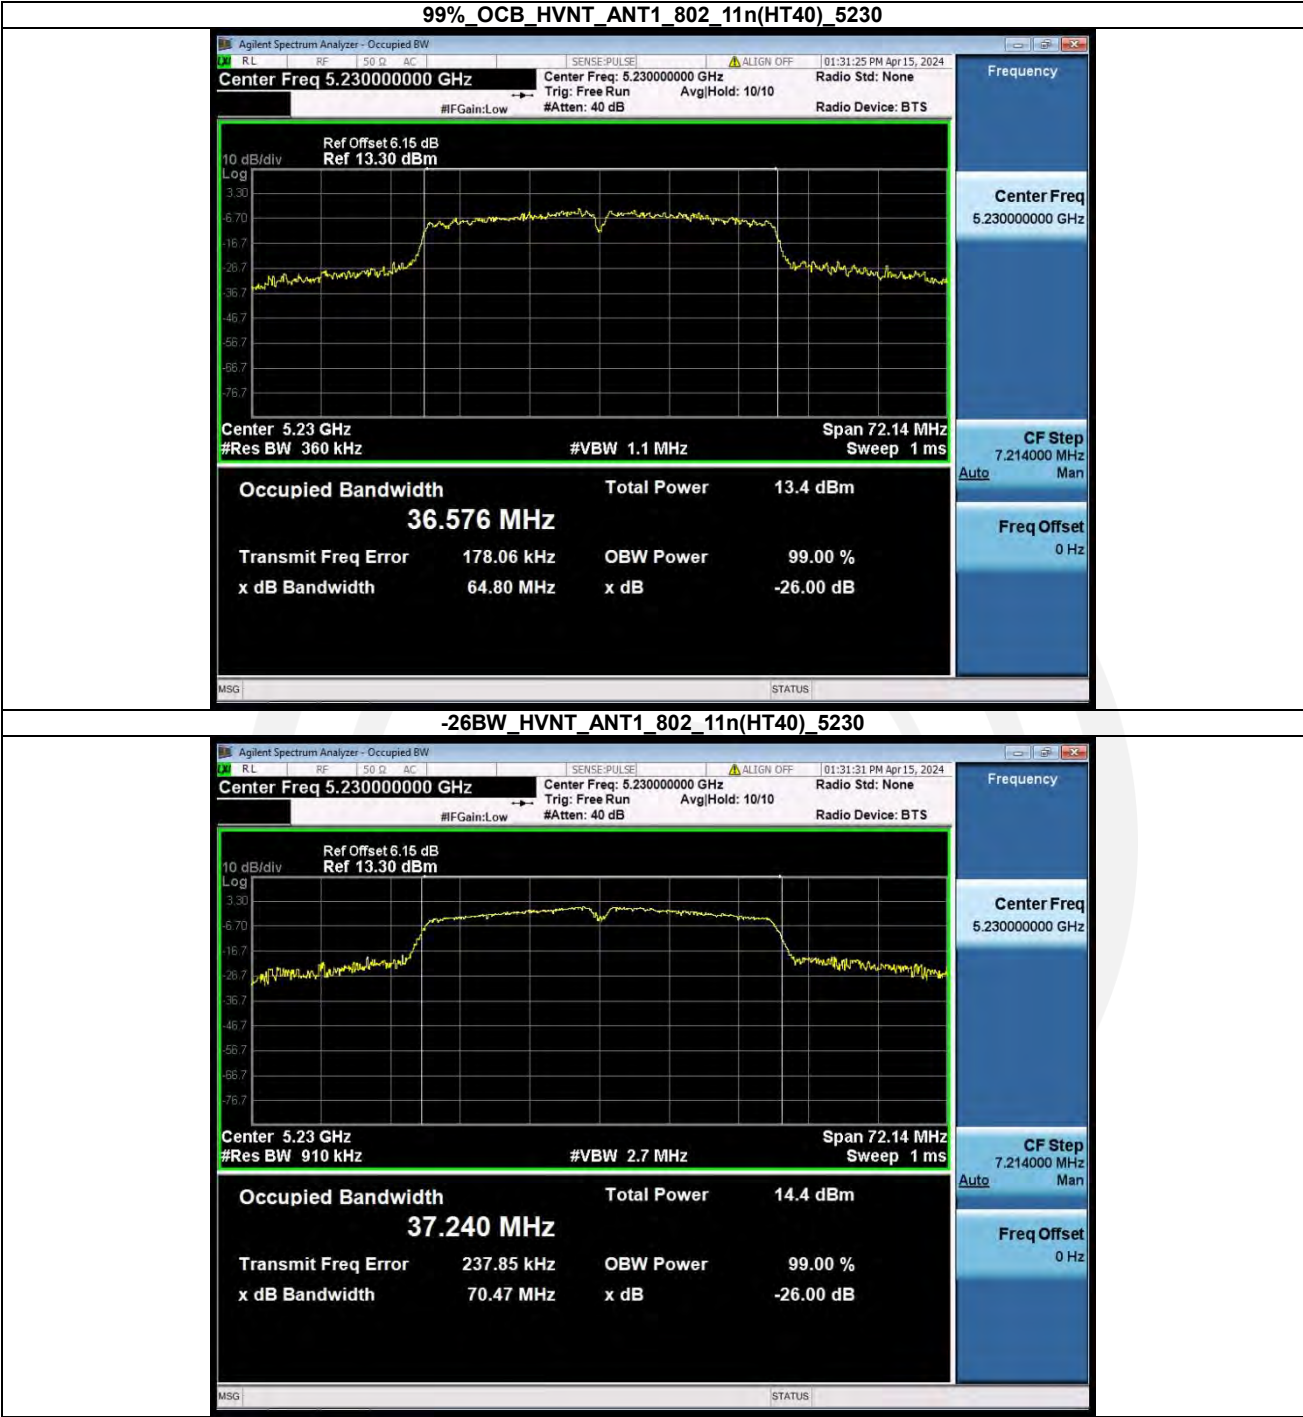

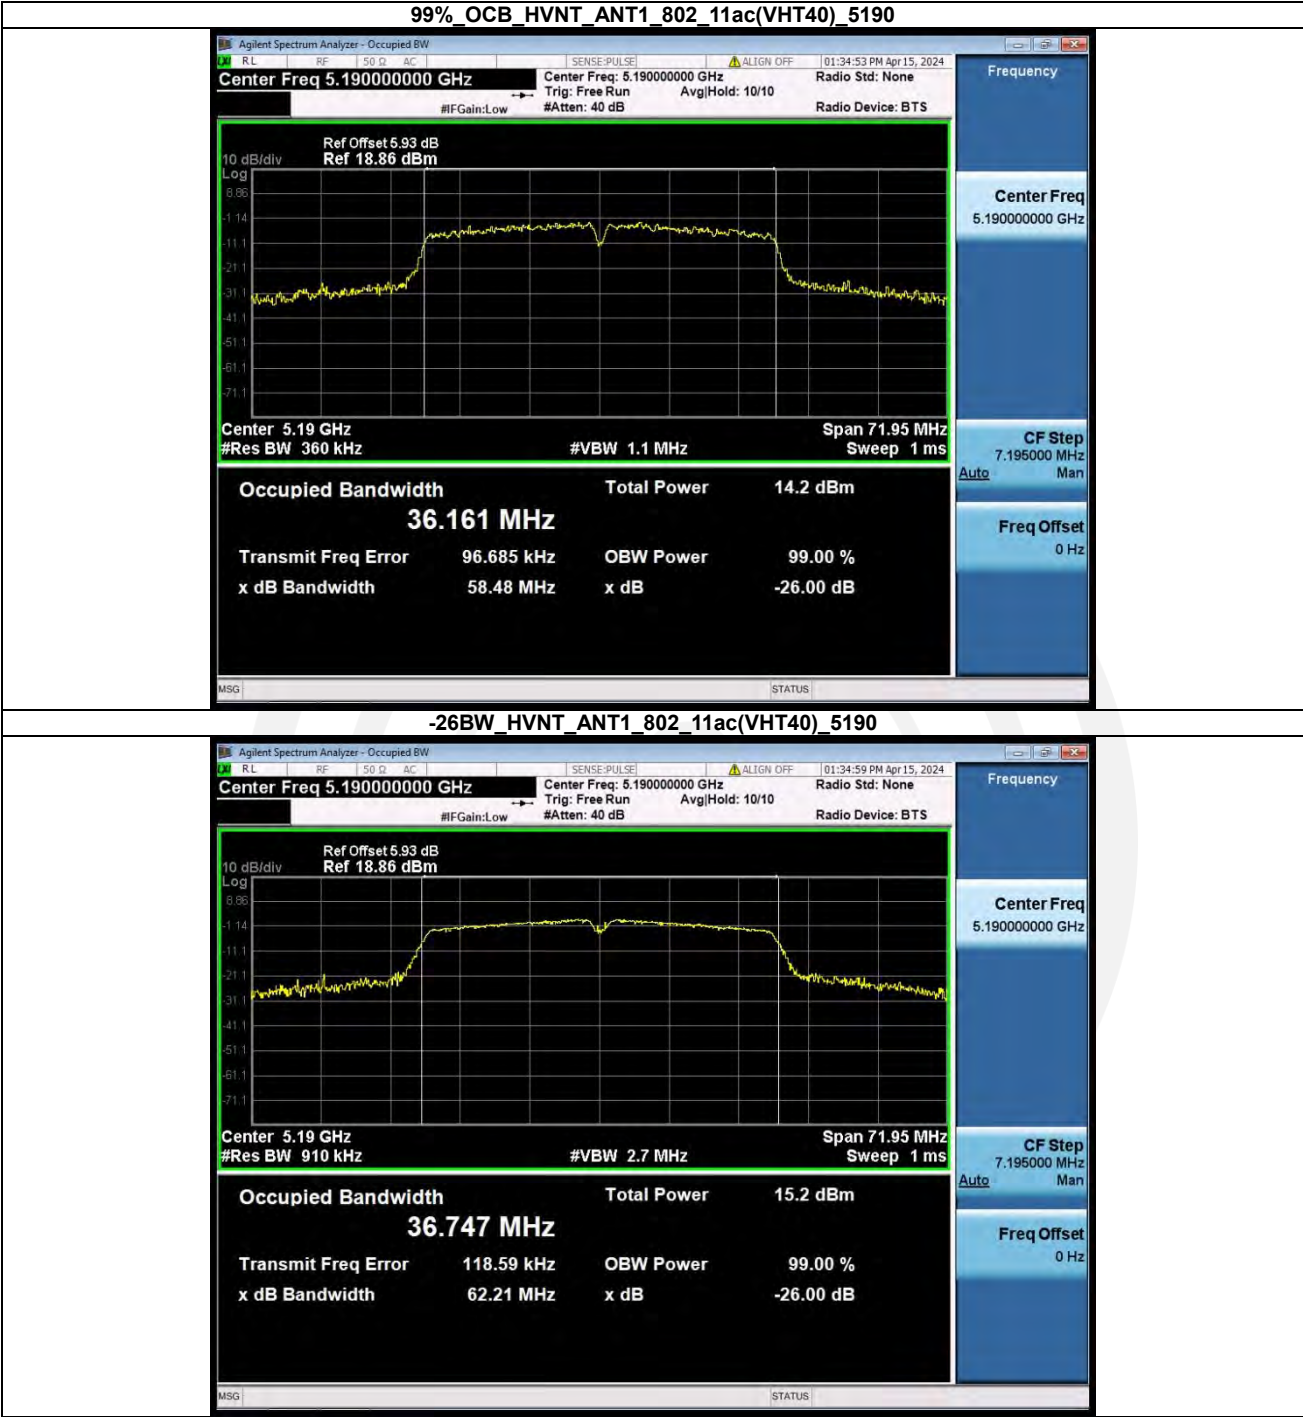


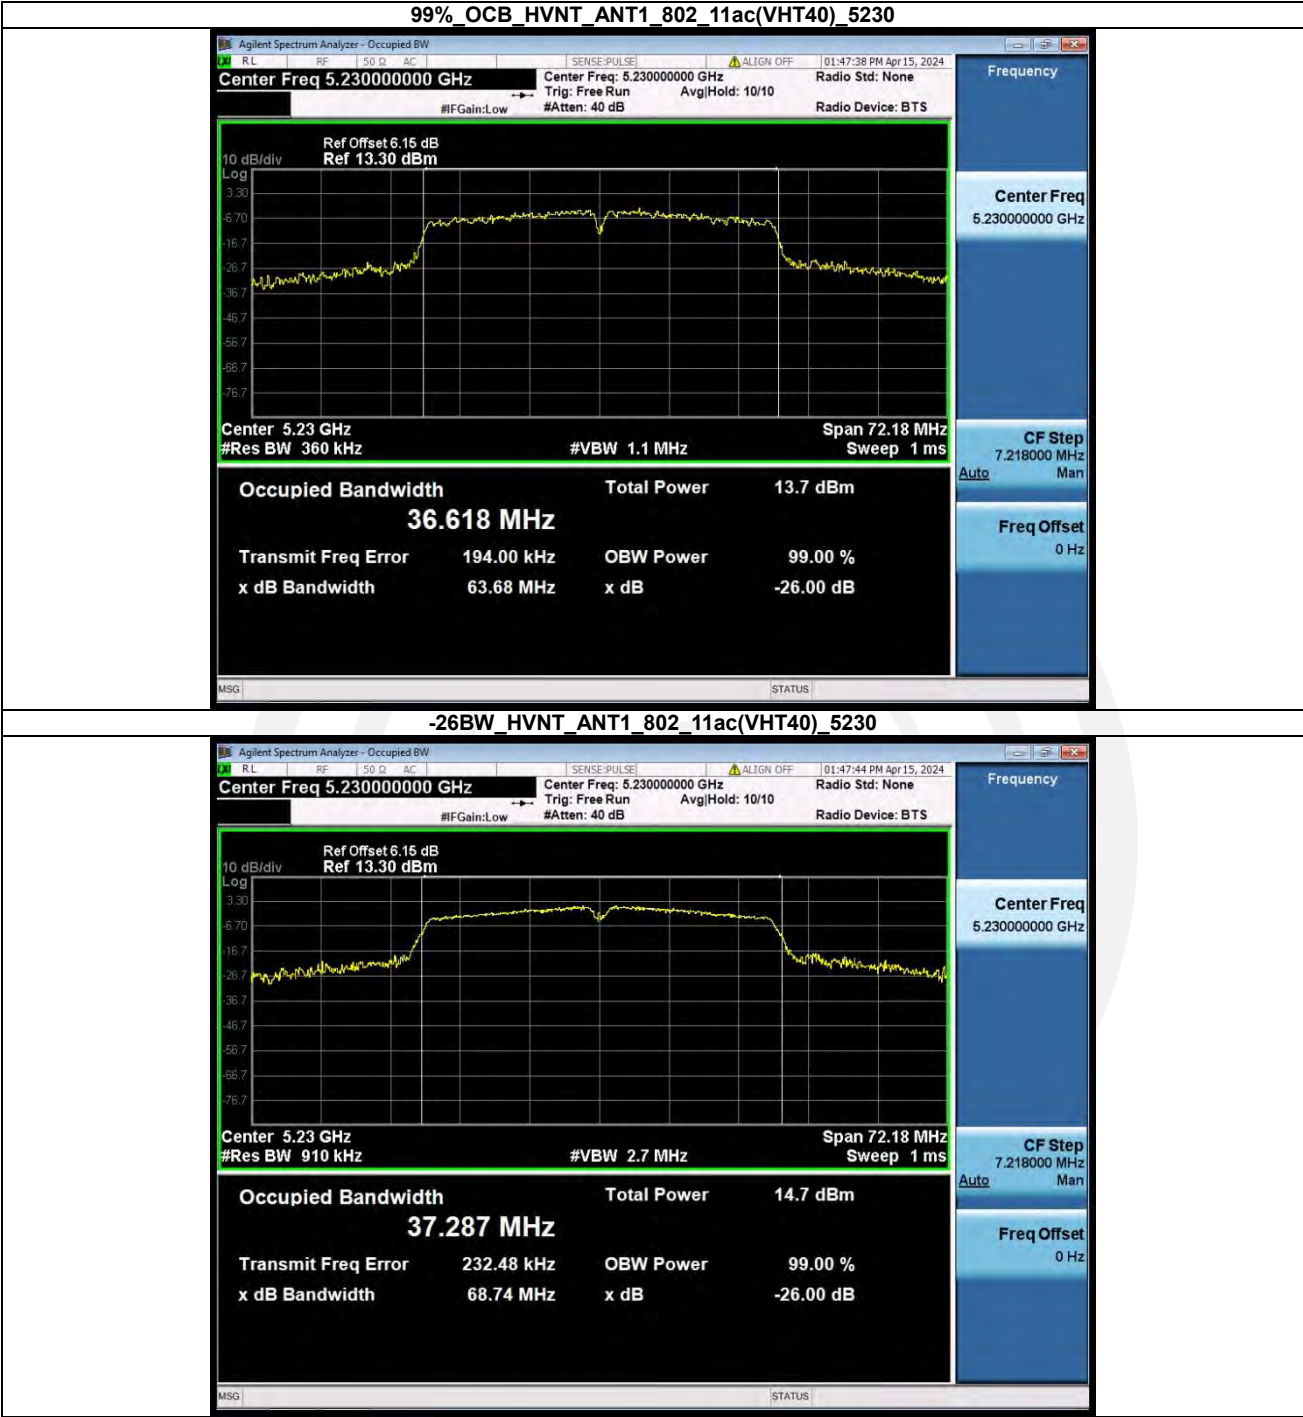



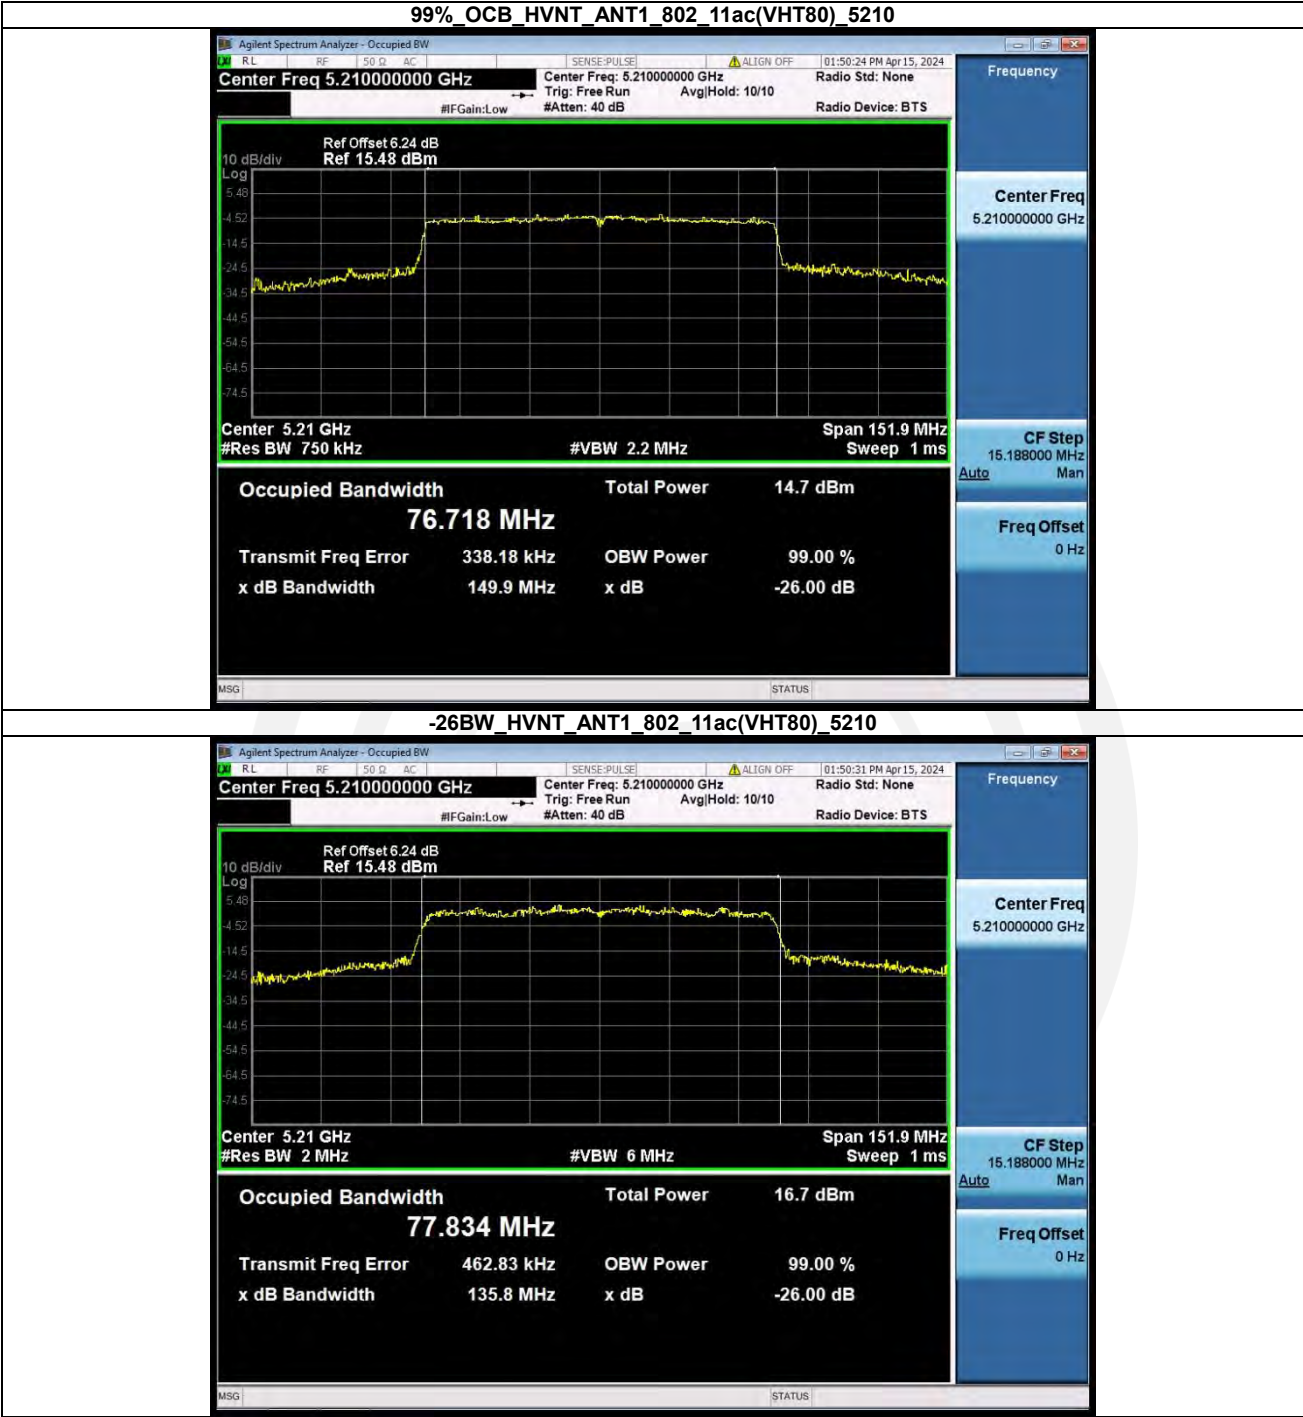



Band 4 (5725-5850 MHz):**-6dB Bandwidth**


Condition	Antenna	Mode	Frequency(MHz)	6dB_Emission_Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5745.00	15.044	0.500	Pass
NVNT	ANT1	802.11a	5785.00	15.138	0.500	Pass
NVNT	ANT1	802.11a	5825.00	15.123	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	12.628	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	15.114	0.500	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	15.020	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	13.862	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	15.129	0.500	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	15.135	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	32.587	0.500	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	33.852	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	32.611	0.500	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	35.146	0.500	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	75.845	0.500	Pass


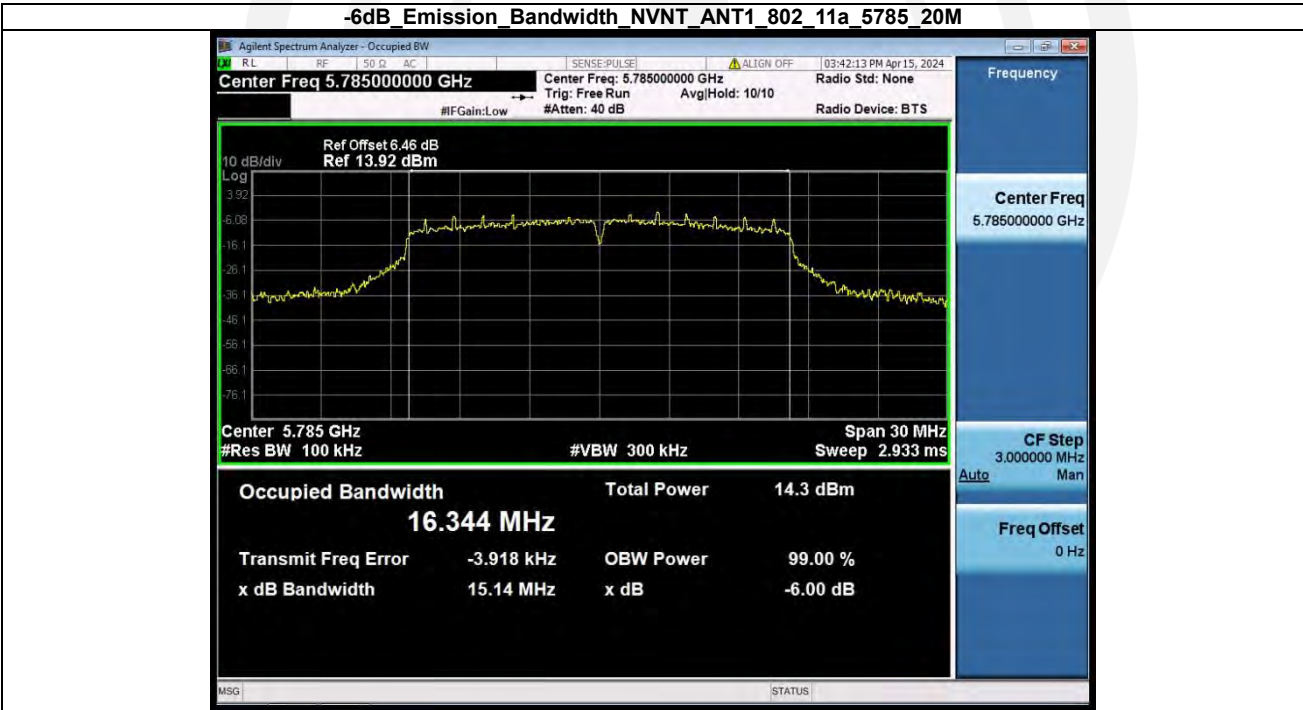


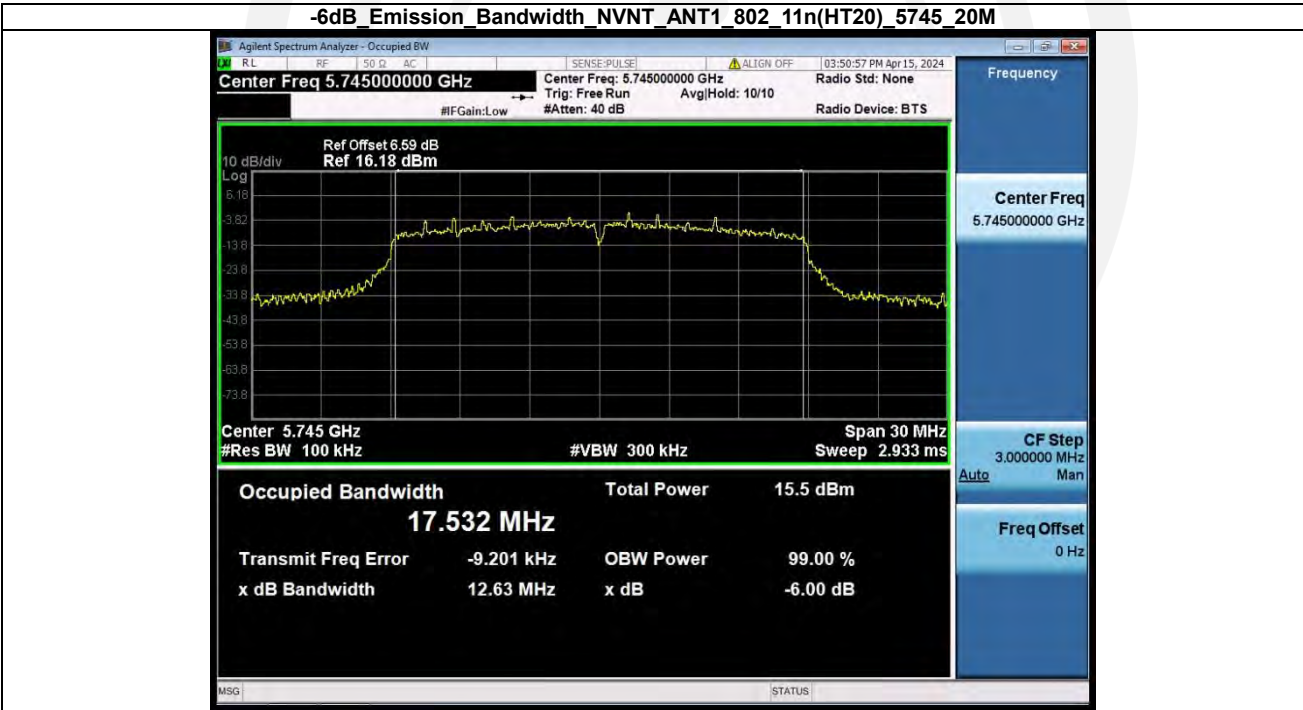


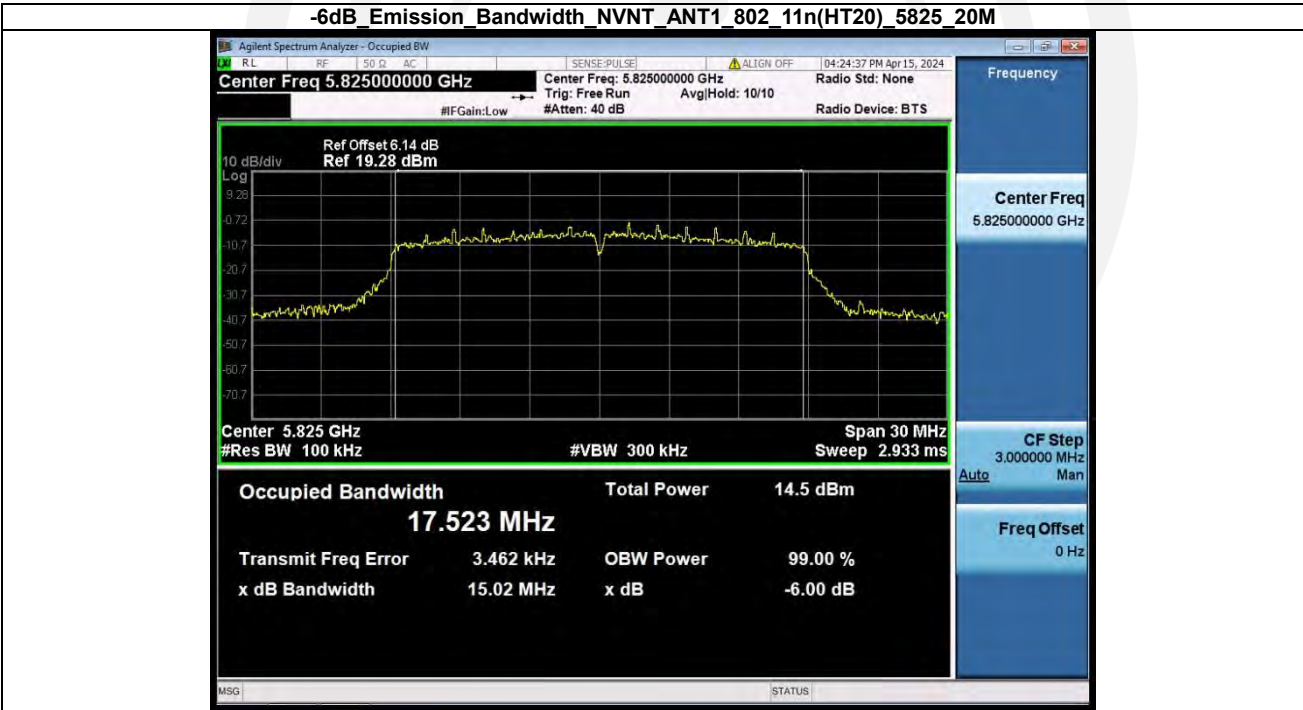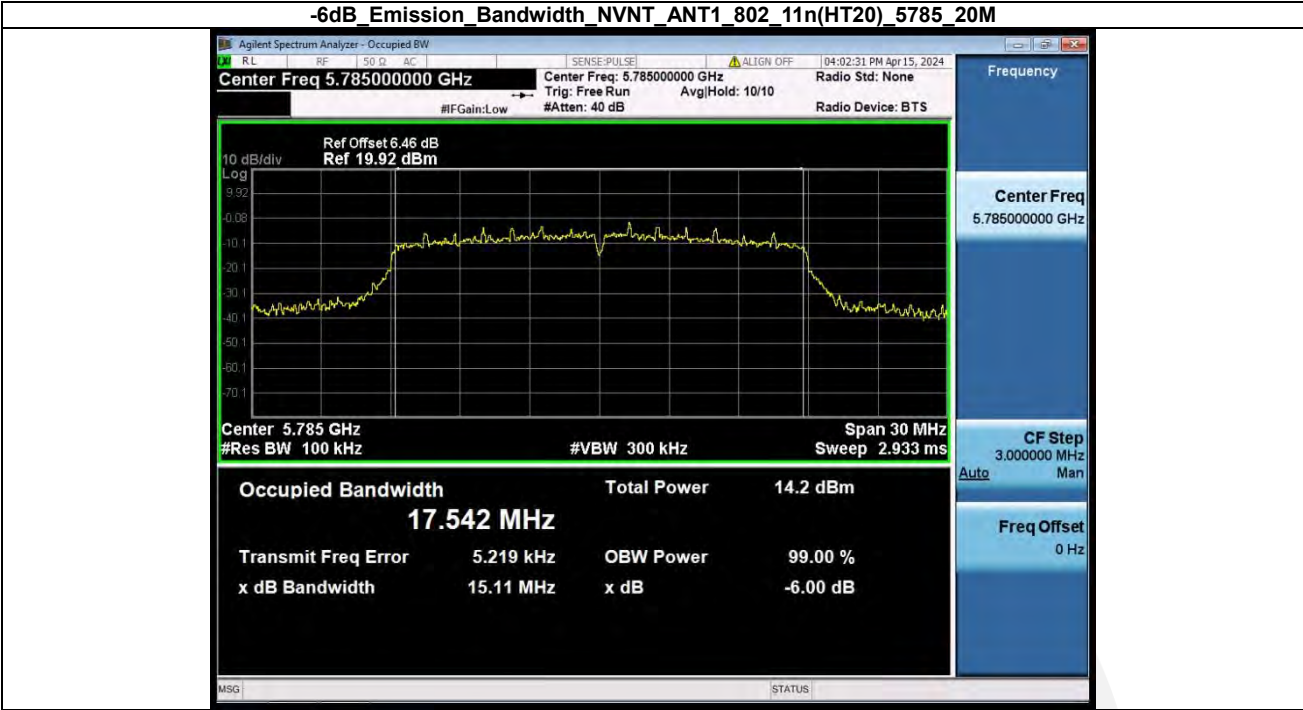

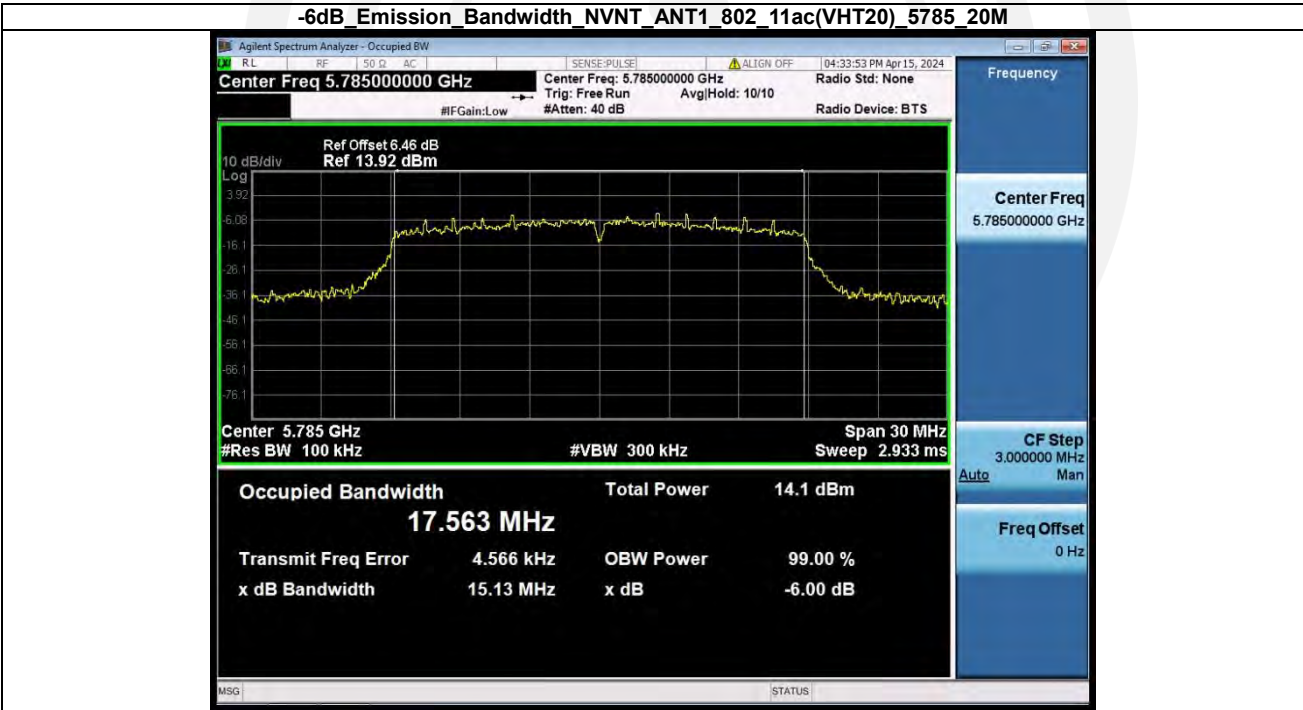

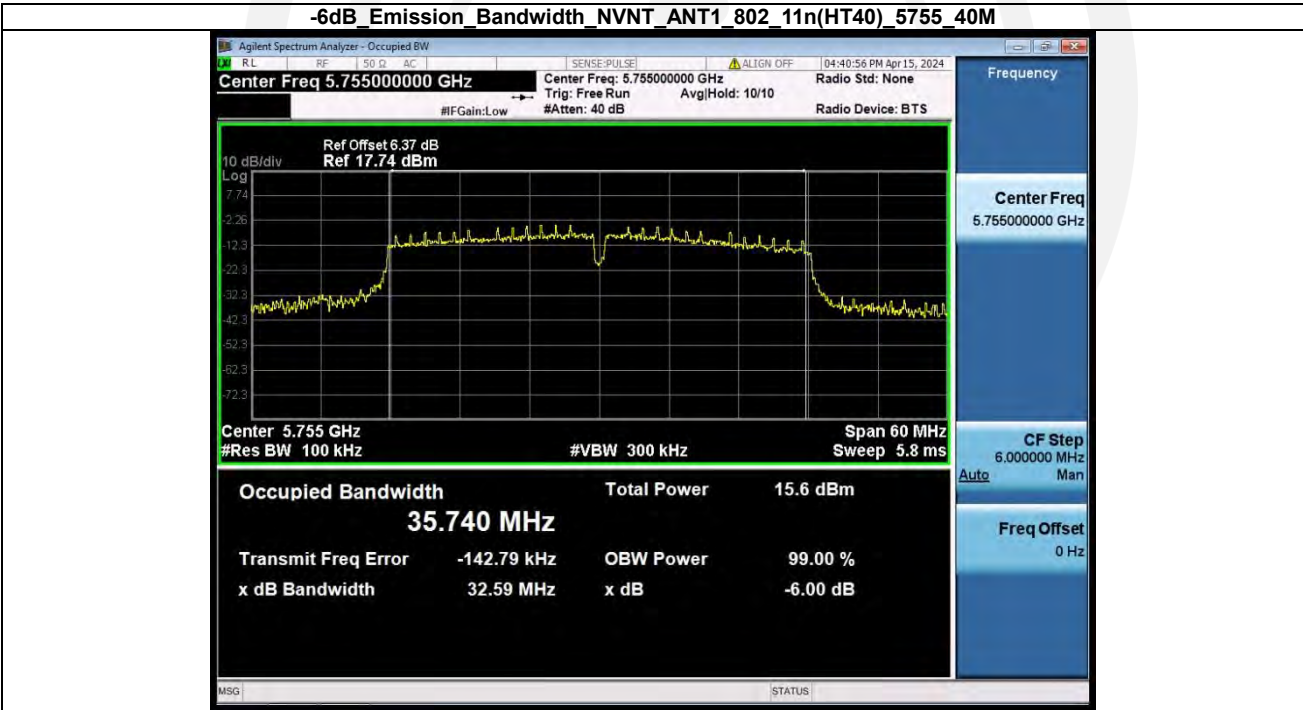

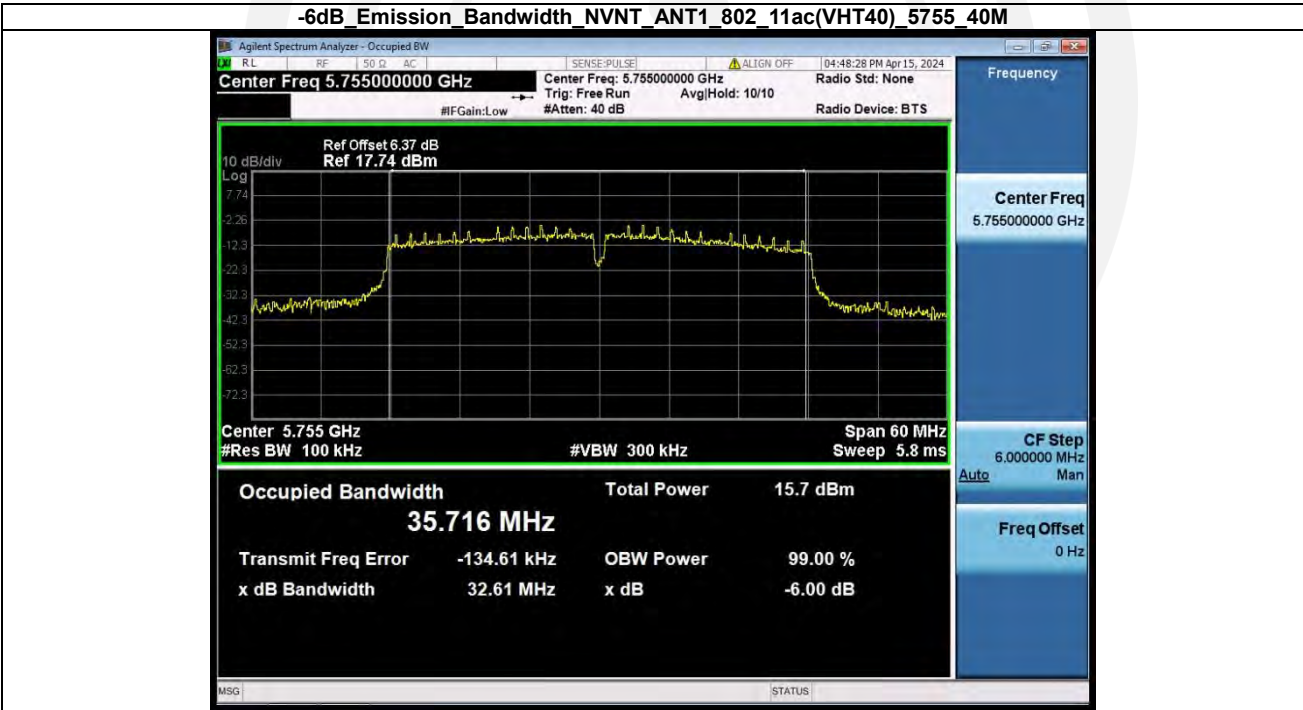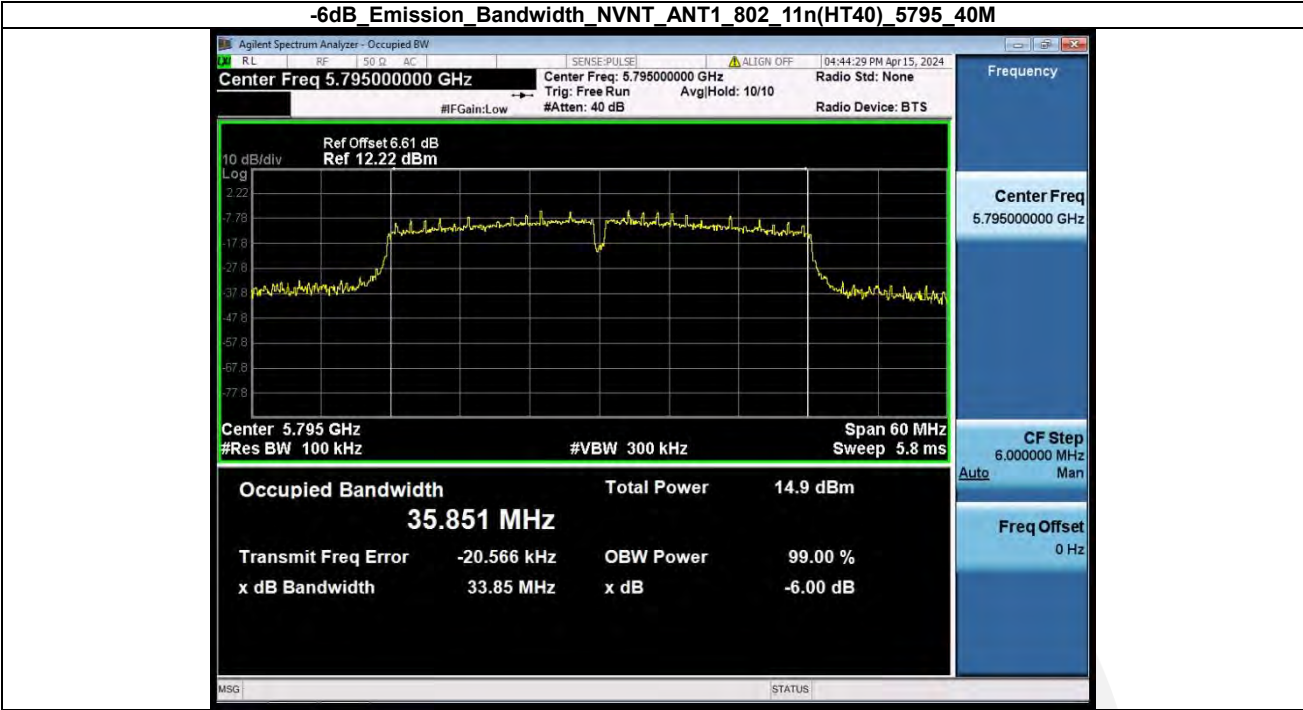


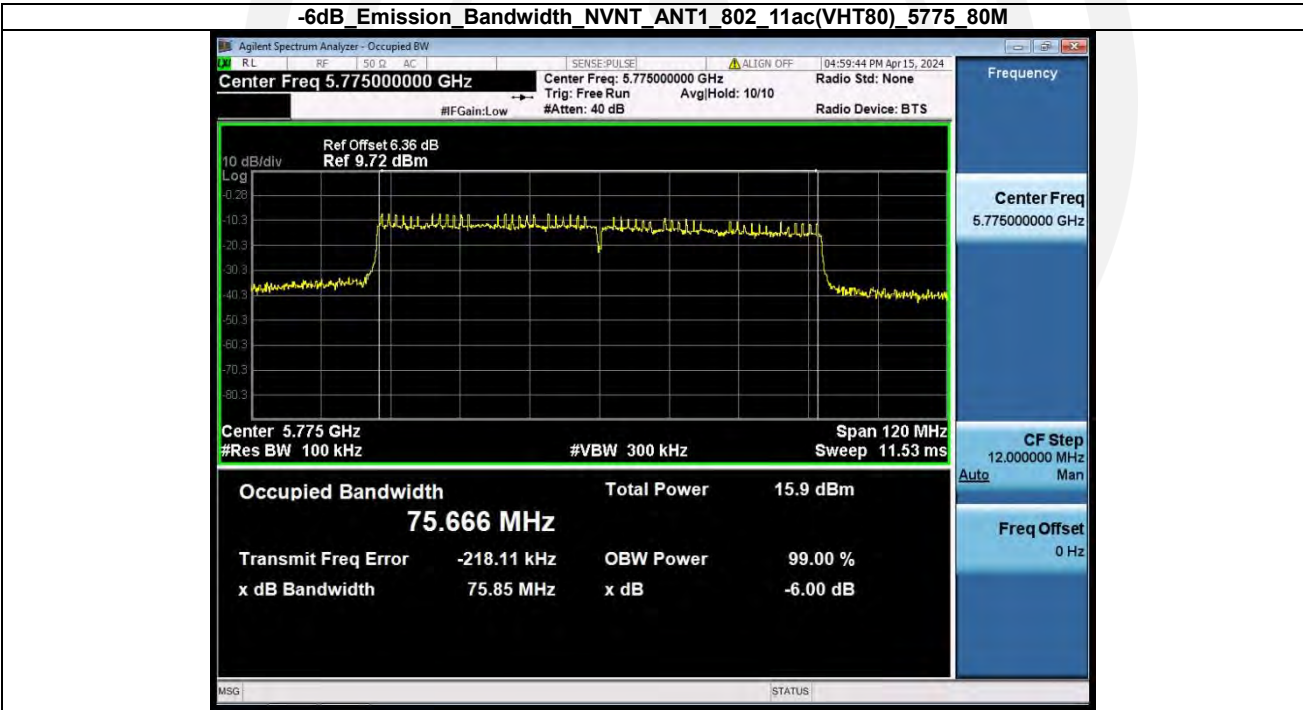



Occupied Channel Bandwidth


Condition	Antenna	Modulation	Frequency(MHz)	26dB_Emission_Bandwidth(MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	20.81	16.77
NVNT	ANT1	802.11a	5785.00	20.97	16.75
NVNT	ANT1	802.11a	5825.00	20.73	16.75
NVNT	ANT1	802.11n(HT20)	5745.00	22.19	17.72
NVNT	ANT1	802.11n(HT20)	5785.00	23.07	17.76
NVNT	ANT1	802.11n(HT20)	5825.00	23.84	17.72
NVNT	ANT1	802.11ac(VHT20)	5745.00	21.39	17.70
NVNT	ANT1	802.11ac(VHT20)	5785.00	21.11	17.74
NVNT	ANT1	802.11ac(VHT20)	5825.00	20.65	17.68
NVNT	ANT1	802.11n(HT40)	5755.00	51.18	36.25
NVNT	ANT1	802.11n(HT40)	5795.00	49.21	36.32
NVNT	ANT1	802.11ac(VHT40)	5755.00	49.27	36.20
NVNT	ANT1	802.11ac(VHT40)	5795.00	49.09	36.26
NVNT	ANT1	802.11ac(VHT80)	5775.00	101.20	76.27




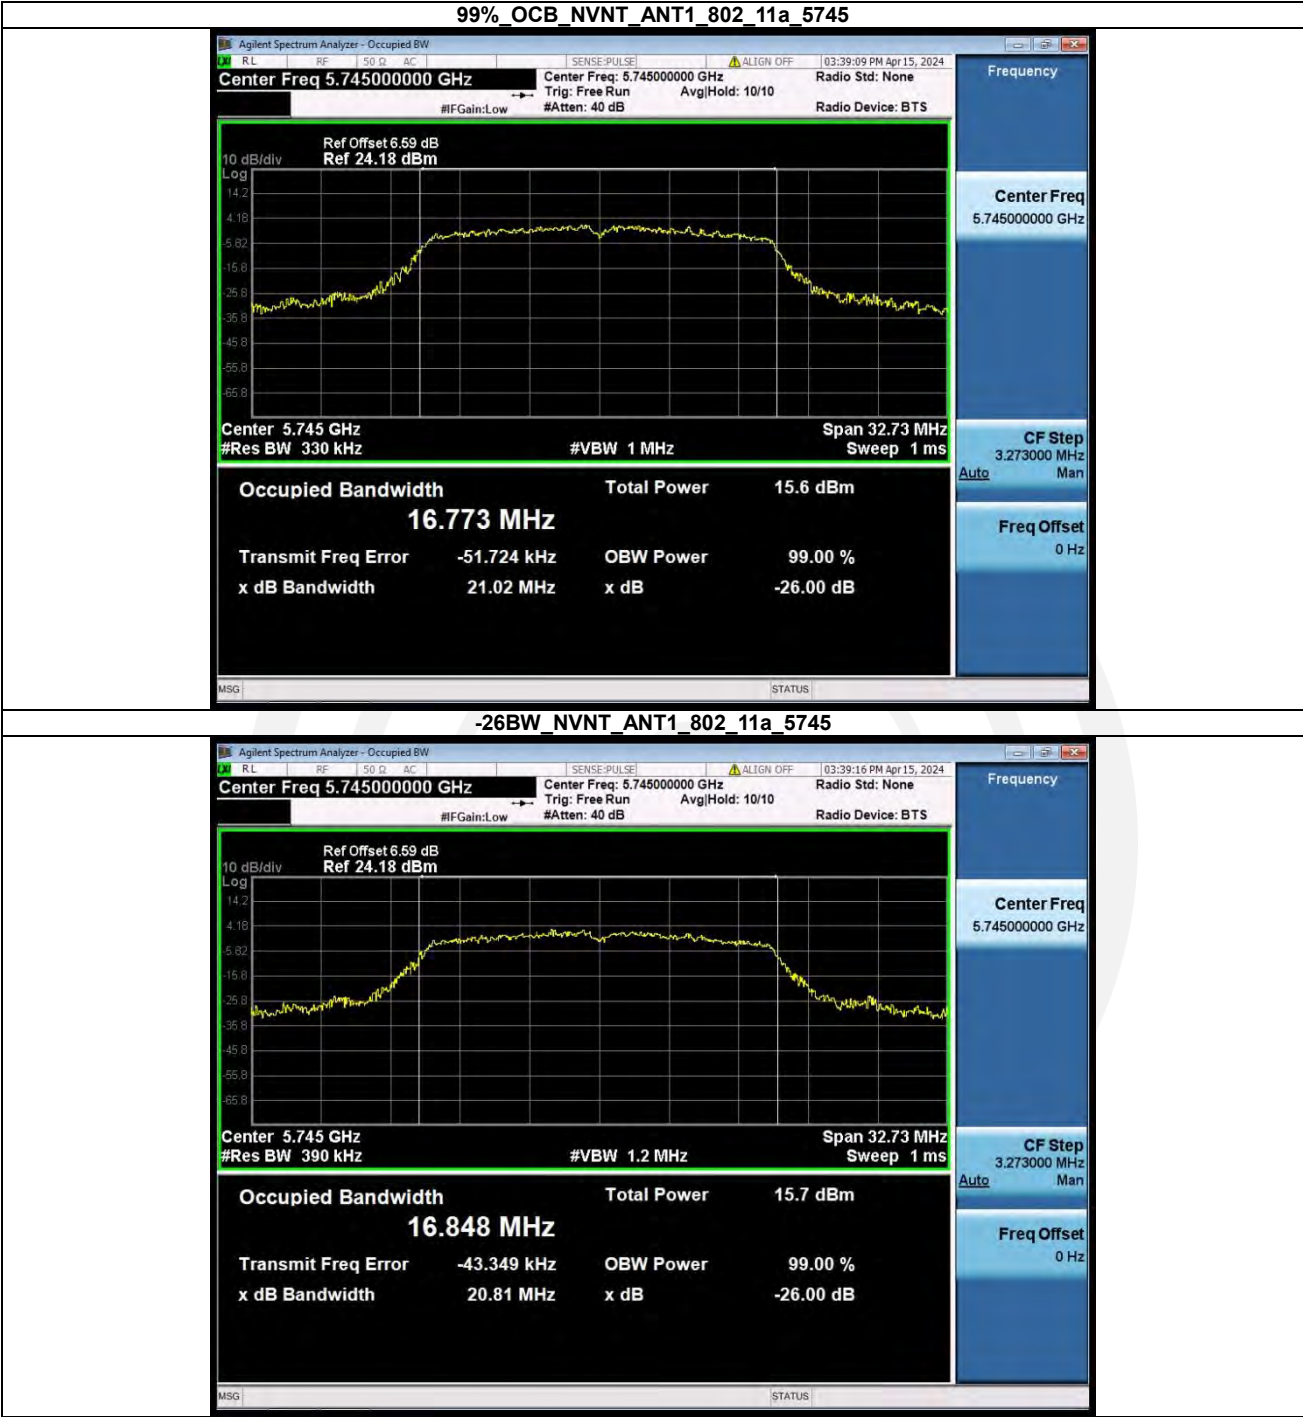


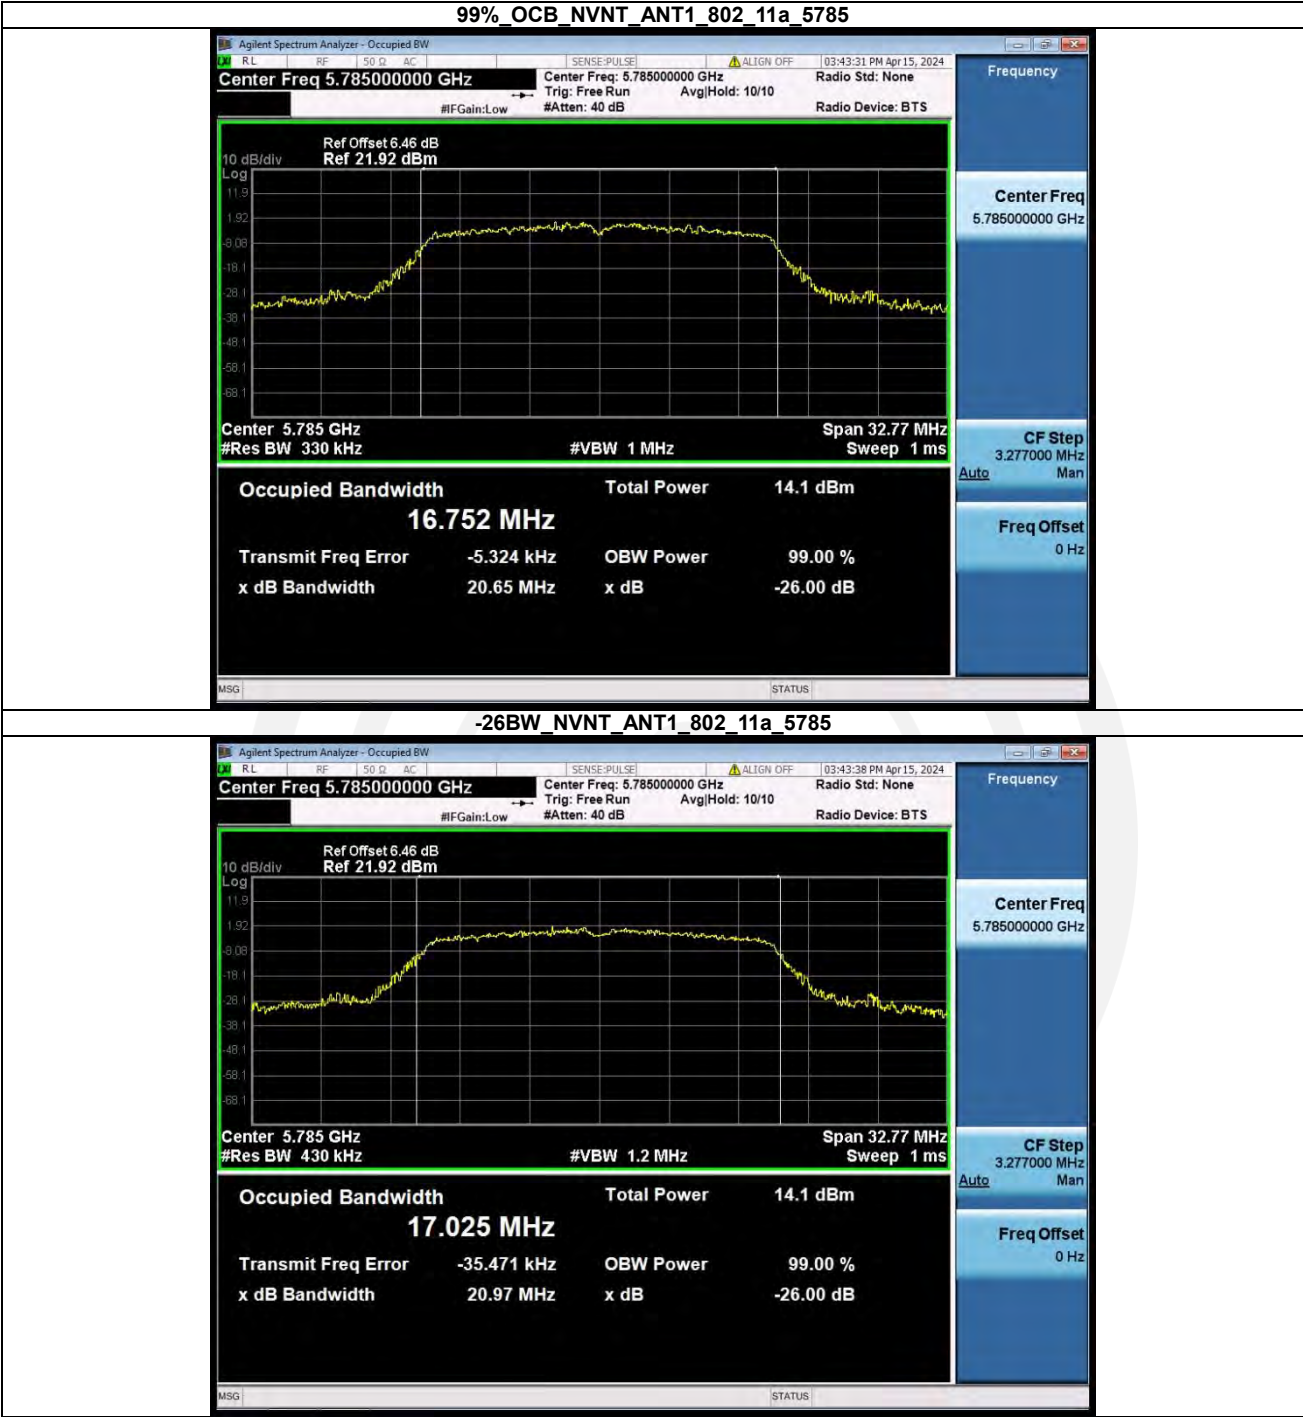


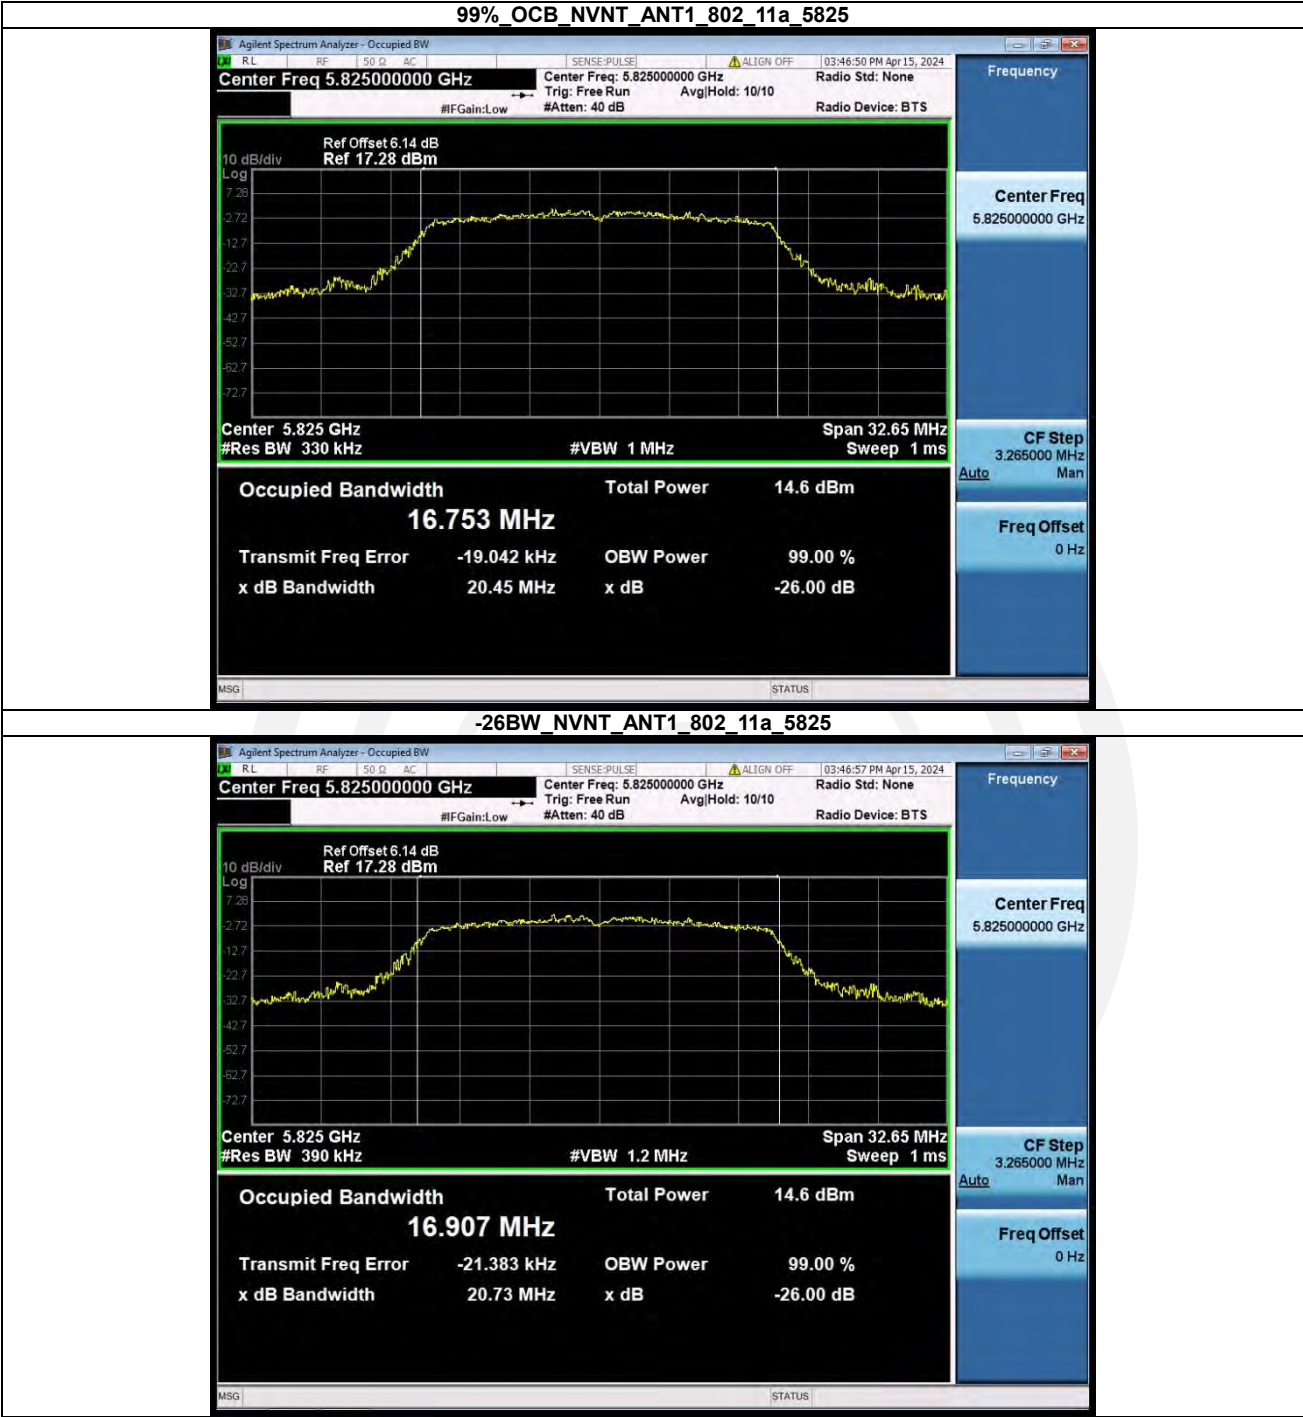


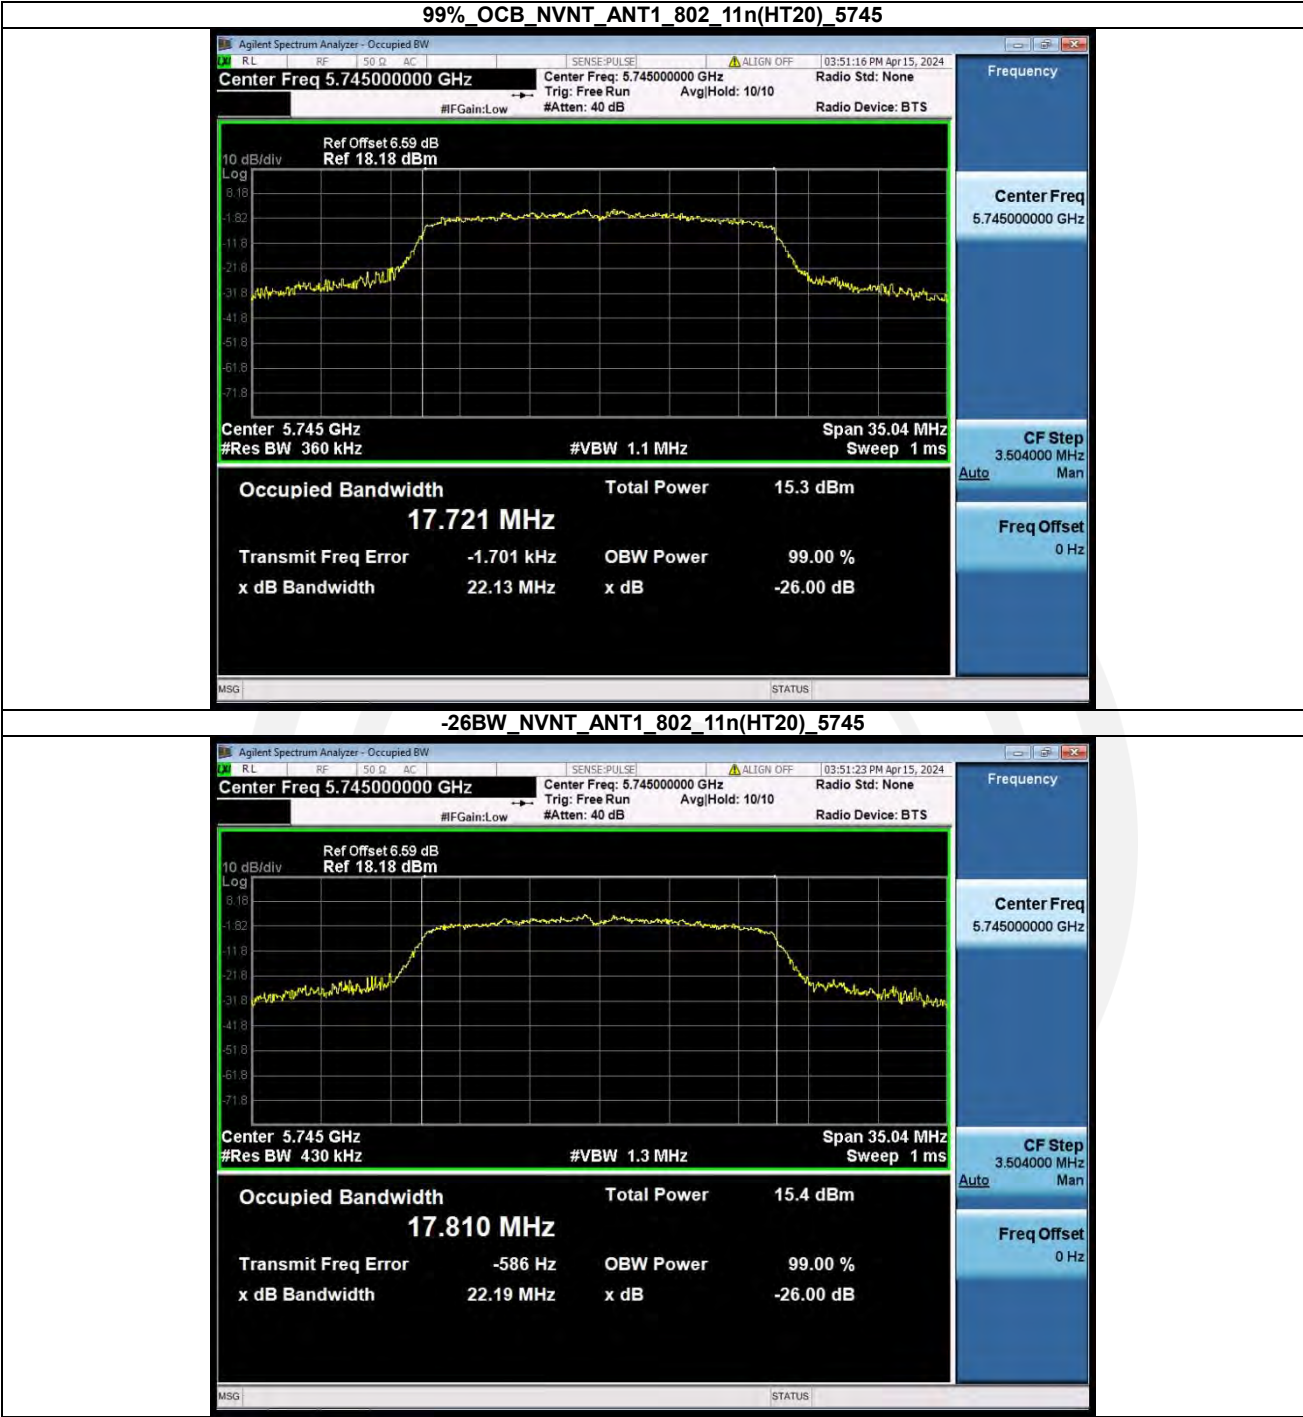


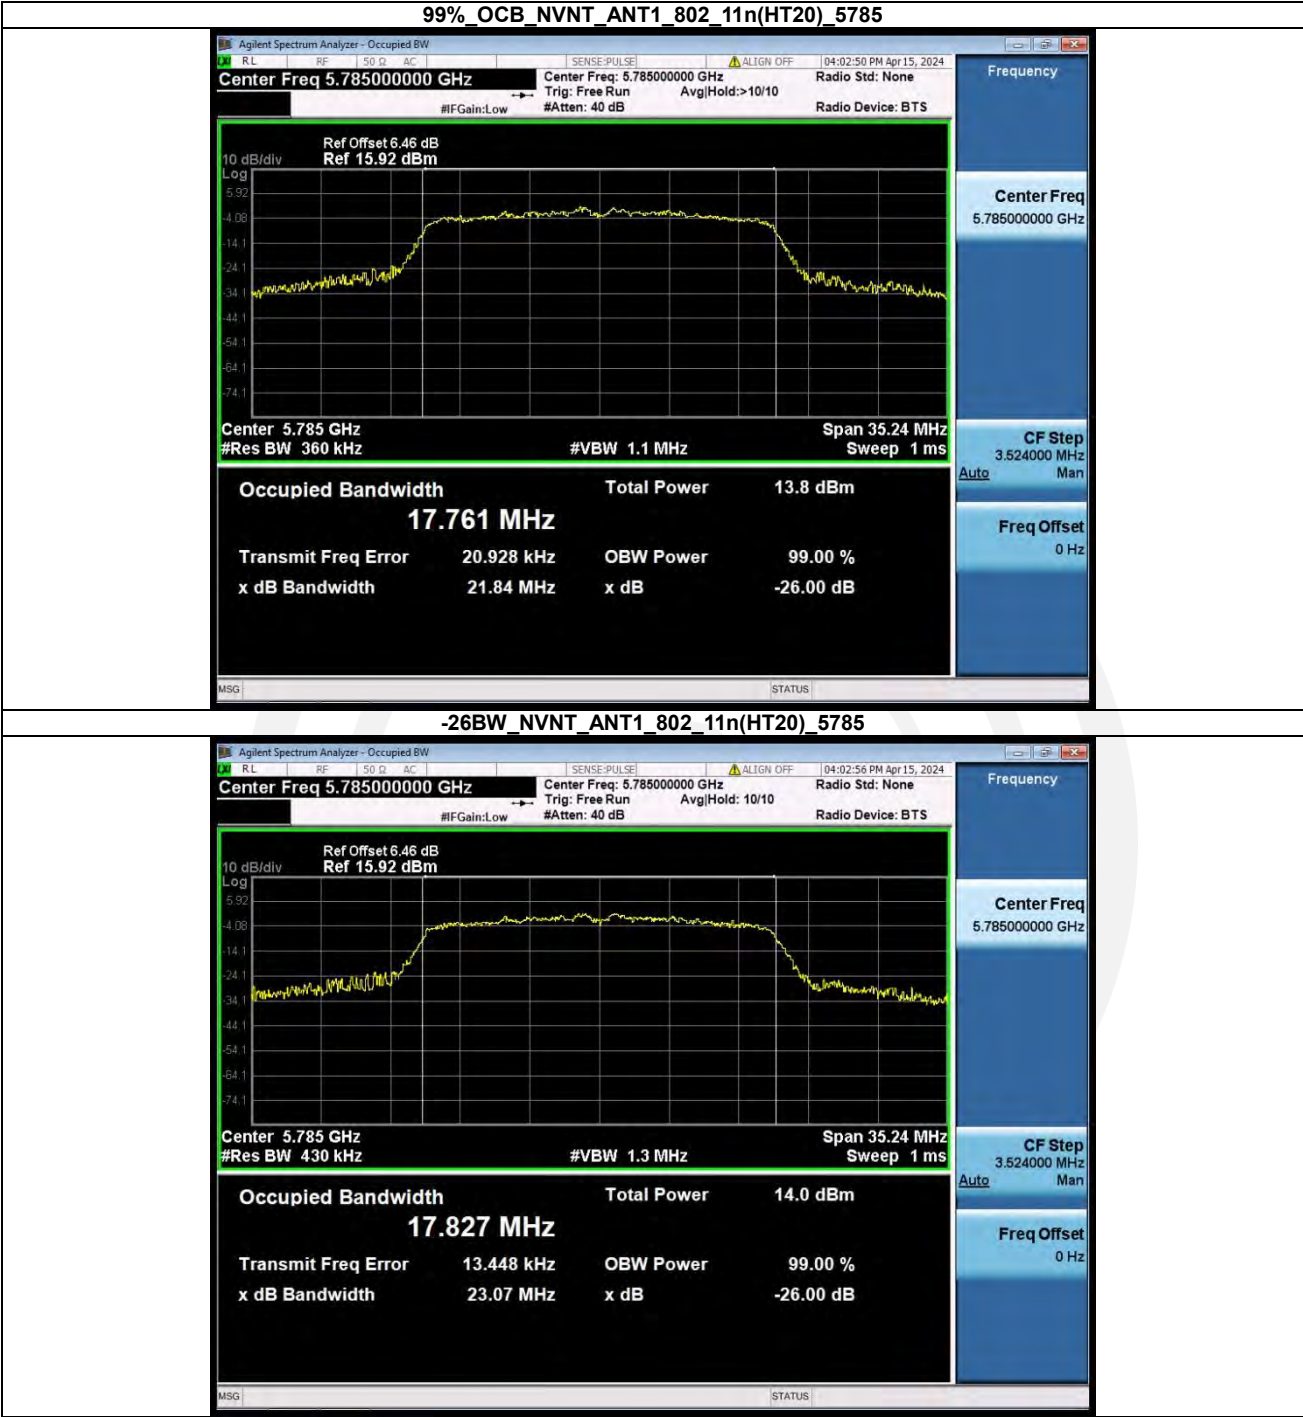


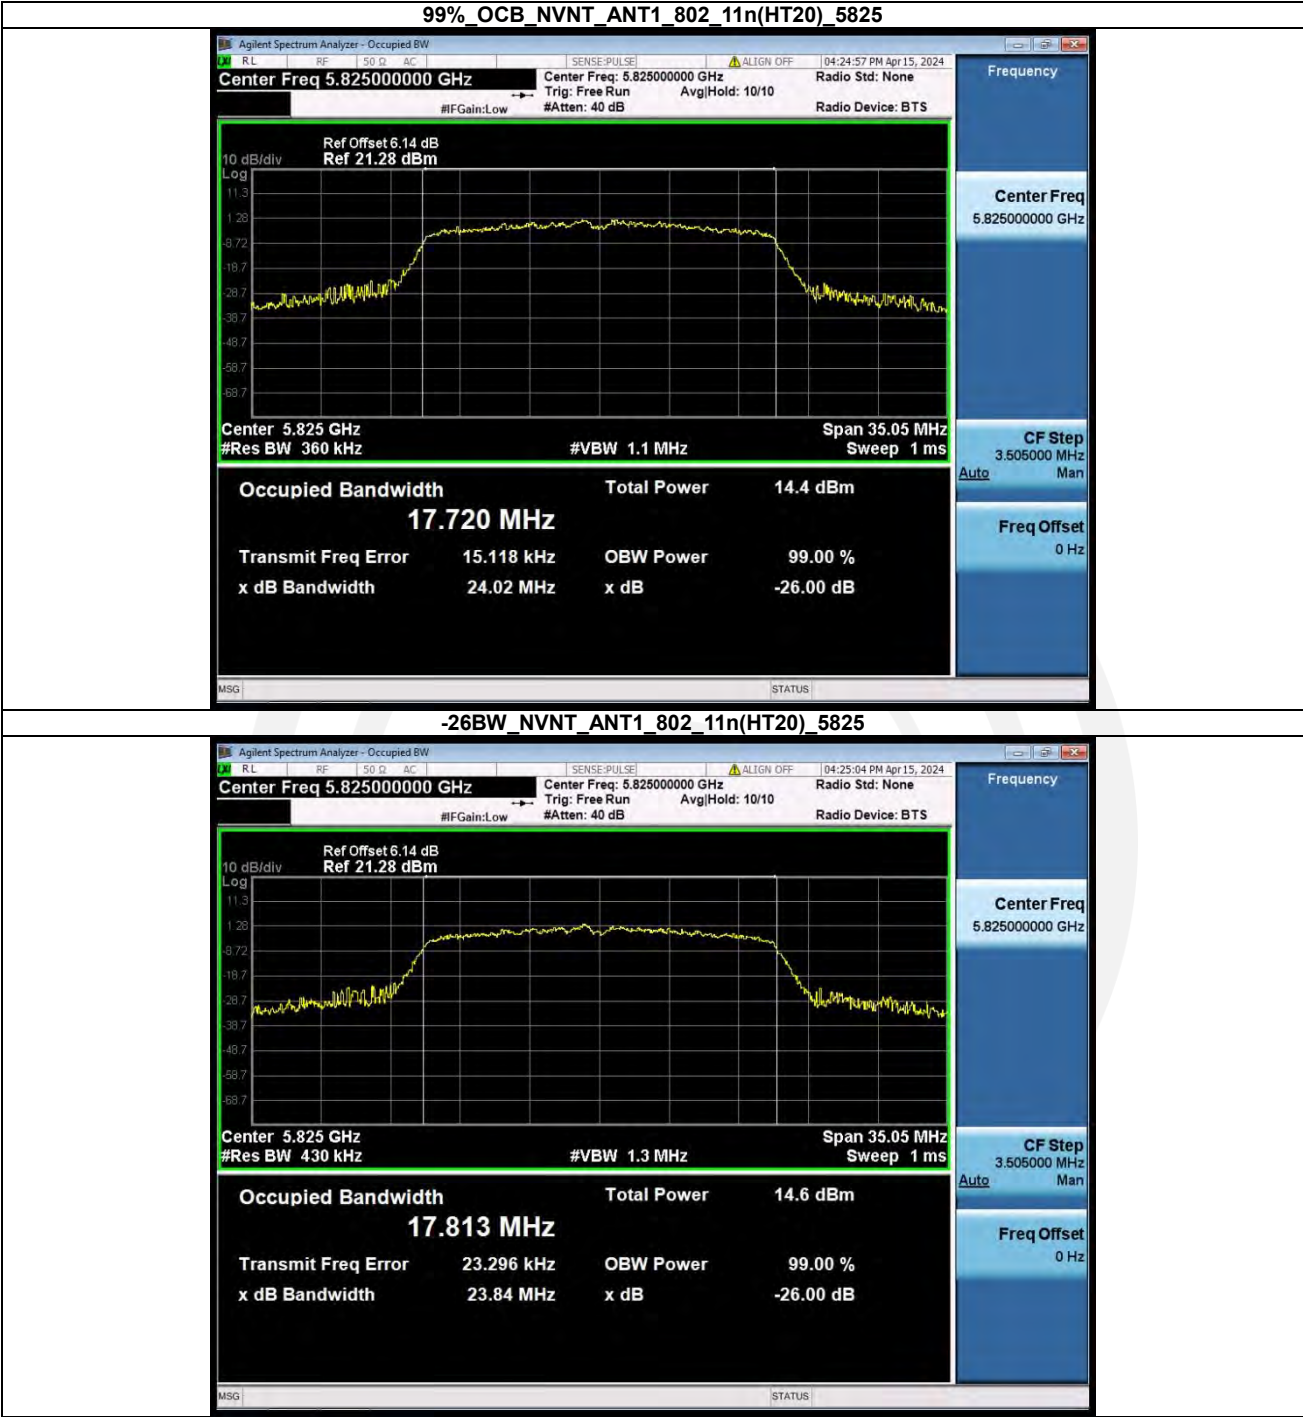


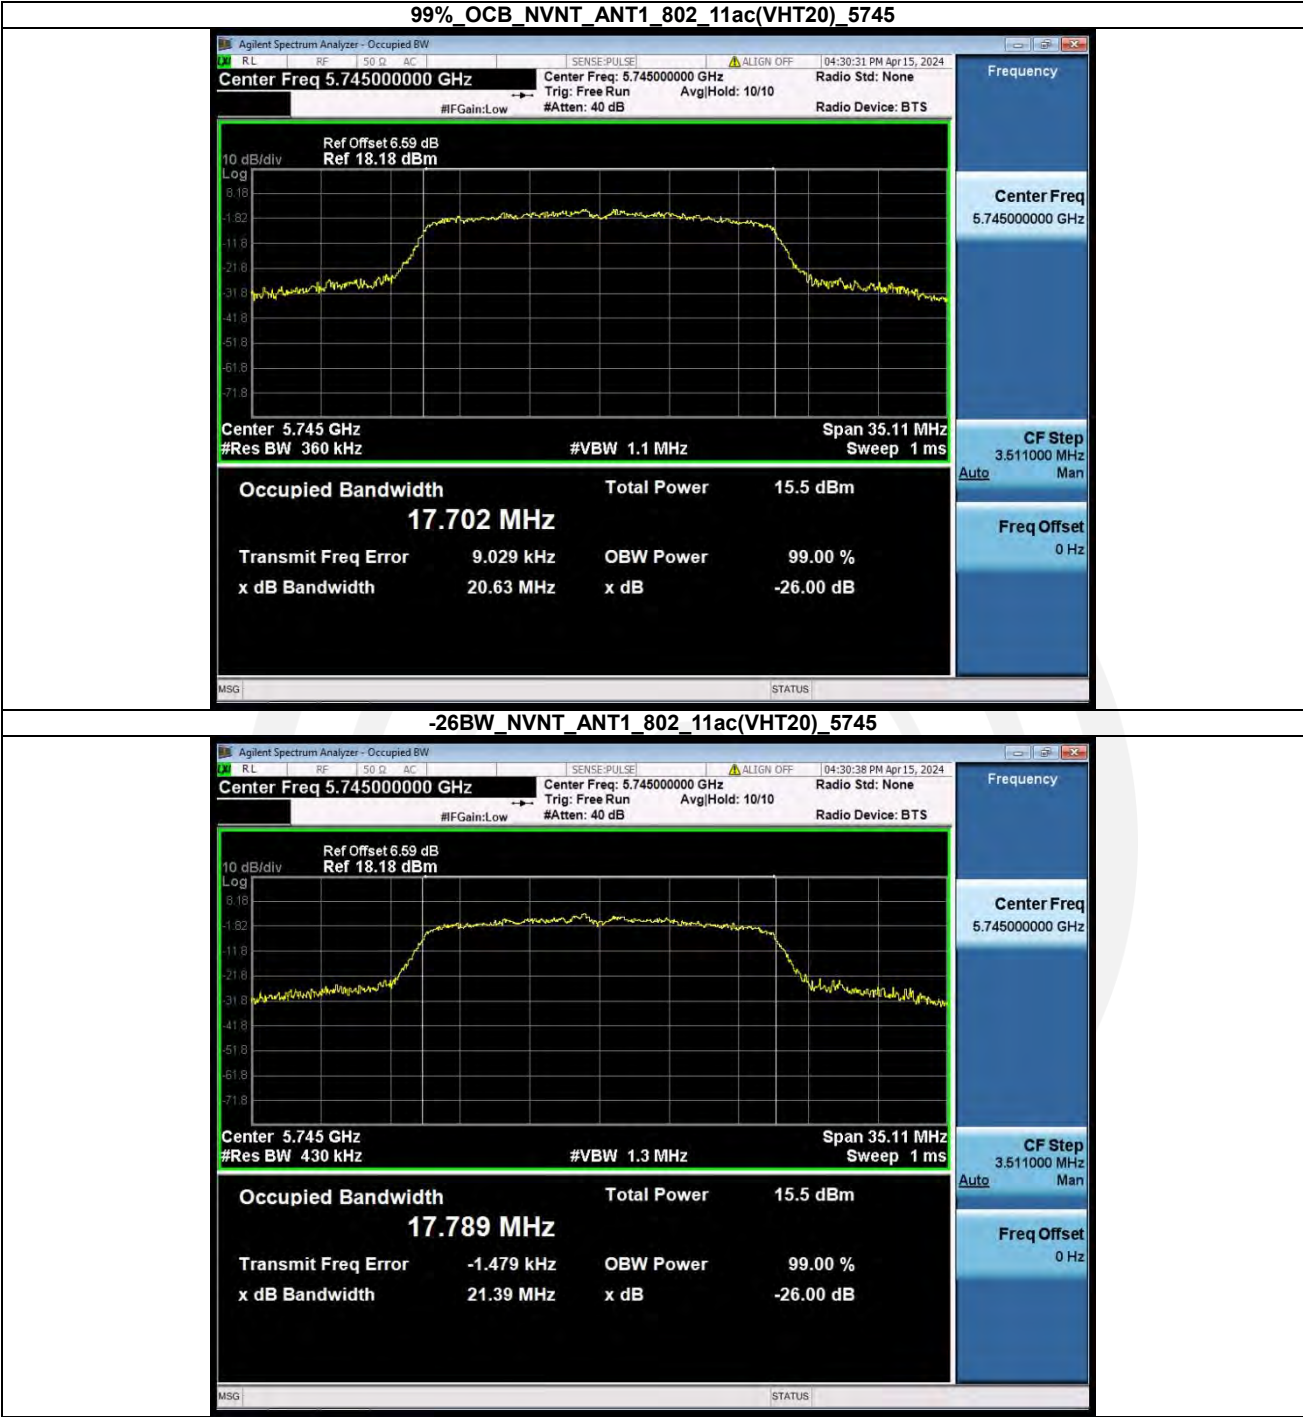


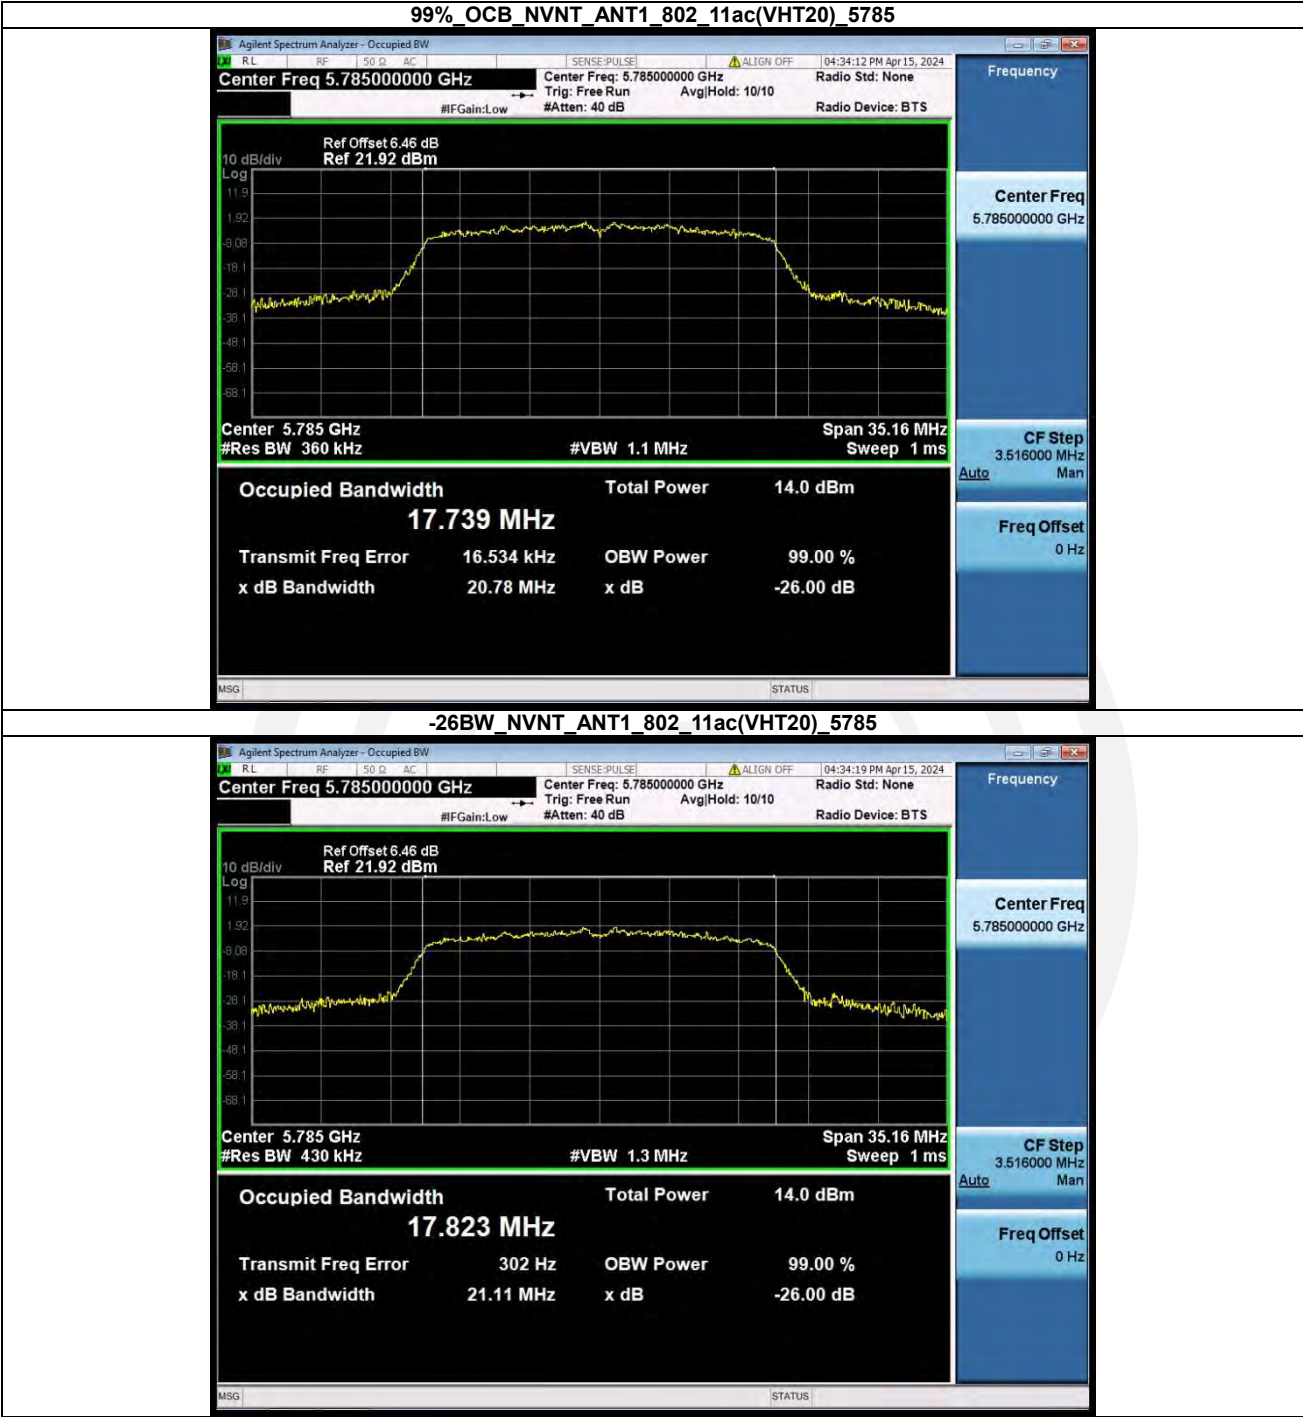


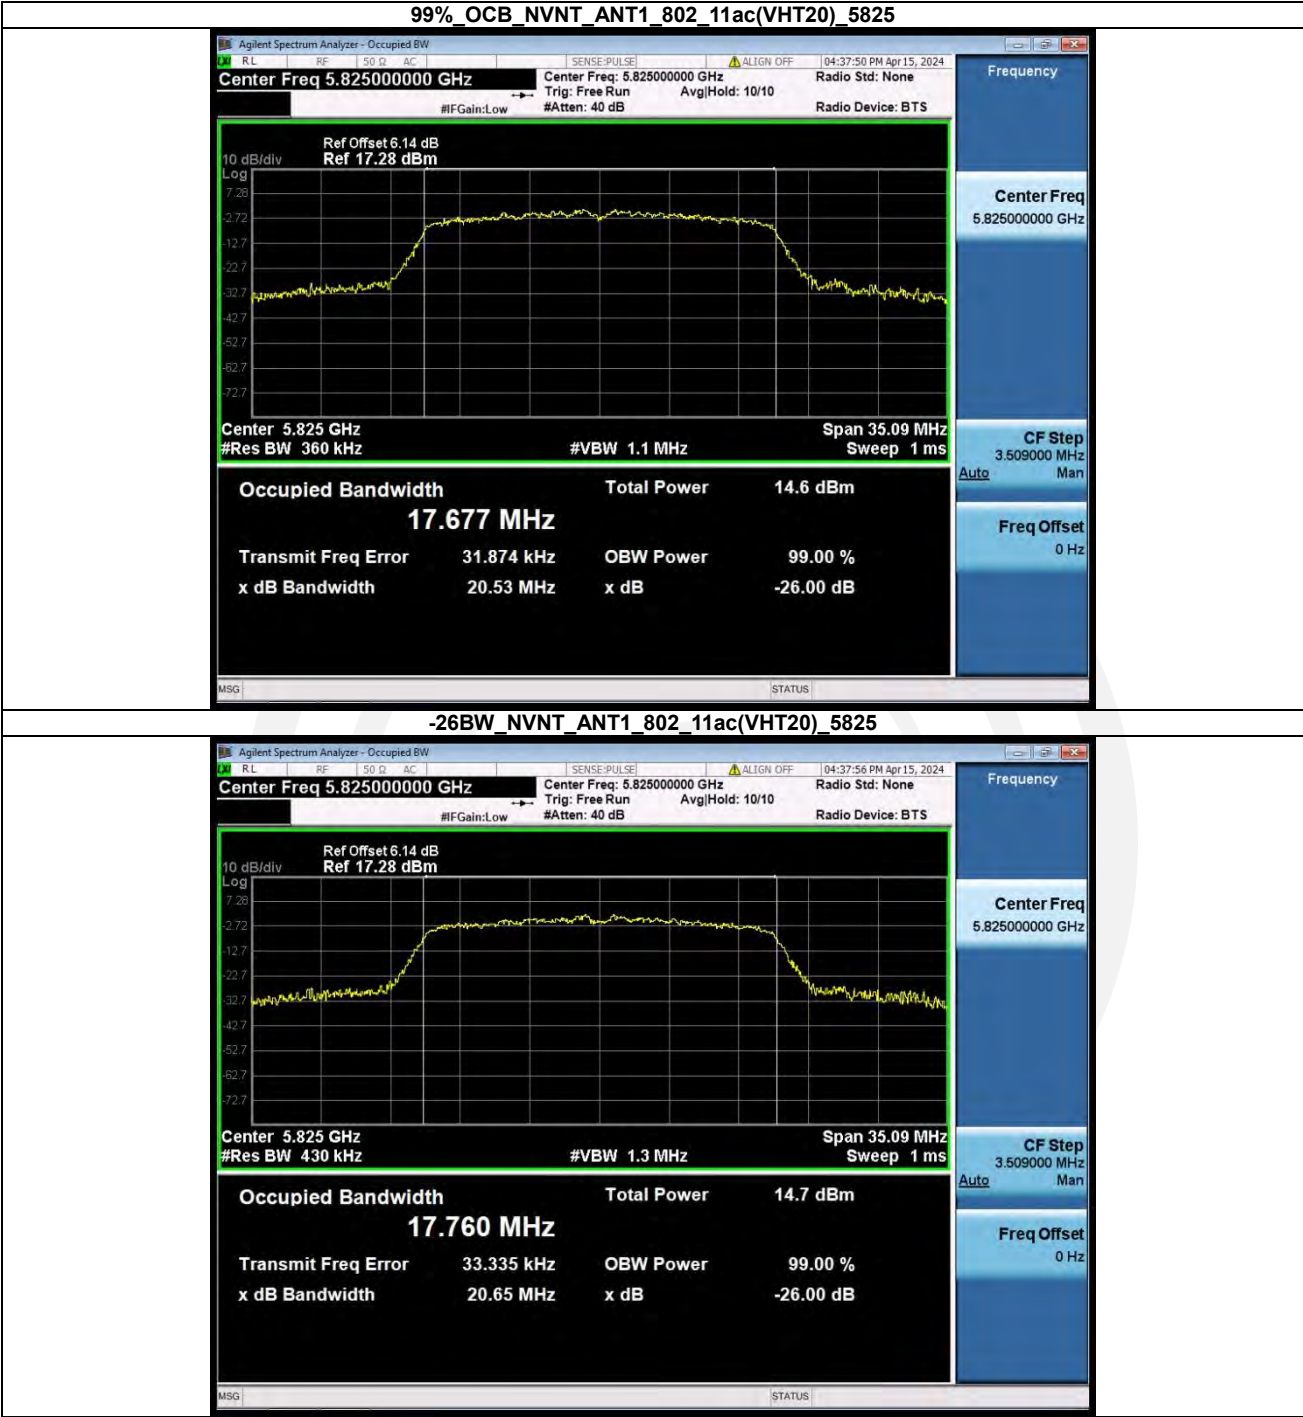


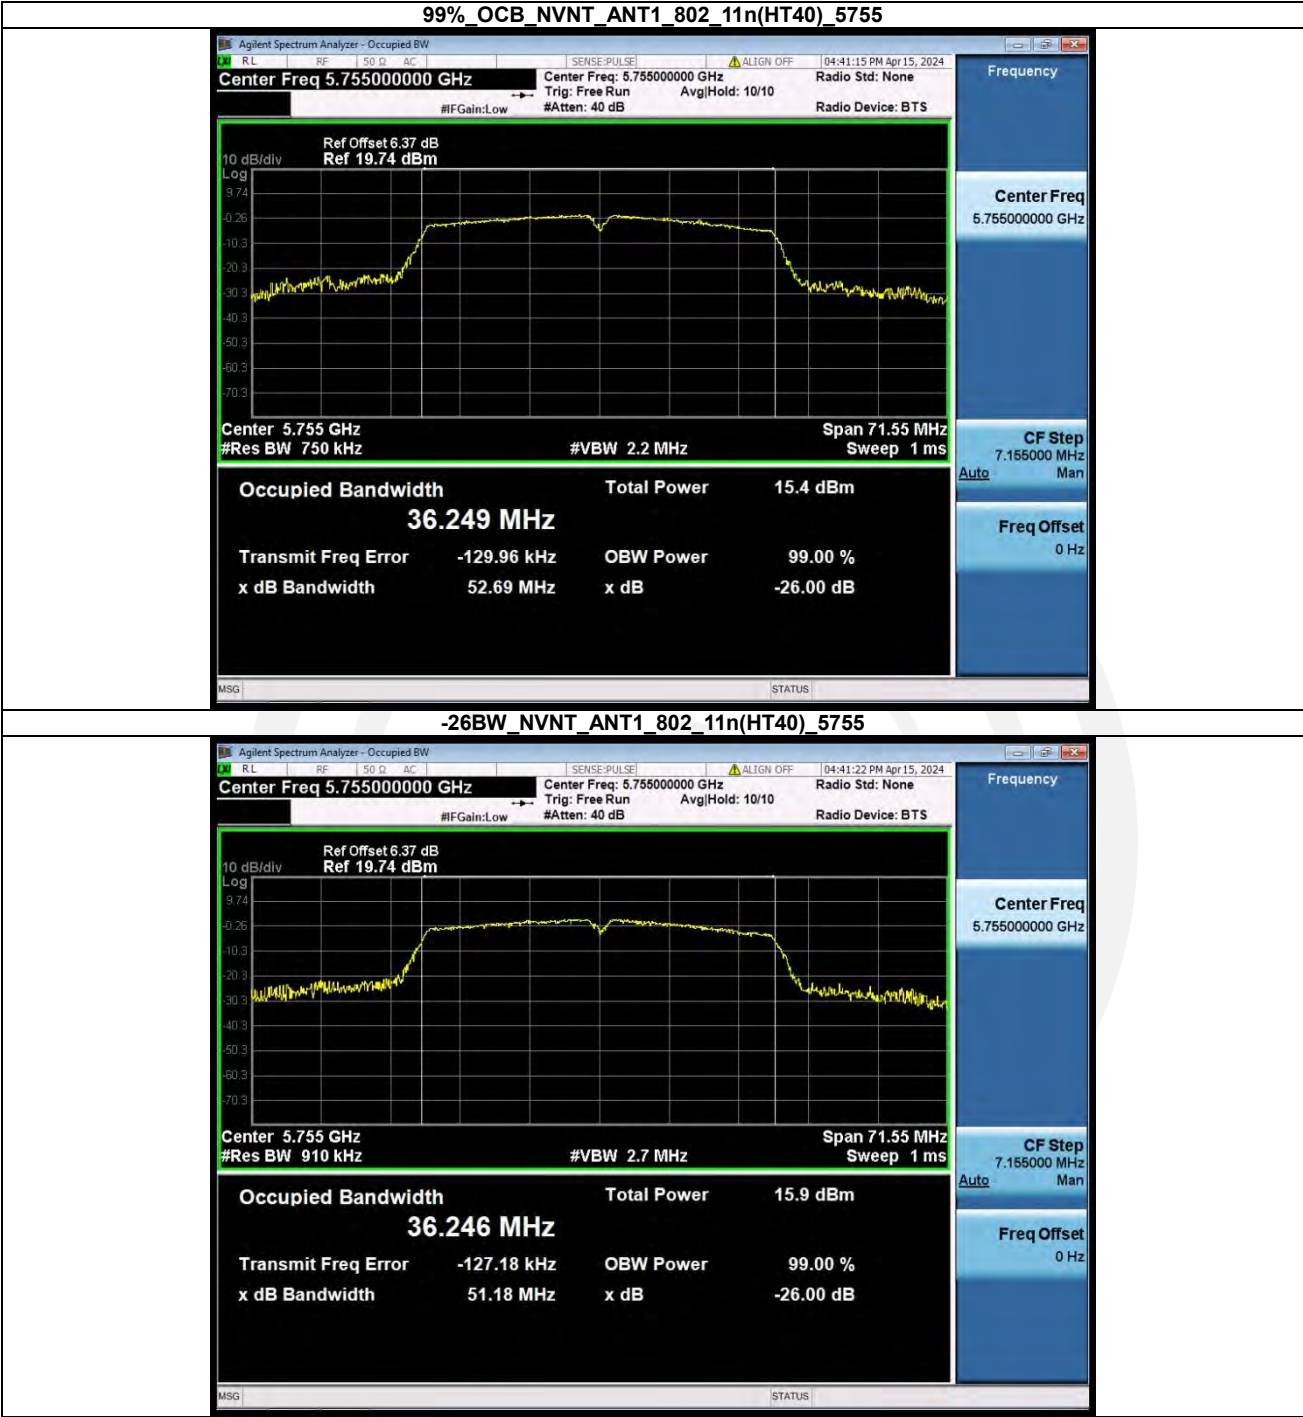

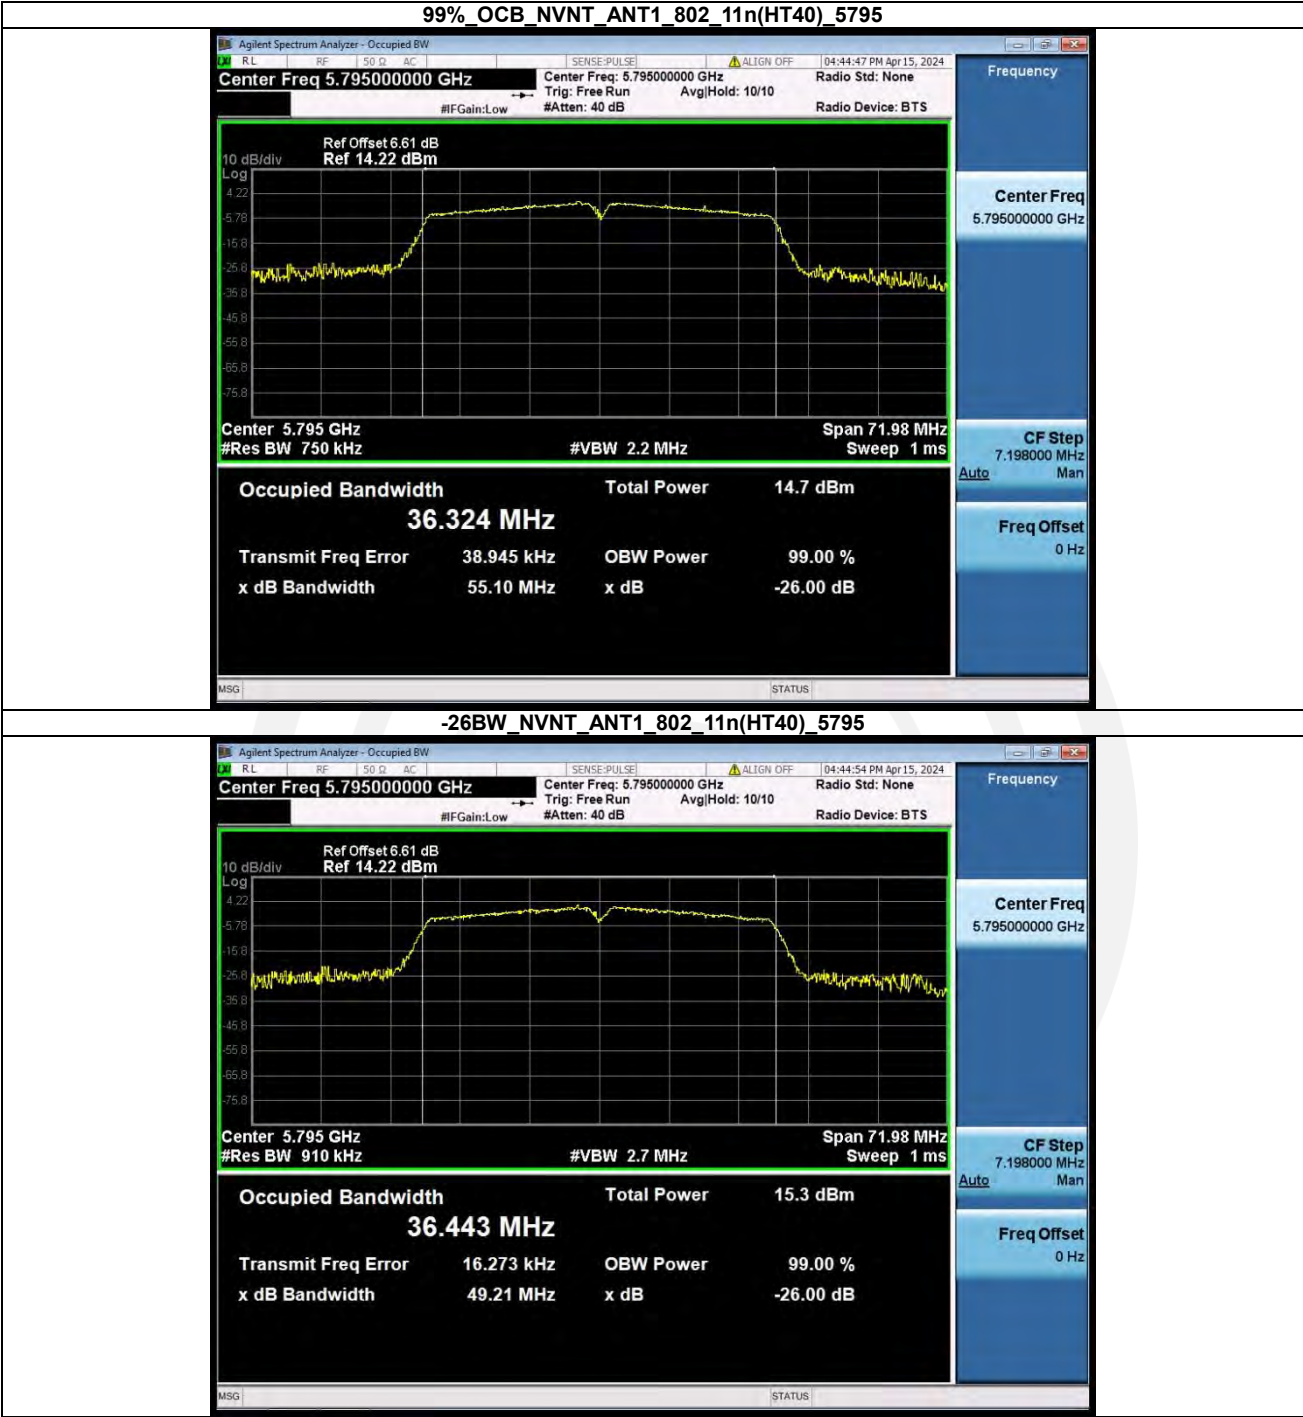


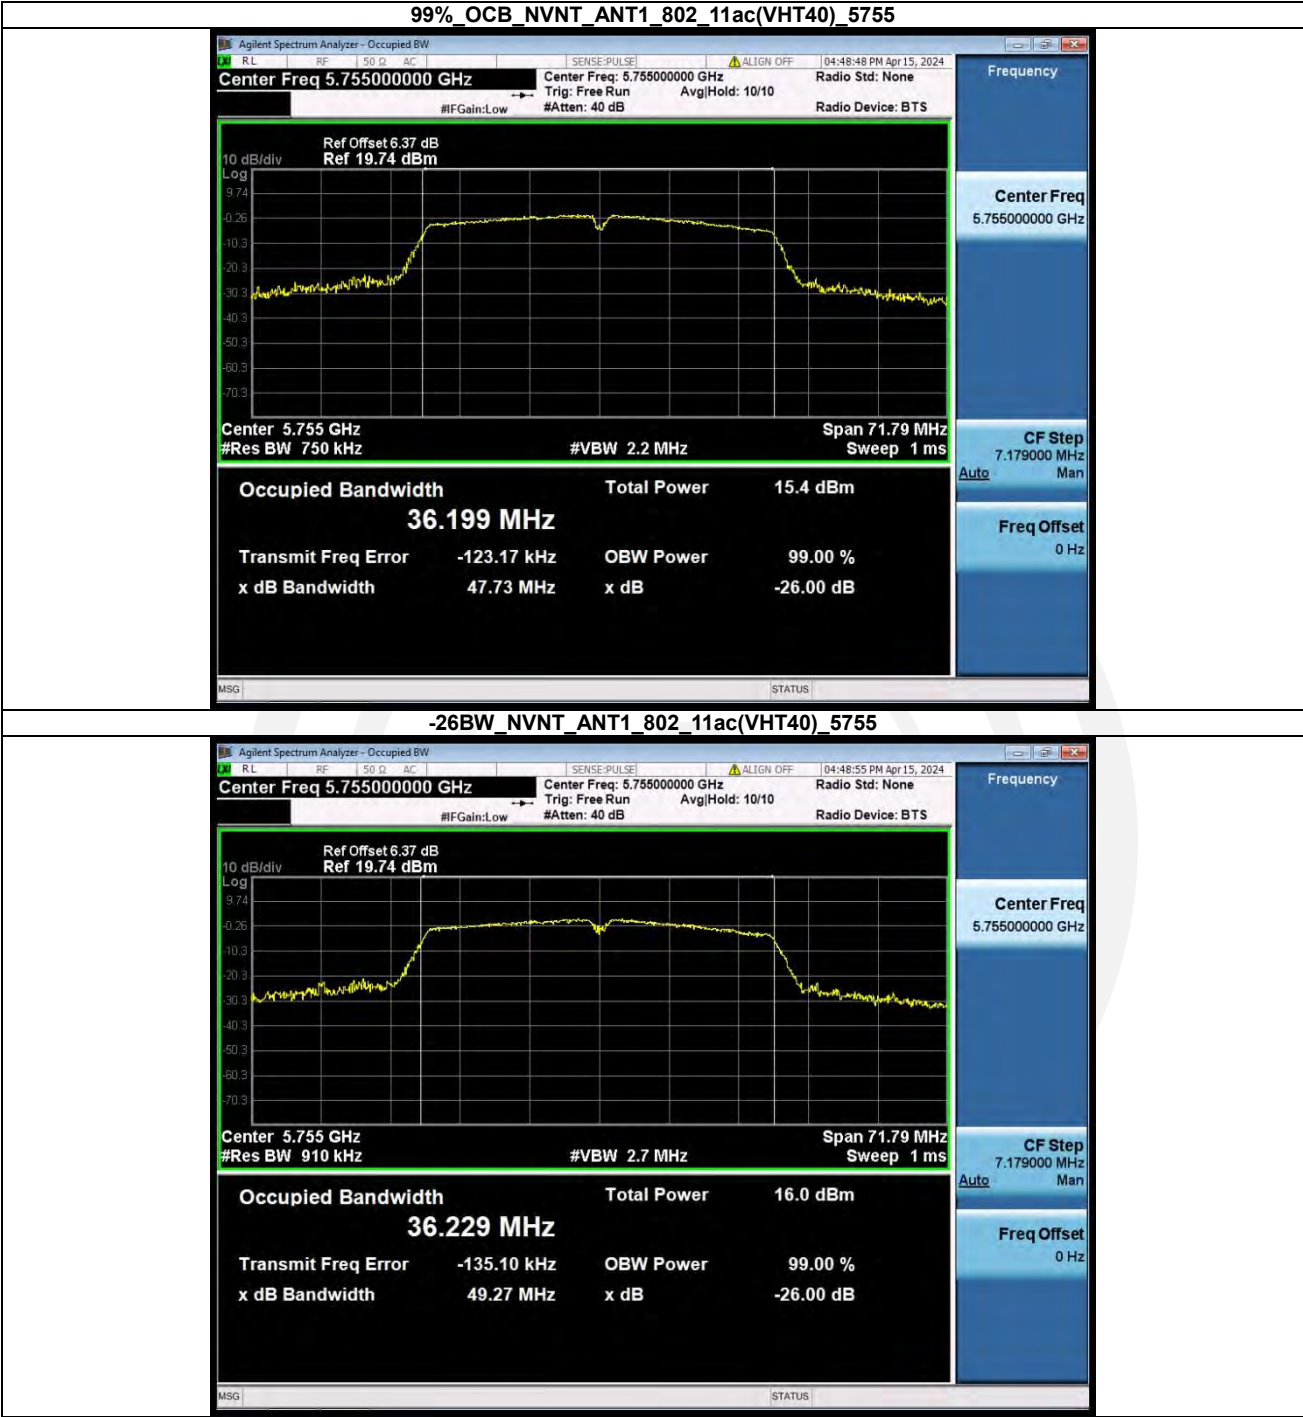

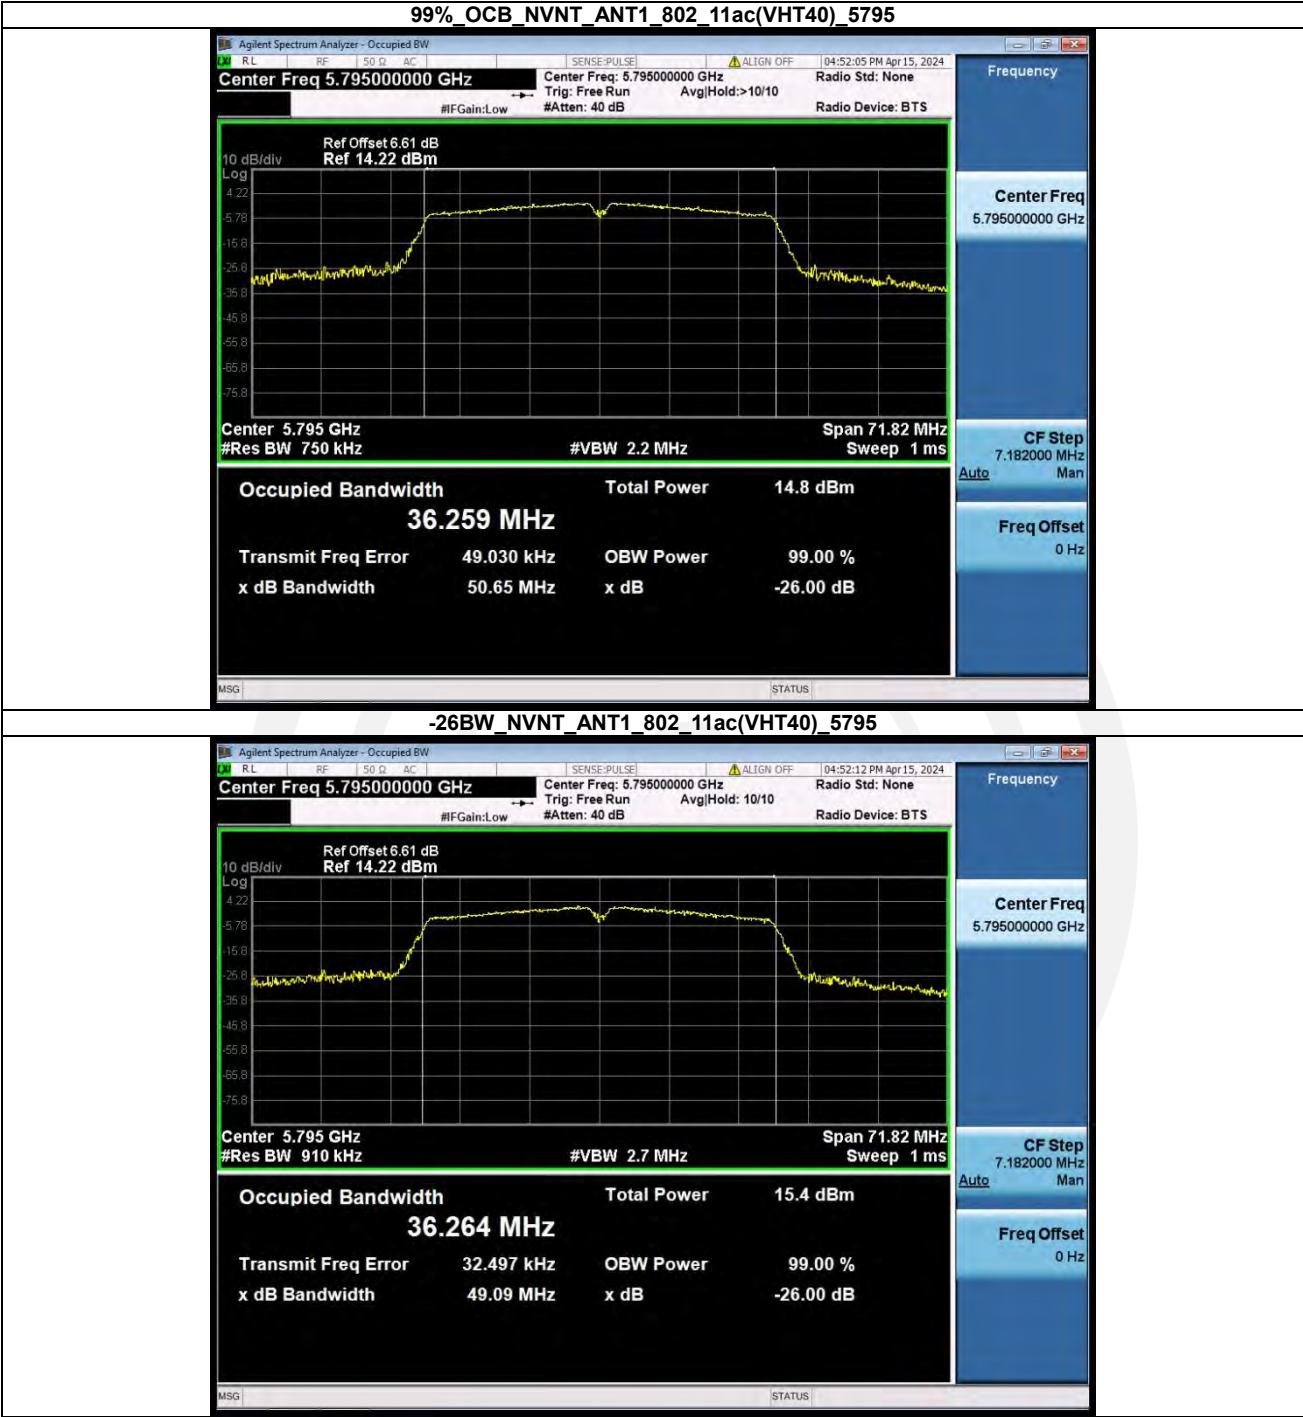

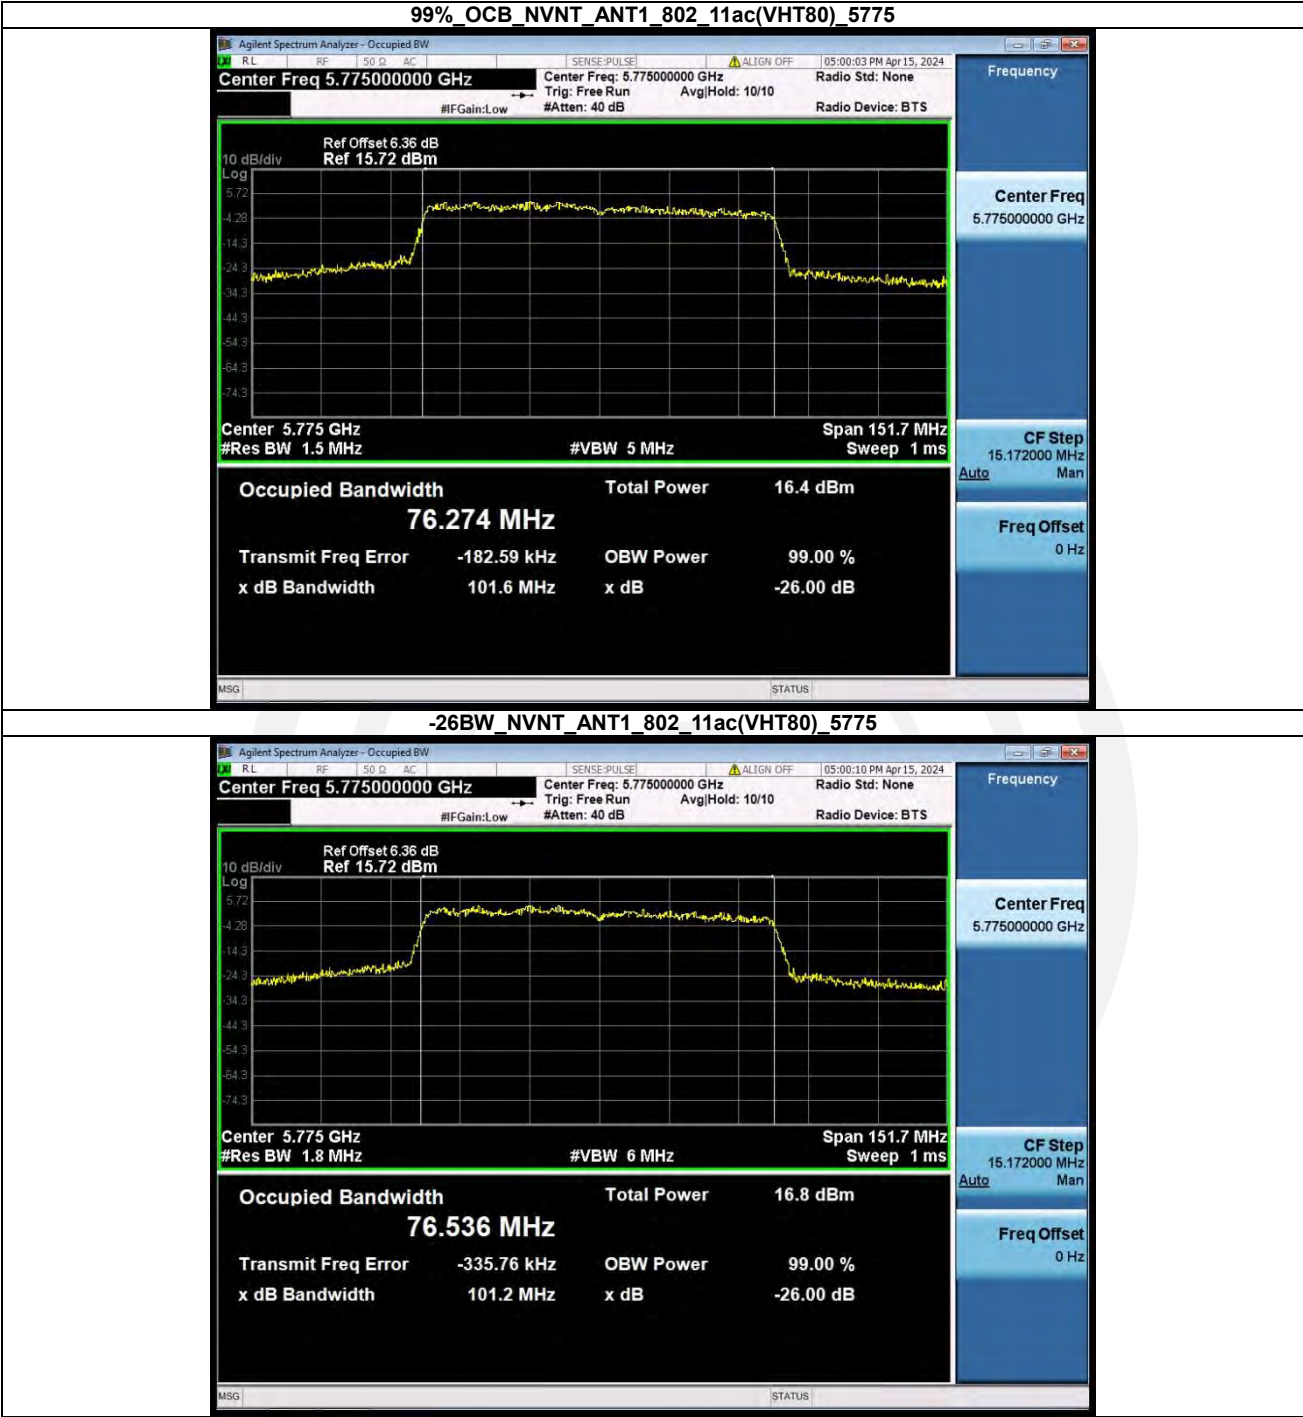



4.4 Transmit Power

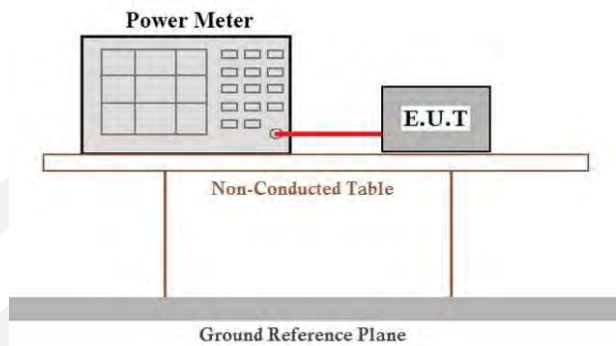Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 250mW. For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T.' (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T. are placed on a 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass


Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	Duty factor(dB)	Total Power(dBm)	limit(dBm)	Result
HVNT	ANT1	802.11a	5180.00	8.43	0.00	8.43	24	Pass
HVNT	ANT1	802.11a	5200.00	7.65	0.00	7.65	24	Pass
HVNT	ANT1	802.11a	5240.00	6.55	0.12	6.67	24	Pass
HVNT	ANT1	802.11n(HT20)	5180.00	8.83	0.00	8.83	24	Pass
HVNT	ANT1	802.11n(HT20)	5200.00	7.81	0.13	7.94	24	Pass
HVNT	ANT1	802.11n(HT20)	5240.00	6.75	0.13	6.88	24	Pass
HVNT	ANT1	802.11ac(VHT20)	5180.00	8.62	0.13	8.75	24	Pass
HVNT	ANT1	802.11ac(VHT20)	5200.00	7.45	0.00	7.45	24	Pass
HVNT	ANT1	802.11ac(VHT20)	5240.00	6.94	0.13	7.07	24	Pass
HVNT	ANT1	802.11n(HT40)	5190.00	7.53	0.13	7.66	24	Pass
HVNT	ANT1	802.11n(HT40)	5230.00	7.00	0.13	7.13	24	Pass
HVNT	ANT1	802.11ac(VHT40)	5190.00	7.67	0.26	7.93	24	Pass
HVNT	ANT1	802.11ac(VHT40)	5230.00	7.06	0.26	7.32	24	Pass
HVNT	ANT1	802.11ac(VHT80)	5210.00	7.63	0.51	8.14	24	Pass


Condition	Antenna	Modulation	Frequency (MHz)	Duty cycle(%)	Duty_factor
HVNT	ANT1	802.11a	5180.00	98.60	0.00
HVNT	ANT1	802.11a	5200.00	98.60	0.00
HVNT	ANT1	802.11a	5240.00	97.18	0.12
HVNT	ANT1	802.11n(HT20)	5180.00	98.50	0.00
HVNT	ANT1	802.11n(HT20)	5200.00	97.01	0.13
HVNT	ANT1	802.11n(HT20)	5240.00	97.01	0.13
HVNT	ANT1	802.11ac(VHT20)	5180.00	97.01	0.13
HVNT	ANT1	802.11ac(VHT20)	5200.00	98.52	0.00
HVNT	ANT1	802.11ac(VHT20)	5240.00	97.01	0.13
HVNT	ANT1	802.11n(HT40)	5190.00	97.10	0.13
HVNT	ANT1	802.11n(HT40)	5230.00	97.10	0.13
HVNT	ANT1	802.11ac(VHT40)	5190.00	94.12	0.26
HVNT	ANT1	802.11ac(VHT40)	5230.00	94.12	0.26
HVNT	ANT1	802.11ac(VHT80)	5210.00	88.89	0.51

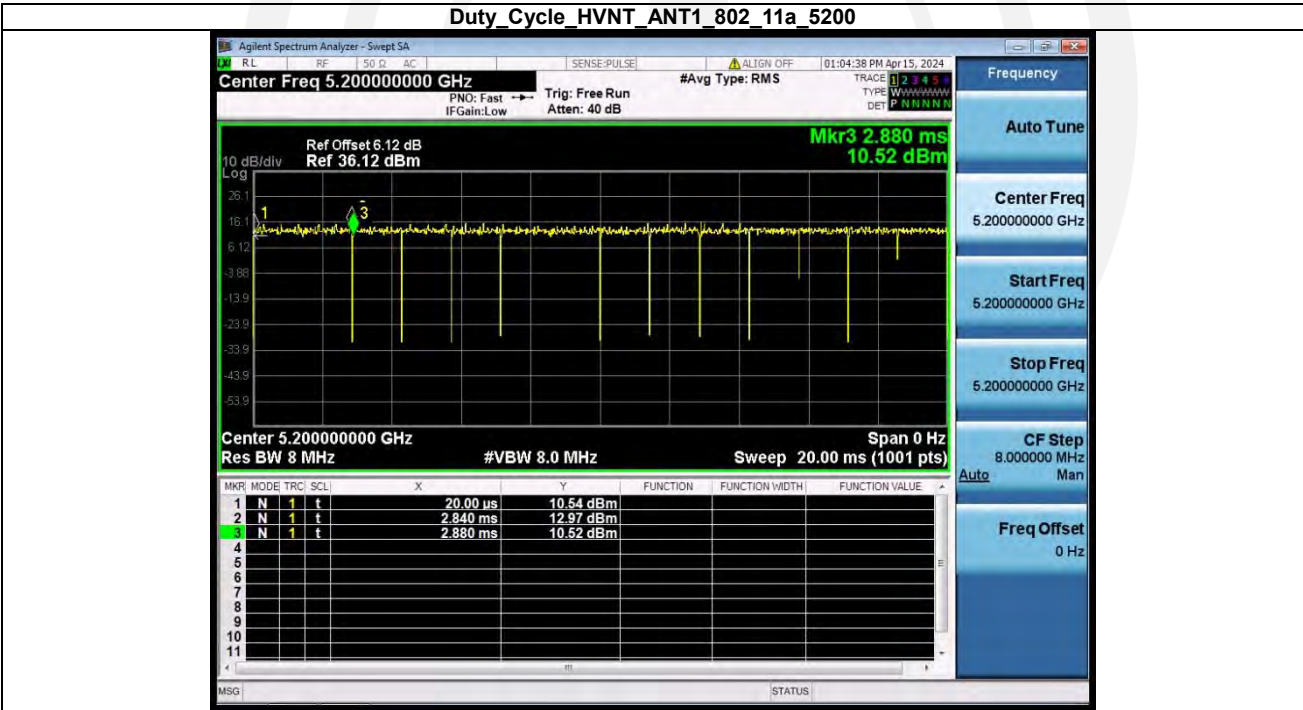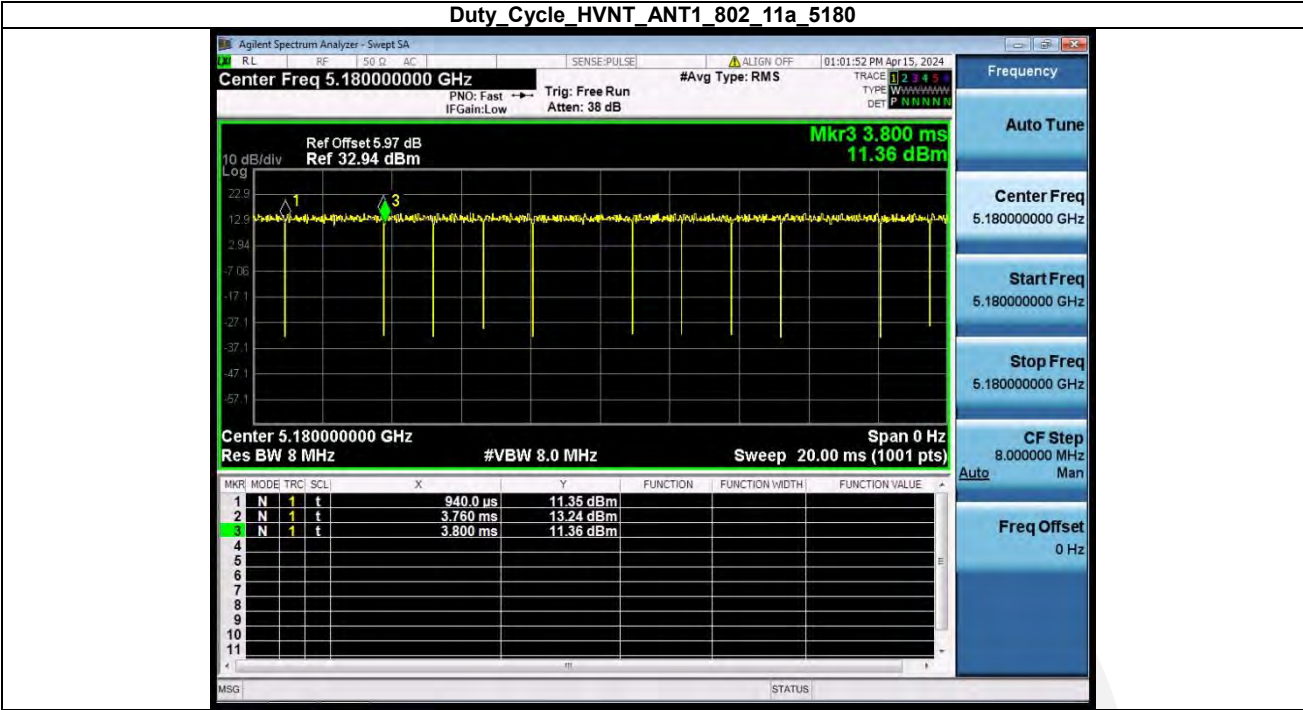


Duty Cycle HVNT_ANT1_802_11a_5240

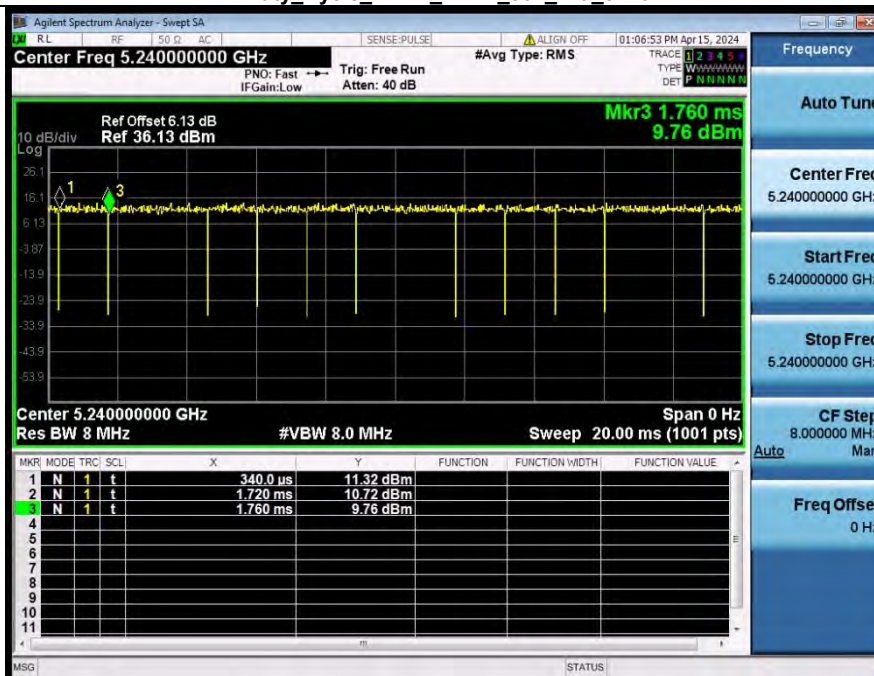

Duty Cycle HVNT_ANT1_802_11n(HT20)_5180

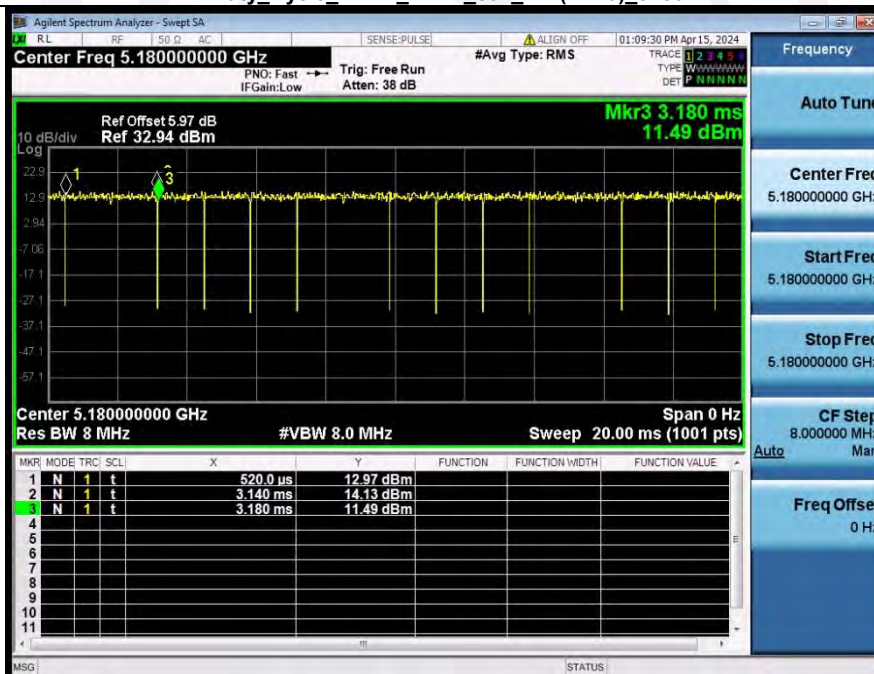

Duty Cycle HVNT_ANT1_802_11n(HT20)_5200

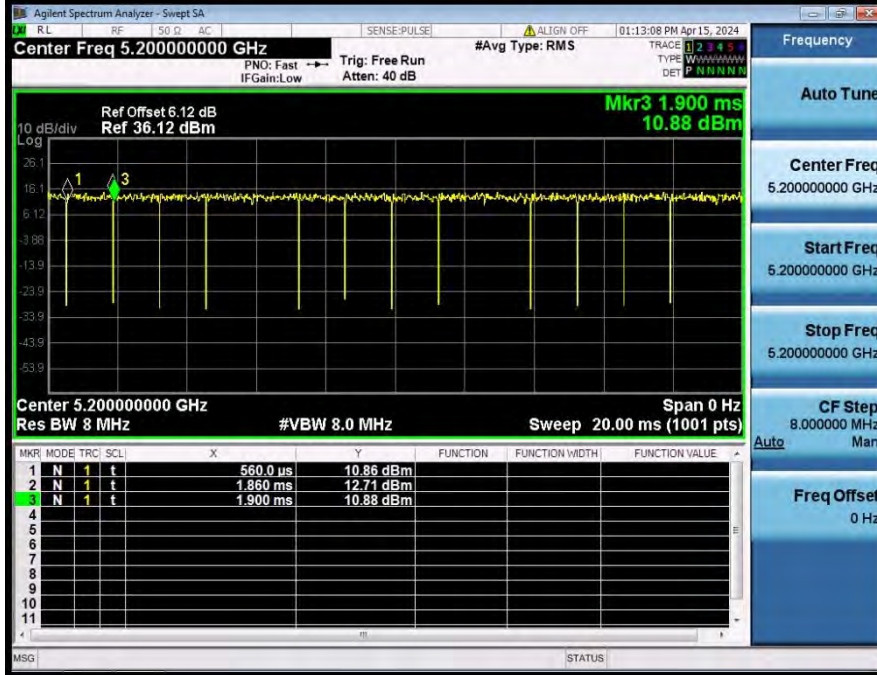

Duty Cycle HVNT_ANT1_802_11n(HT20)_5240

