

TEST REPORT

Applicant: Shanghai Top-chip Micro-electronics Tech Co.,Ltd.

Address of Applicant: Rm 2501,Building 2, 1077 ZuChongZhi Rd,Zhang Jiang Hi-Tech Park,Pudong New Area,Shanghai,China

Manufacturer/Factory: Shanghai Top-chip Micro-electronics Tech Co.,Ltd.

Address of Manufacturer/Factory: Rm 2501,Building 2, 1077 ZuChongZhi Rd,Zhang Jiang Hi-Tech Park,Pudong New Area,Shanghai,China

Equipment Under Test (EUT)

Product Name: Top-Chip Bluetooth Mesh Module

Model No.: TC6203P_D1

Trade Mark : Top-Chip

FCC ID: 2AVUD-TC6203D

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: Sep. 19,2020

Date of Test: Sep. 19 - Oct. 10,2020

Date of report issued: Oct. 10,2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo

Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Oct. 10,2020	Original

Prepared By:  **Date:** Oct. 10,2020

Project Engineer

Check By:  **Date:** Oct. 10,2020

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	8
5.7 TEST LOCATION.....	8
6 TEST INSTRUMENTS LIST.....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 ANTENNA REQUIREMENT.....	11
7.2 RADIATED EMISSION METHOD.....	12
7.2.1 Field Strength of The Fundamental Signal.....	14
7.2.2 Spurious emissions.....	15
7.2.3 Bandedge emissions.....	20
8 TEST SETUP PHOTO.....	21
9 EUT CONSTRUCTIONAL DETAILS.....	21

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Top-Chip Bluetooth Mesh Module
Model No.:	TC6203P_D1
Serial No.:	N/A
Test sample(s) ID:	GTS202010000014-1
Sample(s) Status	Engineered sample
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40
Channel separation:	2MHz
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0.68dBi
Power supply:	DC 3.3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	88.42	90.64	89.76

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

• **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

• **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

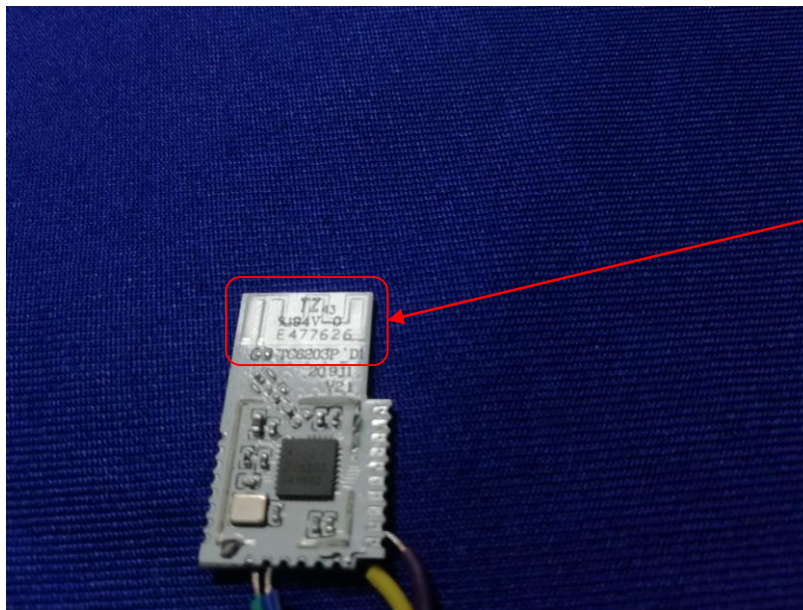
Standard requirement:

FCC part 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

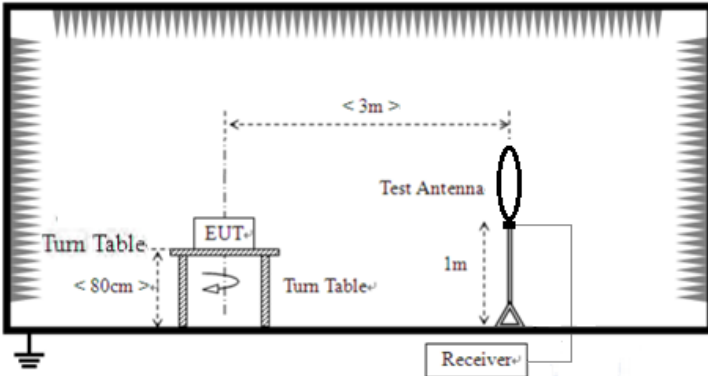
EUT Antenna:

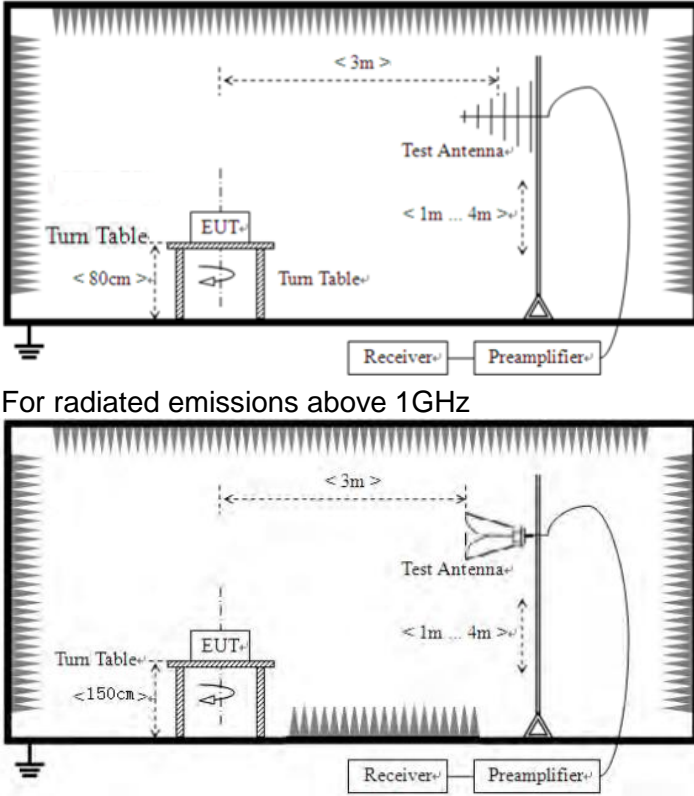
The antenna is PCB antenna, the best case gain of the antenna is 0.68dBi



BT Antenna

7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 RSS-210 B10(a)& RSS-210 B10(b)& RSS-Gen Clause 8.9&8.10				
Test Method:	ANSI C63.10:2013 and RSS-Gen				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
5000 @3m		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to1GHz</p>				

	 <p>For radiated emissions above 1GHz</p>						
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 						
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
<p>Test results:</p>	<p>Pass</p>						

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	91.68	27.58	5.39	34.01	90.64	114.00	-23.36	Vertical
2402.00	88.87	27.58	5.39	34.01	87.83	114.00	-26.17	Horizontal
2440.00	88.81	27.48	5.43	33.96	87.76	114.00	-26.24	Vertical
2440.00	89.06	27.48	5.43	33.96	88.01	114.00	-26.00	Horizontal
2480.00	91.13	27.52	5.47	33.92	90.20	114.00	-23.80	Vertical
2480.00	89.16	27.52	5.47	33.92	88.23	114.00	-25.77	Horizontal

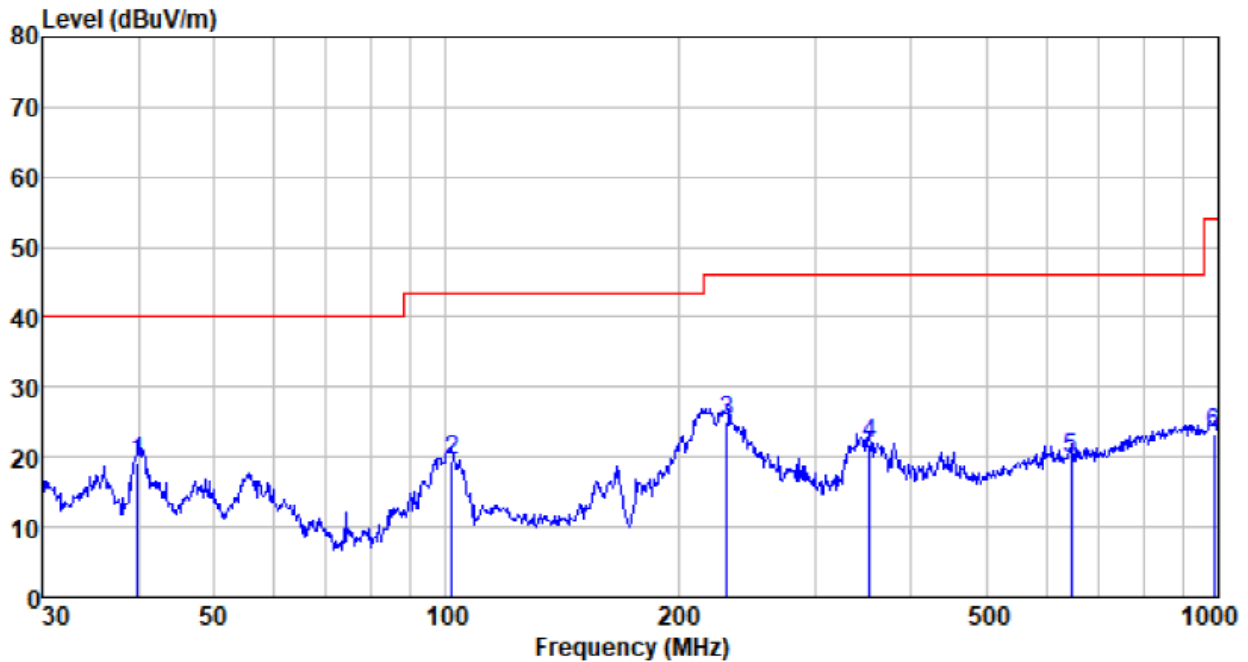
Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	78.15	27.58	5.39	34.01	77.11	94.00	-16.89	Vertical
2402.00	77.45	27.58	5.39	34.01	76.41	94.00	-17.59	Horizontal
2440.00	77.40	27.48	5.43	33.96	76.35	94.00	-17.65	Vertical
2440.00	75.53	27.48	5.43	33.96	74.48	94.00	-19.52	Horizontal
2480.00	78.08	27.52	5.47	33.92	77.15	94.00	-16.85	Vertical
2480.00	76.98	27.52	5.47	33.92	76.05	94.00	-17.95	Horizontal

7.2.2 Spurious emissions

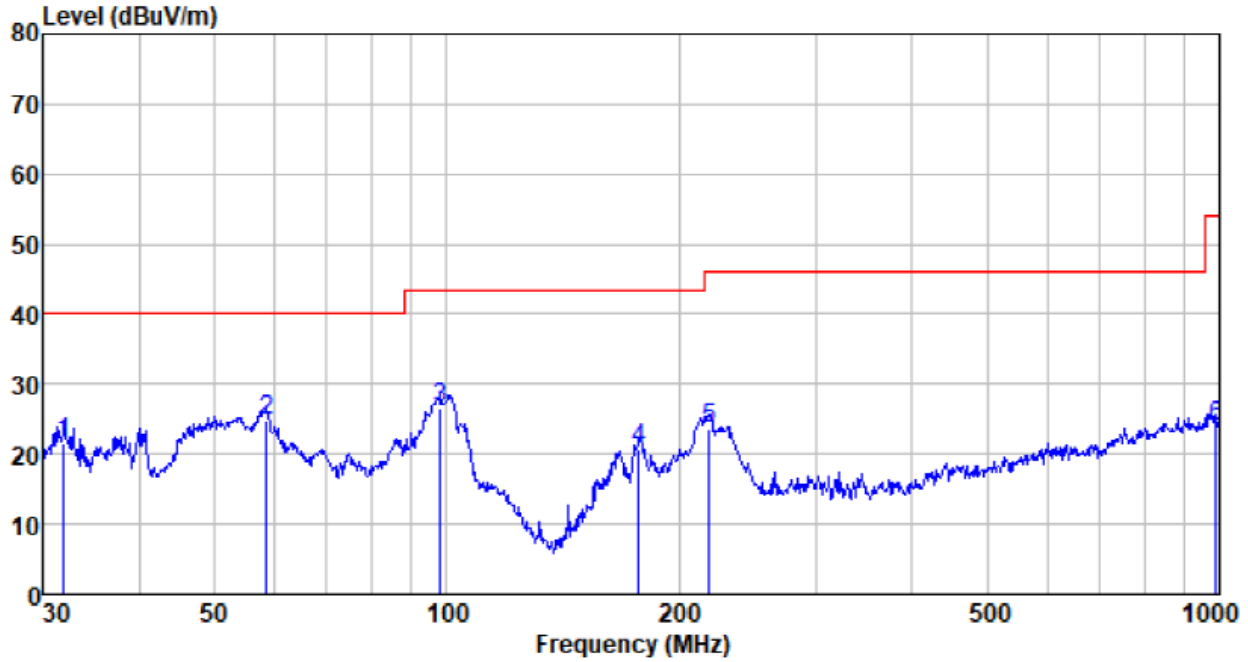
■ Below 1GHz

Horizontal:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.854	41.85	12.20	0.66	35.66	19.05	40.00	-20.95	QP
101.644	43.02	11.99	1.21	36.73	19.49	43.50	-24.01	QP
230.907	48.96	11.53	2.02	37.36	25.15	46.00	-20.85	QP
352.943	42.03	14.56	2.64	37.48	21.75	46.00	-24.25	QP
645.120	34.03	19.55	3.89	37.58	19.89	46.00	-26.11	QP
986.072	32.91	22.65	5.17	37.52	23.21	54.00	-30.79	QP

Vertical:



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.955	44.95	11.24	0.57	35.15	21.61	40.00	-18.39	QP
58.407	48.70	11.45	0.85	36.30	24.70	40.00	-15.30	QP
98.142	50.16	11.93	1.18	36.71	26.56	43.50	-16.94	QP
177.509	47.27	8.80	1.73	37.23	20.57	43.50	-22.93	QP
218.309	48.02	11.09	1.95	37.35	23.71	46.00	-22.29	QP
989.536	33.49	22.66	5.19	37.52	23.82	54.00	-30.18	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.08	31.78	8.60	32.09	42.37	74.00	-31.63	Vertical
7206.00	29.55	36.15	11.65	32.00	45.35	74.00	-28.65	Vertical
9608.00	29.08	37.95	14.14	31.62	49.55	74.00	-24.45	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	37.95	31.78	8.60	32.09	46.24	74.00	-27.76	Horizontal
7206.00	30.79	36.15	11.65	32.00	46.59	74.00	-27.41	Horizontal
9608.00	28.89	37.95	14.14	31.62	49.36	74.00	-24.64	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	23.35	31.78	8.60	32.09	31.64	54.00	-22.36	Vertical
7206.00	18.51	36.15	11.65	32.00	34.31	54.00	-19.69	Vertical
9608.00	17.45	37.95	14.14	31.62	37.92	54.00	-16.08	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	27.38	31.78	8.60	32.09	35.67	54.00	-18.33	Horizontal
7206.00	20.22	36.15	11.65	32.00	36.02	54.00	-17.98	Horizontal
9608.00	17.60	37.95	14.14	31.62	38.07	54.00	-15.93	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” , means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	34.10	31.85	8.67	32.12	42.50	74.00	-31.50	Vertical
7320.00	29.57	36.37	11.72	31.89	45.77	74.00	-28.23	Vertical
9760.00	29.09	38.35	14.25	31.62	50.07	74.00	-23.93	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	37.98	31.85	8.67	32.12	46.38	74.00	-27.62	Horizontal
7320.00	30.80	36.37	11.72	31.89	47.00	74.00	-27.00	Horizontal
9760.00	28.91	38.35	14.25	31.62	49.89	74.00	-24.11	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	23.37	31.85	8.67	32.12	31.77	54.00	-22.23	Vertical
7320.00	18.52	36.37	11.72	31.89	34.72	54.00	-19.28	Vertical
9760.00	17.46	38.35	14.25	31.62	38.44	54.00	-15.56	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	27.40	31.85	8.67	32.12	35.80	54.00	-18.20	Horizontal
7320.00	20.23	36.37	11.72	31.89	36.43	54.00	-17.57	Horizontal
9760.00	17.61	38.35	14.25	31.62	38.59	54.00	-15.41	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

RRemark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”, means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	33.93	31.93	8.73	32.16	42.43	74.00	-31.57	Vertical
7440.00	29.45	36.59	11.79	31.78	46.05	74.00	-27.95	Vertical
9920.00	28.99	38.81	14.38	31.88	50.30	74.00	-23.70	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	37.77	31.93	8.73	32.16	46.27	74.00	-27.73	Horizontal
7440.00	30.67	36.59	11.79	31.78	47.27	74.00	-26.73	Horizontal
9920.00	28.79	38.81	14.38	31.88	50.10	74.00	-23.90	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	23.23	31.93	8.73	32.16	31.73	54.00	-22.27	Vertical
7440.00	18.43	36.59	11.79	31.78	35.03	54.00	-18.97	Vertical
9920.00	17.38	38.81	14.38	31.88	38.69	54.00	-15.31	Vertical
12400.00						54.00		Vertical
14880.00						54.00		Vertical
4960.00	27.25	31.93	8.73	32.16	35.75	54.00	-18.25	Horizontal
7440.00	20.13	36.59	11.79	31.78	36.73	54.00	-17.27	Horizontal
9920.00	17.52	38.81	14.38	31.88	38.83	54.00	-15.17	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”, means this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	47.43	27.59	5.38	24.71	55.69	74.00	-18.32	Horizontal
2400.00	48.50	27.41	5.39	24.72	56.58	74.00	-17.42	Horizontal
2390.00	47.51	27.59	5.38	24.71	55.77	74.00	-18.24	Vertical
2400.00	48.80	27.41	5.39	24.72	56.88	74.00	-17.13	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.11	27.59	5.38	24.71	43.37	54.00	-10.63	Horizontal
2400.00	35.41	27.41	5.39	24.72	43.49	54.00	-10.51	Horizontal
2390.00	35.99	27.59	5.38	24.71	44.25	54.00	-9.76	Vertical
2400.00	36.63	27.41	5.39	24.72	44.71	54.00	-9.30	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	45.89	27.53	5.47	24.80	54.09	74.00	-19.91	Horizontal
2500.00	44.71	27.55	5.49	24.86	52.89	74.00	-21.12	Horizontal
2483.50	46.89	27.53	5.47	24.80	55.09	74.00	-18.91	Vertical
2500.00	45.78	27.55	5.49	24.86	53.96	74.00	-20.05	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.74	27.53	5.47	24.80	42.94	54.00	-11.07	Horizontal
2500.00	34.52	27.55	5.49	24.86	42.70	54.00	-11.30	Horizontal
2483.50	35.15	27.53	5.47	24.80	43.35	54.00	-10.65	Vertical
2500.00	34.61	27.55	5.49	24.86	42.79	54.00	-11.21	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

----- End -----