



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

CHENGDU JOUAV DA PENG TECH CO., LTD

6A-7F, Jingrong Innovation Hub, No. 200 5th TianFu St., Hi-tech District, Chengdu, 610000
China

FCC ID: 2AVXCGCS-202

Report Type: Original Report	Product Type: Ground Control Station
Test Engineer:	Jack Jiao <i>Jack Jiao</i>
Report Number:	RSHA200310003-00C
Report Date:	2020-08-03
Reviewed By:	Oscar Ye <i>Oscar Ye</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	11
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.247(d) - SPURIOUS EMISSIONS AT ANTENNA PORT	14
APPLICABLE STANDARD	14
TEST DATA	14
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(e) - POWER SPECTRAL DENSITY	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	CHENGDU JOUAV DA PENG TECH CO., LTD
Tested Model:	GCS-202
Product Type:	Ground Control Station
Power Supply:	DC 12.6 V
RF Function:	2.4G Wi-Fi
Operating Band/Frequency:	2412~2462 MHz (802.11b/g/n20), 2422~2452 MHz (n40)
Channel Number:	11 (802.11b/g/n20), 7 (n40)
Channel Separation:	5 MHz
Modulation Type	DSSS, OFDM
Antenna Type:	Omni Antenna
Maximum Antenna Gain:	3.0 dBi

**All measurement and test data in this report was gathered from production sample serial number: 20200310003 (Assigned by the BACL). The EUT supplied by the applicant was received on 2020-03-10.*

Objective

This report is prepared on behalf of *CHENGDU JOUAV DA PENG TECH CO., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliant with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submissions with FCC ID: 2AVXCGCS-202.
FCC Part 15.247 DSS submissions with FCC ID: 2AVXCCW-007.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

For 802.11n-HT40 mode, EUT was tested with Channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: RT5350QA

Pre-scan with all the data rates, and the worst case was performed as below:


Mode	Data Rate	Power Setting
802.11b	1 Mbps	15
802.11g	6 Mbps	12
802.11n-HT20	MCS0	12
802.11n-HT40	MCS0	12

Duty Cycle:


802.11b Mode Middle Channel

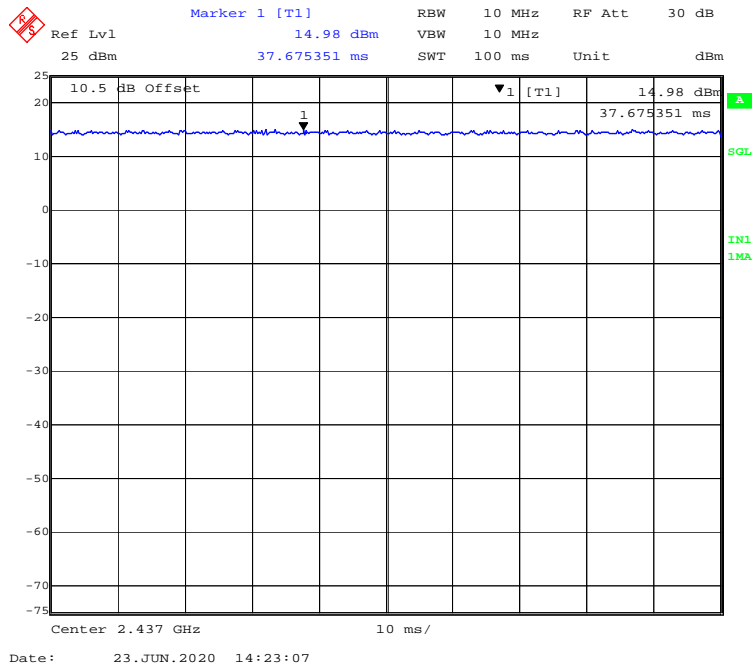


802.11g Mode Middle Channel

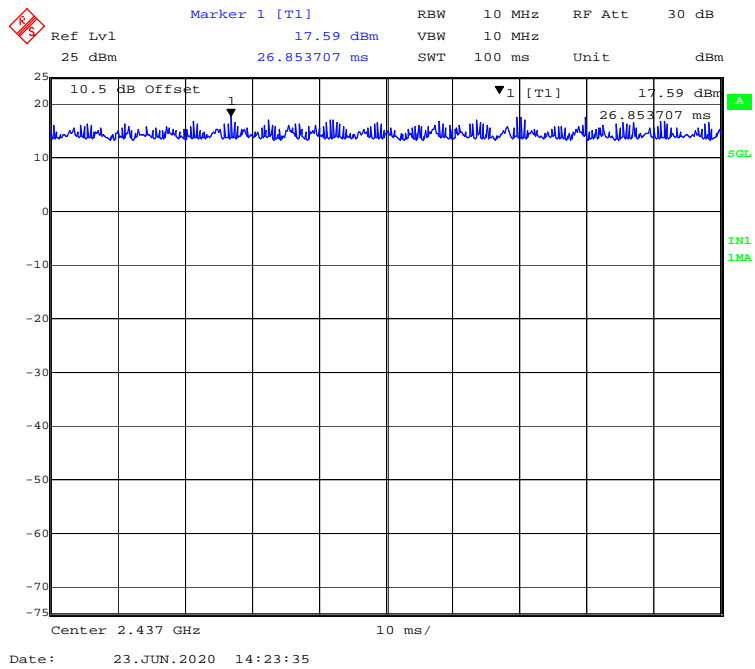

802.11n-HT20 Mode Middle Channel

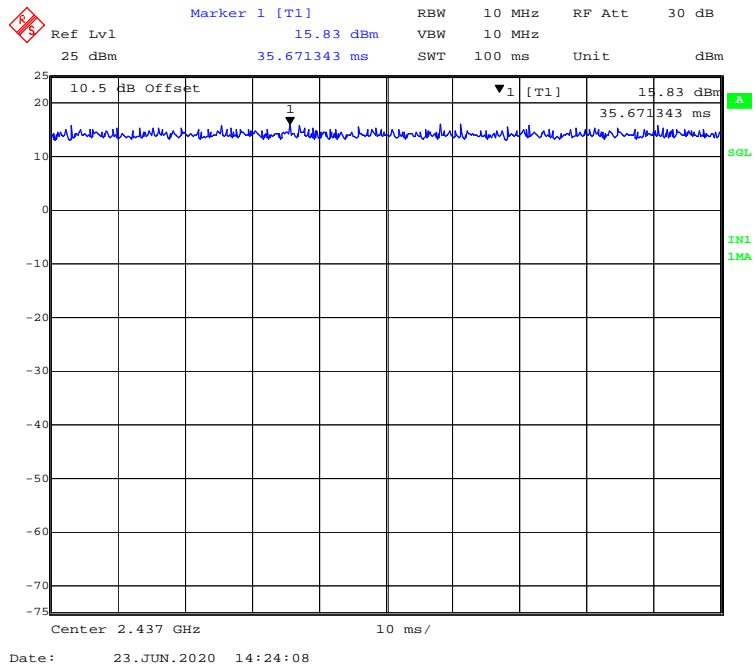

802.11n-HT40 Mode Middle Channel

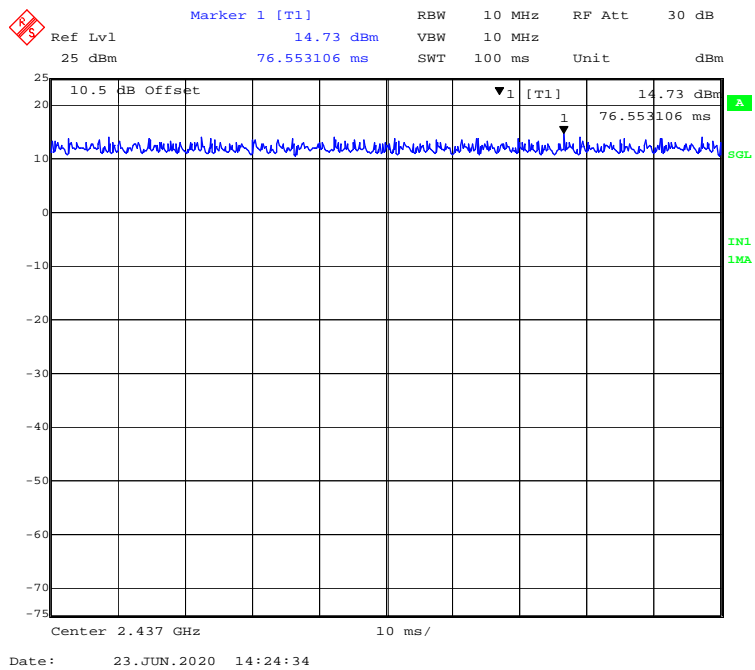

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0

Note: “x” means the Duty Cycle.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant*
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant*
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Compliant*: Refer to report No. RSHA200310003-00B.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
JOUAV	RF Cable	JOUAV C01	C01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Chengdu) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi 802.11b	2412~2462	3.0	2.00	17.50	56.23	20	0.0224	1.0
2.4G Wi-Fi 802.11g		3.0	2.00	16.50	44.67	20	0.0178	1.0
2.4G Wi-Fi 802.11 n-HT20		3.0	2.00	16.50	44.67	20	0.0178	1.0
2.4G Wi-Fi 802.11 n-HT40	2422~2452	3.0	2.00	17.50	56.23	20	0.0224	1.0
SRD	2401.6~2477.6	3.0	2.00	17.00	50.12	20	0.0199	1.0

Note:

- (1) The Tune-up output power was declared by the Manufacturer.
- (2) Wi-Fi & SRD can transmit simultaneously; the worst condition is as below:

$$\sum_i \frac{S_i}{S_{Limit,i}} = 0.0224 + 0.0199 = 0.0423 < 1.0$$

Conclusion: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliant with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an Omni antenna and the antenna gain is 3.0 dBi, which use a unique type of connector to attach to the EUT, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.247(d) - SPURIOUS EMISSIONS AT ANTENNA PORT

Applicable Standard

FCC §15.247 (d)

Test Data

Environmental Conditions


Temperature:	25.5 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa

The testing was performed by Jack Jiao on 2020-06-23.


EUT operation mode: Transmitting

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

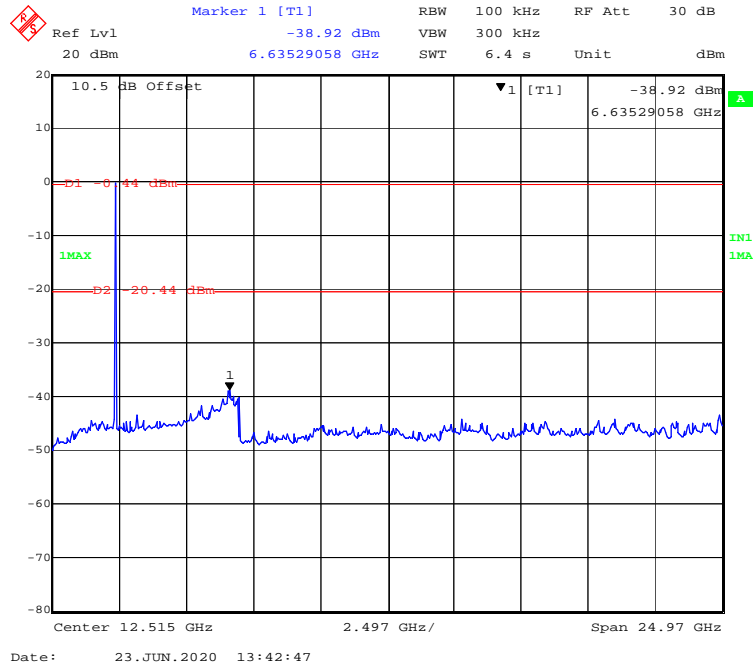


802.11b Mode Middle Channel

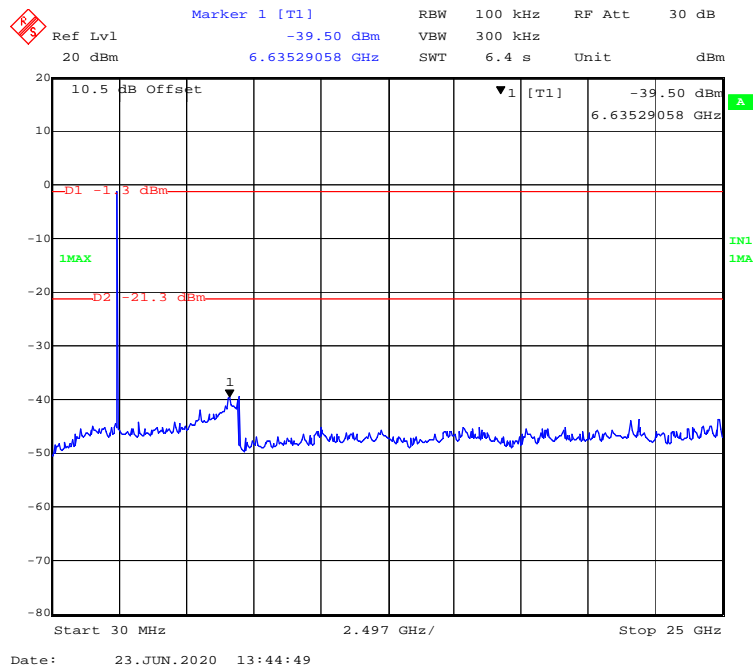


802.11g Mode Middle Channel

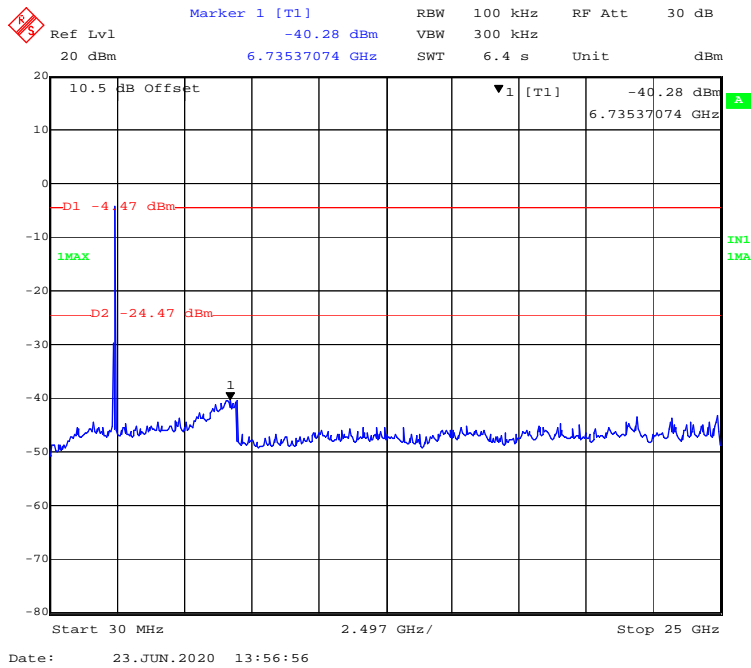


802.11g Mode High Channel

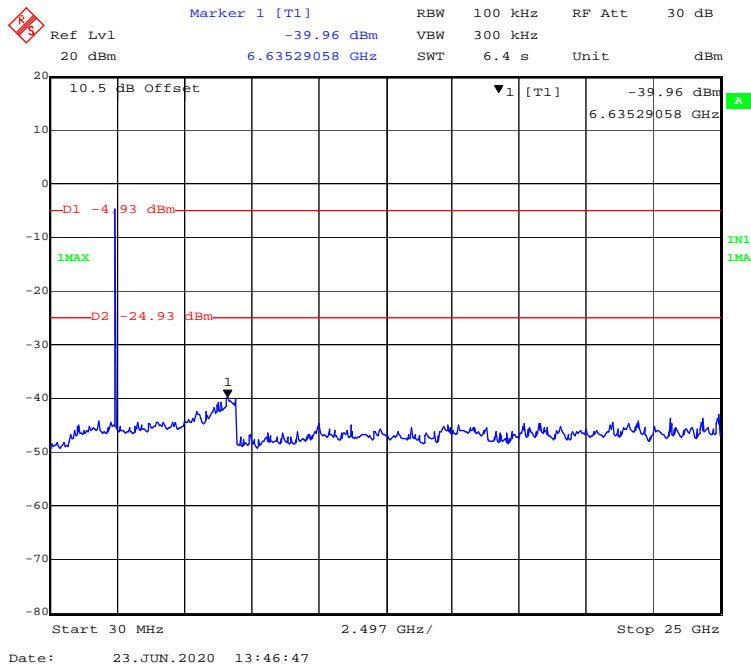


802.11n-HT20 Mode Low Channel

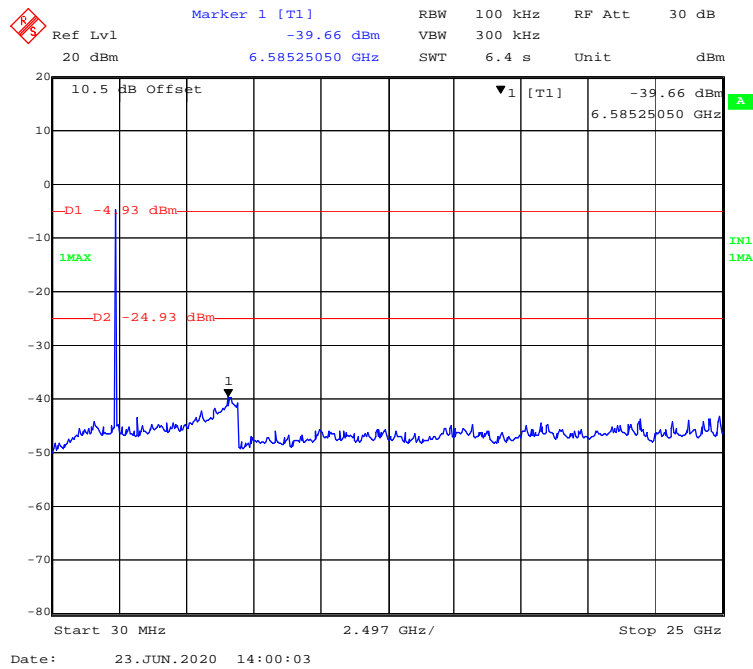


802.11n-HT20 Mode Middle Channel

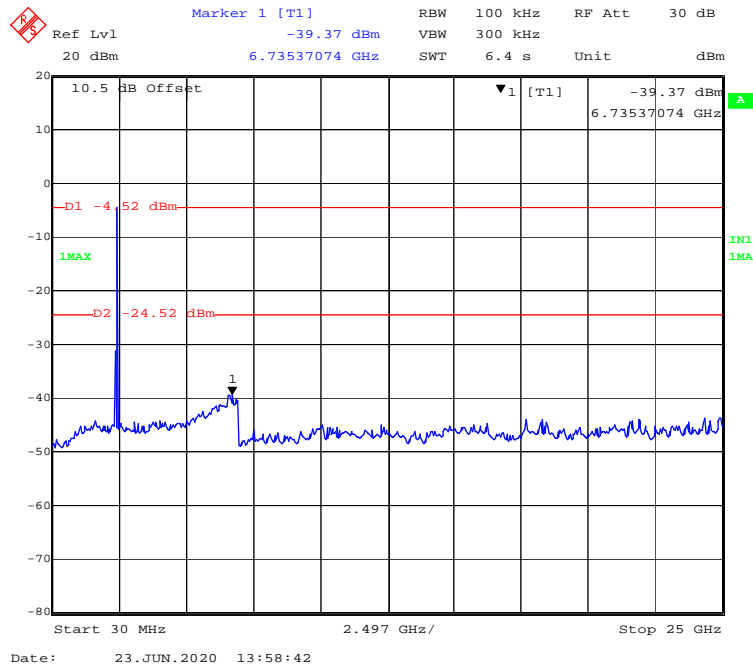

802.11n-HT40 Mode Middle Channel

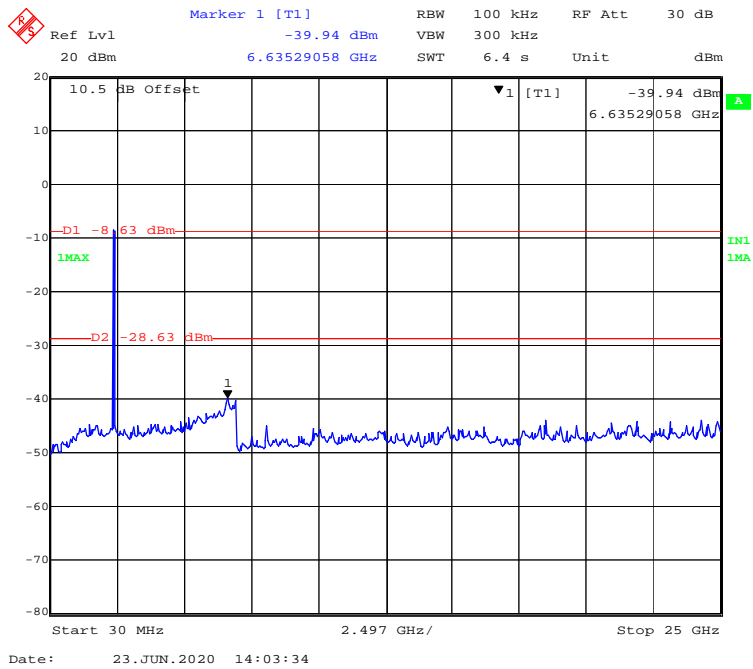

802.11n-HT40 Mode High Channel

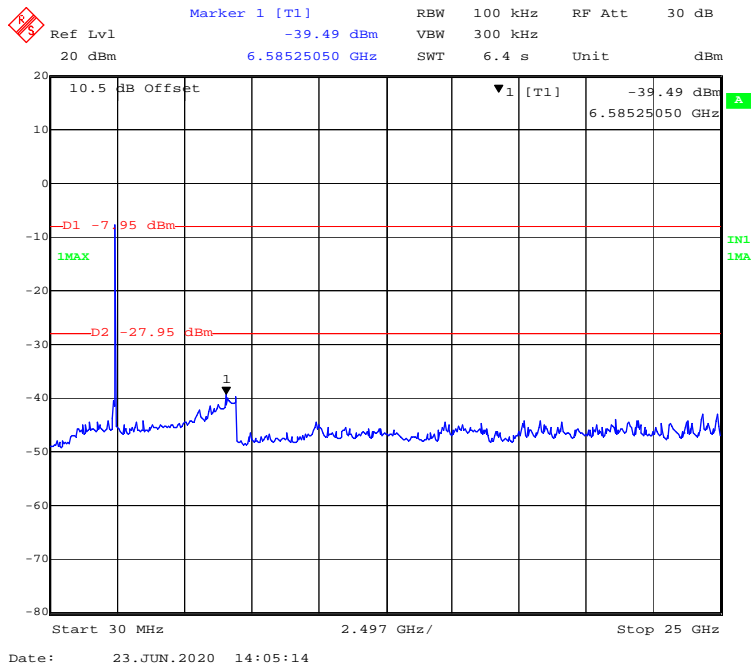

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * RBW$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.0-25.5 °C
Relative Humidity:	46-51 %
ATM Pressure:	101.3-102.6 kPa


The testing was performed by Jack Jiao from 2020-06-23 to 2020-07-06.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	10.100	≥ 0.5
Middle	2437	10.160	≥ 0.5
High	2462	10.220	≥ 0.5
802.11g Mode			
Low	2412	16.593	≥ 0.5
Middle	2437	16.593	≥ 0.5
High	2462	16.593	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.735	≥ 0.5
Middle	2437	17.735	≥ 0.5
High	2462	17.735	≥ 0.5
802.11n-HT40 Mode			
Low	2422	36.673	≥ 0.5
Middle	2437	36.673	≥ 0.5
High	2452	36.673	≥ 0.5


802.11b Mode Low Channel

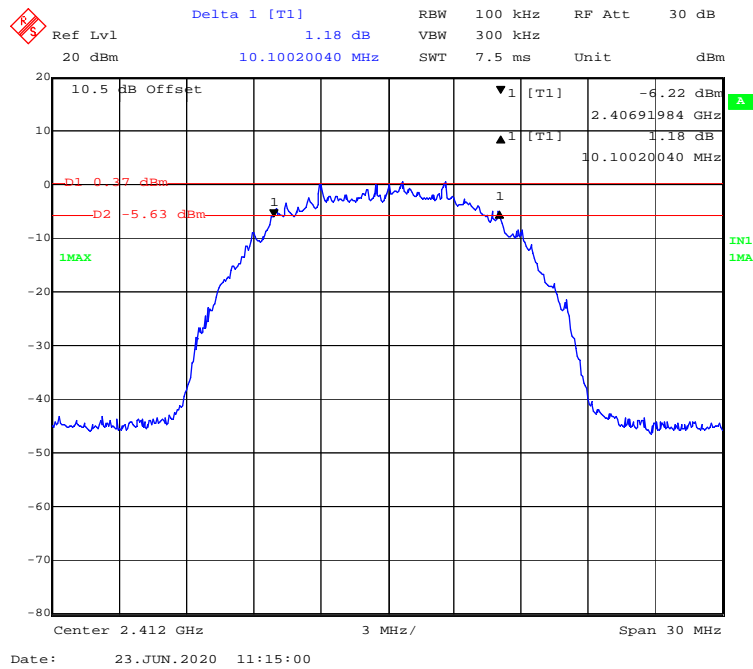


802.11b Mode Middle Channel

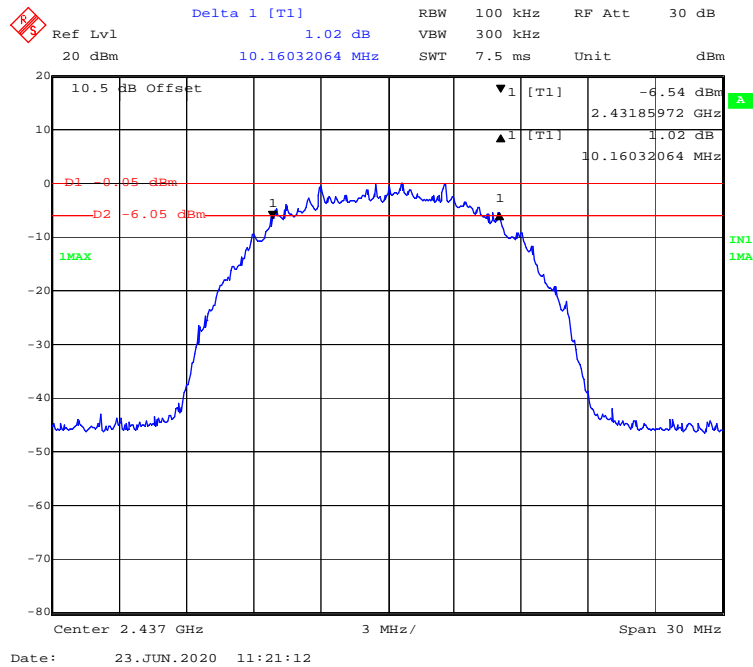


802.11b Mode High Channel

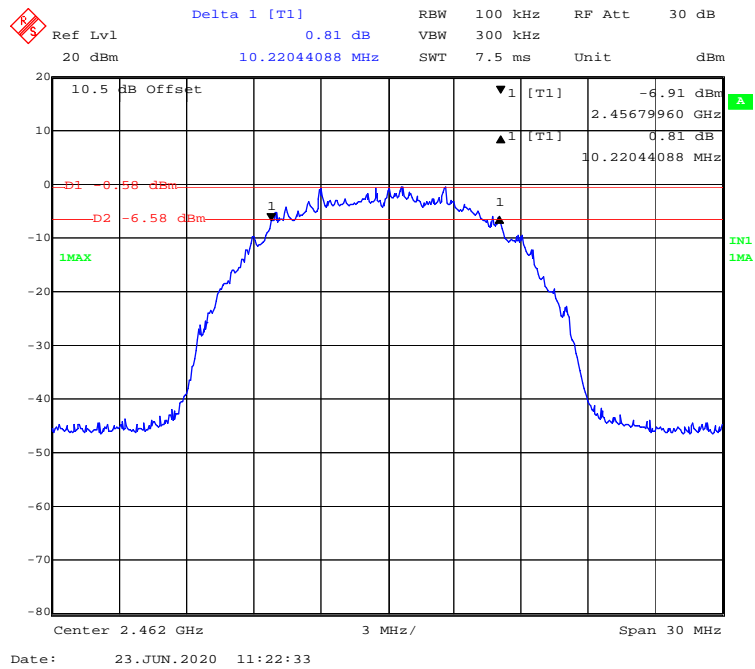


802.11g Mode Low Channel

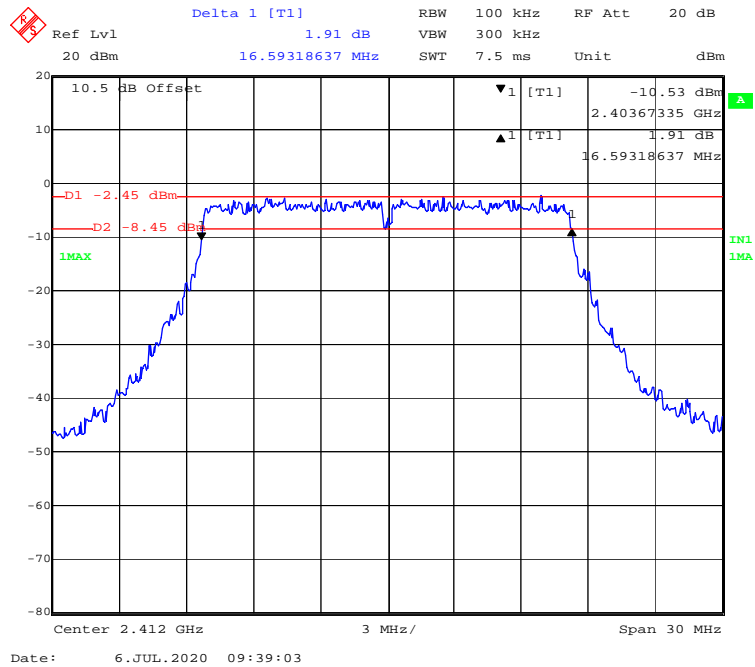


802.11g Mode Middle Channel

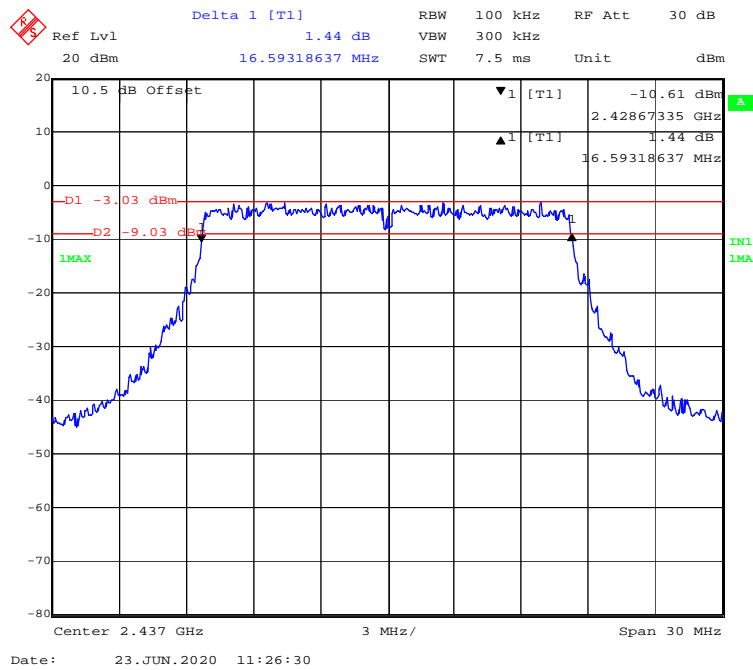


802.11g Mode High Channel

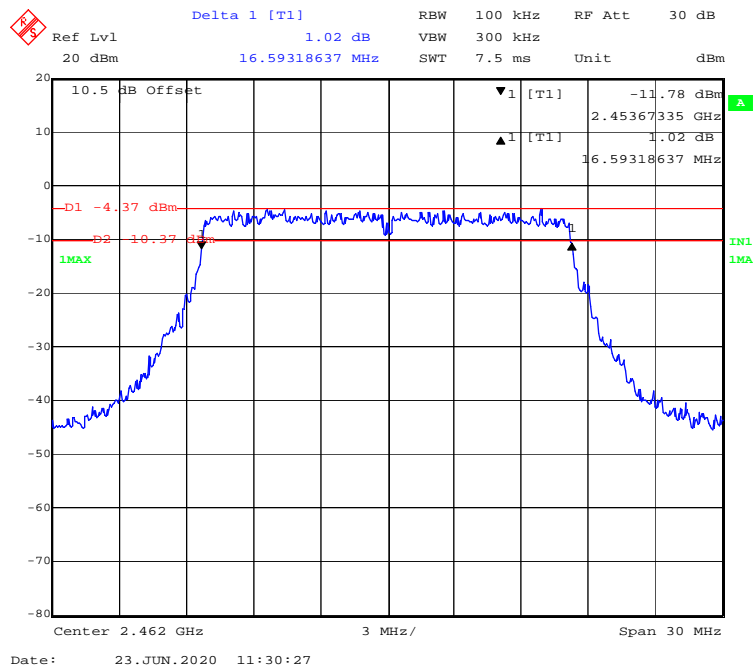


802.11n-HT20 Mode Low Channel

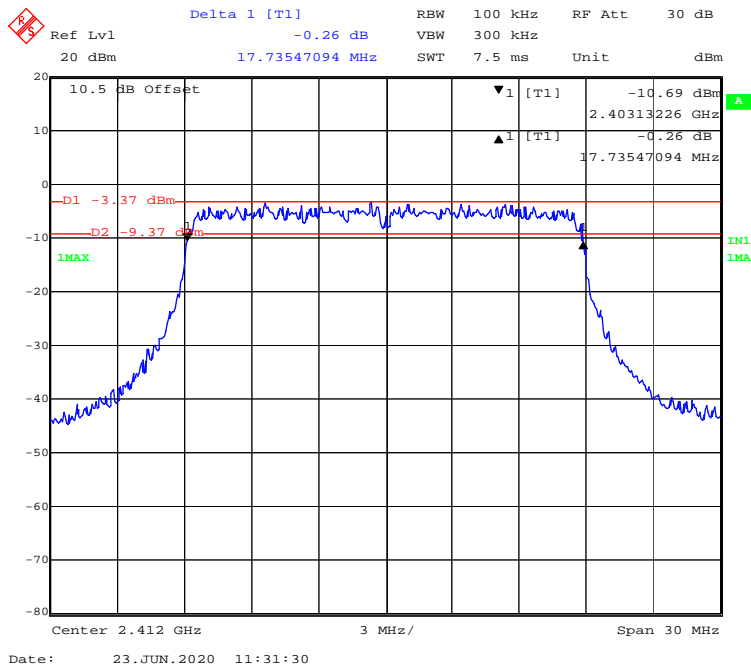


802.11n-HT20 Mode Middle Channel

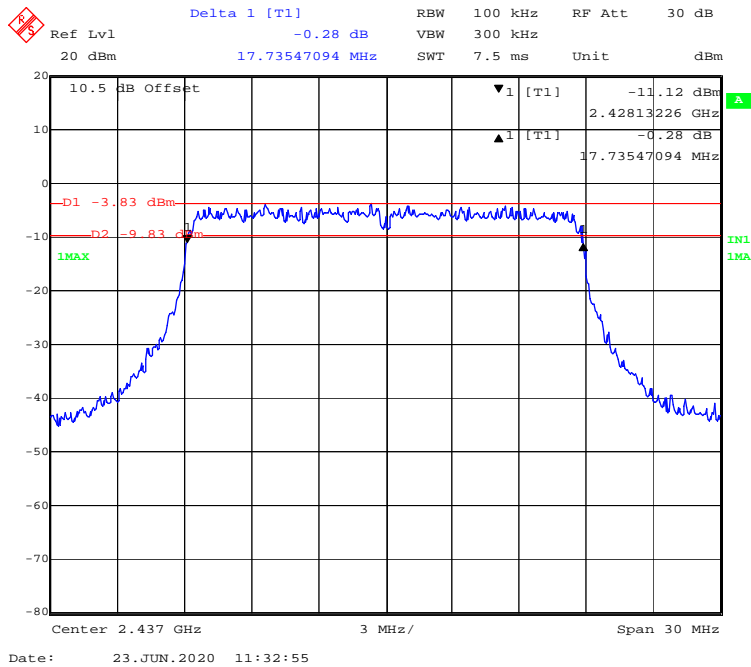


802.11n-HT20 Mode High Channel

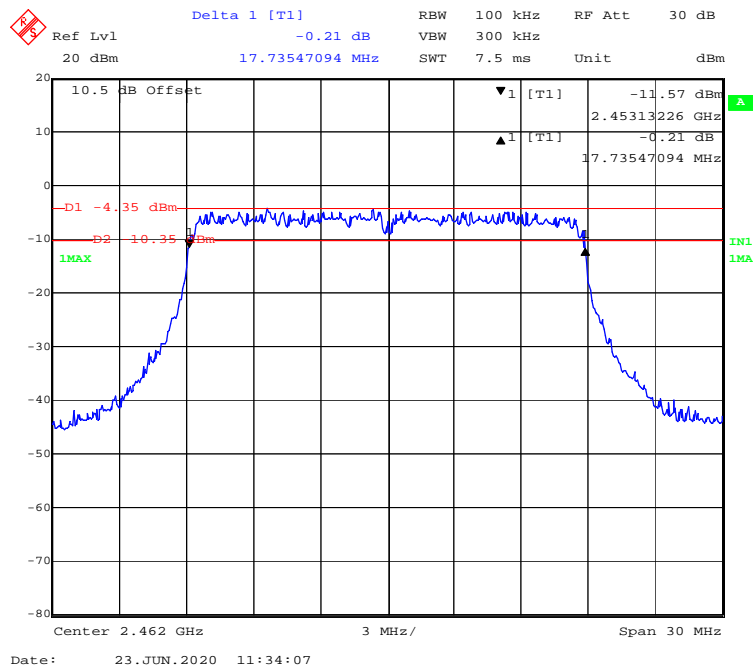


802.11n-HT40 Mode Low Channel

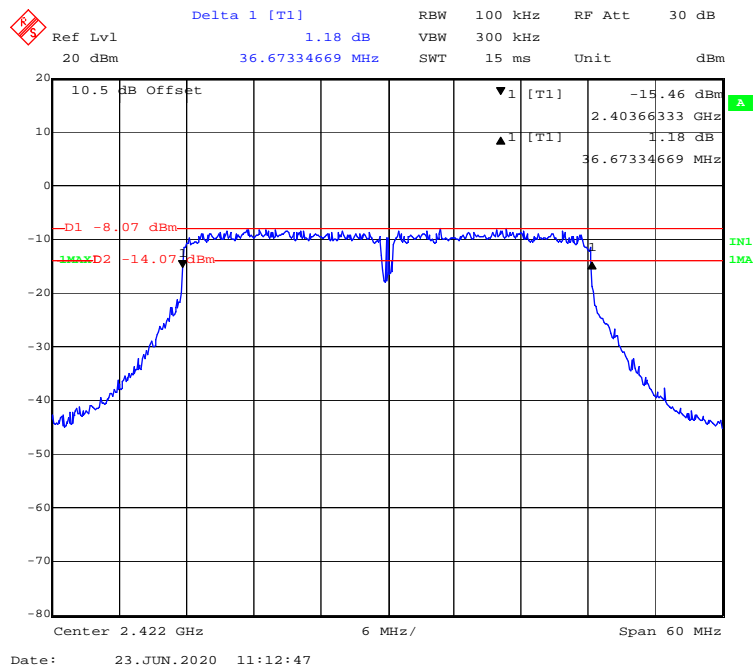

802.11n-HT40 Mode Middle Channel

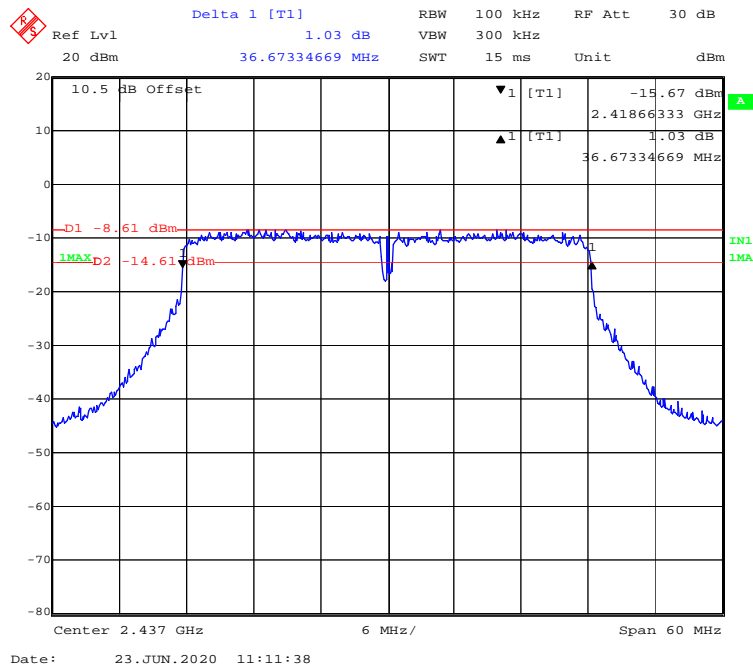

802.11n-HT40 Mode High Channel

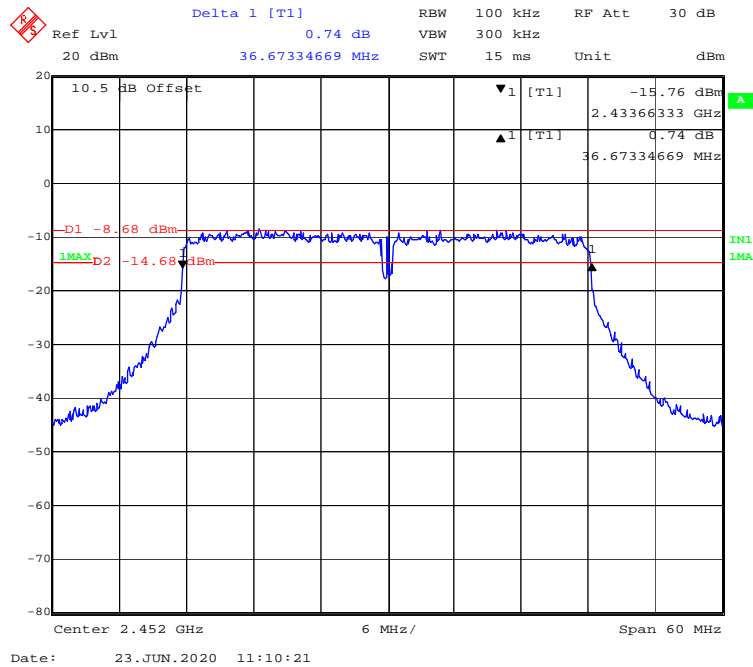

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliant with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23.8 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2020-06-23.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	17.26	30	Pass
Middle	2437	16.53	30	Pass
High	2462	16.03	30	Pass
802.11g Mode				
Low	2412	16.48	30	Pass
Middle	2437	15.98	30	Pass
High	2462	15.48	30	Pass
802.11n-HT20 Mode				
Low	2412	16.49	30	Pass
Middle	2437	16.09	30	Pass
High	2462	15.59	30	Pass
802.11n-HT40 Mode				
Low	2422	17.04	30	Pass
Middle	2437	16.47	30	Pass
High	2452	16.20	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliant with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	25.2 °C
Relative Humidity:	48 %
ATM Pressure:	101.3 kPa

The testing was performed by Jack Jiao on 2020-06-23.


EUT operation mode: Transmitting

Test Result: Compliant


802.11b Mode Left Side

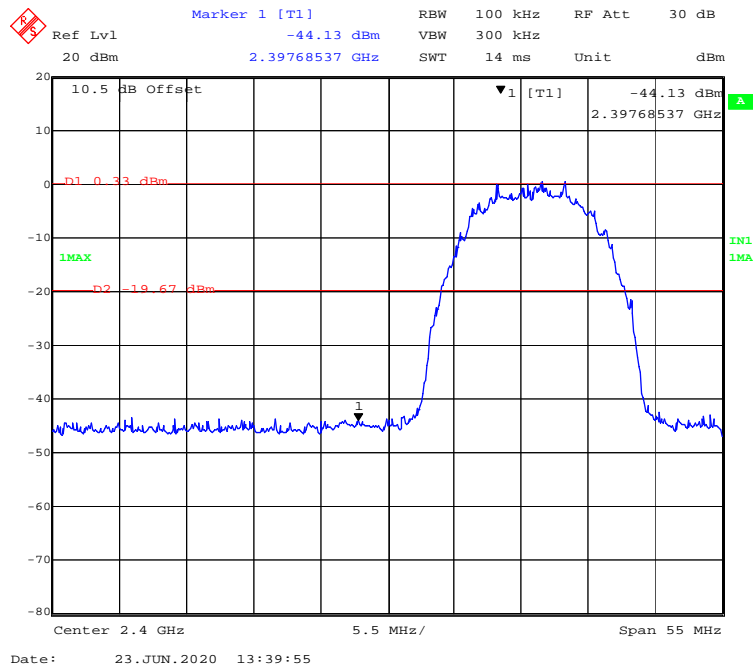


802.11b Mode Right Side

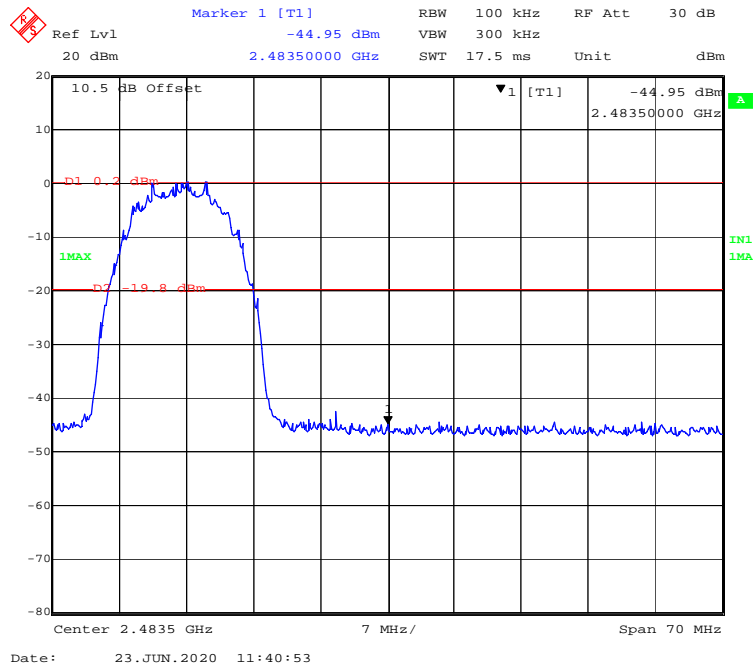


802.11g Mode Left Side

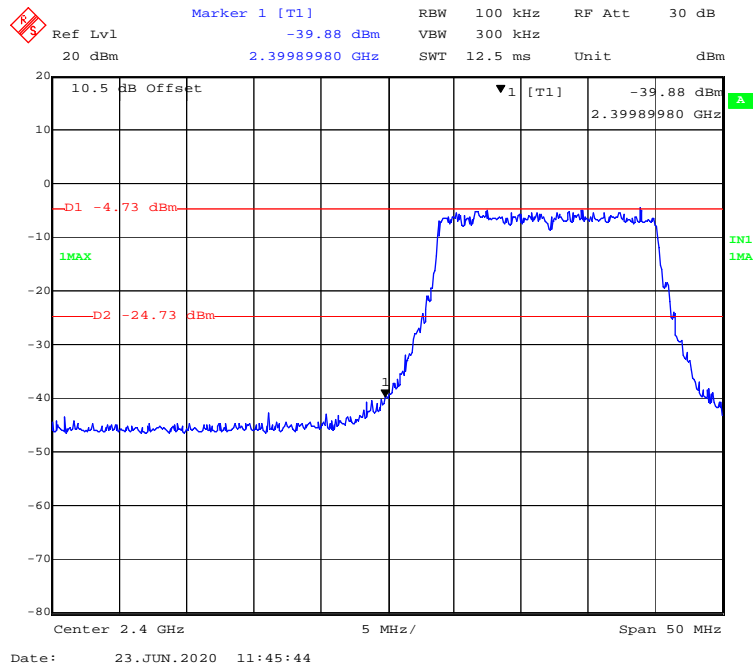


802.11g Mode Right Side

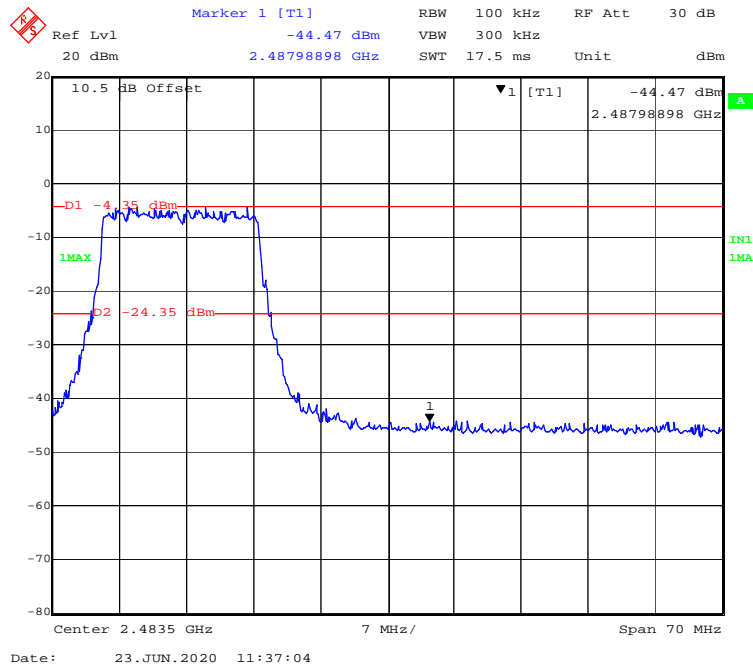


802.11n-HT20 Mode Left Side

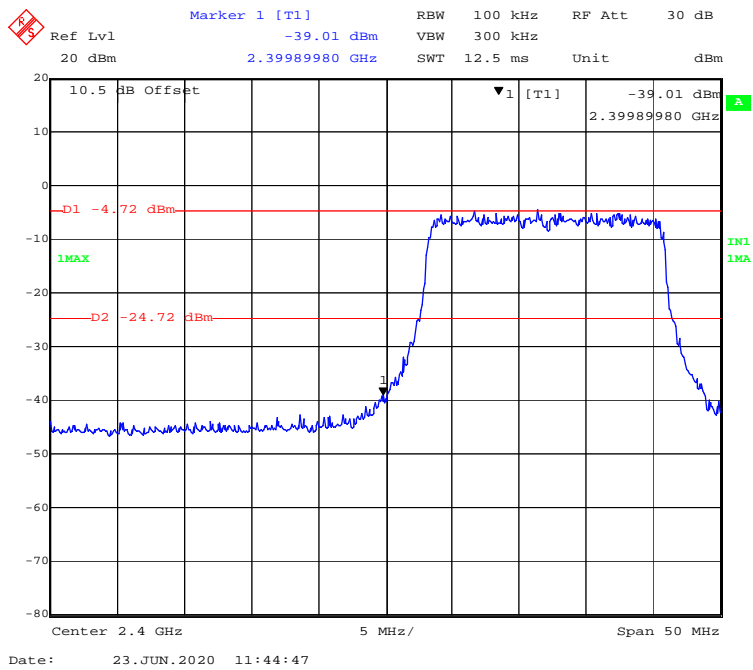


802.11n-HT20 Mode Right Side

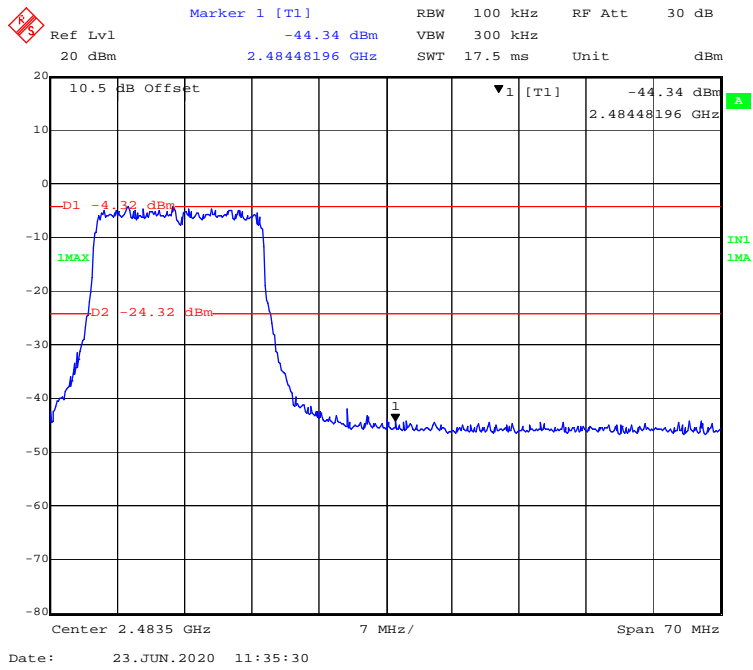

802.11n-HT40 Mode Left Side

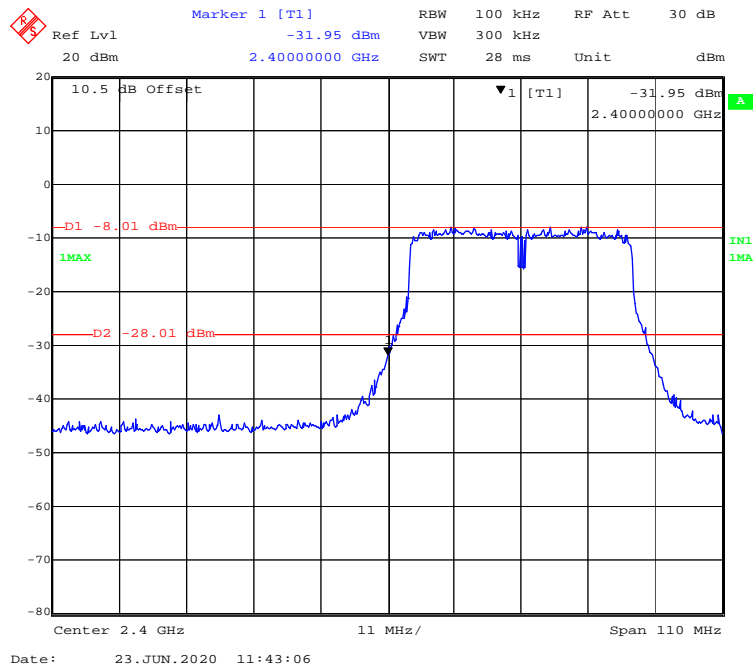

802.11n-HT40 Mode Right Side

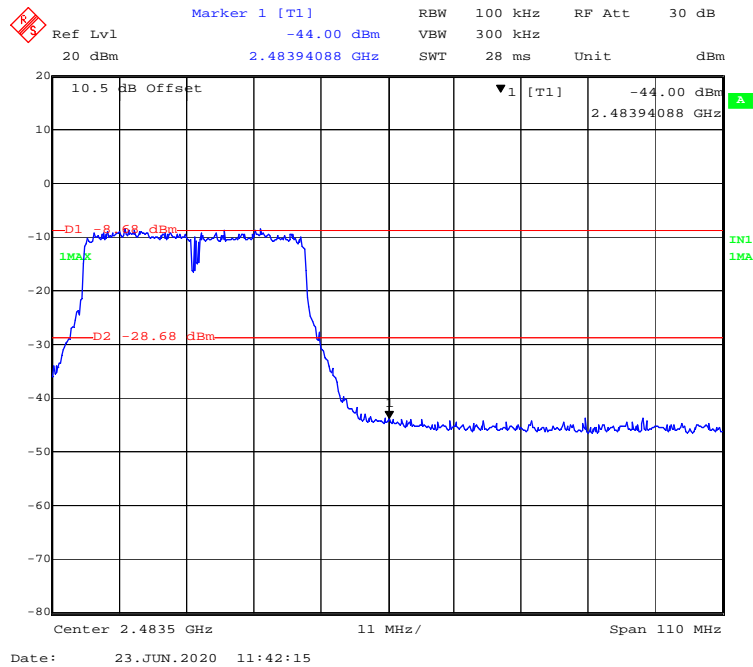

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine Compliant, and it is optional if the maximum conducted (average) output power was used to determine Compliant:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Jack Jiao on 2020-06-23.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-14.25	≤8.0
Middle	2437	-14.11	≤8.0
High	2462	-14.38	≤8.0
802.11g mode			
Low	2412	-19.25	≤8.0
Middle	2437	-19.48	≤8.0
High	2462	-18.48	≤8.0
802.11n-HT20 mode			
Low	2412	-19.06	≤8.0
Middle	2437	-18.84	≤8.0
High	2462	-19.30	≤8.0
802.11n-HT40 mode			
Low	2422	-20.57	≤8.0
Middle	2437	-20.67	≤8.0
High	2452	-21.59	≤8.0


802.11b Mode Low Channel

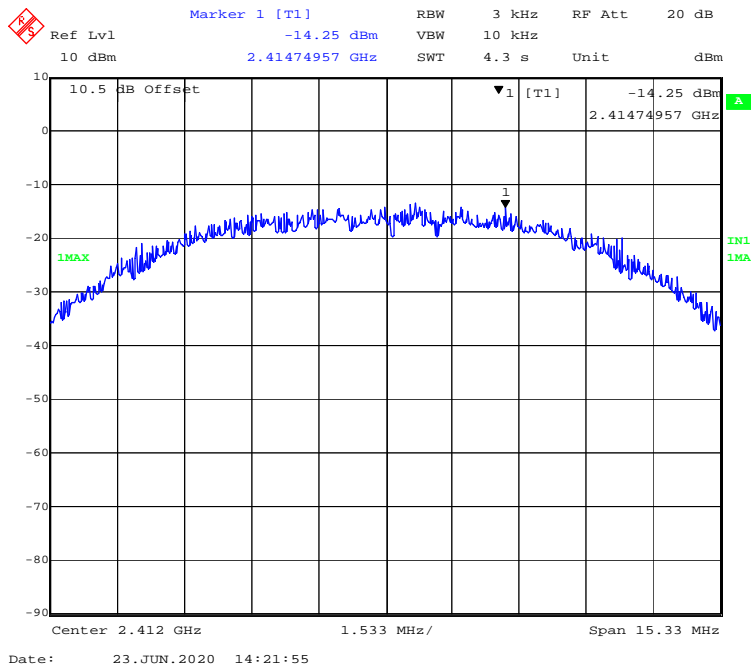


802.11b Mode Middle Channel

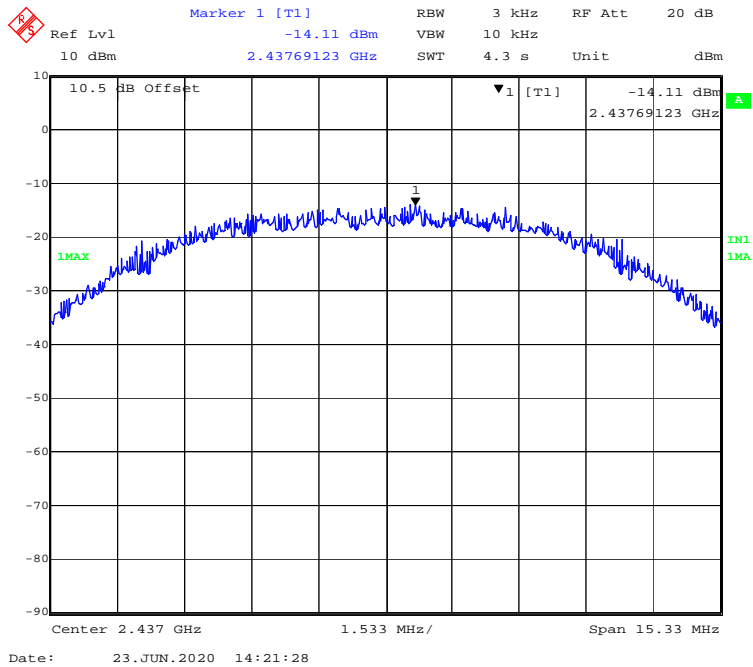


802.11b Mode High Channel

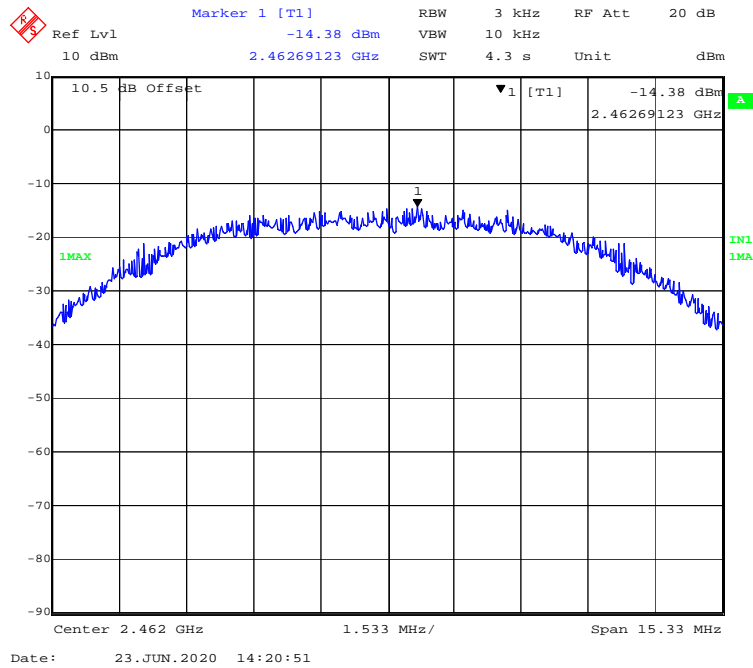


802.11g Mode Low Channel

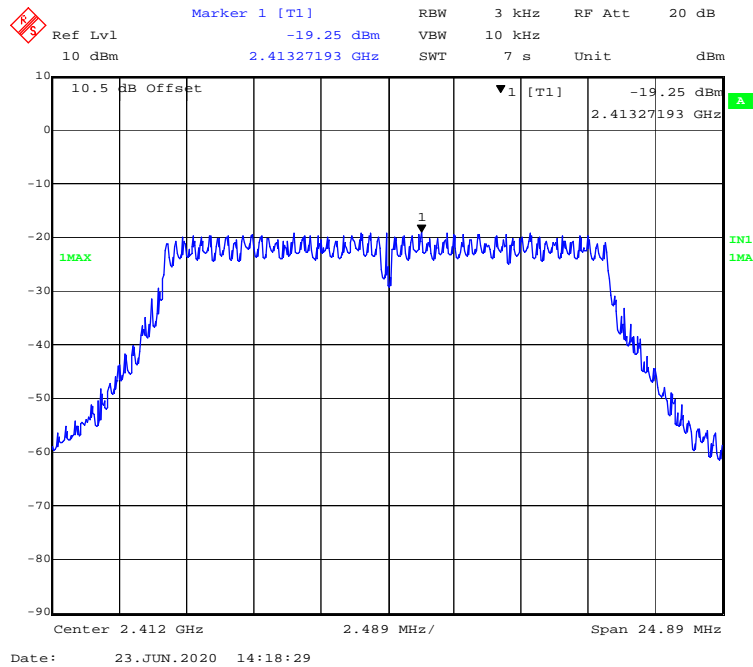


802.11g Mode Middle Channel

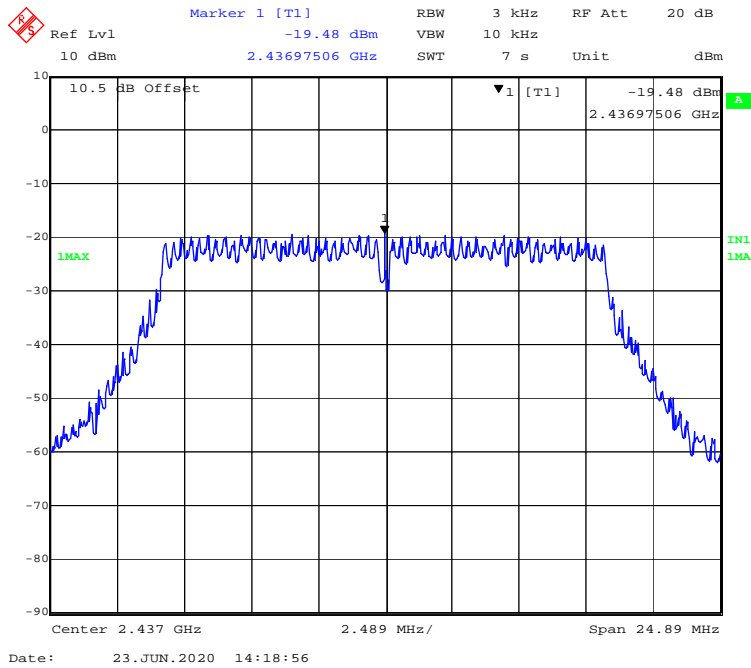


802.11g Mode High Channel

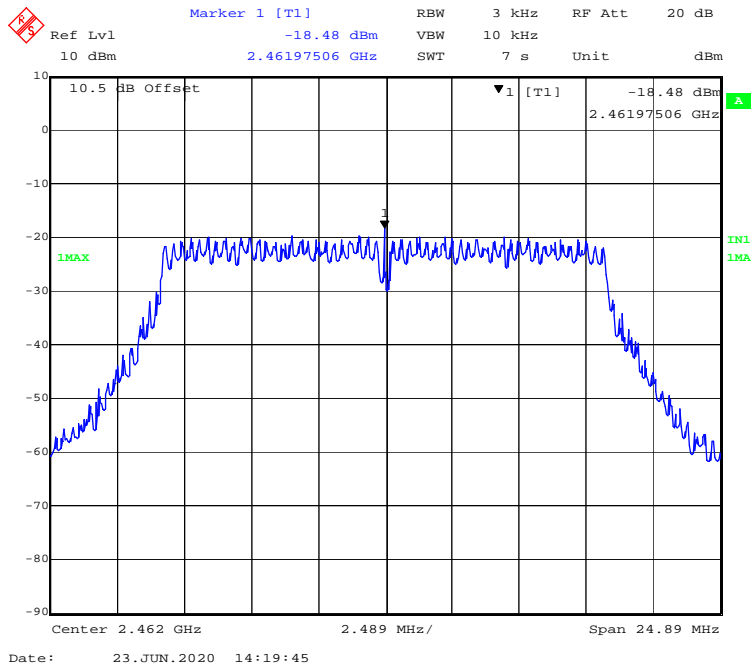


802.11n-HT20 Mode High Channel

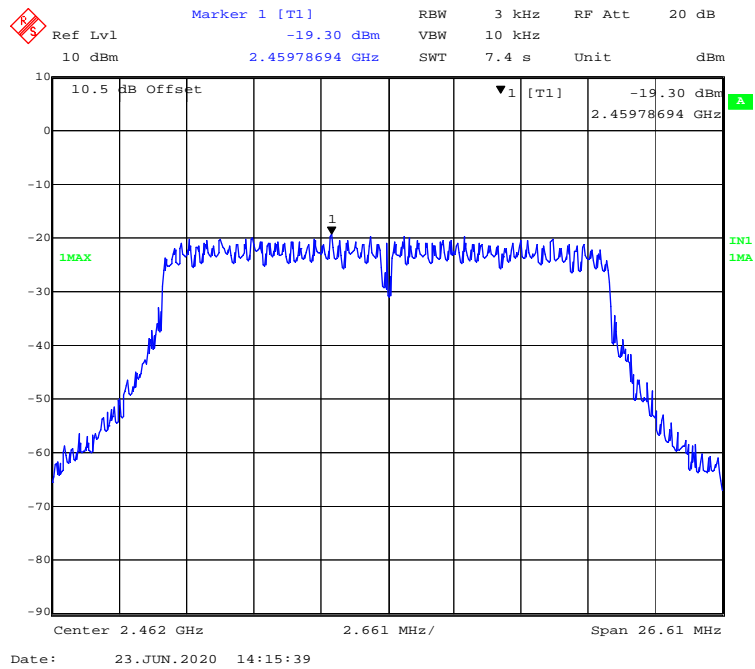


802.11n-HT40 Mode Low Channel

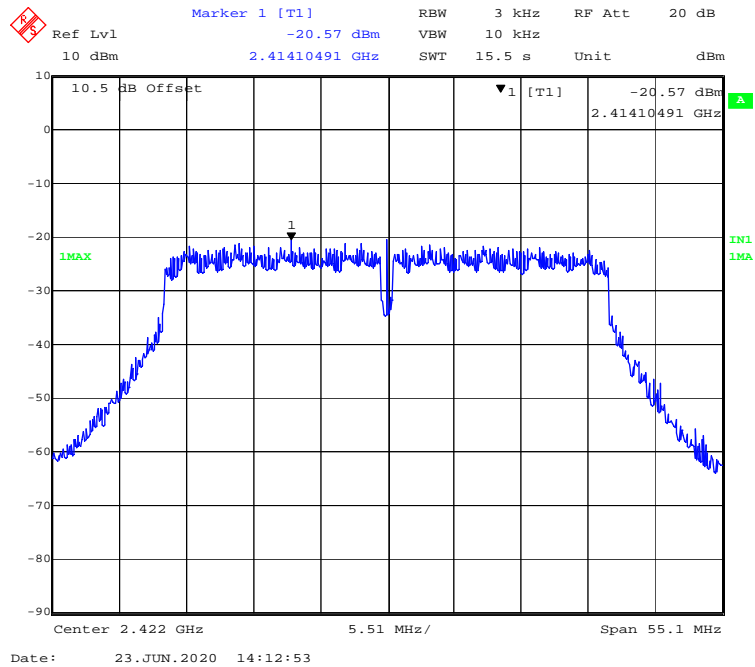

802.11n-HT40 Mode Middle Channel

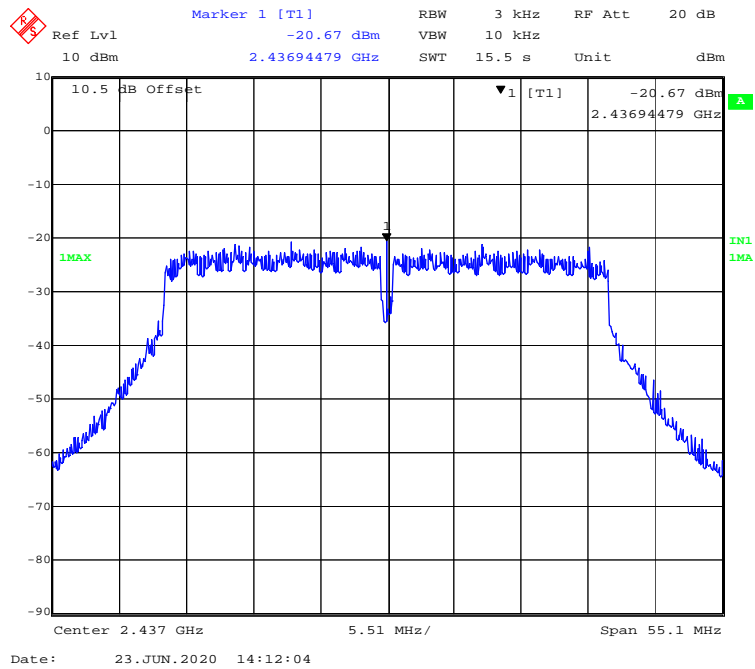

802.11n-HT40 Mode High Channel

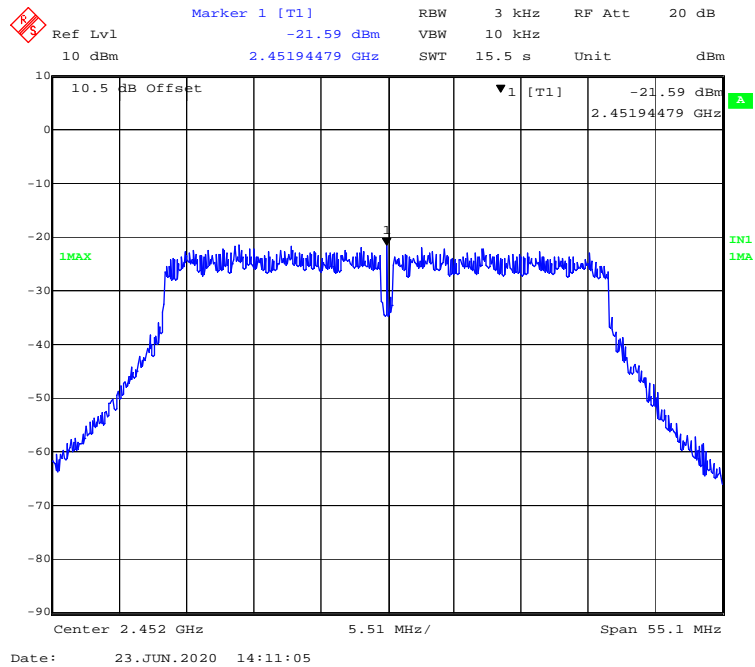

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******