



FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Shenzhen Digidragon Technology Co., Ltd

F02-3, Block 36, Dayun Software Town, Longgang District, Shenzhen, China.

FCC ID: 2AW7S706Z

Report Type: Original Report	Product Type: 3G Tablet
Report Number: RSZ200826563-00D	
Report Date: 2020-10-21	
Reviewed By: RF Engineer	<i>Nancy Wang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
BLOCK DIAGRAM OF TEST SETUP.....	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	9
APPLICABLE STANDARD.....	9
TEST RESULT.....	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	11
APPLICABLE STANDARD.....	11
TEST PROCEDURE.....	11
TEST DATA.....	11
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	18
APPLICABLE STANDARD.....	18
TEST PROCEDURE.....	18
TEST DATA.....	18
26 dB EMISSIONS & 99% OCCUPIED BANDWIDTH FOR RMC (BPSK) MODE, MIDDLE CHANNEL.....	23
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	33
APPLICABLE STANDARD.....	33
TEST PROCEDURE.....	33
TEST DATA.....	33
FCC § 2.1053; § 22.917 (A);§ 24.238 (A) -SPURIOUS RADIATED EMISSIONS	39
APPLICABLE STANDARD.....	39
TEST PROCEDURE.....	39
TEST DATA.....	39
FCC § 22.917 (A); § 24.238 (A) - BAND EDGES	44
APPLICABLE STANDARD.....	44
TEST PROCEDURE.....	44
TEST DATA.....	44
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY	53
APPLICABLE STANDARD.....	53
TEST PROCEDURE.....	53
TEST DATA.....	54

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	3G Tablet
Tested Model	706Z
Frequency Range	EGSM850/WCDMA850: 824-849 MHz (TX), 869-894 MHz (RX) PCS1900/WCDMA1900: 1850-1910 MHz (TX), 1930-1990 MHz (RX)
Conducted Average Power	EGSM850: 32.26dBm(GMSK) PCS1900: 29.18dBm(GMSK) WCDMA850: 21.17dBm WCDMA1900: 20.33dBm
Modulation Technique	2G: GMSK 3G: BPSK, QPSK, 16QAM
Antenna Specification*	FPC Antenna (provided by the applicant)
Voltage Range	DC 3.7 V from battery or DC 5.0V from adapter
Date of Test	2020-09-02 to 2020-10-21
Sample serial number	RSZ200826563-RF-S1(Assigned by BA CL, Shenzhen)
Received date	2020-08-26
Sample/EUT Status	Good condition
Adapter information	Model: 706Z Input: AC 100-240V, 50/60Hz, 0.2A MAX Output: 5.0V, 1.6A

Objective

This test report is in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.5dB
Unwanted Emission, conducted		±1.5dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3°C
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

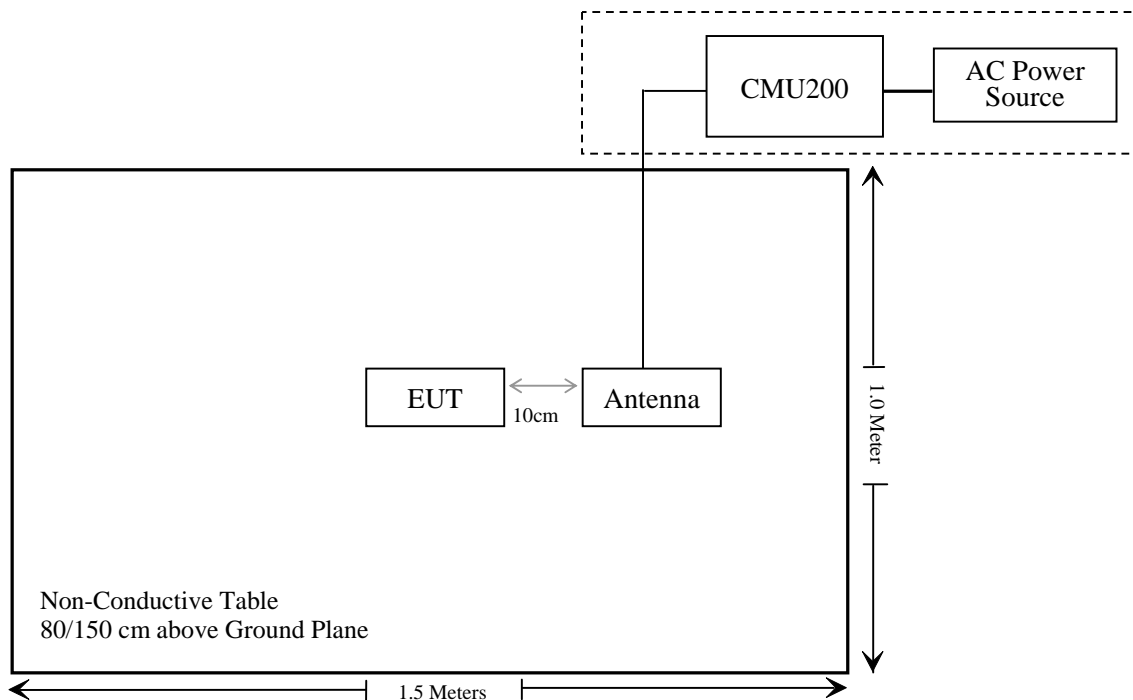

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ200826563-SA.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
COM-POWER	Dipole Antenna	AD-100	721027	NCR	NCR
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
A.H.System	Horn Antenna	SAS-200/571	135	2020/09/1	2021/08/31
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
MICRO-TRONICS	Passband filter	HPM50111	F-19-EM006	2020/04/20	2021/04/20
Unknown	High Pass filter	1.3GHz	101120	2020/04/20	2021/04/20
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2020/09/12	2021/09/11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2019/09/12	2020/09/11
Agilent	Signal Generator	N5183A	MY51040755	2019/12/04	2020/12/04

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/3/2	2021/3/1
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28
Weinschel	Power divider	1515	RH386	2020/4/20	2021/4/20
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2019/9/12	2020/9/11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2020/9/12	2021/9/11
ESPEC	Temperature & Humidity Chamber	EL-10KA	9107726	2020/01/05	2021/01/05
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2020/04/12	2021/04/12

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ200826563-SA.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



Radiated method:

ANSI C63.26-2015 section 5.5.3.

Test Data

Environmental Conditions

Temperature:	24~30 °C
Relative Humidity:	28~60 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang, Harris He and Leven Gan from 2020-09-02 to 2020-09-27

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.23	38.45
	190	836.6	32.26	38.45
	251	848.8	32.20	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.13	30.58	29.00	27.58	38.45
	190	836.6	32.10	30.52	29.02	27.67	38.45
	251	848.8	32.14	30.50	29.05	27.69	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	RMC		21.02	21.17	20.98
	HSDPA	1	20.31	19.88	20.01
		2	20.33	19.90	20.10
		3	20.36	19.85	20.13
		4	20.40	19.79	20.02
		5	20.27	19.87	20.03
	HSUPA	1	20.60	20.20	20.33
		2	20.55	20.26	20.32
		3	20.52	20.23	20.40
		4	20.63	20.23	20.42
		5	20.59	20.15	20.36

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.18	33
	661	1880.0	29.13	33
	810	1909.8	29.18	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.77	27.50	26.88	25.13	33
	661	1880.0	28.48	27.29	26.64	24.90	33
	810	1909.8	28.24	27.02	26.38	24.60	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	RMC		20.08	20.33	20.21
	HSDPA	1	19.22	19.19	19.00
		2	19.08	19.20	19.10
		3	19.26	19.32	19.08
		4	19.30	19.26	19.01
		5	19.32	19.05	19.12
	HSUPA	1	19.46	19.52	19.33
		2	19.52	19.58	19.39
		3	19.49	19.47	19.28
		4	19.38	19.66	19.26
		5	19.50	19.68	19.21

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.30	13
	Middle	1.30	13
	High	1.28	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.33	13
	Middle	3.59	13
	High	3.48	13
HSDPA (16QAM)	Low	3.22	13
	Middle	3.31	13
	High	3.33	13
HSUPA (BPSK)	Low	2.99	13
	Middle	3.12	13
	High	3.00	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	1.42	13
	Middle	1.29	13
	High	1.18	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.22	13
	Middle	3.18	13
	High	3.25	13
HSDPA (16QAM)	Low	2.92	13
	Middle	2.98	13
	High	3.07	13
HSUPA (BPSK)	Low	3.25	13
	Middle	2.99	13
	High	3.27	13

Radiated Power

GSM Mode:

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
ERP for Cellular Band (Part 22H), Low Channel										
824.2	91.37	97	1.9	H	32.0	1.90	0.0	30.10	38.45	8.35
824.2	90.24	342	2.0	V	30.2	1.90	0.0	28.30	38.45	10.15
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	91.75	317	1.9	H	32.4	1.90	0.0	30.50	38.45	7.95
836.6	91.26	295	2.1	V	31.3	1.90	0.0	29.40	38.45	9.05
ERP for Cellular Band (Part 22H), High Channel										
848.8	92.39	161	2.1	H	33.0	1.90	0.0	31.10	38.45	7.35
848.8	92.15	74	2.2	V	32.2	1.90	0.0	30.30	38.45	8.15
EIRP for PCS Band (Part 24E), Low Channel										
1850.20	90.78	122	1.4	H	21.1	1.30	9.40	29.20	33	3.80
1850.20	88.63	8	1.9	V	18.7	1.30	9.40	26.80	33	6.20
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	90.63	86	2.2	H	21.0	1.30	9.40	29.10	33	3.90
1880.00	87.35	173	1.5	V	17.5	1.30	9.40	25.60	33	7.40
EIRP for PCS Band (Part 24E), High Channel										
1909.80	90.49	212	2.1	H	20.8	1.30	9.40	28.90	33	4.10
1909.80	87.46	319	2.4	V	17.6	1.30	9.40	25.70	33	7.30

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
ERP for WCDMA Band V (Part 22H), Low Channel										
826.4	80.49	213	1.5	H	21.1	1.90	0.0	19.20	38.45	19.25
826.4	79.61	137	1.2	V	19.6	1.90	0.0	17.70	38.45	20.75
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	80.53	249	2.3	H	21.2	1.90	0.0	19.30	38.45	19.15
836.6	79.25	170	1.9	V	19.3	1.90	0.0	17.40	38.45	21.05
ERP for WCDMA Band V (Part 22H), High Channel										
846.6	81.45	127	1.7	H	22.1	1.90	0.0	20.20	38.45	18.25
846.6	80.27	62	1.8	V	20.3	1.90	0.0	18.40	38.45	20.05
EIRP for WCDMA Band II (Part 24E), Low Channel										
1852.40	82.05	23	2.1	H	12.4	1.30	9.40	20.50	33	12.50
1852.40	79.92	80	2.4	V	10.0	1.30	9.40	18.10	33	14.90
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	82.23	144	2.0	H	12.6	1.30	9.40	20.70	33	12.30
1880.00	80.12	77	2.2	V	10.2	1.30	9.40	18.30	33	14.70
EIRP for WCDMA Band II (Part 24E), High Channel										
1907.60	81.96	92	1.7	H	12.3	1.30	9.40	20.40	33	12.60
1907.60	80.03	117	2.0	V	10.1	1.30	9.40	18.20	33	14.80

Note:

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

dBd is for the ERP, dBi is for EIRP.

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (GSM) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

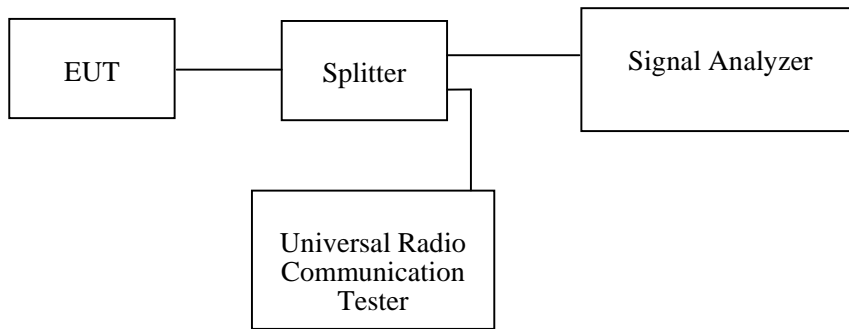

Test Data

Environmental Conditions

Temperature:	24~25°C
Relative Humidity:	20~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang from 2020-09-06 to 2020-10-13.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	824.2	245.19	315.71
	836.6	243.59	312.82
	848.8	243.59	311.86

	Frequency (MHz)	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
RCM	826.4	4.167	4.679
	836.6	4.135	4.657
	846.6	4.118	4.657
HSDPA	826.4	4.135	4.696
	836.6	4.167	4.696
	846.6	4.119	4.657
HSUPA	826.4	4.135	4.702
	836.6	4.134	4.702
	846.6	4.119	4.679


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1850.2	241.99	313.78
	1880.0	245.19	312.82
	1909.8	245.19	312.82

	Frequency (MHz)	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
RCM	1.8524	4.167	4.718
	1880.0	4.151	1.878
	1.9076	4.167	4.696
HSDPA	1.8524	4.183	4.702
	1880.0	4.151	4.702
	1.9076	4.151	4.696
HSUPA	1.8524	4.183	4.772
	1880.0	4.151	4.676
	1.9076	4.151	4.696


Cellular Band (Part 22H)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Low Channel

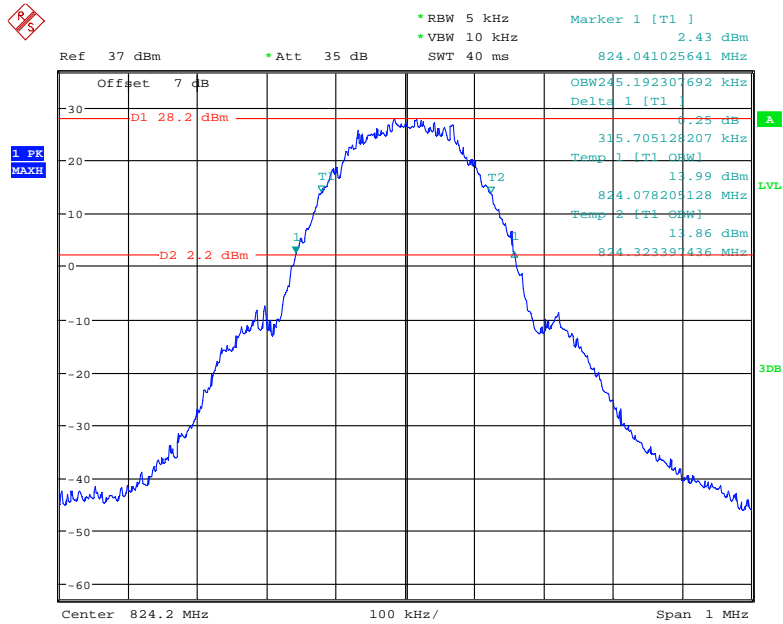


Date: 6.SEP.2020 11:47:30

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle Channel

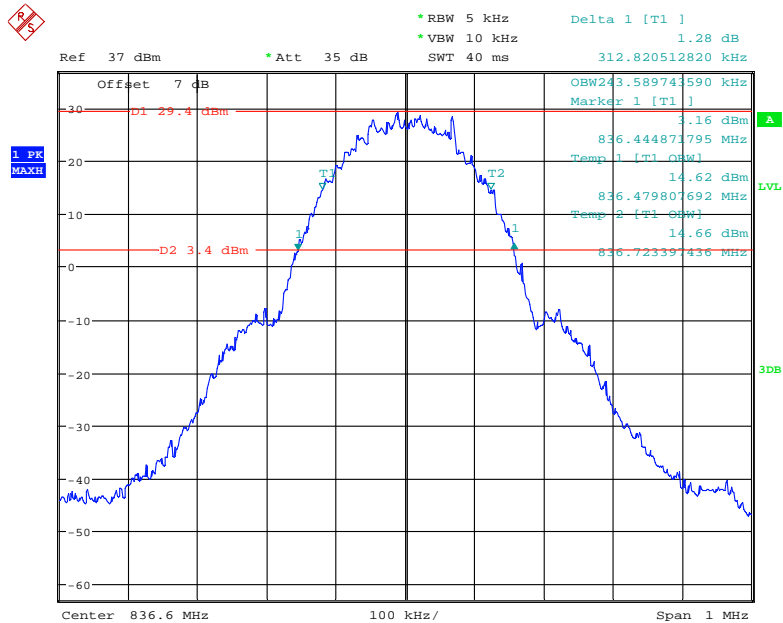


Date: 6.SEP.2020 11:40:15

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High Channel

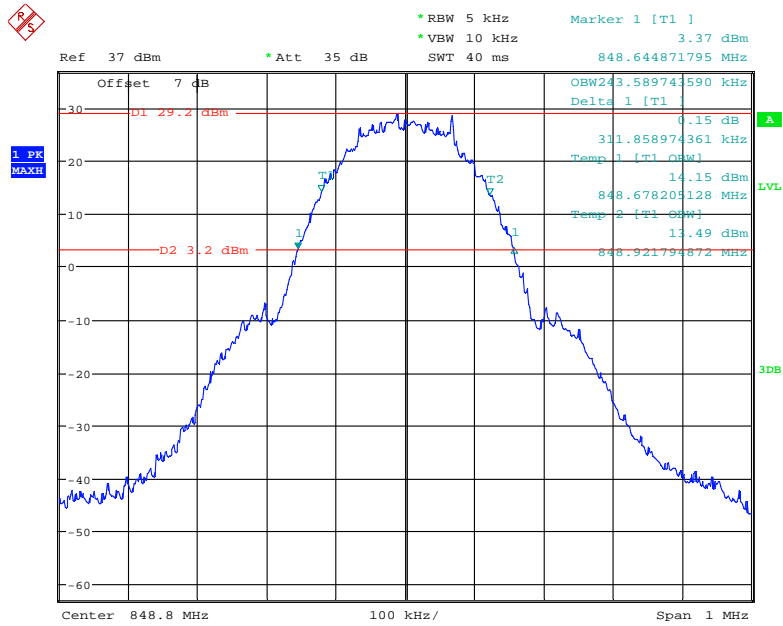


Date: 6.SEP.2020 11:43:33

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Low Channel

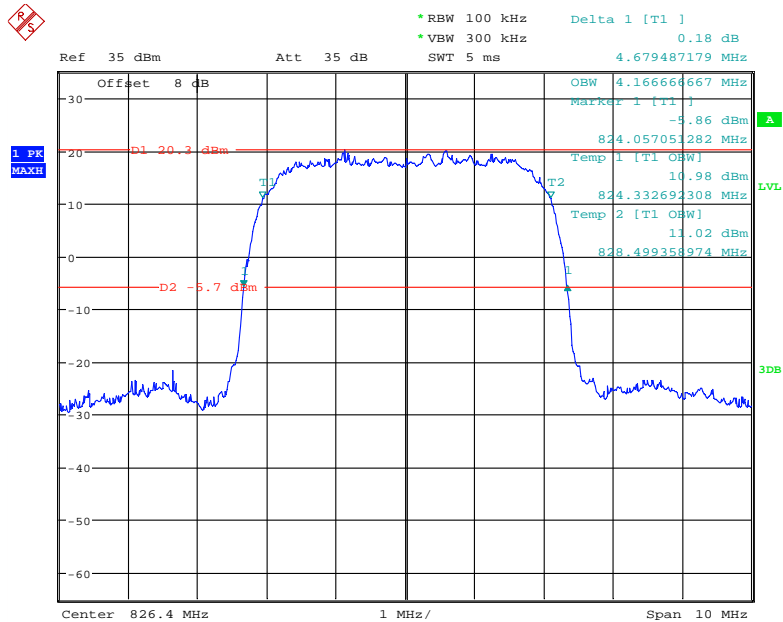


Date: 13.OCT.2020 13:05:00

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Middle Channel

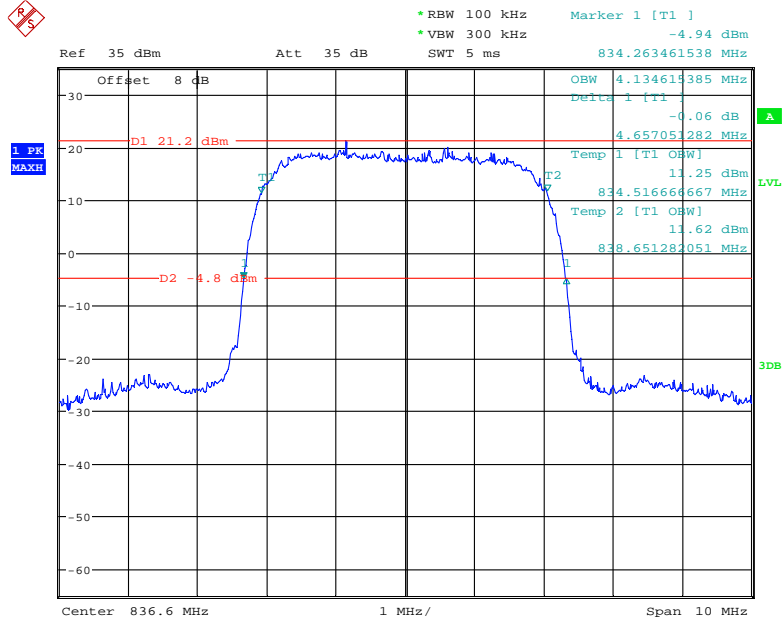


Date: 13.OCT.2020 13:12:49

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, High Channel

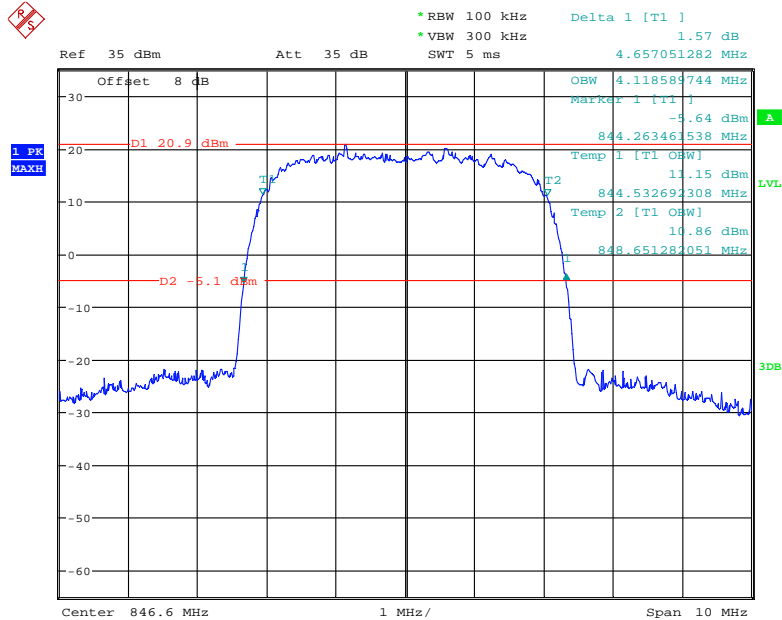


Date: 13.OCT.2020 13:08:47

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Low Channel

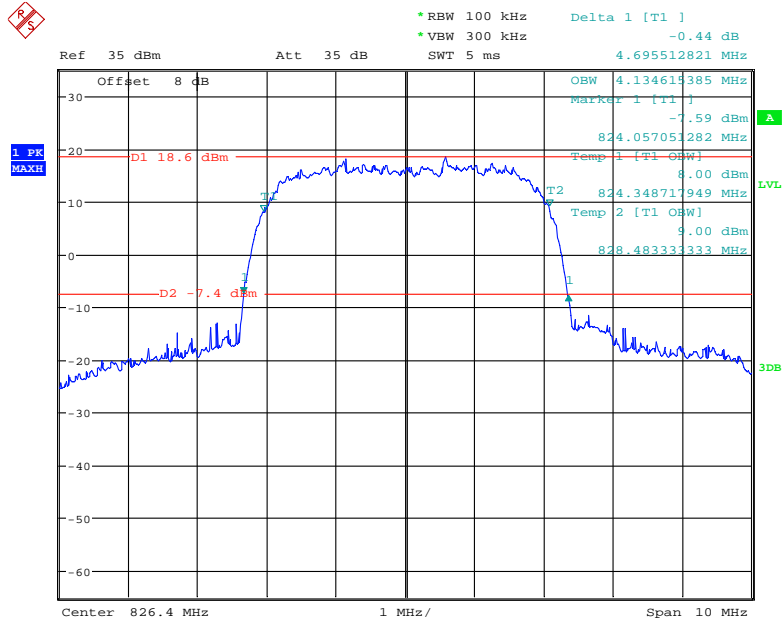


Date: 13.OCT.2020 12:42:45

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode Middle Channel

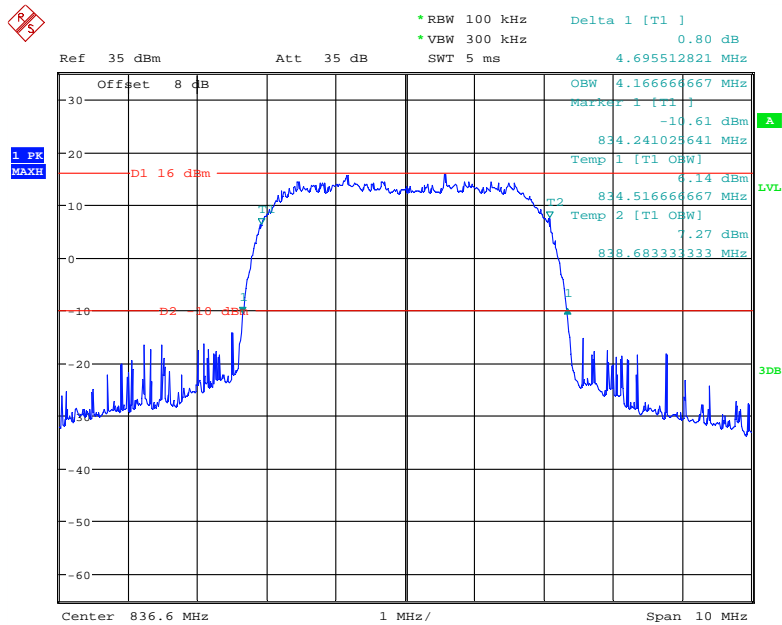


Date: 13.OCT.2020 12:44:37

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, High Channel

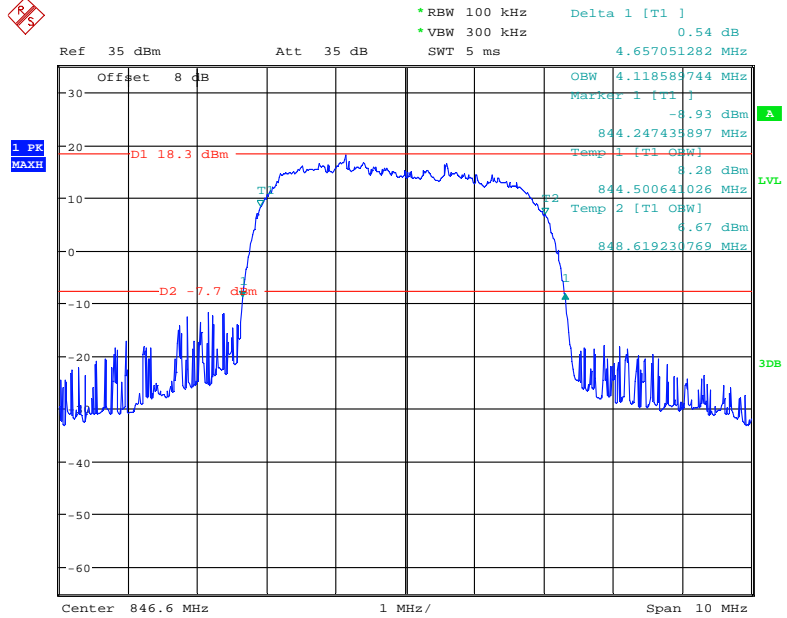


Date: 13.OCT.2020 12:46:49

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Low Channel

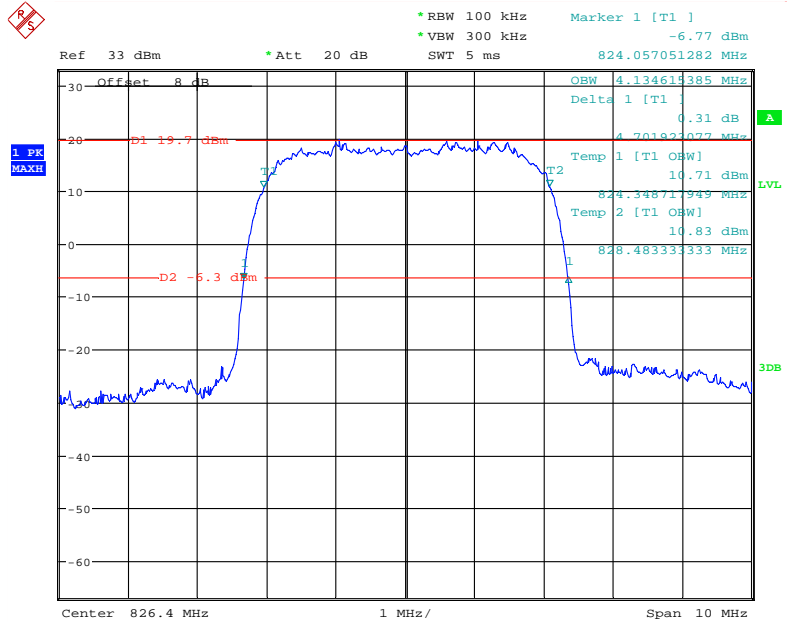


Date: 13.OCT.2020 09:11:27

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Middle Channel

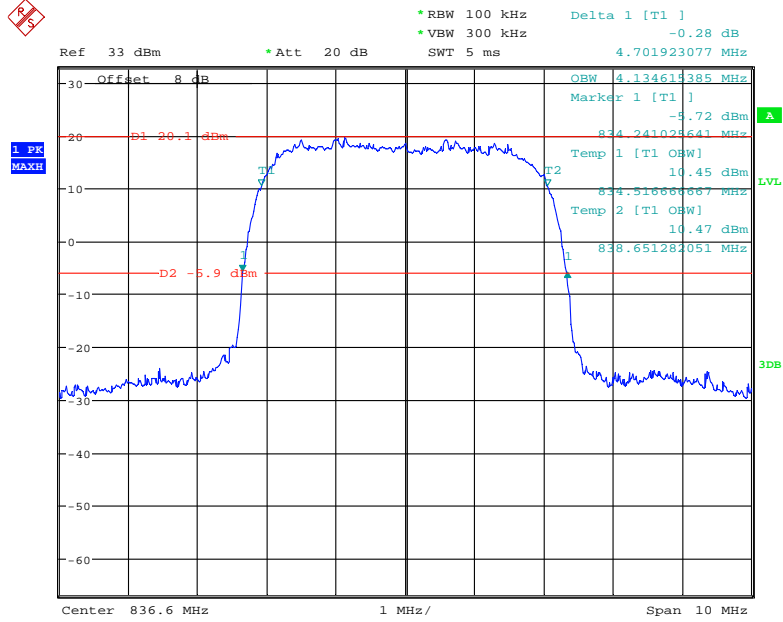

Date: 13.OCT.2020 09:08:47


26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, High Channel

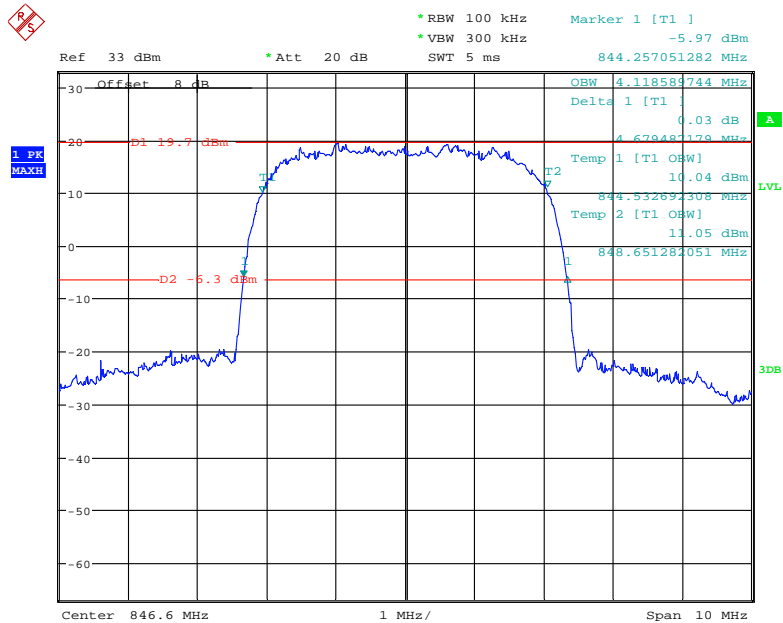

Date: 13.OCT.2020 09:12:36


PCS Band (Part 24E)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Low Channel

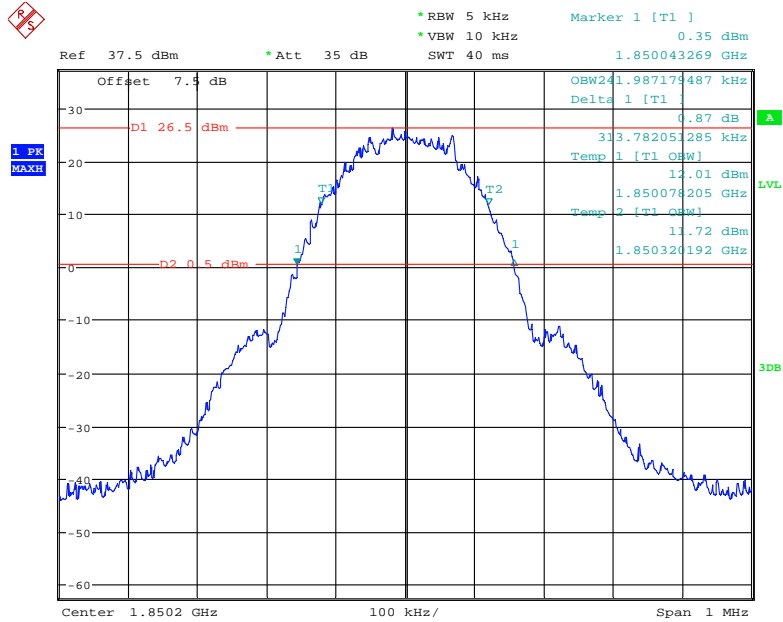


Date: 6.SEP.2020 11:01:47

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle Channel

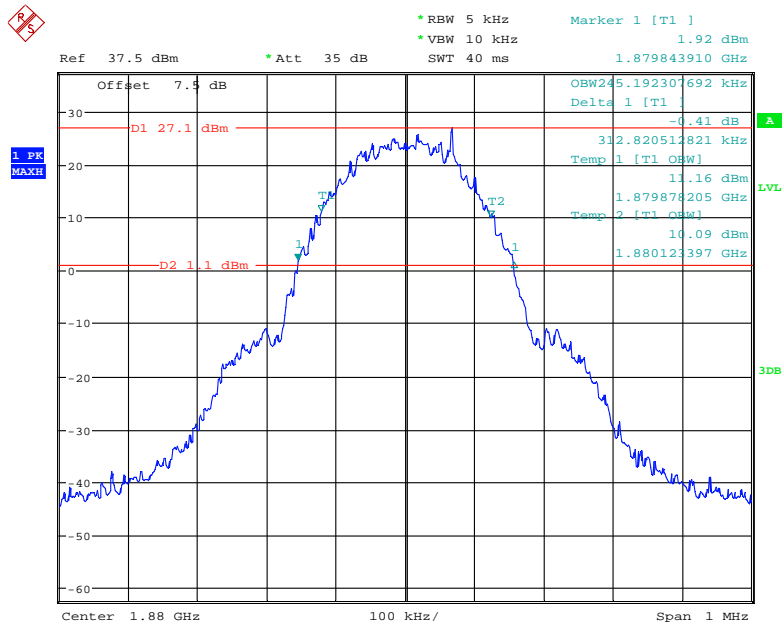


Date: 6.SEP.2020 11:03:34

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High Channel

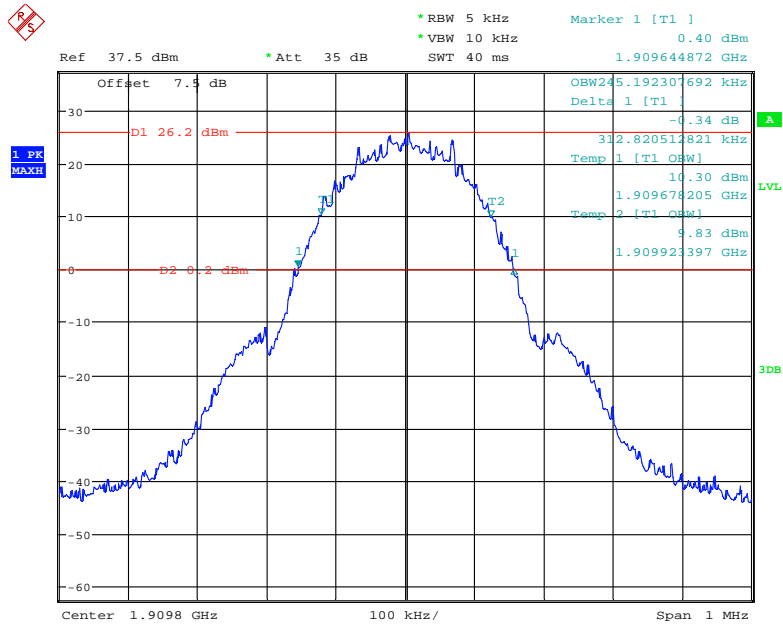


Date: 6.SEP.2020 11:05:24

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Low Channel

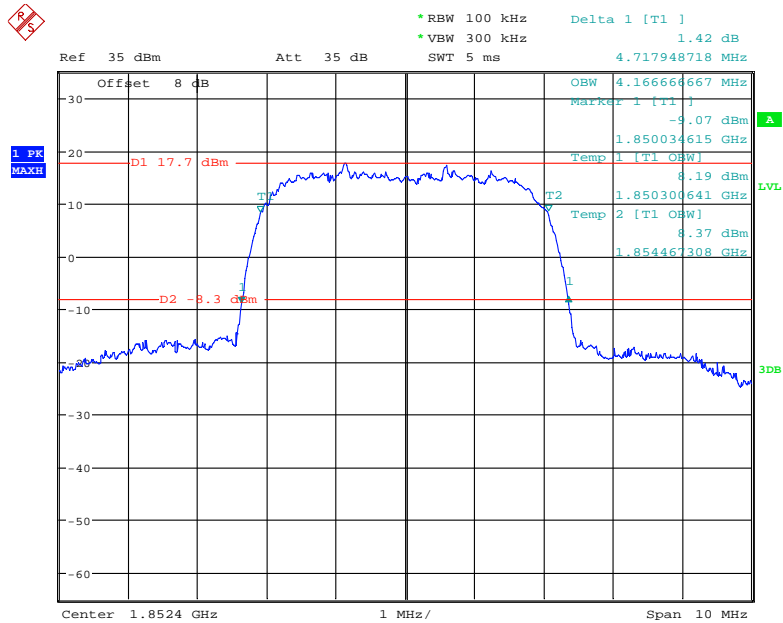


Date: 13.OCT.2020 13:00:55

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, Middle Channel

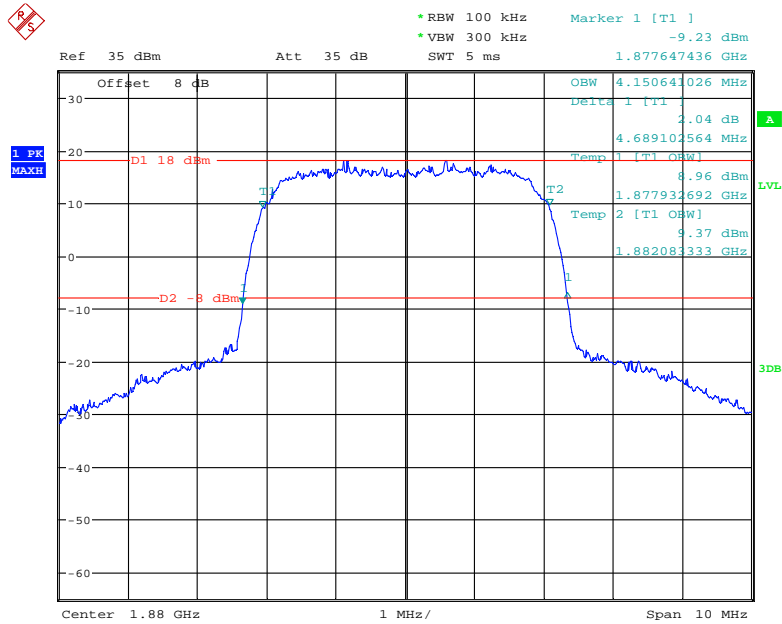


Date: 13.OCT.2020 13:02:16

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode, High Channel

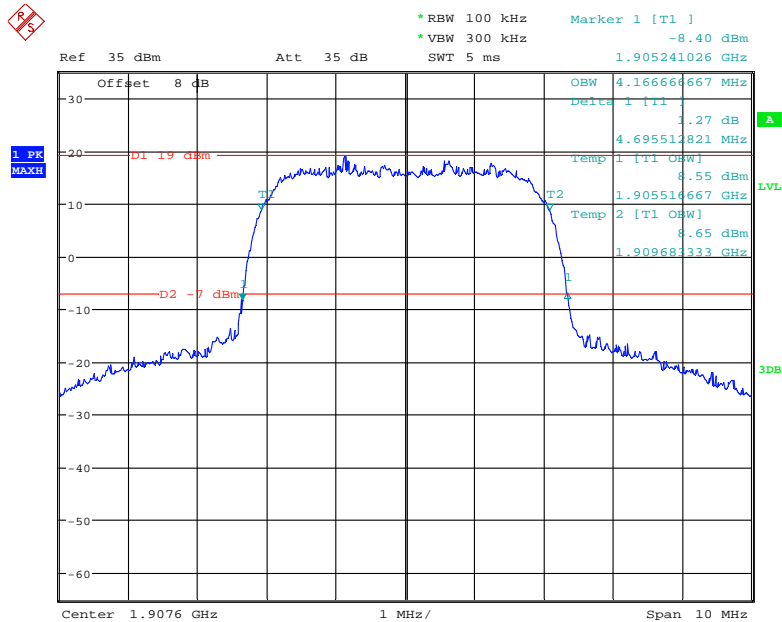


Date: 13.OCT.2020 13:03:28

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, Low Channel

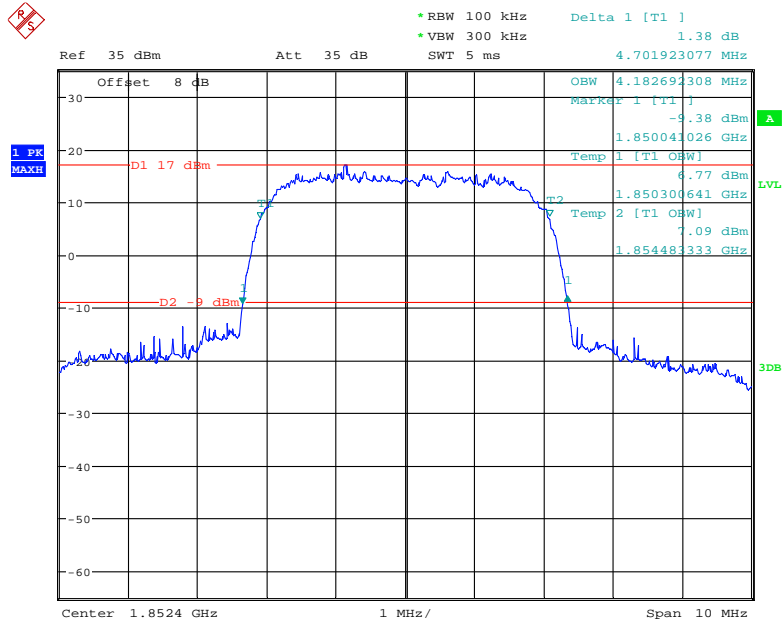


Date: 13.OCT.2020 13:19:31

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode Middle Channel

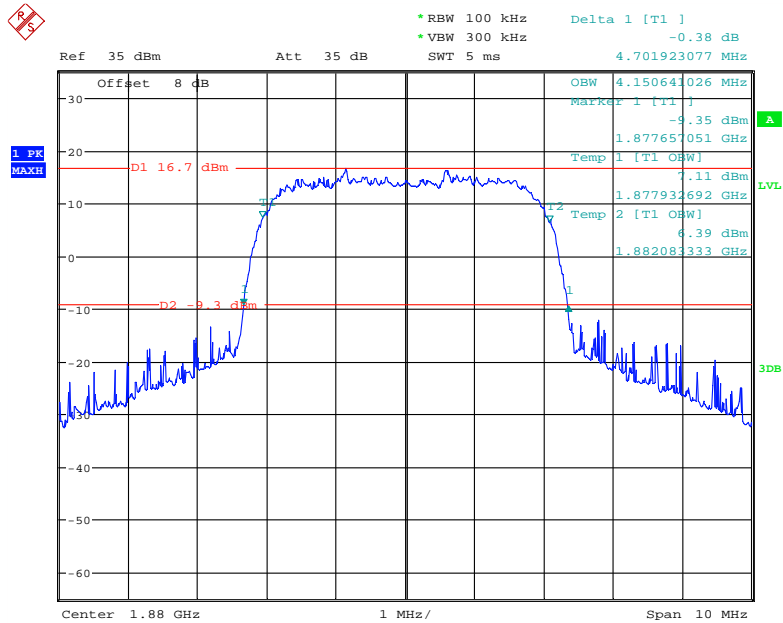


Date: 13.OCT.2020 12:38:21

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode, High Channel

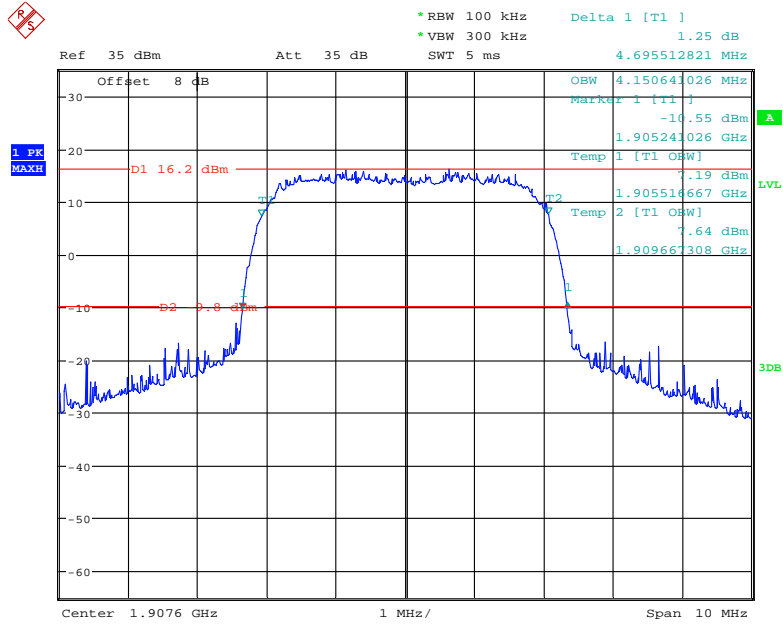


Date: 13.OCT.2020 13:16:49

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Low Channel

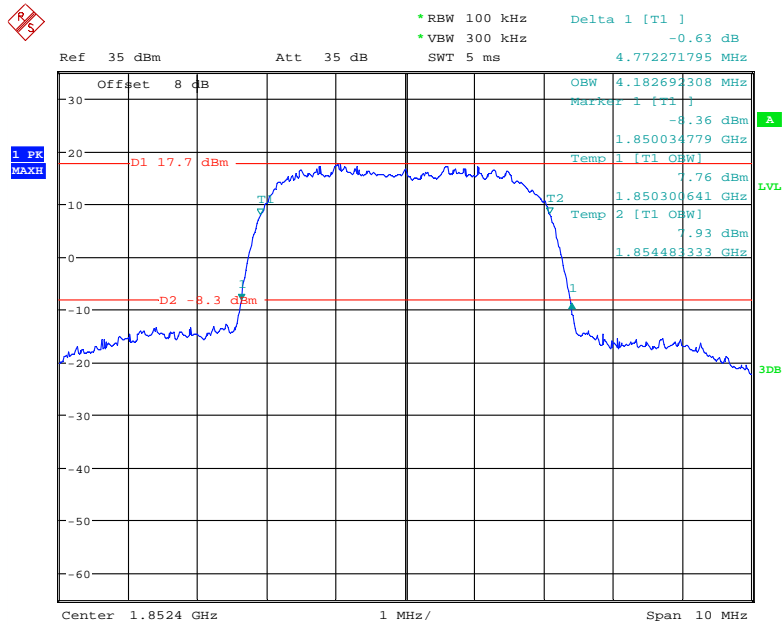


Date: 13.OCT.2020 12:22:56

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, Middle Channel

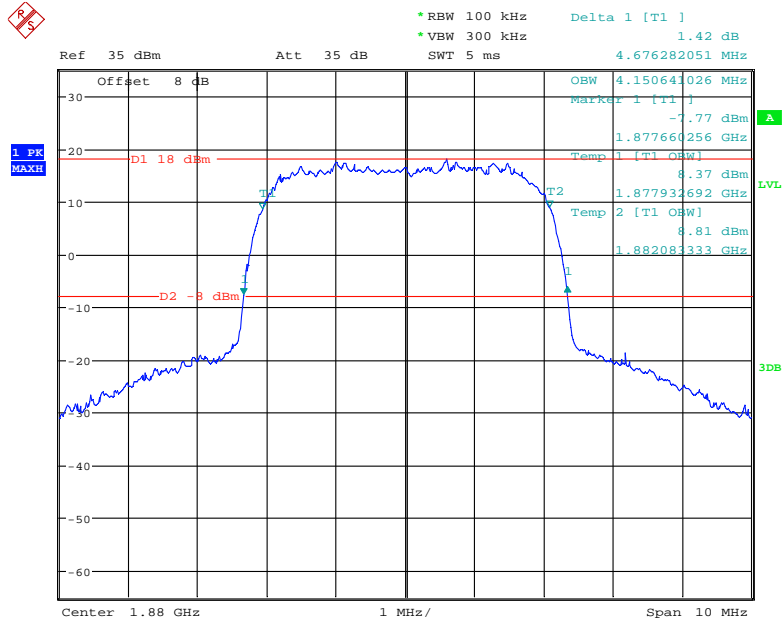

Date: 13.OCT.2020 12:25:45

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode, High Channel

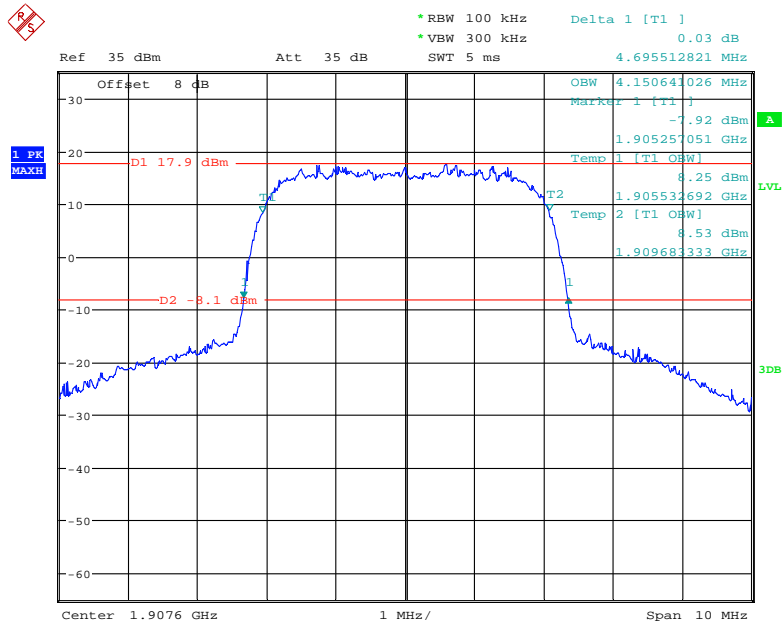

Date: 13.OCT.2020 12:26:57

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

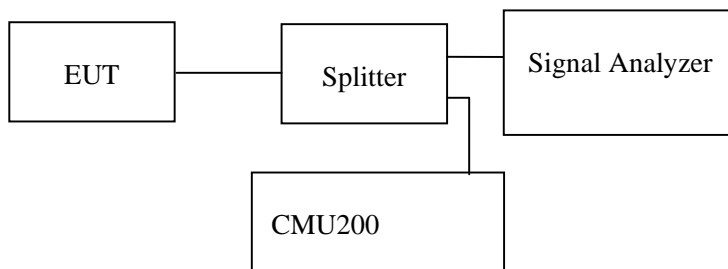

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang on 2020-09-06.

EUT operation mode: Transmitting


Test result: Pass

Pre-scan with Low, Middle and High channel, the worst case is middle channel as below:

Test result: Compliance, please refer to the following plots.


Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode) Middle Channel

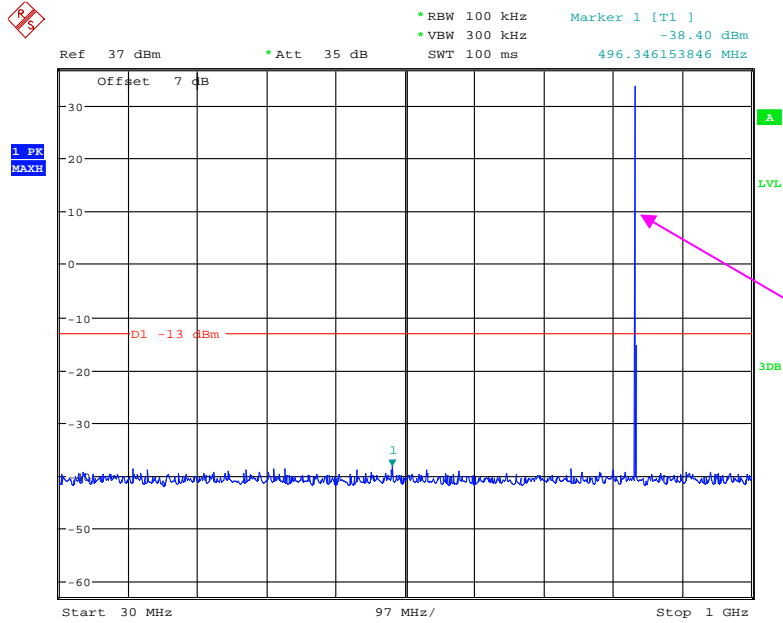


Date: 6.SEP.2020 10:44:49

1 GHz – 10 GHz (GSM Mode) Middle Channel

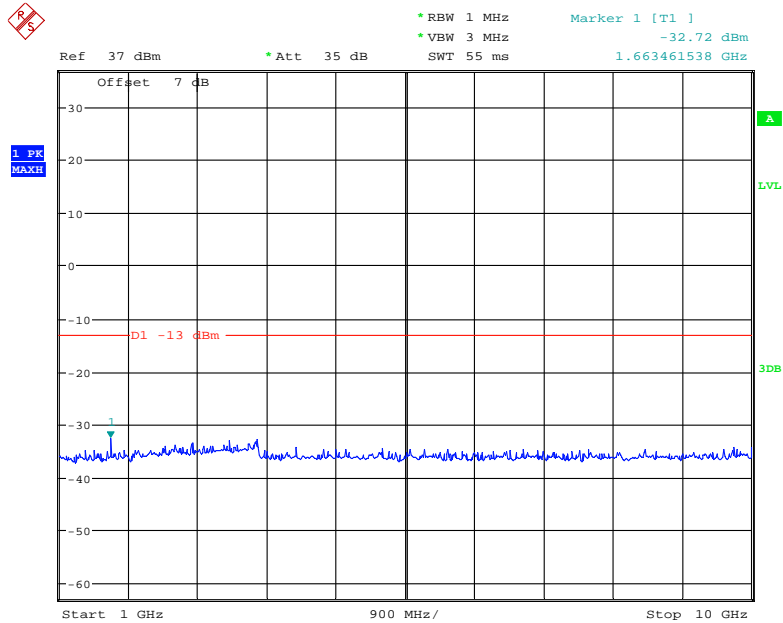


Date: 6.SEP.2020 10:47:48

30 MHz – 1 GHz (WCDMA Mode) Middle Channel

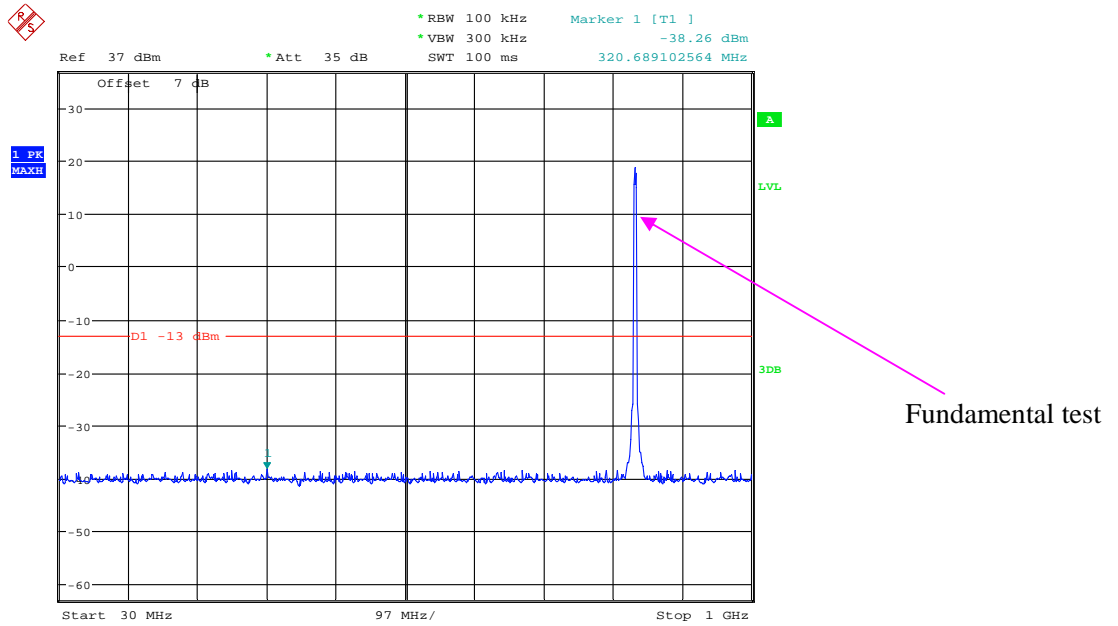

Date: 6.SEP.2020 13:17:21


1 GHz – 10 GHz (WCDMA Mode) Middle Channel

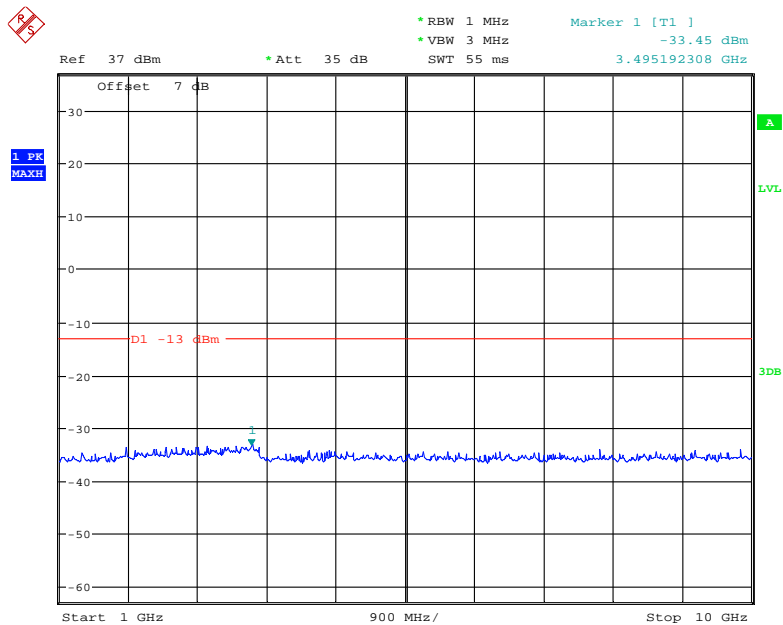

Date: 6.SEP.2020 13:19:35


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

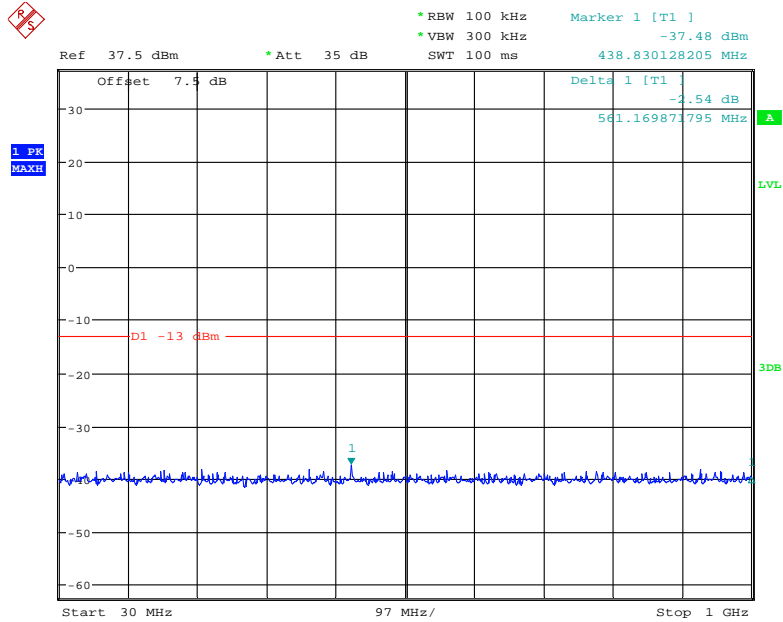


Date: 6.SEP.2020 11:09:17

1 GHz – 2 GHz (GSM Mode)

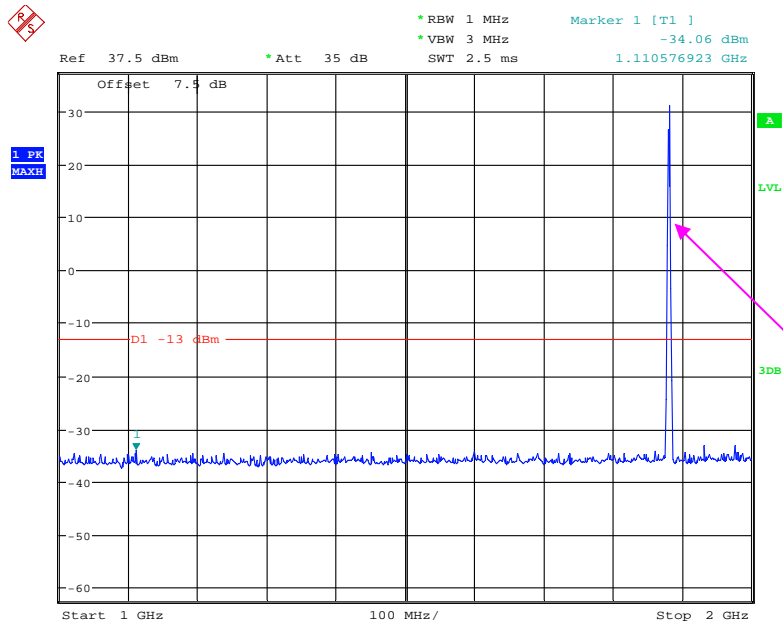


Date: 6.SEP.2020 11:10:29

2 GHz – 20 GHz (GSM Mode)

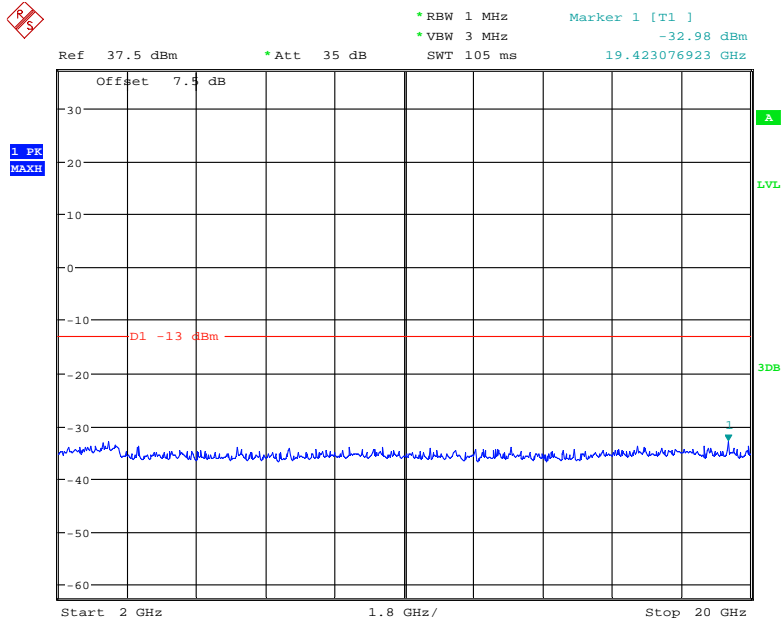


Date: 6.SEP.2020 11:29:00

30 MHz – 1 GHz (WCDMA Mode) Middle Channel

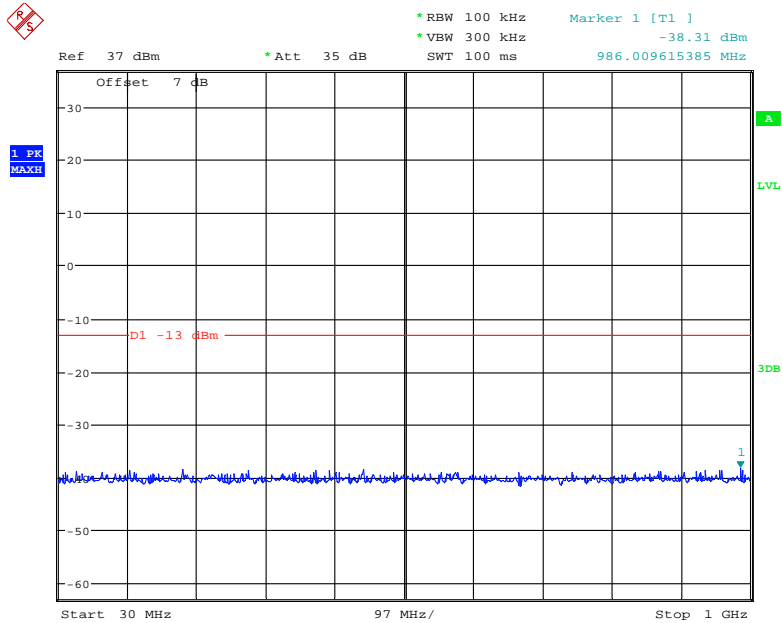


Date: 6.SEP.2020 13:24:03

1 GHz – 2 GHz (WCDMA Mode)

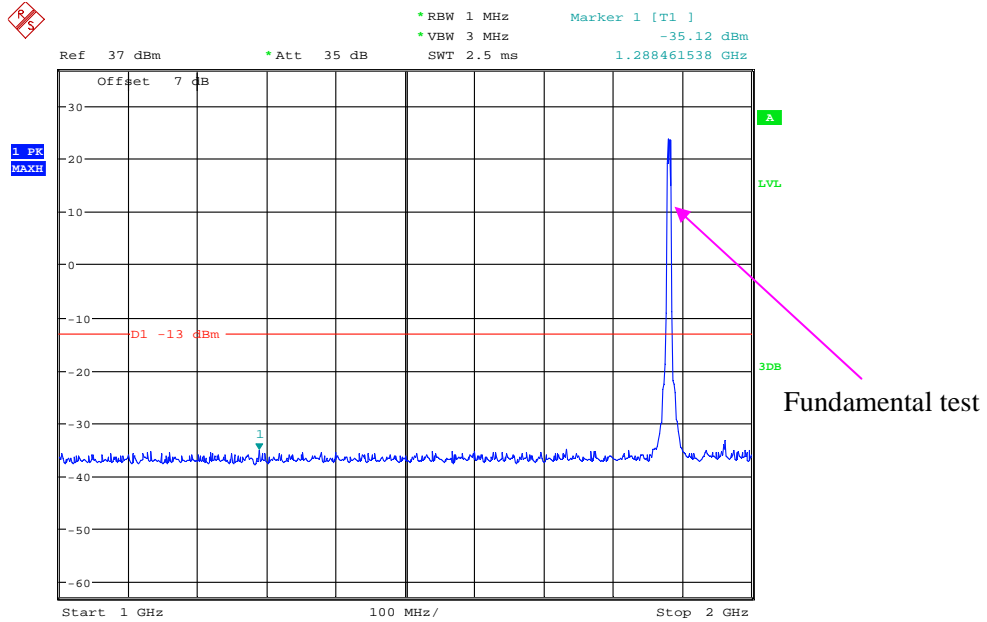

Date: 6.SEP.2020 13:25:05

2 GHz – 20 GHz (WCDMA Mode)

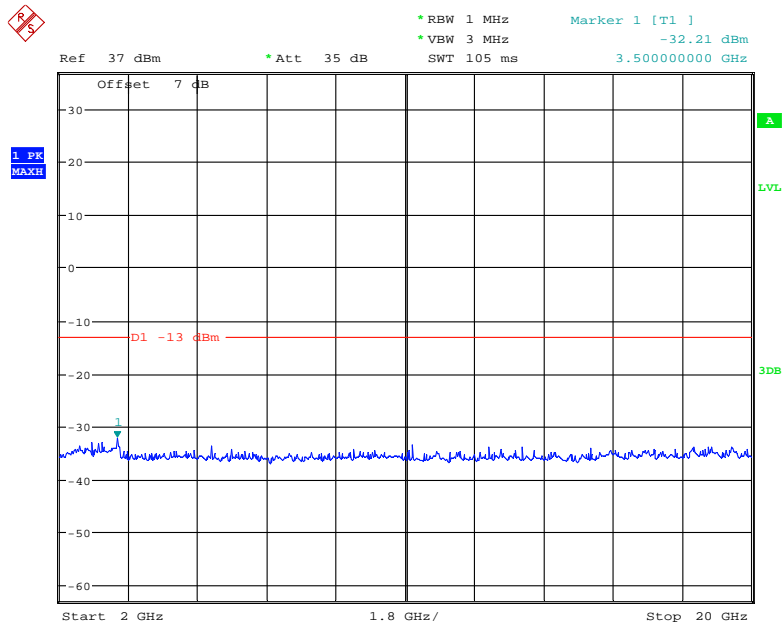

Date: 6.SEP.2020 13:26:44

FCC § 2.1053; § 22.917 (a);§ 24.238 (a) -SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC § 2.1053, §22.917(a) and § 24.238(a).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Harris He on 2020-09-21 for below 1GHz and by Leven Gan on 2020-09-02 for above 1GHz.

EUT operation mode: Transmitting

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Low channel										
959.4	37.56	112	2.2	H	-63.0	1.37	0.0	-64.37	-13	51.37
959.4	38.34	197	1.8	V	-61.0	1.37	0.0	-62.37	-13	49.37
1648.40	58.52	55	1.7	H	-49.6	1.40	8.70	-42.30	-13	29.30
1648.40	54.14	255	1.8	V	-53.7	1.40	8.70	-46.40	-13	33.40
2472.60	52.97	188	1.1	H	-50.4	2.60	10.20	-42.80	-13	29.80
2472.60	53.28	205	1.2	V	-49.5	2.60	10.20	-41.90	-13	28.90
3296.80	49.18	83	2.1	H	-51.7	1.50	11.70	-41.50	-13	28.50
3296.80	49.66	5	2.4	V	-51.3	1.50	11.70	-41.10	-13	28.10
GSM Mode, Middle channel										
963.5	37.69	91	1.8	H	-62.9	1.37	0.0	-64.27	-13	51.27
963.5	38.44	154	1.8	V	-60.9	1.37	0.0	-62.27	-13	49.27
1673.20	58.78	211	2.2	H	-47.6	1.30	8.90	-40.00	-13	27.00
1673.20	54.24	240	2.4	V	-51.5	1.30	8.90	-43.90	-13	30.90
2509.80	53.05	126	2.4	H	-50.3	2.60	10.20	-42.70	-13	29.70
2509.80	53.36	176	2.2	V	-49.4	2.60	10.20	-41.80	-13	28.80
3346.40	49.37	222	2.1	H	-51.5	1.50	11.70	-41.30	-13	28.30
3346.40	49.72	120	1.7	V	-51.2	1.50	11.70	-41.00	-13	28.00
GSM Mode, High channel										
966.8	37.81	133	2.1	H	-62.8	1.37	0.0	-64.17	-13	51.17
966.8	38.65	230	1.9	V	-60.7	1.37	0.0	-62.07	-13	49.07
1697.60	58.40	121	1.6	H	-47.9	1.30	8.90	-40.30	-13	27.30
1697.60	54.74	278	1.6	V	-51.0	1.30	8.90	-43.40	-13	30.40
2546.40	53.04	270	2.5	H	-50.3	2.60	10.20	-42.70	-13	29.70
2546.40	53.41	192	2.3	V	-49.3	2.60	10.20	-41.70	-13	28.70
3395.20	49.54	158	1.3	H	-51.7	1.40	11.80	-41.30	-13	28.30
3395.20	50.03	344	2.2	V	-51.0	1.40	11.80	-40.60	-13	27.60

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Low channel										
967.6	37.42	316	1.8	H	-63.2	1.37	0.0	-64.57	-13	51.57
967.6	38.24	319	2.4	V	-61.1	1.37	0.0	-62.47	-13	49.47
1652.80	57.83	107	1.7	H	-48.5	1.30	8.90	-40.90	-13	27.90
1652.80	58.74	34	1.9	V	-47.0	1.30	8.90	-39.40	-13	26.40
2479.20	45.16	254	1.9	H	-58.2	2.60	10.20	-50.60	-13	37.60
2479.20	48.59	180	1.3	V	-54.2	2.60	10.20	-46.60	-13	33.60
3305.60	46.98	21	1.9	H	-53.9	1.50	11.70	-43.70	-13	30.70
3305.60	52.80	33	2.0	V	-48.1	1.50	11.70	-37.90	-13	24.90
WCDMA Mode, Middle channel										
963.5	37.92	351	1.2	H	-62.7	1.37	0.0	-64.07	-13	51.07
963.5	38.71	150	2.0	V	-60.6	1.37	0.0	-61.97	-13	48.97
1673.20	53.30	165	1.3	H	-53.0	1.30	8.90	-45.40	-13	32.40
1673.20	56.65	142	1.4	V	-49.1	1.30	8.90	-41.50	-13	28.50
2509.80	44.27	55	1.0	H	-59.1	2.60	10.20	-51.50	-13	38.50
2509.80	46.75	291	2.1	V	-56.0	2.60	10.20	-48.40	-13	35.40
3346.40	45.03	206	1.7	H	-55.9	1.50	11.70	-45.70	-13	32.70
3346.40	49.57	72	1.4	V	-51.4	1.50	11.70	-41.20	-13	28.20
WCDMA Mode, High channel										
960.1	37.48	177	1.9	H	-63.1	1.37	0.0	-64.47	-13	51.47
960.1	38.65	114	2.0	V	-60.7	1.37	0.0	-62.07	-13	49.07
1693.20	53.92	83	1.6	H	-52.4	1.30	8.90	-44.80	-13	31.80
1693.20	55.45	275	2.5	V	-50.3	1.30	8.90	-42.70	-13	29.70
2539.80	43.90	353	2.0	H	-59.5	2.60	10.20	-51.90	-13	38.90
2539.80	45.65	42	2.5	V	-57.1	2.60	10.20	-49.50	-13	36.50
3386.40	45.77	165	1.7	H	-55.5	1.40	11.80	-45.10	-13	32.10
3386.40	47.96	88	1.5	V	-53.1	1.40	11.80	-42.70	-13	29.70

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Low channel										
954.8	37.69	348	2.5	H	-62.9	1.37	0.0	-64.27	-13	51.27
954.8	38.55	208	2.3	V	-60.8	1.37	0.0	-62.17	-13	49.17
3700.40	51.57	220	1.4	H	-50.2	1.60	11.90	-39.90	-13	26.90
3700.40	57.98	55	2.1	V	-43.2	1.60	11.90	-32.90	-13	19.90
5550.60	51.08	291	1.5	H	-48.6	1.70	12.40	-37.90	-13	24.90
5550.60	52.34	243	1.7	V	-47.0	1.70	12.40	-36.30	-13	23.30
GSM Mode, Middle channel										
955.9	37.38	166	2.4	H	-63.2	1.37	0.0	-64.57	-13	51.57
955.9	38.26	48	1.9	V	-61.1	1.37	0.0	-62.47	-13	49.47
3760.00	52.10	159	1.4	H	-50.0	1.50	11.80	-39.70	-13	26.70
3760.00	59.94	140	1.3	V	-41.6	1.50	11.80	-31.30	-13	18.30
5640.00	50.64	207	1.2	H	-49.0	1.70	12.40	-38.30	-13	25.30
5640.00	51.86	342	2.3	V	-47.5	1.70	12.40	-36.80	-13	23.80
GSM Mode, High channel										
9560	37.11	129	2.3	H	-63.5	1.37	0.0	-64.87	-13	51.87
9560	38.47	208	2.2	V	-60.9	1.37	0.0	-62.27	-13	49.27
3819.60	54.77	140	1.7	H	-47.3	1.50	11.80	-37.00	-13	24.00
3819.60	62.23	259	1.0	V	-39.4	1.50	11.80	-29.10	-13	16.10
5729.40	52.47	81	1.5	H	-47.4	1.60	12.10	-36.90	-13	23.90
5729.40	53.06	156	1.2	V	-46.2	1.60	12.10	-35.70	-13	22.70

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Low channel										
957.4	37.74	188	2.0	H	-62.9	1.37	0.0	-64.27	-13	51.27
957.4	38.81	191	2.4	V	-60.5	1.37	0.0	-61.87	-13	48.87
3704.80	56.27	108	1.9	H	-45.5	1.60	11.90	-35.20	-13	22.20
3704.80	58.63	129	1.7	V	-42.6	1.60	11.90	-32.30	-13	19.30
5557.20	52.98	117	1.4	H	-46.7	1.70	12.40	-36.00	-13	23.00
5557.20	55.87	242	1.8	V	-43.5	1.70	12.40	-32.80	-13	19.80
WCDMA Mode, Middle channel										
958.2	37.59	13	1.7	H	-63.0	1.37	0.0	-64.37	-13	51.37
958.2	38.62	153	1.4	V	-60.7	1.37	0.0	-62.07	-13	49.07
3760.00	56.60	251	2.0	H	-45.5	1.50	11.80	-35.20	-13	22.20
3760.00	58.75	1	1.3	V	-42.8	1.50	11.80	-32.50	-13	19.50
5640.00	53.42	115	2.5	H	-46.3	1.70	12.40	-35.60	-13	22.60
5640.00	56.64	74	2.1	V	-42.7	1.70	12.40	-32.00	-13	19.00
WCDMA Mode, High channel										
949.7	37.39	110	2.1	H	-63.2	1.37	0.0	-64.57	-13	51.57
949.7	38.44	283	2.3	V	-60.9	1.37	0.0	-62.27	-13	49.27
3815.20	56.68	14	1.7	H	-45.4	1.50	11.80	-35.10	-13	22.10
3815.20	60.18	186	1.4	V	-41.4	1.50	11.80	-31.10	-13	18.10
5722.80	55.24	231	1.2	H	-44.6	1.60	12.10	-34.10	-13	21.10
5722.80	57.80	7	1.9	V	-41.4	1.60	12.10	-30.90	-13	17.90

Note:

1) Absolute Level = Substituted Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

3) The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

FCC § 22.917 (a); § 24.238 (a) - BAND EDGES

Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

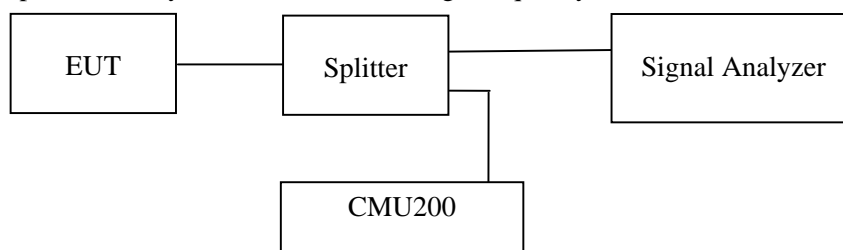

Test Data

Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Harris Yang from 2020-09-06 to 2020-10-21.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

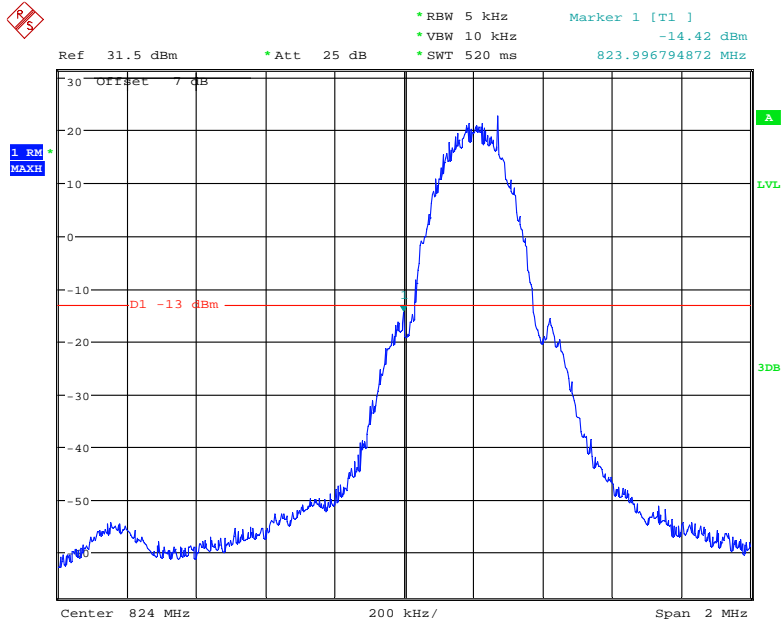


Date: 6.SEP.2020 10:27:21

Cellular Band, Right Band Edge for GSM (GMSK) Mode

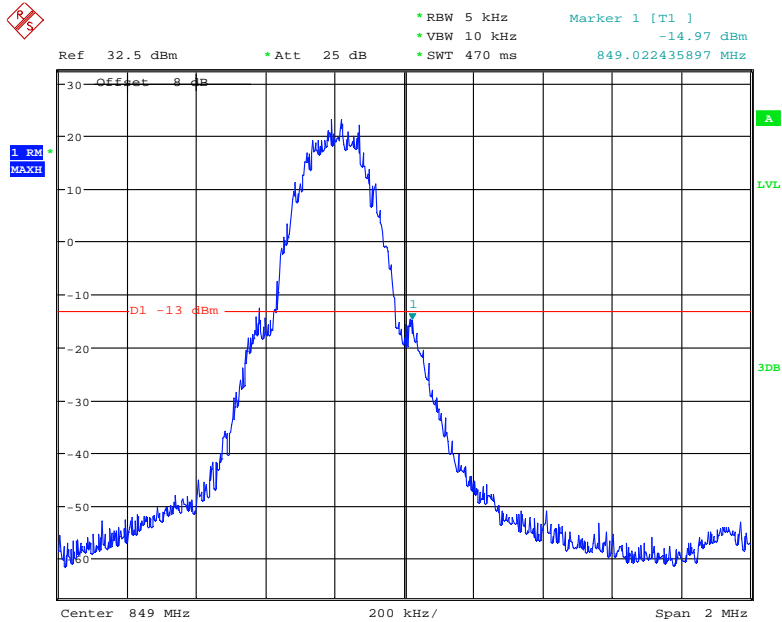


Date: 6.SEP.2020 10:23:15

Cellular Band, Left Band Edge for RMC Mode

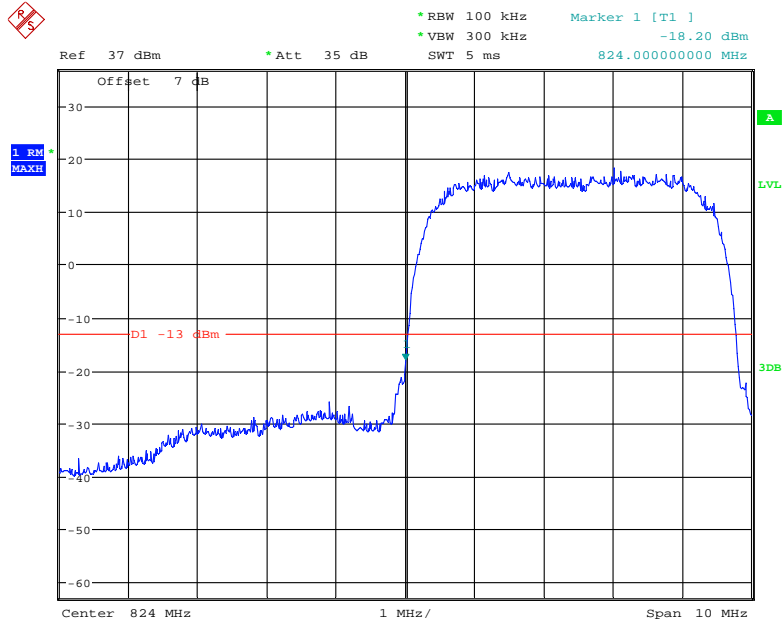


Date: 6.SEP.2020 13:52:22

Cellular Band, Right Band Edge for RMC Mode

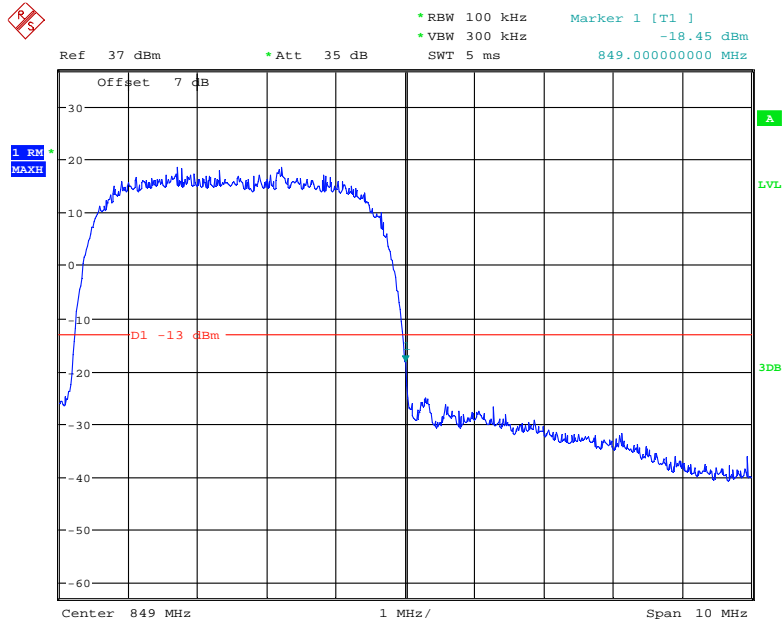


Date: 6.SEP.2020 13:53:22

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

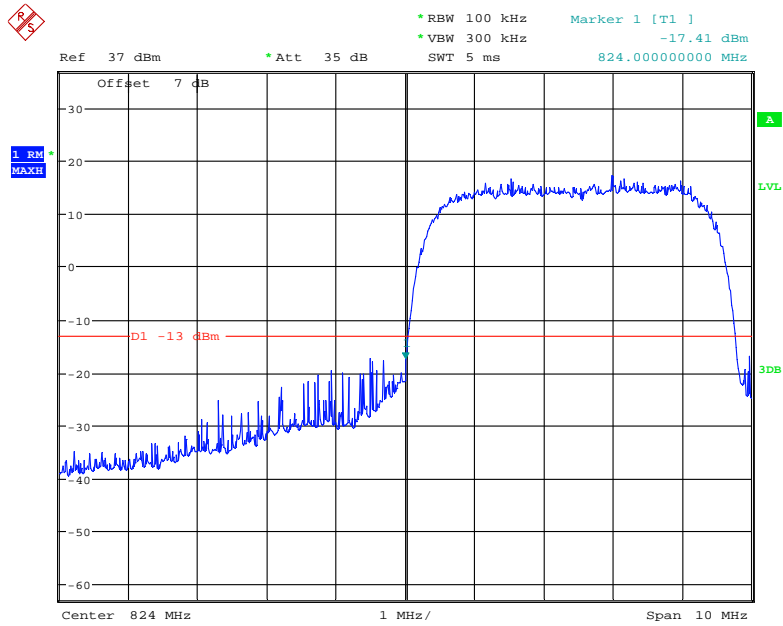


Date: 6.SEP.2020 13:56:48

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

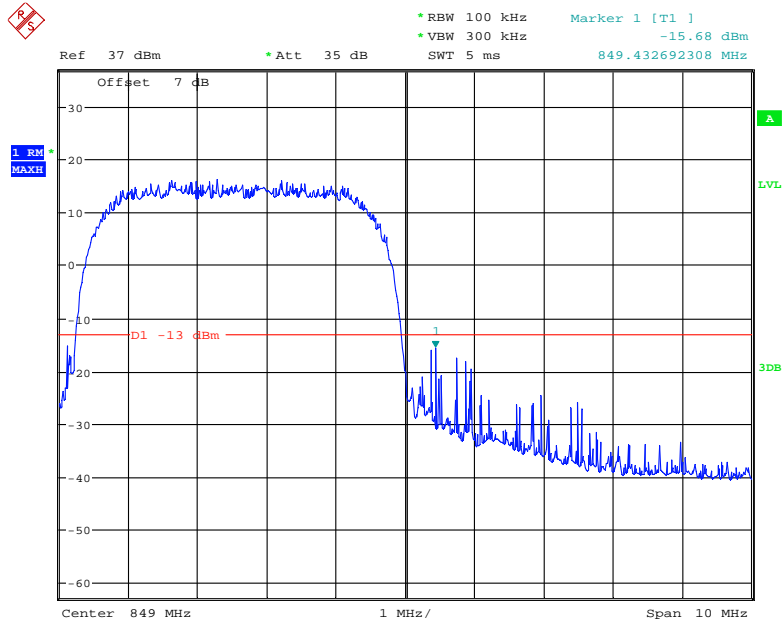


Date: 6.SEP.2020 13:58:11

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

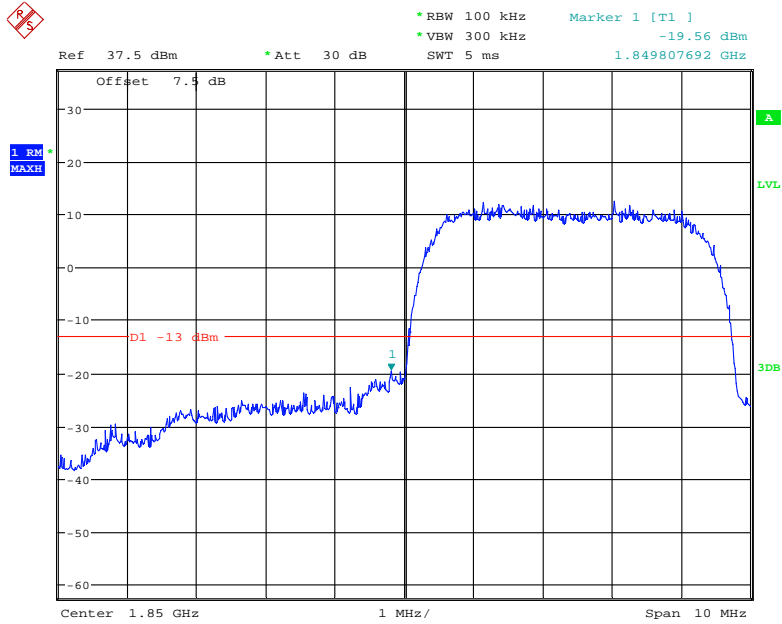


Date: 21.OCT.2020 17:58:50

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

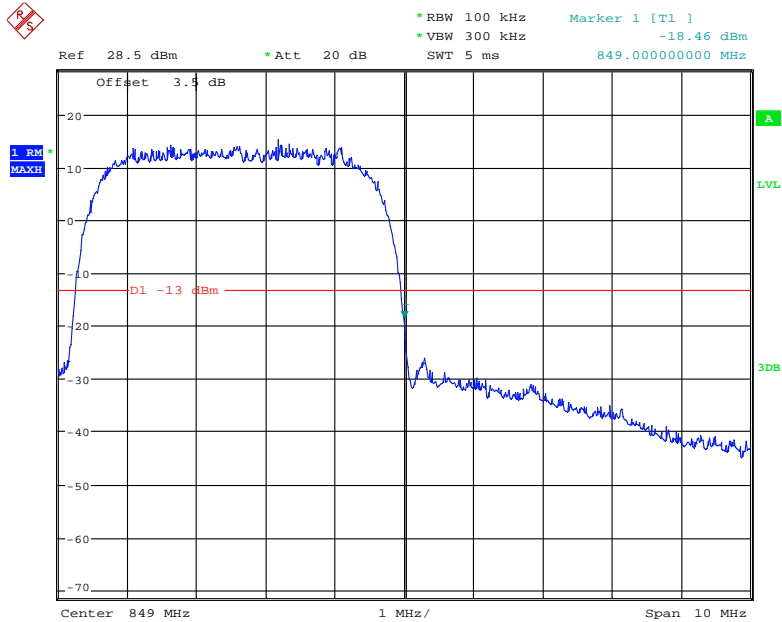


Date: 13.OCT.2020 07:36:51

PCS Band, Left Band Edge for GSM (GMSK) Mode

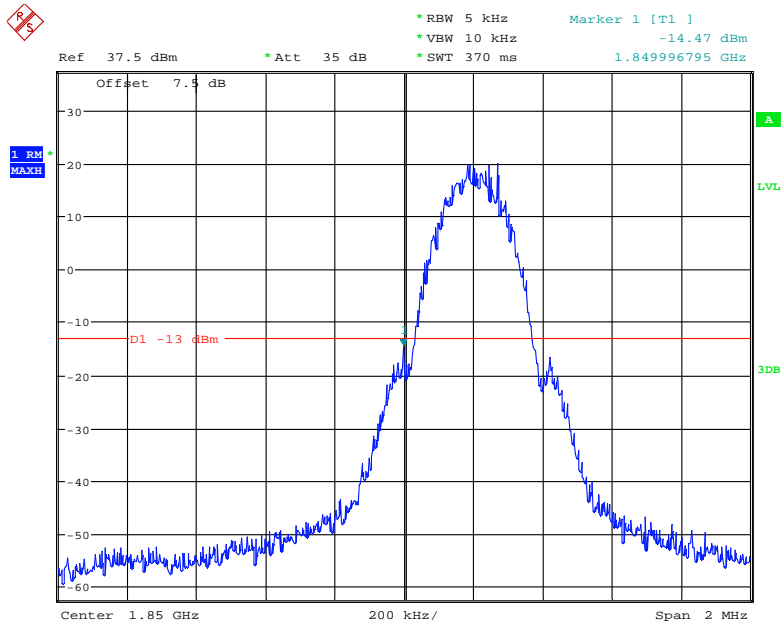


Date: 6.SEP.2020 10:55:08

PCS Band, Right Band Edge for GSM (GMSK) Mode

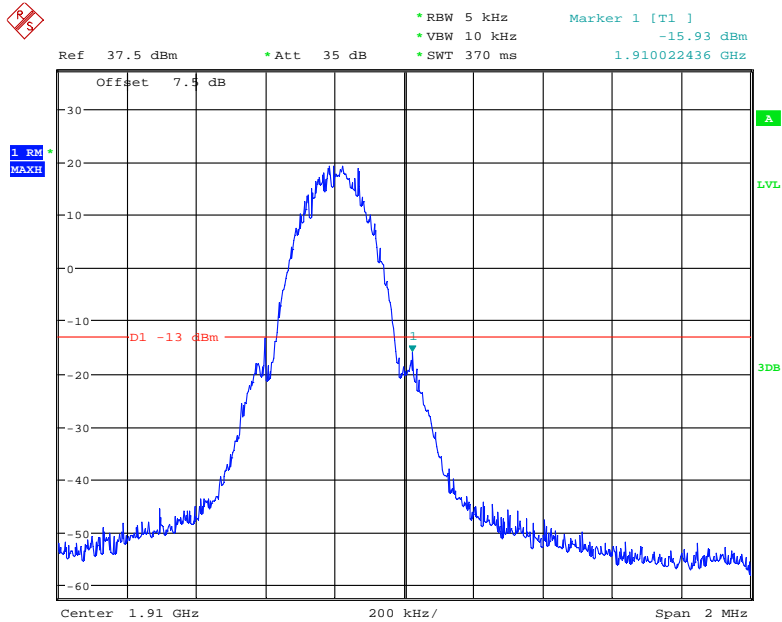


Date: 6.SEP.2020 10:56:41

PCS Band, Left Band Edge for RMC Mode

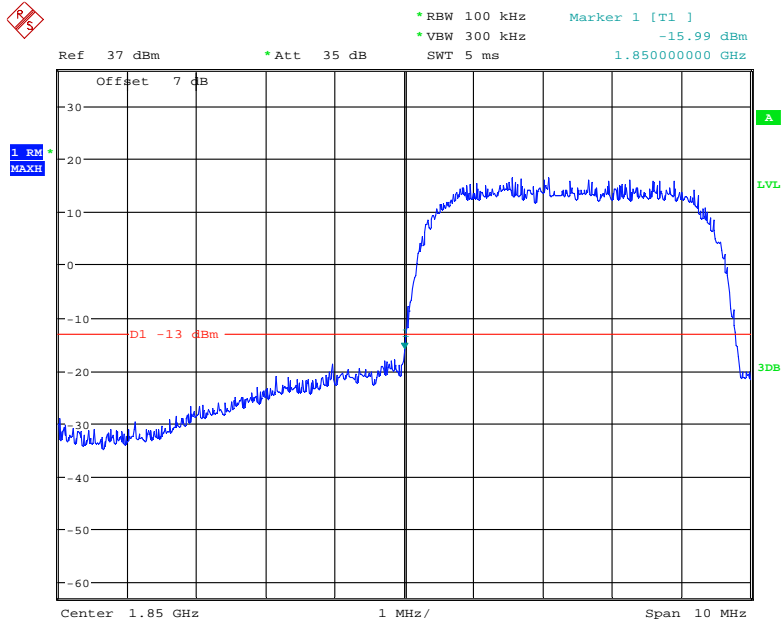


Date: 6.SEP.2020 13:49:22

PCS Band, Right Band Edge for RMC Mode

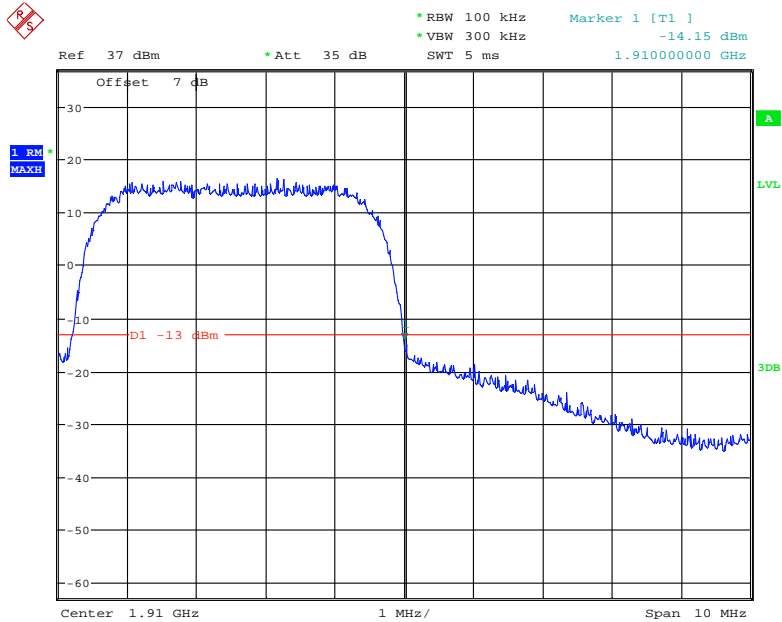


Date: 6.SEP.2020 13:50:58

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

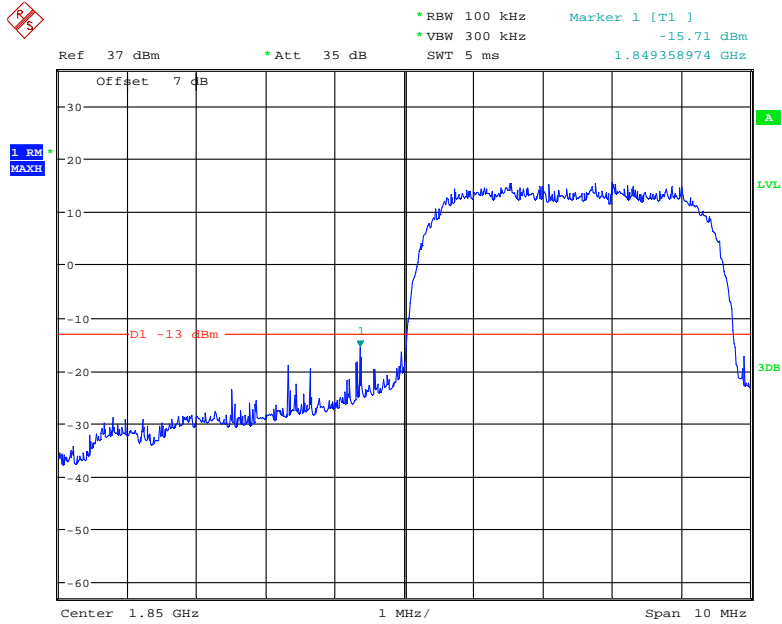


Date: 6.SEP.2020 13:59:40

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

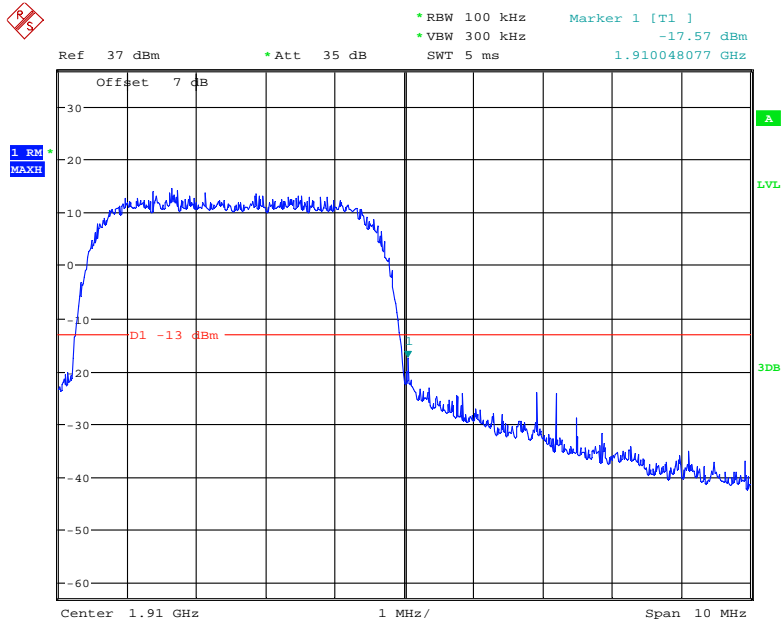


Date: 6.SEP.2020 14:00:42

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

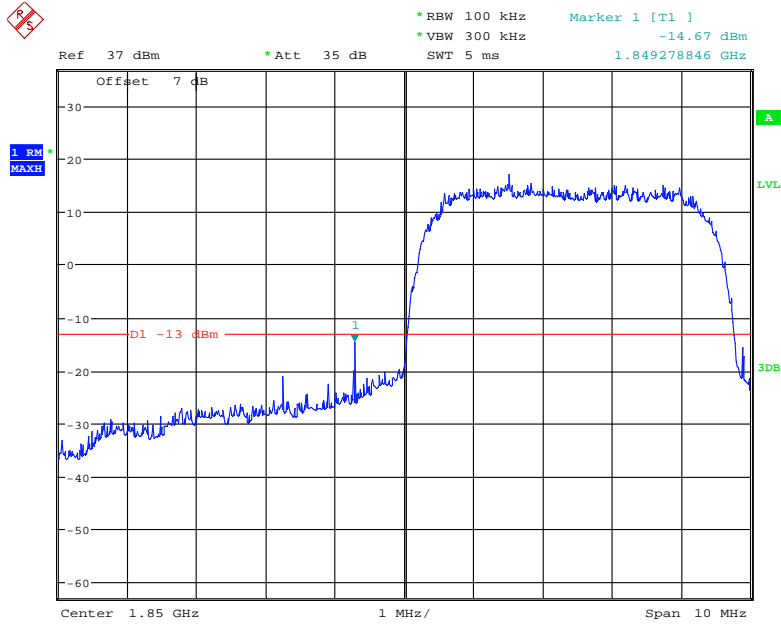

Date: 6.SEP.2020 14:17:15

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

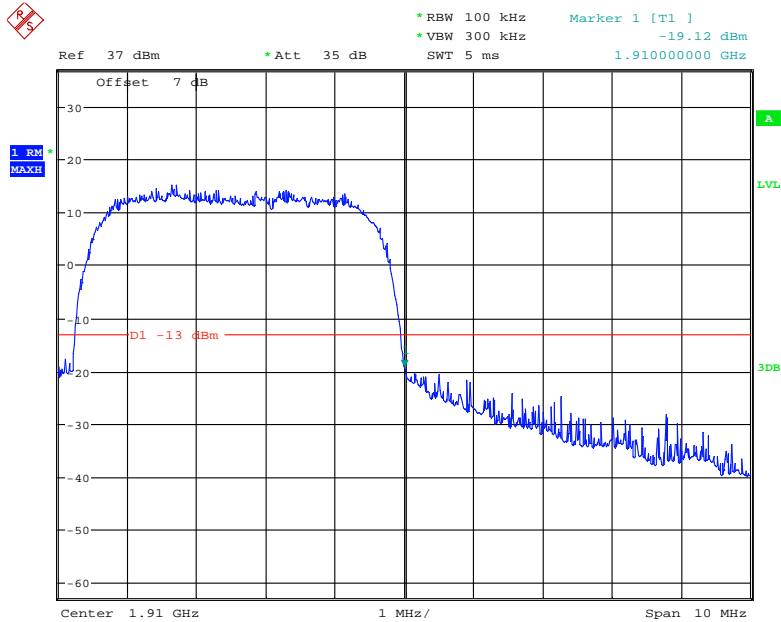

Date: 6.SEP.2020 14:19:53

FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

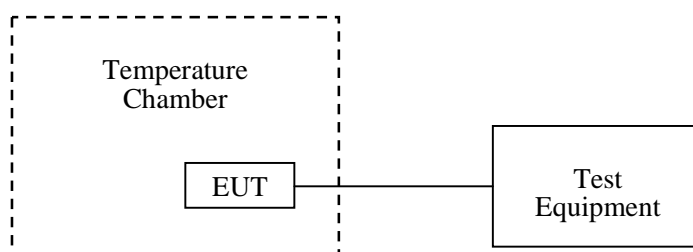

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hailey Yang on 2020-09-06.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7V	10	0.0120	2.5
-20		11	0.0131	2.5
-10		9	0.0108	2.5
0		9	0.0108	2.5
10		10	0.0120	2.5
20		10	0.0120	2.5
30		-8	-0.0096	2.5
40		-10	-0.0120	2.5
50		12	0.0143	2.5
20	3.5V	9	0.0108	2.5
20	4.35V	13	0.0155	2.5

WCDMA Mode

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7V	6	0.007172	2.5
-20		-2	-0.002391	2.5
-10		3	0.003586	2.5
0		-1	-0.001195	2.5
10		4	0.004781	2.5
20		2	0.002391	2.5
30		-5	-0.005977	2.5
40		1	0.001195	2.5
50		-5	-0.005977	2.5
20		3.5V	4	0.004781
20	4.35V	3	0.003586	2.5

PCS Band (Part 24E)

GSM Mode

Middle Channel, $f_0=1880.0\text{ MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7V	8	0.0043	Pass
-20		6	0.0032	Pass
-10		6	0.0032	Pass
0		-4	-0.0021	Pass
10		-5	-0.0027	Pass
20		-6	-0.0032	Pass
30		7	0.0037	Pass
40		5	0.0027	Pass
50		-7	-0.0037	Pass
20		3.5V	8	0.0043
20	4.35V	7	0.0037	Pass

WCDMA Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7V	3	0.001596	Pass
-20		1	0.000532	Pass
-10		2	0.001064	Pass
0		-4	-0.002128	Pass
10		-5	-0.002660	Pass
20		1	0.000532	Pass
30		-6	-0.003191	Pass
40		2	0.001064	Pass
50		-5	-0.002660	Pass
20		3.5V	3	0.001596
20	4.35V	4	0.002128	Pass

******* END OF REPORT *******