



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

Shenzhen Digidragon Technology Co.,Ltd

F02-3, Block 36, Dayun Software Town, Longgang District, Shenzhen, China

FCC ID: 2AW7SB310

Report Type: Original Report	Product Type: Mobile Phone
Report Number: SZ2210603-21180E-00B	
Report Date: 2021-07-12	
Reviewed By: RF Engineer	Jacob Kong
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
BLOCK DIAGRAM OF TEST SETUP.....	5
SUMMARY OF TEST RESULTS.....	6
TEST EQUIPMENT LIST.....	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	9
APPLICABLE STANDARD.....	9
TEST RESULT.....	9
FCC §2.1047 - MODULATION CHARACTERISTIC.....	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD.....	11
TEST PROCEDURE.....	11
TEST DATA.....	11
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH.....	14
APPLICABLE STANDARD.....	14
TEST PROCEDURE.....	14
TEST DATA.....	14
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	19
APPLICABLE STANDARD.....	19
TEST PROCEDURE.....	19
TEST DATA.....	19
FCC § 2.1053; § 22.917 (A);§ 24.238 (A) -SPURIOUS RADIATED EMISSIONS.....	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE.....	28
TEST DATA.....	28
FCC § 22.917 (A); § 24.238 (A) - BAND EDGES.....	31
APPLICABLE STANDARD.....	31
TEST PROCEDURE.....	31
TEST DATA.....	31
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY.....	34
APPLICABLE STANDARD.....	34
TEST PROCEDURE.....	34
TEST DATA.....	35

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	B310
Frequency Range	GSM850: 824-849 MHz (TX), 869-894 MHz (RX) PCS1900: 1850-1910 MHz (TX), 1930-1990 MHz (RX)
Conducted Average Power	GSM850: 33.22dBm PCS1900: 31.60dBm
Modulation Technique	2G: GMSK
Antenna Specification*	GSM850: 0.5dBi GSM1900: 1.3dBi(It is provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5.0V from adapter
Date of Test	2021-06-10 to 2021-06-11
Sample number	SZ2210603-21180E-RF-S_8DM (for RE&CE test) SZ2210603-21180E-RF-S_8DF (for RF conducted test) (Assigned by BAACL, Shenzhen)
Received date	2021-06-03
Sample/EUT Status	Good condition
Adapter information	Model: J001-1 Input: AC 100-240V~ 50/60Hz, 150mA Output: DC 5.0V, DC 500mA

Objective

This test report is in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		±0.73dB
Unwanted Emission, conducted		±1.6dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1°C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Support Cable Description:

Cable Description	Length (m)	From / Port	To
/	/	/	/

Block Diagram of Test Setup

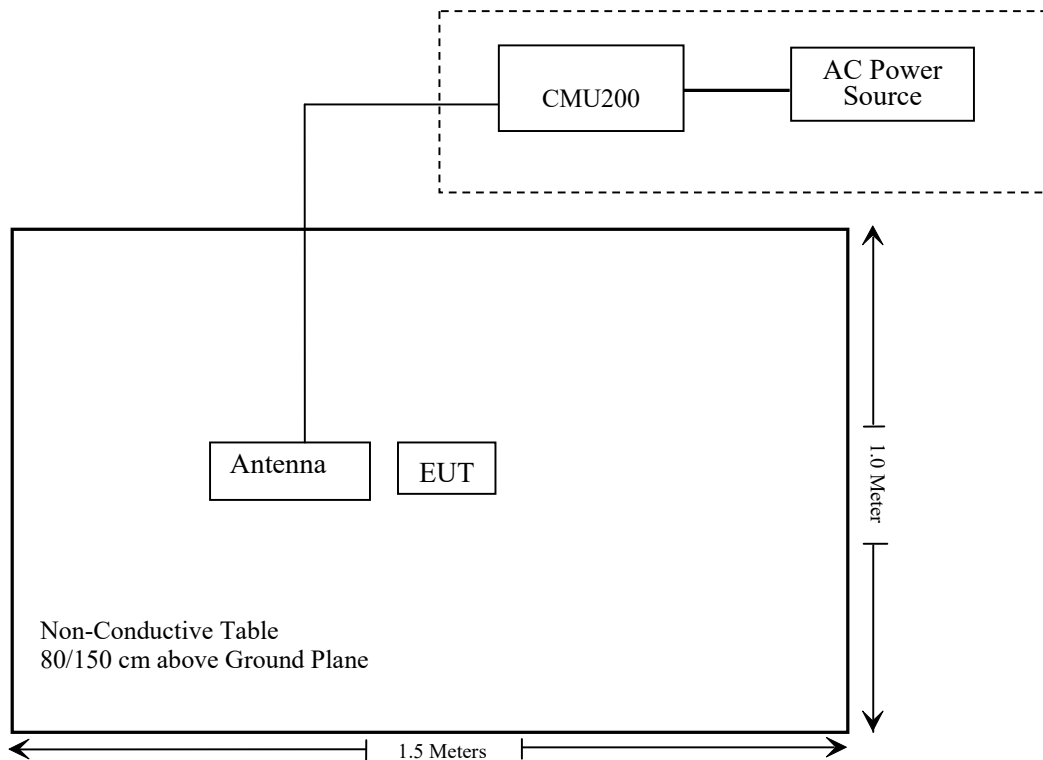

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliant*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238	Occupied Bandwidth	Compliant
§ 2.1051; § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053; § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliant
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliant
§ 2.1055; § 22.355; § 24.235	Frequency stability	Compliant

Compliant*: Please refer to SAR report released by BACL, report number: SZ2210603-21180E –20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
COM-POWER	Dipole Antenna	AD-100	721027	NCR	NCR
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Sunol Sciences	Horn Antenna	3115	9107-3694	2021/01/15	2024/01/14
A.H.System	Horn Antenna	SAS-200/571	135	2018/09/01	2021/08/31
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
Unknown	High Pass filter	1.3GHz	101120	2021/04/20	2022/04/20
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2020/10/23	2021/10/22
Agilent	Signal Generator	N5183A	MY51040755	2020/12/29	2021/12/28
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2020/12/06	2023/12/05
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-01 1304	2020/12/06	2023/12/05

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2021/04/02	2022/04/01
Unknown	RF Cable	Unknown	2301 276	2020/11/29	2021/11/28
Weinschel	Power divider	1515	RH386	2021/04/20	2022/04/20
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2020/10/23	2021/10/22
ESPEC	Temperature & Humidity Chamber	EL-10KA	9107726	2021/01/05	2022/01/04
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2020/07/23	2021/07/22

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: SZ2210603-21180E -20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.


According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



Radiated method:

ANSI C63.26-2015 section 5.5.3.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Carl Yang on 2021-06-11.

Conducted Power

Cellular Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	ERP(dBm)	Limit (dBm)
GSM	128	824.2	33.16	31.51	38.45
	190	836.6	33.17	31.52	38.45
	251	848.8	32.97	31.32	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				ERP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	33.22	31.16	29.73	28.13	31.57	29.51	28.08	26.48	38.45
	190	836.6	33.19	31.18	29.68	28.08	31.54	29.53	28.03	26.43	38.45
	251	848.8	32.98	31.08	29.58	27.98	31.33	29.43	27.93	26.33	38.45

Note: ERP(dBm) = Conducted Power(dBm) + Antenna Gain(dBd)-Cable Loss(dB)
 For GSM850: Antenna Gain =0.5dBi = -1.65dBd (0dBd=2.15dBi)
 Cable Loss= 0dB

PCS Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	EIRP(dBm)	Limit (dBm)
GSM	512	1850.2	31.60	32.90	33
	661	1880.0	31.30	32.60	33
	810	1909.8	31.20	32.50	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				EIRP(dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.64	26.80	25.38	23.69	29.94	28.10	26.68	24.99	33
	661	1880.0	28.37	26.37	24.85	23.12	29.67	27.67	26.15	24.42	33
	810	1909.8	28.24	25.97	24.40	22.70	29.54	27.27	25.70	24.00	33

Note: EIRP(dBm) = Conducted Power(dBm) + Antenna Gain(dBi)-Cable Loss(dB)
 For PCS1900: Antenna Gain = 1.3dBi
 Cable Loss=0dB

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	3.28	13
	Middle	3.36	13
	High	3.44	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	3.34	13
	Middle	3.15	13
	High	3.35	13

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (GSM) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

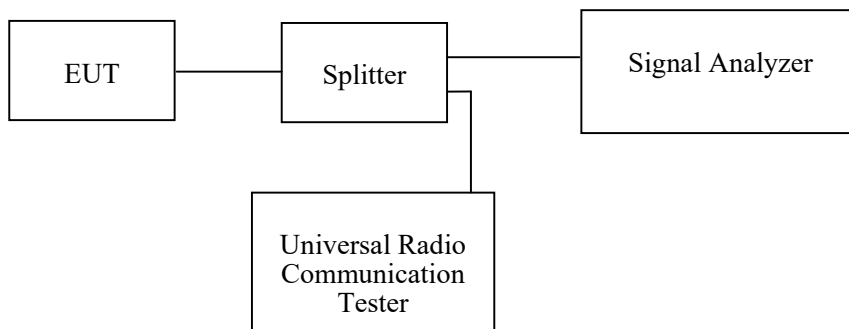

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Carl Yang on 2021-06-11.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following tables and plots.

Cellular Band (Part 22H)


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	824.2	245.19	317.31
	836.6	244.00	319.29
	848.8	244.00	314.87

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1850.2	244.00	321.29
	1880.0	246.00	316.62
	1909.8	244.00	317.82


Cellular Band (Part 22H)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Low Channel

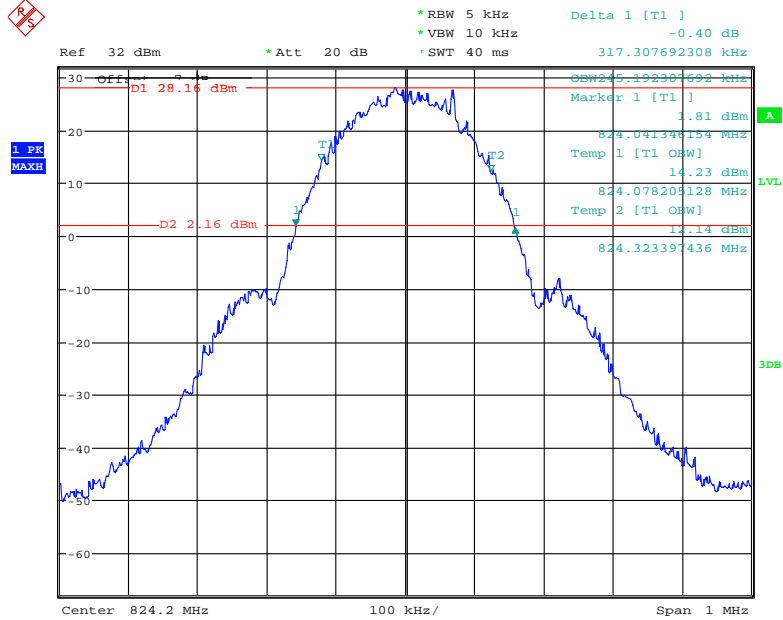


Date: 11.JUN.2021 10:31:36

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle Channel

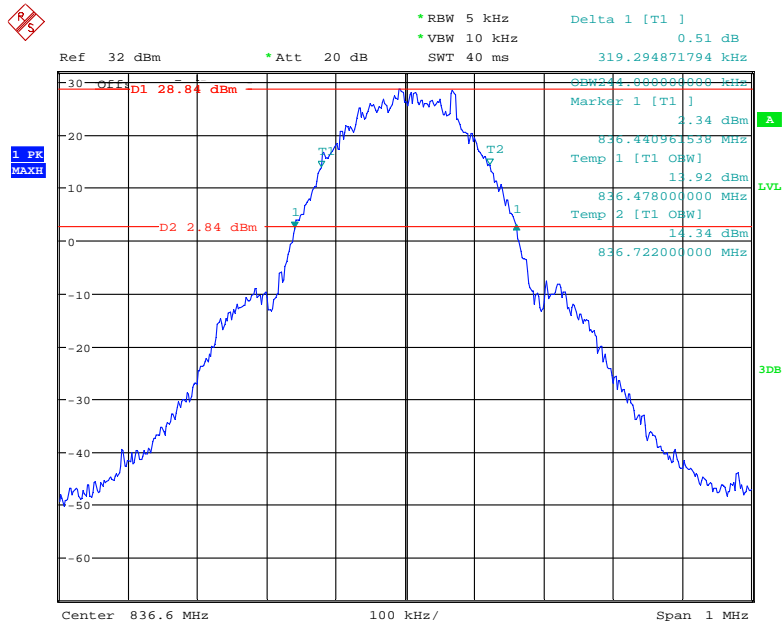

Date: 11.JUN.2021 10:13:08


26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High Channel

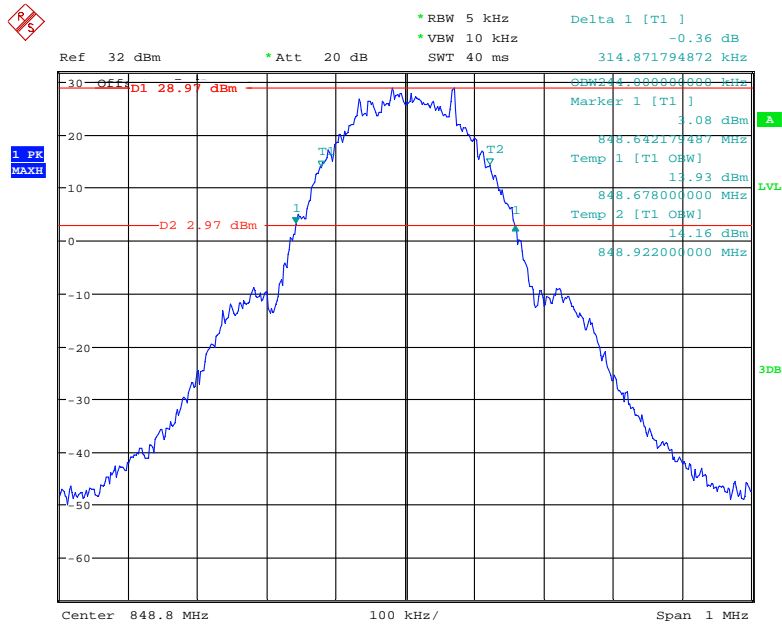

Date: 11.JUN.2021 10:06:52


PCS Band (Part 24E)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, LowChannel

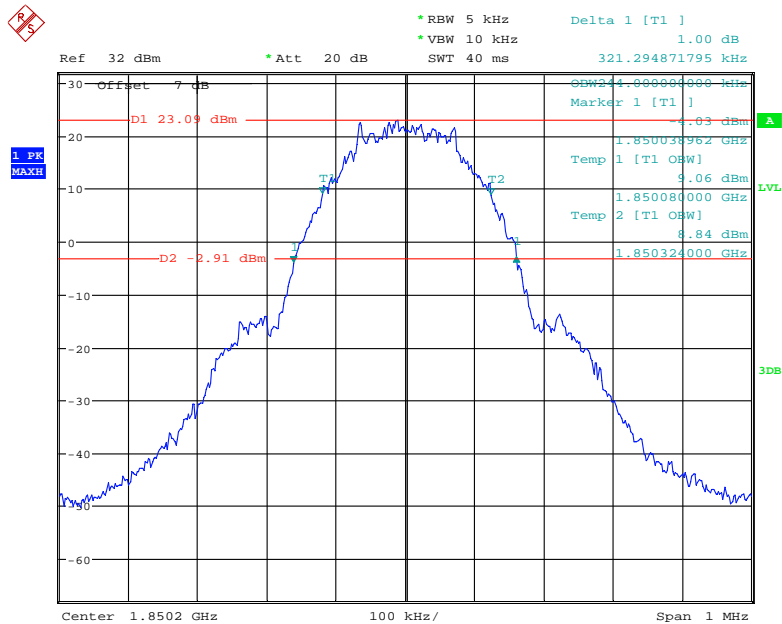


Date: 11.JUN.2021 09:56:57

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, Middle Channel

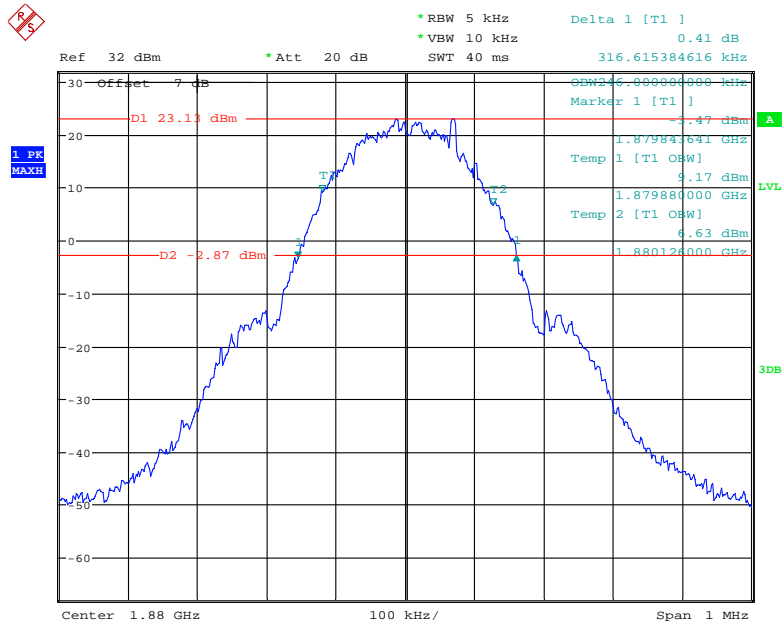

Date: 11.JUN.2021 09:58:43

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode, High Channel

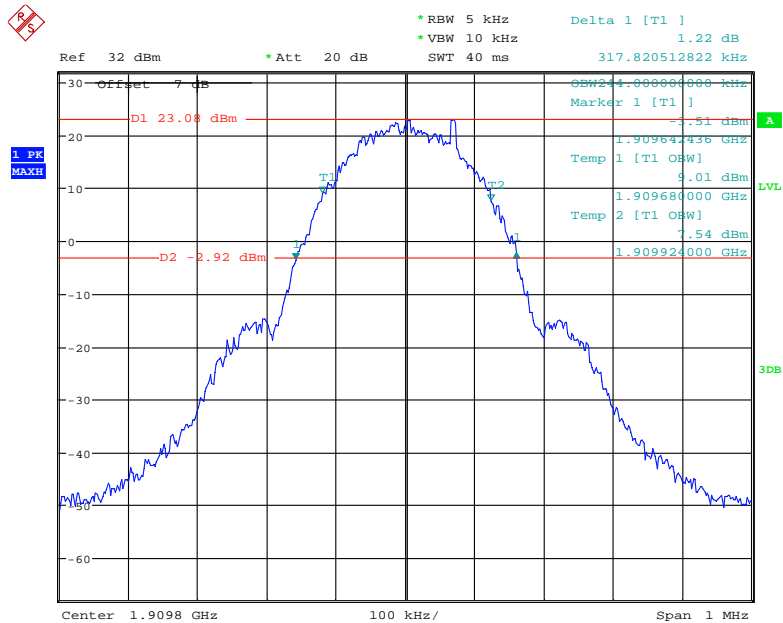

Date: 11.JUN.2021 10:00:22

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

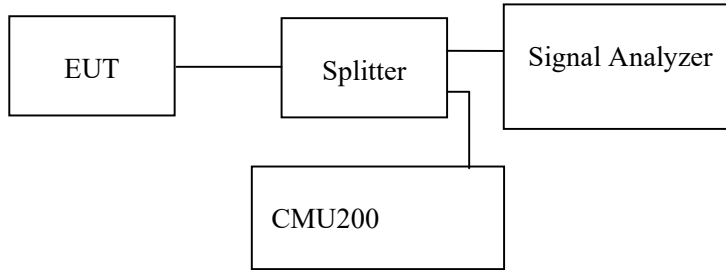

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa


The testing was performed by Carl Yang on 2021-06-11.

EUT operation mode: Transmitting

Test result: Compliant, please refer to the following plots.


**Cellular Band (Part 22H)
Low Channel**

30 MHz – 1 GHz (GSM Mode)

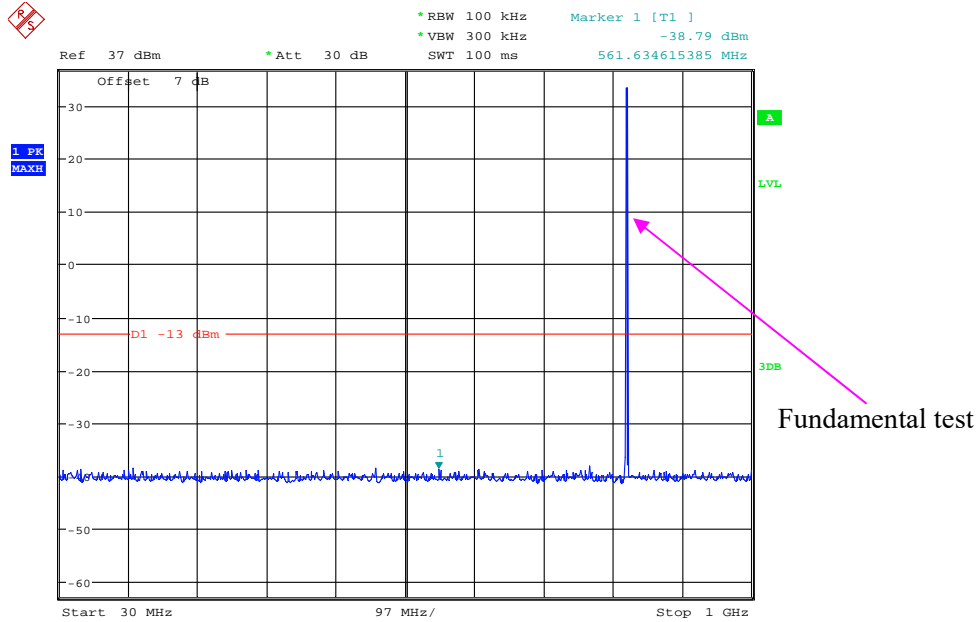

Date: 11.JUN.2021 10:19:13


1 GHz – 10 GHz (GSM Mode)

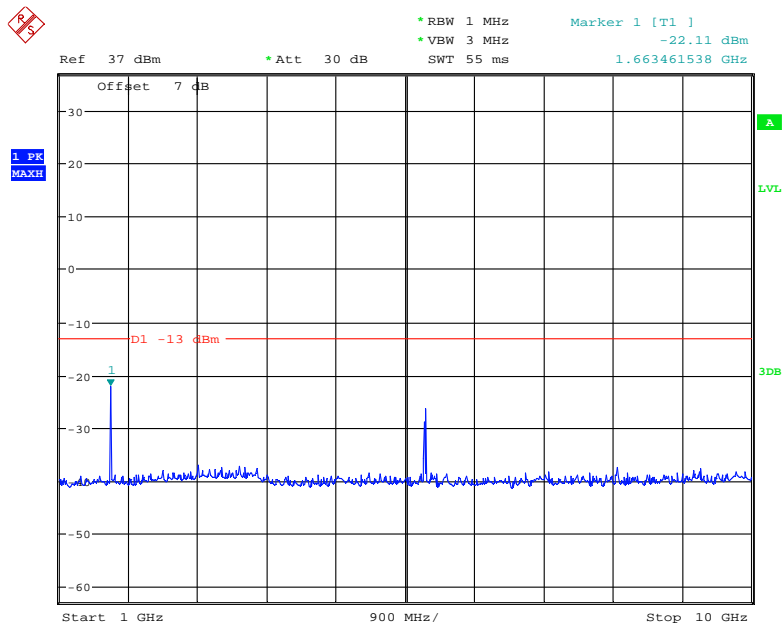

Date: 11.JUN.2021 10:20:59


Middle Channel

30 MHz – 1 GHz (GSM Mode)

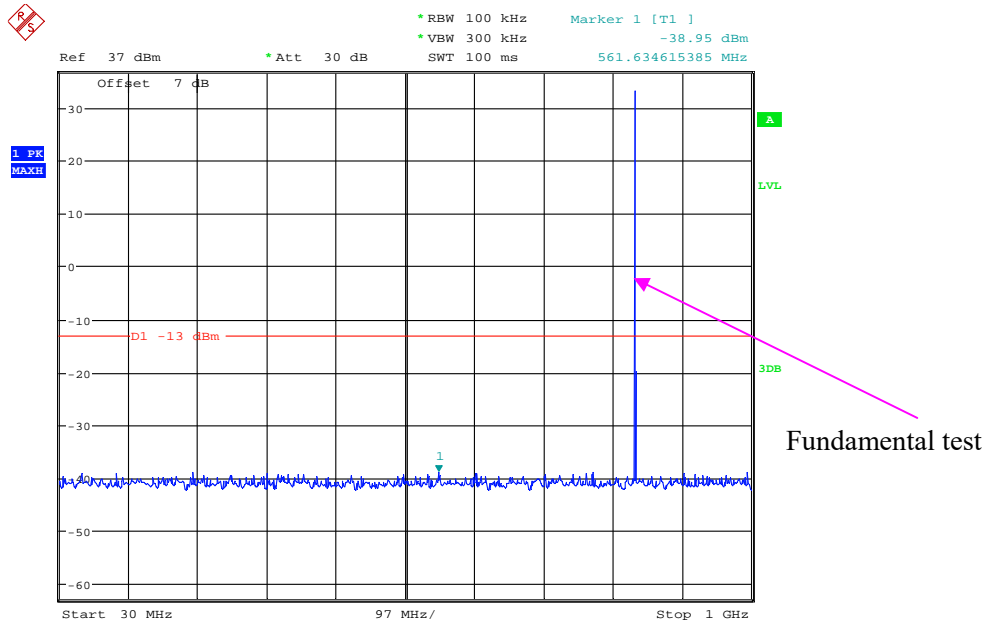

Date: 11.JUN.2021 10:19:43


1 GHz – 10 GHz (GSM Mode)

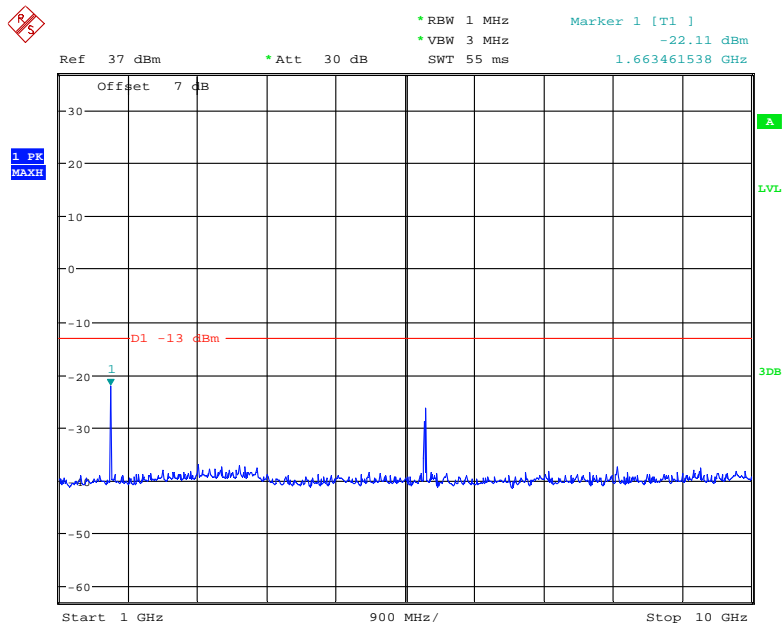

Date: 11.JUN.2021 10:20:59


High Channel

30 MHz – 1 GHz (GSM Mode)

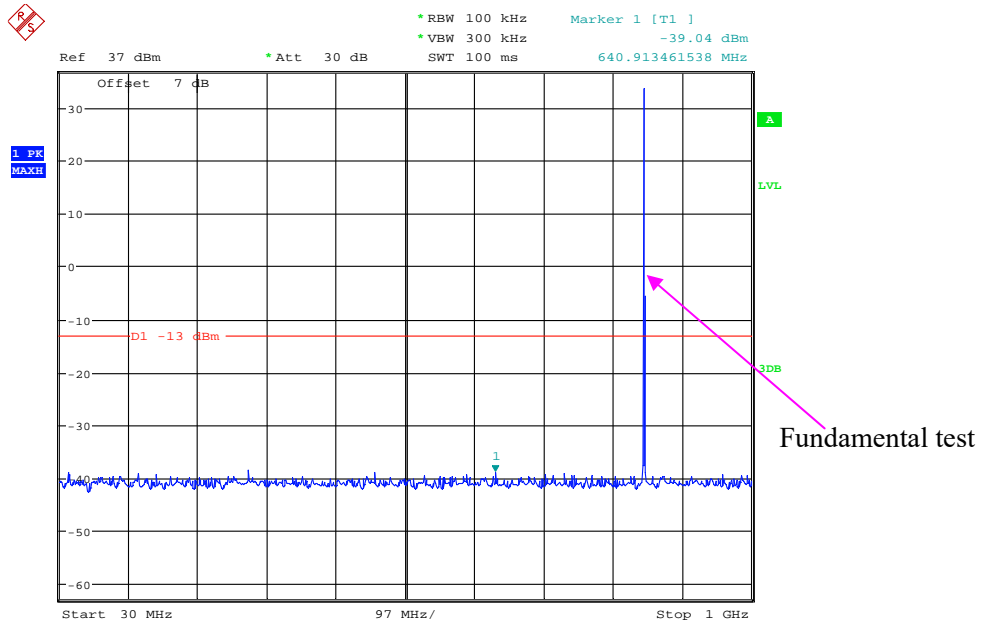

Date: 11.JUN.2021 10:20:04


1 GHz – 10 GHz (GSM Mode)

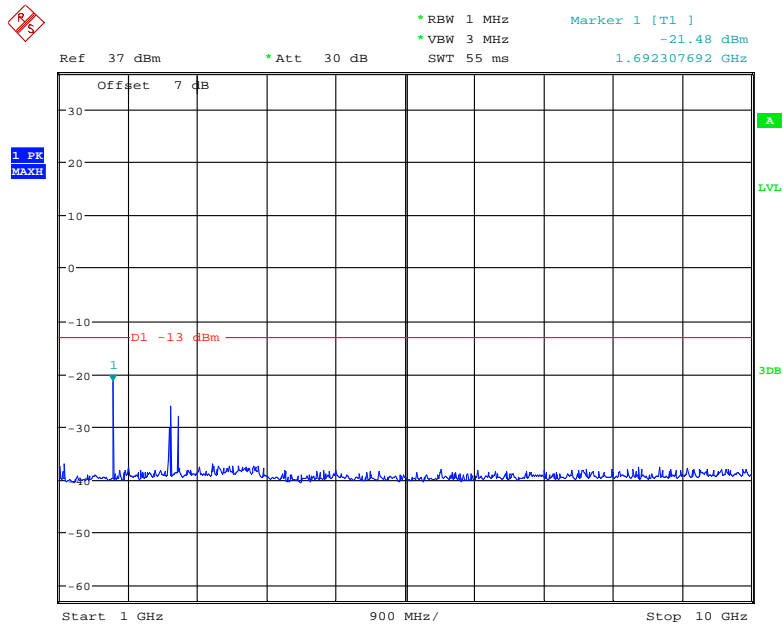

Date: 11.JUN.2021 10:20:35


PCS Band (Part 24E)
Low Channel

30 MHz – 1 GHz (GSM Mode)

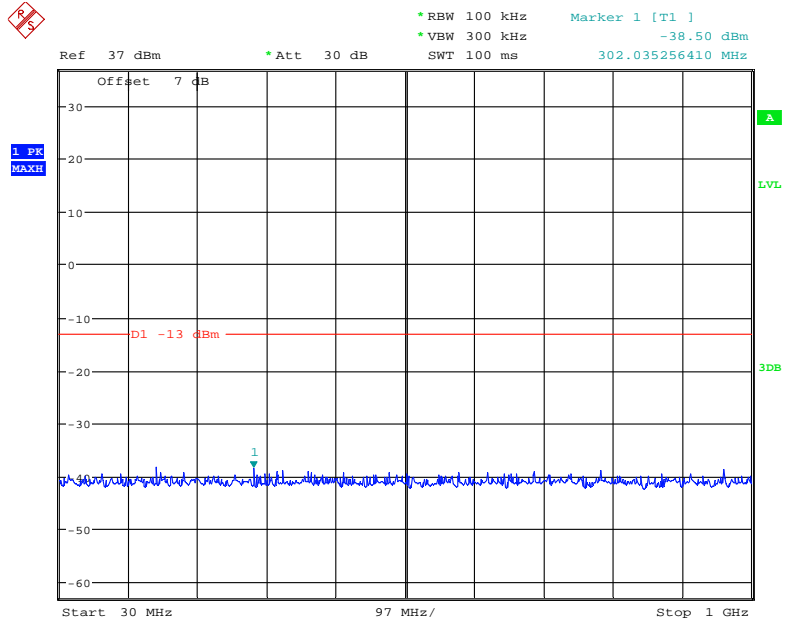


Date: 11.JUN.2021 10:24:46

1 GHz – 10 GHz (GSM Mode)

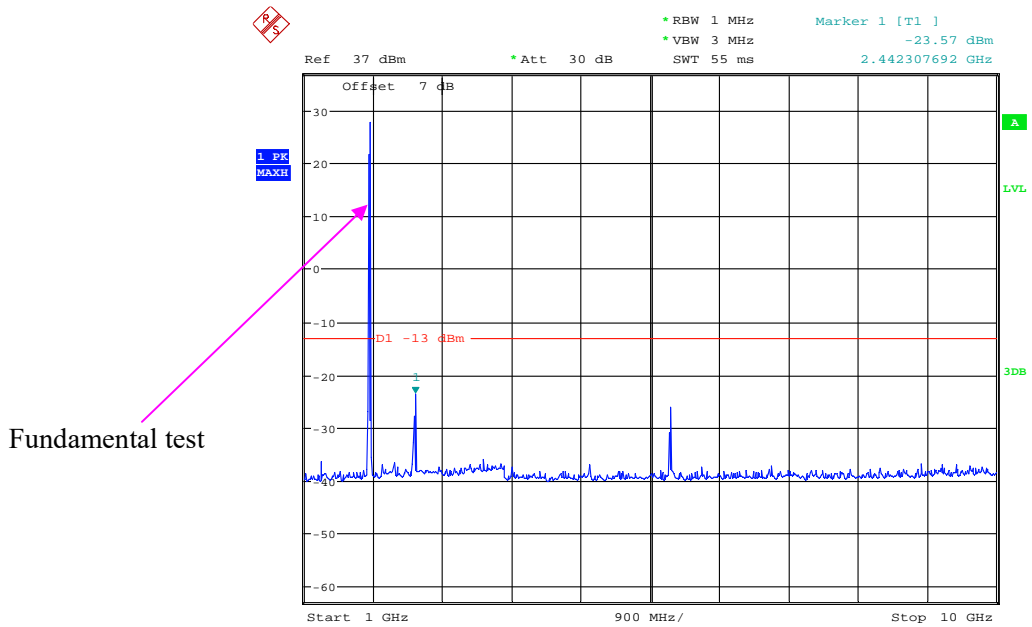

Date: 11.JUN.2021 10:22:20


10 GHz – 20 GHz (GSM Mode)

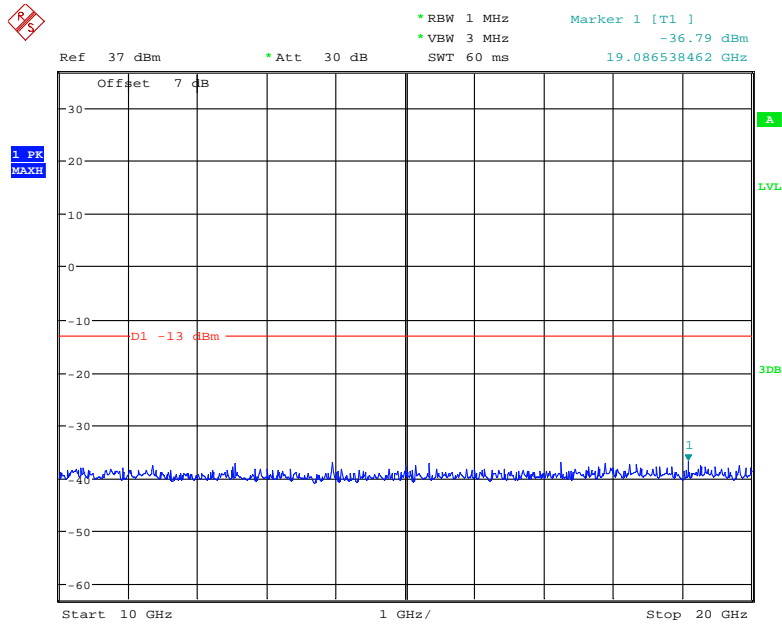

Date: 11.JUN.2021 10:23:53


Middle Channel

30 MHz – 1 GHz (GSM Mode)

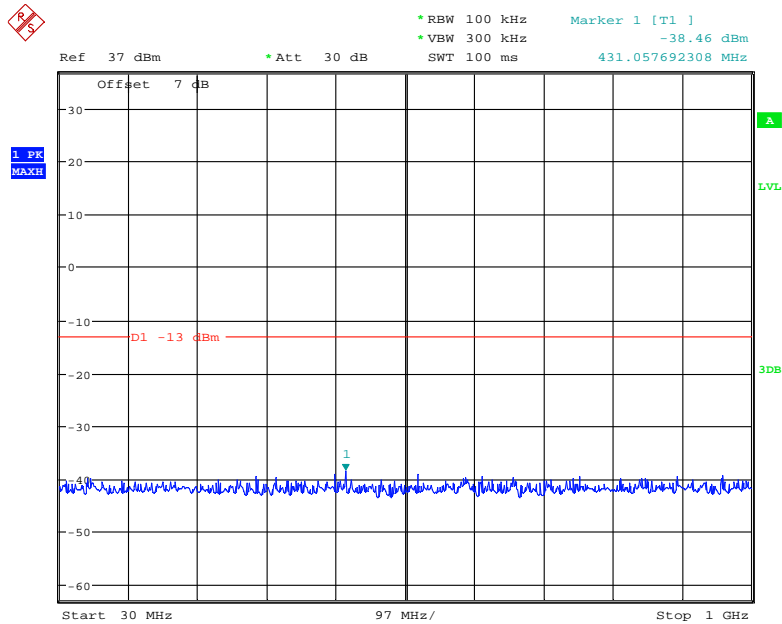

Date: 11.JUN.2021 10:25:01


1 GHz – 10 GHz (GSM Mode)

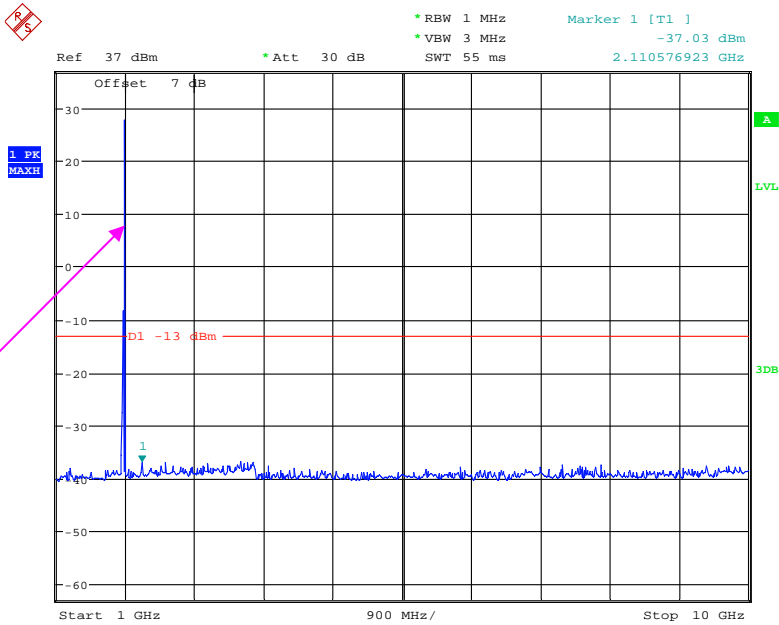

Fundamental test

Date: 11.JUN.2021 10:22:50


10 GHz – 20 GHz (GSM Mode)

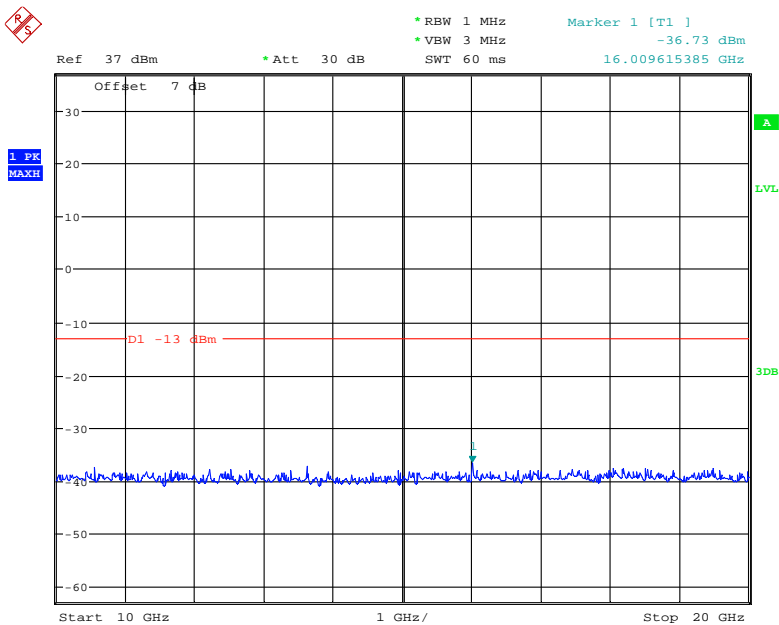

Date: 11.JUN.2021 10:24:05


High Channel

30 MHz – 1 GHz (GSM Mode)

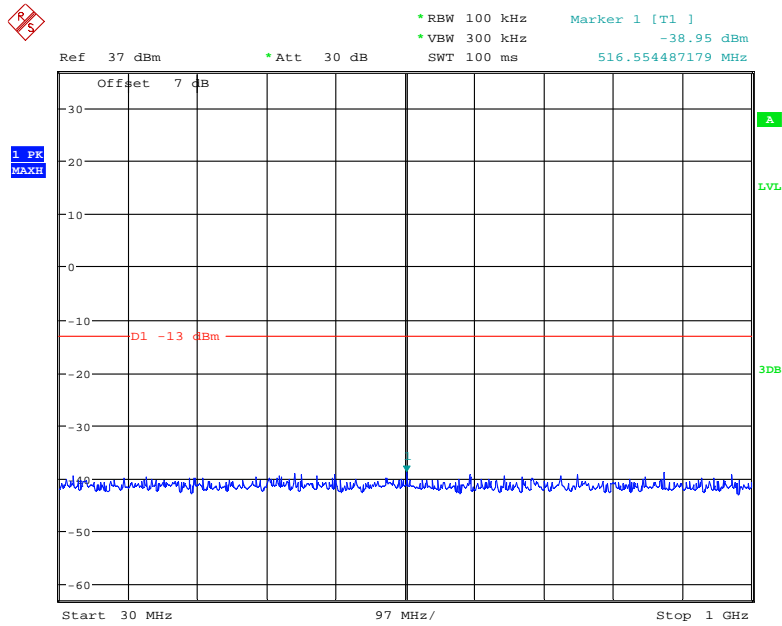

Date: 11.JUN.2021 10:25:12


1 GHz – 10 GHz (GSM Mode)

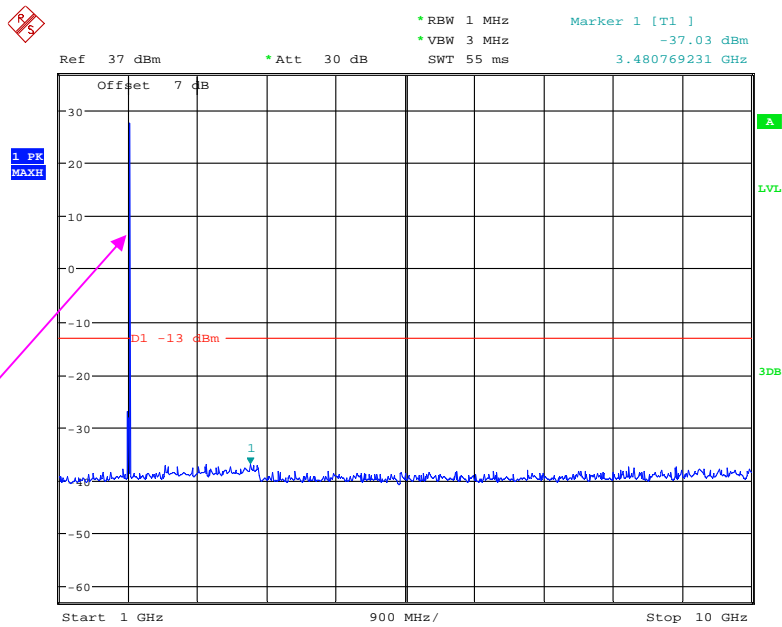

Fundamental test

Date: 11.JUN.2021 10:23:13

10 GHz – 20 GHz (GSM Mode)

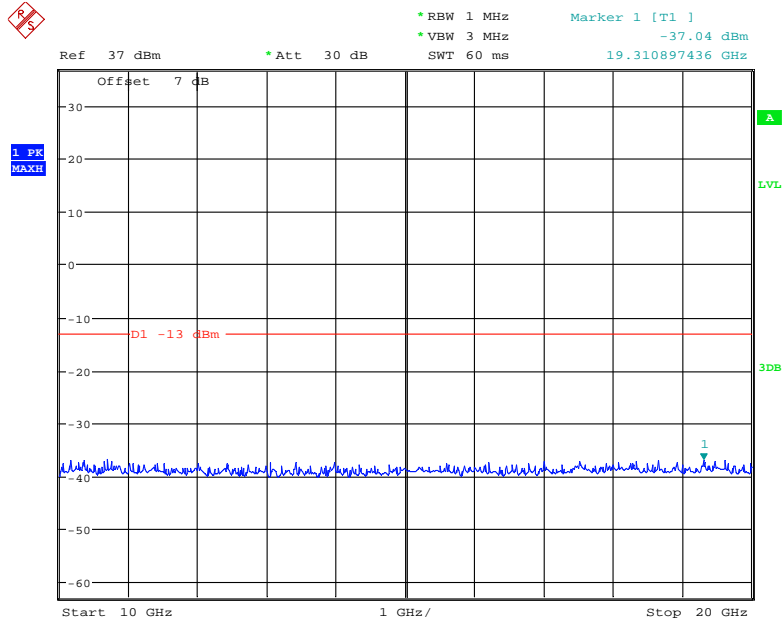

Date: 11.JUN.2021 10:23:35

FCC § 2.1053; § 22.917 (a);§ 24.238 (a) -SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC § 2.1053, §22.917(a) and § 24.238(a).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Data**Environmental Conditions**

Temperature:	26.2~27°C
Relative Humidity:	50~57%
ATM Pressure:	101.0~101.1 kPa

The testing was performed by Zero Yan on 2021-06-11 for below 1GHz and Hanic Pan on 2021-06-10 for above 1GHz.

EUT operation mode: Transmitting

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBµV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Low channel										
955.3	31.47	39	2.1	H	-65.0	1.36	0.0	-66.36	-13	53.36
955.3	32.34	304	2.1	V	-61.7	1.36	0.0	-63.06	-13	50.06
1648.40	64.52	350	1.8	H	-43.6	1.40	8.70	-36.30	-13	23.30
1648.40	67.31	206	1.8	V	-40.5	1.40	8.70	-33.20	-13	20.20
2472.60	56.47	339	2.0	H	-46.9	2.60	10.20	-39.30	-13	26.30
2472.60	60.54	131	1.9	V	-42.2	2.60	10.20	-34.60	-13	21.60
3296.80	46.52	188	1.2	H	-54.4	1.50	11.70	-44.20	-13	31.20
3296.80	49.85	290	1.2	V	-51.1	1.50	11.70	-40.90	-13	27.90
GSM Mode, Middle channel										
960.6	31.54	350	2.3	H	-65.0	1.36	0.0	-66.36	-13	53.36
960.6	32.45	67	1.6	V	-61.6	1.36	0.0	-62.96	-13	49.96
1673.20	64.99	168	1.9	H	-41.3	1.30	8.90	-33.70	-13	20.70
1673.20	67.78	249	1.9	V	-38.0	1.30	8.90	-30.40	-13	17.40
2509.80	57.90	56	1.8	H	-45.5	2.60	10.20	-37.90	-13	24.90
2509.80	61.31	274	2.4	V	-41.4	2.60	10.20	-33.80	-13	20.80
3346.40	47.47	171	1.1	H	-53.4	1.50	11.70	-43.20	-13	30.20
3346.40	50.05	81	1.8	V	-50.9	1.50	11.70	-40.70	-13	27.70
GSM Mode, High channel										
955.8	31.38	254	2.4	H	-65.1	1.36	0.0	-66.46	-13	53.46
955.8	32.42	71	2.1	V	-61.6	1.36	0.0	-62.96	-13	49.96
1697.60	64.87	244	1.7	H	-41.5	1.30	8.90	-33.90	-13	20.90
1697.60	67.68	350	1.6	V	-38.1	1.30	8.90	-30.50	-13	17.50
2546.40	57.02	296	1.9	H	-46.3	2.60	10.20	-38.70	-13	25.70
2546.40	61.15	247	1.9	V	-41.6	2.60	10.20	-34.00	-13	21.00
3395.20	47.22	324	1.0	H	-54.0	1.40	11.80	-43.60	-13	30.60
3395.20	50.11	26	2.2	V	-50.9	1.40	11.80	-40.50	-13	27.50

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Low channel										
952.1	31.47	43	1.5	H	-65.0	1.36	0.0	-66.36	-13	53.36
952.1	32.49	331	1.0	V	-61.6	1.36	0.0	-62.96	-13	49.96
3700.40	47.65	0	1.5	H	-54.2	1.60	11.90	-43.90	-13	30.90
3700.40	51.03	353	2.0	V	-50.2	1.60	11.90	-39.90	-13	26.90
WCDMA Mode, Middle channel										
953.2	31.44	126	1.5	H	-65.1	1.36	0.0	-66.46	-13	53.46
953.2	32.39	254	2.3	V	-61.7	1.36	0.0	-63.06	-13	50.06
3760.00	48.63	76	1.6	H	-53.4	1.50	11.80	-43.10	-13	30.10
3760.00	51.67	143	1.8	V	-49.9	1.50	11.80	-39.60	-13	26.60
WCDMA Mode, High channel										
952.5	31.51	234	1.9	H	-65.0	1.36	0.0	-66.36	-13	53.36
952.5	32.44	238	2.3	V	-61.6	1.36	0.0	-62.96	-13	49.96
3819.60	46.25	161	1.4	H	-55.8	1.50	11.80	-45.50	-13	32.50
3819.60	49.53	144	1.6	V	-52.1	1.50	11.80	-41.80	-13	28.80

Note:

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level
- 3) The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

FCC § 22.917 (a); § 24.238 (a) - BAND EDGES

Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

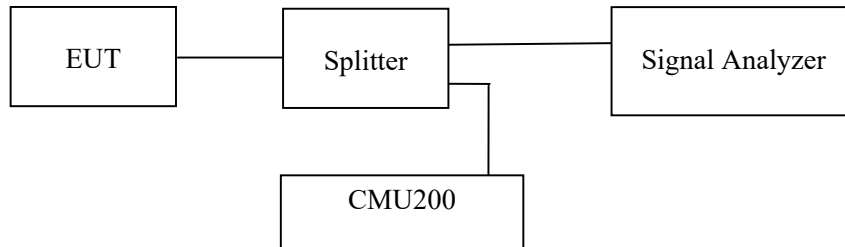

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Carl Yang on 2021-06-11.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

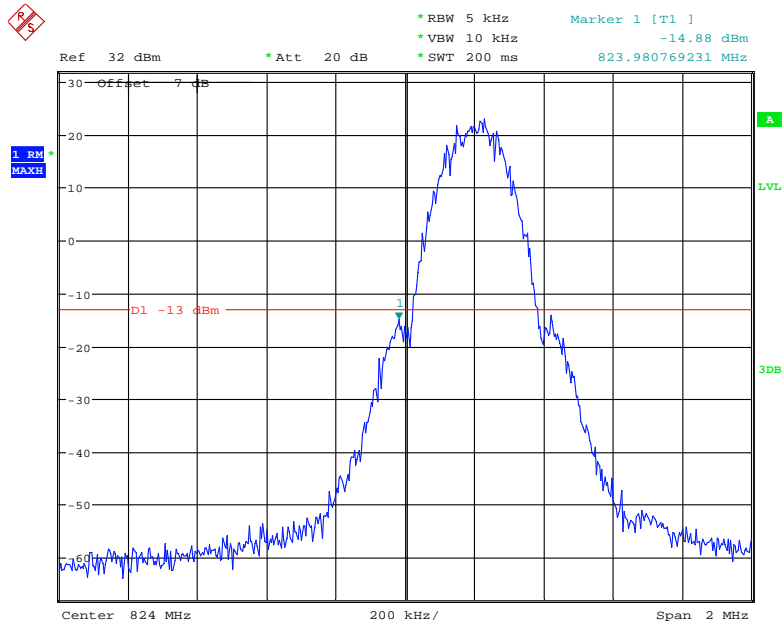


Date: 11.JUN.2021 09:30:55

Cellular Band, Right Band Edge for GSM (GMSK) Mode

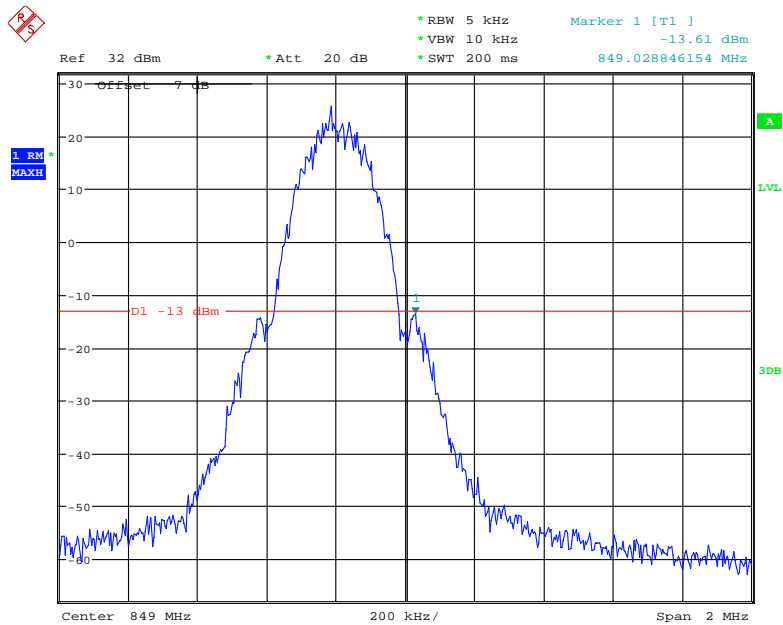


Date: 11.JUN.2021 09:38:07

PCS Band, Left Band Edge for GSM (GMSK) Mode

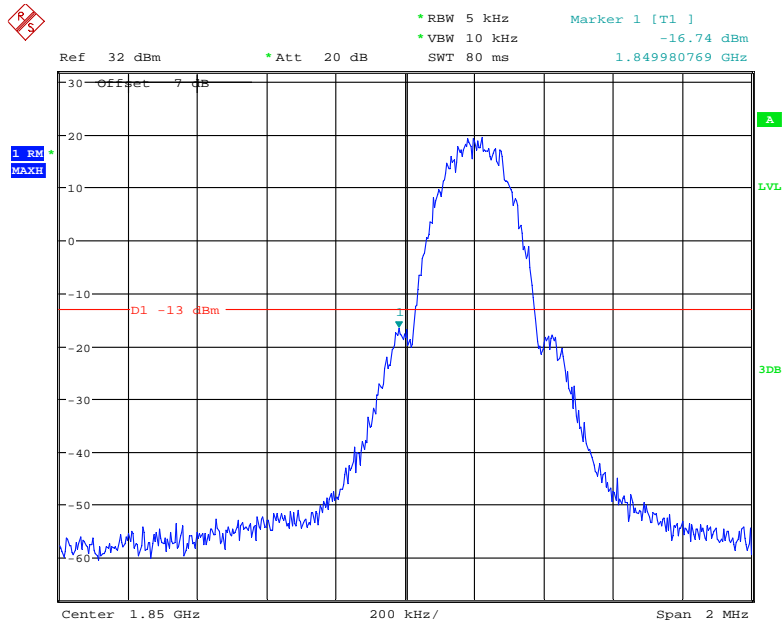

Date: 11.JUN.2021 09:40:19

PCS Band, Right Band Edge for GSM (GMSK) Mode

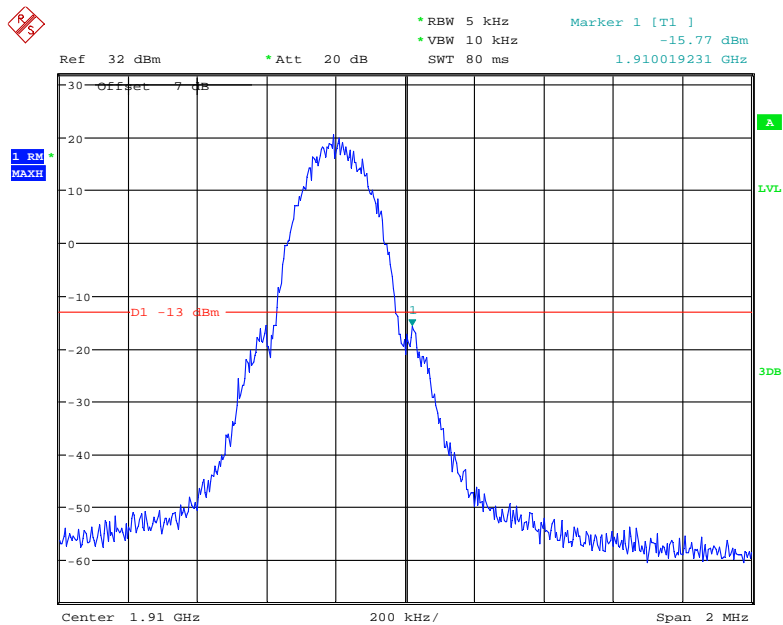

Date: 11.JUN.2021 09:35:26

FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

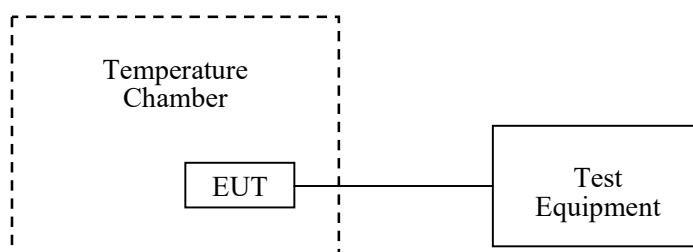

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Carl Yang on 2021-06-11.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, f₀ =836.6MHz				
Temperature (°C)	Voltage Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	4	0.0048	2.5
-20		3	0.0036	2.5
-10		4	0.0048	2.5
0		4	0.0048	2.5
10		4	0.0048	2.5
20		3	0.0036	2.5
30		6	0.0072	2.5
40		8	0.0096	2.5
50		-4	-0.0048	2.5
20		3.4	6	0.0072
	4.2	2	0.0024	2.5

PCS Band (Part 24E)

GSM Mode

Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Voltage Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	7	0.0037	pass
-20		6	0.0032	pass
-10		2	0.0011	pass
0		1	0.0005	pass
10		-5	-0.0027	pass
20		6	0.0032	pass
30		4	0.0021	pass
40		6	0.0032	pass
50		6	0.0032	pass
20		3.4	5	0.0027
	4.2	4	0.0021	pass

******* END OF REPORT *******