

Echelon Fitness Multimedia LLC

TEST REPORT

SCOPE OF WORK

FCC TESTING – ECH-STRENGTHPR

REPORT NUMBER

230724037SZN-002

ISSUE DATE

04 September 2024

[REVISED DATE]

[-----]

PAGES

24

DOCUMENT CONTROL NUMBER

FCC ID 249_C

© 2017 INTERTEK



Echelon Fitness Multimedia LLCApplication
For
Certification**FCC ID: 2AWD4-ECHL807T****STRENGTH PRO****Model: ECH-STRENGTHPR****Brand Name: echelon**

2.4GHz Transceiver

Report No.: 230724037SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-23]

Prepared and Checked by:

Approved by:

Tenet Cao
Assistant Engineer

Johnny Wang
Project Engineer
Date: 04 September 2024

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant X Class II Change _____

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No X

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes _____ No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-23 Edition] provision.

Report prepared by:

Tenet Cao
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, ShenZhen,
P.R. China
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

Table of Contents

| | | |
|------------|---|-----------|
| 1. | Summary of Test Result | 4 |
| 2. | General Description | 5 |
| 2.1 | Product Description | 5 |
| 2.2 | Related Submittal(s) Grants..... | 5 |
| 2.3 | Test Methodology..... | 5 |
| 2.4 | Test Facility | 5 |
| 3. | System Test Configuration | 6 |
| 3.1 | Justification | 6 |
| 3.2 | EUT Exercising Software | 6 |
| 3.3 | Special Accessories | 6 |
| 3.4 | Equipment Modification | 7 |
| 3.5 | Measurement Uncertainty | 7 |
| 3.6 | Support Equipment List and Description..... | 7 |
| 4. | Emission Results | 8 |
| 4.1 | Radiated Test Results..... | 8 |
| 4.1.1 | Field Strength Calculation..... | 8 |
| 4.1.2 | Radiated Emission Configuration Photograph | 9 |
| 4.1.3 | Radiated Emissions | 9 |
| 4.1.4 | Transmitter Spurious Emissions (Radiated)..... | 12 |
| 4.2 | Conducted Emission Configuration Photograph | 15 |
| 4.2.1 | Conducted Emission | 15 |
| 5. | Equipment Photographs | 18 |
| 6. | Product Labelling | 18 |
| 7. | Technical Specifications | 18 |
| 8. | Instruction Manual | 18 |
| 9. | Miscellaneous Information | 19 |
| 9.1 | Bandedge Plot..... | 19 |
| 9.2 | 20dB bandwidth..... | 21 |
| 9.3 | Discussion of Pulse Desensitization | 22 |
| 9.4 | Calculation of Average Factor..... | 22 |
| 9.5 | Emissions Test Procedures | 23 |
| 10. | Test Equipment List | 24 |

1. Summary of Test Result

Applicant: Echelon Fitness Multimedia LLC

Applicant Address: 605 Chestnut Street Suite 700 Chattanooga, TN 37450 United States

Manufacturer: Echelon Fitness Multimedia LLC

Manufacturer Address: 605 Chestnut Street Suite 700 Chattanooga, TN 37450 United States

MODEL: ECH-STRENGTHPR

FCC ID: 2AWD4-ECHL807T

| Test Specification | Reference | Results |
|-------------------------------|------------------------|---------|
| Transmitter Radiated Emission | 15.249 &15.209 &15.205 | Pass |
| Conducted Emission | 15.207 | Pass |
| Bandedge | 15.249 &15.209 &15.205 | Pass |
| 20dB Bandwidth | 15.215(c) | Pass |

Notes: The EUT uses a Built-in rod antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2. General Description

2.1 Product Description

The Equipment Under Test (EUT) is a STRENGTH PRO with 2.4GWi-Fi function operating at 2412-2462MHz and 5GWi-Fi function operating at 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz and Bluetooth 5.0 (Dual Mode: BR/EDR+BLE) function operating at 2402-2480MHz. The EUT is powered by AC AC120V/60Hz. For more detailed features description, please refer to the user's manual.

Antenna Type: Built-in rod antenna

Modulation Type: GFSK

Antenna Gain: 1.42dBi Max

Bluetooth Version: 5.0 (Dual Mode)

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the STRENGTH PRO which has Bluetooth (BLE) function.

For the Bluetooth (BR/EDR) function was tested and demonstrated in report 230724037SZN-001.

For the 2.4GHz WIFI function was tested and demonstrated in report 230724037SZN-003.

For the 5GHz WIFI function was tested and demonstrated in report 230724037SZN-004.

For the other function was tested and demonstrated in FCC SDoC report 230724037SZN-006.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3. System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by AC120V/60Hz during the test, only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.1m. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meters reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The EUT and transmitting antenna was centered on the turntable.

Radiated emission measurements were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

All modes (BT, BT+2.4G WIFI, BT+5G WIFI) are tested only the worst data was reported in this report.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Testing Software: BK32xx RF Test, Version: V1.8.2

3.3 Special Accessories

No special accessories used.

3.4 Equipment Modification

Any modifications installed previous to testing by Echelon Fitness Multimedia LLC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

| Description | Manufacturer | Remark |
|---|--------------|---------------|
| Portable computer (Provided by Intertek) | DELL | Latitude 3480 |

4. Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
AV = -10 dB
FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 dB μ V/m

Level in μ V/m = Common Antilogarithm [(42 dB μ V/m)/20] = 125.9 μ V/m

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
288.000000 MHz

Judgement: Passed by 1.6 dB

TEST PERSONNEL:

Sign on file

Tenet Cao, Project Engineer
Typed/Printed Name

27 February 2024
Date


Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous Transmission

ANT Polarity: Horizontal

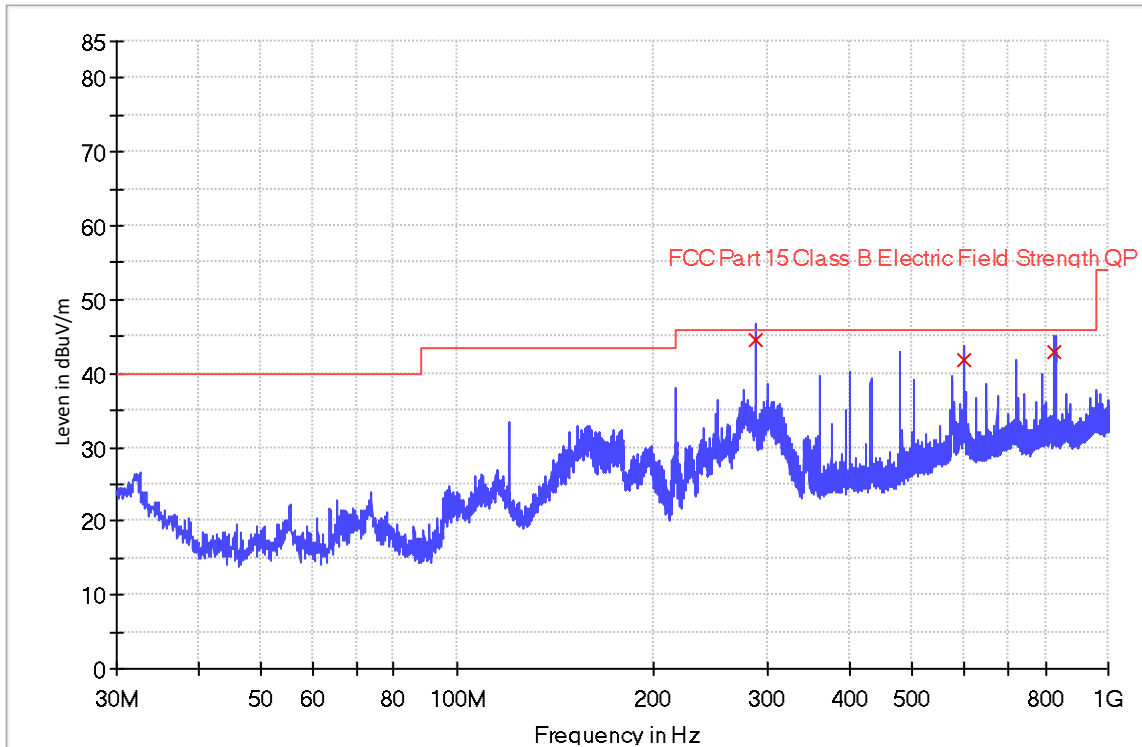

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|--------------|------------|-------------------|----------------------|
| 288.000000 | 44.4 | 1000.0 | 120.000 | H | 19.9 | 1.6 | 46.0 |
| 600.004333 | 41.7 | 1000.0 | 120.000 | H | 29.1 | 4.3 | 46.0 |
| 826.143667 | 42.8 | 1000.0 | 120.000 | H | 31.9 | 3.2 | 46.0 |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)


Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 27 February 2024

Worst Case Operating Mode: Simultaneous Transmission

ANT Polarity: Vertical

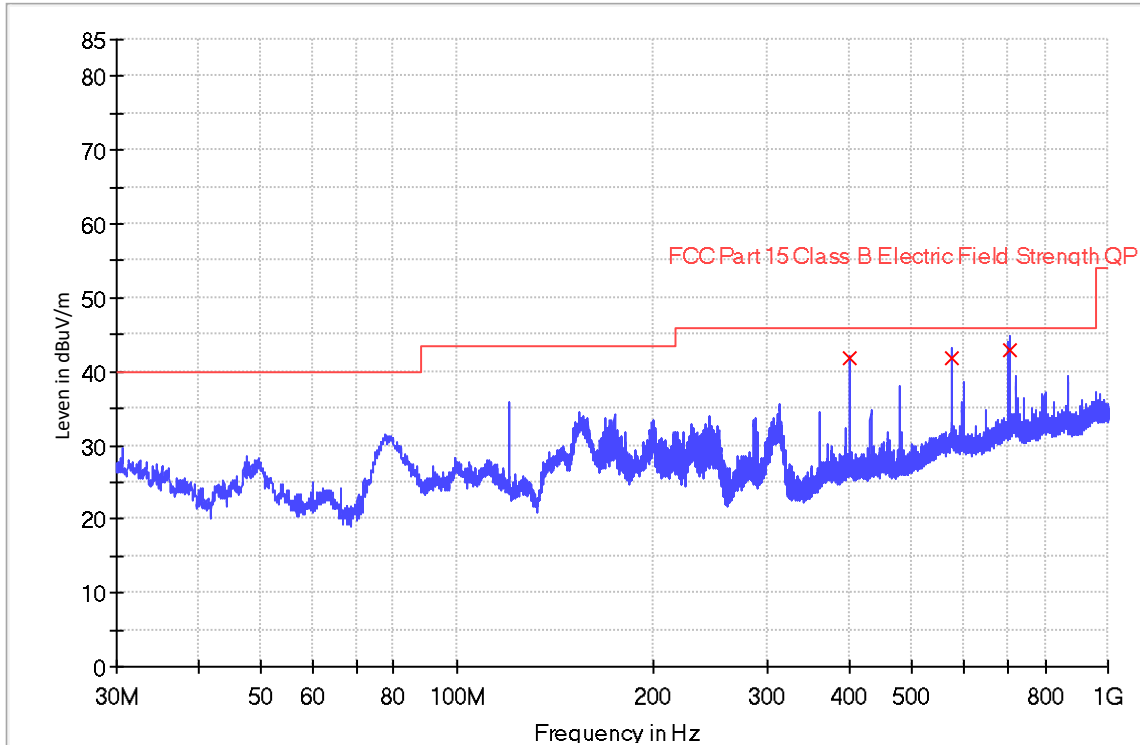

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Polarization | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|--------------|------------|-------------------|----------------------|
| 399.990333 | 41.9 | 1000.0 | 120.000 | V | 25.4 | 4.1 | 46.0 |
| 575.980667 | 41.7 | 1000.0 | 120.000 | V | 29.0 | 4.3 | 46.0 |
| 704.926000 | 42.8 | 1000.0 | 120.000 | V | 30.9 | 3.2 | 46.0 |

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
9608.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.5 dB

TEST PERSONNEL:

Sign on file

Tenet Cao, Project Engineer

Typed/Printed Name

29 August 2023

Date

Applicant: Echelon Fitness Multimedia LLC

Model: ECH-STRENGTHPR

Date of Test: 29 August 2023

Worst Case Operating Mode: Transmitting

Radiated Emissions

(2402MHz)

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Vertical | 2402.000 | 108.1 | 36.7 | 28.1 | 99.5 | 114.0 | -14.5 |
| Vertical | 4804.000 | 57.7 | 36.7 | 35.5 | 56.5 | 74.0 | -17.5 |
| Vertical | 7206.000 | 47.8 | 36.1 | 36.5 | 48.2 | 74.0 | -25.8 |
| Vertical | 9608.000 | 50.2 | 36.3 | 38.0 | 51.9 | 74.0 | -22.1 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|------------------------------|-------------|
| Vertical | 2402.000 | 88.7 | 36.7 | 28.1 | 80.1 | 94.0 | -13.9 |
| Vertical | 4804.000 | 36.0 | 36.7 | 35.5 | 34.8 | 54.0 | -19.2 |
| Vertical | 7206.000 | 39.5 | 36.1 | 36.5 | 39.9 | 54.0 | -14.1 |
| Vertical | 9608.000 | 42.8 | 36.3 | 38.0 | 44.5 | 54.0 | -9.5 |

(2440MHz)

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|---------------------------|-------------|
| Vertical | 2440.000 | 105.0 | 36.7 | 28.1 | 96.4 | 114.0 | -17.6 |
| Vertical | 4880.000 | 53.1 | 36.7 | 35.5 | 51.9 | 74.0 | -22.1 |
| Vertical | 7320.000 | 46.4 | 36.1 | 37.2 | 47.5 | 74.0 | -26.5 |
| Vertical | 9760.000 | 48.6 | 36.2 | 37.0 | 49.4 | 74.0 | -24.6 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|--------------------|------------------------------|-------------|
| Vertical | 2440.000 | 92.9 | 36.7 | 28.1 | 84.3 | 94.0 | -9.7 |
| Vertical | 4880.000 | 36.4 | 36.7 | 35.5 | 35.2 | 54.0 | -18.8 |
| Vertical | 7320.000 | 39.2 | 36.1 | 37.2 | 40.3 | 54.0 | -13.7 |
| Vertical | 9760.000 | 42.4 | 36.2 | 37.0 | 43.2 | 54.0 | -10.8 |

(2480MHz)

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB μ V/m) | Peak Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|---------------------------------|-------------|
| Vertical | 2480.000 | 107.1 | 36.7 | 28.1 | 98.5 | 114.0 | -15.5 |
| Vertical | 4960.000 | 45.7 | 36.7 | 35.5 | 44.5 | 74.0 | -29.5 |
| Vertical | 7440.000 | 46.0 | 36.1 | 37.2 | 47.1 | 74.0 | -26.9 |
| Vertical | 9920.000 | 49.0 | 36.3 | 38.9 | 51.6 | 74.0 | -22.4 |

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB μ V/m) | Average Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|------------------------------------|-------------|
| Vertical | 2480.000 | 90.9 | 36.7 | 28.1 | 82.3 | 94.0 | -11.7 |
| Vertical | 4960.000 | 39.3 | 36.7 | 35.5 | 38.1 | 54.0 | -15.9 |
| Vertical | 7440.000 | 39.1 | 36.1 | 37.2 | 40.2 | 54.0 | -13.8 |
| Vertical | 9920.000 | 41.8 | 36.3 | 38.9 | 44.4 | 54.0 | -9.6 |

Notes:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Tenet Cao

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst case conducted emission configuration photographs are saved with filename: conducted photos.pdf.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
3.478000MHz

Judgement: Passed by 10.5dB margin

TEST PERSONNEL:

Sign on file


Tenet Cao, Project Engineer
Typed/Printed Name

27 February 2024
Date

Applicant: Echelon Fitness Multimedia LLC
 Model: ECH-STRENGTHPR
 Date of Test: 27 February 2024
 Worst Case Operating Mode: Simultaneous transmission
 Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

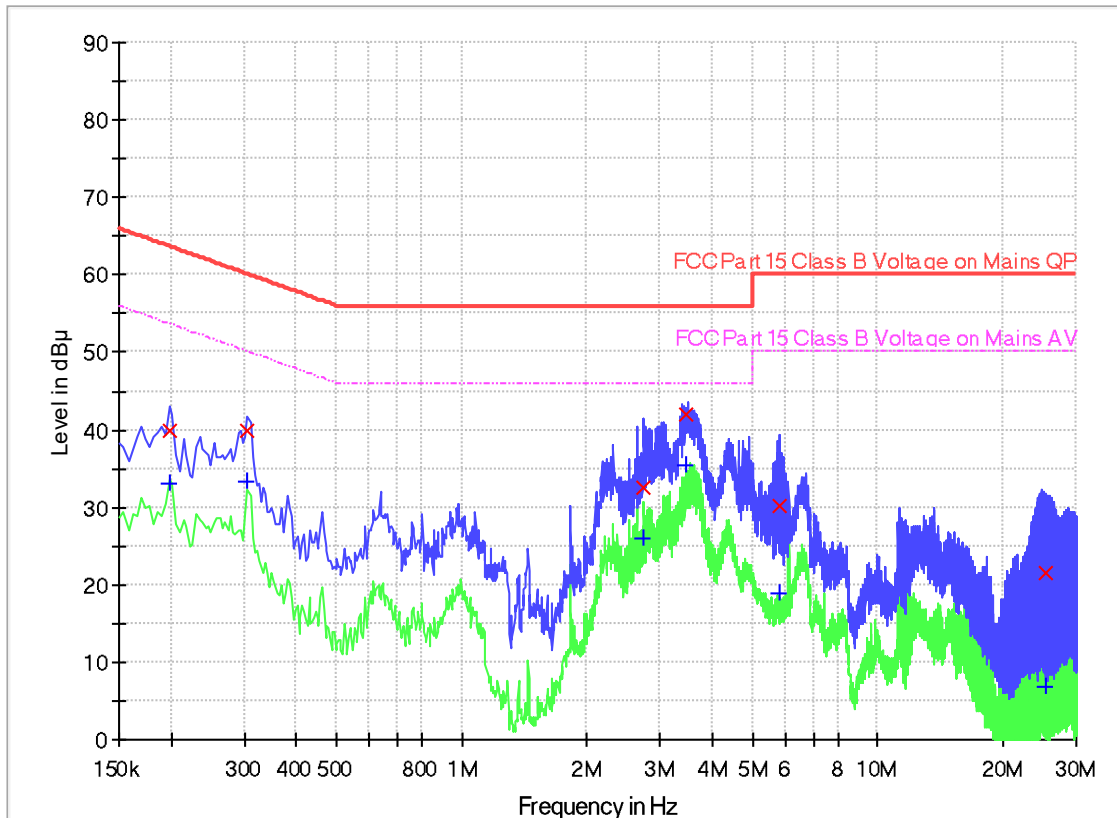

Limit and Margin QP

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.198000 | 40.0 | 9.000 | L1 | 9.6 | 23.7 | 63.7 |
| 0.306000 | 39.9 | 9.000 | L1 | 9.7 | 20.2 | 60.1 |
| 2.742000 | 32.6 | 9.000 | L1 | 9.7 | 23.4 | 56.0 |
| 3.478000 | 42.0 | 9.000 | L1 | 9.8 | 14.0 | 56.0 |
| 5.810000 | 30.1 | 9.000 | L1 | 9.8 | 29.9 | 60.0 |
| 25.226000 | 21.6 | 9.000 | L1 | 10.9 | 38.4 | 60.0 |


Limit and Margin AV

| Frequency (MHz) | Average (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|
| 0.198000 | 33.1 | 9.000 | L1 | 9.6 | 20.6 | 53.7 |
| 0.306000 | 33.2 | 9.000 | L1 | 9.7 | 16.9 | 50.1 |
| 2.742000 | 26.0 | 9.000 | L1 | 9.7 | 20.0 | 46.0 |
| 3.478000 | 35.5 | 9.000 | L1 | 9.8 | 10.5 | 46.0 |
| 5.810000 | 19.0 | 9.000 | L1 | 9.8 | 31.0 | 50.0 |
| 25.226000 | 6.7 | 9.000 | L1 | 10.9 | 43.3 | 50.0 |

Applicant: Echelon Fitness Multimedia LLC
 Model: ECH-STRENGTHPR
 Date of Test: 27 February 2024
 Worst Case Operating Mode: Simultaneous transmission
 Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

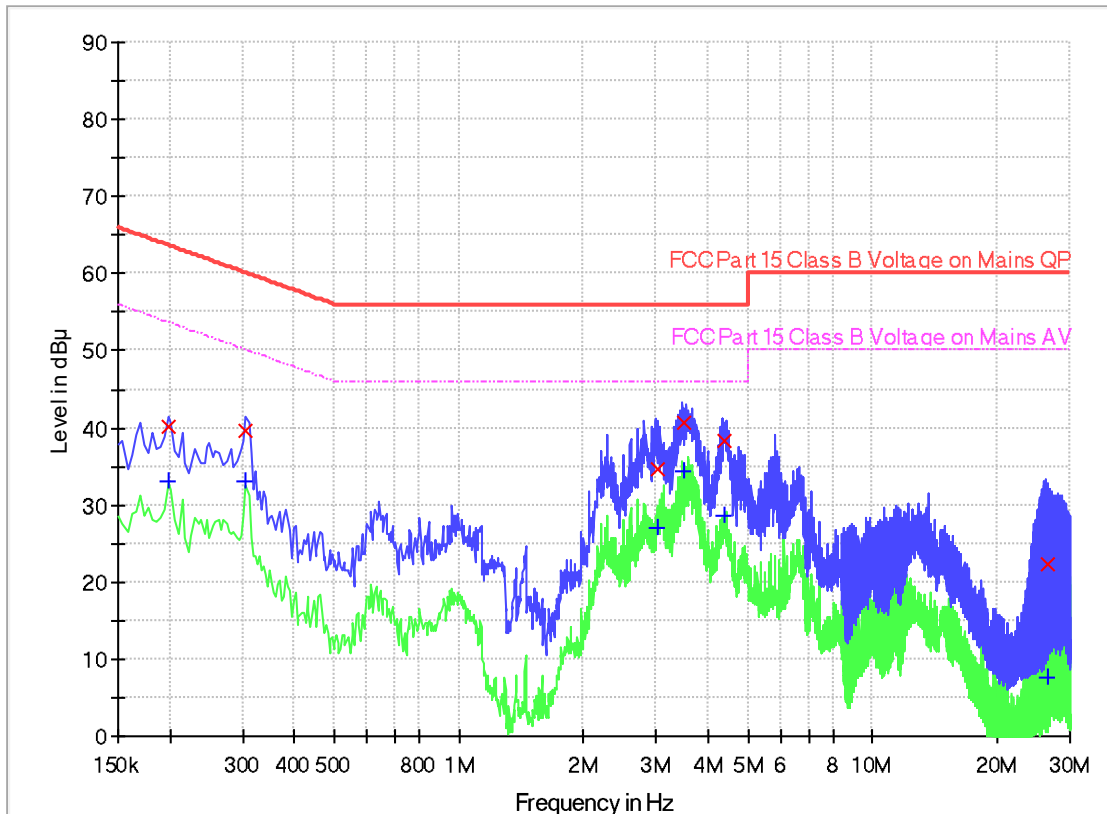

Limit and Margin QP

| Frequency (MHz) | QuasiPeak (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|
| 0.198000 | 40.1 | 9.000 | N | 9.6 | 23.6 | 63.7 |
| 0.306000 | 39.7 | 9.000 | N | 9.6 | 20.4 | 60.1 |
| 3.026000 | 34.6 | 9.000 | N | 9.7 | 21.4 | 56.0 |
| 3.510000 | 40.7 | 9.000 | N | 9.7 | 15.3 | 56.0 |
| 4.366000 | 38.2 | 9.000 | N | 9.8 | 17.8 | 56.0 |
| 26.462000 | 22.3 | 9.000 | N | 10.9 | 37.7 | 60.0 |

Limit and Margin AV

| Frequency (MHz) | Average (dBuV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|
| 0.198000 | 33.2 | 9.000 | N | 9.6 | 20.5 | 53.7 |
| 0.306000 | 33.0 | 9.000 | N | 9.6 | 17.1 | 50.1 |
| 3.026000 | 27.1 | 9.000 | N | 9.7 | 18.9 | 46.0 |
| 3.510000 | 34.4 | 9.000 | N | 9.7 | 11.6 | 46.0 |
| 4.366000 | 28.5 | 9.000 | N | 9.8 | 17.5 | 46.0 |
| 26.462000 | 7.7 | 9.000 | N | 10.9 | 42.3 | 50.0 |

5. Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6. Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7. Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8. Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9. Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lowest frequency channel (2402MHz):

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 99.50 \text{ dB}\mu\text{v/m} - 48.03 \text{ dB} \\ &= 51.47 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot

$$\begin{aligned} &= 80.10 \text{ dB}\mu\text{v/m} - 48.03 \text{ dB} \\ &= 32.07 \text{ dB}\mu\text{v/m} \end{aligned}$$

(ii) Highest frequency channel (2480MHz)

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot


$$\begin{aligned} &= 98.50 \text{ dB}\mu\text{v/m} - 48.85 \text{ dB} \\ &= 49.65 \text{ dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the bandedge plot


$$\begin{aligned} &= 82.30 \text{ dB}\mu\text{v/m} - 48.85 \text{ dB} \\ &= 33.45 \text{ dB}\mu\text{v/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

Lowest frequency Channel


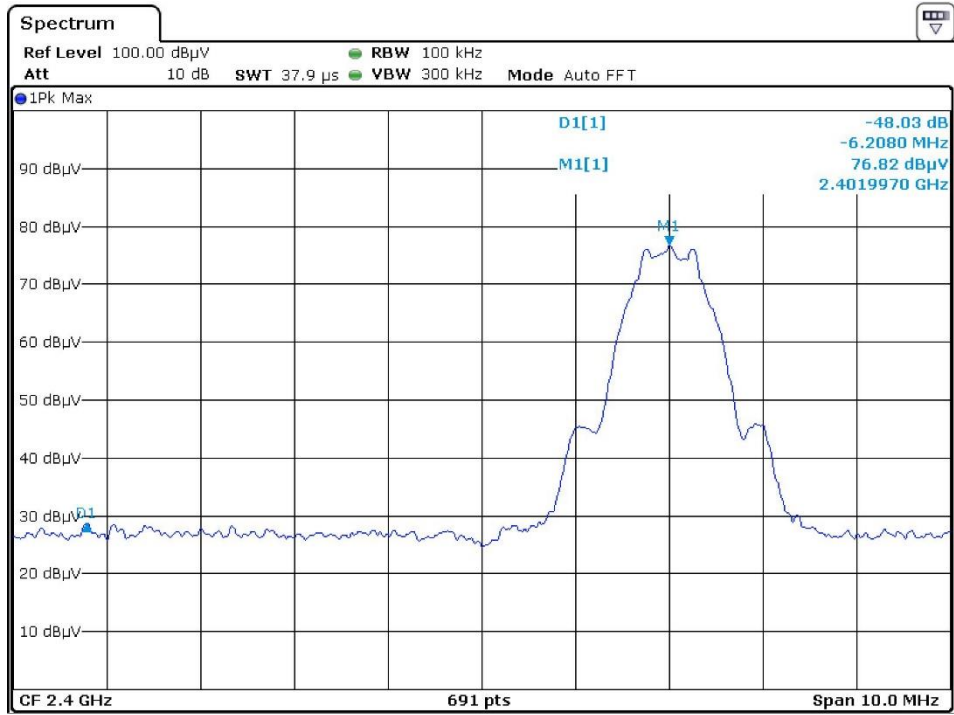


Highest frequency Channel

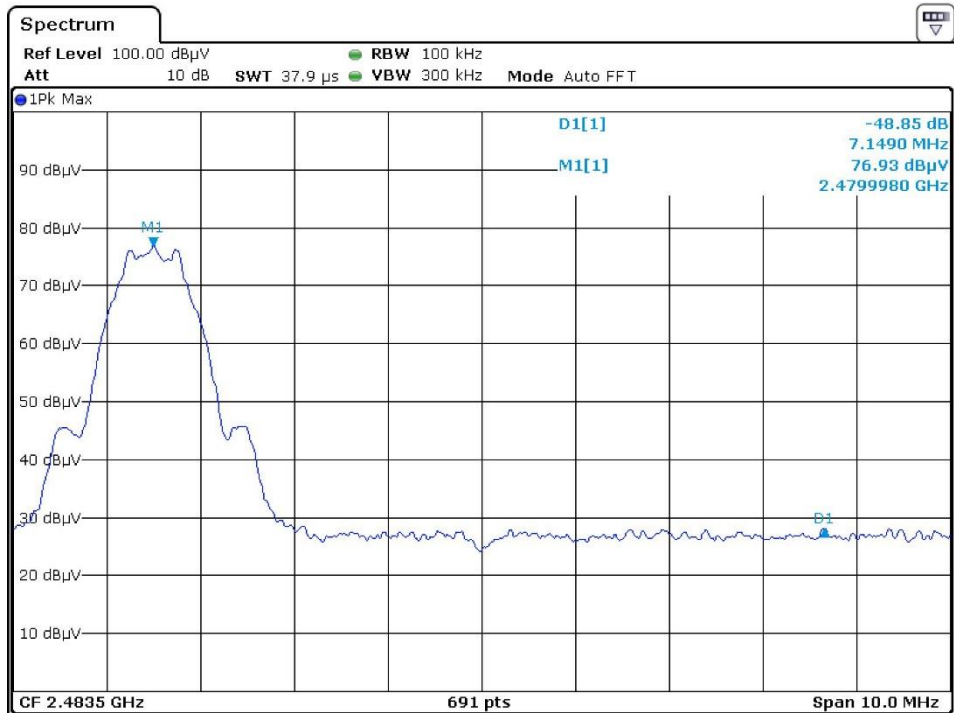

9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

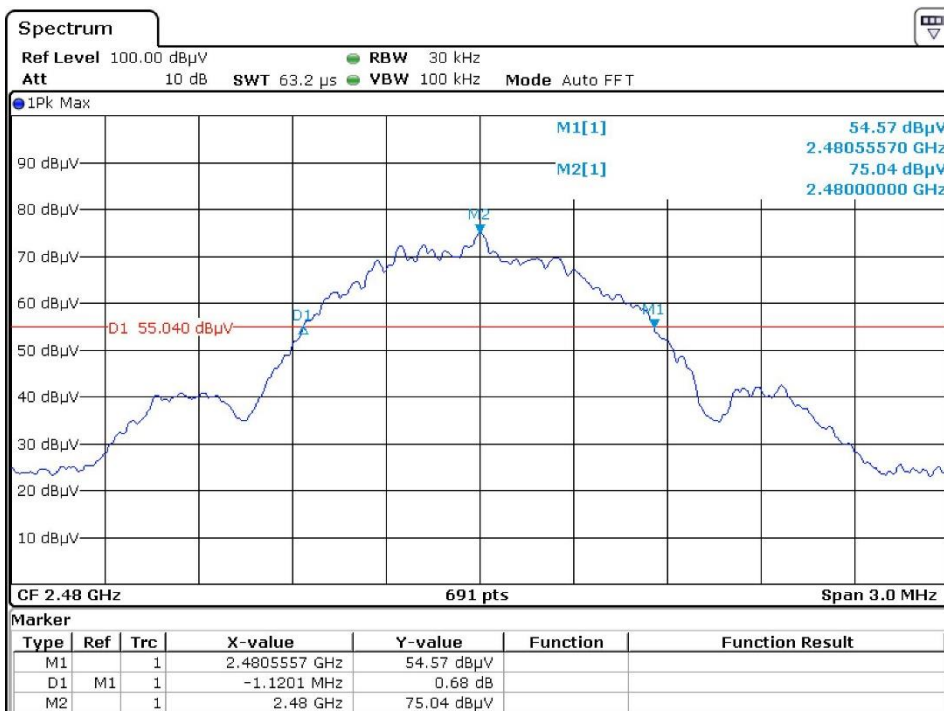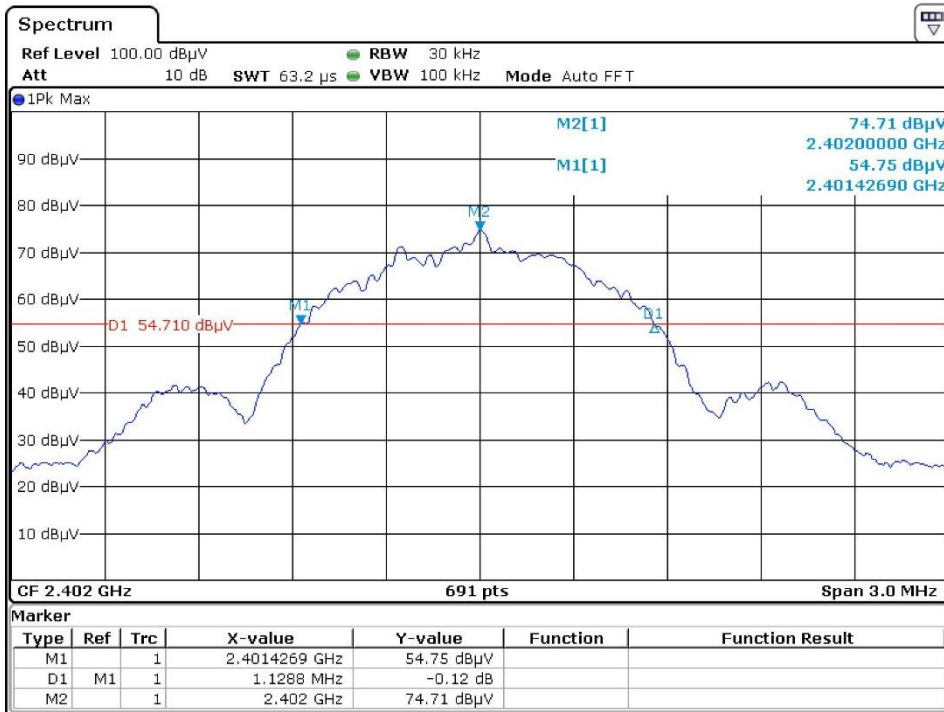

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

9.4 Calculation of Average Factor

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

| | |
|---|---|
| | See attached spectrum analyzer chart (s) for Transmitter timing |
| | See Transmitter timing diagram provided by manufacturer |
| x | Not applicable, duty cycle was not used. |

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10. Test Equipment List

| Equipment No. | Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Due Date |
|---------------|--------------------------------------|-----------------|-----------------|----------------|--------------------------|--------------------------|
| SZ056-06 | Signal Analyzer | R&S | FSV 40 | 101101 | 2022-12-19 2023-12-13 | 2023-12-19 2024-12-13 |
| SZ062-10 | RF Cable | Bedeia | RG 58 | -- | 2023-05-01 2023-11-01 | 2023-11-01 2024-05-01 |
| SZ056-08 | Signal Analyzer | R&S | FSV 40 | 101430 | 2022-12-19 2023-12-13 | 2023-12-19 2024-12-13 |
| SZ185-03 | EMI Receiver | R&S | ESR7 | 101975 | 2023-04-27 | 2024-04-27 |
| SZ061-06 | Active Loop Antenna | Electro-Metrics | EM-6876 | 217 | 2021-05-18 | 2024-05-18 |
| SZ061-12 | BiConiLog Antenna | ETS | 3142E | 00166158 | 2021-08-04 | 2024-08-04 |
| SZ061-09 | Double-Ridged Waveguide Horn Antenna | ETS | 3115 | 00092347 | 2022-10-14 | 2025-10-14 |
| SZ061-15 | Double-Ridged Waveguide Horn Antenna | ETS | 3116C-PA | 00224718 | 2021-07-06 | 2024-07-06 |
| SZ181-08 | Microwave System Amplifier | Agilent | 83017A | MY57280108 | 2023-07-27 | 2024-07-27 |
| SZ188-05 | Anechoic Chamber | ETS | FACT 3-2.0 | CT001880-Q1391 | 2021-05-25 | 2024-05-25 |
| SZ062-23 | RF Cable | RADIALL | SF104PE | MY4262/4PE | 2022-10-17 2023-09-26 | 2023-10-17 2024-09-26 |
| SZ062-35 | RF Cable | Rebes | A50-3.5M3.5M-8M | 19100879 | 2022-11-17 2023-11-14 | 2023-11-17 2024-11-14 |
| SZ067-04 | Notch Filter | Micro-Tronics | BRM50702-02 | 015 | 2023-04-27 | 2024-04-27 |
| SZ185-02 | EMI Test Receiver | R&S | ESCI | 100692 | 2023-07-11 | 2024-07-11 |
| SZ187-01 | Two-Line V-Network | R&S | ENV216 | 100072 | 2022-10-24 2023-10-18 | 2023-10-24 2024-10-18 |
| SZ187-02 | Two-Line V-Network | R&S | ENV216 | 100073 | 2023-04-27 | 2024-04-27 |
| SZ188-03 | Shielding Room | ETS | RFD-100 | 4100 | 2022-12-20 | 2025-12-20 |

***** End of Report*****