




FCC Radio Test Report

FCC ID: 2AWNK-TR100

Original Grant

Report No. : TB-FCC178224
Applicant : Shenzhen Apeman Innovations Technology Co.,Ltd.
Equipment Under Test (EUT)
EUT Name : Teckin Roll
Model No. : TR100
Series Model No. : TR200, TR300, TR400, TR500
S/N : 01205300015, 01205300016
Brand Name : Teckin
Sample ID : 20201216-10 -1#& 20201216-10-2#
Receipt Date : 2021-01-06
Test Date : 2021-01-07 to 2021-01-22
Issue Date : 2021-01-23
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC and IC requirements

Test/Witness Engineer :  Rebecca
Engineer Supervisor :  Ivan Su
Engineer Manager :  Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	6
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY	10
3. TEST SOFTWARE	10
4. TEST EQUIPMENT	11
5. CONDUCTED EMISSION TEST	12
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode	13
5.6 Test Data.....	13
6. RADIATED EMISSION TEST	14
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Condition	17
6.6 Test Data.....	17
7. RESTRICTED BANDS REQUIREMENT	18
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Condition	19
7.6 Test Data.....	19
8. BANDWIDTH TEST	20
8.1 Test Standard and Limit.....	20
8.2 Test Setup.....	20
8.3 Test Procedure.....	20
8.4 Deviation From Test Standard.....	20
8.5 EUT Operating Condition	20

8.6 Test Data.....	20
9. PEAK OUTPUT POWER TEST.....	21
9.1 Test Standard and Limit.....	21
9.2 Test Setup.....	21
9.3 Test Procedure.....	21
9.4 Deviation From Test Standard.....	21
9.5 EUT Operating Condition	21
9.6 Test Data.....	21
10. POWER SPECTRAL DENSITY TEST	22
10.1 Test Standard and Limit	22
10.2 Test Setup.....	22
10.3 Test Procedure.....	22
9.4 Deviation From Test Standard.....	22
9.5 EUT Operating Condition	22
9.6 Test Data.....	22
11. ANTENNA REQUIREMENT.....	23
11.1 Standard Requirement.....	23
11.2 Deviation From Test Standard.....	23
11.3 Antenna Connected Construction.....	23
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	24
ATTACHMENT B-- RADIATED EMISSION TEST DATA	26
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT AND BAND-EDGE TEST DATA	40
ATTACHMENT D-- BANDWIDTH TEST DATA.....	60
ATTACHMENT E-- PEAK OUTPUT POWER AND E.I.R.P DATA.....	68
ATTACHMENT F-- POWER SPECTRAL DENSITY TEST DATA.....	71

1. General Information about EUT

1.1 Client Information

Applicant	:	Shenzhen Apeman Innovations Technology Co.,Ltd.
Address	:	1808, Heng Lu E Times Building, No. 159, North Pingji Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, CHINA
Manufacturer	:	Shenzhen Apeman Innovations Technology Co.,Ltd.
Address	:	1808, Heng Lu E Times Building, No. 159, North Pingji Road, Hehua Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, CHINA

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Teckin Roll
Models No.	:	TR100, TR200, TR300, TR400, TR500
Model Difference	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is appearance.
Product Description	Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
	Number of Channel:	802.11b/g/n(HT20):11 channels see note(3) 802.11n(HT40):7 channels see note(3)
	RF Output Power:	802.11b: 13.95dBm 802.11g: 14.15dBm 802.11n(HT20): 14.12dBm 802.11n(HT40): 13.64dBm
	Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK,QPSK,16QAM,64QAM)
	Antenna Gain:	4.53 dBi FPC Antenna
Power Supply	:	DC 5V from Adapter(TPA-46050100UU): Input: AC 100-240V, 50/60Hz 0.15A Output: DC 5V, 1000mA
Software Version	:	20201208_V1.0.4
Hardware Version	:	TI01_MB_V1.1
Remark	:	The antenna gain and adapter provided by the applicant, the verified for the RF conduction test and adapter provided by TOBY test lab.

Note:

- (1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 15.247 Meas Guidance v05r02.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(3) Channel List:


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

Note: CH 01~CH 11 for 802.11b/g/n(HT20)
CH 03~CH 9 for 802.11n(HT40)

(4) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

Charging Mode+TX mode

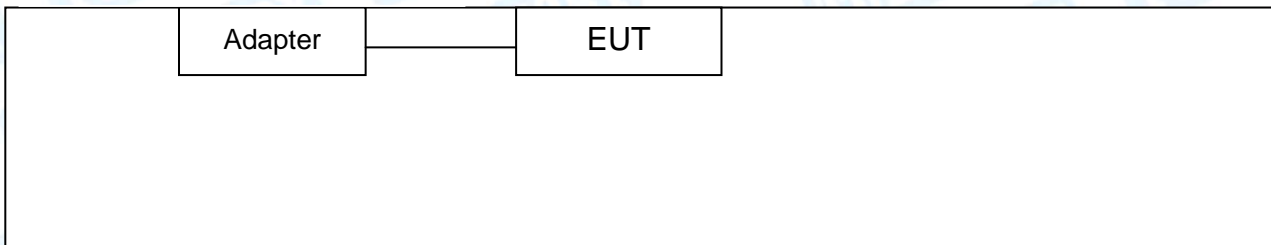

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
----	-----	----	----	----
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
----	-----	----	----	----

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging + TX B Mode

For Radiated Test	
Final Test Mode	Description
Mode 2	TX Mode B Mode Channel 01/06/11
Mode 3	TX Mode G Mode Channel 01/06/11
Mode 4	TX Mode N(HT20) Mode Channel 01/06/11
Mode 5	TX Mode N(HT40) Mode Channel 03/06/09

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, Middle, lowest available channels, and the worst case data rate as follows:
 802.11b Mode: CCK
 802.11g Mode: OFDM
 802.11n (HT20) Mode: MCS 0
 802.11n (HT40) Mode: MCS 0
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel&Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software: REALTEK 11n 8188FU USB WLAN NIC Massproduction Kit			
Test Mode: Continuously transmitting			
Mode	Data Rate	Channel	Parameters
802.11b	CCK/ 1Mbps	01	33
	CCK/ 1Mbps	06	33
	CCK/ 1Mbps	11	33
802.11g	OFDM/ 6Mbps	01	49
	OFDM/ 6Mbps	06	49
	OFDM/ 6Mbps	11	49
802.11n(HT20)	MCS 0	01	49
	MCS 0	06	49
	MCS 0	11	49
802.11n(HT40)	MCS 0	03	47
	MCS 0	06	47
	MCS 0	09	47

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

FCC Part 15 Subpart C(15.247)				
Standard Section FCC	Test Item	Test Sample(s)	Judgment	Remark
15.203	Antenna Requirement	20201216-10-2#	PASS	N/A
15.207(a)	Conducted Emission	20201216-10-1#	PASS	N/A
15.205&15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency	20201216-10-2#	PASS	N/A
15.247(a)(2)	6dB Bandwidth	20201216-10-2#	PASS	N/A
15.247(b)(3)	Conducted Max Output Power	20201216-10-2#	PASS	N/A
15.247(e)	Power Spectral Density	20201216-10-2#	PASS	N/A
15.205, 15.209&15.247(d)	Transmitter Radiated Spurious & Unwanted Emissions into Restricted Frequency	20201216-10-1# 20201216-10-2#	PASS	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Mar.01, 2020	Feb. 28, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.207

5.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

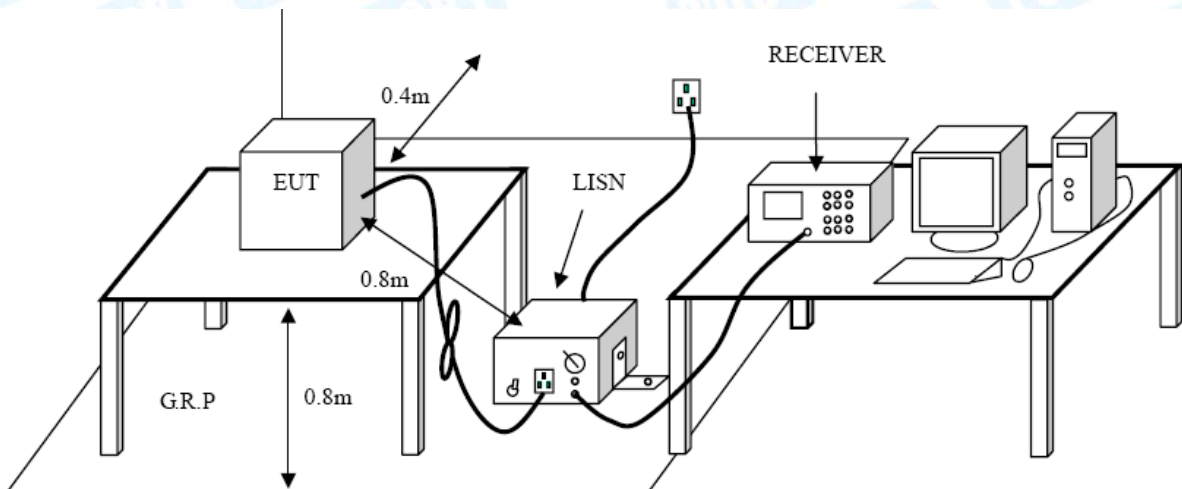

5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard
FCC Part 15.209

6.1.2 Test Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


6.2 Test Setup

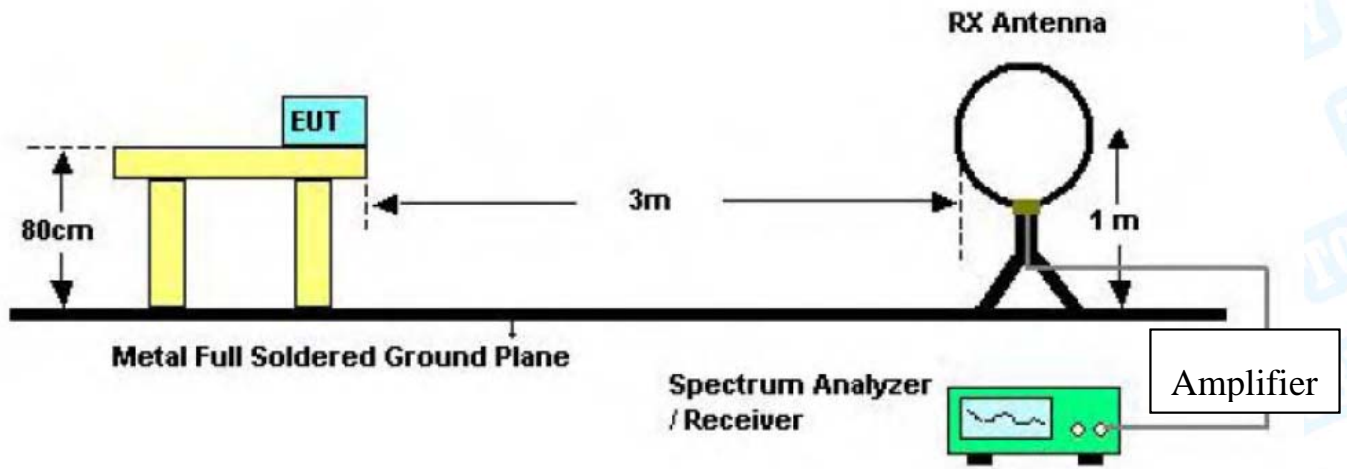

Below 30MHz Test Setup

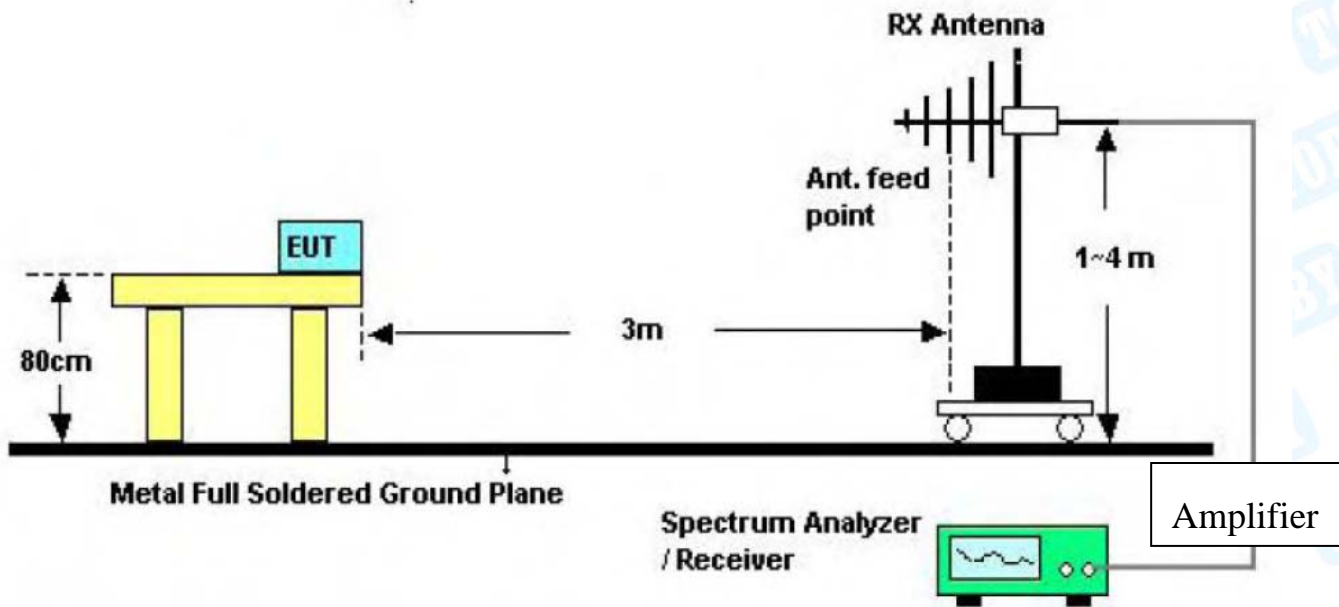

Below 1000MHz Test Setup

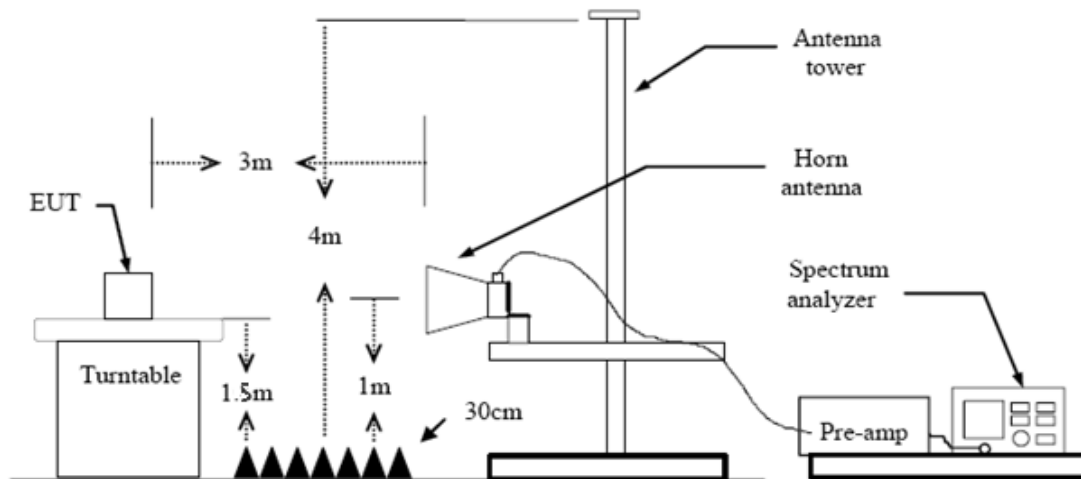

Above 1GHz Test Setup

6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

7. Restricted Bands Requirement


7.1 Test Standard and Limit

- 7.1.1 Test Standard
 - FCC Part 15.247(d)
 - FCC Part 15.209
 - FCC Part 15.205

7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

7.2 Test Setup

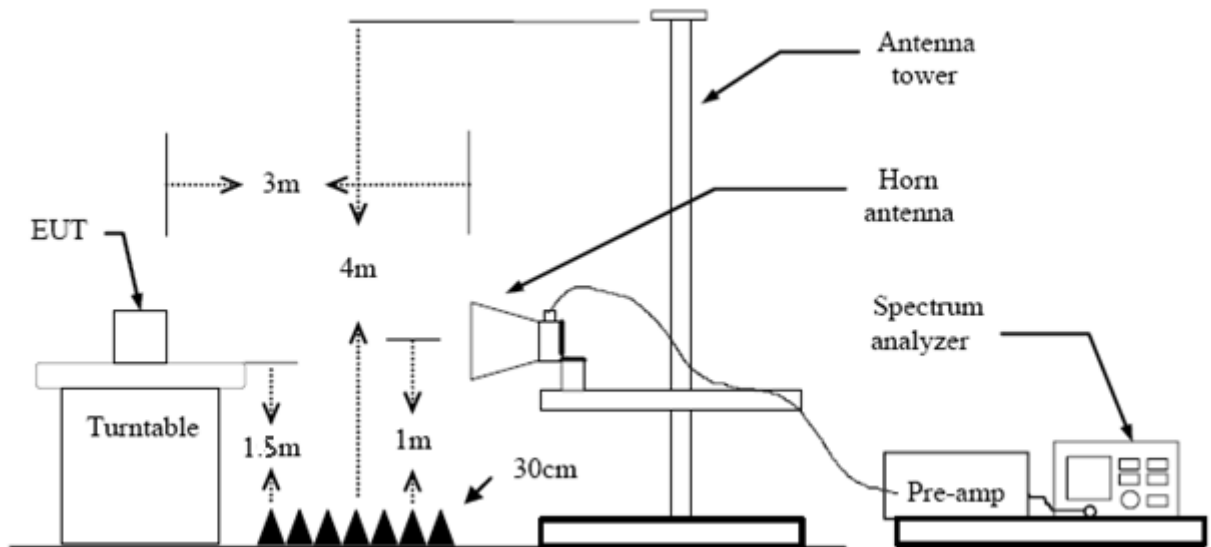

7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency below 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

7.6 Test Data

Please refer to the Attachment C.


8. Bandwidth Test

8.1 Test Standard and Limit

- 8.1.1 Test Standard
FCC Part 15.247 (a)(2)
- 8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

8.2 Test Setup



8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3)Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

8.6 Test Data

Please refer to the Attachment D.


9. Peak Output Power Test

9.1 Test Standard and Limit

- 9.1.1 Test Standard
FCC Part 15.247 (b)
- 9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

9.2 Test Setup

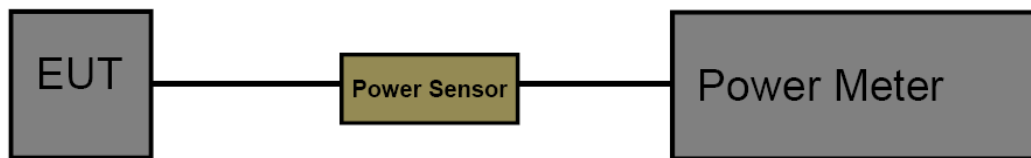

9.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247 (e)

10.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

10.2 Test Setup



10.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to DTS channel centre frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

9.6 Test Data

Please refer to the Attachment F.

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Deviation From Test Standard

No deviation

11.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 4.53dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

Result


The EUT antenna is a FPC Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data

Remark: All channels have been tested and Shows only the worst channels.

Temperature:	23.9°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worst case is reported		

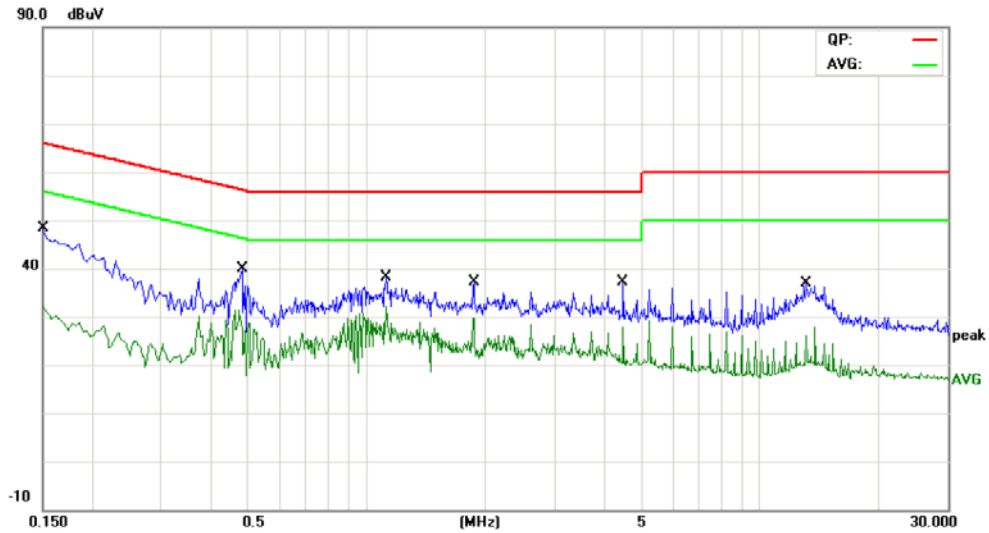


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	34.08	9.70	43.78	65.99	-22.21	QP
2		0.1500	19.80	9.70	29.50	55.99	-26.49	AVG
3		0.4820	25.35	9.70	35.05	56.30	-21.25	QP
4		0.4820	17.30	9.70	27.00	46.30	-19.30	AVG
5		1.1220	26.21	9.79	36.00	56.00	-20.00	QP
6	*	1.1220	21.74	9.79	31.53	46.00	-14.47	AVG
7		1.8700	25.89	9.71	35.60	56.00	-20.40	QP
8		1.8700	20.92	9.71	30.63	46.00	-15.37	AVG
9		4.4860	20.46	9.90	30.36	56.00	-25.64	QP
10		4.4860	15.60	9.90	25.50	46.00	-20.50	AVG
11		13.0820	18.70	9.92	28.62	60.00	-31.38	QP
12		13.0820	9.20	9.92	19.12	50.00	-30.88	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Temperature:	23.9°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worst case is reported		

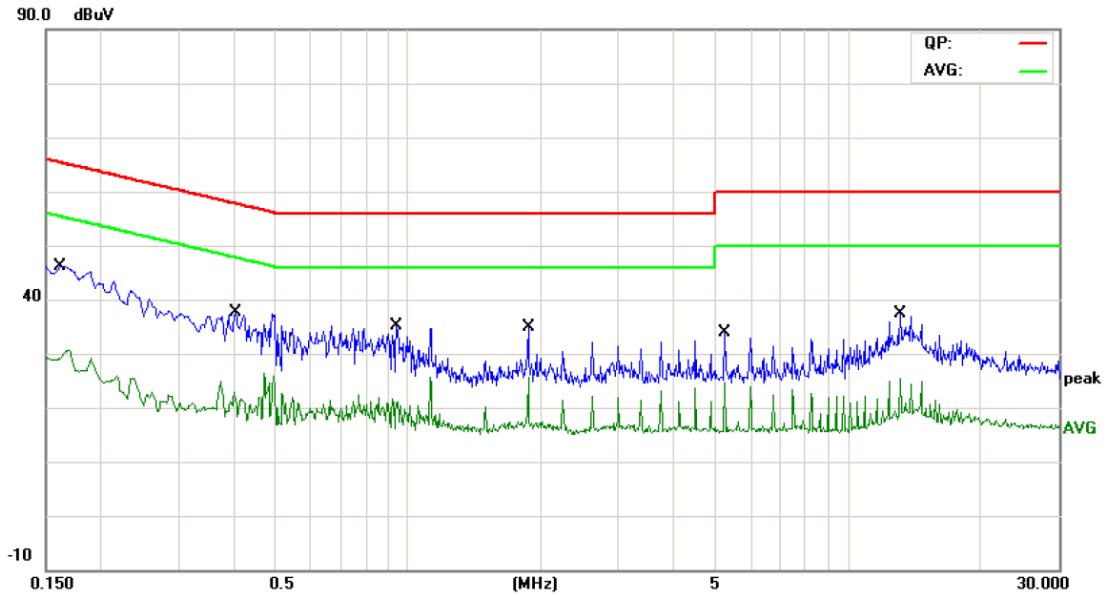

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	31.46	9.80	41.26	65.36	-24.10	QP
2		0.1620	16.46	9.80	26.26	55.36	-29.10	AVG
3		0.4060	21.09	9.80	30.89	57.73	-26.84	QP
4		0.4060	9.20	9.80	19.00	47.73	-28.73	AVG
5		0.9420	20.00	9.80	29.80	56.00	-26.20	QP
6		0.9420	10.49	9.80	20.29	46.00	-25.71	AVG
7		1.8700	20.49	9.80	30.29	56.00	-25.71	QP
8	*	1.8700	14.46	9.80	24.26	46.00	-21.74	AVG
9		5.2420	20.73	9.81	30.54	60.00	-29.46	QP
10		5.2420	14.97	9.81	24.78	50.00	-25.22	AVG
11		13.1020	17.38	9.96	27.34	60.00	-32.66	QP
12		13.1020	9.11	9.96	19.07	50.00	-30.93	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Attachment B-- Radiated Emission Test Data


9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		

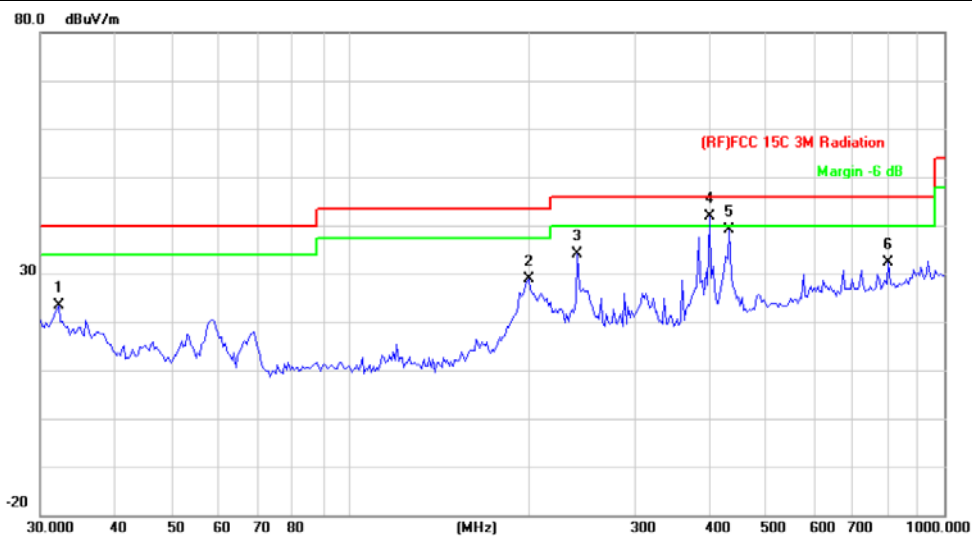


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.1795	37.91	-14.57	23.34	40.00	-16.66	peak
2		199.2855	48.71	-19.94	28.77	43.50	-14.73	peak
3		240.8304	51.74	-17.72	34.02	46.00	-11.98	peak
4	*	401.8385	54.22	-12.28	41.94	46.00	-4.06	peak
5		434.0651	51.21	-12.04	39.17	46.00	-6.83	peak
6		804.6028	38.11	-5.67	32.44	46.00	-13.56	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		

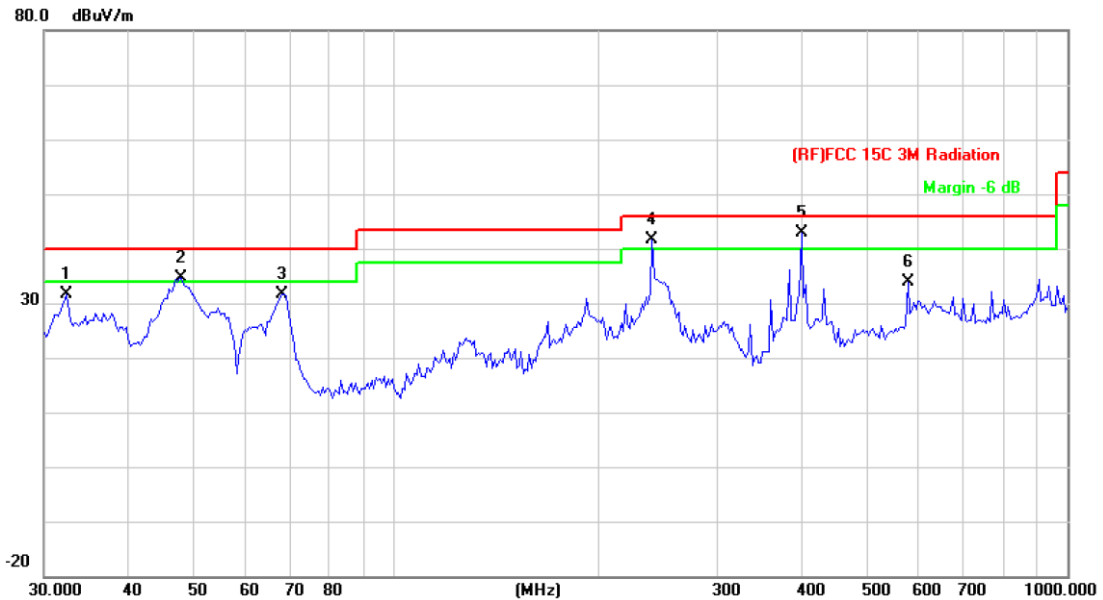

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.4059	46.26	-14.74	31.52	40.00	-8.48	peak
2	!	47.9940	56.99	-22.40	34.59	40.00	-5.41	peak
3		67.6751	55.14	-23.59	31.55	40.00	-8.45	peak
4	!	240.8304	59.37	-17.72	41.65	46.00	-4.35	peak
5	*	401.8385	55.08	-12.28	42.80	46.00	-3.20	peak
6		578.6699	42.33	-8.57	33.76	46.00	-12.24	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4823.860	42.14	13.16	55.30	74.00	-18.70	peak
2	*	4823.860	28.43	13.16	41.59	54.00	-12.41	AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4824.156	28.41	13.16	41.57	54.00	-12.43	AVG
2		4824.292	41.93	13.16	55.09	74.00	-18.91	peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
---------------------	--------	---------------------------	-----

Test Voltage:	AC 120V/60 Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX B Mode 2437MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4873.872	28.87	13.53	42.40	54.00	-11.60	AVG
2		4873.904	42.19	13.53	55.72	74.00	-18.28	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)								
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)								

Temperature:	23.2°C	Relative Humidity:	41%					
Test Voltage:	AC 120V/60 Hz							
Ant. Pol.	Vertical							
Test Mode:	TX B Mode 2437MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4874.168	28.63	13.53	42.16	54.00	-11.84	AVG
2		4874.340	41.97	13.53	55.50	74.00	-18.50	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)								
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)								

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		

Ant. Pol.	Horizontal						
Test Mode:	TX B Mode 2462MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		4924.486	42.48	13.89	56.37	74.00	-17.63 peak
2	*	4924.486	28.79	13.89	42.68	54.00	-11.32 AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							

Temperature:	23.2°C	Relative Humidity:	41%				
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Vertical						
Test Mode:	TX B Mode 2462MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	*	4923.950	29.17	13.89	43.06	54.00	-10.94 AVG
2		4923.996	42.73	13.89	56.62	74.00	-17.38 peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4823.846	28.62	13.16	41.78	54.00	-12.22	AVG
2		4824.158	42.68	13.16	55.84	74.00	-18.16	peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4823.754	28.65	13.16	41.81	54.00	-12.19	AVG
2		4824.222	42.76	13.16	55.92	74.00	-18.08	peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C	Relative Humidity:	41%
---------------------	--------	---------------------------	-----

Test Voltage:	AC 120V/60 Hz																																										
Ant. Pol.	Horizontal																																										
Test Mode:	TX G Mode 2437MHz																																										
Remark:	No report for the emission which more than 20dB below the prescribed limit.																																										
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4873.526</td> <td>42.40</td> <td>13.53</td> <td>55.93</td> <td>74.00</td> <td>-18.07</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4873.928</td> <td>28.60</td> <td>13.53</td> <td>42.13</td> <td>54.00</td> <td>-11.87</td> <td>AVG</td> </tr> </tbody> </table>								No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4873.526	42.40	13.53	55.93	74.00	-18.07	peak	2	*	4873.928	28.60	13.53	42.13	54.00	-11.87	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																				
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																																			
1		4873.526	42.40	13.53	55.93	74.00	-18.07	peak																																			
2	*	4873.928	28.60	13.53	42.13	54.00	-11.87	AVG																																			
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV) 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)																																										

Temperature:	23.2°C	Relative Humidity:	41%																																				
Test Voltage:	AC 120V/60 Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX G Mode 2437MHz																																						
Remark:	No report for the emission which more than 20dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4873.696</td> <td>42.87</td> <td>13.53</td> <td>56.40</td> <td>74.00</td> <td>-17.60</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4874.108</td> <td>28.87</td> <td>13.53</td> <td>42.40</td> <td>54.00</td> <td>-11.60</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4873.696	42.87	13.53	56.40	74.00	-17.60	peak	2	*	4874.108	28.87	13.53	42.40	54.00	-11.60	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4873.696	42.87	13.53	56.40	74.00	-17.60	peak																															
2	*	4874.108	28.87	13.53	42.40	54.00	-11.60	AVG																															
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV) 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)																																						

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		

Test Mode:	TX G Mode 2462MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
<hr/>								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4923.708	29.36	13.89	43.25	54.00	-10.75	AVG
2		4923.784	42.96	13.89	56.85	74.00	-17.15	peak
<hr/>								
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)								
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)								

Temperature:	23.2°C	Relative Humidity:	41%					
Test Voltage:	AC 120V/60 Hz							
Ant. Pol.	Vertical							
Test Mode:	TX G Mode 2462MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
<hr/>								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4924.068	43.19	13.89	57.08	74.00	-16.92	peak
2	*	4924.068	28.84	13.89	42.73	54.00	-11.27	AVG
<hr/>								
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)								
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)								

Temperature:	23.2°C		Relative Humidity:	41%			
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 *	4823.694	28.50	13.16	41.66	54.00	-12.34	AVG
2	4824.300	41.77	13.16	54.93	74.00	-19.07	peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							

Temperature:	23.2°C		Relative Humidity:	41%			
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Vertical						
Test Mode:	TX n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4823.588	42.64	13.16	55.80	74.00	-18.20	peak
2 *	4824.040	28.68	13.16	41.84	54.00	-12.16	AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							

Temperature:	23.2°C		Relative Humidity:	41%	
---------------------	--------	--	---------------------------	-----	--

Test Voltage:	AC 120V/60 Hz																																											
Ant. Pol.	Horizontal																																											
Test Mode:	TX n(HT20) Mode 2437MHz																																											
Remark:	No report for the emission which more than 20dB below the prescribed limit.																																											
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4873.842</td> <td>29.12</td> <td>13.53</td> <td>42.65</td> <td>54.00</td> <td>-11.35</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4874.020</td> <td>43.04</td> <td>13.53</td> <td>56.57</td> <td>74.00</td> <td>-17.43</td> <td>peak</td> </tr> </tbody> </table>									No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	4873.842	29.12	13.53	42.65	54.00	-11.35	AVG	2		4874.020	43.04	13.53	56.57	74.00	-17.43	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																					
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																																				
1	*	4873.842	29.12	13.53	42.65	54.00	-11.35	AVG																																				
2		4874.020	43.04	13.53	56.57	74.00	-17.43	peak																																				
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV) 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)																																											

Temperature:	23.2°C	Relative Humidity:	41%																																				
Test Voltage:	AC 120V/60 Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX n(HT20) Mode 2437MHz																																						
Remark:	No report for the emission which more than 20dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4874.342</td> <td>43.00</td> <td>13.53</td> <td>56.53</td> <td>74.00</td> <td>-17.47</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4874.342</td> <td>28.61</td> <td>13.53</td> <td>42.14</td> <td>54.00</td> <td>-11.86</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4874.342	43.00	13.53	56.53	74.00	-17.47	peak	2	*	4874.342	28.61	13.53	42.14	54.00	-11.86	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4874.342	43.00	13.53	56.53	74.00	-17.47	peak																															
2	*	4874.342	28.61	13.53	42.14	54.00	-11.86	AVG																															
Remark:	1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV) 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)																																						

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		

Ant. Pol.	Horizontal						
Test Mode:	TX n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		4924.094	42.17	13.89	56.06	74.00	-17.94 peak
2	*	4924.094	28.67	13.89	42.56	54.00	-11.44 AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							

Temperature:	23.2°C	Relative Humidity:	41%				
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Vertical						
Test Mode:	TX n(HT20) Mode 2462MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1	*	4923.852	29.16	13.89	43.05	54.00	-10.95 AVG
2		4924.244	42.57	13.89	56.46	74.00	-17.54 peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							

Temperature:	23.2°C		Relative Humidity:	41%			
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4844.084	28.69	13.31	42.00	54.00	-12.00	AVG
2		4844.334	42.37	13.31	55.68	74.00	-18.32	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C		Relative Humidity:	41%			
Test Voltage:	AC 120V/60 Hz						
Ant. Pol.	Vertical						
Test Mode:	TX n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20dB below the prescribed limit.						

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4844.298	41.76	13.31	55.07	74.00	-18.93	peak
2	*	4844.432	28.49	13.31	41.80	54.00	-12.20	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4874.240	42.73	13.53	56.26	74.00	-17.74	peak
2	*	4874.240	28.47	13.53	42.00	54.00	-12.00	AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 20dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4873.606	42.24	13.53	55.77	74.00	-18.23	peak
2	*	4873.976	28.87	13.53	42.40	54.00	-11.60	AVG

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)
 3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)

Temperature:	23.2°C	Relative Humidity:	41%
---------------------	--------	---------------------------	-----


Test Voltage:	AC 120V/60 Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX n(HT40) Mode 2452MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4904.344	29.15	13.75	42.90	54.00	-11.10	AVG
2		4904.384	42.89	13.75	56.64	74.00	-17.36	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								

Temperature:	23.2°C	Relative Humidity:	41%					
Test Voltage:	AC 120V/60 Hz							
Ant. Pol.	Vertical							
Test Mode:	TX n(HT40) Mode 2452MHz							
Remark:	No report for the emission which more than 20dB below the prescribed limit.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4903.720	42.73	13.74	56.47	74.00	-17.53	peak
2	*	4904.194	29.17	13.75	42.92	54.00	-11.08	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								

Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only show the worst case.		

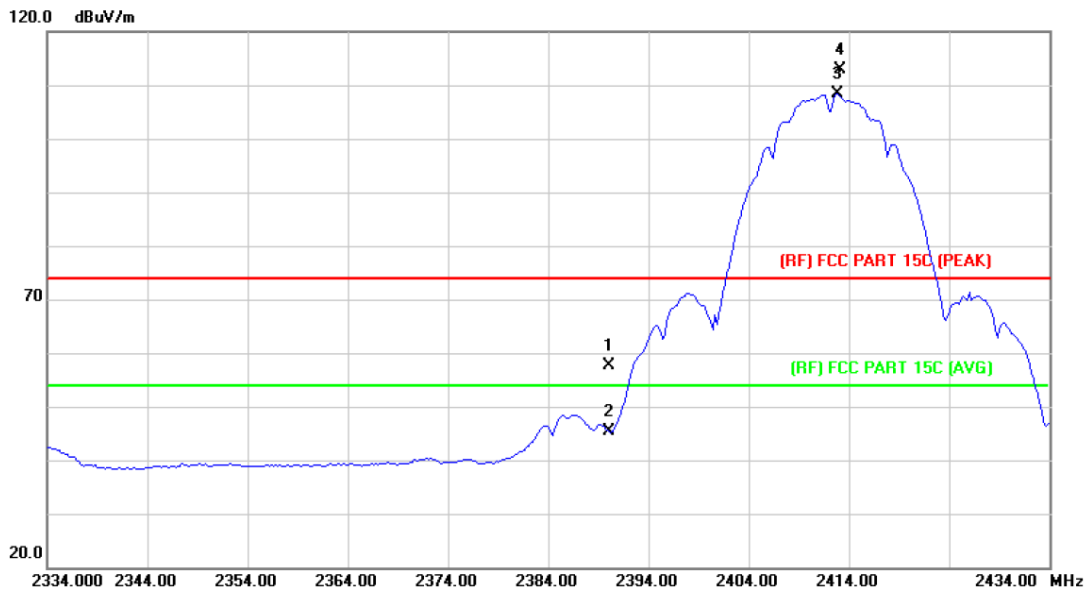


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	56.25	1.28	57.53	74.00	-16.47	peak
2		2390.000	44.04	1.28	45.32	54.00	-8.68	AVG
3	*	2412.800	106.86	1.40	108.26	Fundamental Frequency		AVG
4	X	2413.200	111.40	1.41	112.81	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only show the worst case.		

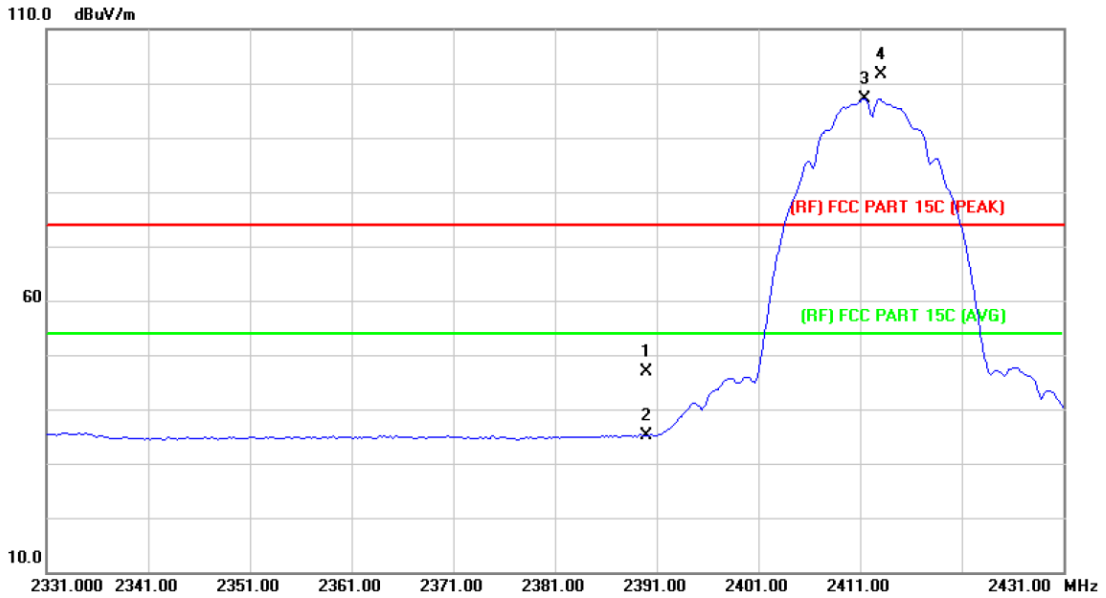


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	45.61	1.28	46.89	74.00	-27.11	peak
2		2390.000	33.96	1.28	35.24	54.00	-18.76	AVG
3	*	2411.400	95.80	1.39	97.19	Fundamental Frequency		AVG
4	X	2413.000	100.28	1.40	101.68	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	Only show the worst case.		

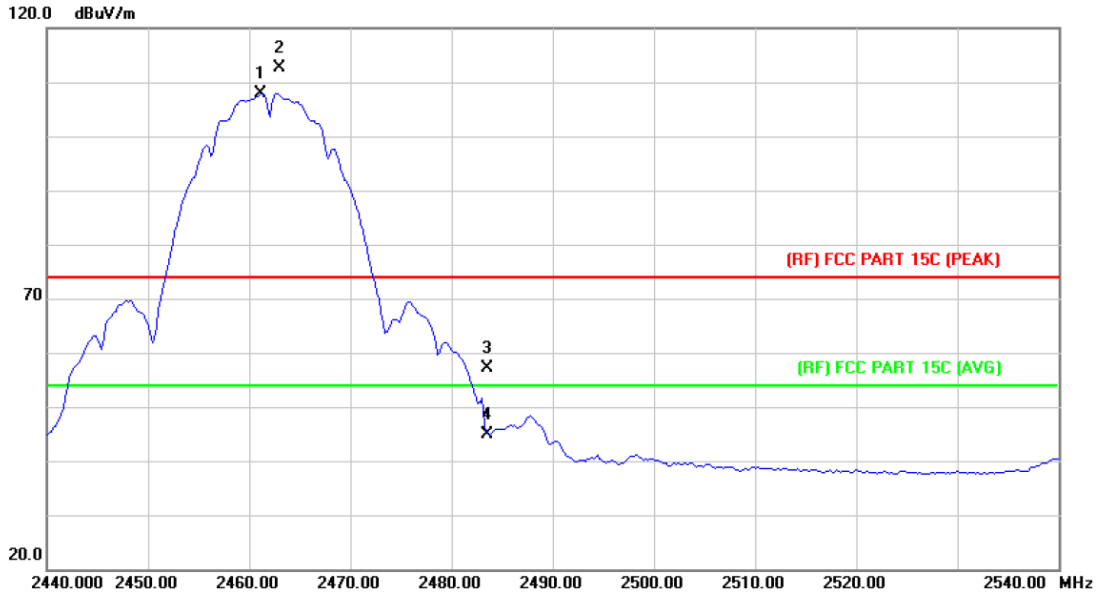


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2461.200	106.26	1.73	107.99	Fundamental Frequency		AVG
2	X	2463.000	110.82	1.74	112.56	Fundamental Frequency		peak
3		2483.500	55.35	1.88	57.23	74.00	-16.77	peak
4		2483.500	42.93	1.88	44.81	54.00	-9.19	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	Only show the worst case.		

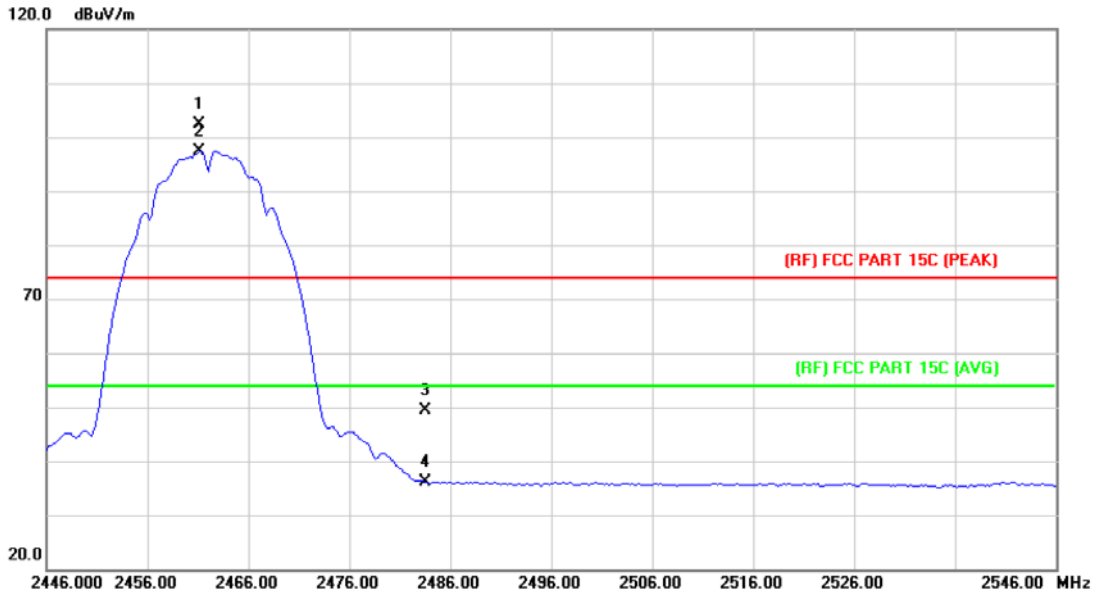


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2461.200	100.65	1.73	102.38	Fundamental Frequency		peak
2	*	2461.200	95.74	1.73	97.47	Fundamental Frequency		AVG
3		2483.500	47.62	1.88	49.50	74.00	-24.50	peak
4		2483.500	34.32	1.88	36.20	54.00	-17.80	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	Only show the worst case.		

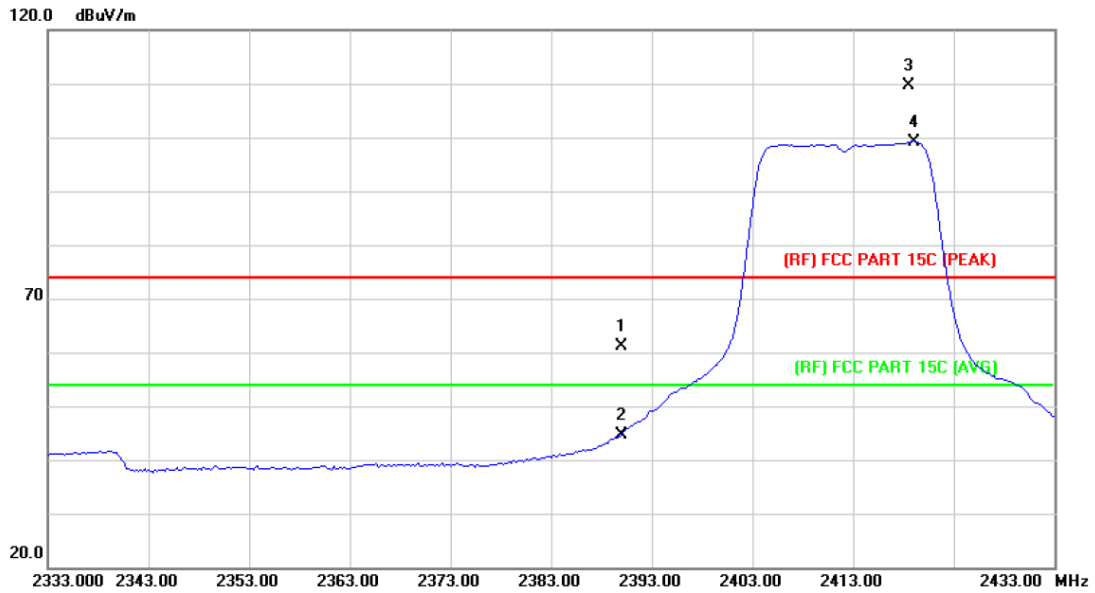


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	59.82	1.28	61.10	74.00	-12.90	peak
2		2390.000	43.38	1.28	44.66	54.00	-9.34	AVG
3	X	2418.600	108.18	1.44	109.62	Fundamental Frequency		peak
4	*	2419.000	97.81	1.44	99.25	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	Only show the worst case.		

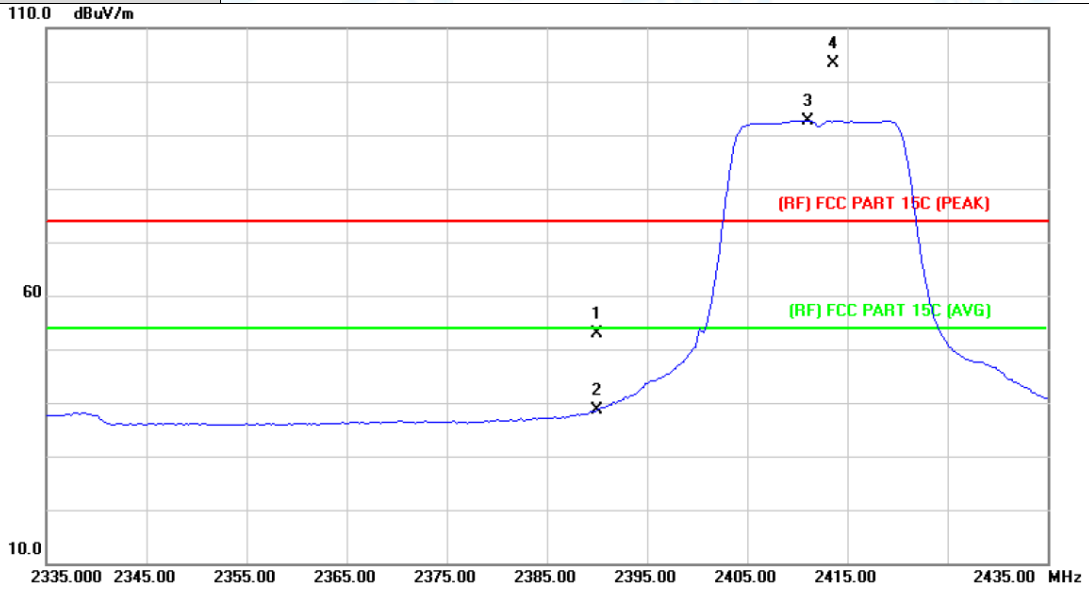


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	51.57	1.28	52.85	74.00	-21.15	peak
2		2390.000	37.40	1.28	38.68	54.00	-15.32	AVG
3	*	2411.000	91.36	1.38	92.74	Fundamental Frequency		AVG
4	X	2413.600	102.07	1.41	103.48	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz		
Remark:	Only show the worst case.		

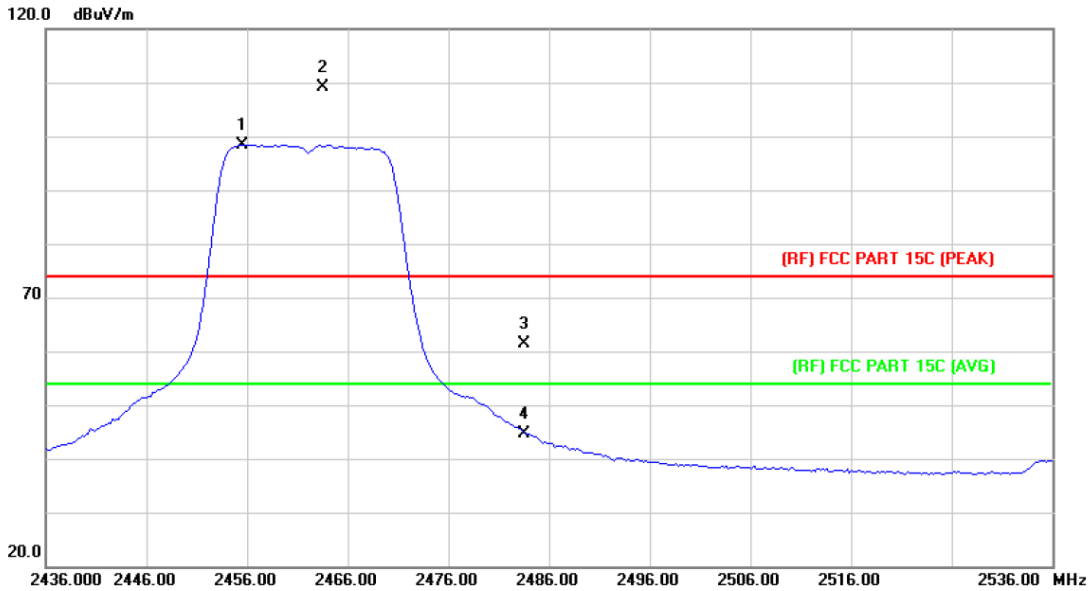


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2455.600	96.77	1.69	98.46	Fundamental Frequency		AVG
2	X	2463.600	107.38	1.75	109.13	Fundamental Frequency		peak
3		2483.500	59.56	1.88	61.44	74.00	-12.56	peak
4		2483.500	42.86	1.88	44.74	54.00	-9.26	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz		
Remark:	Only show the worst case.		

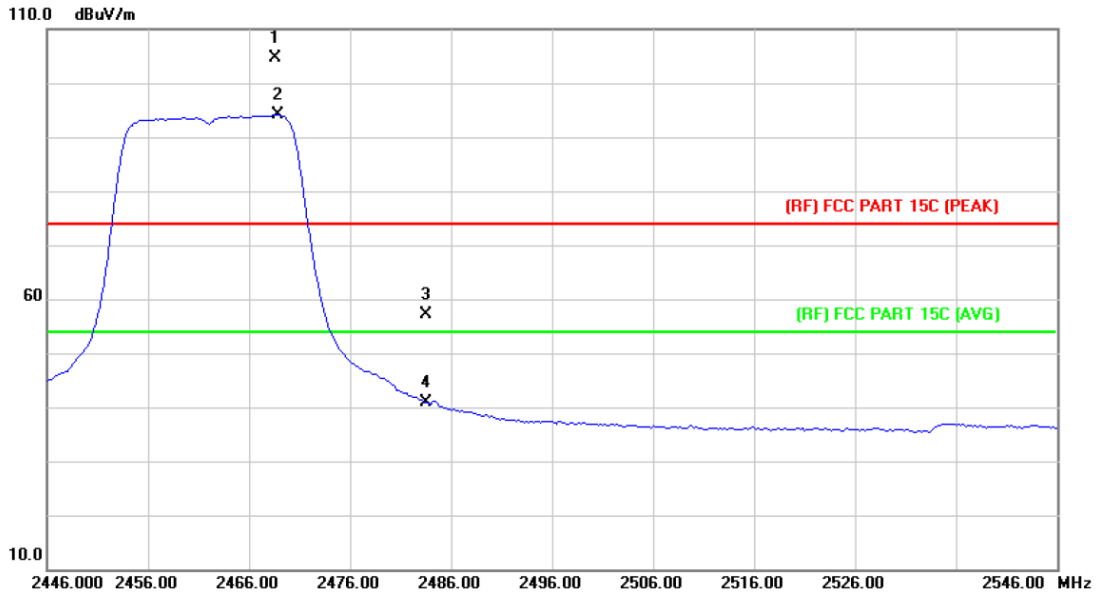


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2468.600	102.84	1.78	104.62	Fundamental Frequency		peak
2	*	2468.800	92.40	1.78	94.18	Fundamental Frequency		AVG
3		2483.500	55.37	1.88	57.25	74.00	-16.75	peak
4		2483.500	38.99	1.88	40.87	54.00	-13.13	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHZ		
Remark:	Only show the worst case.		

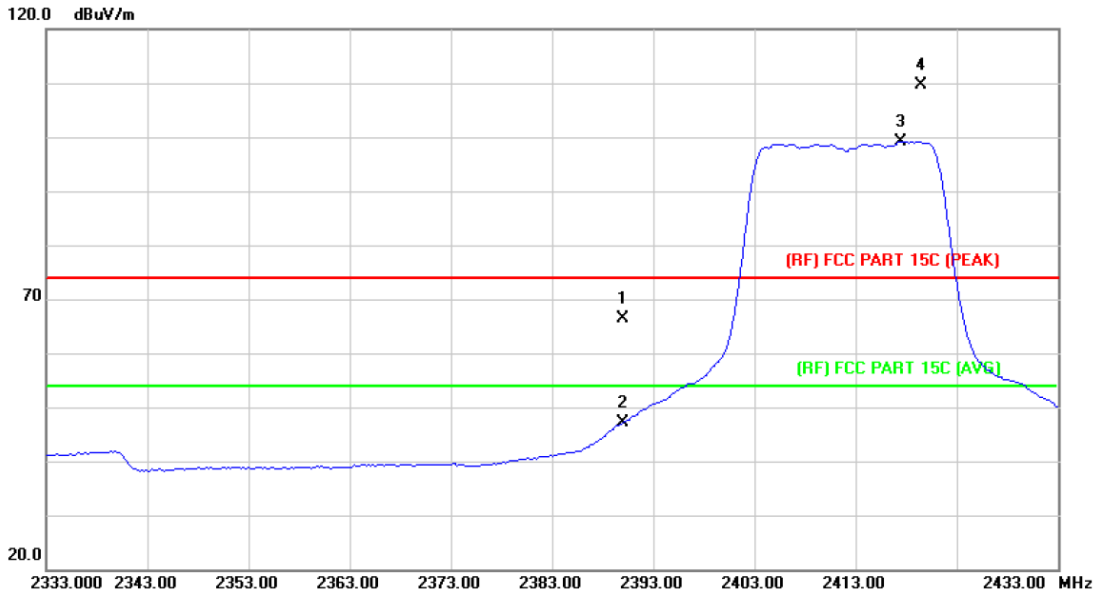


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	65.11	1.28	66.39	74.00	-7.61	peak
2		2390.000	45.91	1.28	47.19	54.00	-6.81	AVG
3	*	2417.400	97.74	1.44	99.18	Fundamental Frequency		AVG
4	X	2419.400	108.18	1.45	109.63	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHZ		
Remark:	Only show the worst case.		

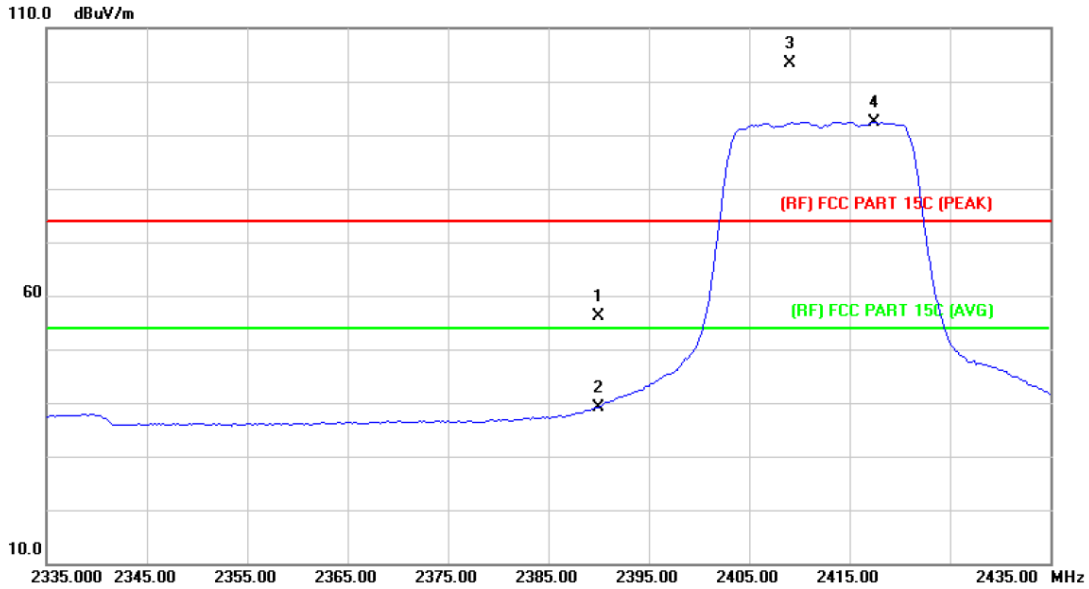


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	54.95	1.28	56.23	74.00	-17.77	peak
2		2390.000	37.96	1.28	39.24	54.00	-14.76	AVG
3	X	2409.000	102.10	1.37	103.47	Fundamental Frequency		peak
4	*	2417.400	91.01	1.44	92.45	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	Only show the worst case.		

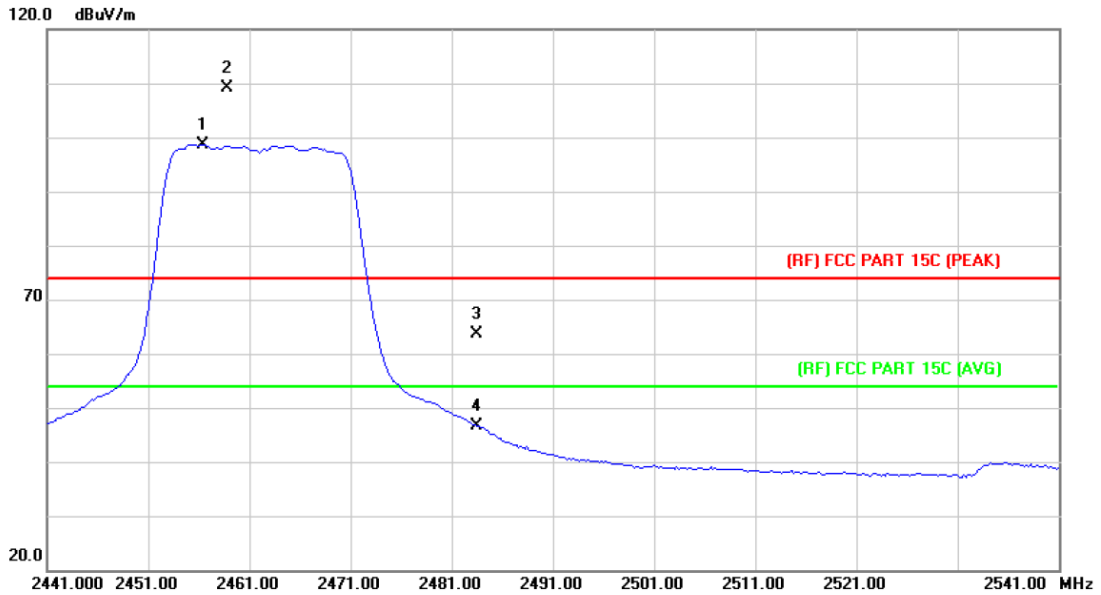


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2456.400	97.06	1.69	98.75	Fundamental Frequency		AVG
2	X	2458.800	107.39	1.70	109.09	Fundamental Frequency		peak
3		2483.500	61.84	1.88	63.72	74.00	-10.28	peak
4		2483.500	44.84	1.88	46.72	54.00	-7.28	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	Only show the worst case.		

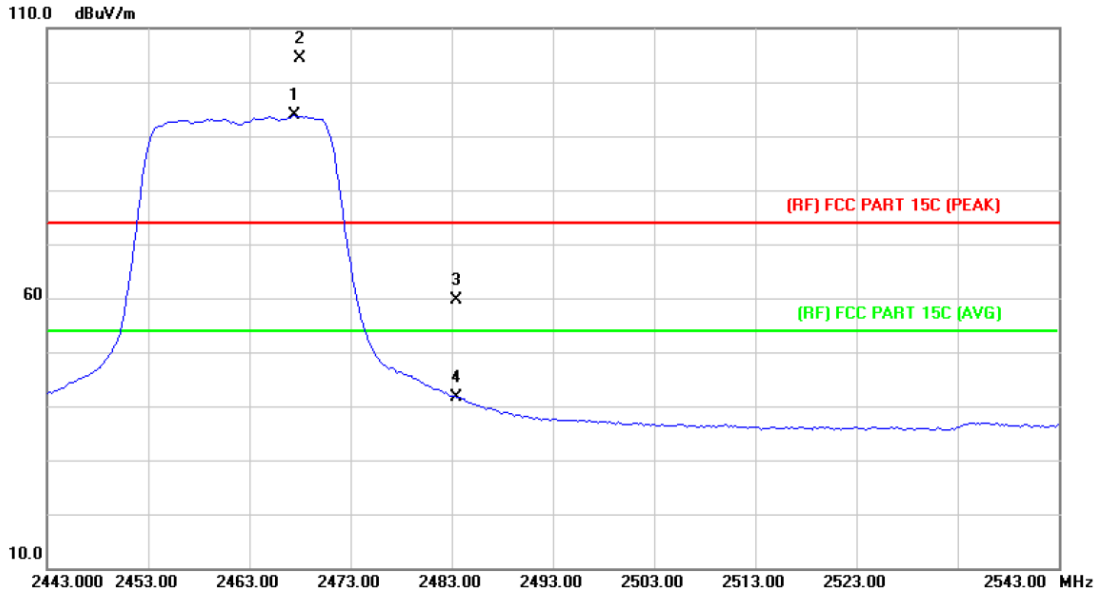


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2467.400	92.03	1.78	93.81	Fundamental Frequency		AVG
2	X	2468.000	102.61	1.78	104.39	Fundamental Frequency		peak
3		2483.500	57.71	1.88	59.59	74.00	-14.41	peak
4		2483.500	39.64	1.88	41.52	54.00	-12.48	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	Only show the worst case.		

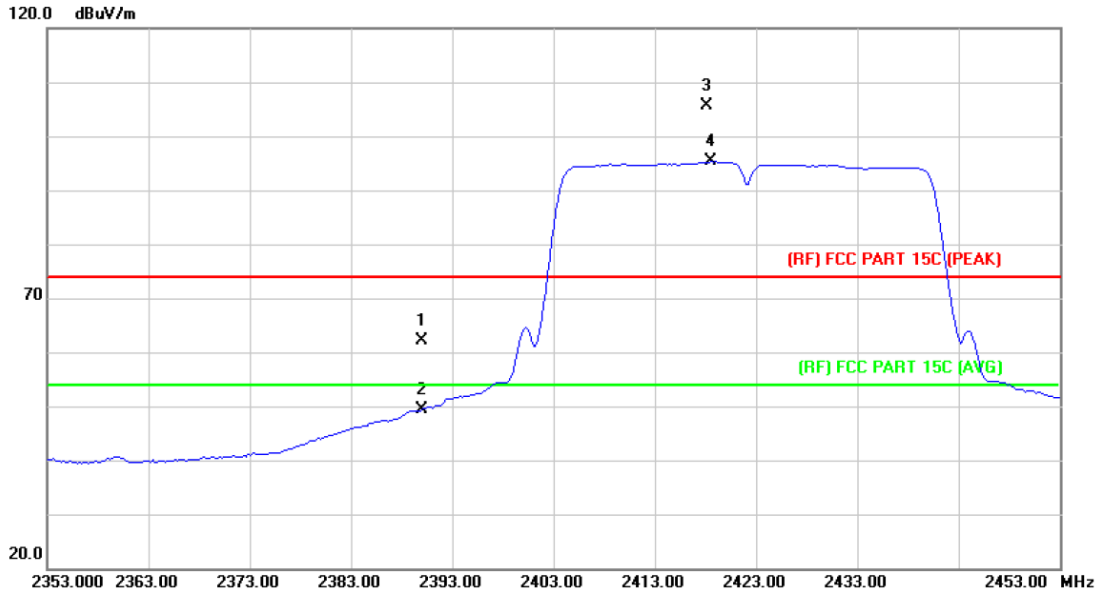


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	60.75	1.28	62.03	74.00	-11.97	peak
2		2390.000	47.98	1.28	49.26	54.00	-4.74	AVG
3	X	2418.200	104.11	1.44	105.55	Fundamental Frequency		peak
4	*	2418.600	93.85	1.44	95.29	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	Only show the worst case.		

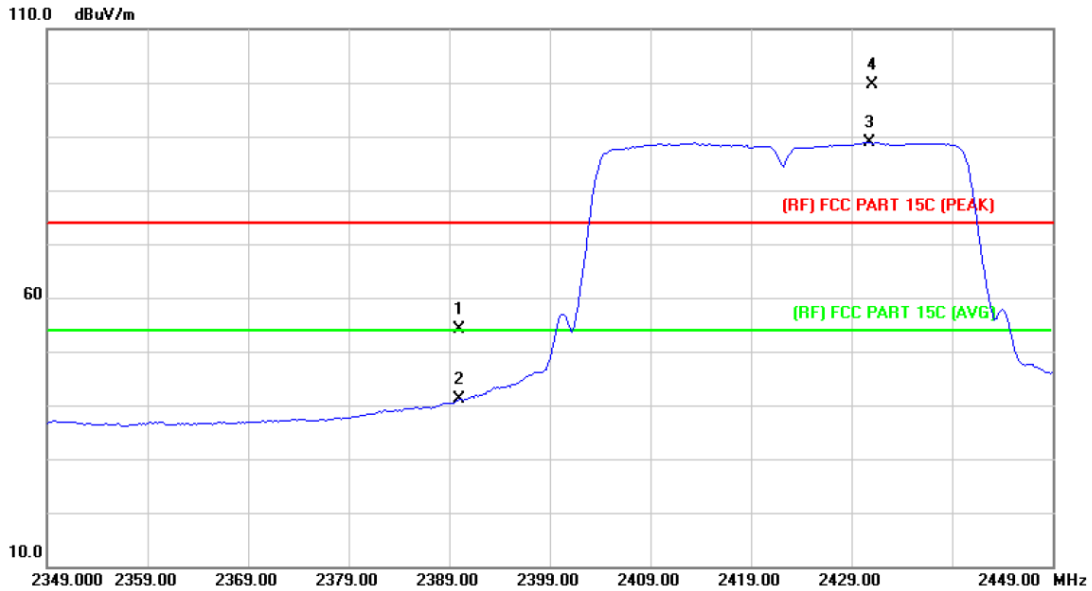


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	52.76	1.28	54.04	74.00	-19.96	peak
2		2390.000	39.81	1.28	41.09	54.00	-12.91	AVG
3	*	2430.800	87.35	1.52	88.87	Fundamental Frequency		AVG
4	X	2431.000	98.09	1.52	99.61	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	Only show the worst case.		

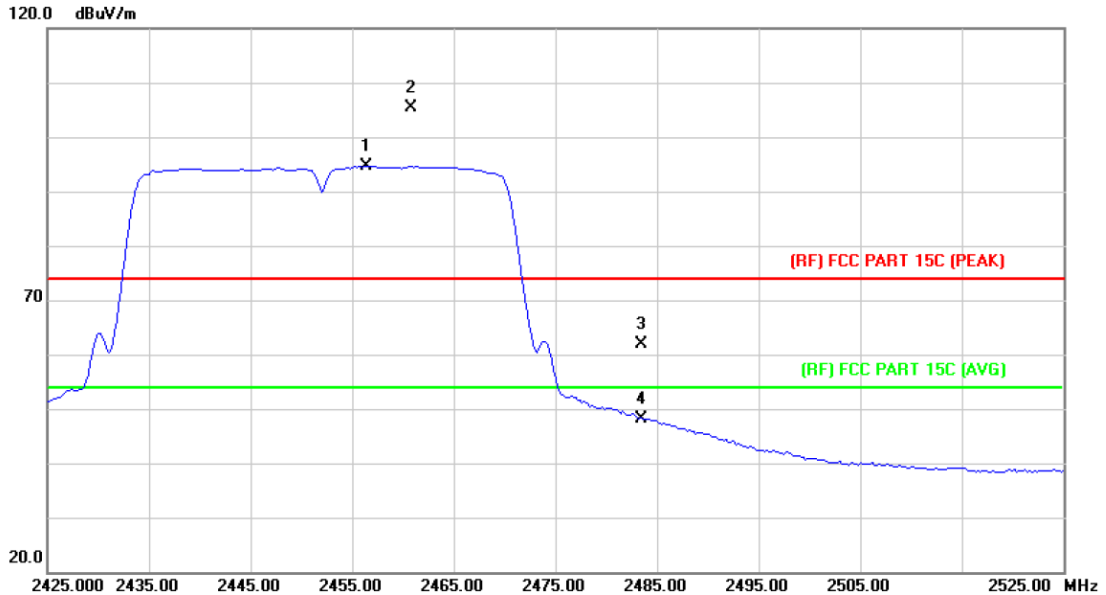


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2456.400	92.95	1.69	94.64	Fundamental Frequency		AVG
2	X	2460.800	103.63	1.72	105.35	Fundamental Frequency		peak
3		2483.500	60.07	1.88	61.95	74.00	-12.05	peak
4		2483.500	46.23	1.88	48.11	54.00	-5.89	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	Only show the worst case.		

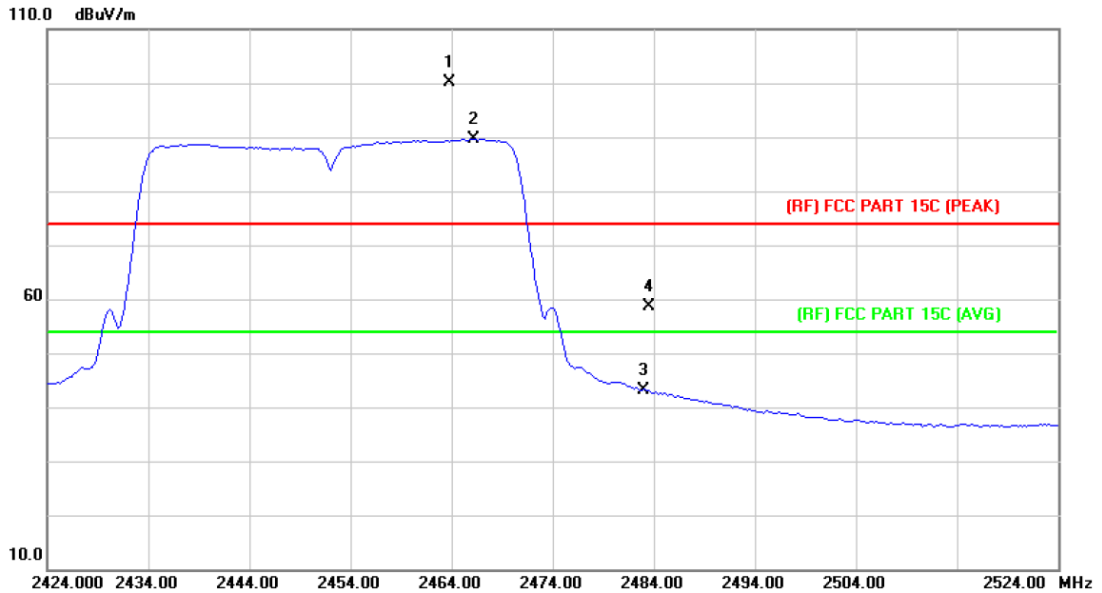



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2463.800	98.47	1.75	100.22	Fundamental Frequency		peak
2	*	2466.200	87.83	1.76	89.59	Fundamental Frequency		AVG
3		2483.050	41.14	1.88	43.02	54.00	-10.98	AVG
4		2483.500	56.70	1.88	58.58	74.00	-15.42	peak

Remark:



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

(2) Conducted Test



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

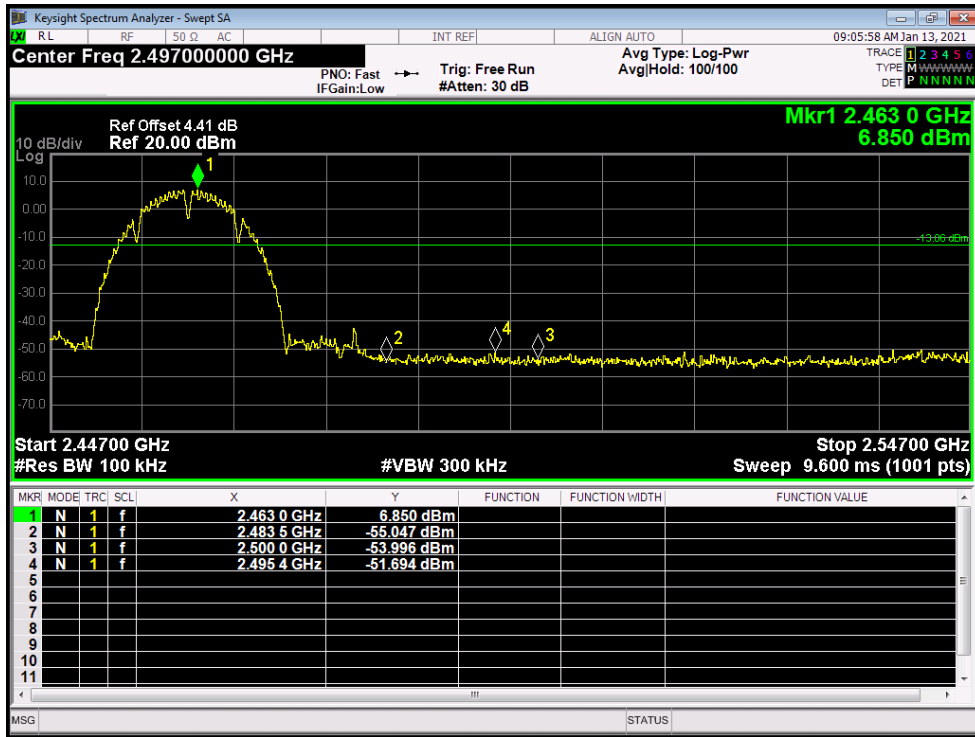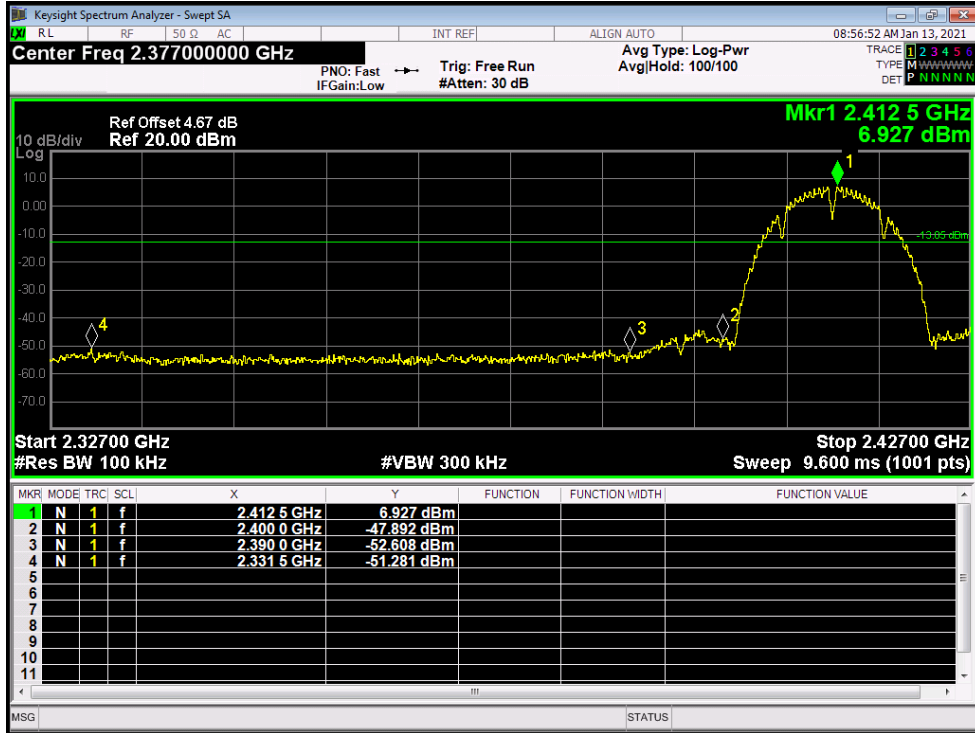



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

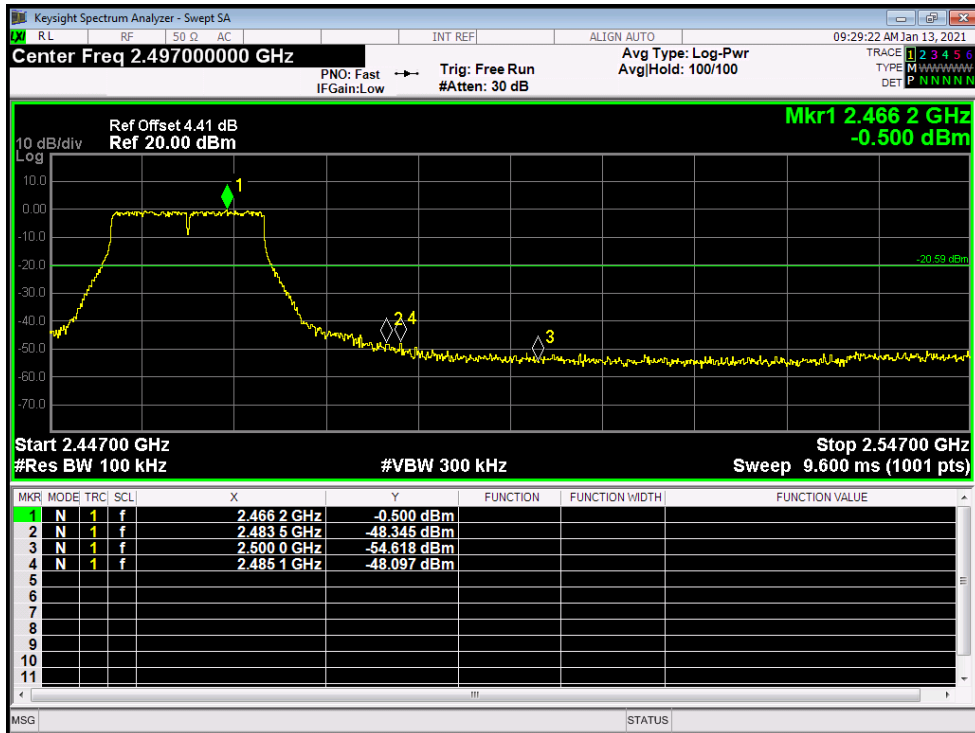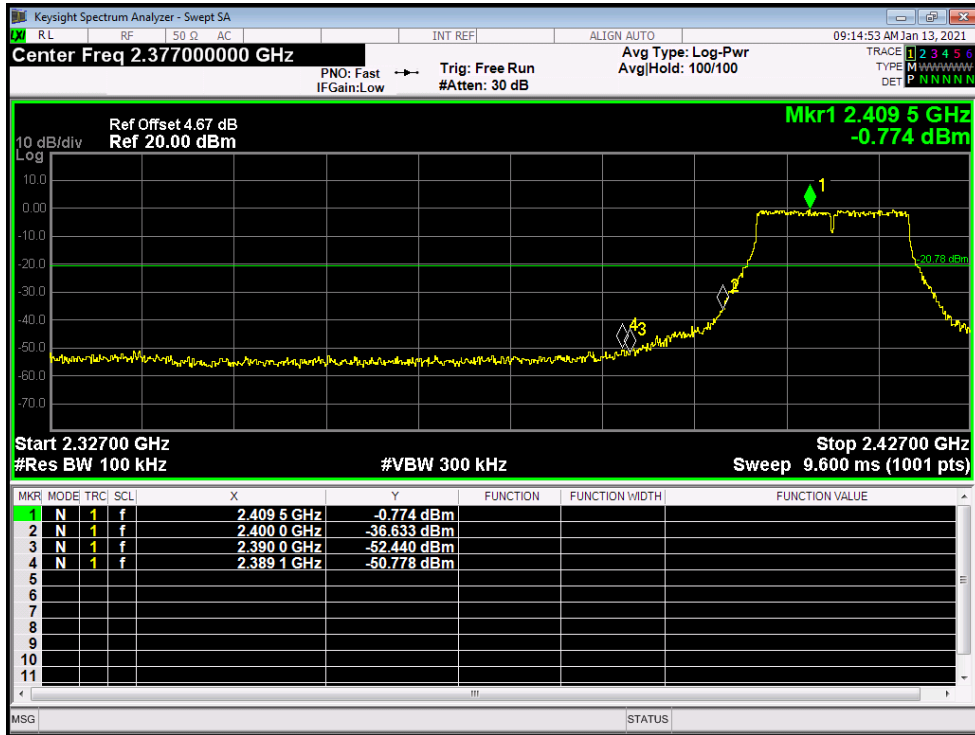

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

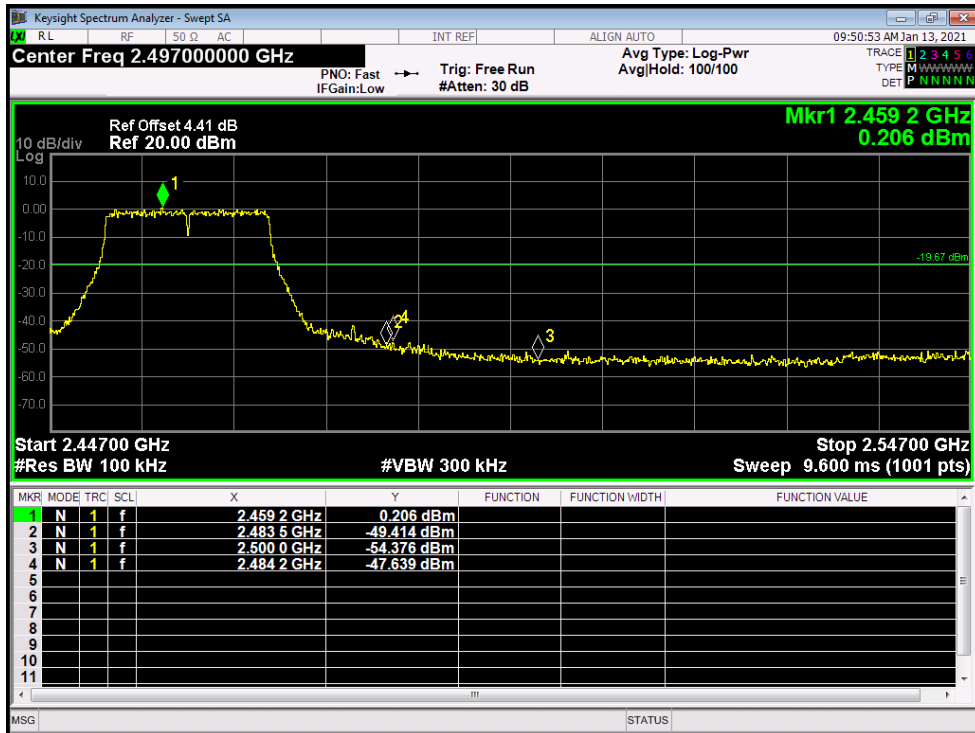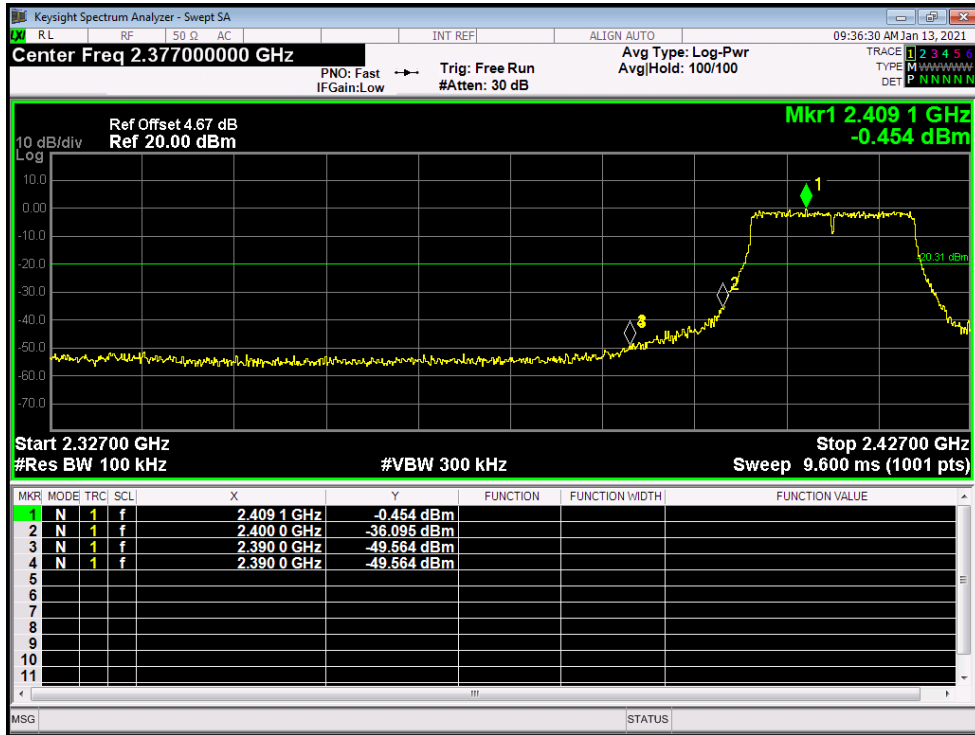

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz		
Remark:	The EUT is programmed in continuously transmitting mode		

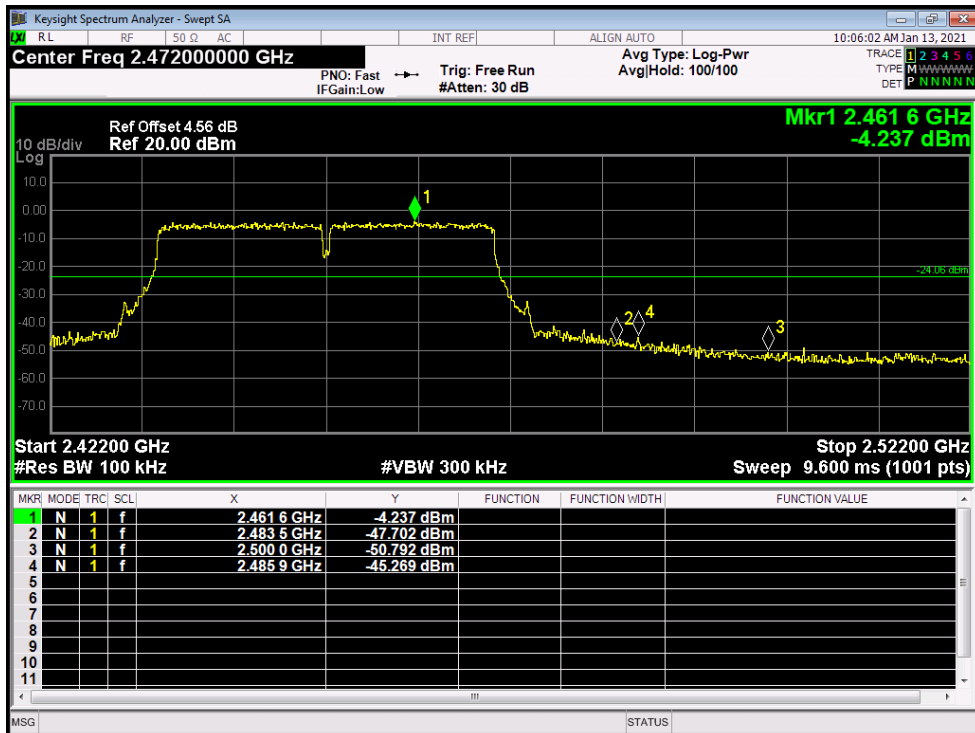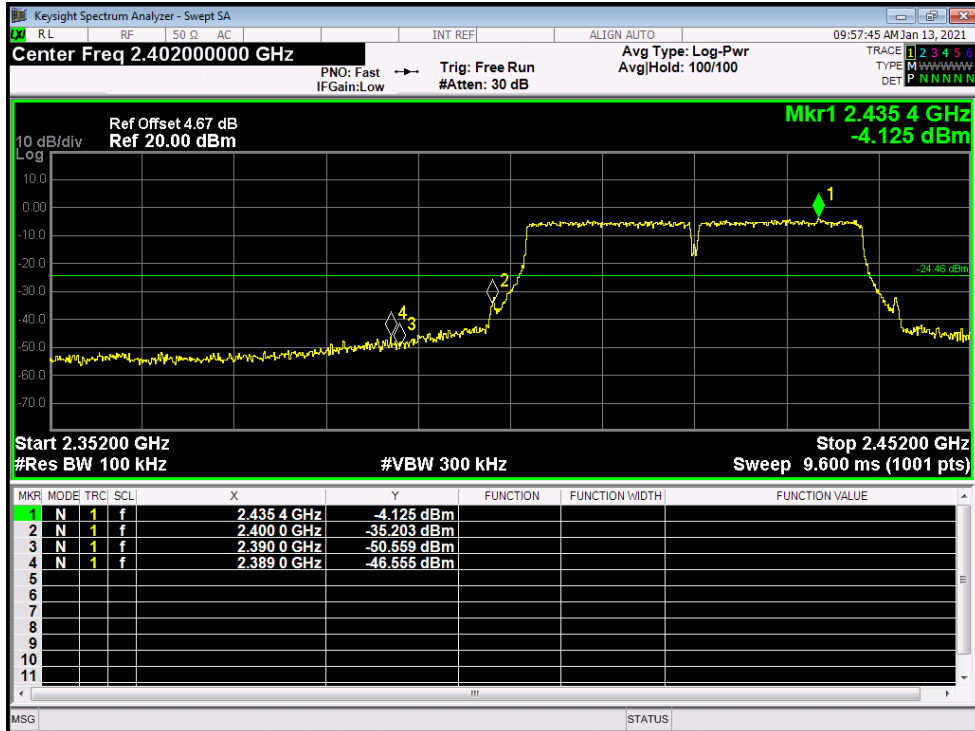


Attachment D-- Bandwidth Test Data


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11b Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	9.010	/	>=0.5
2437	9.064	/	
2462	8.577	/	

802.11b Mode


2412 MHz Bandwidth

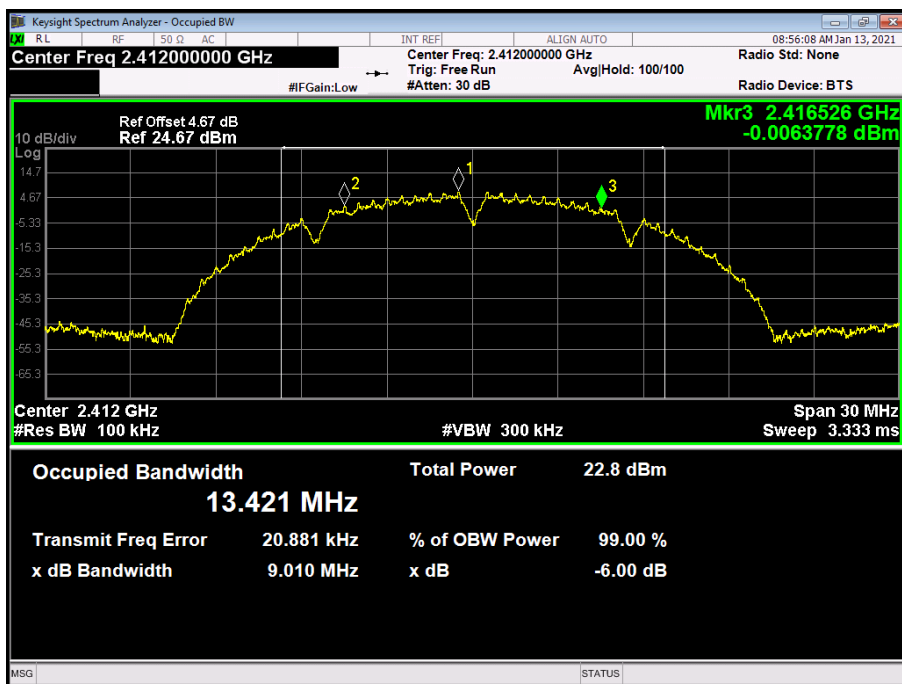

802.11b Mode
2437 MHz Bandwidth

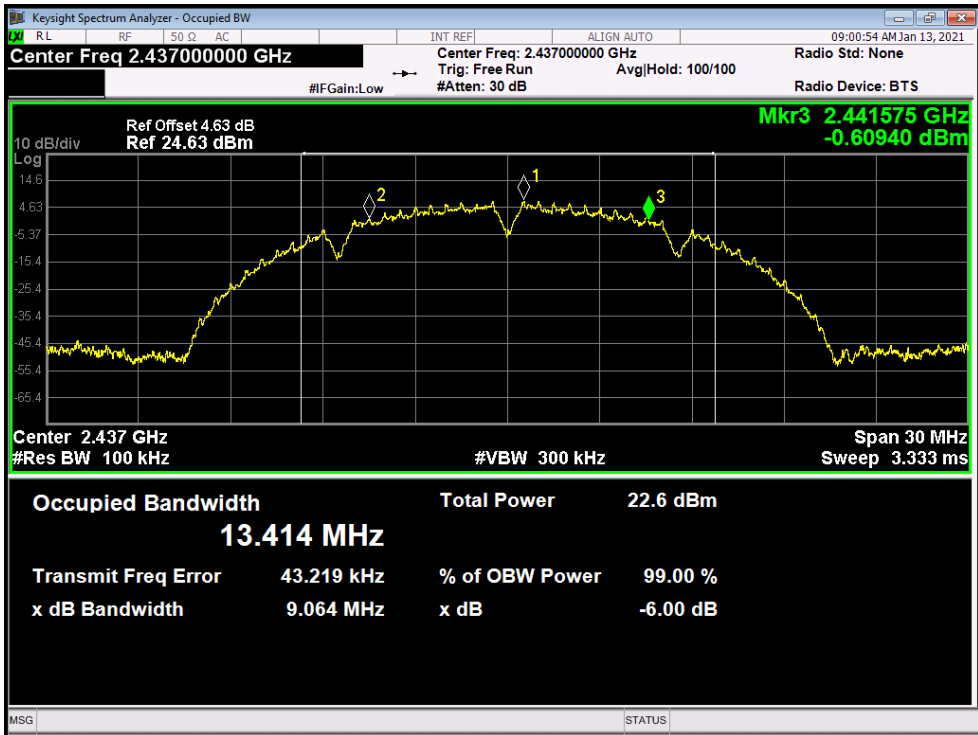


2462 MHz Bandwidth

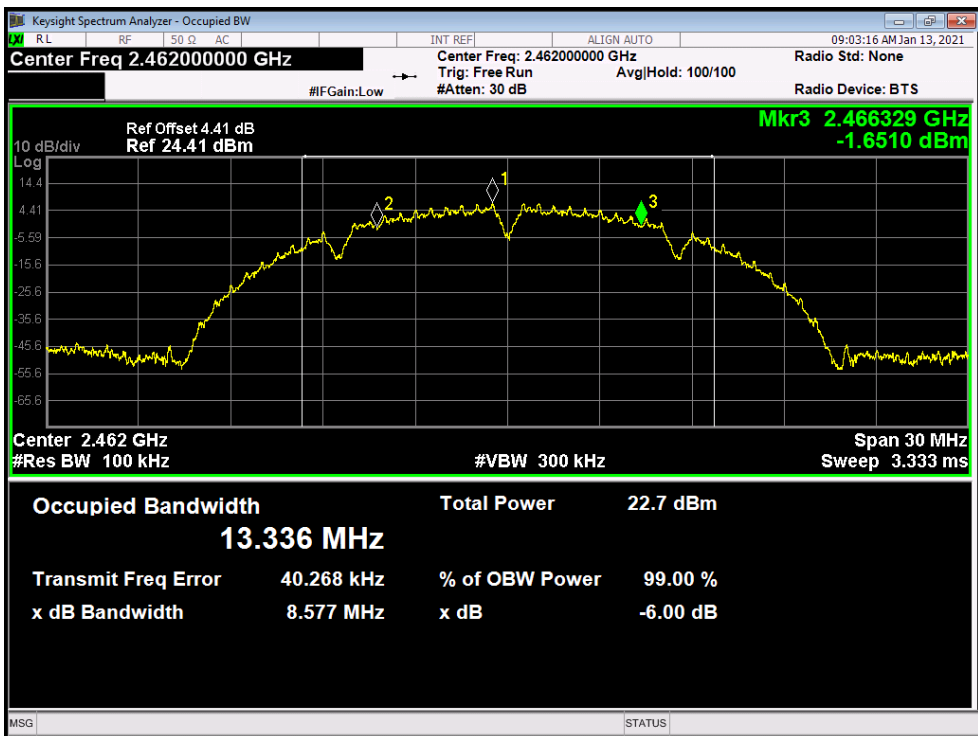


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11g Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.55	/	>=0.5
2437	16.56	/	
2462	16.56	/	

802.11g Mode


2412 MHz Bandwidth

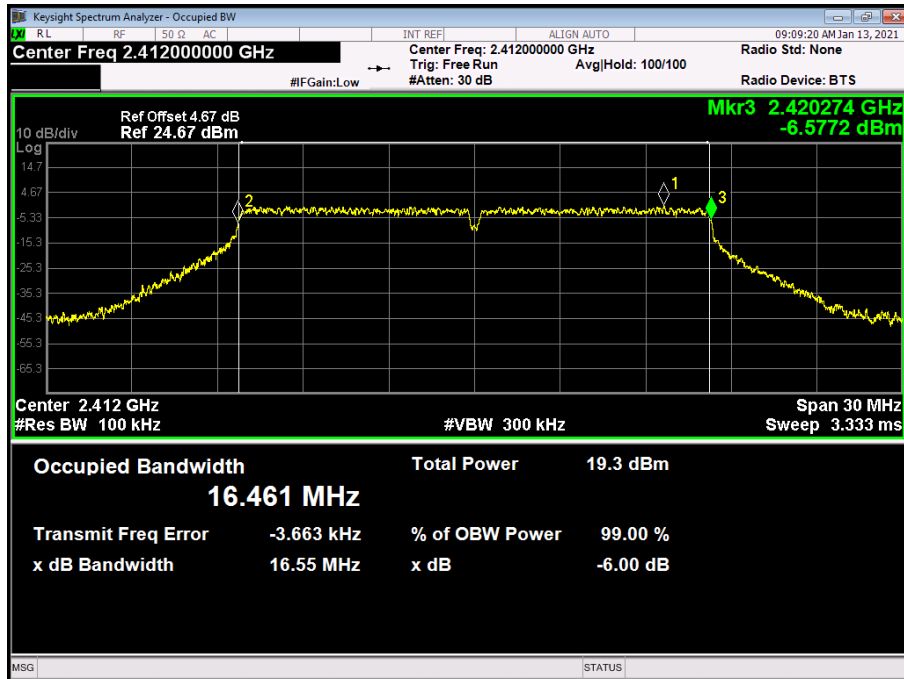

802.11g Mode
2437 MHz Bandwidth

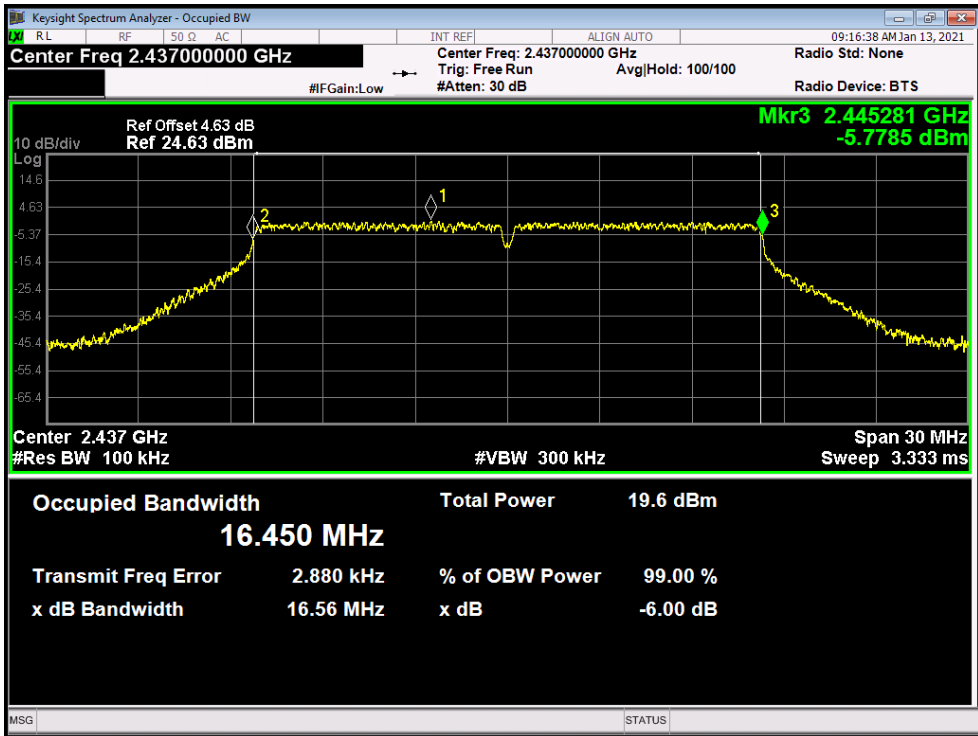


2462 MHz Bandwidth

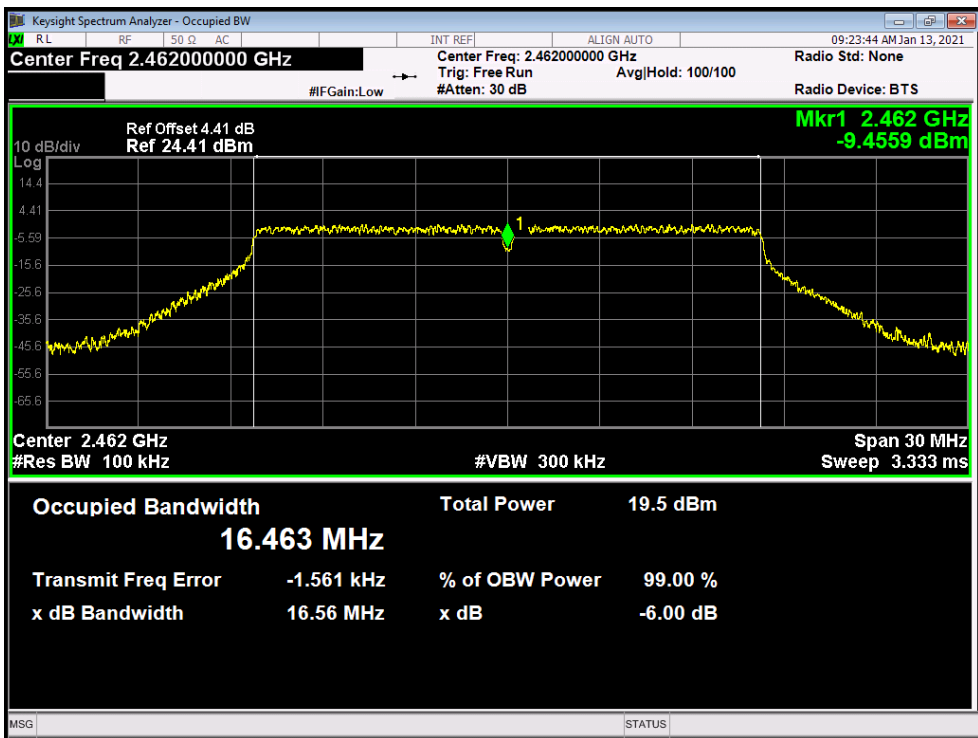


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11n(HT20) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.80	/	>=0.5
2437	17.76	/	
2462	17.78	/	

802.11n(HT20) Mode


2412 MHz Bandwidth

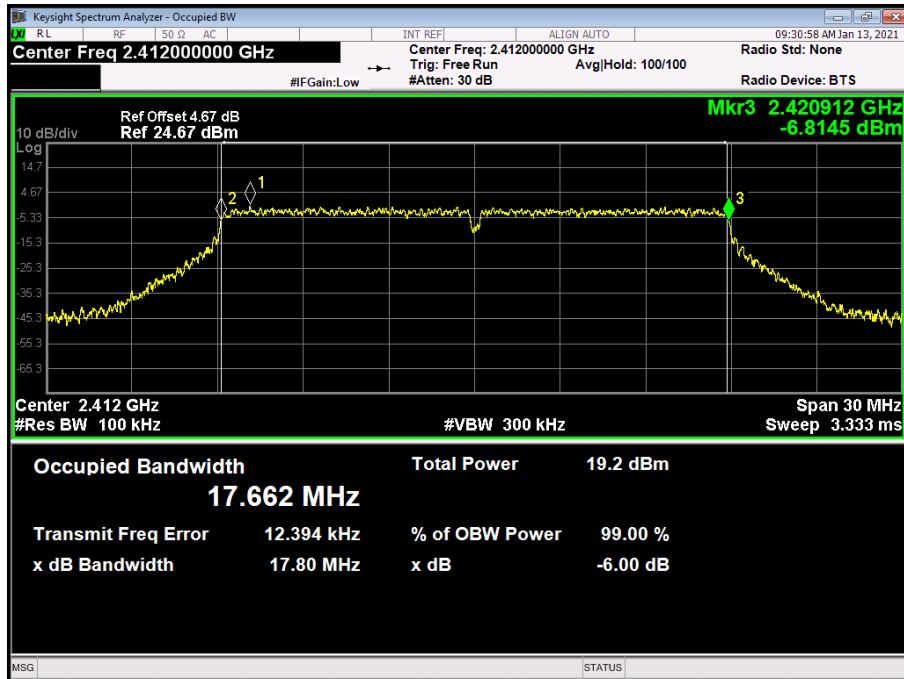

**802.11n(HT20) Mode
2437 MHz Bandwidth**

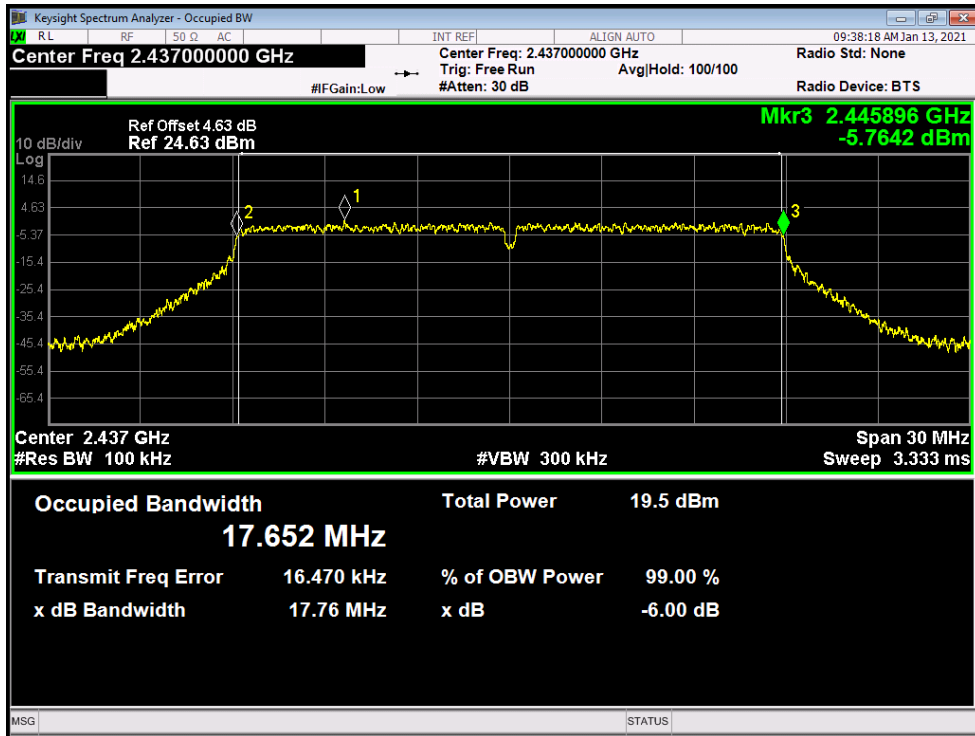


2462 MHz Bandwidth

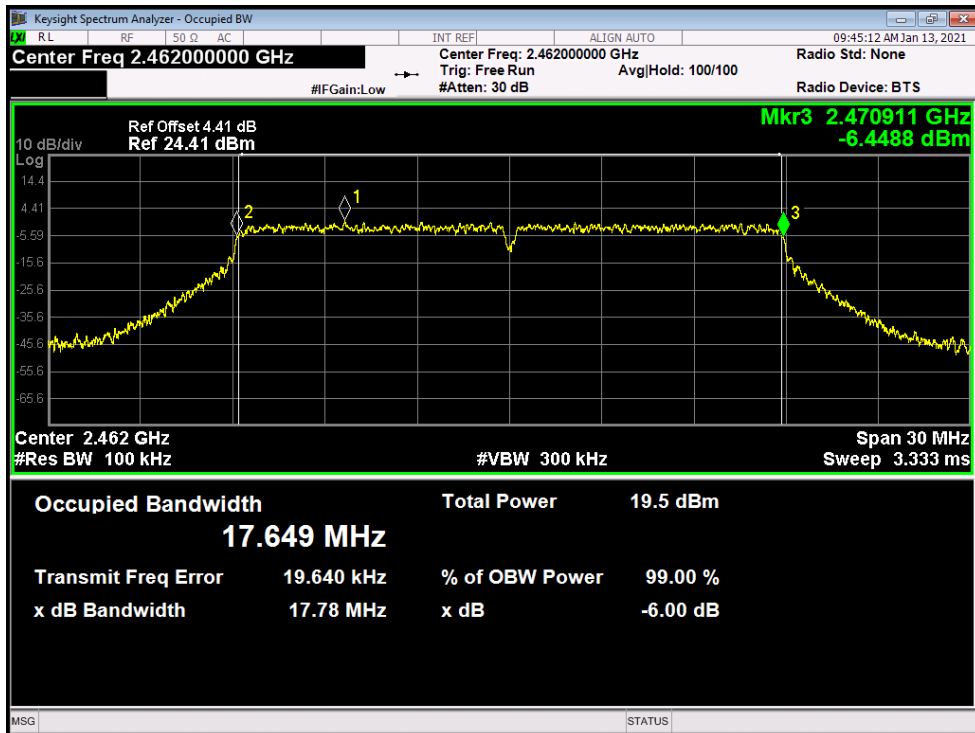


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11n(HT40) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.51	/	>=0.5
2437	36.52	/	
2452	36.51	/	

802.11n(HT40) Mode


2422 MHz Bandwidth

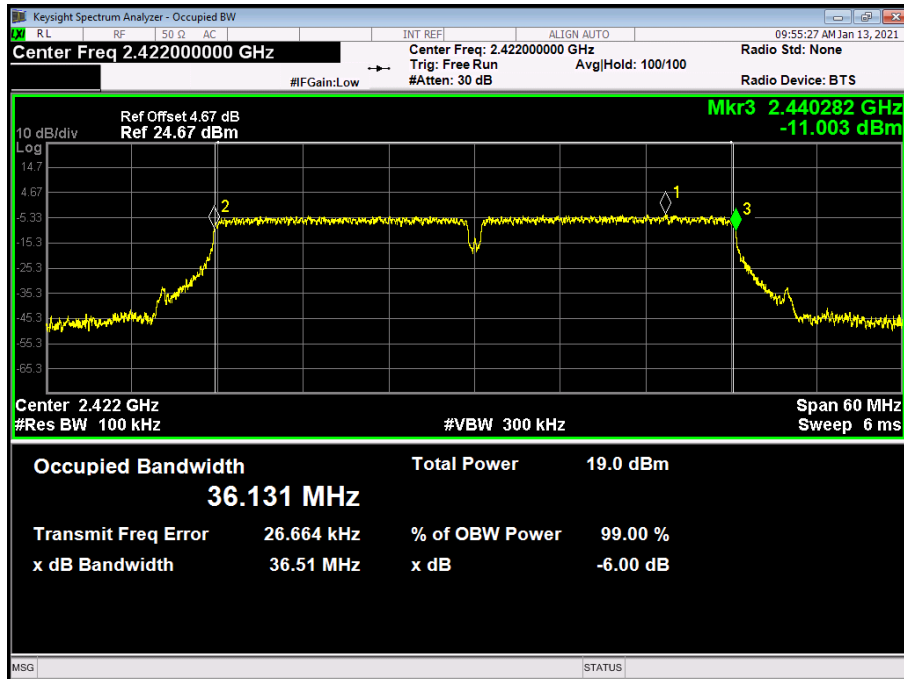

**802.11n(HT40) Mode
2437 MHz Bandwidth**

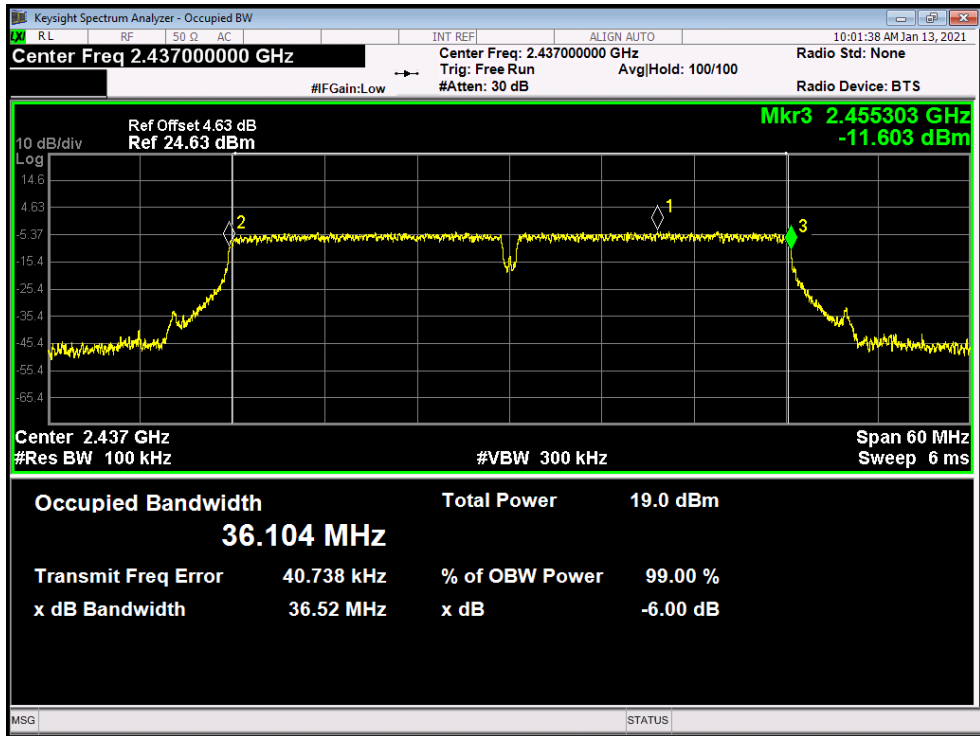

2452 MHz Bandwidth

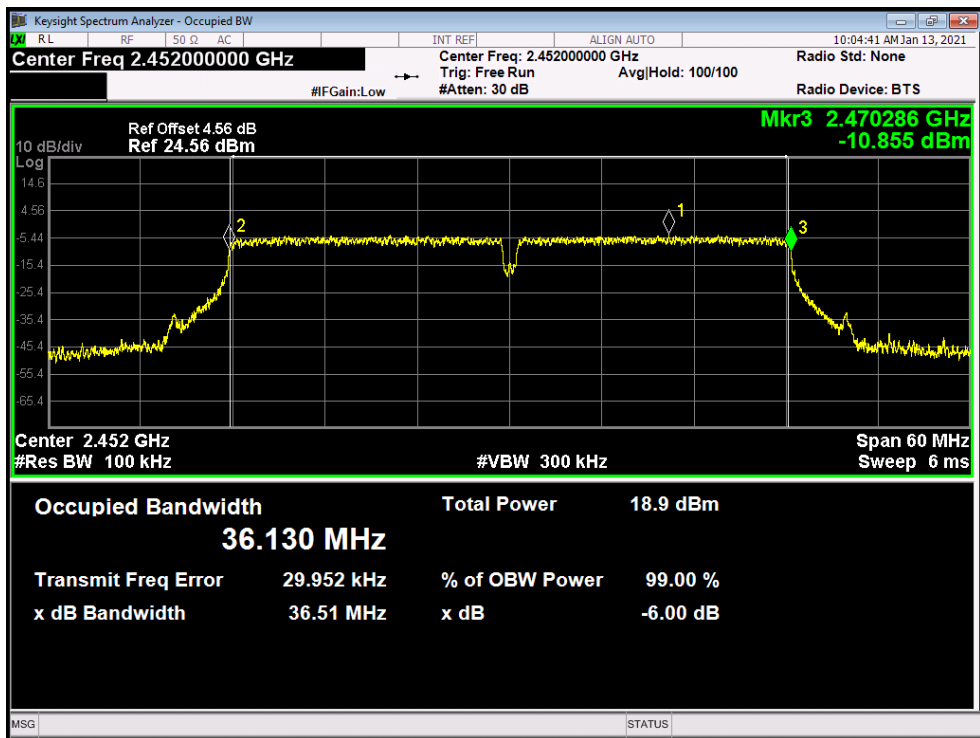


Attachment E-- Peak Output Power and E.I.R.P Data


Test Conditions:		Continuous Transmitting Mode	
Temperature:		25 °C	Relative Humidity: 55%
Test Voltage:		AC 120V/60HZ	
Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	13.48	30
	2437	13.95	
	2462	13.68	
802.11g	2412	13.78	
	2437	14.15	
	2462	14.13	
802.11n (HT20)	2412	13.81	
	2437	14.12	
	2462	14.02	
802.11n (HT40)	2422	13.64	
	2437	13.53	
	2452	13.39	
Result: PASS			

Duty Cycle		
Mode	Channel frequency (MHz)	Test Result
802.11b	2412	>98%
	2437	
	2462	
802.11g	2412	
	2437	
	2462	
802.11n (HT20)	2412	
	2437	
	2462	
802.11n (HT40)	2422	
	2437	
	2452	
Please see below plots		


802.11 B Mode 2437 MHz

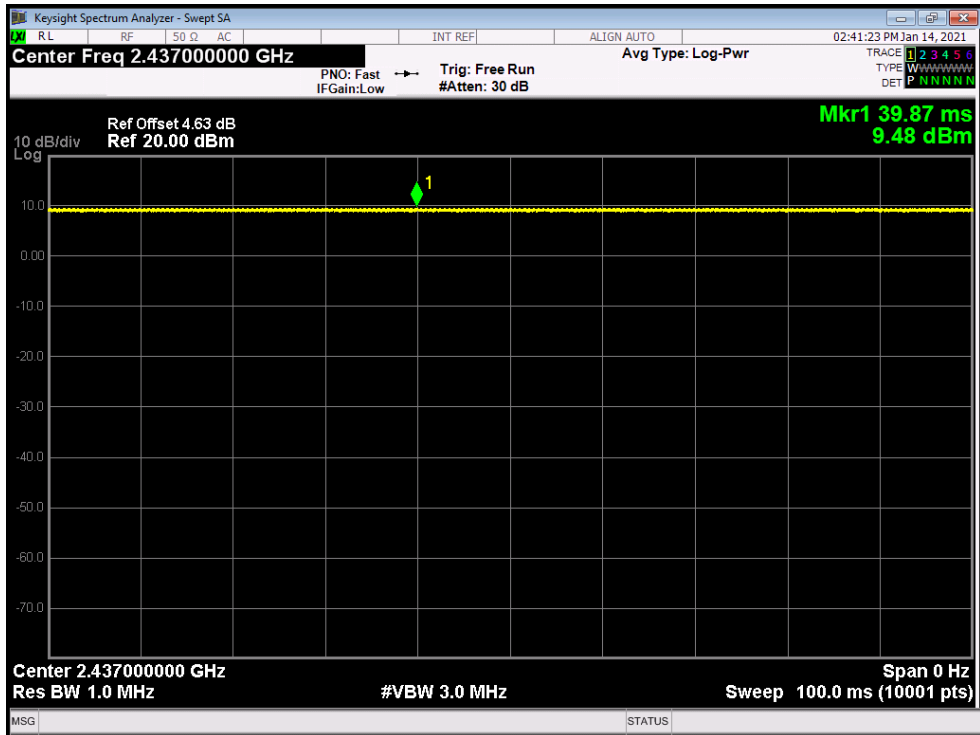


802.11 G Mode 2437 MHz

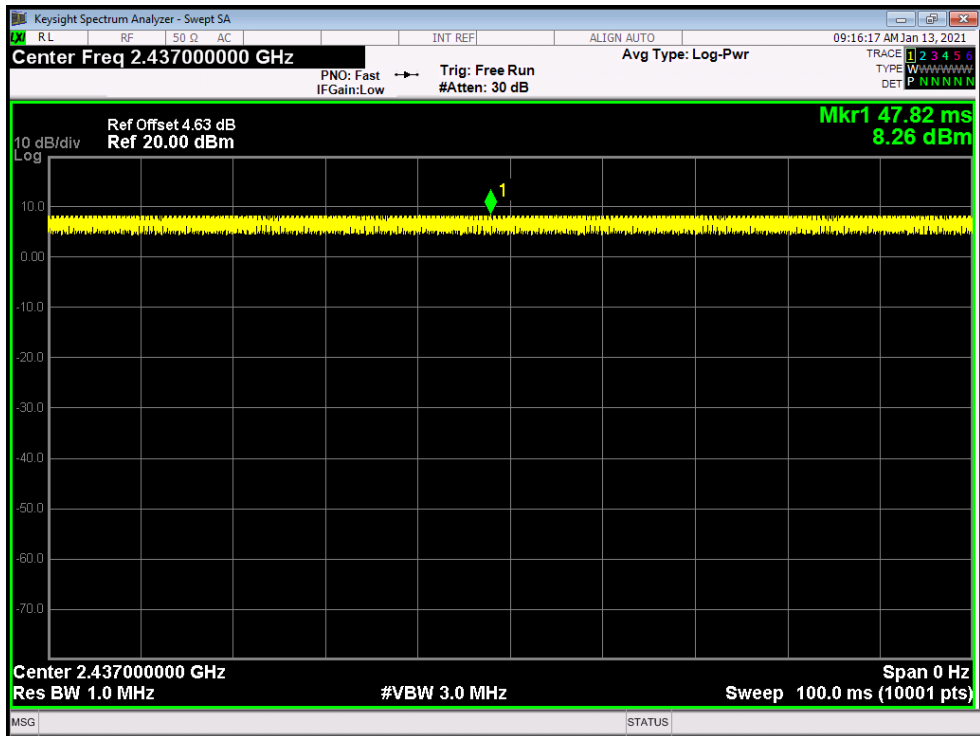

802.11 N(HT20) Mode 2437 MHz

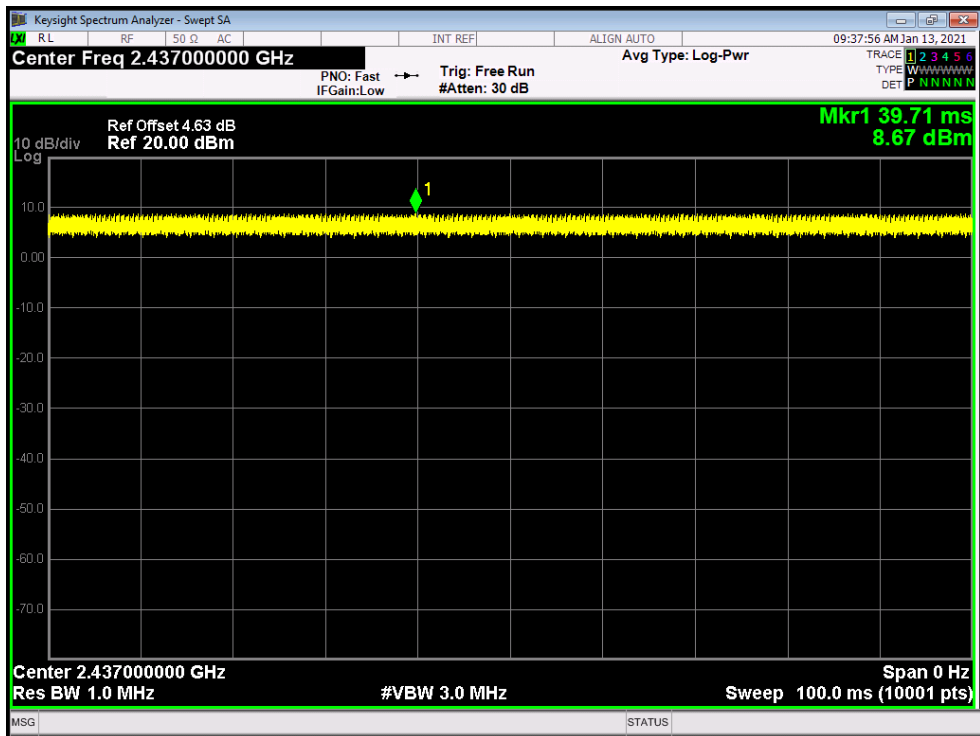


802.11 N(HT40) Mode 2437 MHz

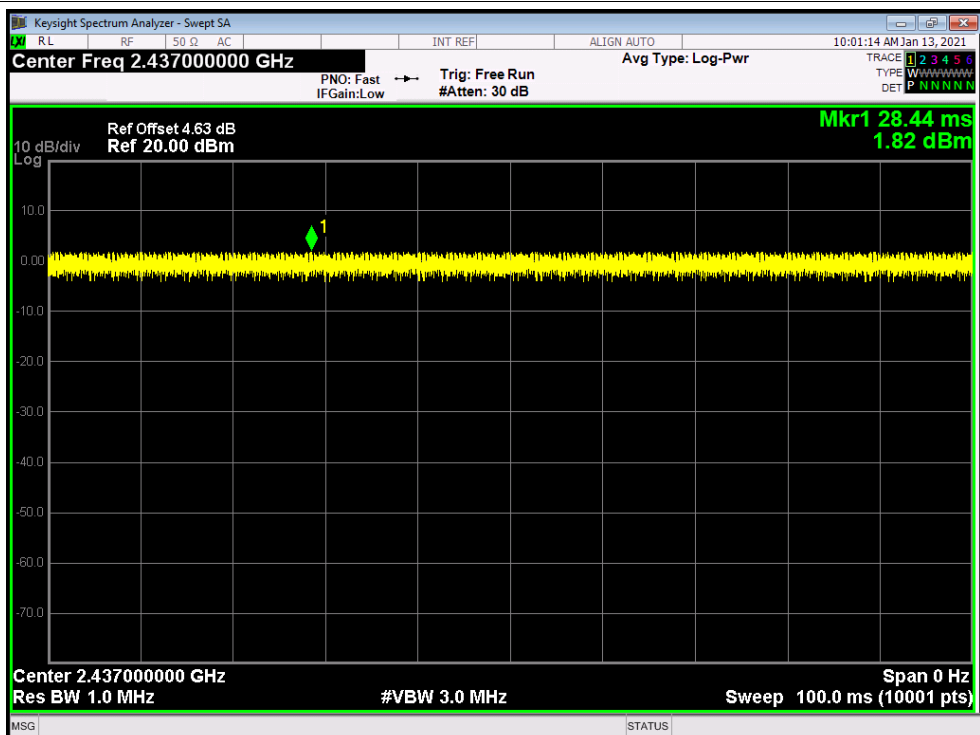

Attachment F-- Power Spectral Density Test Data


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11B Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-16.068	8	
2437	-15.633		
2462	-15.844		
802.11B Mode			

2412 MHz

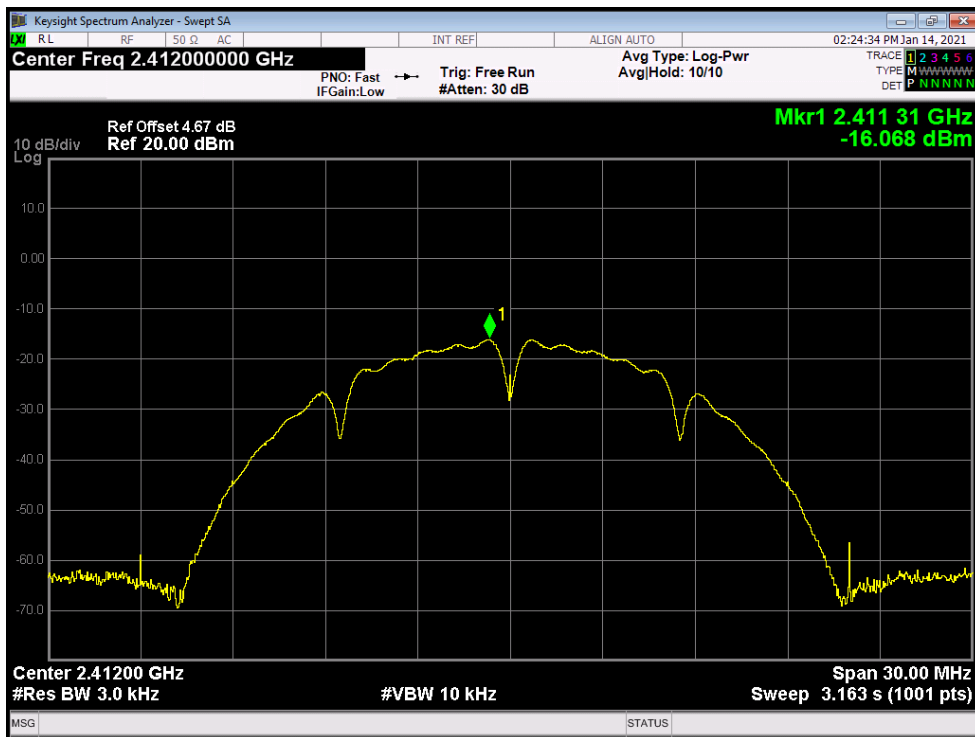


802.11B Mode

2437 MHz

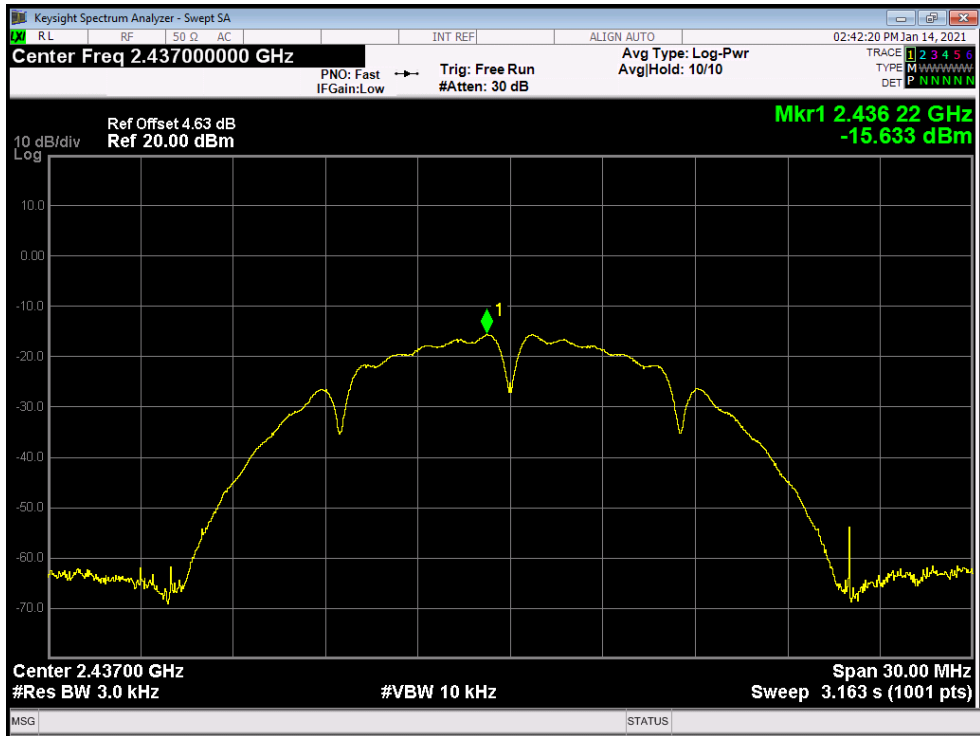

802.11B Mode


2462 MHz

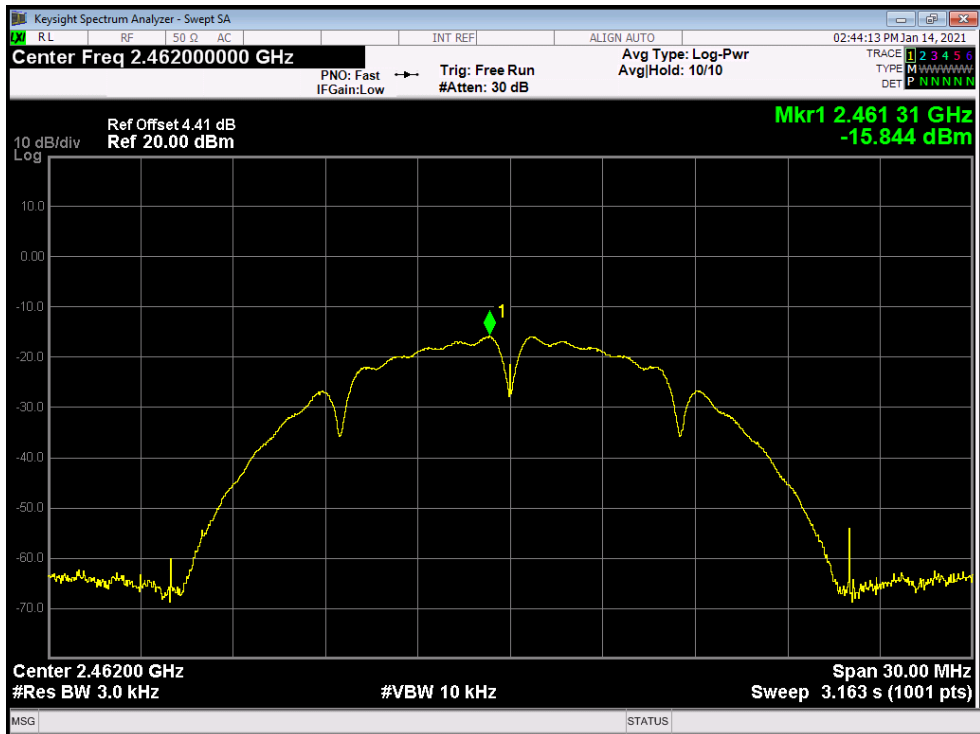

Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11G Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-14.606	8	
2437	-14.234		
2462	-14.265		


802.11G Mode

2412 MHz

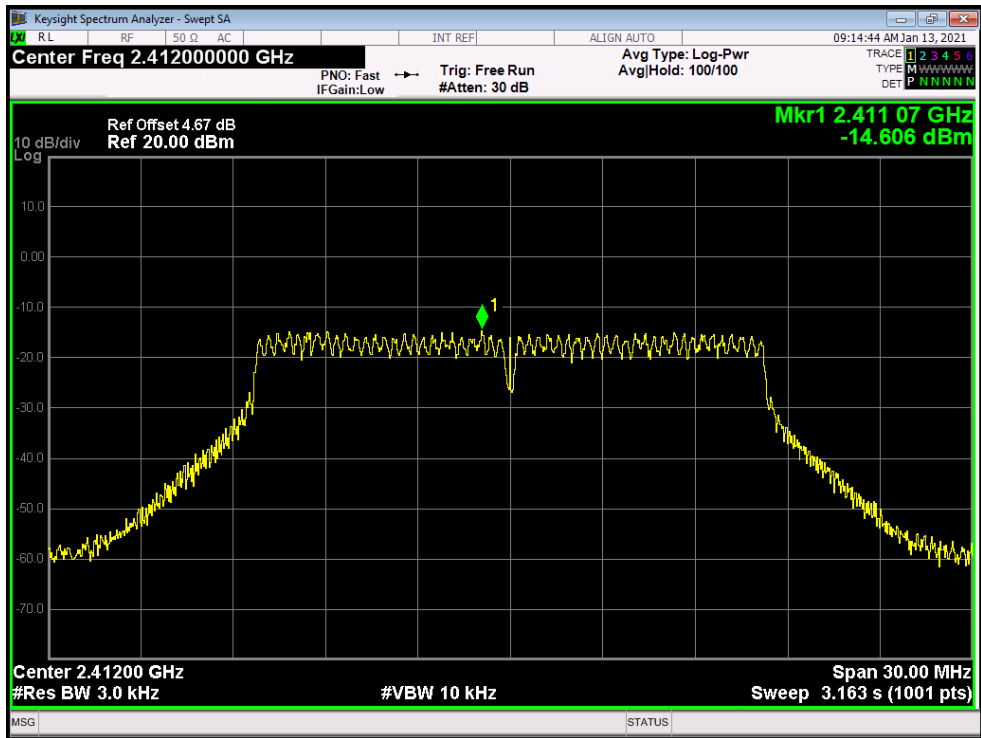


802.11G Mode

2437 MHz

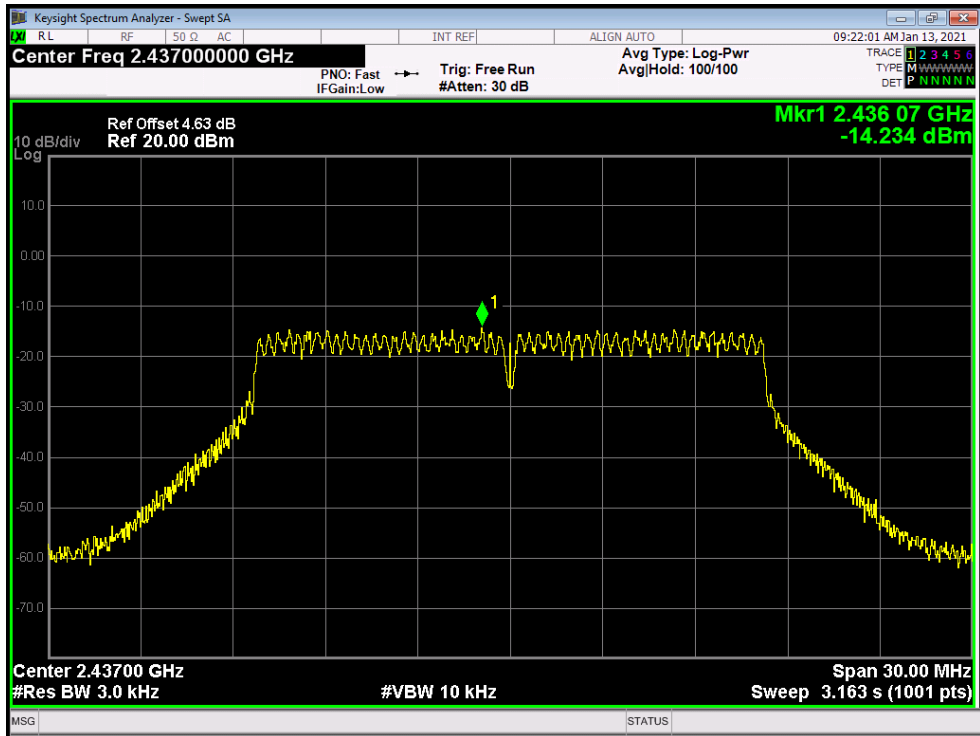

802.11G Mode


2462 MHz

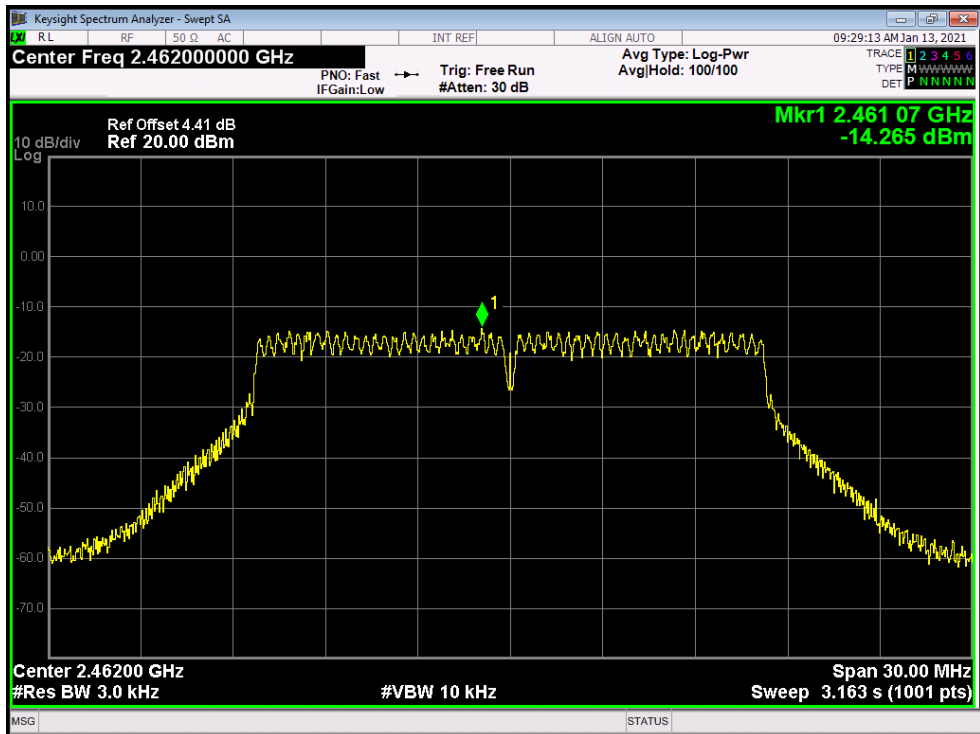

Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT20) Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-13.774	8	
2437	-13.523		
2462	-13.311		


802.11N(HT20) Mode

2412 MHz

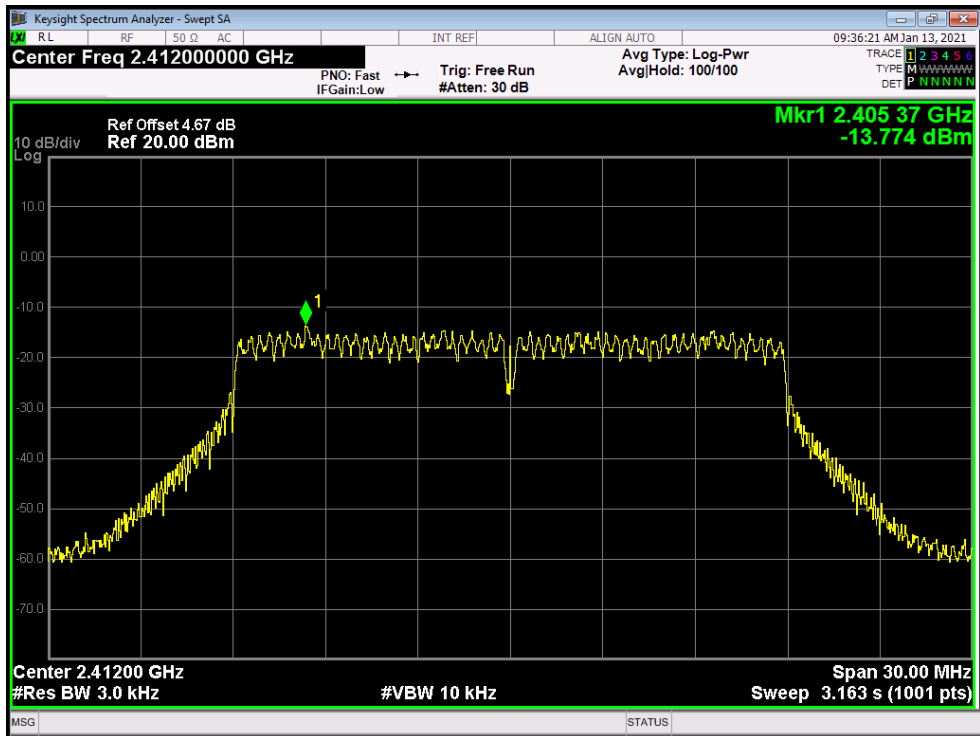


802.11N(HT20) Mode

2437 MHz

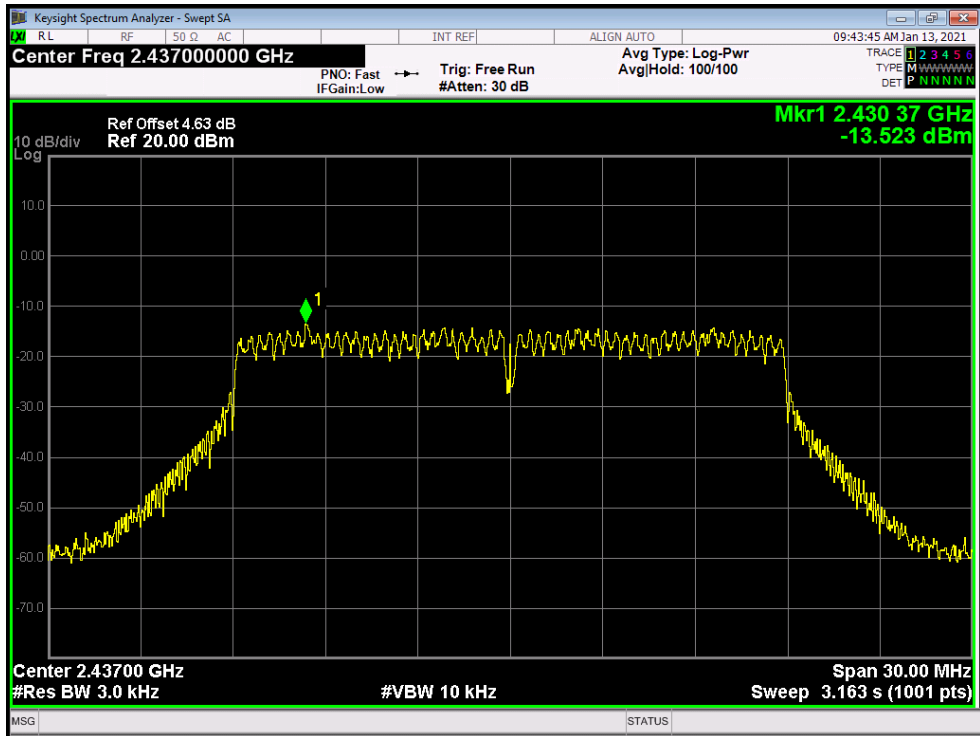

802.11N(HT20) Mode


2462 MHz

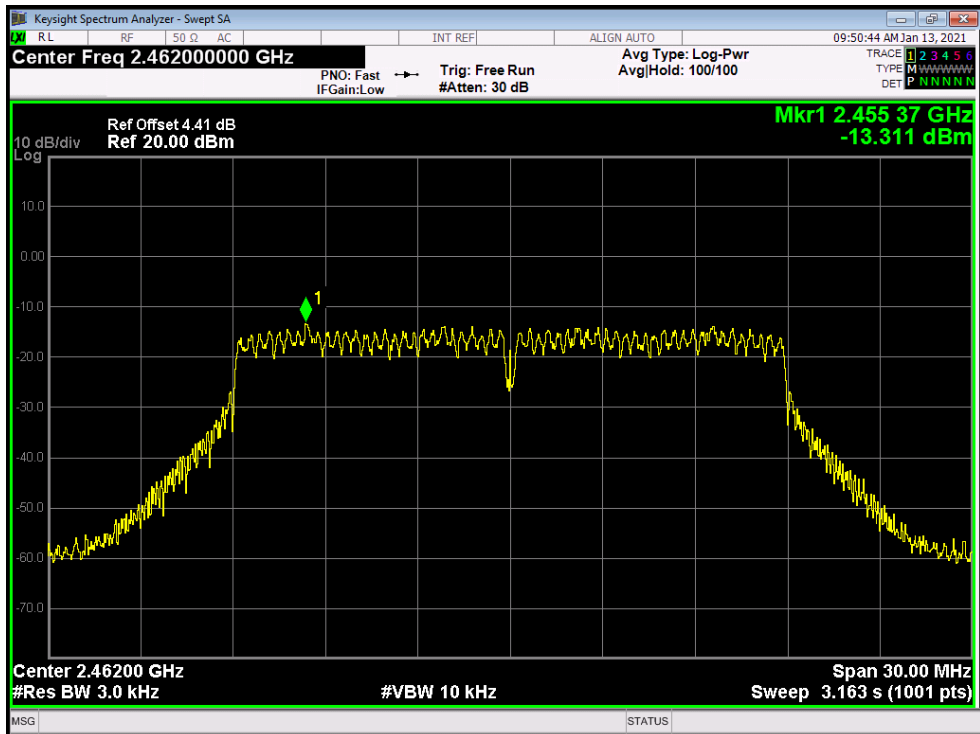


Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT40) Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2422	-15.785	8	
2437	-15.412		
2452	-15.259		

802.11N(HT40) Mode


2422 MHz

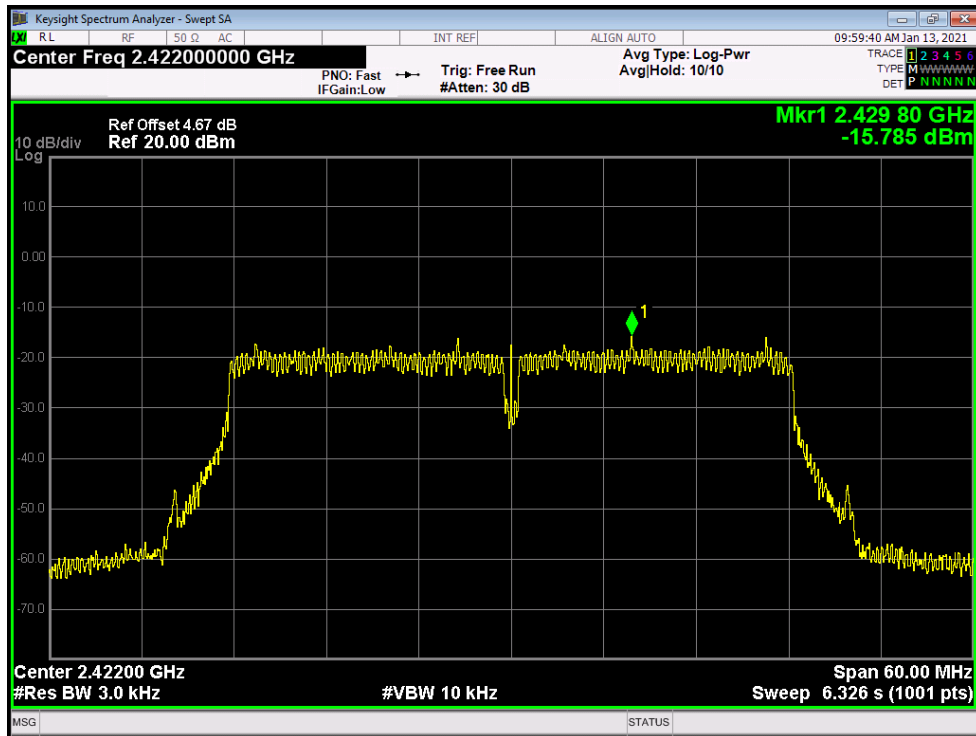

**802.11N(HT40) Mode
2437 MHz**

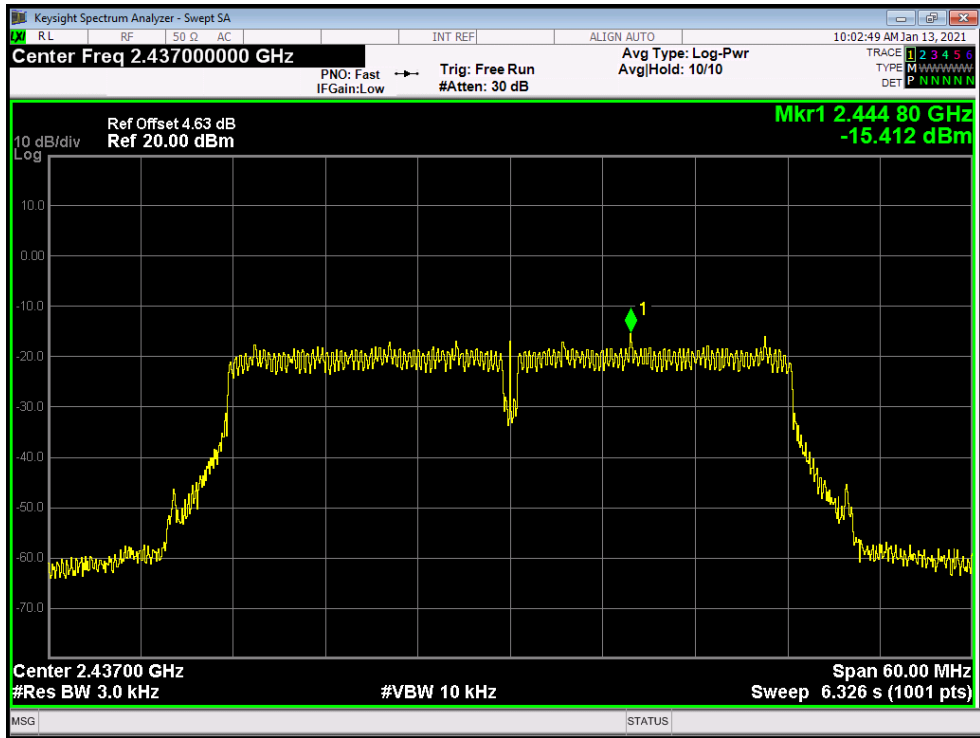

**802.11N(HT40) Mode
2452 MHz**

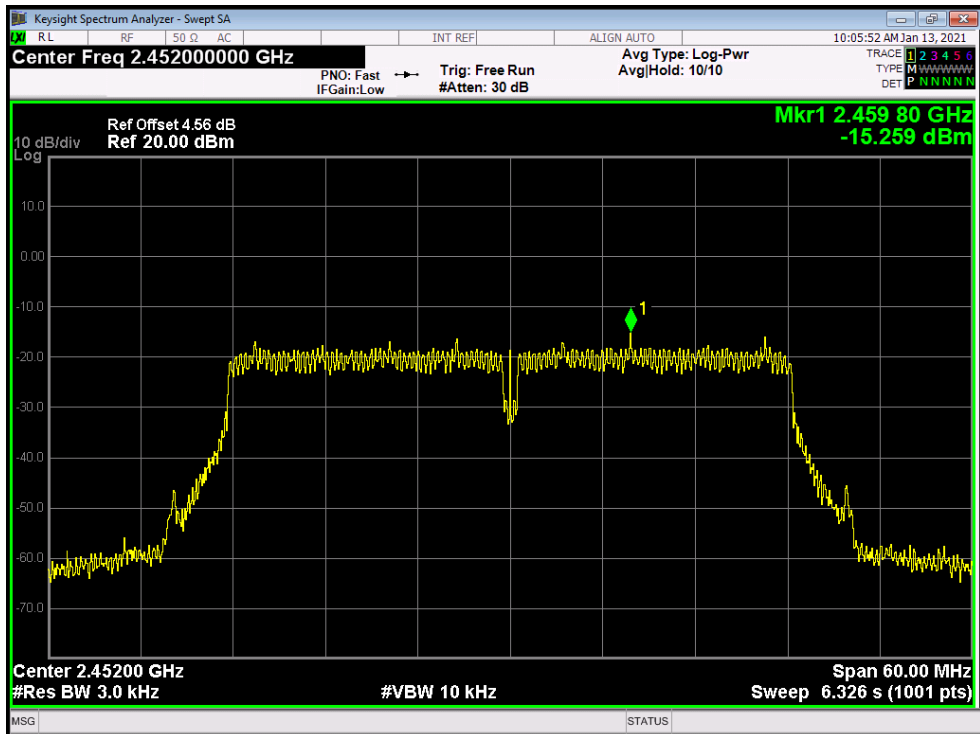

-----END OF REPORT-----