


GFSK Middle Channel

GFSK High Channel






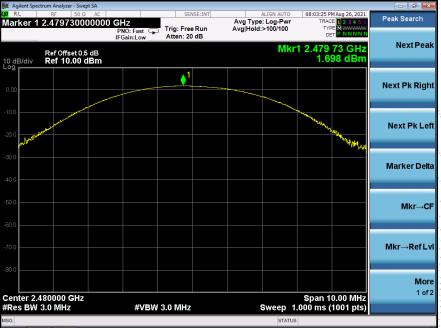

π/4DQPSK Low Channel

π/4DQPSK Middle Channel

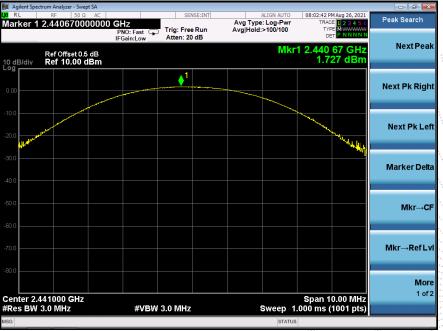



Agilent Spectrum Analyzer - Swept SA				
RL RF 50 Ω AC arker 1 2.479810000000	SENSE:I PNO: Fast IFGain:Low	Avg Type: Log-Pw		Peak Search
Ref Offset 0.5 dB D dB/div Ref 10.00 dBm		M	(r1 2.479 81 GHz 2.376 dBm	Next Pea
	<u></u> 1			Next Pk Righ
				Next Pk Lei
.0			Marker .	Marker Delt
.0				Mkr→C
0				Mkr→RefL
				Mor 1 of
enter 2.480000 GHz tes BW 3.0 MHz	#VBW 3.0 MHz	Sweep	Span 10.00 MHz 1.000 ms (1001 pts)	

π/4DQPSK High Channel



12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port

to the spectrum.

2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

Page 44 of 60

Edition: A3



12.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.006	0.580	PASS
GFSK	Middle	1.002	0.583	PASS
GFSK	High	1.002	0.583	PASS
π/4DQPSK	Low	1.004	0.833	PASS
π/4DQPSK	Middle	0.998	0.833	PASS
π/4DQPSK	High	1.000	0.834	PASS



Test plots GFSK Low Channel





GFSK Middle Channel

GFSK High Channel







π/4DQPSK Low Channel

π/4DQPSK Middle Channel







π/4DQPSK High Channel



13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.


2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.

4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto,



13.4 Test Result

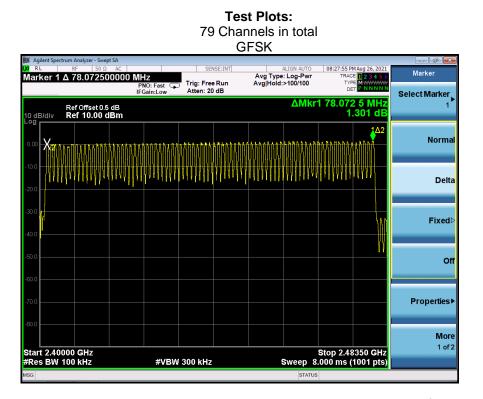

$\sim \sim \sim$	· · · · · · · · · · · · · · · · · · ·	QPSK	π/4C			
					trum Analyzer - Swept SA	
Marker Select Marker	08:30:00 PM Aug 26, 2021 TRACE 1 2 3 4 5 6 TYPE MWAAWAW DET P N N N N N	ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>100/100	SENSE:INT Trig: Free Run Atten: 20 dB		RF 50 Ω AC Δ 78.0725000	RL arker 1
1	1 78.072 5 MHz -0.155 dB	ΔMkr			Ref Offset 0.5 dB Ref 10.00 dBm	dB/div
Norm		MMMMMM	MMMMM	MMMMMMMM	AMAMAMA A	•• - 👬
Del						.0
Fixed	Ŵ					.0
c						o
Properties						0
Mo 1 of	Stop 2.48350 GHz .000 ms (1001 pts)	Sweep 8	300 kHz	#VBW	000 GHz 100 kHz	
		STATUS				6



14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set spectrum analyzer span = 0. Centred on a hopping channel;

3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.

4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).




14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX). DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX). DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:1600/79/6*0.4*79*(MkrDelta)/1000 DH3:1600/79/4*0.4*79*(MkrDelta)/1000 DH1:1600/79/2*0.4*79*(MkrDelta)/1000 Remark: Mkr Delta is once pulse time.

Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.377	0.121	0.4
		DH3	1.644	0.263	0.4
		DH5	2.890	0.308	0.4
π/4DQPSK	Middle	2DH1	0.388	0.124	0.4
		2DH3	1.650	0.264	0.4
		2DH5	2.910	0.310	0.4

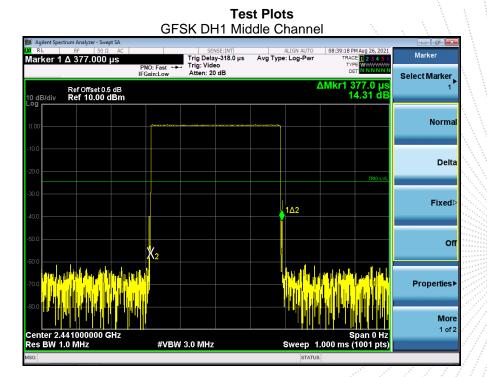




GFSK DH3 Middle Channel

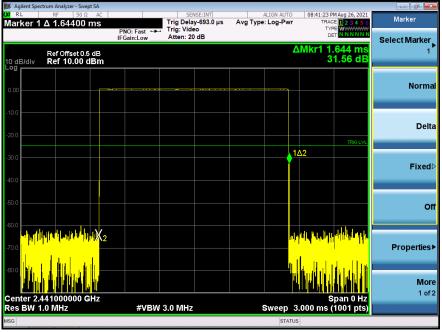

GFSK DH5 High Middle Channel

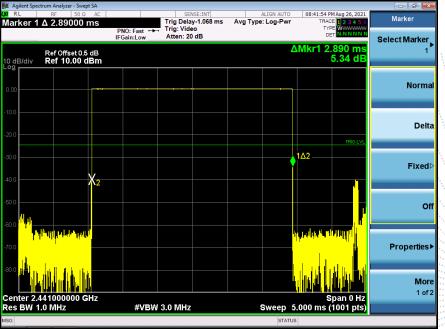



I0 dB/div


Center 2.441000000 GHz Res BW 1.0 MHz

Report No.: BCTC2108600068E

Off

More 1 of 2

Properties►

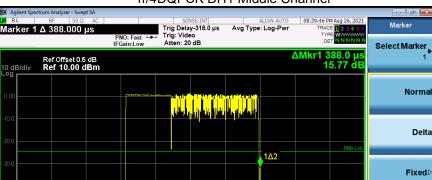


(2

#VBW 3.0 MHz


$\pi/4DQPSK$ DH1 Middle Channel

π/4DQPSK DH3 Middle Channel

Span 0 Hz Sweep 1.000 ms (1001 pts

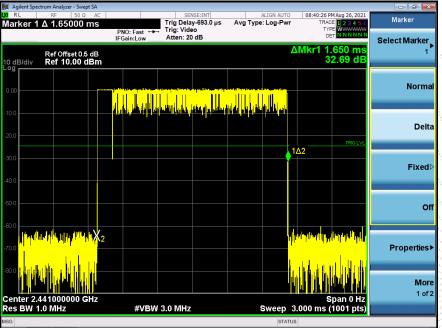



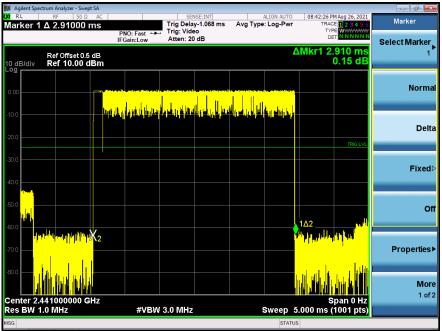

$\pi/4DQPSK$ DH5 Middle Channel




15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result


The EUT antenna is PCB antenna, fulfill the requirement of this section.

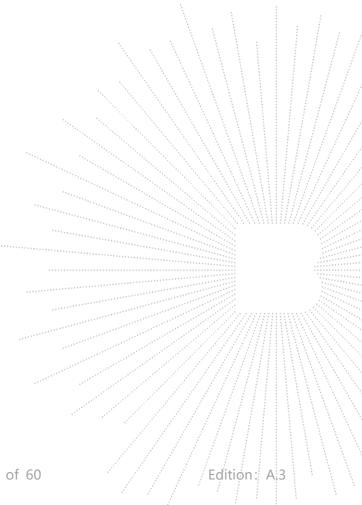



16. EUT Photographs

EUT Photo 1

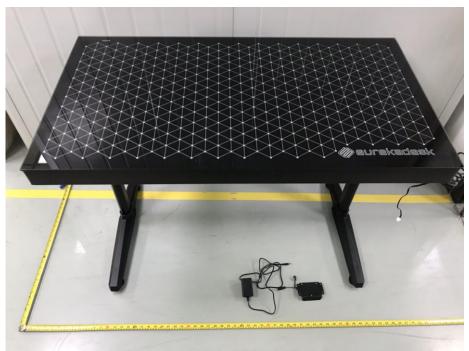

EUT Photo 2





17. EUT Test Setup Photographs


Conducted emissions



Radiated Measurement Photos





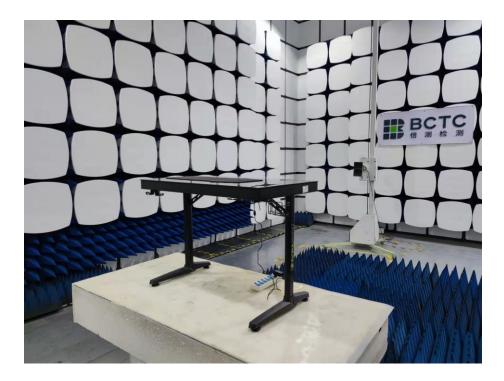

No.: BCTC/RF-EMC-005

Page 59 of 60

Edition: A.3



STATEMENT

1. The equipment lists are traceable to the national reference standards.

2. The test report can not be partially copied unless prior written approval is issued from our lab.

3. The test report is invalid without stamp of laboratory.

4. The test report is invalid without signature of person(s) testing and authorizing.

5. The test process and test result is only related to the Unit Under Test.

6. The quality system of our laboratory is in accordance with ISO/IEC17025.

7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: <u>bctc@bctc-lab.com.cn</u>

******** END ******