

TEST REPORT

Report No.: BCTC2306304342-2E

Applicant: Fortyfour group LLC

Product Name: Mag5000

Model/Type Ref.: X3407101000

Tested Date: 2023-06-28 to 2023-07-05

Issued Date: 2023-07-05

Shenzhen BCTC Testing Co., Ltd.



SHENZHEN

FCC ID: 2AWVU-X3407101000

Product Name: Mag5000
Trademark: N/A
Model/Type Ref.: X3407101000
Prepared For: Fortyfour group LLC
Address: 1770 S. 5350 W, Salt Lake City, United States. 84104
Manufacturer: Fortyfour group LLC
Address: 1770 S. 5350 W, Salt Lake City, United States. 84104
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China.
Sample Received Date: 2023-06-28
Sample tested Date: 2023-06-28 to 2023-07-05
Issue Date: 2023-07-05
Report No.: BCTC2306304342-2E
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results: PASS

Tested by:



Jeff.Fu/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.



Table Of Content

Test Report Declaration	Page
1. Version	4
2. Product Information	5
2.1 Product Information	5
2.2 Support Equipment	5
2.3 Test Mode	5
3. Test Facility And Test Instrument Used	6
3.1 Test Facility	6
3.2 Test Instrument Used	6
4. Method Of Measurement	7
4.1 Applicable Standard	7
4.2 Block Diagram Of Test Setup	7
4.3 Limit	8
4.4 Test Procedure	8
4.5 Equipment Approval Considerations	8
4.6 E And H Field Strength	9
5. Photographs Of Test Set-Up	15


(Note: N/A Means Not Applicable)

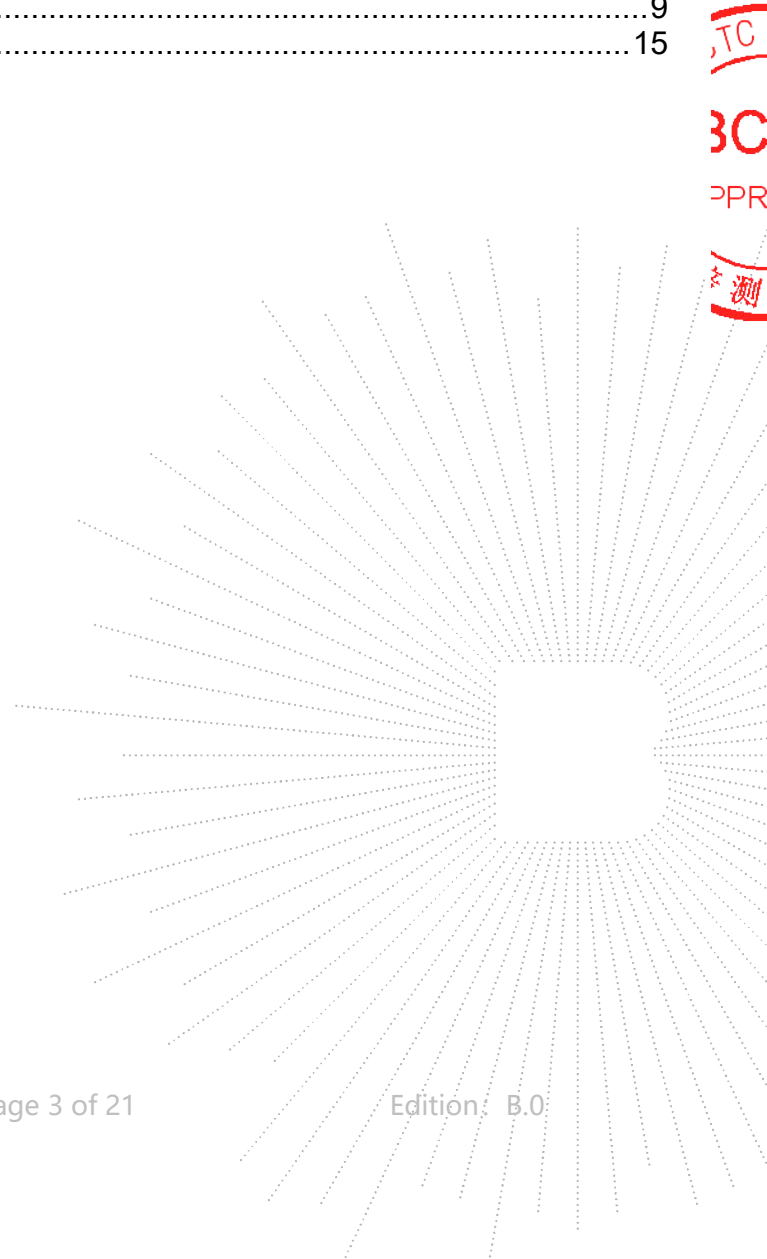

1. Version

Report No.	Issue Date	Description	Approved
BCTC2306304342-2E	2022-09-28	Original	Valid

TEC
TC
OVB
檢

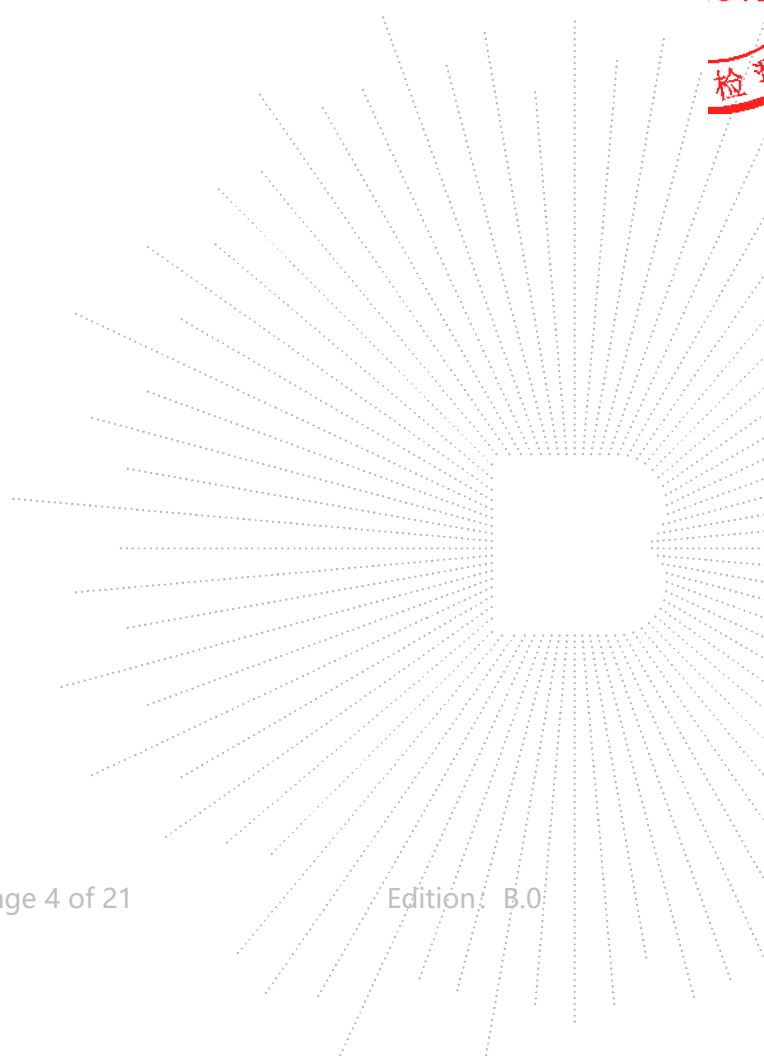

2. Product Information

2.1 Product Information

Model/Type reference:	X3407101000
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Product Description:	Mag5000
Operation Frequency:	115kHz-205kHz
Antenna installation:	loop coil antenna
Ratings:	Type-C Input&Output: DC5V/2.4A
	Micro Input: DC5V/2A
	USB-A Output: DC5V/2.4A
	Wireless Output: 5W

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	---
2.	--	--	BCTC	---	Yes	---

2.2 Support Equipment


No.	Device Type	Brand	Model	Series No.	Note
1.	Mag5000	N/A	X3407101000	UG10BW	EUT
2.	ADAPTER	UGREEN	CD122	N/A	Auxiliary

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

Test Mode 1	Charging+Wireless charging 5W
Test Mode 2	Wireless charging 5W

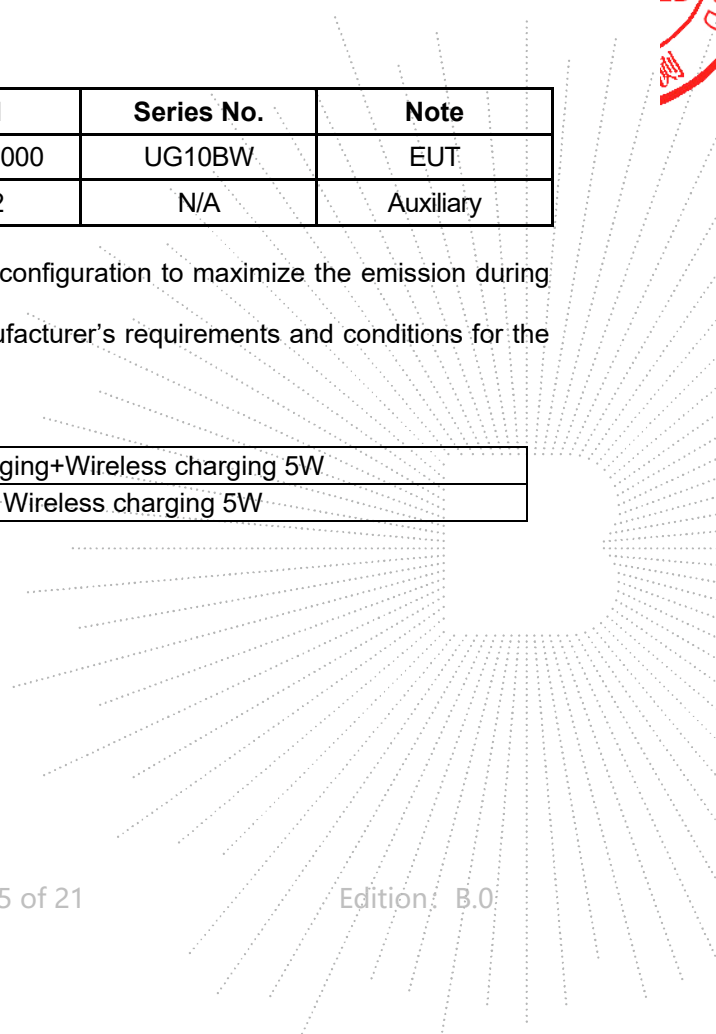

3. Test Facility And Test Instrument Used


3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850
 A2LA certificate registration number is: CN1212
 ISED Registered No.: 23583
 ISED CAB identifier: CN0017

3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electromagnet -ic radiation tester	Wavecontrol	SMP160	19SN0980	May 15, 2023	May 14, 2024
Electromagne- tic field probe	Wavecontrol	WP400-3	20WP120082	Sept. 08, 2022	Sept. 07, 2023
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

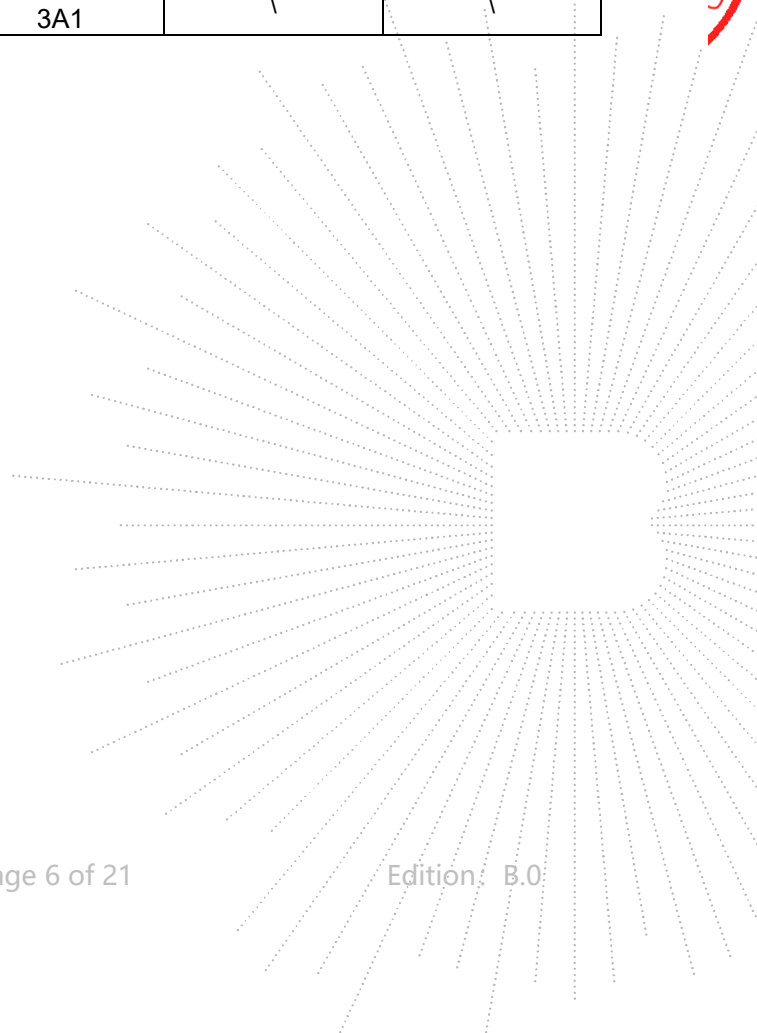
4. Method Of Measurement

4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

4.2 Block Diagram Of Test Setup

A:

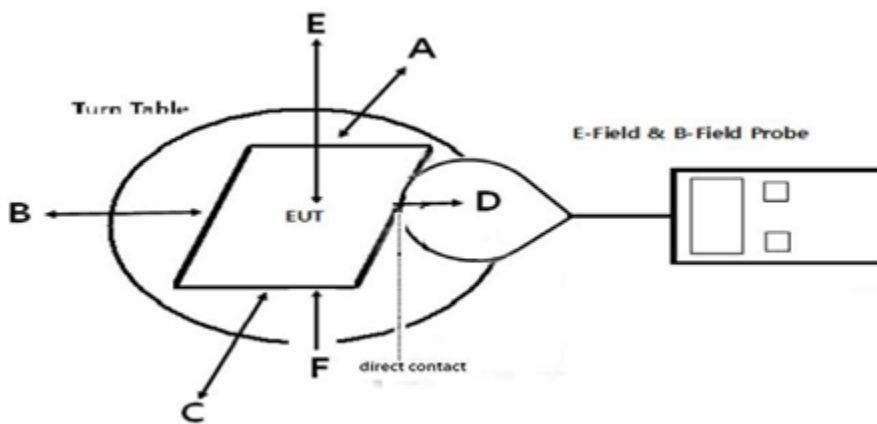

B:

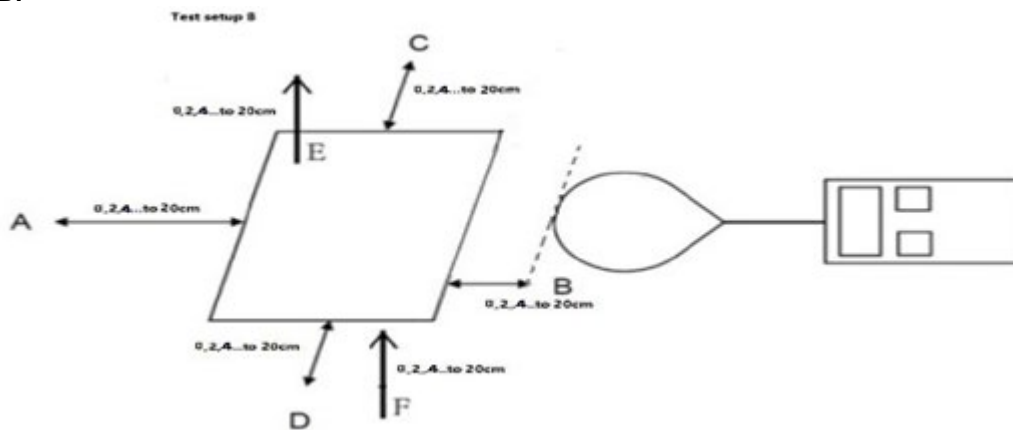

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test Procedure

- a) The RF exposure test was performed in anechoic chamber.
- b) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- c) The highest emission level was recorded and compared with limit as soon as measurement of eachd) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- d) The EUT was measured according to the dictates of KDB680106 D01v03r01
- f) Remark:
The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

- 1) Power transfer frequency is less than 1MHz
Yes, the device operate in the frequency range from 115-205KHz
- 2) Output power from each primary coil is less than or equal to 5 watts.
Yes, the maximum output power of the primary coil is 5W.

- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.
No, the prototype has only a single coil.
- 4) Client device is inserted in or placed directly in contact with the transmitter.
Yes, client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
No,The product is portable
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
Yes, the EUT field strength levels are 10% x MPE limit.

4.6 E And H Field Strength

For setup A:
Worst Case Operating Mode: Mode 2

H-Filed Strength at 0 cm from edges surrounding the EUT (A/m)

Frequency Range (KHz)	Operation condition	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Test Position D (A/m)	Test Position E (A/m)	Test Position F (A/m)	Limits (A/m)
115kHz-205kHz	1% battery	0.074	0.086	0.071	0.093	0.033	0.087	1.63
115kHz-205kHz	50% battery	0.072	0.086	0.091	0.095	0.044	0.083	1.63
115kHz-205kHz	99% battery	0.069	0.060	0.099	0.093	0.036	0.088	1.63

Frequency Range (KHz)	Operation condition	Test Position A (uT)	Test Position B (uT)	Test Position C (uT)	Test Position D (uT)	Test Position E (uT)	Test Position F (uT)
115kHz-205kHz	1% battery	0.093	0.107	0.089	0.116	0.041	0.109
115kHz-205kHz	50% battery	0.090	0.107	0.114	0.119	0.056	0.104
115kHz-205kHz	99% battery	0.087	0.075	0.123	0.117	0.046	0.110

Note: A/m=uT/1.25

E-Filed Strength at 0 cm from edges surrounding the EUT (V/m)

Frequency Range (KHz)	Operation condition	Test Position A (V/m)	Test Position B (V/m)	Test Position C (V/m)	Test Position D (V/m)	Test Position E (V/m)	Test Position F (V/m)	Limits (V/m)
115kHz-205kHz	1% battery	0.071	0.080	0.095	0.103	0.043	0.069	614
115kHz-205kHz	50% battery	0.072	0.089	0.077	0.104	0.042	0.063	614
115kHz-205kHz	99% battery	0.070	0.072	0.095	0.093	0.046	0.091	614

For setup B:
Worst Case Operating Mode: Mode 2

1% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.063	0.076	0.093	0.103	0.048	0.088	1.63
4	0.069	0.076	0.070	0.099	0.042	0.063	1.63
6	0.068	0.075	0.079	0.101	0.043	0.099	1.63
8	0.070	0.089	0.096	0.094	0.031	0.080	1.63
10	0.071	0.063	0.097	0.096	0.034	0.082	1.63
12	0.061	0.082	0.064	0.096	0.046	0.064	1.63
14	0.073	0.073	0.062	0.101	0.038	0.070	1.63
16	0.065	0.086	0.089	0.098	0.030	0.074	1.63
18	0.060	0.061	0.094	0.097	0.037	0.078	1.63
20	0.060	0.072	0.071	0.092	0.031	0.077	1.63

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.079	0.095	0.116	0.128	0.060	0.110
4	0.086	0.095	0.088	0.124	0.053	0.078
6	0.085	0.093	0.099	0.126	0.054	0.123
8	0.088	0.111	0.120	0.118	0.038	0.100
10	0.089	0.078	0.121	0.120	0.043	0.102
12	0.076	0.102	0.080	0.120	0.057	0.081
14	0.092	0.091	0.078	0.127	0.047	0.088
16	0.081	0.107	0.111	0.122	0.038	0.092
18	0.076	0.077	0.118	0.121	0.046	0.097
20	0.075	0.089	0.089	0.114	0.039	0.096

Note: A/m=uT/1.25

TEST
 TO
 OVER
 検査


E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.079	0.082	0.071	0.093	0.046	0.083	614
4	0.073	0.069	0.087	0.102	0.045	0.075	614
6	0.075	0.077	0.083	0.091	0.037	0.082	614
8	0.060	0.068	0.067	0.096	0.047	0.064	614
10	0.063	0.079	0.099	0.101	0.032	0.093	614
12	0.067	0.063	0.065	0.097	0.046	0.062	1.63
14	0.080	0.078	0.063	0.100	0.037	0.083	614
16	0.075	0.080	0.090	0.097	0.039	0.068	614
18	0.067	0.068	0.066	0.103	0.033	0.095	614
20	0.063	0.085	0.075	0.102	0.044	0.087	614

50% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.066	0.062	0.066	0.100	0.046	0.076	1.63
4	0.065	0.082	0.097	0.098	0.040	0.070	1.63
6	0.072	0.062	0.066	0.105	0.041	0.080	1.63
8	0.077	0.089	0.075	0.104	0.041	0.072	1.63
10	0.064	0.074	0.073	0.097	0.032	0.078	1.63
12	0.080	0.087	0.074	0.094	0.046	0.062	1.63
14	0.064	0.077	0.066	0.095	0.037	0.071	1.63
16	0.062	0.082	0.066	0.093	0.039	0.074	1.63
18	0.068	0.083	0.082	0.106	0.030	0.088	1.63
20	0.072	0.075	0.094	0.105	0.046	0.084	1.63

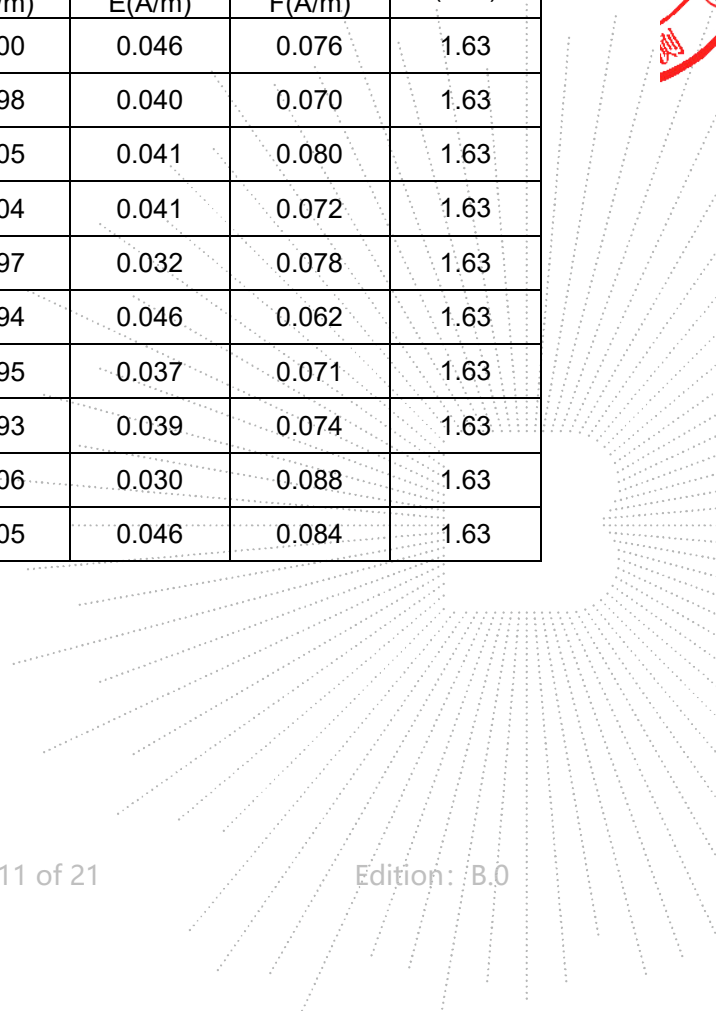

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.083	0.078	0.082	0.125	0.057	0.095
4	0.081	0.102	0.121	0.122	0.051	0.088
6	0.090	0.078	0.082	0.132	0.051	0.100
8	0.097	0.111	0.094	0.130	0.052	0.090
10	0.080	0.092	0.092	0.121	0.040	0.097
12	0.100	0.109	0.092	0.118	0.057	0.078
14	0.080	0.096	0.082	0.118	0.046	0.088
16	0.077	0.102	0.082	0.116	0.049	0.093
18	0.085	0.104	0.103	0.133	0.038	0.110
20	0.091	0.093	0.117	0.132	0.057	0.105

Note: $A/m = uT/1.25$

E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)

Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.069	0.068	0.090	0.099	0.041	0.083	614
4	0.076	0.074	0.083	0.102	0.033	0.087	614
6	0.075	0.063	0.070	0.100	0.049	0.070	614
8	0.071	0.089	0.072	0.096	0.030	0.081	614
10	0.062	0.067	0.074	0.097	0.050	0.090	614
12	0.080	0.065	0.064	0.096	0.046	0.090	614
14	0.078	0.090	0.090	0.095	0.032	0.098	614
16	0.061	0.084	0.091	0.097	0.034	0.078	614
18	0.064	0.060	0.084	0.105	0.045	0.083	614
20	0.062	0.084	0.071	0.102	0.050	0.083	614

S. CO., LTD.

99% battery

H-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.078	0.088	0.084	0.107	0.048	0.082	1.63
4	0.077	0.064	0.083	0.109	0.047	0.084	1.63
6	0.061	0.081	0.095	0.104	0.037	0.098	1.63
8	0.064	0.067	0.081	0.091	0.034	0.076	1.63
10	0.071	0.079	0.088	0.102	0.048	0.099	1.63
12	0.070	0.082	0.085	0.091	0.046	0.064	1.63
14	0.070	0.081	0.079	0.093	0.032	0.095	1.63
16	0.071	0.064	0.071	0.103	0.037	0.089	1.63
18	0.073	0.081	0.080	0.097	0.038	0.095	1.63
20	0.068	0.077	0.067	0.102	0.044	0.074	1.63


Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.097	0.110	0.105	0.134	0.060	0.103
4	0.096	0.080	0.103	0.136	0.059	0.105
6	0.076	0.102	0.119	0.130	0.046	0.123
8	0.079	0.084	0.101	0.113	0.043	0.095
10	0.089	0.099	0.109	0.127	0.061	0.123
12	0.088	0.103	0.107	0.114	0.057	0.079
14	0.088	0.101	0.099	0.116	0.039	0.119
16	0.088	0.080	0.088	0.129	0.046	0.111
18	0.092	0.102	0.100	0.121	0.048	0.119
20	0.084	0.096	0.083	0.128	0.056	0.093

Note: A/m=uT/1.25

E-Filed Strength at (Distance from 0cm to 20cm and with 2-cm increments) surrounding the EUT (V/m)



Test distance (cm)	Test Position A(V/m)	Test Position B(V/m)	Test Position C(V/m)	Test Position D(V/m)	Test Position E(V/m)	Test Position F(V/m)	Limits (V/m)
2	0.062	0.072	0.091	0.101	0.038	0.063	614
4	0.066	0.072	0.071	0.096	0.046	0.096	614
6	0.079	0.072	0.075	0.105	0.041	0.089	614
8	0.066	0.061	0.066	0.105	0.045	0.093	614
10	0.071	0.061	0.083	0.102	0.048	0.070	614
12	0.065	0.076	0.071	0.110	0.046	0.069	614
14	0.072	0.075	0.095	0.097	0.033	0.067	614
16	0.070	0.080	0.076	0.103	0.048	0.094	614
18	0.064	0.072	0.071	0.107	0.033	0.093	614
20	0.061	0.071	0.098	0.095	0.032	0.098	614



SHEINZHEN

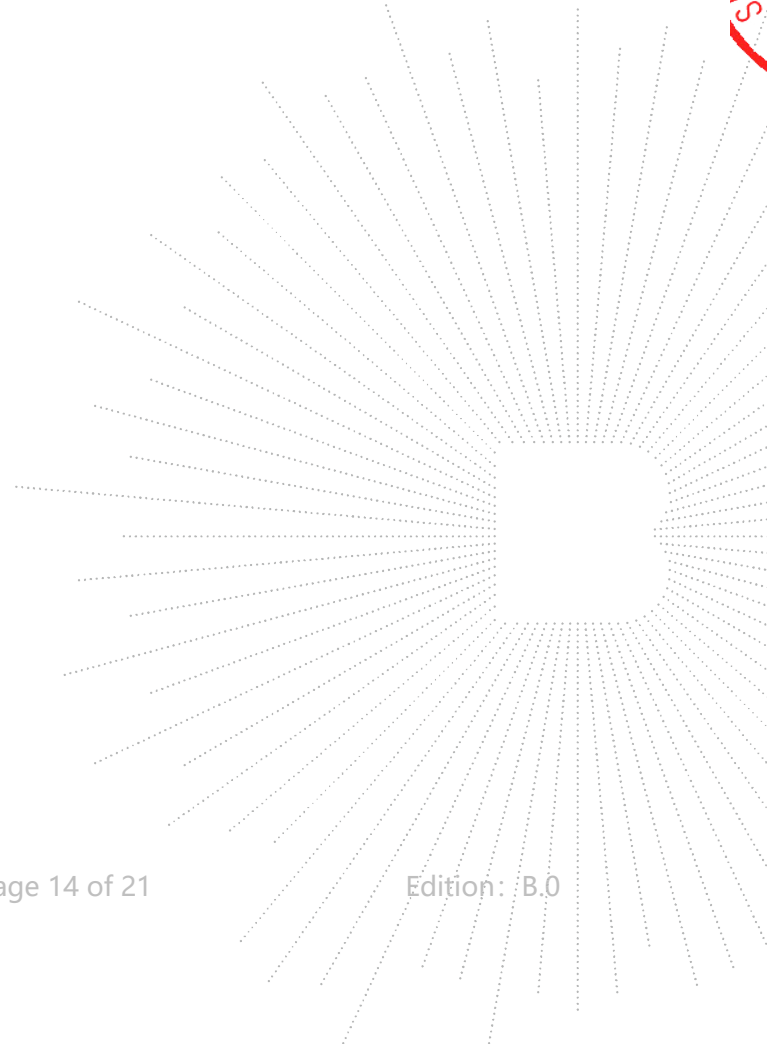


5. Photographs Of Test Set-Up

0CM

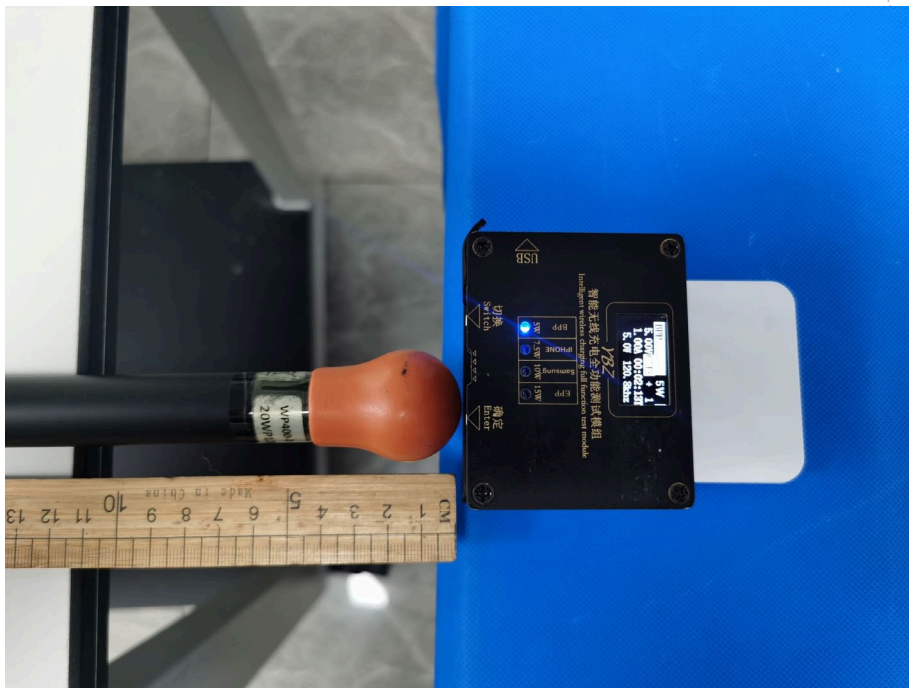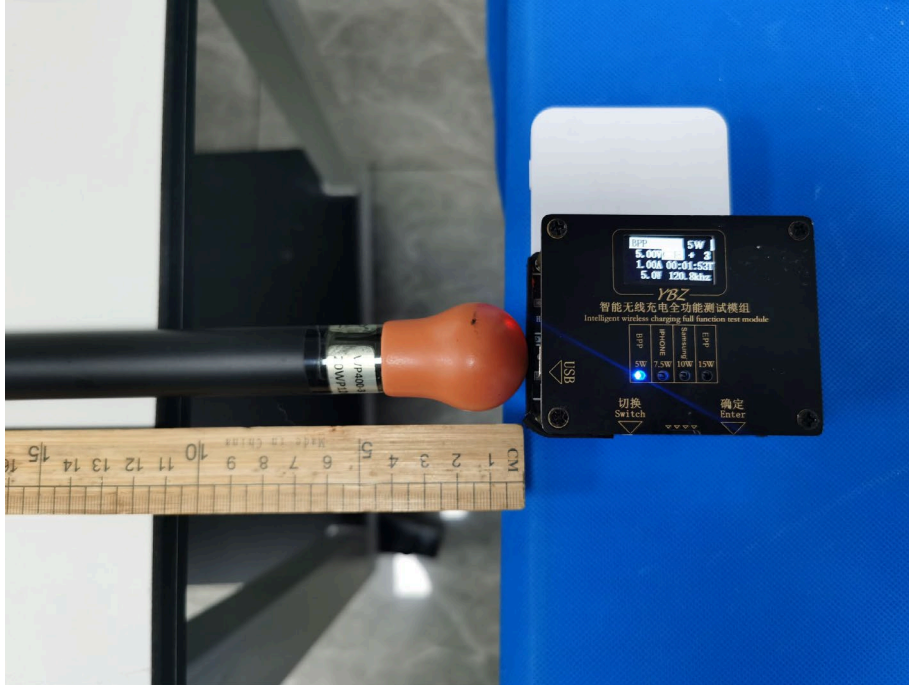

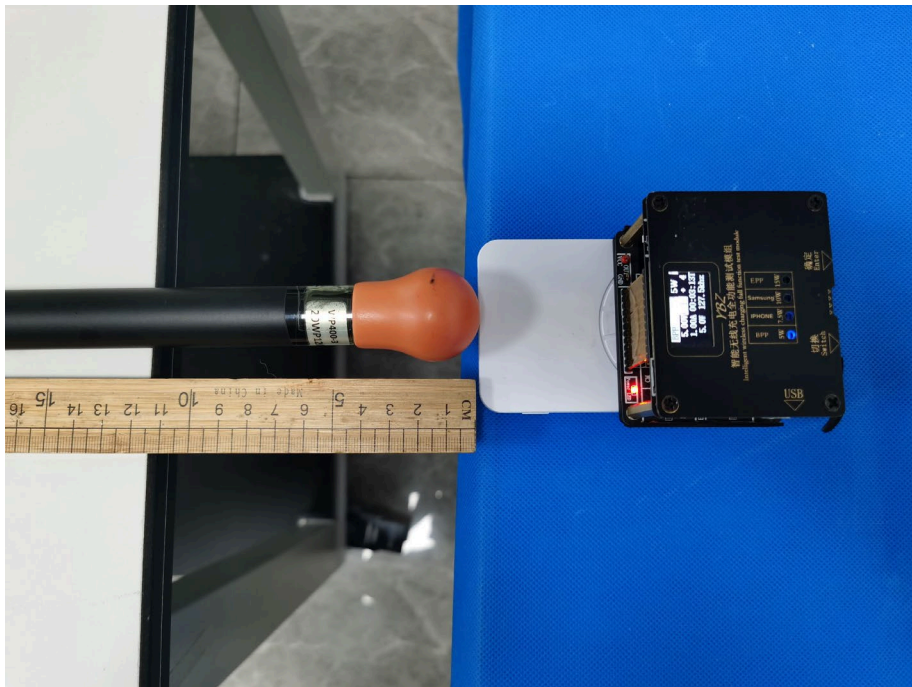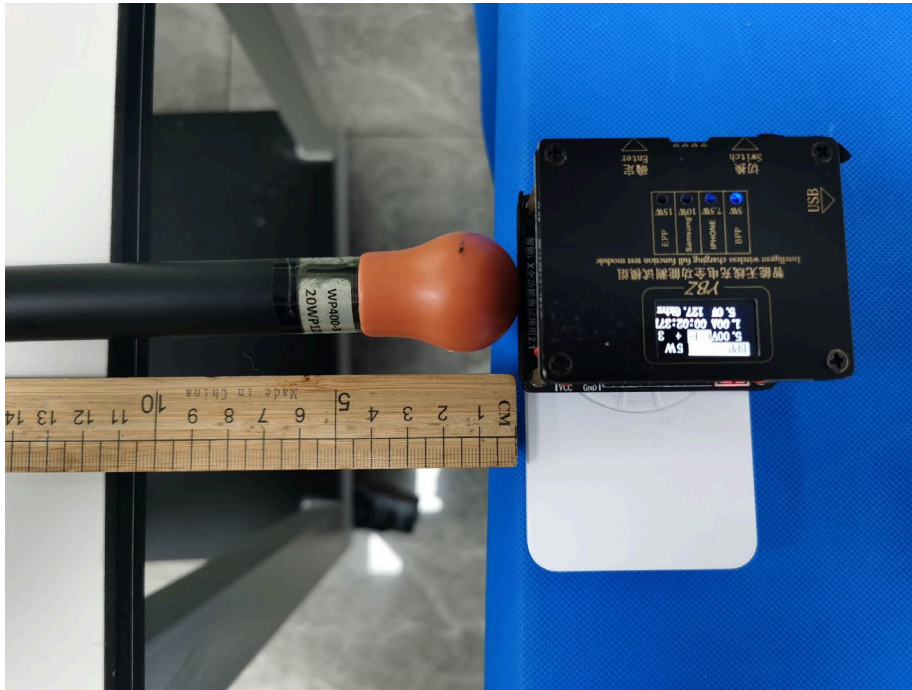


TC
30
PC
漢

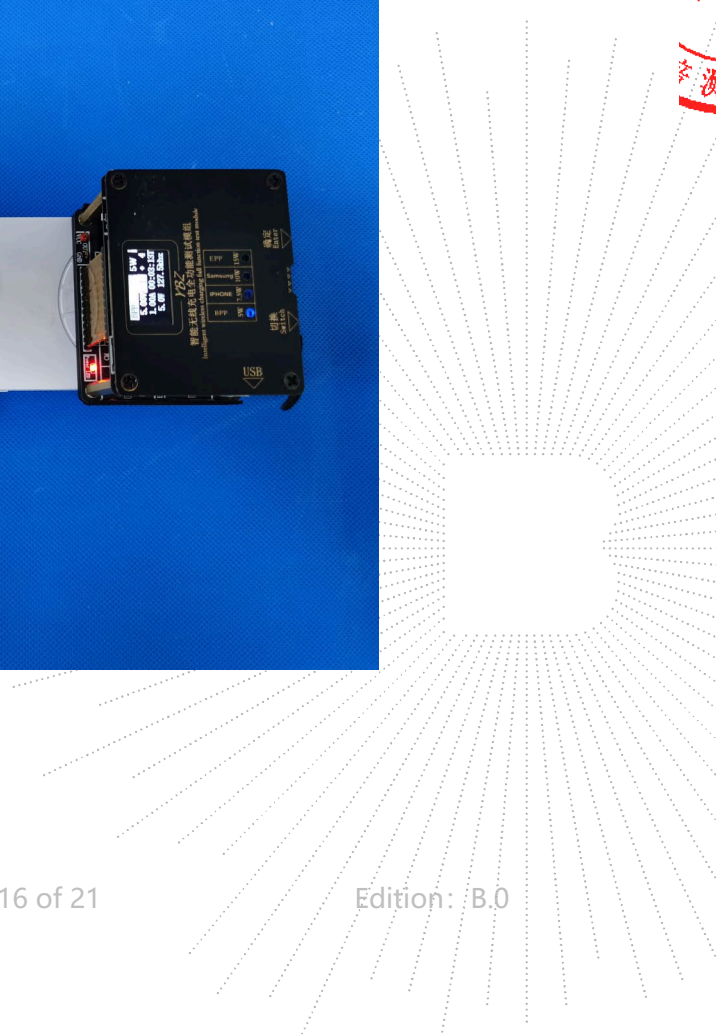





RC
封

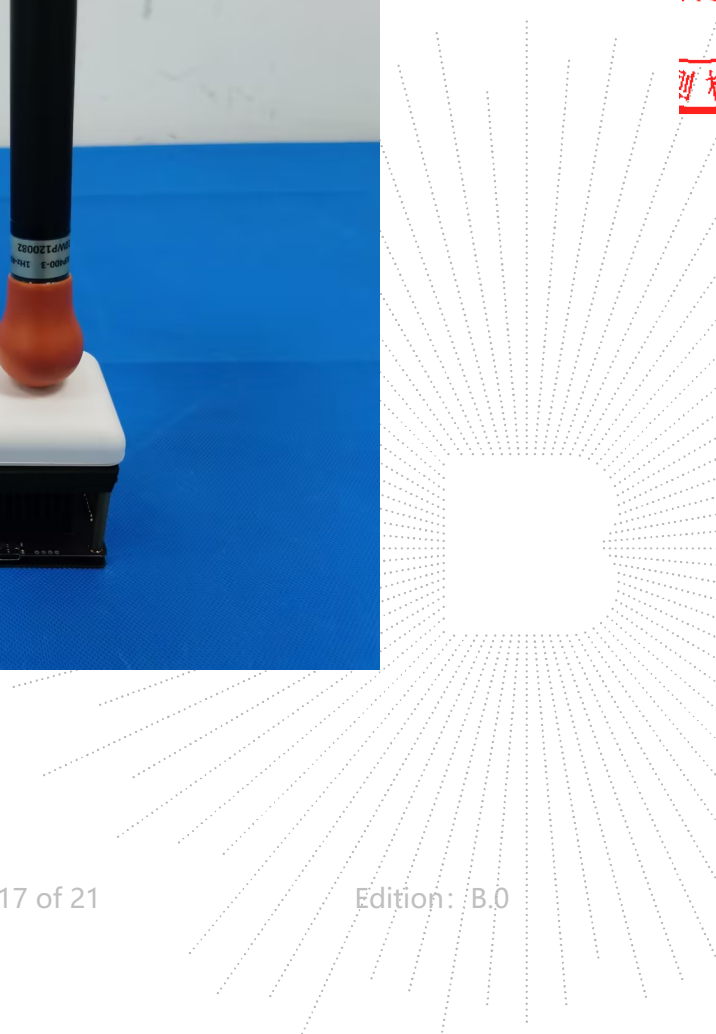



20CM

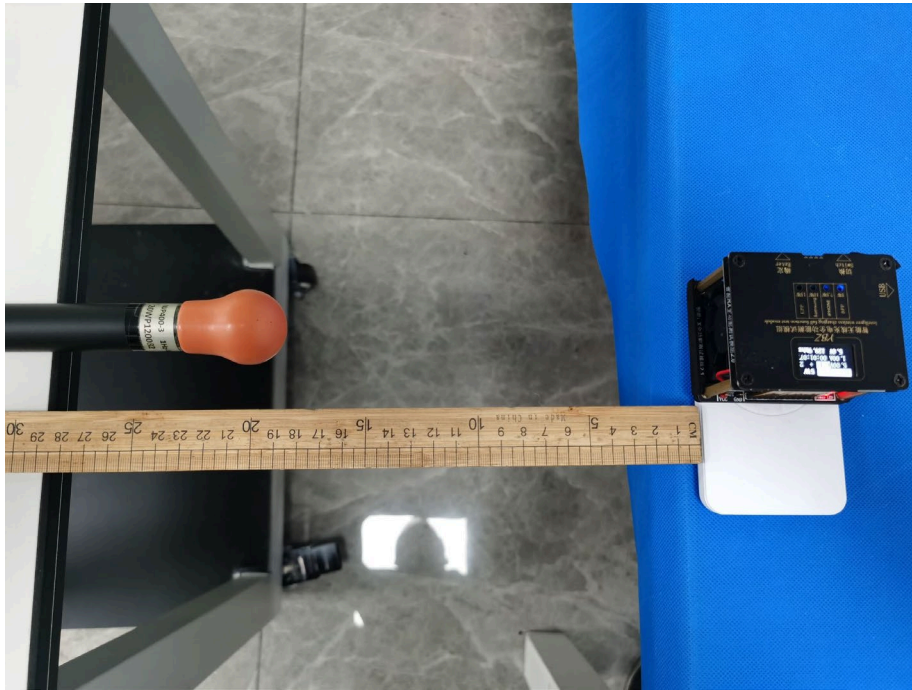

TEC
FC
DVI

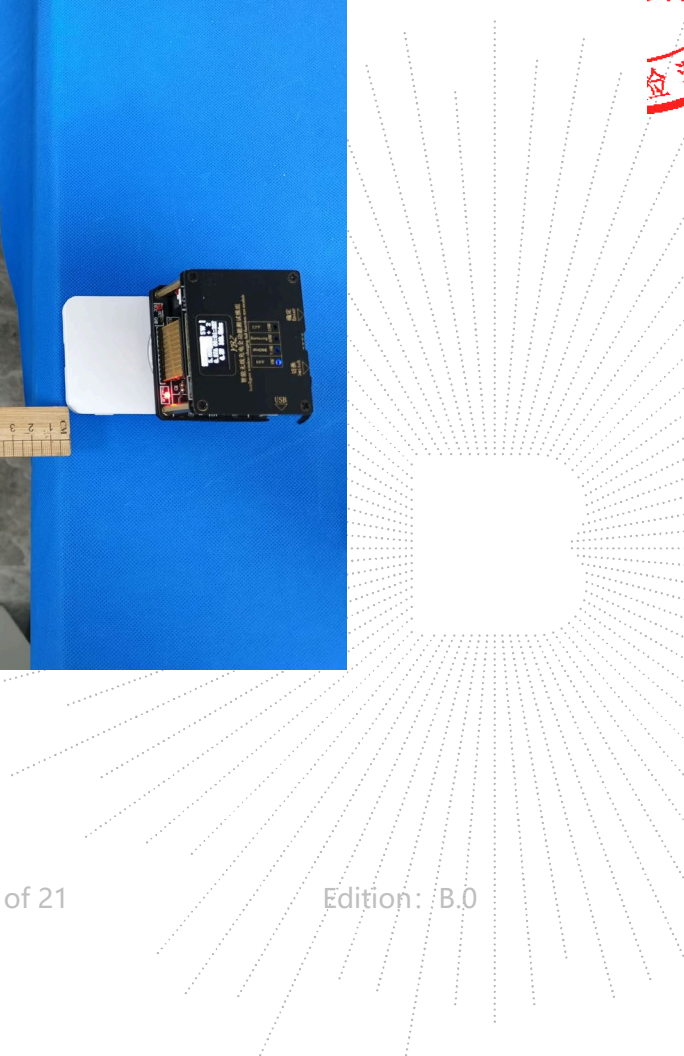

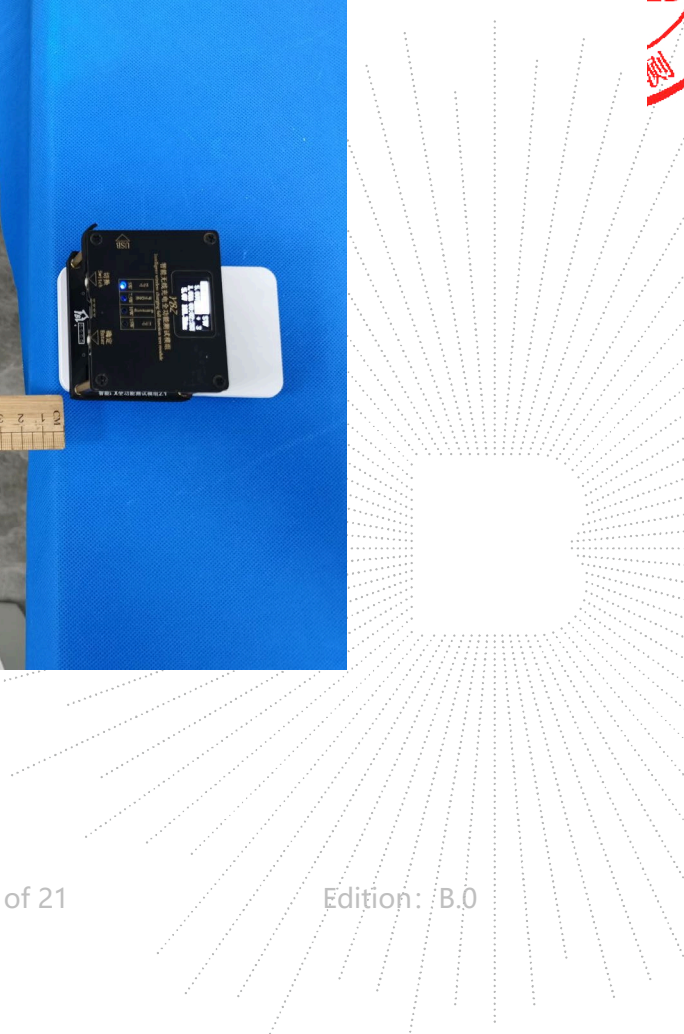

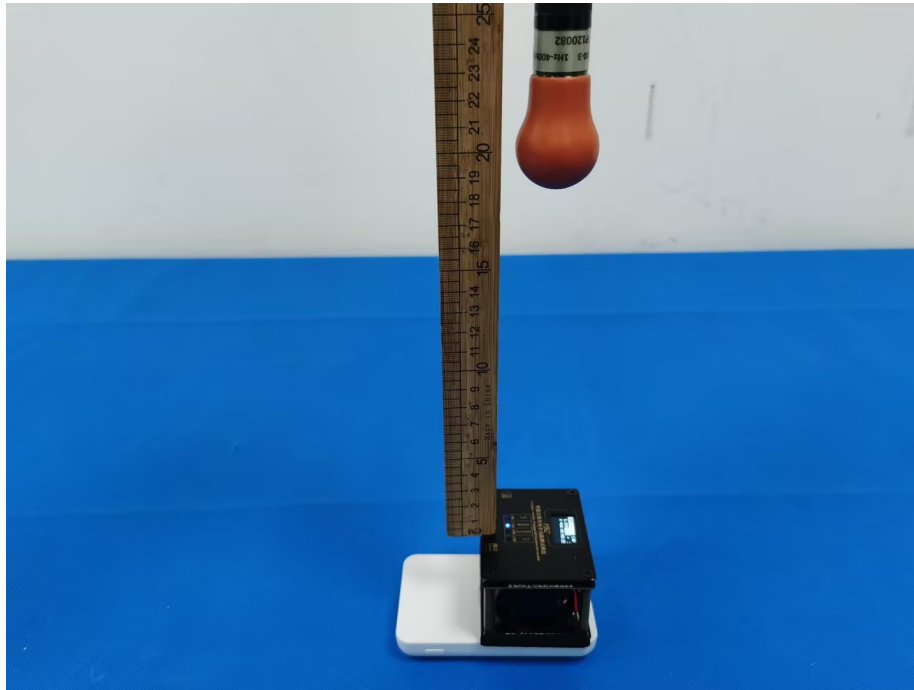

ING CO. LID



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** **END** *****

2017

