




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	12.536	30	Pass
NVNT	BLE	2442	Ant1	12.904	30	Pass
NVNT	BLE	2480	Ant1	12.933	30	Pass



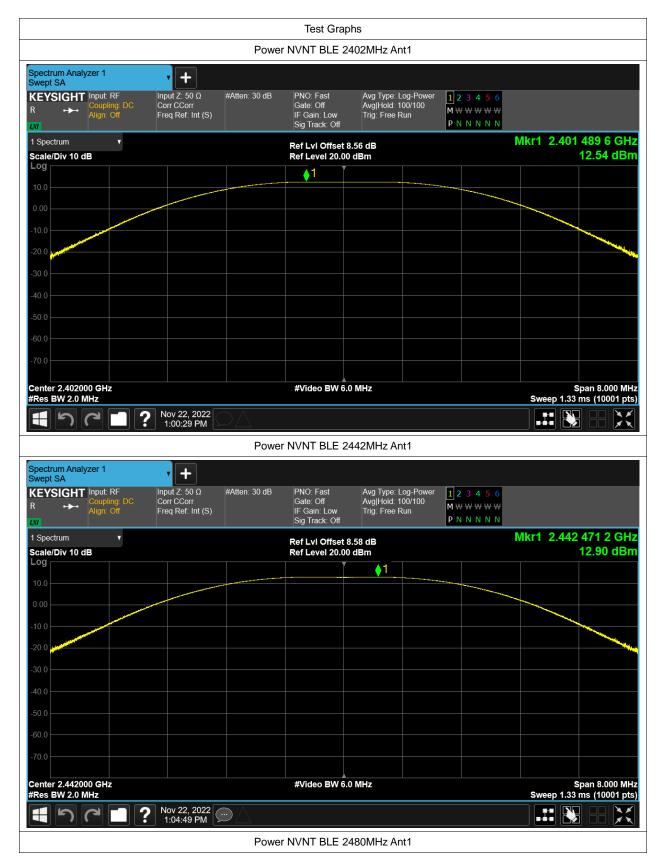









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.351	0.5	Pass
NVNT	BLE	2442	Ant1	1.354	0.5	Pass
NVNT	BLE	2480	Ant1	1.35	0.5	Pass














Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.112	
NVNT	BLE	2442	Ant1	2.118	
NVNT	BLE	2480	Ant1	2.128	

Project No.: JYTSZR2211065



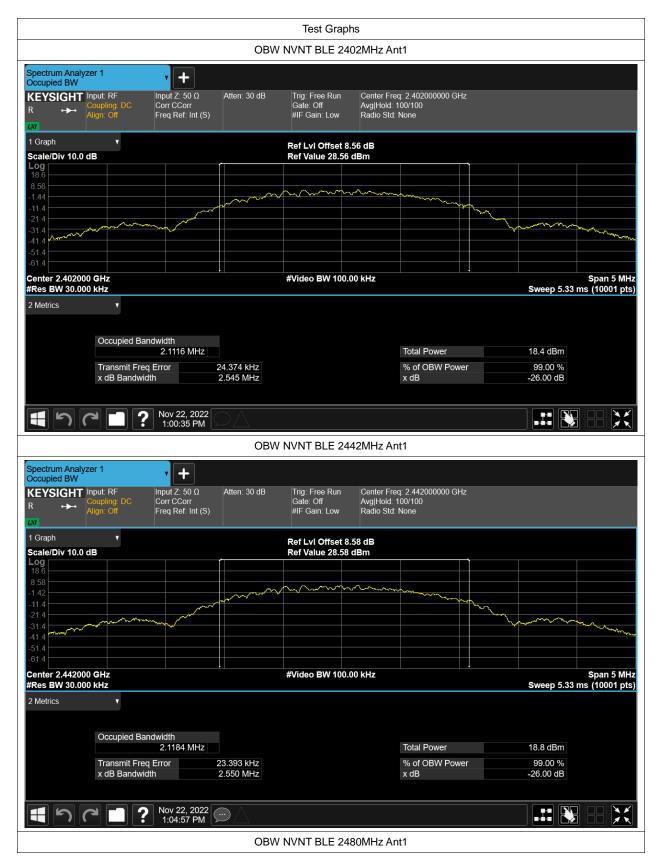










Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.106	8	Pass
NVNT	BLE	2442	Ant1	-4.99	8	Pass
NVNT	BLE	2480	Ant1	-5.127	8	Pass







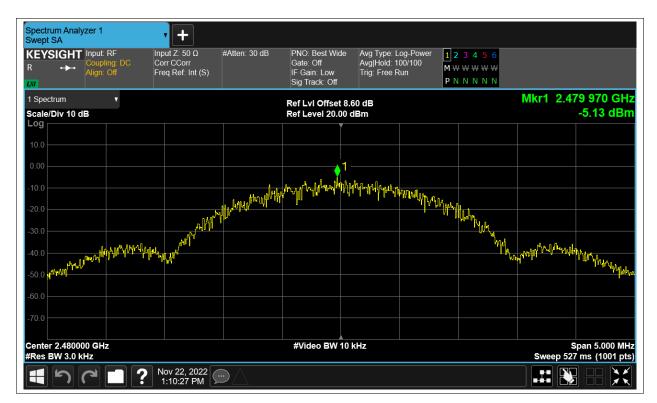





Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-60.64	-20	Pass
NVNT	BLE	2480	Ant1	-53.11	-20	Pass













Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.29	-20	Pass
NVNT	BLE	2442	Ant1	-50.41	-20	Pass
NVNT	BLE	2480	Ant1	-51.05	-20	Pass



