

RADIO TEST REPORT

FCC ID: 2AWWP-YLAP-1

Product: YLAP

Trade Mark: N/A

Model No.: YLAP-1/2.4G

Family Model: N/A

Report No.: S20082401803001

Issue Date: 10 Nov. 2020

Prepared for

Guangzhou Yaliang Technology Co., Ltd.
Yaliang Technology Building, 38 Qide Road, Baiyun District, Guangzhou,
Guangdong 510000 China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-3699 5508
Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY.....	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	10
6.2	SUPPORT EQUIPMENT.....	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
7	TEST REQUIREMENTS	14
7.1	CONDUCTED EMISSIONS TEST	14
7.2	RADIATED SPURIOUS EMISSION	17
7.3	6DB BANDWIDTH.....	26
7.4	PEAK OUTPUT POWER	31
7.5	POWER SPECTRAL DENSITY	37
7.6	CONDUCTED BAND EDGE MEASUREMENT.....	42
7.7	SPURIOUS RF CONDUCTED EMISSIONS.....	45
7.8	ANTENNA APPLICATION	52

1 TEST RESULT CERTIFICATION

Applicant's name	Guangzhou Yaliang Technology Co., Ltd.
Address	Yaliang Technology Building, 38 Qide Road, Baiyun District, Guangzhou, Guangdong 510000 China
Manufacturer's Name	Guangzhou Yaliang Technology Co., Ltd.
Address	Yaliang Technology Building, 38 Qide Road, Baiyun District, Guangzhou, Guangdong 510000 China
Product description	
Product name	YLAP
Model and/or type reference	YLAP-1/2.4G
Family Model	N/A

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 662911 D01 Multiple Transmitter Output v02r01 FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01 ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	Complied


This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 24 Aug. 2020 ~ 10 Nov. 2020

Testing Engineer : 
(Mary Hu)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	N/A	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	YLAP
Trade Mark	N/A
FCC ID	2AWWP-YLAP-1
Model No.	YLAP-1/2.4G
Family Model	N/A
Model Difference	N/A
Operating Frequency	2405MHz~2470MHz
Modulation	O-QPSK
Number of Channels	14 Channels
Antenna Type	PCB Antenna
Antenna Gain	0dBi
Power supply	<input checked="" type="checkbox"/> DC supply: DC 4.8-5.5V
	<input checked="" type="checkbox"/> N/A
HW Version	TagStation_v2.2.5
SW Version	1.9.26

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (0.25Mbps for O-QPSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
11	2405
12	2410
13	2415
14	2420
15	2425
16	2430
17	2435
18	2440
19	2445
20	2450
21	2455
22	2460
23	2465
24	2470

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Test Cases	
Test Item	Data Rate/ Modulation
	O-QPSK
AC Conducted Emission	Mode 1: normal link mode
Radiated Test Cases	Mode 1: normal link mode
	Mode 2: 2.4G Tx Ch11_2405MHz_0.25Mbps
	Mode 3: 2.4G Tx Ch18_2440MHz_0.25Mbps
	Mode 4: 2.4G Tx Ch24_2470MHz_0.25Mbps
Conducted Test Cases	Mode 2: 2.4G Tx Ch11_2405MHz_0.25Mbps
	Mode 3: 2.4G Tx Ch18_2440MHz_0.25Mbps
	Mode 4: 2.4G Tx Ch24_2470MHz_0.25Mbps

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. AC power line Conducted Emission was tested under maximum output power.
3. For radiated test cases, the worst mode data rate 0.25Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.
4. EUT is set to continuous transmission mode. duty cycle greater than 98%.

This EUT has two modules, Module A and Module B. Both are support zigbee.

ANT 1 and ANT 2 are correlated with each other, each with the same directional gain GANT: 0dBi


Directional gain=GANT+10log(NANT)dBi

For MIMO mode, Directional gain=0+10log(2)dBi=3.01dBi in 2.4GHz band.


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

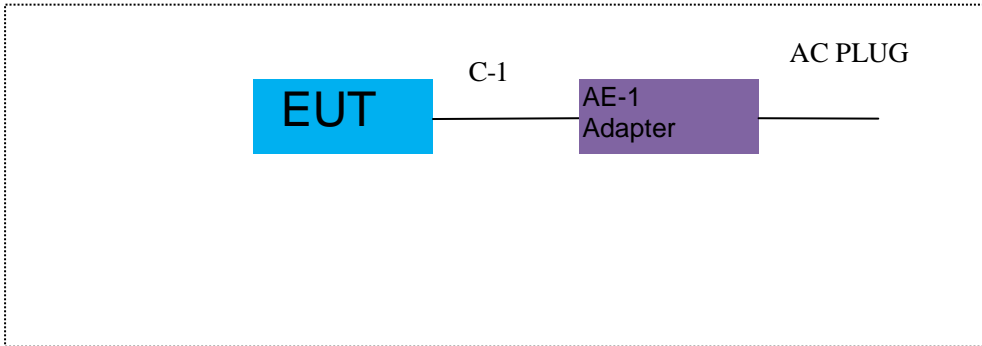

For Radiated Test Cases

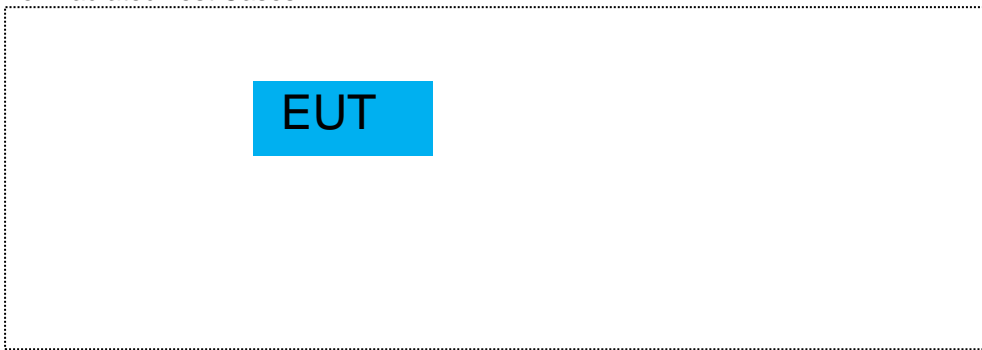

For Conducted Test Cases

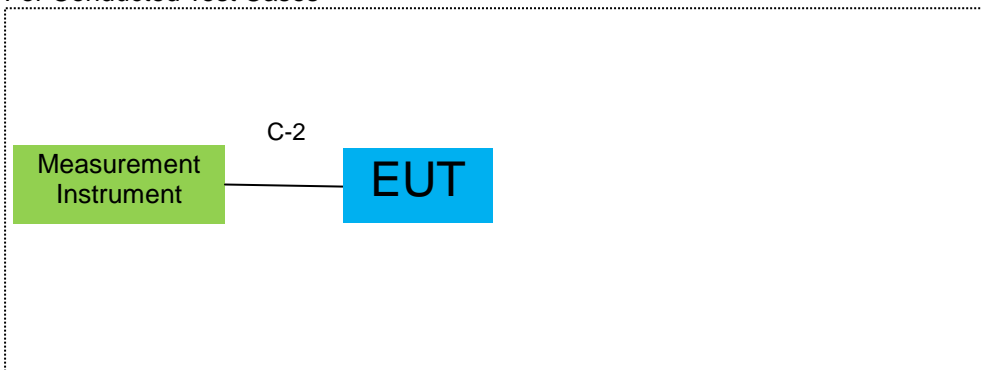

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	0.8m
C-3	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.07.13	2021.07.12	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.08.07	2021.08.06	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2018.04.08	2021.04.07	3 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.11.18	2020.11.17	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.07.13	2021.07.12	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.11.18	2020.11.17	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2020.07.13	2021.07.12	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2019.06.28	2022.06.27	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.04.07	2023.04.06	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
2	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.11	2021.05.10	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11	2023.05.10	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Aux Equipment & Test Cable which is scheduled for calibration every 2 or 3 years.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

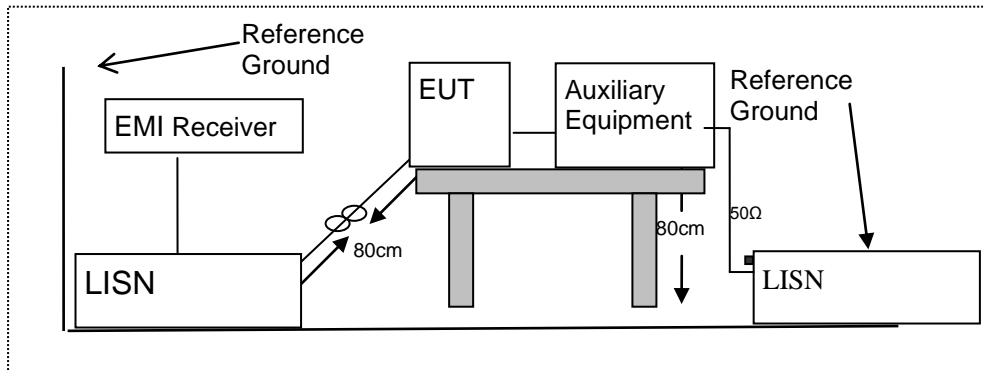

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.


7.1.6 Test Results

EUT:	YLAP	Model Name :	YLAP-1/2.4G
Temperature:	24 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	33.92	9.56	43.48	65.78	-22.30	QP
0.1539	14.97	9.56	24.53	55.78	-3 1.25	AVG
0.5819	28.12	9.55	37.67	56.00	-18.33	QP
0.5819	16.34	9.55	25.89	46.00	-20.11	AVG
0.7900	29.56	9.55	39.11	56.00	-16.89	QP
0.7900	15.81	9.55	25.36	46.00	-20.64	AVG
0.9220	28.97	9.56	38.53	56.00	-17.47	QP
0.9220	17.41	9.56	26.97	46.00	-19.03	AVG
1.4578	24.92	9.56	34.48	56.00	-21.52	QP
1.4578	9.41	9.56	18.97	46.00	-27.03	AVG
2.9660	21.22	9.60	30.82	56.00	-25.18	QP
2.9660	7.58	9.60	17.18	46.00	-28.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

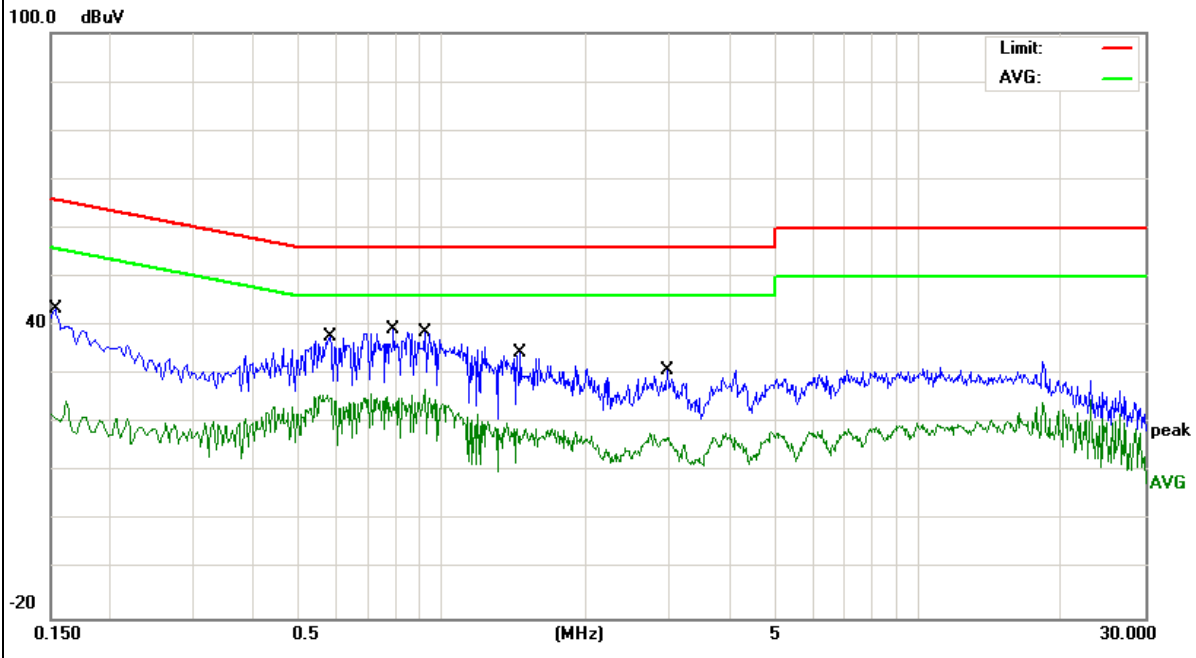


EUT:	YLAP	Model Name :	YLAP-1/2.4G
Temperature:	24 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC 120V/60Hz	Test Mode:	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	33.92	9.56	43.48	65.78	-22.30	QP
0.1539	14.97	9.56	24.53	55.78	-3 1.25	AVG
0.5819	28.12	9.55	37.67	56.00	-18.33	QP
0.5819	16.34	9.55	25.89	46.00	-20.11	AVG
0.7900	29.56	9.55	39.11	56.00	-16.89	QP
0.7900	15.81	9.55	25.36	46.00	-20.64	AVG
0.9220	28.97	9.56	38.53	56.00	-17.47	QP
0.9220	17.41	9.56	26.97	46.00	-19.03	AVG
1.4578	24.92	9.56	34.48	56.00	-21.52	QP
1.4578	9.41	9.56	18.97	46.00	-27.03	AVG
2.9660	21.22	9.60	30.82	56.00	-25.18	QP
2.9660	7.58	9.60	17.18	46.00	-28.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

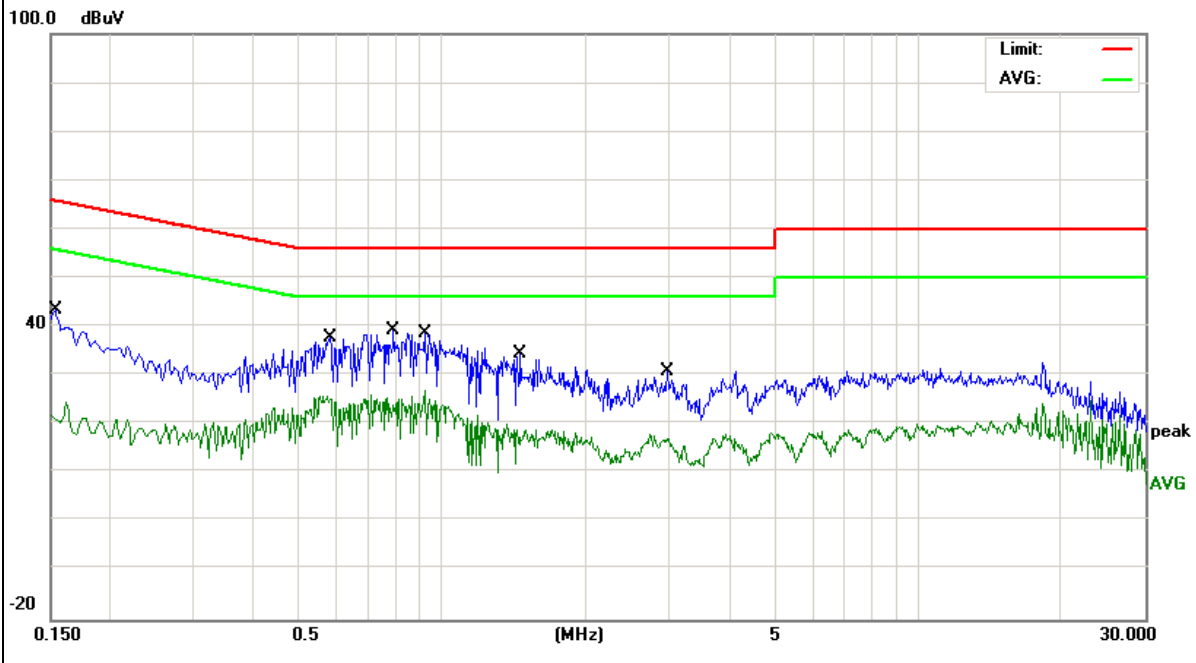

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark :1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. For Frequency 9kHz~30MHz:
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.
 For Frequency above 30MHz:
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

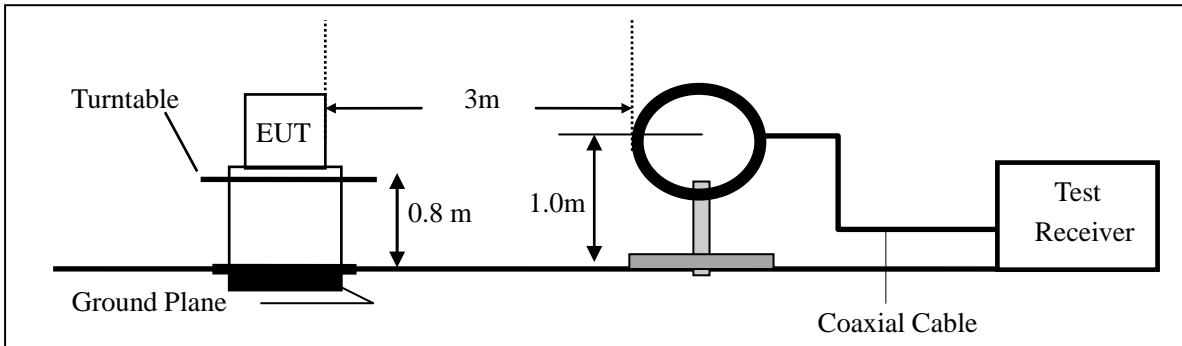

(b) For radiated emissions from 30MHz to 1000MHz

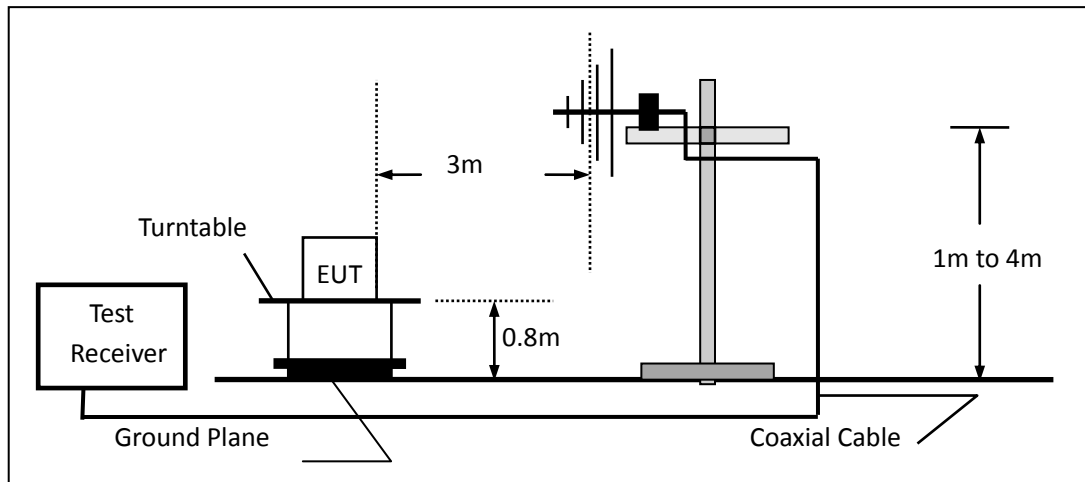

(c) For radiated emissions above 1000MHz

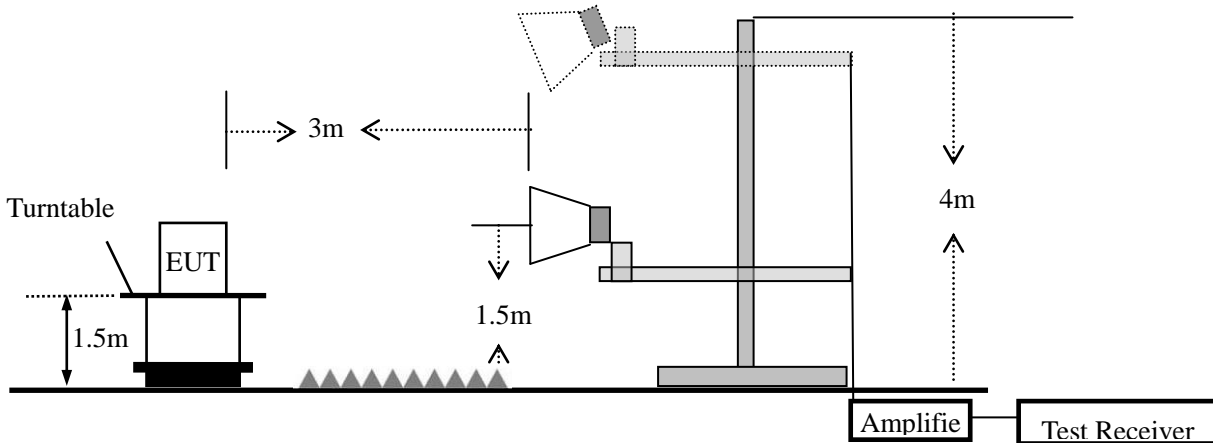

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Mary Hu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the modulation modes have been tested, and the worst result was report as below:

EUT:	YLAP	Model Name :	YLAP-1/2.4G
Temperature:	23 °C	Relative Humidity:	56%
Pressure:	1010hPa	Test Mode:	Mode 2
Test Voltage :	DC 5V from adapter AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	34.6385	14.85	16.91	31.76	40.00	-8.24	QP
V	43.8119	22.01	12.02	34.03	40.00	-5.97	QP
V	85.8984	27.20	9.28	36.48	40.00	-3.52	QP
V	105.6415	29.29	11.10	40.39	43.50	-3.11	QP
V	150.0108	21.04	11.97	33.01	43.50	-10.49	QP
V	250.3012	21.02	13.48	34.50	46.00	-11.50	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

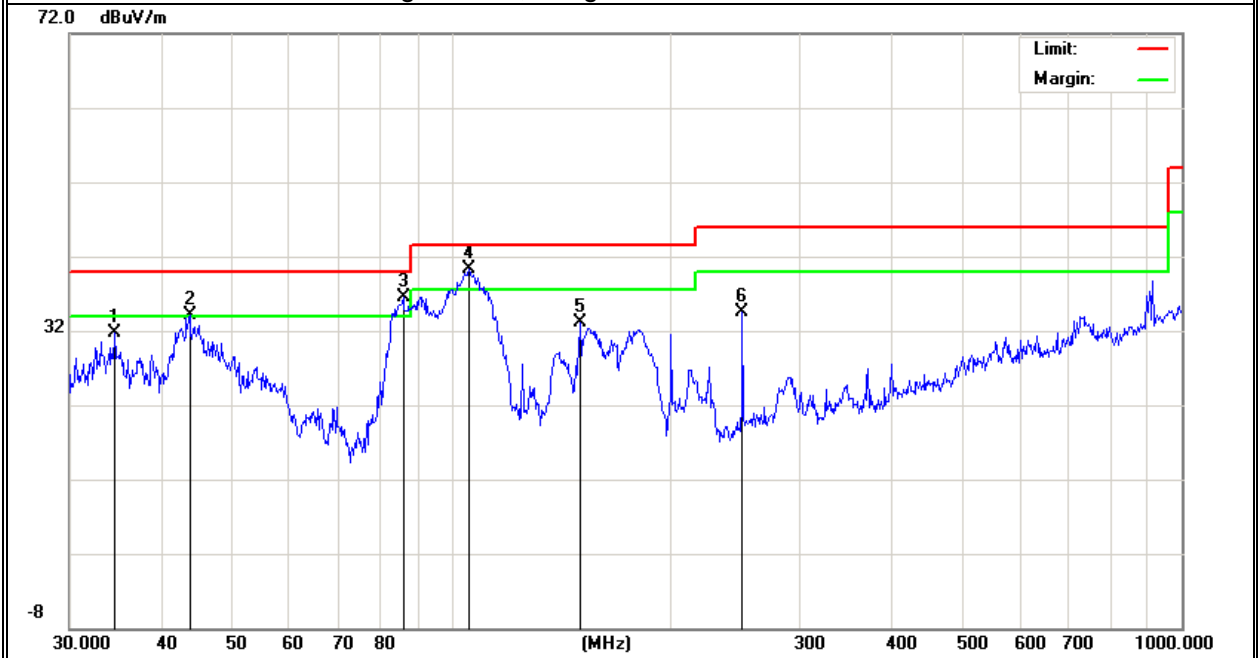

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	110.1816	16.52	11.25	27.77	43.50	-15.73	QP
H	250.3012	17.35	13.48	30.83	46.00	-15.17	QP
H	400.4318	10.99	17.92	28.91	46.00	-17.09	QP
H	501.1790	11.84	20.64	32.48	46.00	-13.52	QP
H	731.9202	10.37	25.17	35.54	46.00	-10.46	QP
H	906.4824	12.49	26.51	39.00	46.00	-7.00	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

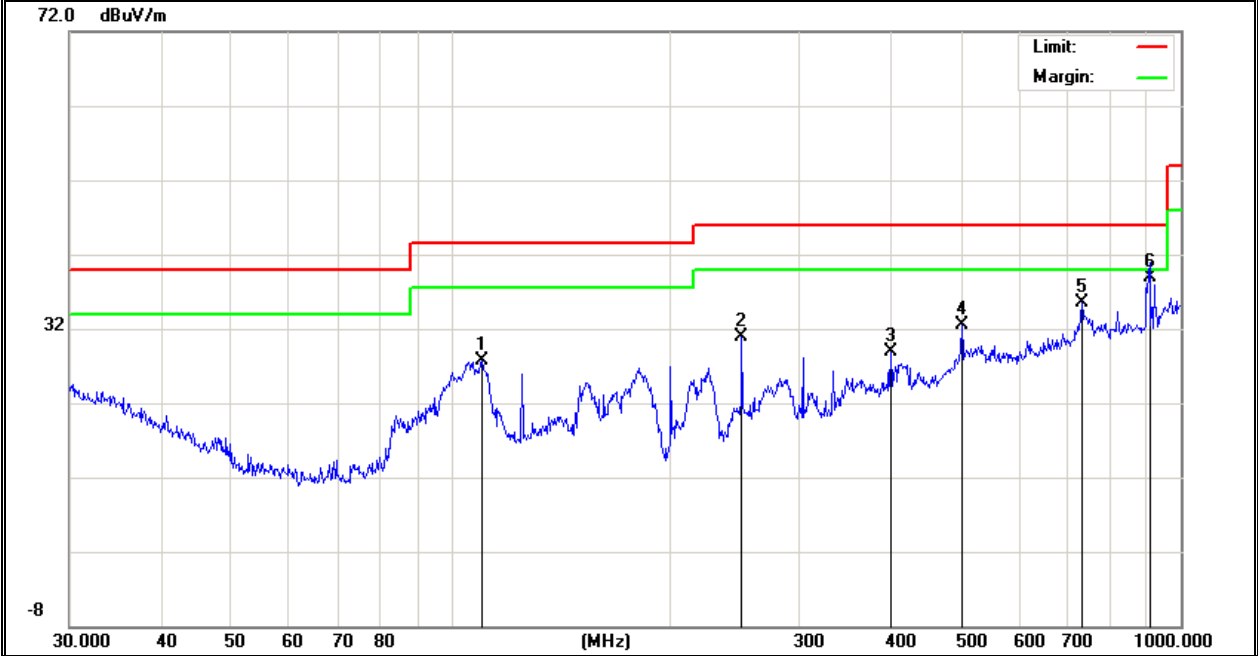

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Mary Hu

Frequency (MHz)	Read Level (dBμV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark	Comment
Low Channel (2405 MHz)(O-QPSK)--Above 1G									
4810	65.92	5.21	35.59	44.30	62.42	74.00	-11.58	Pk	Vertical
4810	43.62	5.21	35.59	44.30	40.12	54.00	-13.88	AV	Vertical
7205	63.75	6.48	36.27	44.60	61.90	74.00	-12.10	Pk	Vertical
7205	43.25	6.48	36.27	44.60	41.40	54.00	-12.60	AV	Vertical
4810	63.99	5.21	35.55	44.30	60.45	74.00	-13.55	Pk	Horizontal
4810	43.92	5.21	35.55	44.30	40.38	54.00	-13.62	AV	Horizontal
7205	62.98	6.48	36.27	44.52	61.21	74.00	-12.79	Pk	Horizontal
7205	44.25	6.48	36.27	44.52	42.48	54.00	-11.52	AV	Horizontal
Mid Channel (2440 MHz)(O-QPSK)--Above 1G									
4880	65.75	5.21	35.66	44.20	62.42	74.00	-11.58	Pk	Vertical
4880	44.29	5.21	35.66	44.20	40.96	54.00	-13.04	AV	Vertical
7320	61.62	7.10	36.50	44.43	60.79	74.00	-13.21	Pk	Vertical
7320	44.77	7.10	36.50	44.43	43.94	54.00	-10.06	AV	Vertical
4880	61.89	5.21	35.66	44.20	58.56	74.00	-15.44	Pk	Horizontal
4880	43.57	5.21	35.66	44.20	40.24	54.00	-13.76	AV	Horizontal
7320	62.37	7.10	36.50	44.43	61.54	74.00	-12.46	Pk	Horizontal
7320	44.35	7.10	36.50	44.43	43.52	54.00	-10.48	AV	Horizontal
High Channel (2470 MHz)(O-QPSK)-- Above 1G									
4940	67.52	5.21	35.66	44.20	64.19	74.00	-9.81	Pk	Vertical
4940	43.65	5.21	35.66	44.20	40.32	54.00	-13.68	AV	Vertical
7410	61.62	7.10	36.50	44.43	60.79	74.00	-13.21	Pk	Vertical
7410	43.65	7.10	36.50	44.43	42.82	54.00	-11.18	AV	Vertical
4940	64.74	5.21	35.66	44.20	61.41	74.00	-12.59	Pk	Horizontal
4940	43.01	5.21	35.66	44.20	39.68	54.00	-14.32	AV	Horizontal
7410	60.49	7.10	36.50	44.43	59.66	74.00	-14.34	Pk	Horizontal
7410	43.36	7.10	36.50	44.43	42.53	54.00	-11.47	AV	Horizontal

Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) All other emissions more than 20dB below the limit.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Mary Hu

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(O-QPSK)- Non-hopping									
2310.00	56.15	2.97	27.80	43.80	43.12	74	-30.88	Pk	Horizontal
2310.00	38.12	2.97	27.80	43.80	25.09	54	-28.91	AV	Horizontal
2310.00	55.22	2.97	27.80	43.80	42.19	74	-31.81	Pk	Vertical
2310.00	39.83	2.97	27.80	43.80	26.80	54	-27.20	AV	Vertical
2390.00	57.78	3.14	27.21	43.80	44.33	74	-29.67	Pk	Vertical
2390.00	40.49	3.14	27.21	43.80	27.04	54	-26.96	AV	Vertical
2390.00	57.94	3.14	27.21	43.80	44.49	74	-29.51	Pk	Horizontal
2390.00	40.61	3.14	27.21	43.80	27.16	54	-26.84	AV	Horizontal
2483.50	66.57	3.58	27.70	44.00	53.85	74	-20.15	Pk	Vertical
2483.50	46.64	3.58	27.70	44.00	33.92	54	-20.08	AV	Vertical
2483.50	66.41	3.58	27.70	44.00	53.69	74	-20.31	Pk	Horizontal
2483.50	47.22	3.58	27.70	44.00	34.50	54	-19.50	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

■ Spurious Emission in Restricted Band 3260MHz-18000MHz

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Mary Hu

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	60.82	4.04	29.57	44.70	49.73	74	-24.27	Pk	Vertical
3260	57.30	4.04	29.57	44.70	46.21	54	-7.79	AV	Vertical
3260	61.20	4.04	29.57	44.70	50.11	74	-23.89	Pk	Horizontal
3260	56.94	4.04	29.57	44.70	45.85	54	-8.15	AV	Horizontal
3332	65.13	4.26	29.87	44.40	54.86	74	-19.14	Pk	Vertical
3332	53.75	4.26	29.87	44.40	43.48	54	-10.52	AV	Vertical
3332	64.26	4.26	29.87	44.40	53.99	74	-20.01	Pk	Horizontal
3332	54.24	4.26	29.87	44.40	43.97	54	-10.03	AV	Horizontal
17797	42.97	10.99	43.95	43.50	54.41	74	-19.59	Pk	Vertical
17797	33.98	10.99	43.95	43.50	45.42	54	-8.58	AV	Vertical
17788	44.51	11.81	43.69	44.60	55.41	74	-18.59	Pk	Horizontal
17788	32.36	11.81	43.69	44.60	43.26	54	-10.74	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.6 Test Results


EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Mary Hu

Module A

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2405	1661	500	Pass
Middle	2440	1662	500	Pass
High	2470	1618	500	Pass


6dB Bandwidth plot on 2405MHz

0.25Mbps

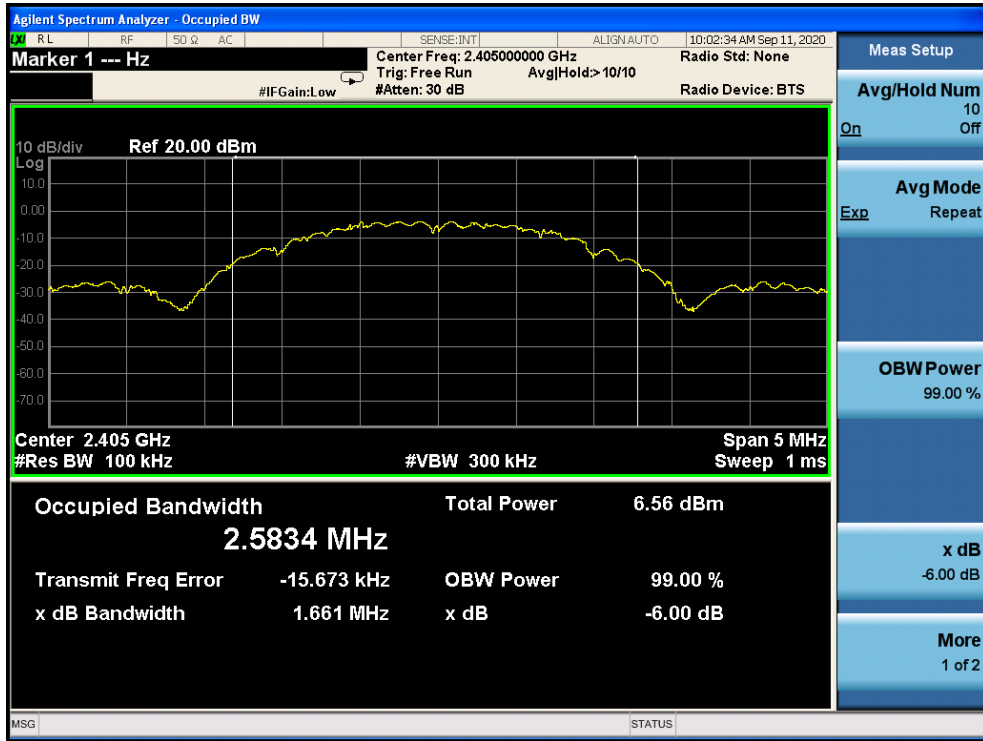


6dB Bandwidth plot on 2440MHz

0.25Mbps

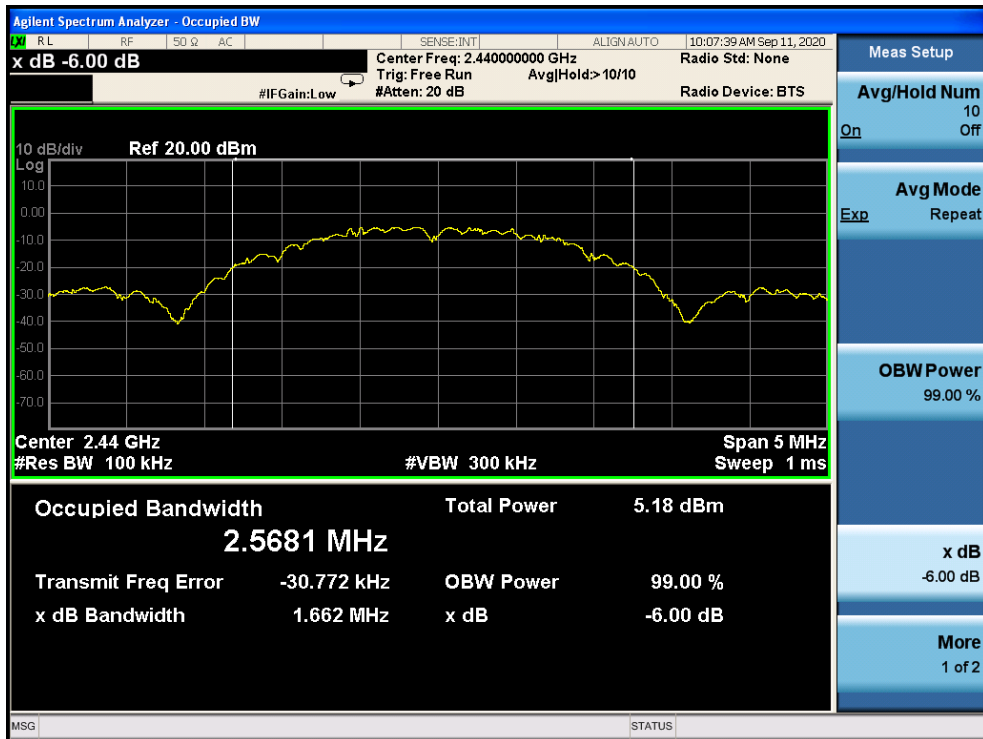

6dB Bandwidth plot on 2470MHz

0.25Mbps

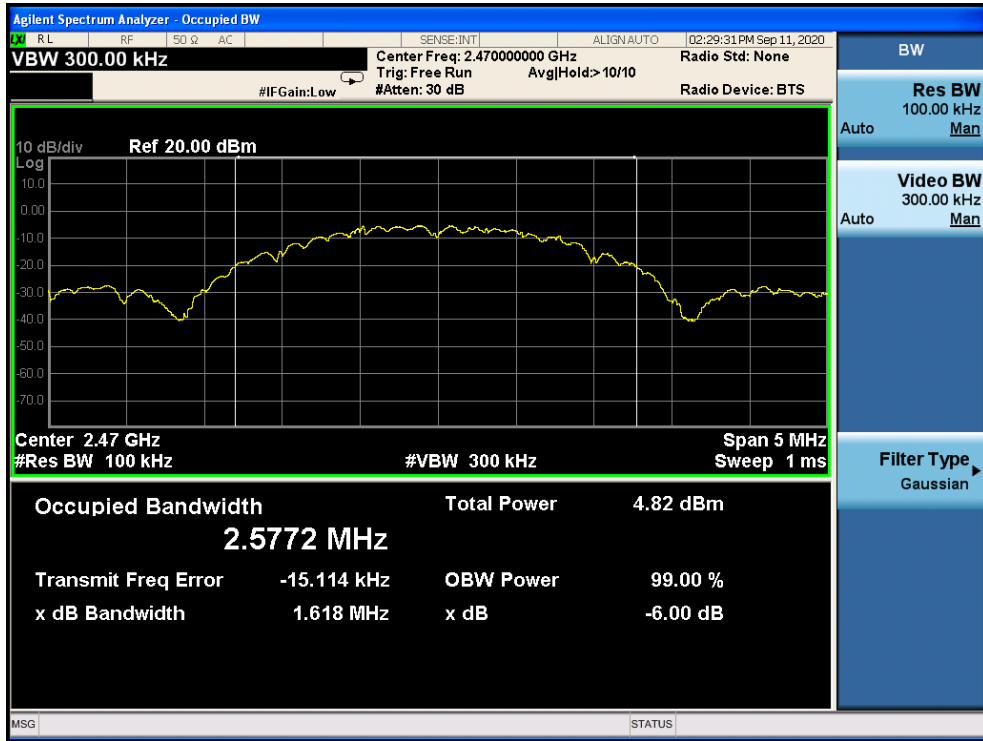


Module B

Channel	Frequency (MHz)	6dB bandwidth (kHz)	Limit (kHz)	Result
Low	2405	1595	500	Pass
Middle	2440	1615	500	Pass
High	2470	1632	500	Pass


6dB Bandwidth plot on 2405MHz

0.25Mbps

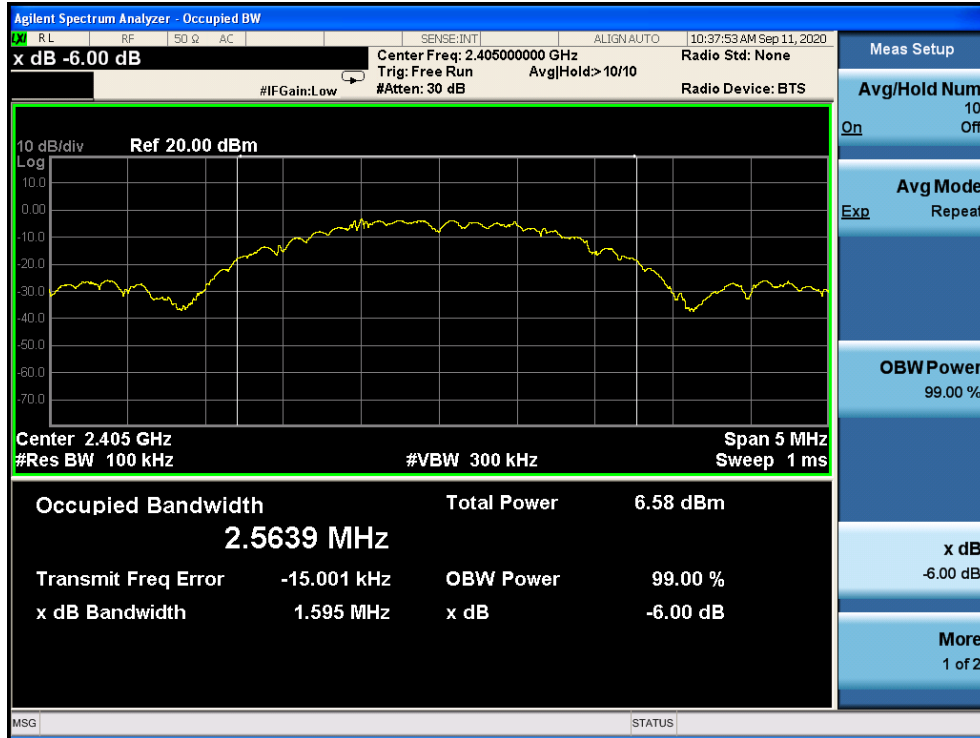


6dB Bandwidth plot on 2440MHz

0.25Mbps

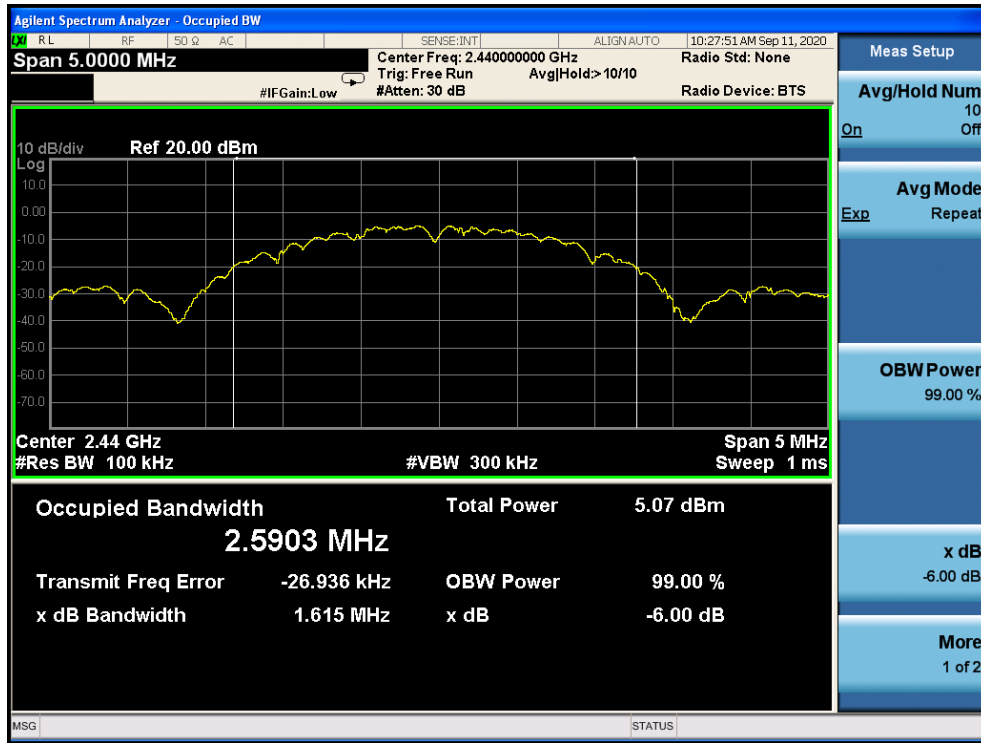

6dB Bandwidth plot on 2470MHz

0.25Mbps

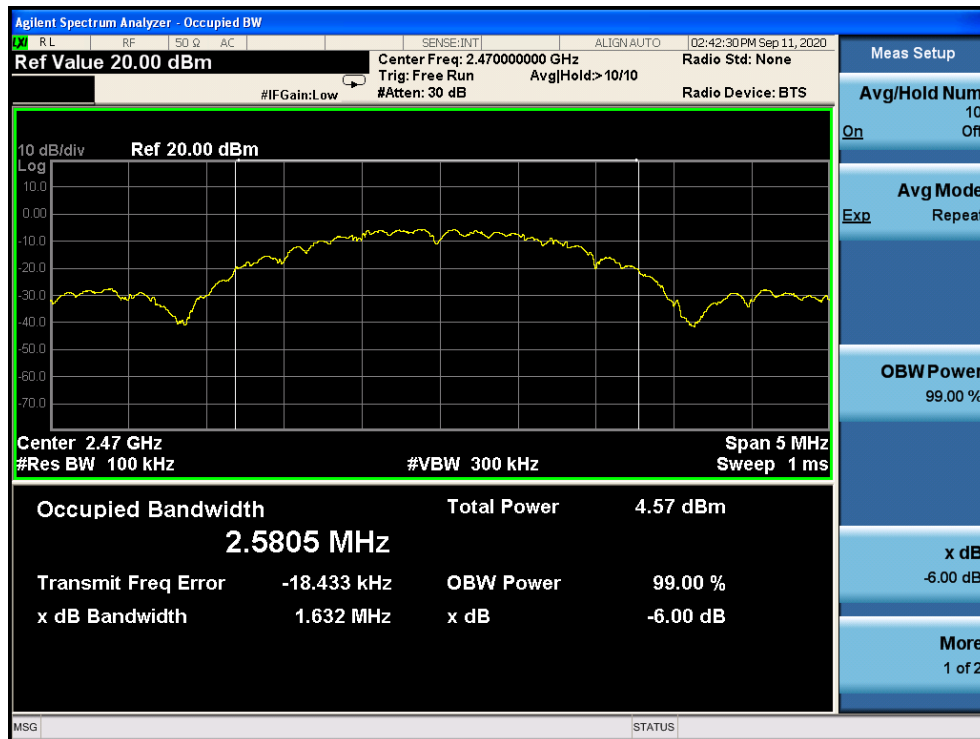

7.4 PEAK OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.1.

7.4.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows Subclause 11.9.1.1 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Set the RBW \cong DTS bandwidth.

Set VBW \cong 3*RBW.

Set the span \cong 3*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

7.4.6 Test Results

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Mary Hu

Note: The module for zigbee has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
zigbee	2TX, 2RX


Note: For zigbee has MIMO mode. Directional gain=3.01dBi
3.01 dBi<6.0 dBi so power limit= 30.00 dBm

Condition	Mode	Frequency (MHz)	Module	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	O-QPSK	2405	Module A	1.816	4.79	30	Pass
NVNT	O-QPSK	2405	Module B	1.747			Pass
NVNT	O-QPSK	2440	Module A	0.062	3.18	30	Pass
NVNT	O-QPSK	2440	Module B	0.282			Pass
NVNT	O-QPSK	2470	Module A	0.091	3.03	30	Pass
NVNT	O-QPSK	2470	Module B	-0.051			Pass

Module A


Peak output Power plot on 2405MHz

0.25Mbps

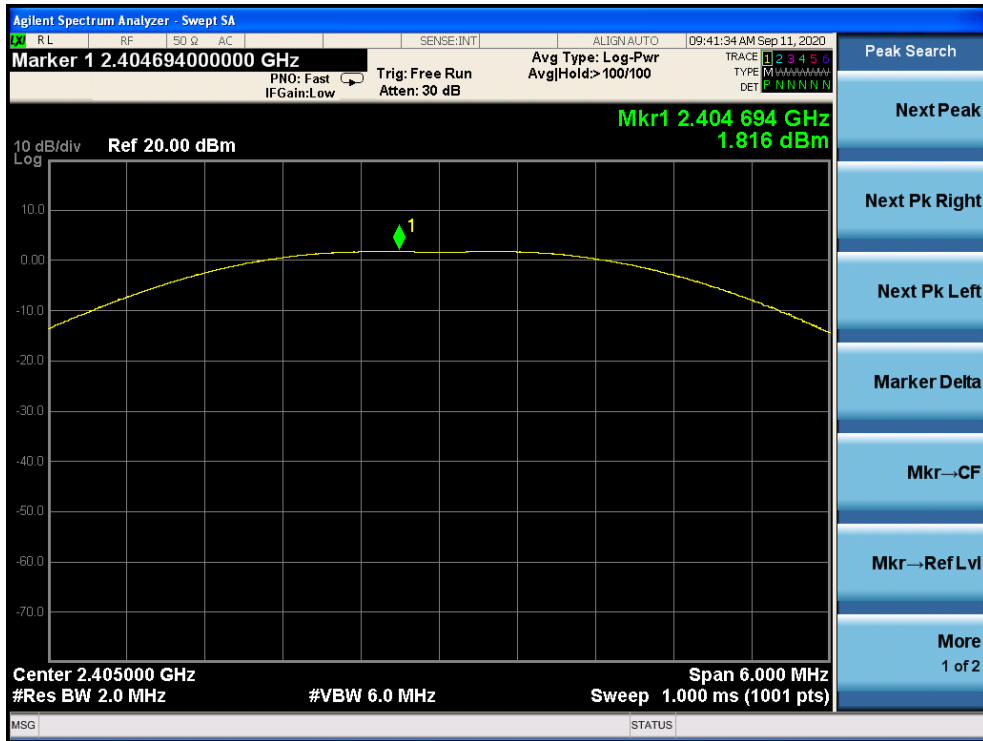


Peak output Power plot on 2440MHz

0.25Mbps

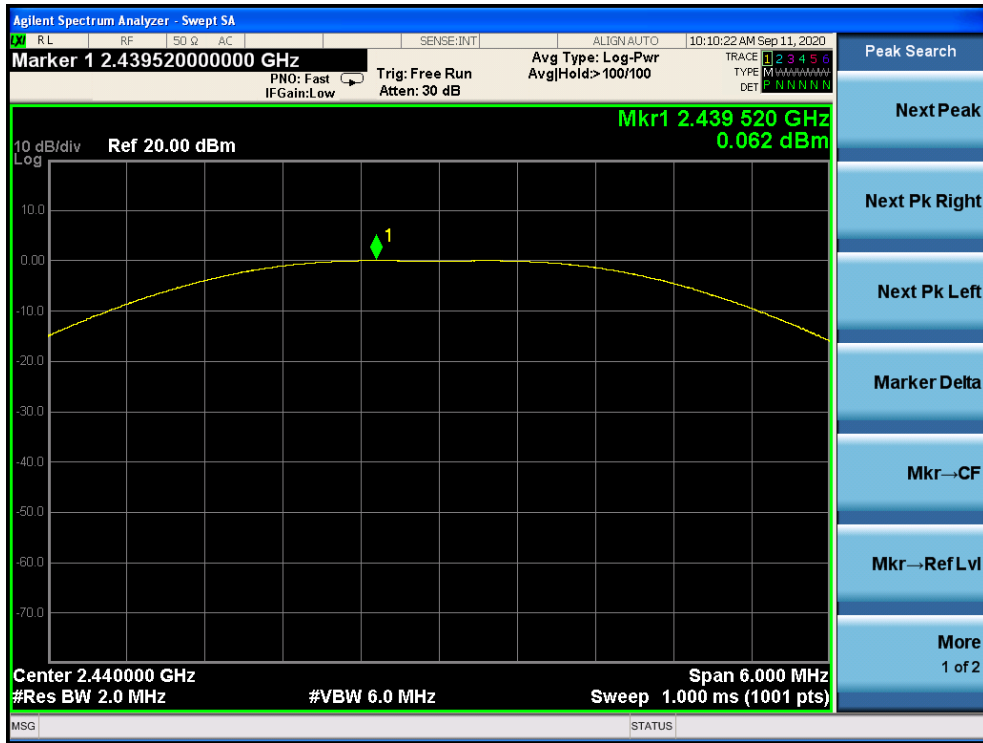

Peak output Power plot on 2470MHz

0.25Mbps

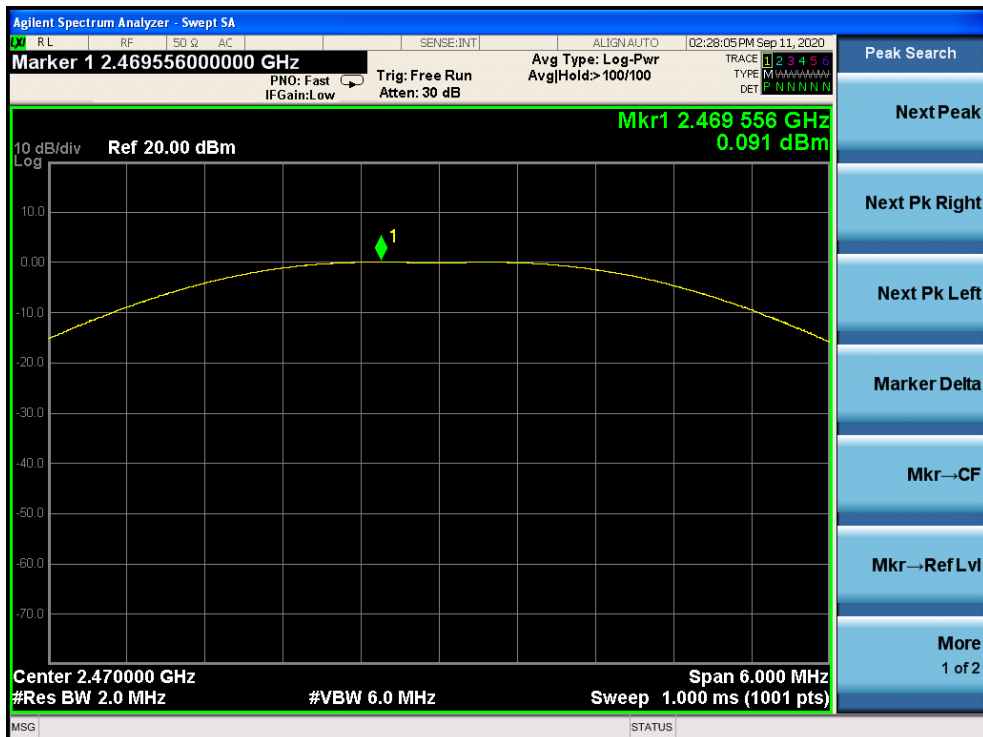

Module B

Peak output Power plot on 2405MHz

0.25Mbps




Peak output Power plot on 2440MHz

0.25Mbps



Peak output Power plot on 2470MHz

0.25Mbps

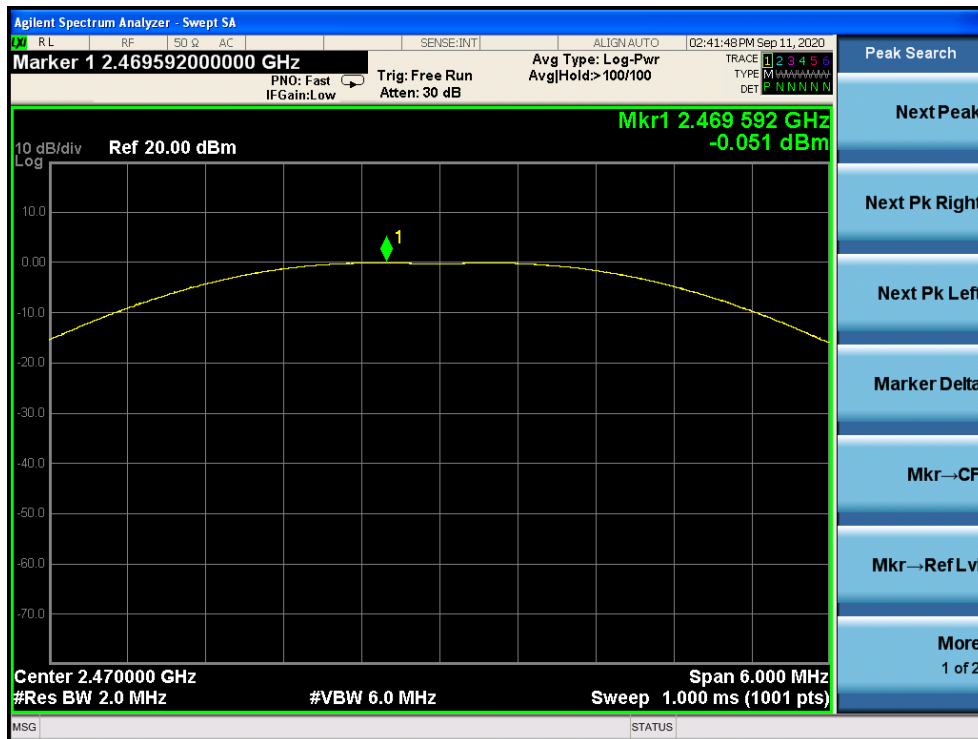

7.5 POWER SPECTRAL DENSITY

7.5.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10
This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to $1.5 \times \text{DTS bandwidth}$.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \text{ RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.5.6 Test Results

EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Mary Hu

Note: The module for zigbee has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
zigbee	2TX, 2RX


Note: For zigbee has MIMO mode. Directional gain=3.01dBi
3.01 dBi<6.0 dBi so power limit= 8.00 dBm

Condition	Mode	Frequency (MHz)	Module	Max PSD (dBm)	Total PSD (dBm/MHz)	Limit (dBm)	Verdict
NVNT	O-QPSK	2405	Module A	-13.155	-10.13	8	Pass
NVNT	O-QPSK	2405	Module B	-13.129			Pass
NVNT	O-QPSK	2440	Module A	-14.452	-11.29	8	Pass
NVNT	O-QPSK	2440	Module B	-14.161			Pass
NVNT	O-QPSK	2470	Module A	-14.77	-11.64	8	Pass
NVNT	O-QPSK	2470	Module B	-14.529			Pass

Module A


Power spectral density plot on 2405MHz

0.25Mbps

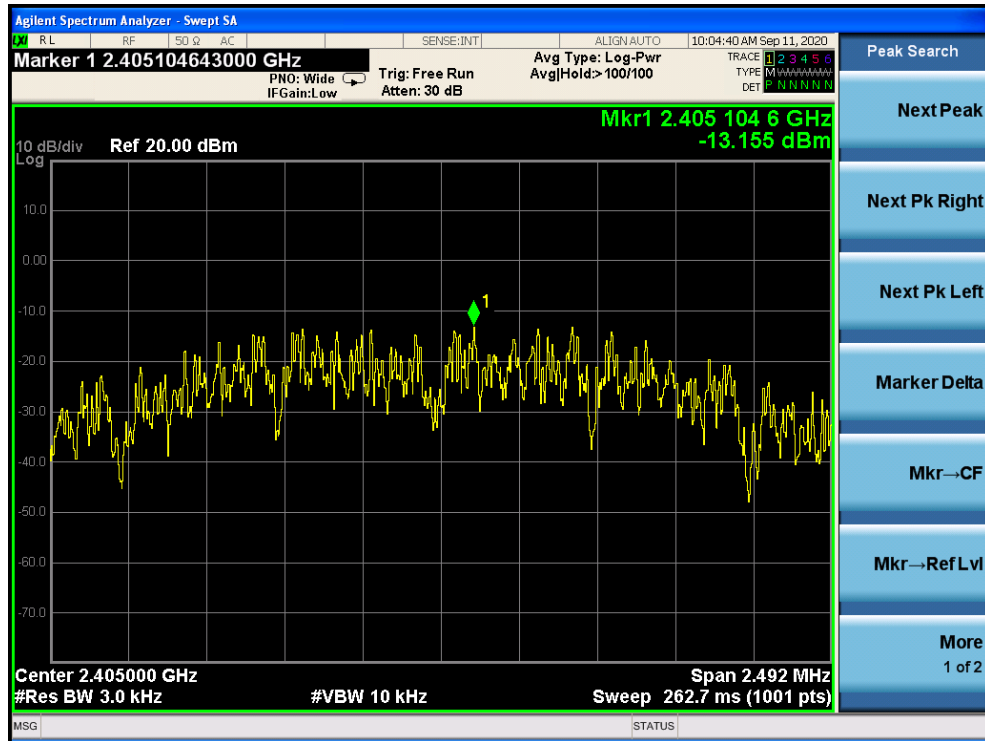


Power spectral density plot on 2440MHz

0.25Mbps

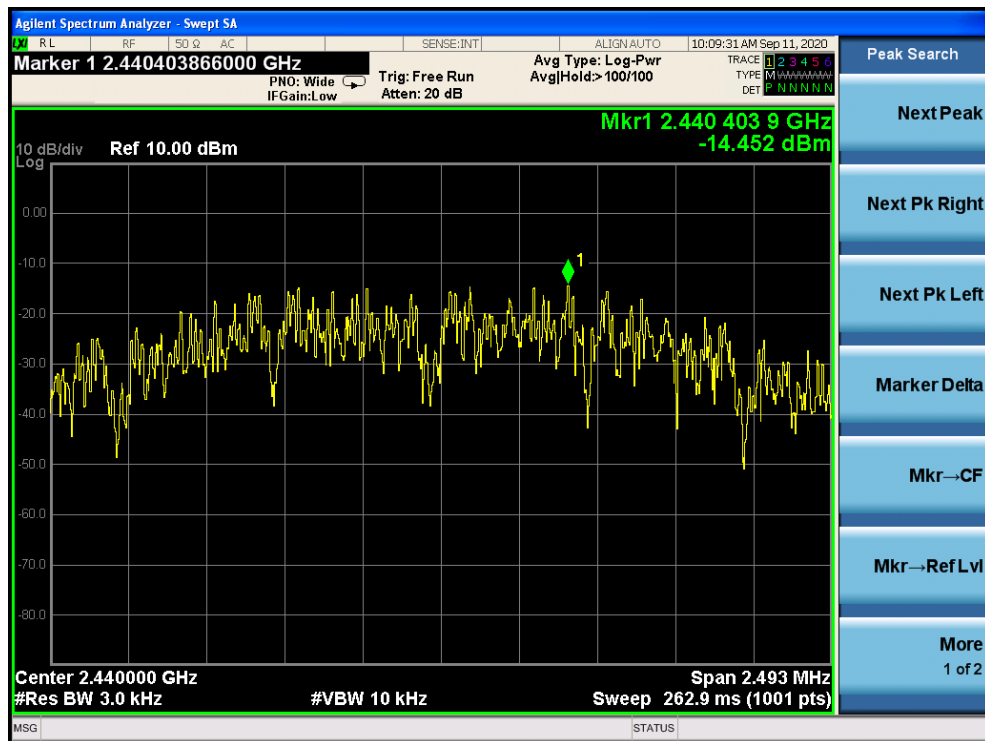

Power spectral density plot on 2470MHz


0.25Mbps

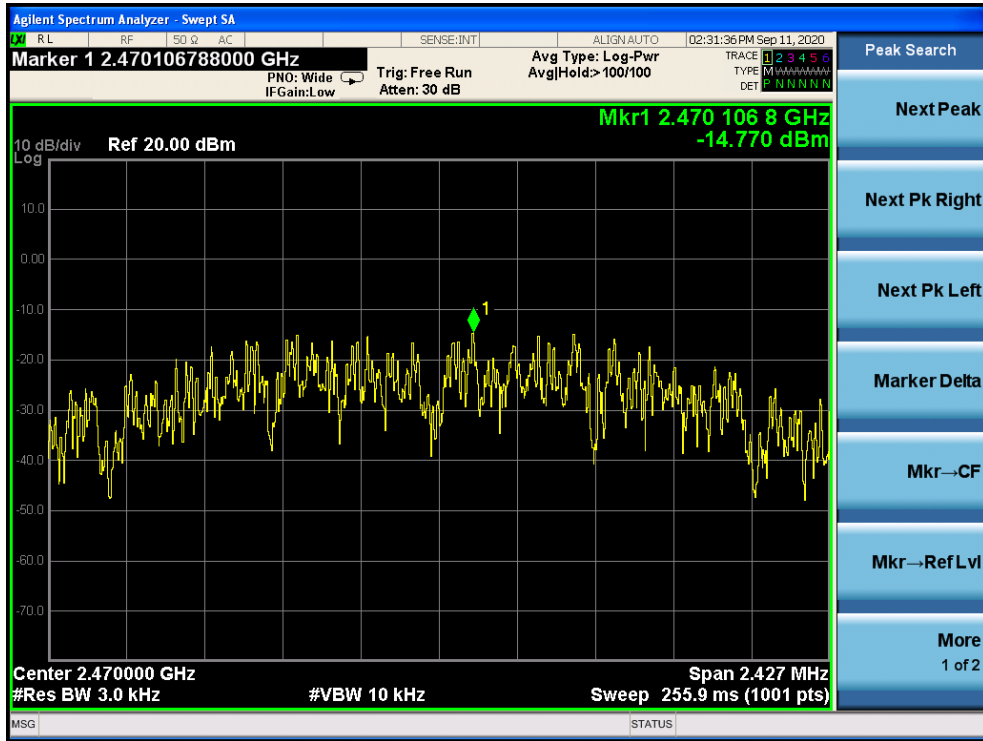

Module B


Power spectral density plot on 2405MHz

0.25Mbps

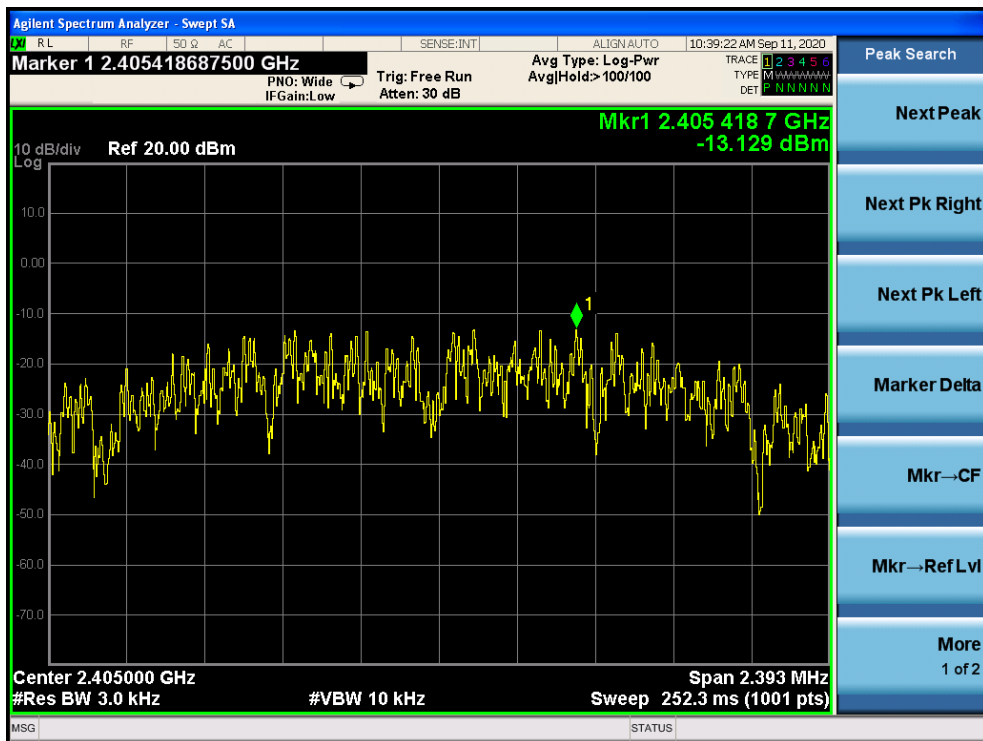


Power spectral density plot on 2440MHz

0.25Mbps

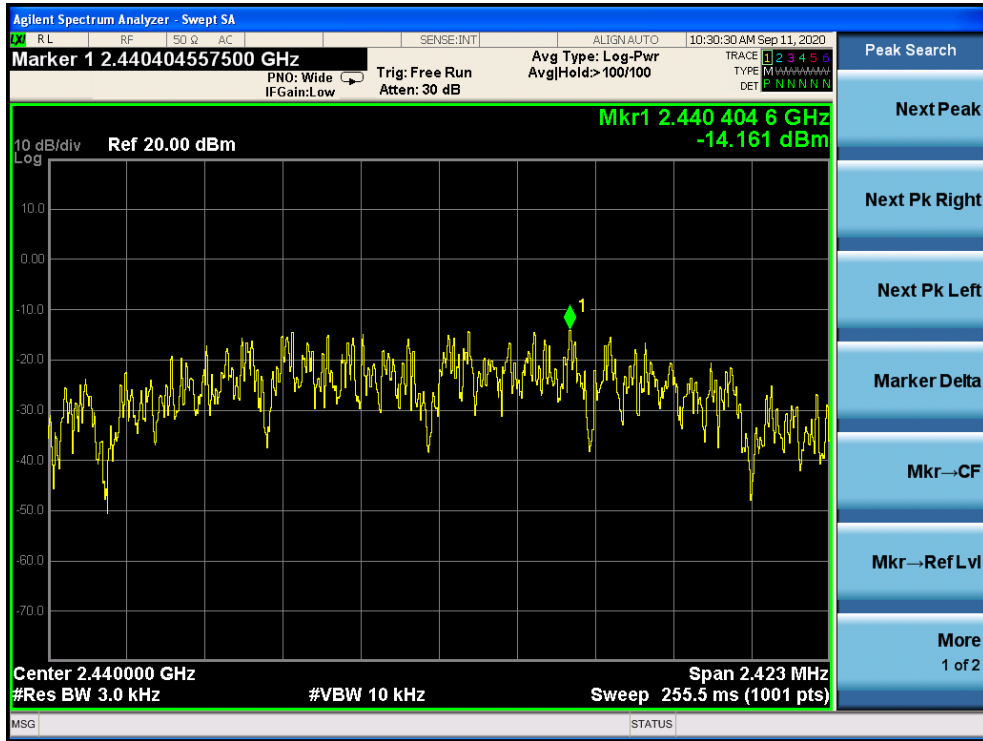

Power spectral density plot on 2470MHz

0.25Mbps

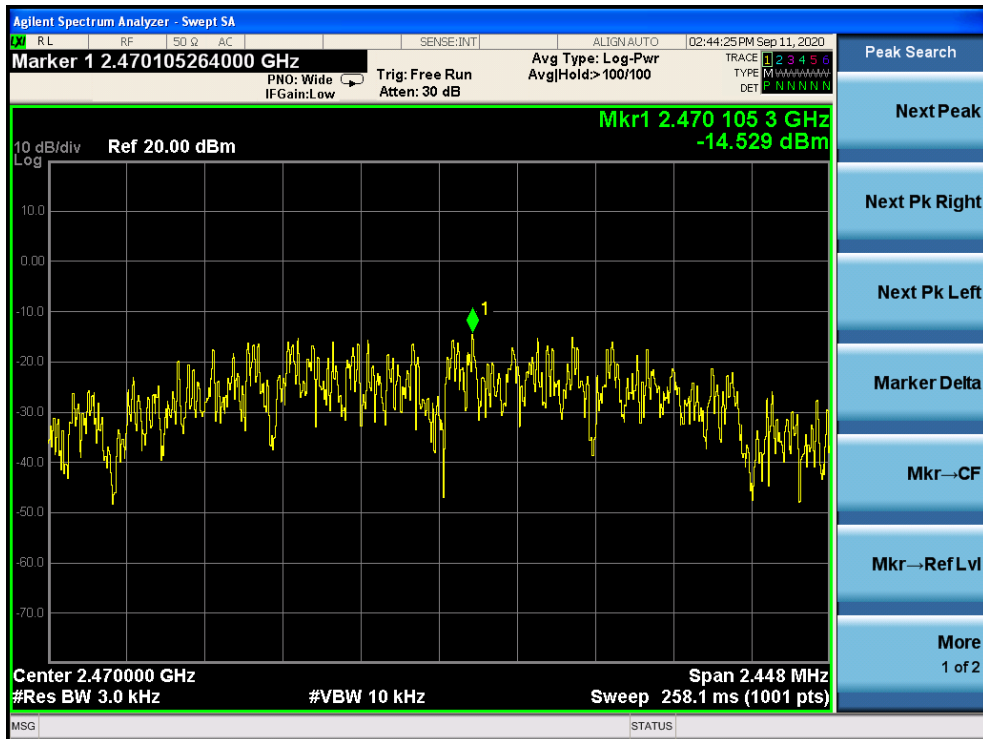

7.6 CONDUCTED BAND EDGE MEASUREMENT

7.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure


The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
 Set to the maximum power setting and enable the EUT transmit continuously.
 The EUT was operating in controlled its channel.
 Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
 Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
 Repeat above procedures until all measured frequencies were complete.

7.6.6 Test Results


EUT:	YLAP	Model No.:	YLAP-1/2.4G
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Test By:	Mary Hu

Module A

O-QPSK mode: Band Edge-Low Channel

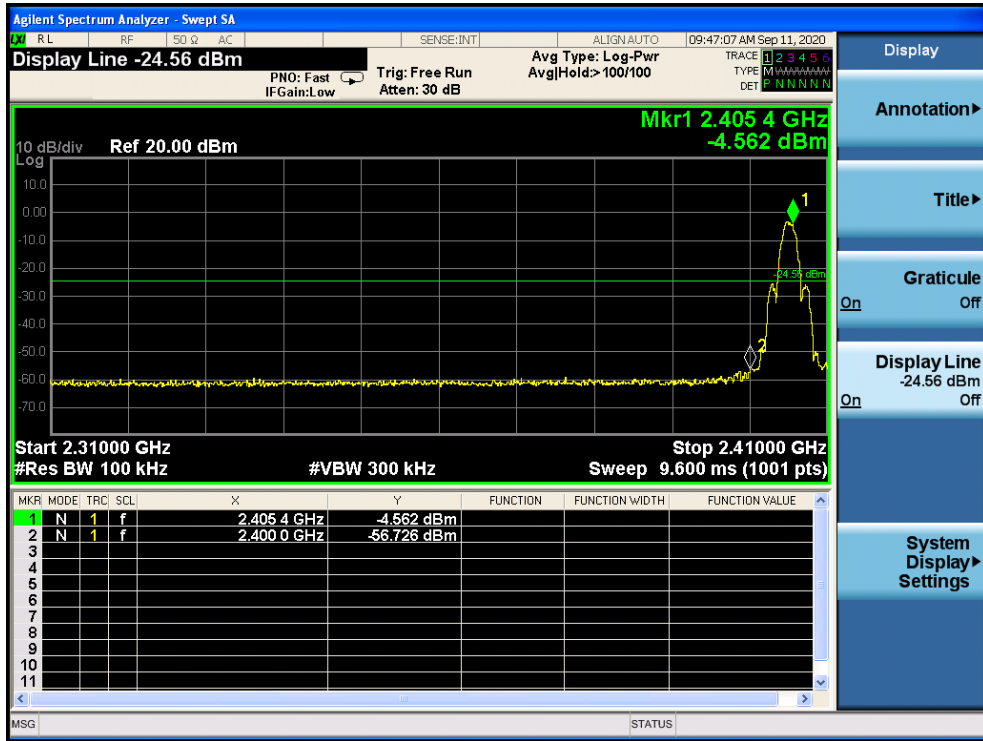


O-QPSK mode: Band Edge-High Channel

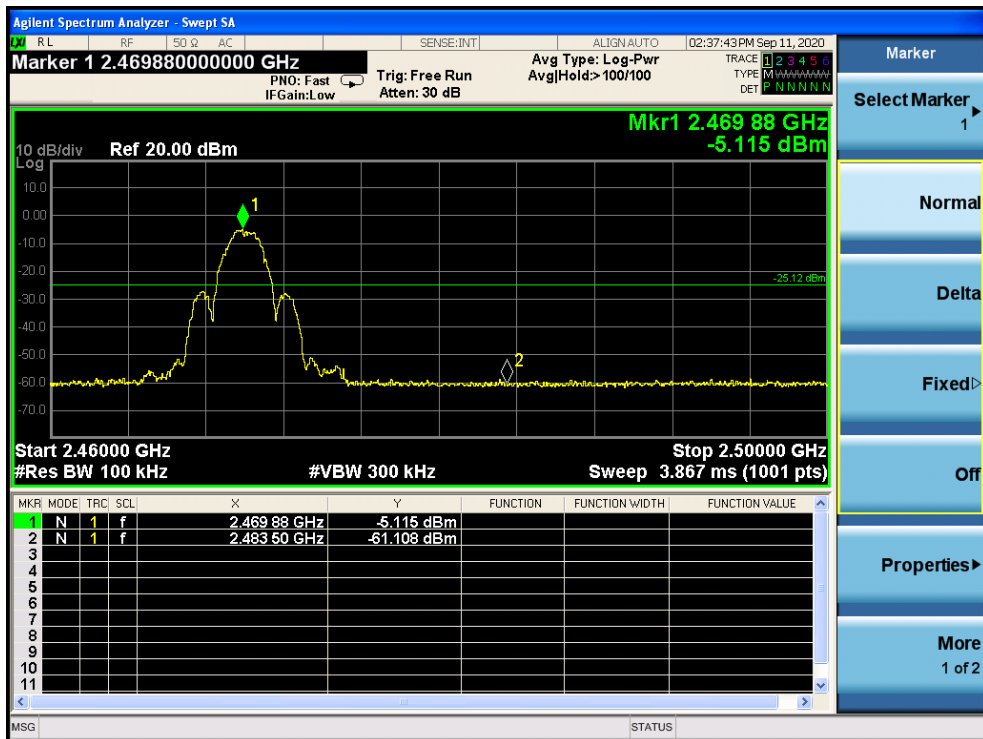


Module B

O-QPSK mode: Band Edge-Low Channel

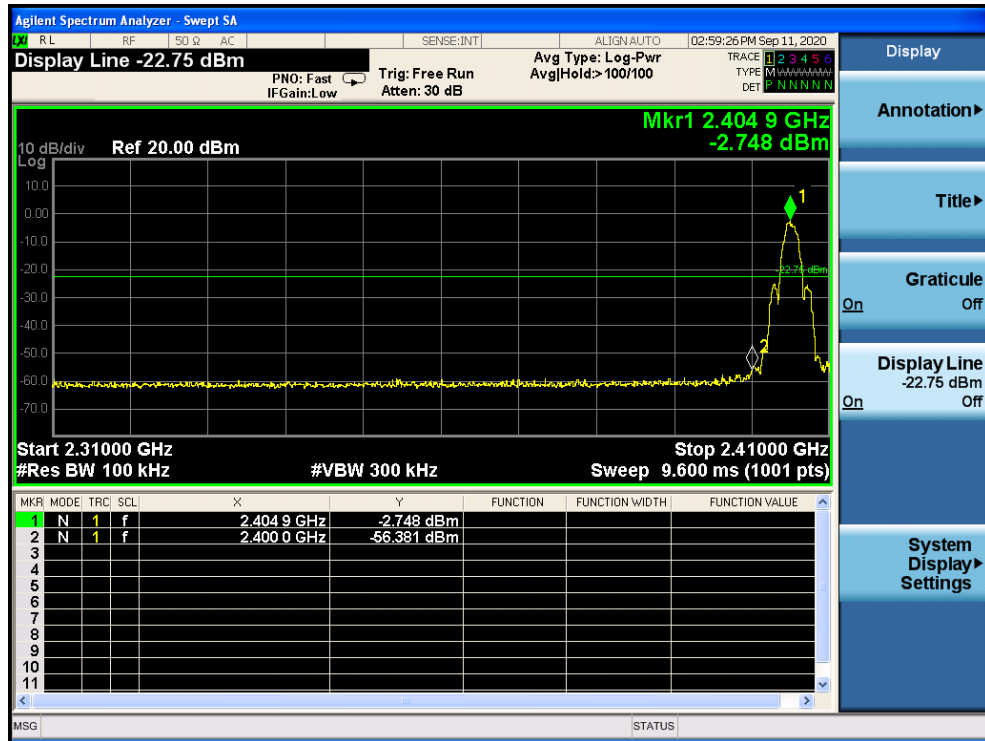

O-QPSK mode: Band Edge-High Channel

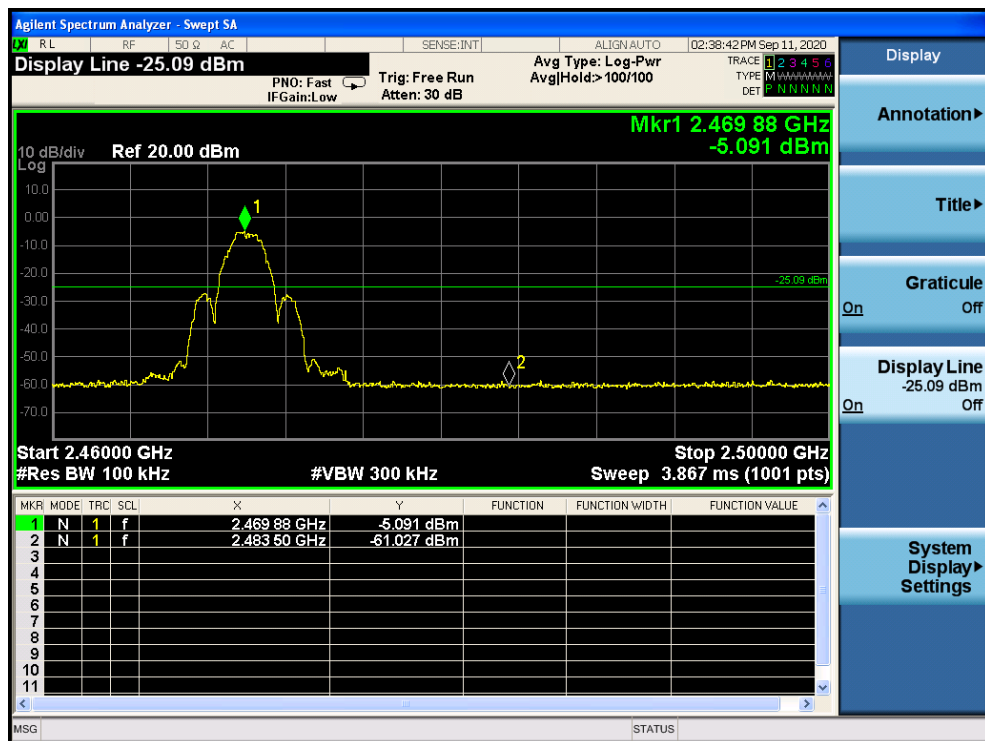

7.7 SPURIOUS RF CONDUCTED EMISSIONS

7.7.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.7.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.3 Test Setup

Please refer to Section 6.1 of this test report.

7.7.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

7.7.5 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.


Module A

Test Plot


O-QPSK on 2405MHz




O-QPSK on 2405MHz

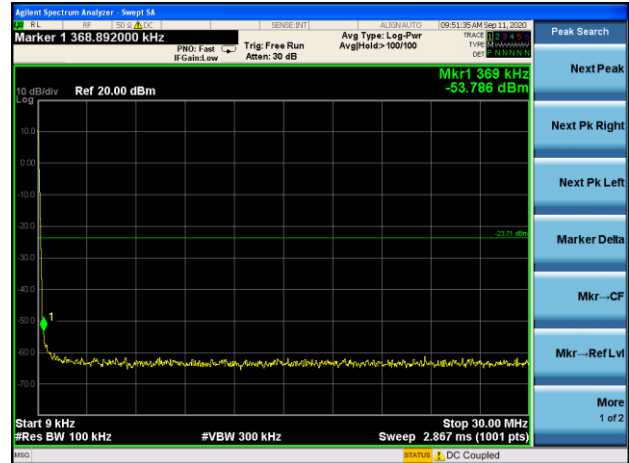

O-QPSK on 2405MHz

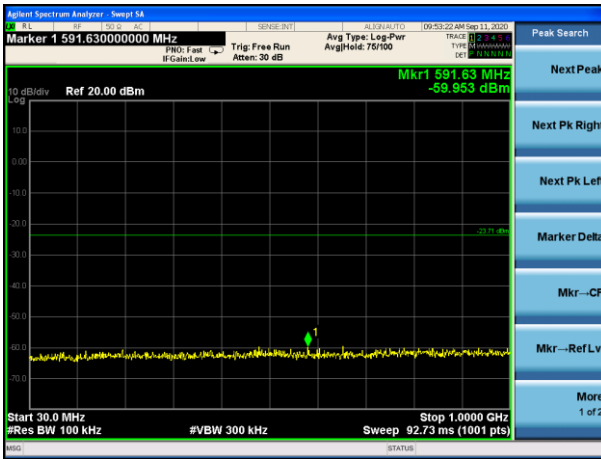

O-QPSK on 2405MHz

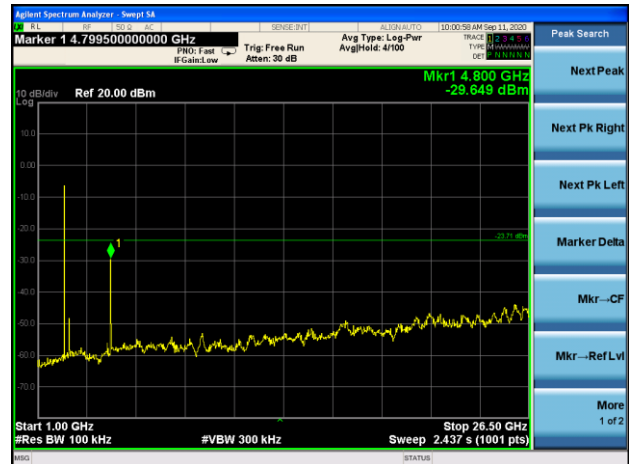


Test Plot


O-QPSK on 2440MHz




O-QPSK on 2440MHz

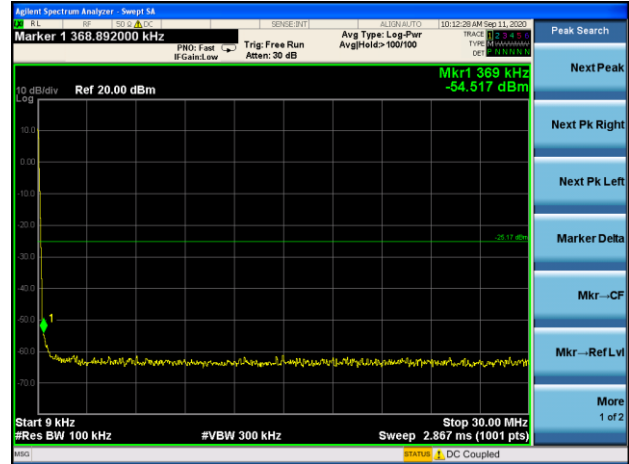

O-QPSK on 2440MHz

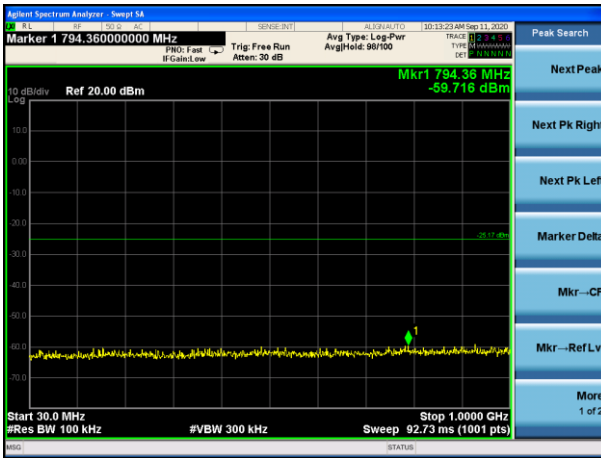

O-QPSK on 2440MHz

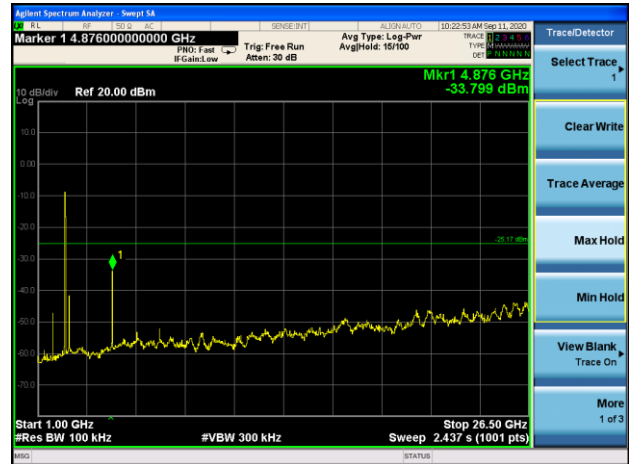


Test Plot


O-QPSK on 2470MHz




O-QPSK on 2470MHz

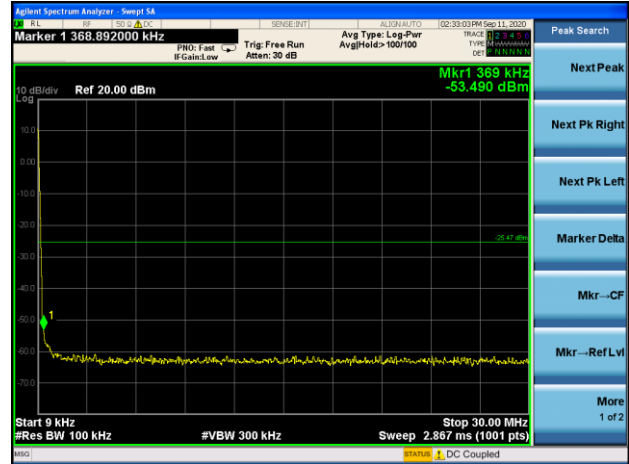

O-QPSK on 2470MHz

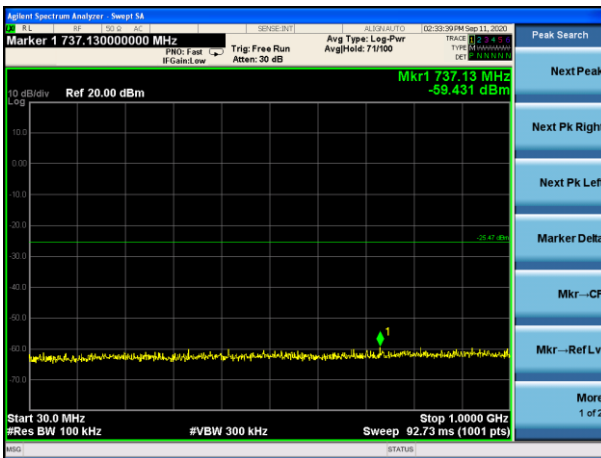

O-QPSK on 2470MHz

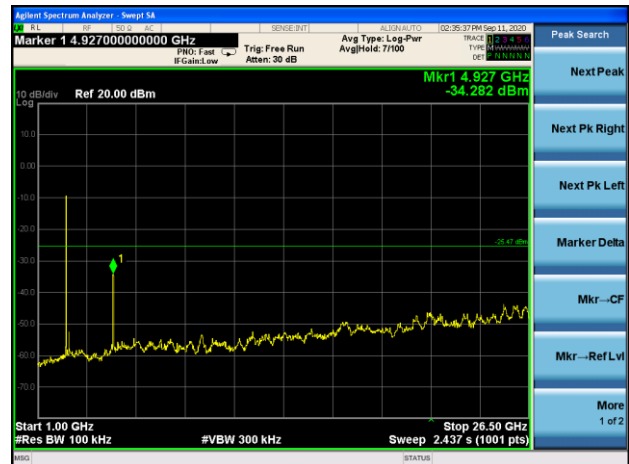


Module B

Test Plot


O-QPSK on 2405MHz



O-QPSK on 2405MHz

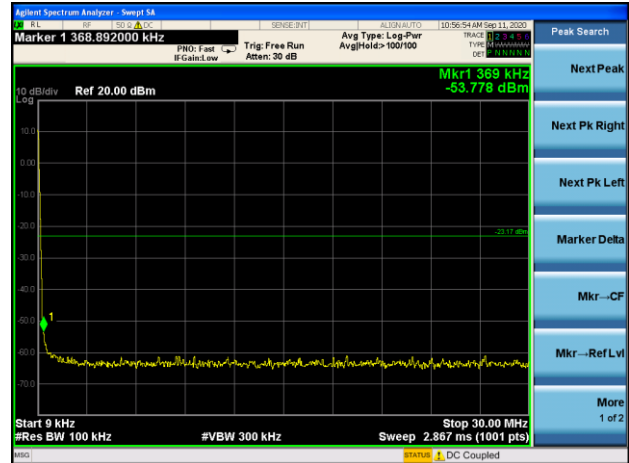

O-QPSK on 2405MHz

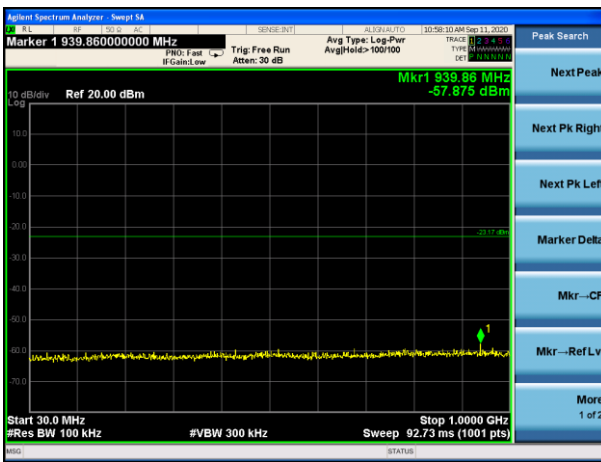

O-QPSK on 2405MHz




Test Plot


O-QPSK on 2440MHz




O-QPSK on 2440MHz

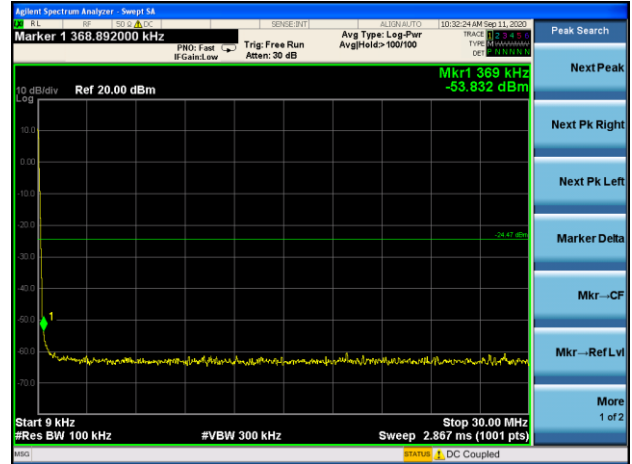

O-QPSK on 2440MHz

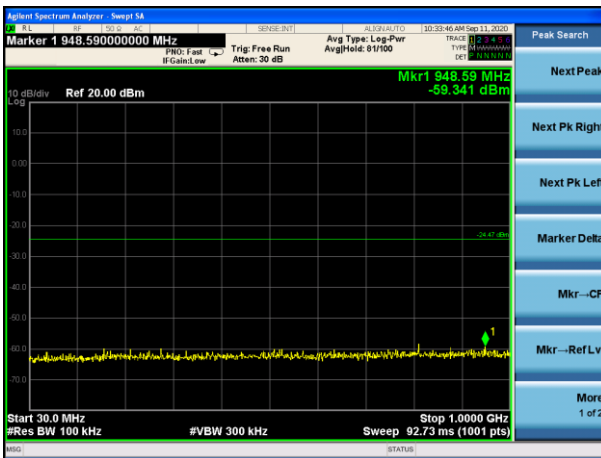

O-QPSK on 2440MHz

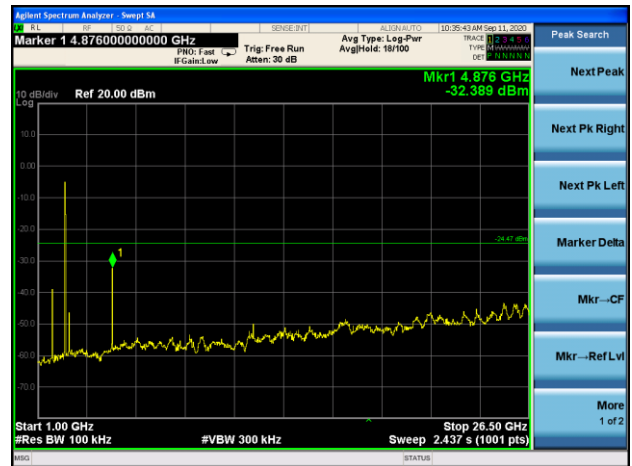


Test Plot


O-QPSK on 2470MHz




O-QPSK on 2470MHz

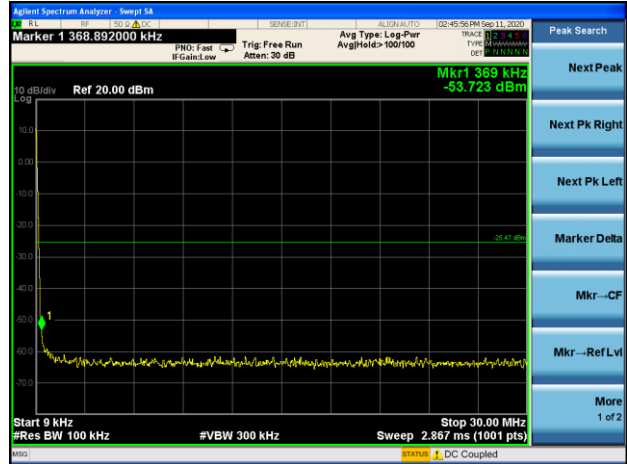

O-QPSK on 2470MHz

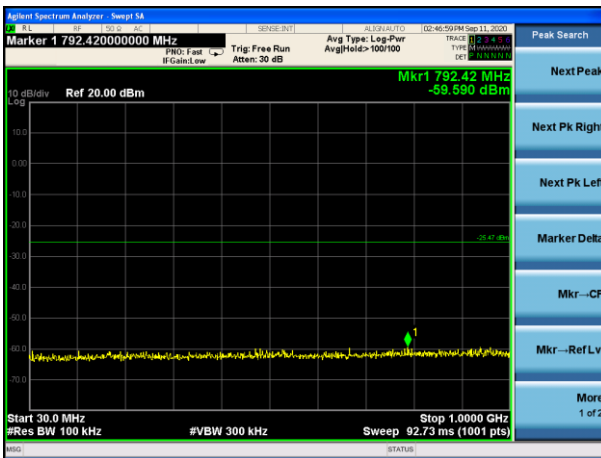

O-QPSK on 2470MHz

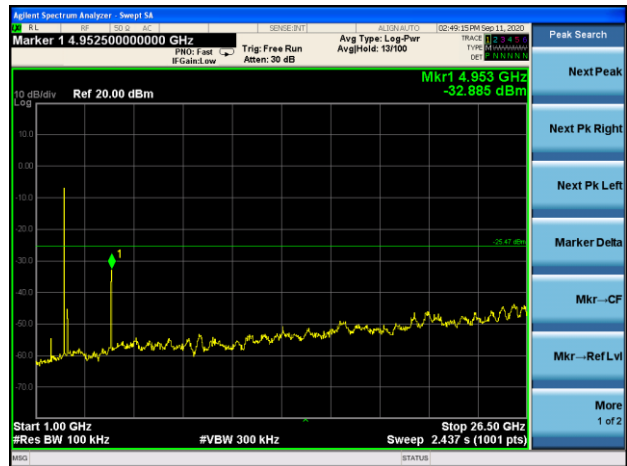

7.8 ANTENNA APPLICATION

7.8.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.8.2 Result

The EUT antenna is permanent attached PCB Antenna (Gain: 0dBi). It comply with the standard requirement.

END OF REPORT