
5.0 x 2.2 x 1.6 (mm) WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

1. Product Number

H 2 U 2 6 2 G K B A 0 1 0 0

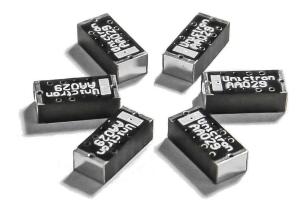

2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *ISM 2.4 GHz applications
- *ZigBee/BLE applications
- *Bluetooth earphone systems
- *Hand-held devices when WiFi / Bluetooth functions are needed, e.g., Smart phones
- *IEEE802.11 b/g/n
- *Wireless PCMCIA cards or USB dongles

4. Description

Unictron's AA029 chip antenna is designed for ISM 2.4GHz applications, covering frequencies 2400~2500MHz. Fabricated with proprietary design and processes, AA029 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.

H2U262GKBA0100


H
PAGE 1 OF 10

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

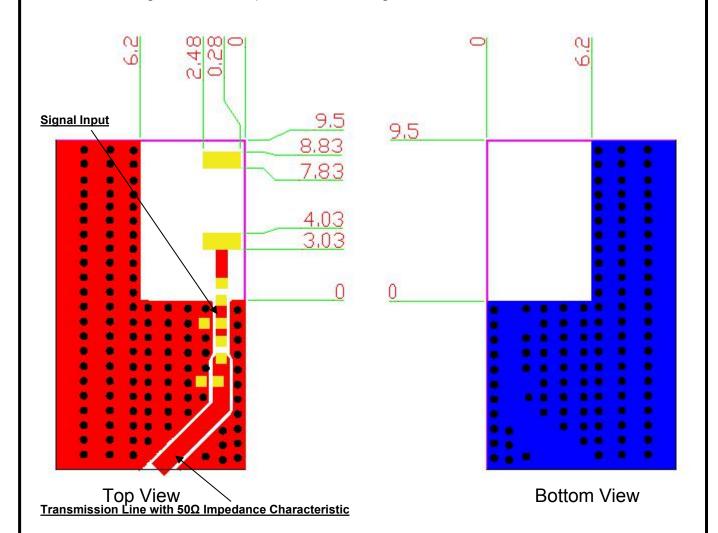



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.

H2U262GKBA0100

H

PAGE 2 OF 10


5-2. Electrical Specifications (Evaluation Board Dimensions: 40 x 40 mm²) 5-2-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions	``````````````````````````````````````	5.0 x 2.2 x 1.6	mm
Working Frequency		2400 ~ 2500	MHz
VSWR(@ center frequency)*		2 Max.	
Characteristic Impe	dance	50	Ω
Polarization		Linear Polarization	
Peak Gain	(@2442 MU=)	2.3 (typical)	dBi
Efficiency	(@2442 MHz)	66 (typical)	%


^{*}Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

5-2. Return Loss & VSWR

Return Loss (S₁₁)

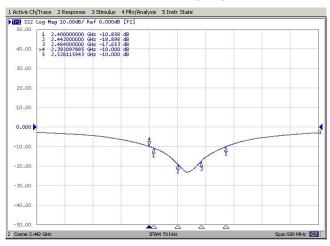

VSWR (S₁₁)

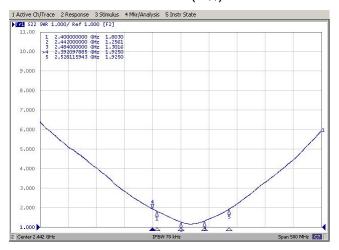



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna	DOCUMENT	H2U262GKBA0100	REV.
(AA029) Engineering Specification	NO.		Н
		PAGE 3 OF	10

6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

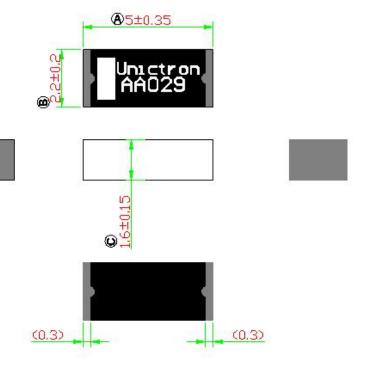

NOTE:

All materials are RoHS compliant.
 "A~©" Critical Dimensions.
 "Reference Dimensions.

PIN Definitions

PIN₁



PIN₂



Top View

Bottom View

PIN	1	2
Soldering PAD	Signal	N/C



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert


TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.

H2U262GKBA0100
H

PAGE 4 OF 10

6-2. Evaluation Board with Antenna

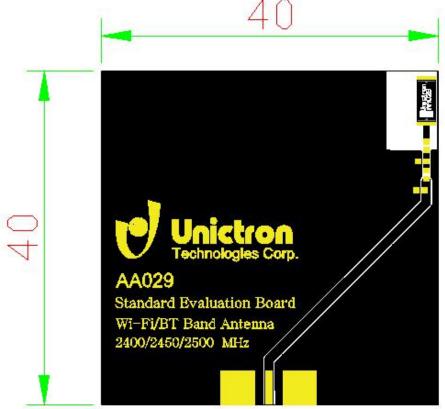

Unit: mm



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.


H2U262GKBA0100


H


PAGE 5 OF 10

7. Radiation Pattern (with 40 x 40 mm² Evaluation Board)

7-1. 3D Gain Pattern @ 2442 MHz (unit: dBi)

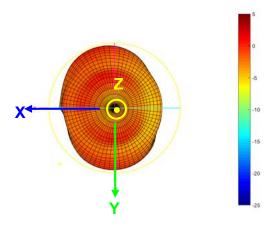

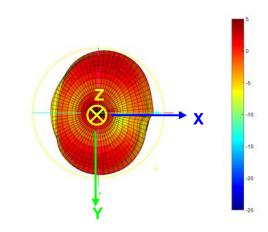

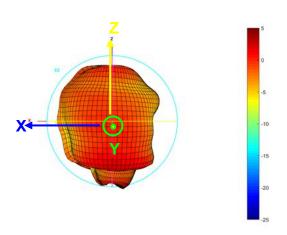





詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification


DOCUMENT NO.

H2U262GKBA0100
H
PAGE 6 OF 10

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484	2500
Efficiency(dB)	-2.3	-2.2	-2.1	-1.8	-1.9	-1.6	-1.7	-1.8	-1.9	-1.8	-1.9	-1.9	-1.9	-2.0	-2.0	-2.1
Efficiency(%)	59.3	60.9	62.2	66.1	64.2	68.4	67.5	66.8	65.2	65.8	64.8	65.1	64.0	62.4	63.0	61.5
Peak Gain(dBi)	1.4	1.6	1.8	2.1	2.0	2.3	2.3	2.2	2.0	2.1	1.9	2.0	1.9	1.8	1.8	1.7

7-3. 3D Efficiency vs. Frequency

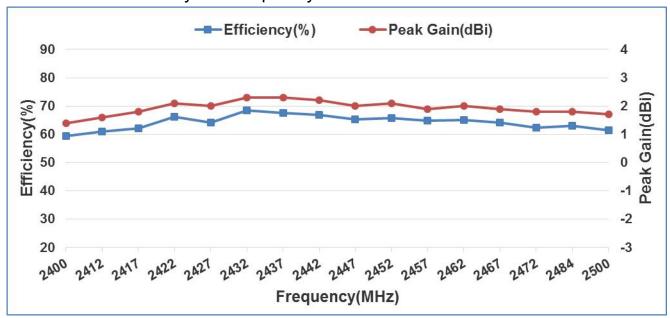



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert


TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

DOCUMENT NO.


H2U262GKBA0100
H
PAGE 7 OF 10

8. Frequency tuning and Matching circuit

8-1. Chip antenna tuning scenario:

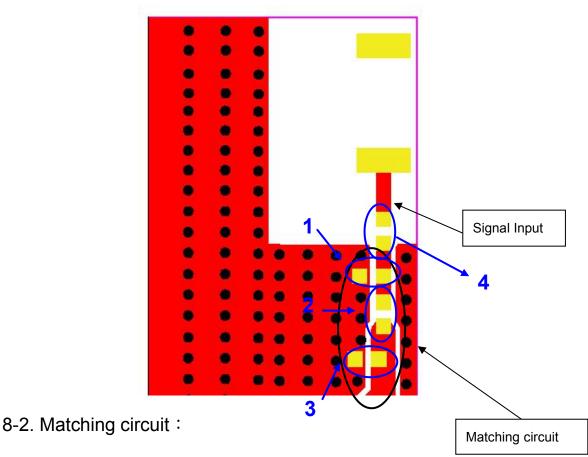

With the following recommended values of matching and tuning components, the center frequencies will be about 2442 MHz at our standard 40 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.



System Matching Circuit Component							
Location	Description	Vendor	Tolerance				
1	N/A*	-	-				
2	2.2nH, (0402)	DARFON	±0.1nH				
3	1pF, (0402)	DARFON	±0.1pF				
4	0Ω, (0402)	-	-				



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification

H2U262GKBA0100

H

PAGE 8 OF 10

9. Soldering Conditions 9-1. Typical Soldering Profile for Lead-free Process 260°C 217°C 150-200°C 150-200°C Pre-heating 60-180s





詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna (AA029) Engineering Specification


DOCUMENT NO.

H2U262GKBA0100
H

PAGE 9 OF 10

10. Packing

- (1) Quantity/Reel: 3000pcs/Reel
- (2) Plastic tape:
 - a. Tape Drawing

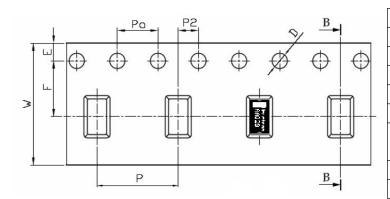

b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	12.00	±0.30
Р	8.00	±0.10
Ш	1.75	±0.10
F	5.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
D	1.30	-0.00
Po	4.00	±0.10
10Po	40.00	±0.20

11. Operating & Storage Conditions

11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40° C to 85° C

11-2. Storage

- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE: 5.0 x 2.2 x 1.6 WiFi / Bluetooth Chip Antenna	DOCUMENT	H2U262GKBA0100	REV.
(AA029) Engineering Specification	NO.		Н
		PAGE 10 OF	10