
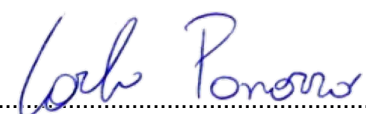


**TEST REPORT**  
**Nr. R20258101****Federal Communication Commission (FCC)**

<b>Report Reference No.</b> .....	R20258101
Date of issue: .....	23.12.2020
Total number pages: .....	17
<b>Applicant's name</b> .....	Infiniteplay S.r.l.
Address .....	Giacinto Andrea Longhin, 131 – 35129 Padova (PD) – Italy
<b>Test specification:</b>	
Standards .....	KDB 447498 D01 General RF Exposure Guidance v06
Non-standard test method .....	N/A
<b>Test Report Form No.</b> .....	15-247_HoppingCMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF .....	2020-01
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
<b>Test item description</b> .....	Outdoor entrance panel
Trademark .....	IpDoor
Manufacturer .....	Infiniteplay S.r.l.
Model / Type reference .....	IP220D.10
FCC ID .....	2AX2X-IPDDP
Rating(s) .....	24 Vdc 48 Vdc from PoE
<b>Report</b>	
Tested by (name + signature) .....	C. Panozzo 
Approved by (name + signature) .....	R. Beghetto 

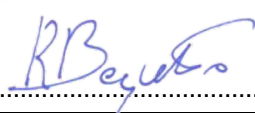

<b>1</b>	<b>Summary</b>	
1	Summary.....	2
2	Reference standard .....	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of test item(s).....	5
6.1	Photos of the test item.....	6
7	Verdict summary section .....	8
8	Test conditions.....	10
8.1	General.....	10
9	Test results .....	11
9.1	RF Exposure Analysis .....	11

CMC Centro Misure Compatibilità S.r.l.



<b>2 Reference standard</b>	
KDB 447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices
<b>3 List of attachments</b>	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
<b>4 Deviation(s) from test specification</b>	
None	
<b>5 Testing location</b>	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

<b>Revision index</b>	<b>Date</b>	<b>Change history</b>
1.0	23.12.2020	--



<b>Testing and sampling:</b>	
Date of receipt of test item.....	07.01.2020
Testing start date.....	23.12.2020
Testing end date.....	23.12.2020
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion.  The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P200013
<b>General remarks:</b>	
<p>This report shall not be reproduced, except in full, without the written approval of CMC.            The test results presented in this report relate only to the object tested.            "(see appended table)": refers to a table appended to the report.            Throughout this report a comma is used as the decimal separator.</p>	
<b>Possible test case verdicts:</b>	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
<b>Definition of symbols used in this test report:</b>	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

CMC Centro Misure Compatibilità S.r.l.



**6 General description of test item(s)**

Description .....	Outdoor entrance panel							
Model Number .....	IP220D.10							
FCC ID .....	2AX2X-IPDDP							
Serial Number .....	--							
Brand name .....	IpDoor							
Nominal frequency .....	2400 – 2483,5 MHz							
Nominal frequencies .....	F <sub>L</sub> : 2412 MHz		F <sub>M</sub> : 2437 MHz		F <sub>H</sub> : 2462 MHz			
Rated power supply .....	Voltage and Frequency			Reference poles				
				N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	DC: 24 V						<input type="checkbox"/>	
Software version .....	1.03							
Test configuration .....	<input type="checkbox"/>	Table top equipment						
	<input checked="" type="checkbox"/>	Floor standing equipment						
	<input type="checkbox"/>	Hand-held equipment						
Type of equipment .....	<input checked="" type="checkbox"/>	Transmitter unit						
	<input type="checkbox"/>	Receiver unit						
Type of station .....	<input checked="" type="checkbox"/>	Fixed station						
	<input type="checkbox"/>	Portable station						
	<input type="checkbox"/>	Mobile station						
Operating modes .....	No.	Operating mode of test item						
	1	EUT in continuous transmission at maximum power						
Supplemental information to the operating modes .....	All tests have been performed with EUT supplied from 24 Vdc because, as declared by the manufacturer, with EUT supplied from PoE, the certified WiFi module would not be enabled							



### 6.1 Photos of the test item







**7 Verdict summary section**

<b>KDB 447498 D01 General RF Exposure Guidance v06</b>			
<b>Clause</b>	<b>Requirement – Test case</b>	<b>Basic standard</b>	<b>Verdict</b>
cl. 4	RF Exposure Analysis	--	<b>P</b>







<b>Normative references</b>	
<b>Reference no.</b>	<b>Description</b>
KDB 447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices





## 8 Test conditions

### 8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	<b>Temperature</b>	<b>Humidity</b>	<b>Atmospheric pressure</b>
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties .....	Attachment 1		

CMC Centro Misure Compatibilità S.r.l.



## 9 Test results

### 9.1 RF Exposure Analysis

Tested by .....	C. Panozzo
Test date .....	23.12.2020
Test location (stand) .....	Laboratory
Reference standards .....	KDB 447498 D01 cl. 4 ANSI C63.10
Supplementary information.....	--

#### Acceptance limits

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition(s), listed below, is (are) satisfied

For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. separation distance, mm})] \times (\sqrt{f(\text{GHz})}) \leq 3$  for 1-g SAR and  $\leq 7,5$  for 10-g SAR

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	<i>SAR Test Exclusion Threshold (mW)</i>
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

10-g Extremity SAR Test Exclusion Power Thresholds are 2,5 times higher than the 1-g SAR Test Exclusion Thresholds indicated above.



## Result

### 802.11b mode

<i>Transmission channel (MHz)</i>	<i>Conducted measured level (dBm)</i>	<i>Peak Output Power (mW)</i>
2412	19,38	86,70
2437	19,33	85,70
2462	19,25	84,14

**Remarks:** the conducted measured levels have been obtained from the certified WiFi module (FCC ID VPYLB1DX) report no. RF151228C18B, date 13.06.2016

### 802.11g mode

<i>Transmission channel (MHz)</i>	<i>Conducted measured level (dBm)</i>	<i>Peak Output Power (mW)</i>
2412	22,40	173,78
2437	21,75	149,62
2462	21,82	152,05

**Remarks:** the conducted measured levels have been obtained from the certified WiFi module (FCC ID VPYLB1DX) report no. RF151228C18B, date 13.06.2016

### 802.11n (HT20) mode

<i>Transmission channel (MHz)</i>	<i>Conducted measured level (dBm)</i>	<i>Peak Output Power (mW)</i>
2412	20,62	115,35
2437	22,34	171,40
2462	21,24	133,05

**Remarks:** the conducted measured levels have been obtained from the certified WiFi module (FCC ID VPYLB1DX) report no. RF151228C18B, date 13.06.2016


### Standalone 10-g extremity

Using separation distance of 40 mm with the formula above results:

$$(173,78 \text{ mW} / 40 \text{ mm}) * \sqrt{2,412 \text{ GHz}} = 6,75 \leq 7,5$$

The SAR exclusion condition is fulfilled and SAR evaluation is not required for separation distance of 40 mm or more.

**Remarks:** the separation distance of almost 40 mm is demonstrated by the following draw, where it is shown that the minimum distance between the radiant antenna and the human body is 97,13 mm, and this distance cannot be changed as it is the structure of the object itself that provides these dimensions.

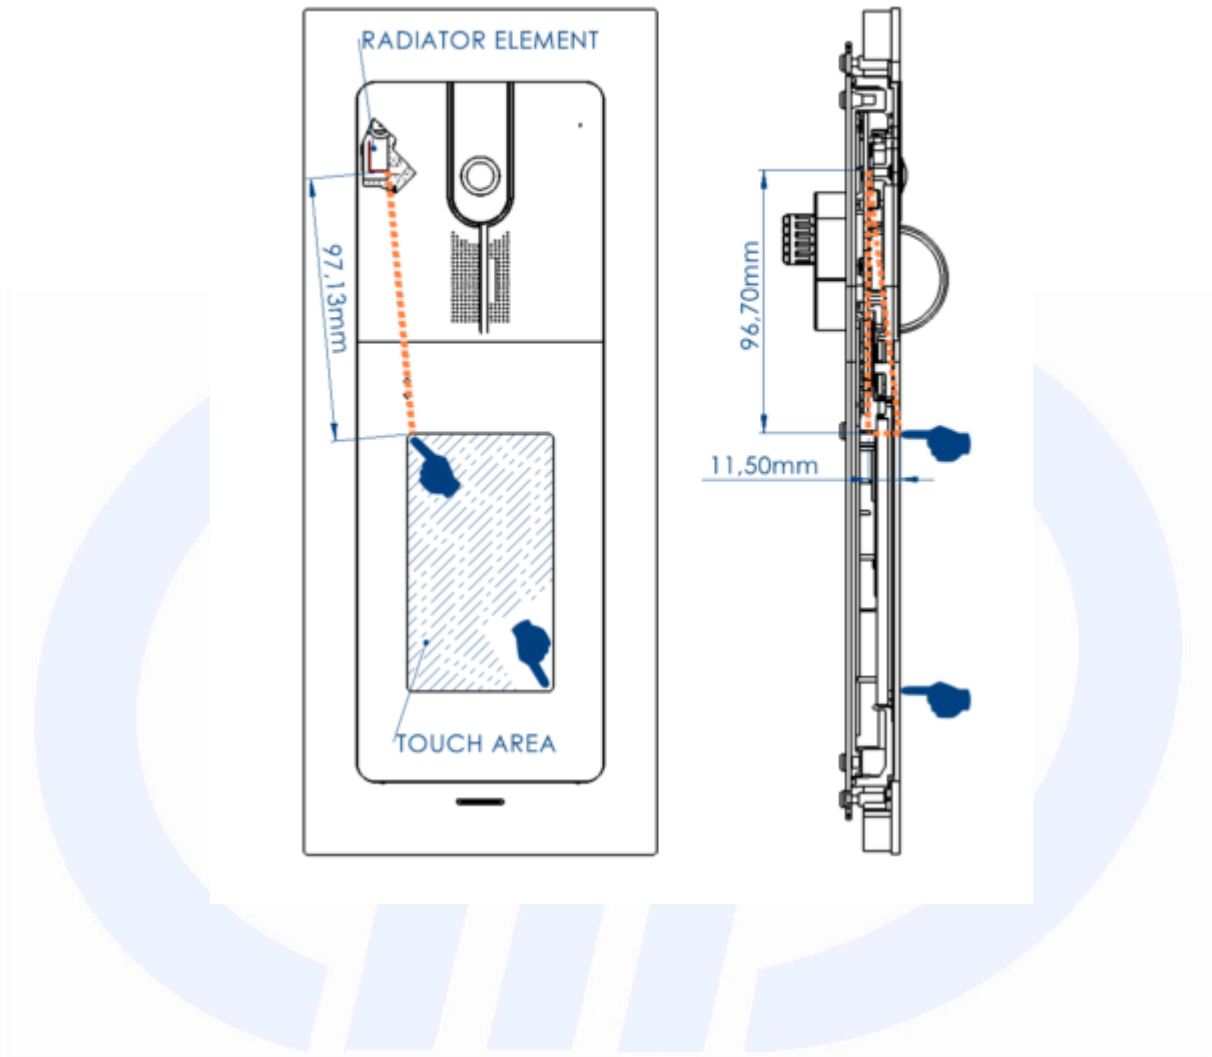



### Attachment 1

<i><b>Id. number</b></i>	<i><b>Manufacturer</b></i>	<i><b>Model</b></i>	<i><b>Description</b></i>	<i><b>Serial number</b></i>	<i><b>Last calibration</b></i>	<i><b>Due date calibration</b></i>
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21





## Attachment 1

### Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05	2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06	3,3 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonics	PE006_01	10 mA + 2,6 %	1
Flicker	PE007_01	4,79 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	1,95 dB 0,75 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,20 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



### Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	< 1x10 <sup>-7</sup>	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 <sup>-7</sup>	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev_20_02 date 24/02/2020			

**Note 1:**

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

**Note 2:**





It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2





### Attachment 1

#### Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 <p>The sample complies with the requirements.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	 <p>The sample complies with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	 <p>The sample does not comply with the requirements.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

#### Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual) .....	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual) .....	Measurement uncertainty calculation