

S

T

S

L

A

B



RADIO TEST REPORT

Report No: STS2206205W01

Issued for

ZHENYI TECHNOLOGIES CO., LTD.

7F-H, Hangsheng Technology Building, No. 8 Gaoxin South
6th Road, Nanshan District, Shenzhen, China

Product Name:	Remote Control Module
Brand Name:	Kamia
Model Name:	RCM100 1.0
Series Model:	N/A
FCC ID:	2AX4XRCM100
Test Standard:	FCC Part 15.231

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@ststest.com





TEST REPORT CERTIFICATION

Applicant's Name: ZHENYI TECHNOLOGIES CO., LTD.
Address: 7F-H, Hangsheng Technology Building, No. 8 Gaoxin South 6th Road, Nanshan District, Shenzhen, China
Manufacturer's Name: ZHENYI TECHNOLOGIES CO., LTD.
Address: 7F-H, Hangsheng Technology Building, No. 8 Gaoxin South 6th Road, Nanshan District, Shenzhen, China

Product Description

Product Name: Remote Control Module
Brand Name: Kamia
Model Name: RCM100 1.0
Series Model: N/A
Test Standards: FCC Part 15.231
Test Procedure: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test:
Date of Receipt of Test Item...: 29 June 2022
Date of performance of tests...: 29 June 2022 ~ 14 Oct. 2022
Date of Issue: 14 Oct. 2022
Test Result: Pass

Testing Engineer : [Signature]
(Chris Chen)

Technical Manager : [Signature]
(Sean she)

Authorized Signatory : [Signature]
(Bovey Yang)

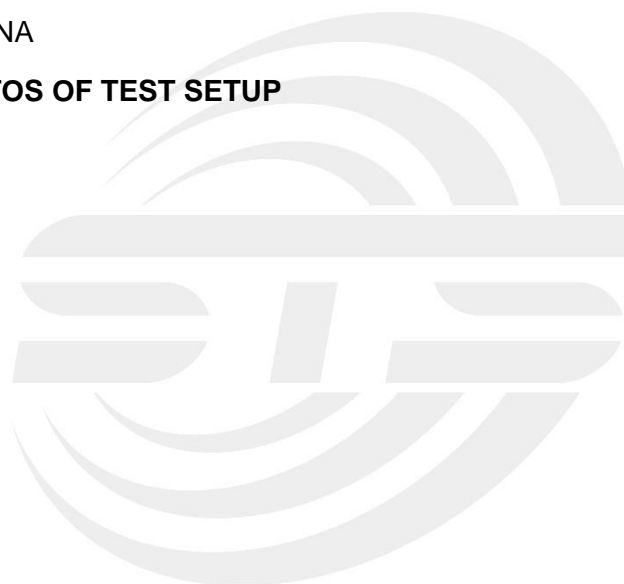




TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 TEST SOFTWARE AND POWER LEVEL	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.6 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	16
4.1 RADIATED EMISSION LIMITS	16
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATING CONDITIONS	20
4.6 TEST RESULTS	20
4.7 FIELD STRENGTH CALCULATION	21
4.8 TEST RESULTS (EMISSION)	21
5. BANDWIDTH TEST	30
5.1 LIMIT	30
5.2 TEST REQUIREMENTS	30
5.3 TEST PROCEDURE	30
5.4 TEST SETUP	30
5.5 EUT OPERATION CONDITIONS	30
5.6 TEST RESULTS	31
6. TRANSMITTER TIMEOUT	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34



TABLE OF CONTENTS	Page
6.3 TEST SETUP	34
6.4 TEST RESULTS	35
7. PERIODIC OPERATION	36
7.1 TEST PROCEDURE	36
7.2 TEST SETUP	36
7.3 EUT OPERATION CONDITIONS	36
7.4 TEST RESULTS	37
8. ANTENNA REQUIREMENT	39
8.1 STANDARD REQUIREMENT	39
8.2 EUT ANTENNA	39
APPENDIX 1-PHOTOS OF TEST SETUP	40





Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	14 Oct. 2022	STS2206205W01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.231, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.205(a)/15.209/ 15.231(e)	Radiated Spurious Emission	PASS	--
15.231(e)	Transmission requirement	PASS	--
15.231(C)	20 dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE: (1) "N/A" denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.87 dB
2	Unwanted Emissions, conducted	± 2.895 dB
3	All emissions, radiated 9K-30MHz	± 3.80 dB
4	All emissions, radiated 30M-1GHz	± 4.09 dB
5	All emissions, radiated 1G-6GHz	± 4.92 dB
6	All emissions, radiated >6G	± 5.49 dB
7	Conducted Emission (9KHz-30MHz)	± 2.73 dB



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Remote Control Module								
Trade Name	Kamia								
Model Name	RCM100 1.0								
Series Model	N/A								
Model Difference	N/A								
Product Description	<p>The EUT is a Remote Control Module</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>303MHz~390MHz</td> </tr> <tr> <td>Modulation Type:</td> <td>ASK</td> </tr> <tr> <td>Antenna Designation:</td> <td>PCB Antenna</td> </tr> <tr> <td>Antenna Gain(Peak)</td> <td>0 dBi</td> </tr> </table> <p>More details of EUT technical specification, please refer to the User Manual.</p>	Operation Frequency:	303MHz~390MHz	Modulation Type:	ASK	Antenna Designation:	PCB Antenna	Antenna Gain(Peak)	0 dBi
Operation Frequency:	303MHz~390MHz								
Modulation Type:	ASK								
Antenna Designation:	PCB Antenna								
Antenna Gain(Peak)	0 dBi								
Channel List	Please refer to the Note 2.								
Adapter	Input: 100-240V~50/60Hz 0.25A Max Output: DC5V 1000mA								
Hardware version number	MAIN-V1.0								
Software version number	V1.6								
Connecting I/O Port(s)	Please refer to Note 1.								

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
-

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	303	03	315	05	372
02	310	04	318	06	390

3. Table for filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	Kamia	RCM100 1.0	PCB	N/A	0	Antenna

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Modulation
Mode 1	TX CH01(303MHz)	ASK
Mode 2	TX CH04(318MHz)	ASK
Mode 3	TX CH06(390MHz)	ASK

For Radiated Emission		
Worst Mode	Description	Modulation
Mode 1	TX CH01(303MHz)	ASK
Mode 2	TX CH04(318MHz)	ASK
Mode 3	TX CH06(390MHz)	ASK

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
Other SRD	303MHz~390MHz	ASK	0	Default	SecureCRT

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

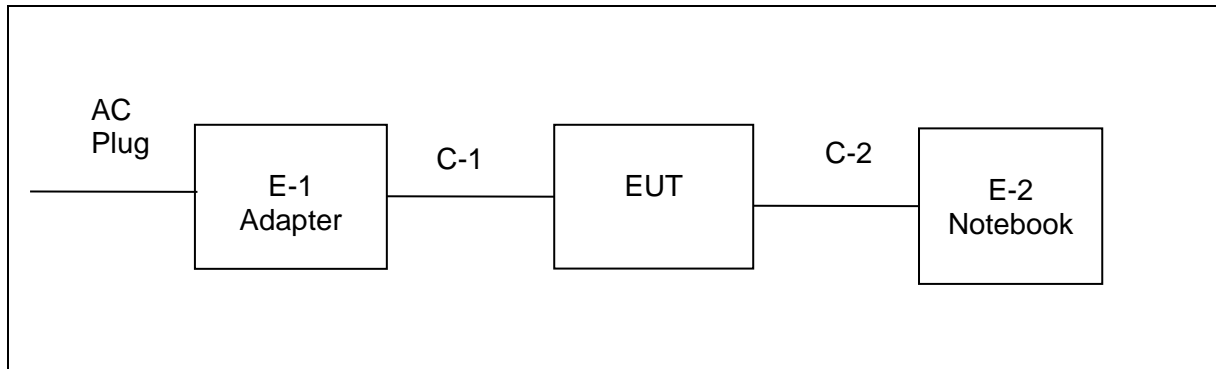

Conducted Emission Test

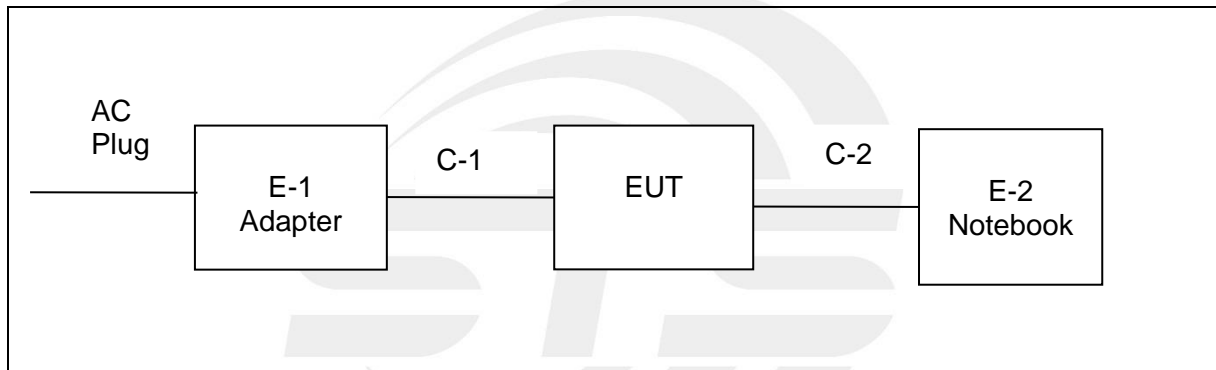



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Adapter	N/A	KA06E-0501000 US	N/A	N/A
C-1	USB Cable	N/A	N/A	130cm	NO

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-2	Notebook	LENOVO	ThinkPad E470	N/A	N/A
C-2	USB Cable	N/A	N/A	150cm	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Temperature & Humidity	SW-108	SuWei	N/A	2022.03.02	2023.03.01
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2022.07.04	2023.07.03
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2022.09.29	2023.09.28
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Active loop Antenna	ZHINAN	ZN30900C	16035	2022.03.02	2023.03.01
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	EM	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2022.09.29	2023.09.28
LISN	R&S	ENV216	101242	2022.09.28	2023.09.27
LISN	EMCO	3810/2NM	23625	2022.09.28	2023.09.27
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2022.03.01	2023.02.28
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	FARAD	LZ-RF /LzRf-3A3			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

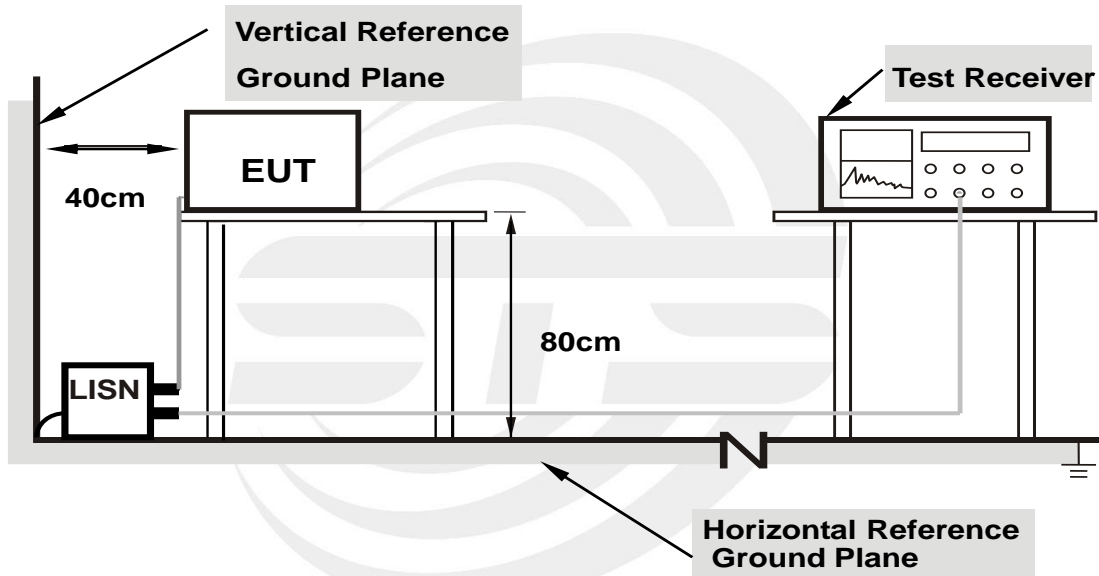

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**




3.4 TEST RESULTS

Temperature:	25.4(C)	Relative Humidity:	51%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1700	18.26	20.33	38.59	64.96	-26.37	QP
2	0.1700	6.51	20.33	26.84	54.96	-28.12	AVG
3	1.1660	27.02	20.30	47.32	56.00	-8.68	QP
4	1.1660	17.80	20.30	38.10	46.00	-7.90	AVG
5	2.4620	25.10	20.32	45.42	56.00	-10.58	QP
6	2.4620	14.53	20.32	34.85	46.00	-11.15	AVG
7	3.3580	24.16	20.37	44.53	56.00	-11.47	QP
8	3.3580	13.77	20.37	34.14	46.00	-11.86	AVG
9	4.6380	20.69	20.44	41.13	56.00	-14.87	QP
10	4.6380	9.13	20.44	29.57	46.00	-16.43	AVG
11	23.6100	16.35	22.68	39.03	60.00	-20.97	QP
12	23.6100	4.21	22.68	26.89	50.00	-23.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

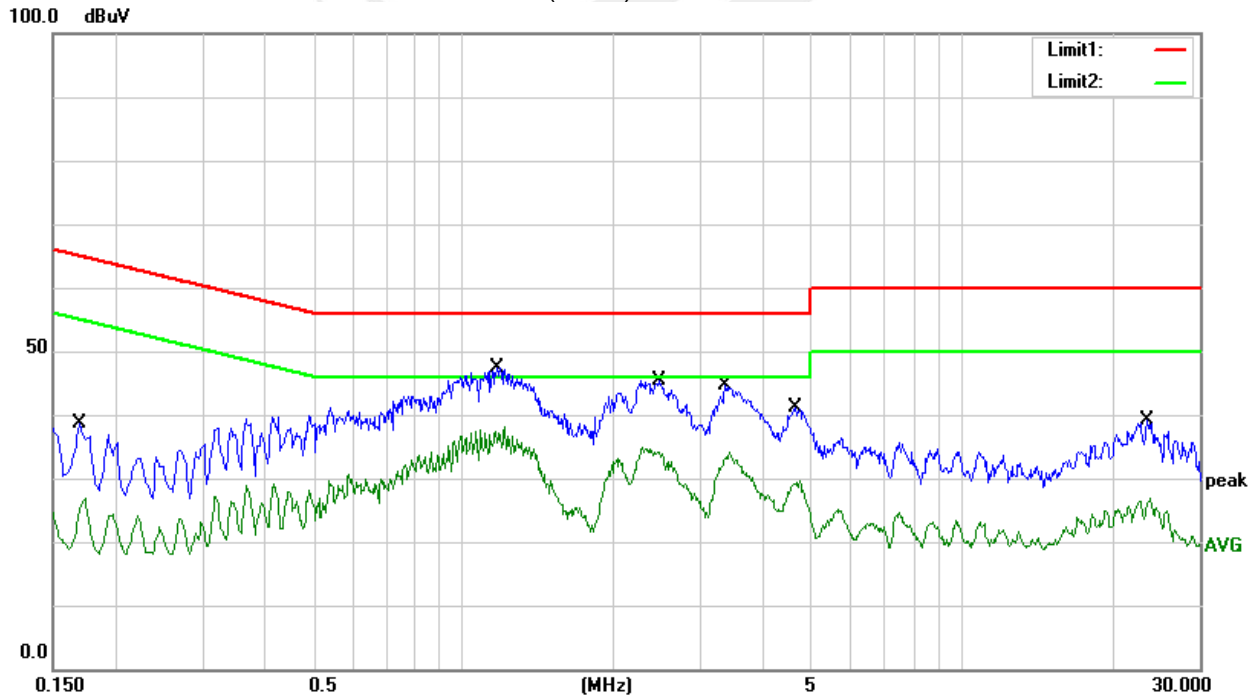




Temperature:	25.4(C)	Relative Humidity:	51%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	22.43	20.29	42.72	66.00	-23.28	QP
2	0.1500	6.34	20.29	26.63	56.00	-29.37	AVG
3	1.4140	21.06	20.34	41.40	56.00	-14.60	QP
4	1.4140	9.84	20.34	30.18	46.00	-15.82	AVG
5	1.8860	20.57	20.38	40.95	56.00	-15.05	QP
6	1.8860	7.72	20.38	28.10	46.00	-17.90	AVG
7	2.6420	21.59	20.43	42.02	56.00	-13.98	QP
8	2.6420	7.53	20.43	27.96	46.00	-18.04	AVG
9	3.3900	19.30	20.47	39.77	56.00	-16.23	QP
10	3.3900	6.17	20.47	26.64	46.00	-19.36	AVG
11	22.6780	12.61	22.81	35.42	60.00	-24.58	QP
12	22.6780	-0.25	22.81	22.56	50.00	-27.44	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

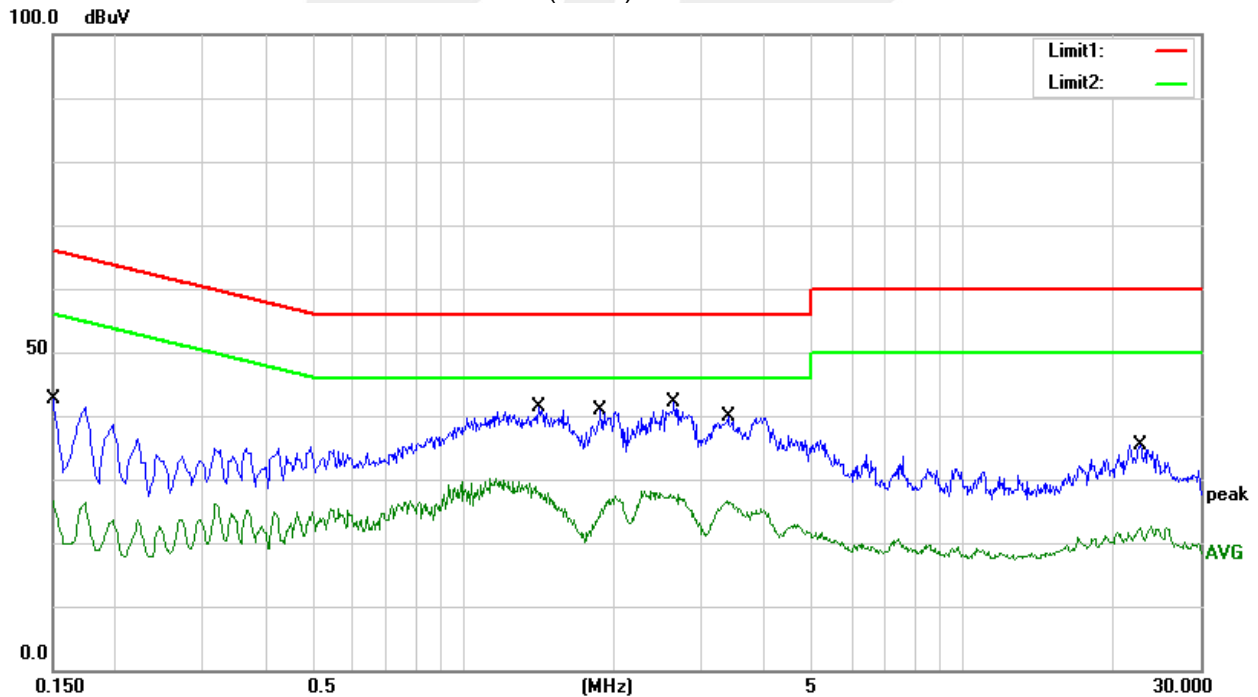



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on Part 15.205(a), then the Part 15.209(a), Part 15.231(e) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100**	3
88~216	150**	3
216~960	200**	3
Above 960	500	3

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 1,50 **
174 - 260	1,500	1,50
260 - 470	1,500 to 5,000 **	1,50 to 5,00 **
Above 470	5,000	5,00

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

NOTE:** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental

field strengths are as follows: for the band 130-174 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $22.72727(F) - 2454.545$; for the band 260-470 MHz, $\mu\text{V}/\text{m}$ at 3 meters = $16.6667(F) - 2833.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.



LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 3MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



4.2 TEST PROCEDURE


- a. The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.
During test, The table was rotated 360 degrees to determine the position of the highest radiation.
- b. In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- c. In the frequency range 30MHz-1GHz, Bi-Log Test Antenna used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- d. In the frequency above 1GHz, Place the measurement antenna 3m away from the EUT for each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

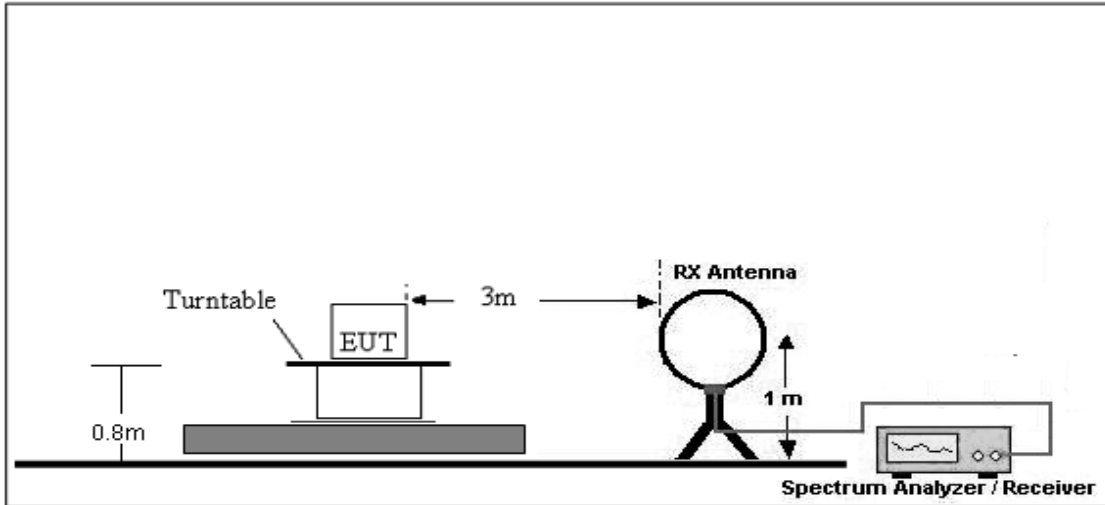

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

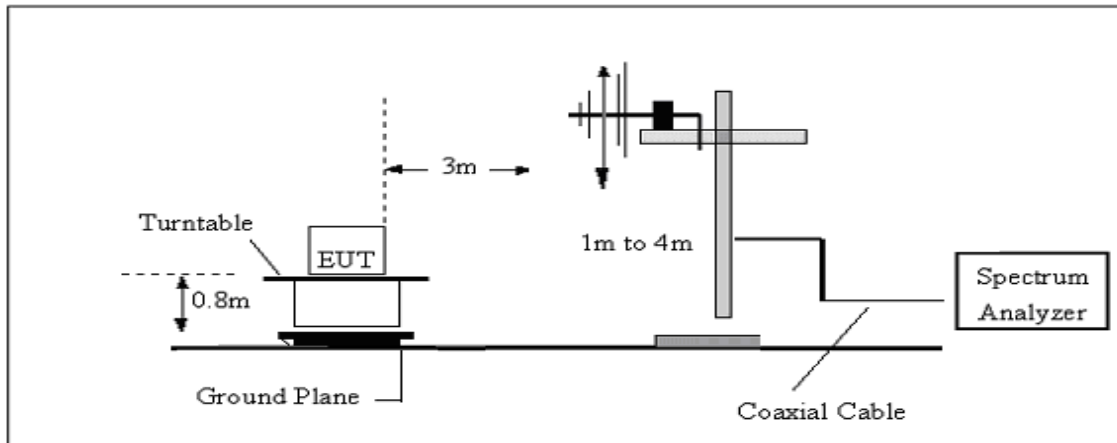

(C) Radiated Emission Test-Up Frequency Above 1GHz

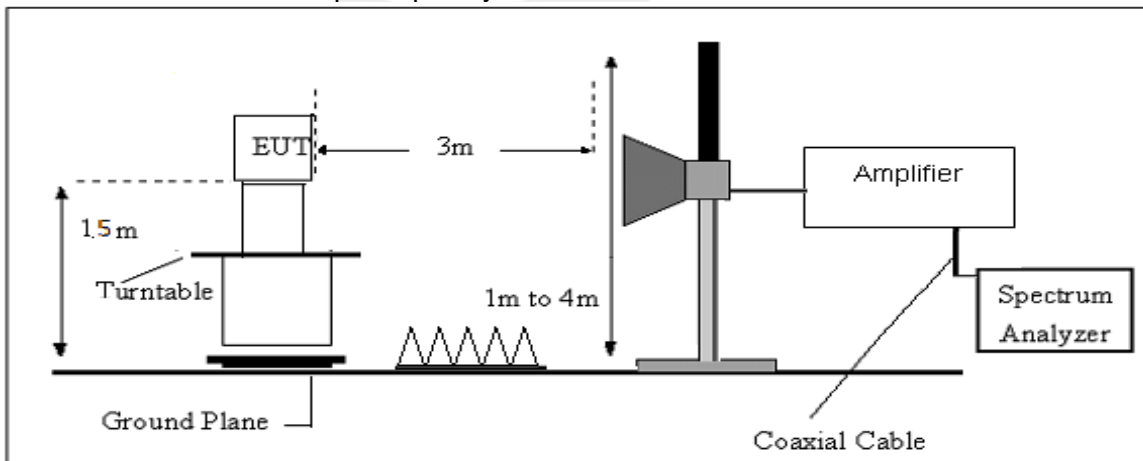

4.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

INTRODUCTION TO PDCF

Reference: (§15.35 Measurement detector functions and bandwidths.)

- a. Part 15 of the FCC Rules provides for the operation of low power communication devices without an individual license (e.g., intrusion detectors, pulsed water tank level gauges, etc.), subject to certain requirements. Some of these devices use extremely narrow pulses to generate wideband emissions, which are measured to determine compliance with the rules. These measurements are typically performed with a receiver or spectrum analyzer. Depending on a number of factors (e.g., resolution bandwidth, pulsewidth, etc.), the spectrum analyzer may not always display the true peak value of the measured emission. This effect, called “pulse desensitization,” relates to the capabilities of the measuring instrument. For the measurement and reporting of the true peak of pulsed emissions, it may be necessary to apply a “pulse desensitization correction factor” (PDCF) to the measured value, pursuant to 47 CFR 15.35(a).

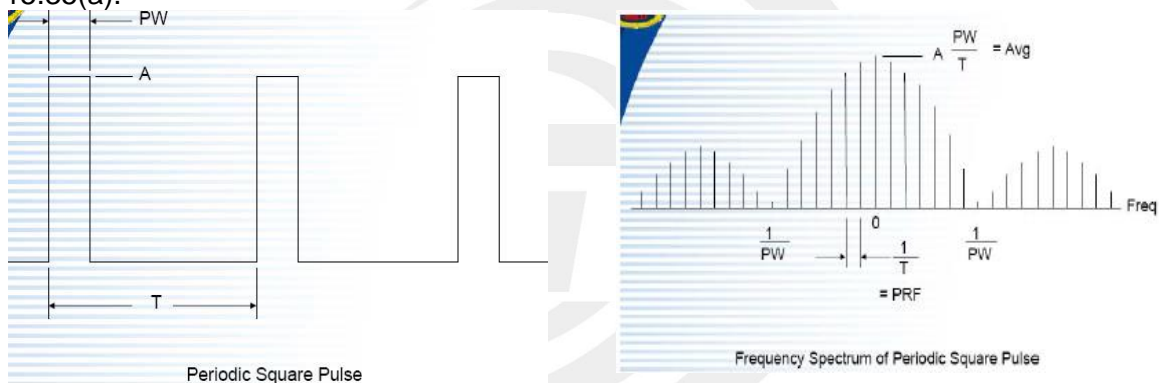

If using spectrum analyzer to measure pulse signal, it have to make sure the RBW use is at least $2/PW$.

•When RBW is less than $2/PW$, you are able to measure the true peak level of the pulse signal. If this is the case, PDCF is required to compensate to determine true peak value.

Pulse desensitization:

315MHz, ASK

PW =28800usec,Period=100000usec, Level=A

RBW>2/PW=0.069K , PRF=1/T=0.01K ,

315MHz, FSK

PW =29600usec,Period=100000usec, Level=A

RBW>2/PW=0.068K , PRF=1/T=0.01K ,

433.92MHz, ASK

PW =16730usec,Period=100000usec, Level=A

RBW>2/PW=0.1K , PRF=1/T=0.01K ,

433.92MHz, FSK

PW =17600usec,Period=100000usec, Level=A

RBW>2/PW=0.1K , PRF=1/T=0.01K

NOTE: $2 / PW < RBW$, first don't need

- b. For the actual test, please refer to the ANSI C63.10,Annex C refer to section 7 for more detail



4.7 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

4.8 TEST RESULTS (EMISSION)

(Radiated Emission < 30MHz (9KHz-30MHz, H-field))

Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode 1	Polarization:	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	PASS
--	--	--	--	PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



Between 30MHz – 5000 MHz

Temperature:	23.1℃	Relative Humidity:	60%
Phase:	Horizontal	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	113.4200	56.11	-18.73	37.38	43.50	-6.12	peak
3	551.8600	43.18	-5.72	37.46	46.00	-8.54	peak
5	647.8900	36.98	-4.88	32.10	46.00	-13.90	peak


Fundamental Frequency

x	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	303.0000	70.42	-14.72	/	55.70	86.91	-31.21	peak
2	303.0000	70.42	-14.72	13.16	42.54	66.91	-24.37	AVG
4	606.1800	59.50	-5.63	/	53.87	66.91	-13.04	peak
4	606.1800	59.50	-5.63	13.16	40.71	46.91	-6.20	AVG
6	909.7900	57.35	-0.19	/	57.16	66.91	-9.75	peak
6	909.7900	57.35	-0.19	13.16	44.00	46.91	-2.91	AVG

Remark:

- Margin = Result (Result = Reading + Factor) – Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

80.0 dBuV/m

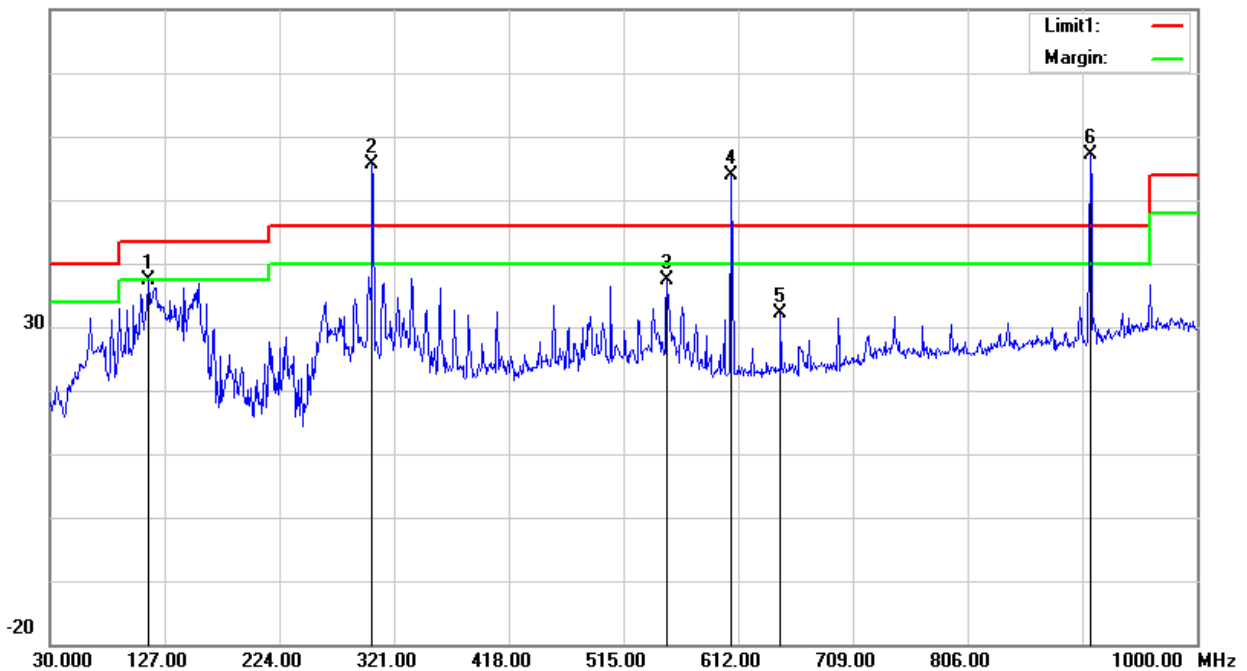



Temperature:	23.1°C	Relative Humidity:	60%
Phase:	Vertical	Test Mode:	Mode 1


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.8200	50.07	-15.91	34.16	40.00	-5.84	peak
3	455.8300	45.79	-9.55	36.24	46.00	-9.76	peak
5	835.1000	37.30	-0.54	36.76	46.00	-9.24	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	303.0000	61.57	-14.72	/	46.85	86.91	-40.06	peak
2	303.0000	61.57	-14.72	13.16	33.69	66.91	-33.22	AVG
4	606.1800	60.71	-5.63	/	55.08	66.91	-11.83	peak
4	606.1800	60.71	-5.63	13.16	41.92	46.91	-4.99	AVG
6	910.7600	54.48	-0.17	/	54.31	66.91	-12.6	peak
6	910.7600	54.48	-0.17	13.16	41.15	46.91	-5.76	AVG

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

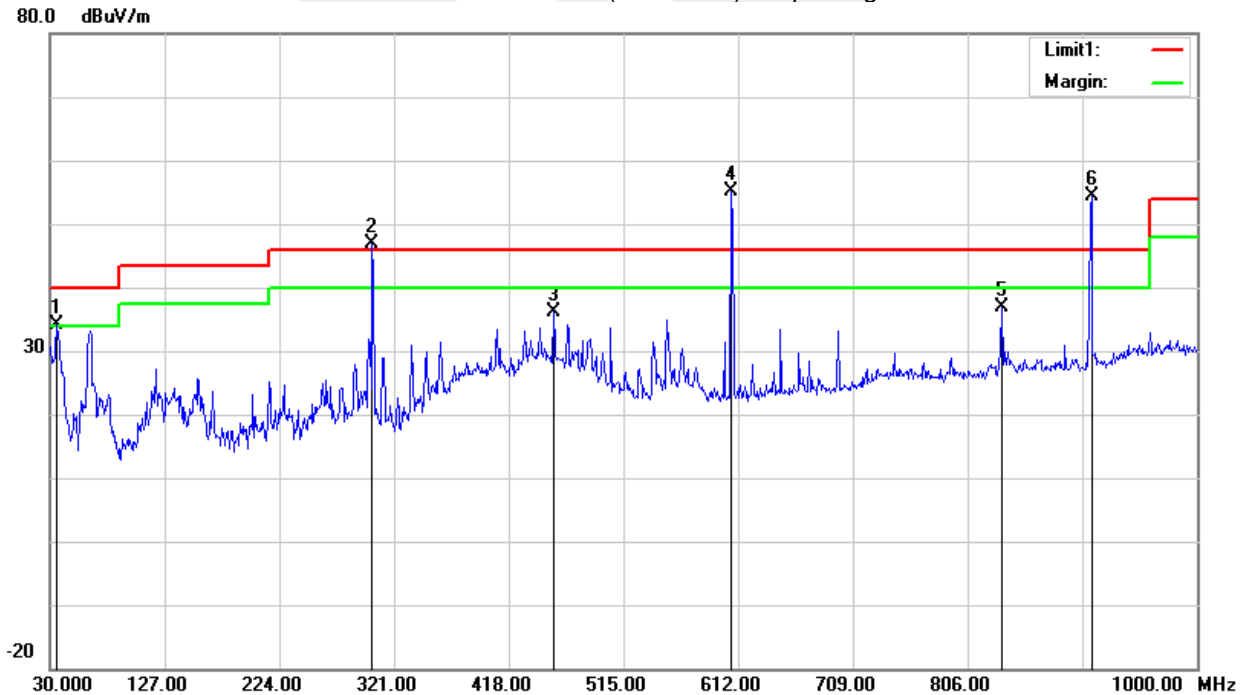



Temperature:	23.1 °C	Relative Humidity:	60%
Phase:	Horizontal	Test Mode:	Mode 2

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	167.7400	57.51	-19.58	37.93	43.50	-5.57	peak
3	551.8600	42.49	-5.72	36.77	46.00	-9.23	peak
5	834.1300	35.29	-0.59	34.70	46.00	-11.30	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
2	318.0000	80.76	-14.09	/	66.67	87.67	-21.00	peak
2	318.0000	80.76	-14.09	13.16	53.51	67.67	-14.16	AVG
4	636.2500	55.61	-4.92	/	50.69	67.67	-16.98	peak
4	636.2500	55.61	-4.92	13.16	37.53	47.67	-10.14	AVG
6	954.4100	53.39	1.67	/	55.06	67.67	-12.61	peak
6	954.4100	53.39	1.67	13.16	41.9	47.67	-5.77	AVG

Remark:

- Margin = Result (Result = Reading + Factor) – Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

80.0 dBUV/m

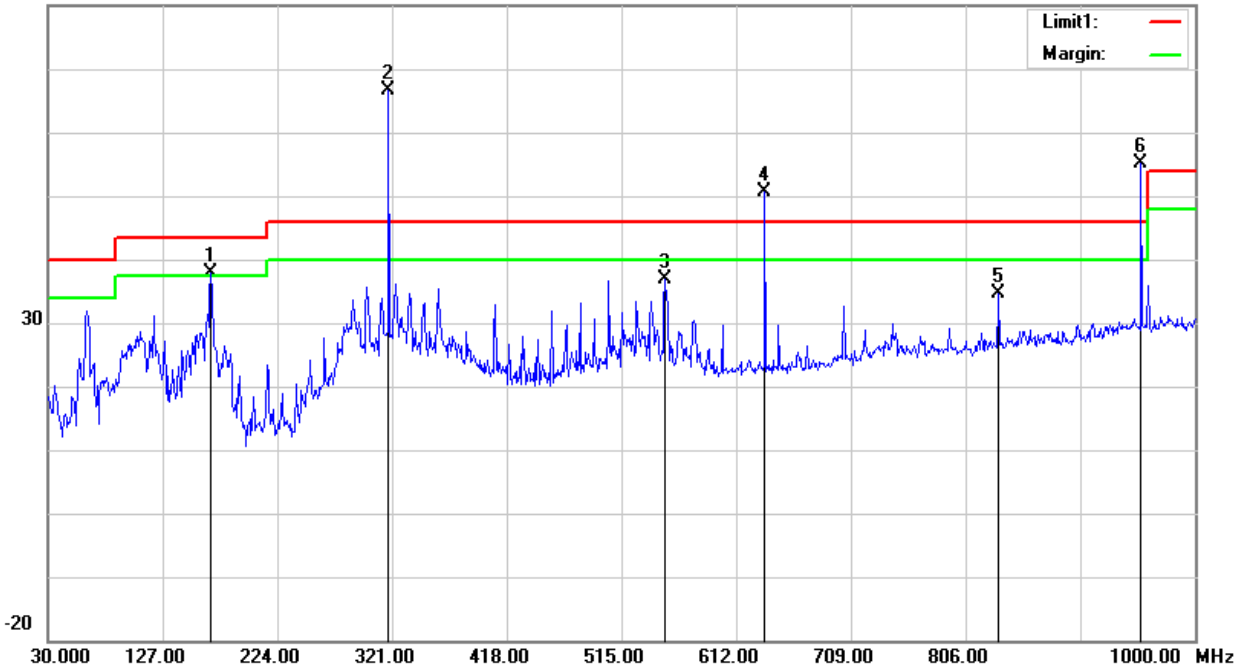



Temperature:	23.1°C	Relative Humidity:	60%
Phase:	Vertical	Test Mode:	Mode 2


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.8200	49.74	-15.91	33.83	40.00	-6.17	peak
4	703.1800	42.19	-4.07	38.12	46.00	-7.88	peak
5	833.1600	39.84	-0.62	39.22	46.00	-6.78	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	318.0000	66.20	-14.09	/	52.11	87.67	-35.56	peak
2	318.0000	66.20	-14.09	13.16	38.95	67.67	-28.72	AVG
3	636.2500	56.65	-4.92	/	51.73	67.67	-15.94	peak
3	636.2500	56.65	-4.92	13.16	38.57	47.67	-9.10	AVG
6	954.4100	56.48	1.67	/	58.15	67.67	-9.52	peak
6	954.4100	56.48	1.67	13.16	44.99	47.67	-2.68	AVG

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

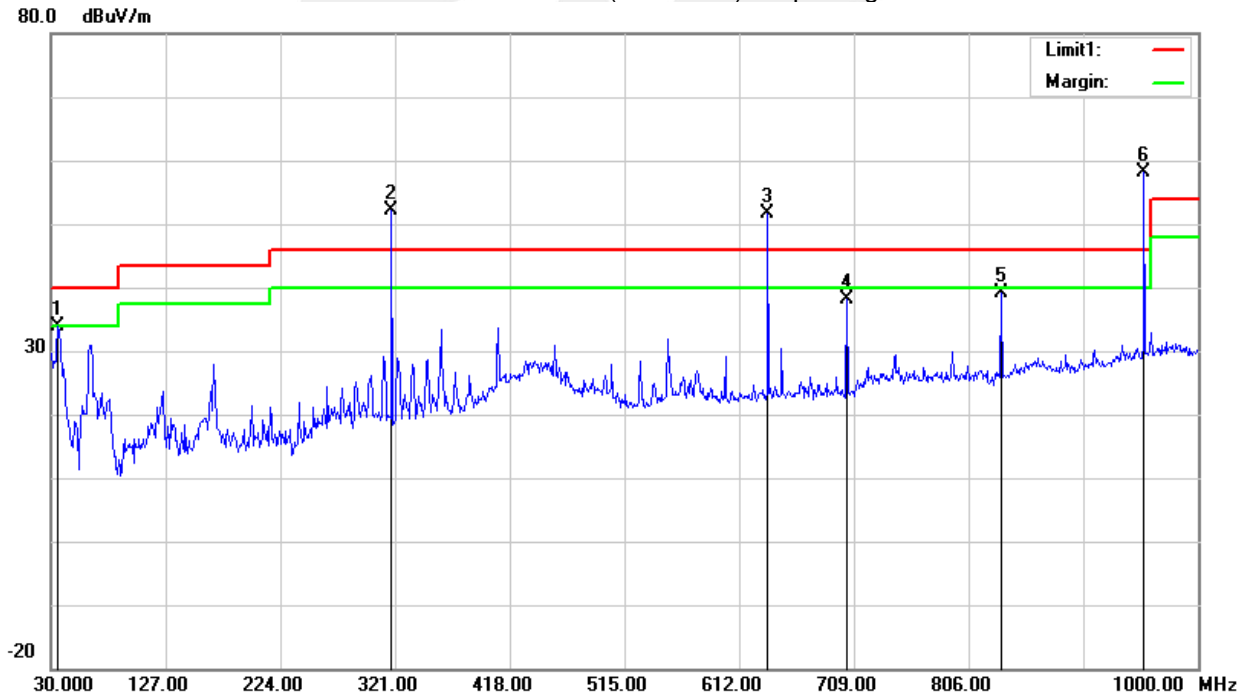



Temperature:	23.1 °C	Relative Humidity:	60%
Phase:	Horizontal	Test Mode:	Mode 3

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	167.7400	58.66	-19.58	39.08	43.50	-4.42	peak
2	299.6600	53.77	-14.82	38.95	46.00	-7.05	peak
4	551.8600	44.81	-5.72	39.09	46.00	-6.91	peak
5	696.3900	37.85	-4.23	33.62	46.00	-12.38	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
3	390.0000	70.22	-11.60	/	58.62	91.29	-32.67	peak
3	390.0000	70.22	-11.60	13.16	45.46	71.29	-25.83	AVG
6	779.8100	47.74	-2.22	/	45.52	71.29	-25.77	peak
6	779.8100	47.74	-2.22	13.16	32.36	51.29	-18.93	AVG

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

80.0 dBUV/m

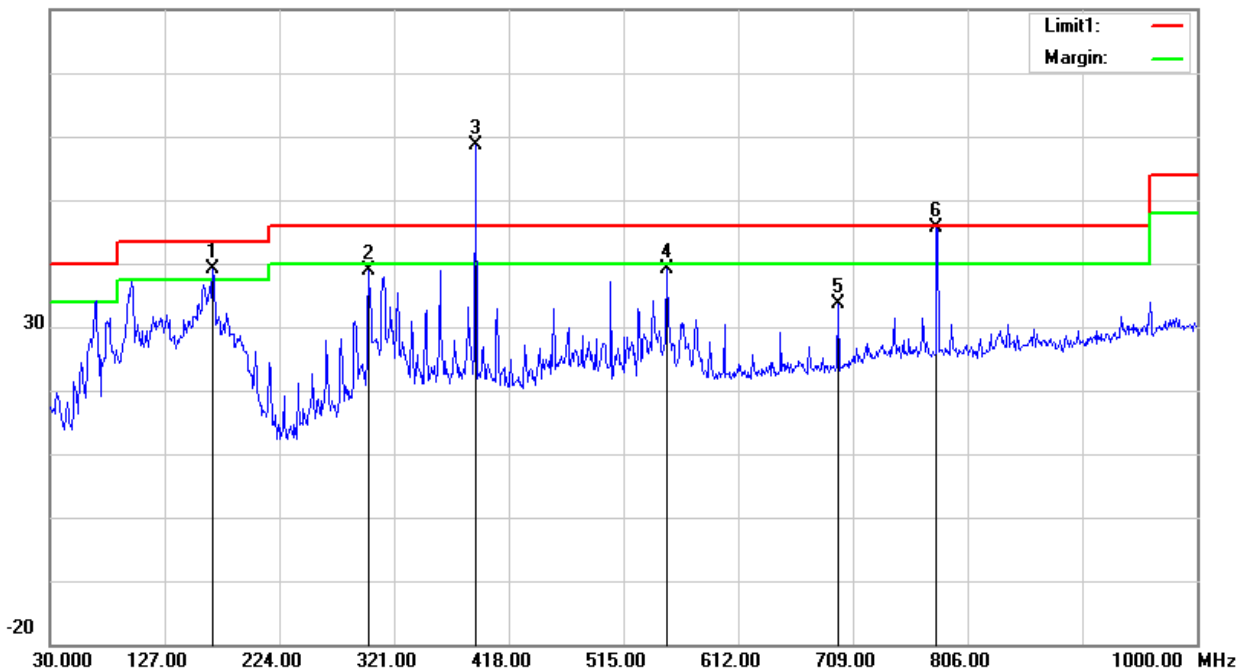



Temperature:	23.1°C	Relative Humidity:	60%
Phase:	Vertical	Test Mode:	Mode 3

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.8200	50.50	-15.91	34.59	40.00	-5.41	peak
2	312.2700	48.60	-14.36	34.24	46.00	-11.76	peak
4	551.8600	41.15	-5.72	35.43	46.00	-10.57	peak
5	779.8100	43.96	-2.22	41.74	46.00	-4.26	peak


Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
3	390.0000	78.83	-11.60	/	67.23	91.29	-24.06	peak
3	390.0000	70.22	-11.60	13.16	54.07	71.29	-17.22	AVG
6	960.2300	32.05	1.76	/	33.81	71.29	-37.48	peak
6	779.8100	47.74	-2.22	13.16	20.65	51.29	-30.64	AVG

Remark:

- Margin = Result (Result =Reading + Factor)-Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBuV/m

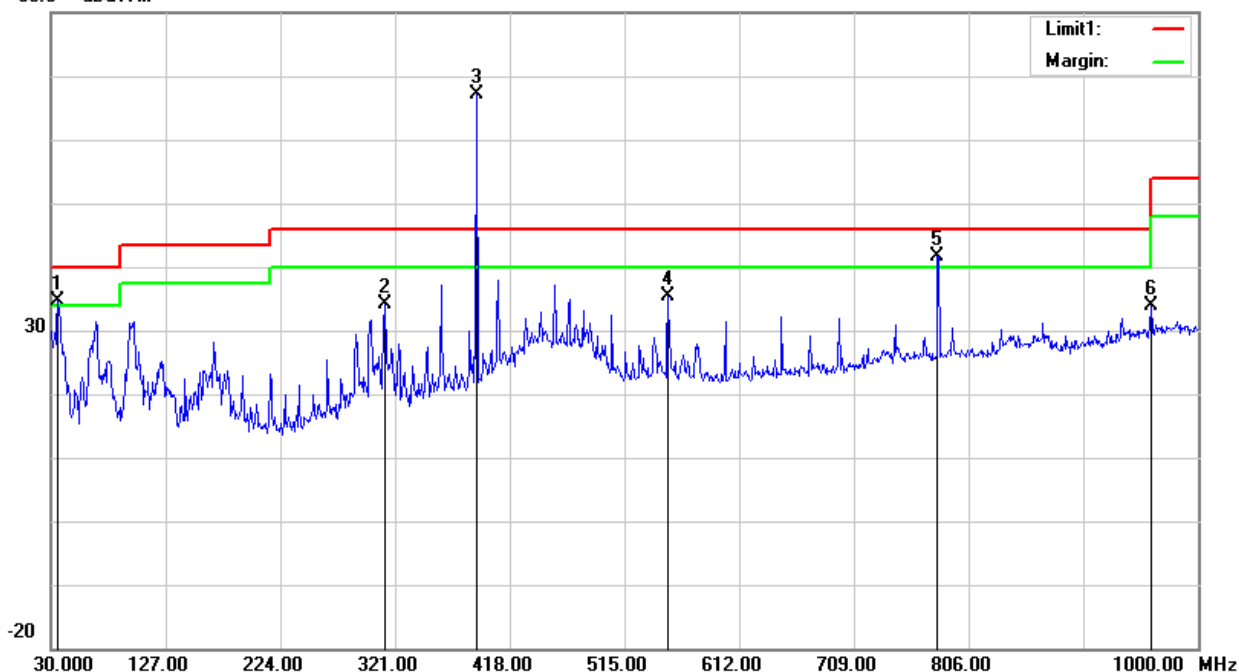



PEAK TEST RESULTS:

Mode 1

Frequency	Reading	Detector	Amplifier	Loss	Antenna Factor	Corrected Factor	Corrected Amplitude	FCC Part 15.231/15.209/205		RX
								Limit	Margin	Antenna
(MHz)	(dB μ V/m)	(PK/QP/AV)	(dB)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(H/V)
909.07688	64.94	PK	45.1	4.0	25.1	-16.00	48.94	74	-25.06	H
909.07688	65.43	PK	45.1	4.0	25.1	-16.00	49.43	74	-24.57	V
1212.0738	62.84	PK	44.1	5.3	25	-13.80	49.04	74	-24.96	H
1212.0738	64.14	PK	44.1	5.3	25	-13.80	50.34	74	-23.66	V
1515.1853	61.70	PK	43.8	5.4	25.9	-12.47	49.24	74	-24.76	H
1515.1853	61.93	PK	43.8	5.4	25.9	-12.47	49.46	74	-24.54	V
1818.2679	57.15	PK	44.4	6.0	27.6	-10.77	46.38	74	-27.62	H
1818.2679	57.57	PK	44.4	6.0	27.6	-10.77	46.81	74	-27.19	V

Mode 2

Frequency	Reading	Detector	Amplifier	Loss	Antenna Factor	Corrected Factor	Corrected Amplitude	FCC Part 15.231/15.209/205		RX
								Limit	Margin	Antenna
(MHz)	(dB μ V/m)	(PK/QP/AV)	(dB)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(H/V)
954.11415	65.19	PK	45.1	4.0	25.1	-16.00	49.19	74	-24.81	H
954.11415	65.77	PK	45.1	4.0	25.1	-16.00	49.77	74	-24.23	V
1272.068	62.95	PK	44.1	5.3	25	-13.80	49.15	74	-24.85	H
1272.068	64.43	PK	44.1	5.3	25	-13.80	50.63	74	-23.37	V
1589.9028	61.36	PK	43.8	5.4	25.9	-12.47	48.89	74	-25.11	H
1589.9028	62.02	PK	43.8	5.4	25.9	-12.47	49.56	74	-24.44	V
1908.028	57.07	PK	44.4	6.0	27.6	-10.77	46.30	74	-27.70	H
1908.028	57.20	PK	44.4	6.0	27.6	-10.77	46.44	74	-27.56	V



Mode 3

Frequency	Reading	Detector	Amplifier	Loss	Antenna Factor	Corrected Factor	Corrected Amplitude	FCC Part 15.231/15.209/205		RX
								Limit	Margin	Antenna
(MHz)	(dB μ V/m)	(PK/QP/AV)	(dB)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(H/V)
1170.2342	64.88	PK	45.1	4.0	25.1	-16.00	48.88	74	-25.12	H
1170.2342	65.50	PK	45.1	4.0	25.1	-16.00	49.50	74	-24.50	V
1560.0272	62.99	PK	44.1	5.3	25	-13.80	49.19	74	-24.81	H
1560.0272	64.53	PK	44.1	5.3	25	-13.80	50.73	74	-23.27	V
1950.1045	61.69	PK	43.8	5.4	25.9	-12.47	49.22	74	-24.78	H
1950.1045	62.18	PK	43.8	5.4	25.9	-12.47	49.72	74	-24.28	V
2340.1835	57.05	PK	44.4	6.0	27.6	-10.77	46.29	74	-27.71	H
2340.1835	57.15	PK	44.4	6.0	27.6	-10.77	46.39	74	-27.61	V

Note:

1. Above 2.6 GHz The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. The peak value is less than the AV limit, so AV data does not need to be tested.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15.231,Subpart C			
Section	Test Item	Limit	Result
15.231(C)	20 Bandwidth& 99% Bandwidth	The 20dB bandwidth&99% Bandwidth of the emissions shall not exceed 0.25% of the center frequency	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RB	1% to 5% of the OBW
VB	≥3RB
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST REQUIREMENTS

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.3 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: 1% to 5% of the OBW, VBW≥3RBW, Sweep time = Auto.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS


TX mode.



5.6 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Mode 1		


Centre Frequency	Measurement		
	20dB Bandwidth (KHz)	Limit(kHz)	Frequency Range (MHz)
303 MHz	8.093	757.5	PASS

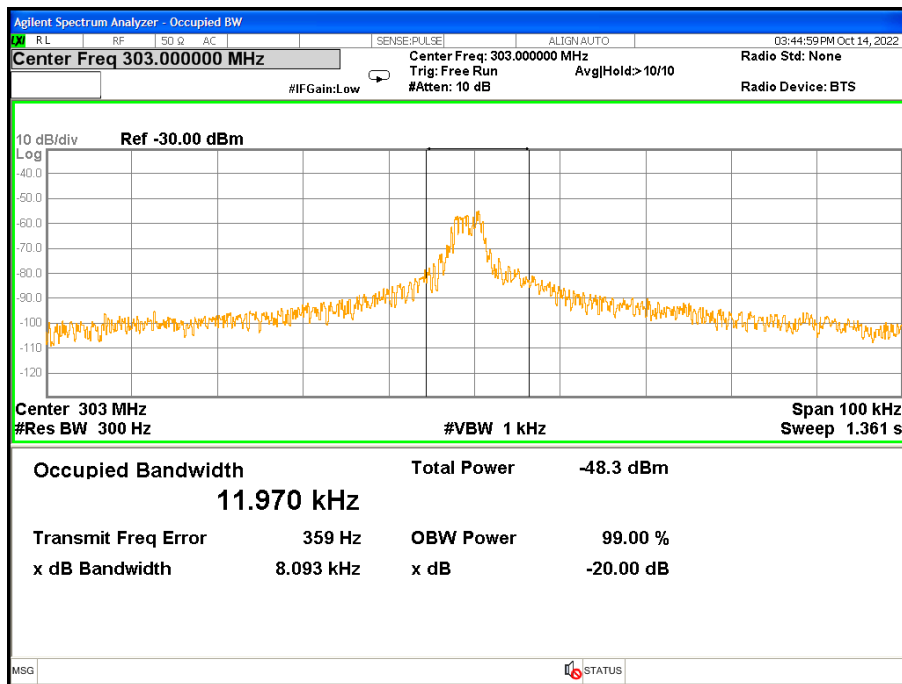



Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Mode 2		


Centre Frequency	Measurement		
	20dB Bandwidth (KHz)	Limit(kHz)	Frequency Range (MHz)
318 MHz	8.127	795	PASS

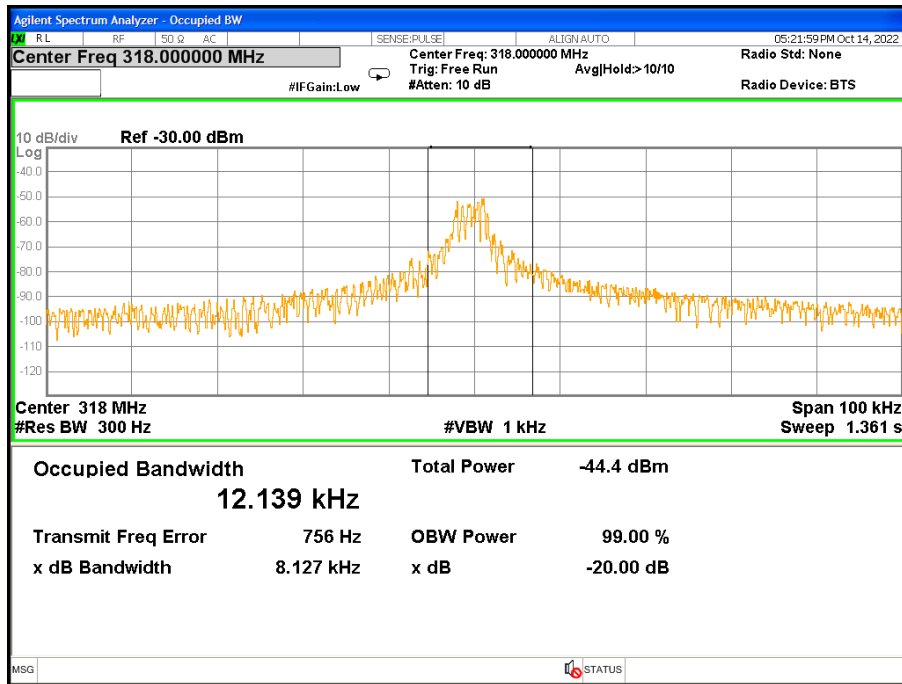



Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Mode 3		

Centre Frequency	Measurement		
	20dB Bandwidth (KHz)	Limit(kHz)	Frequency Range (MHz)
390 MHz	8.149	975	PASS

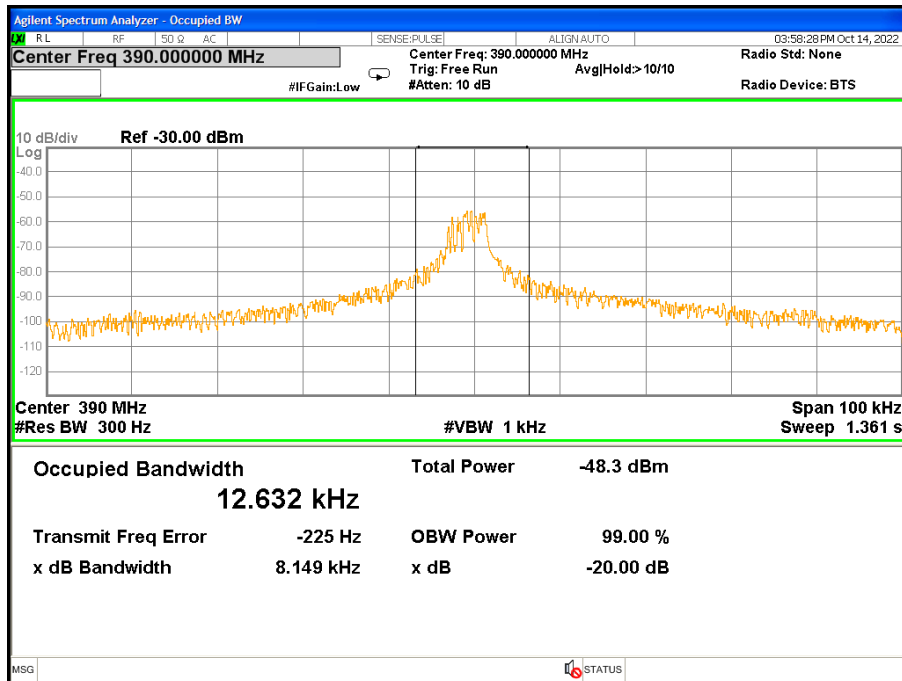

6. TRANSMITTER TIMEOUT

6.1 LIMIT

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the but in no case less than 10 seconds.

6.2 TEST PROCEDURE

- (1) Put the EUT on the support in its standard position with associated equipment and switched on.
- (2) Set center frequency of spectrum analyzer = operating frequency.
- (3) Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz, Adjust Sweep=Auto.
- (4) record the duration time

6.3 TEST SETUP





6.4 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	53%
Test Mode:	Mode 1		

Frequency(MHz)	Each transmission time(s)	silent period between transmissions(s)
303	0.14	10.06
Limit	<1s	>10s and > 30*(duration of transmission)
Result	Pass	



7. PERIODIC OPERATION

7.1 TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

The Duty Cycle Was Determined By The Following Equation: To Calculate The Actual Field Intensity,The Duty Cycle Correction Factor In Decibel Is Needed For Later Use And Can Be Obtained From Following Conversion

Duty Cycle(%)=Total On Interval In A Complete Pulse Train/ Length Of A Complete Pulse Train * %

Duty Cycle Correction Factor(dB)=20 * Log10(Duty Cycle(%))

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

TX mode.



7.4 TEST RESULTS

Mode 1

FCC Part15.231(e)	
Total On interval in a complete pulse train(ms)	21.97
Length of a complete pulse train(ms)	100
Duty Cycle(%)	21.97%
Duty Cycle Correction Factor(dB)	13.16


Refer to the duty cycle plot (as below), This device meets the FCC requirement. Length of a complete pulse train


Remark:FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Note: Number of pulse train 1 = 48, Time of single pulse train 1 = 0.21ms;

Number of pulse train 2 = 29, Time of single pulse train 2 = 0.41ms;

Total on interval in a complete pulse train= Number of pulse train 1x Time of single pulse train 1+ Number of pluse train 2x Time of single pulse train 2=48x0.21+29 x0.41=21.97ms

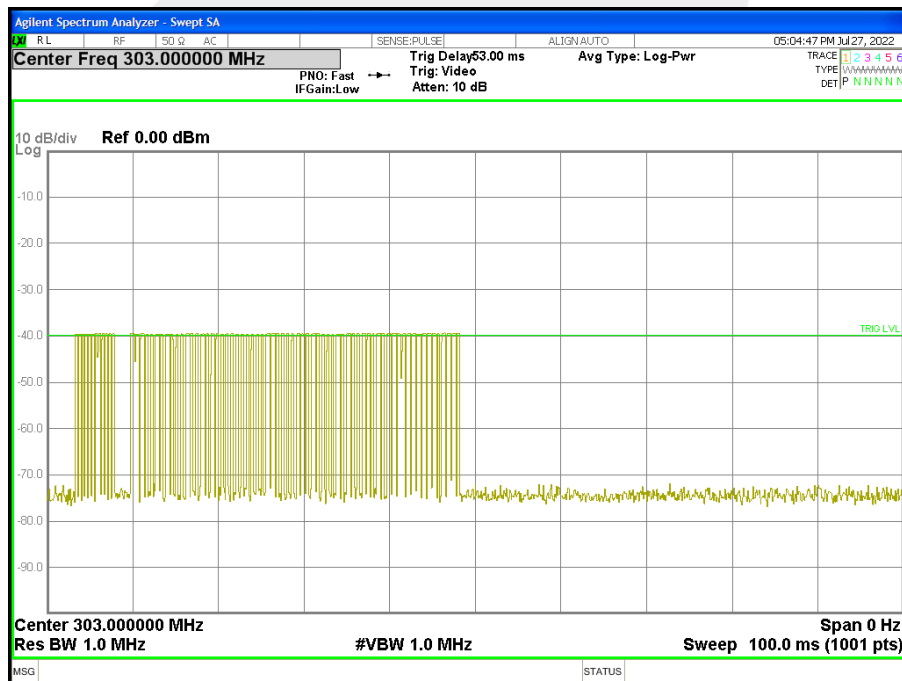

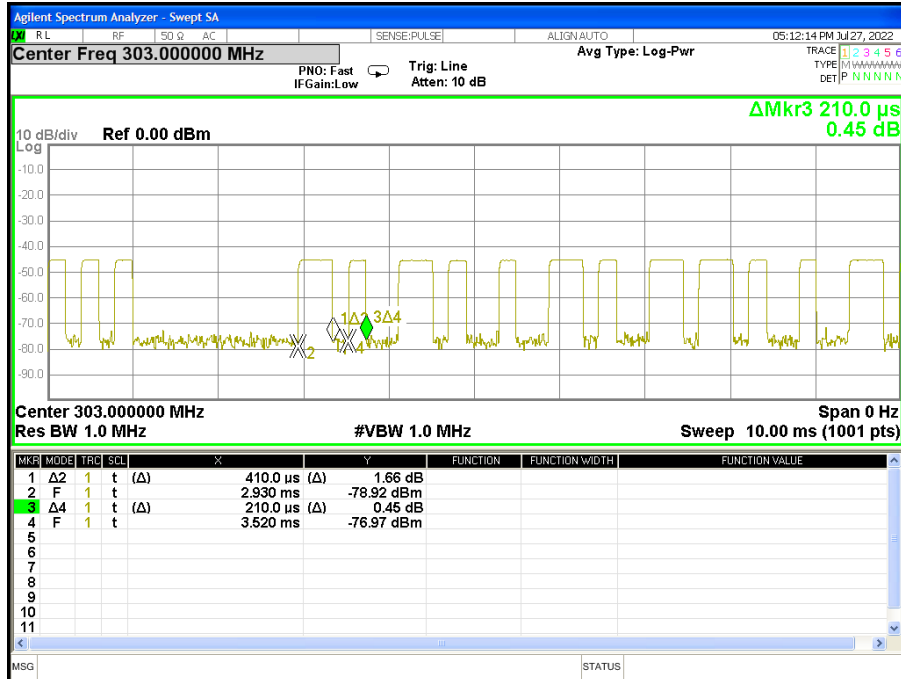



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent ceramic printed antenna, fulfill the requirement of this section

8.2 EUT ANTENNA

The EUT antenna is PCB antenna.It conforms to the standard requirements.





APPENDIX 1-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****

