


|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.1699</b> | <b>0.7931</b> | <b>0.4818</b> | <b>0.2962</b> | <b>0.1849</b> | <b>0.1126</b> | <b>0.0737</b> |

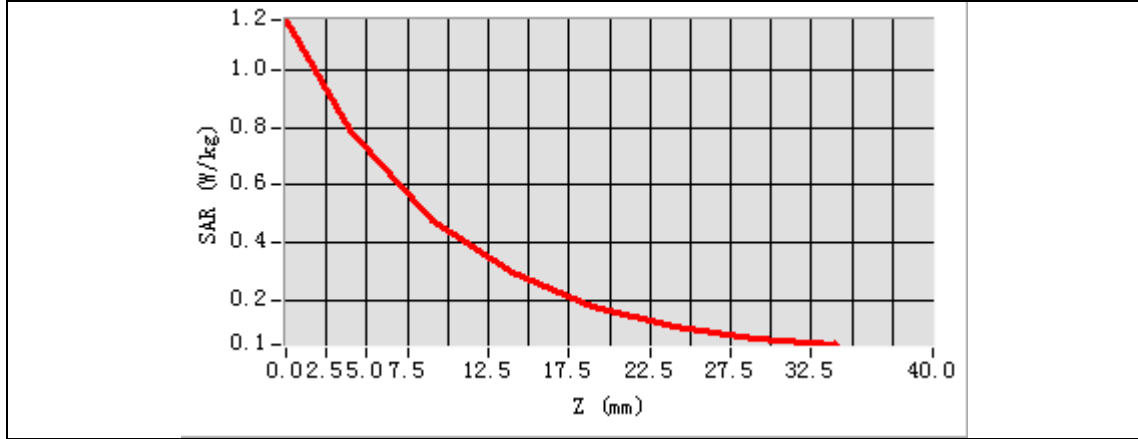

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

# MEASUREMENT 6


Date of measurement: 22/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>Band2_WCDMA1900</u>             |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>2.63</u>                        |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.828300   |
| <b>Relative permittivity (imaginary part)</b> | 13.629750   |
| <b>Conductivity (S/m)</b>                     | 1.423552    |
| <b>Variation (%)</b>                          | -0.220000   |

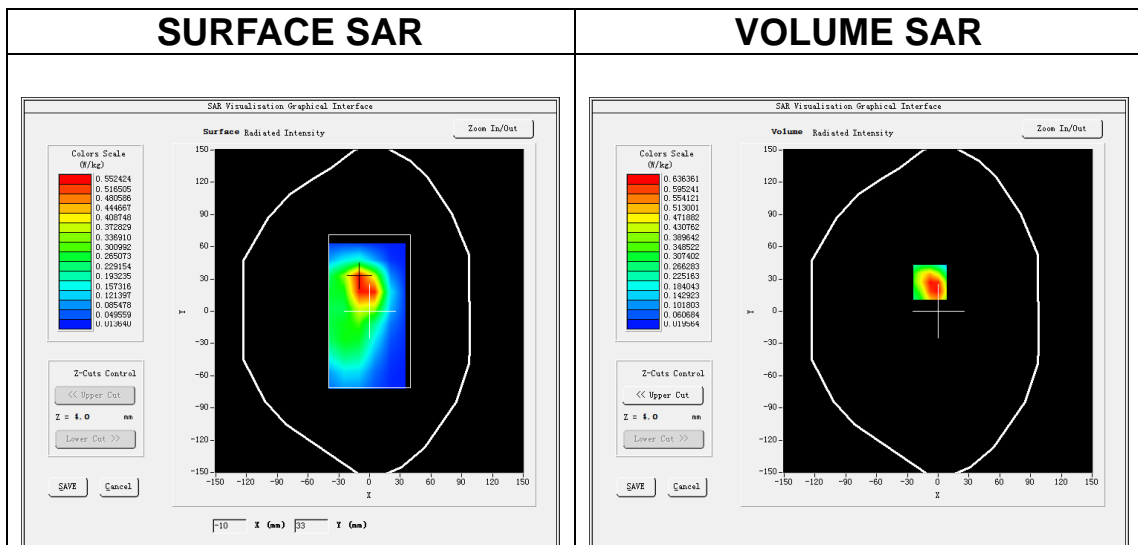

**Maximum location: X=-8.00, Y=27.00**  
**SAR Peak: 1.08 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.333903 |
| <b>SAR 1g (W/Kg)</b>  | 0.637716 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.1871</b> | <b>0.6364</b> | <b>0.2691</b> | <b>0.1979</b> | <b>0.0967</b> | <b>0.0680</b> | <b>0.0401</b> |

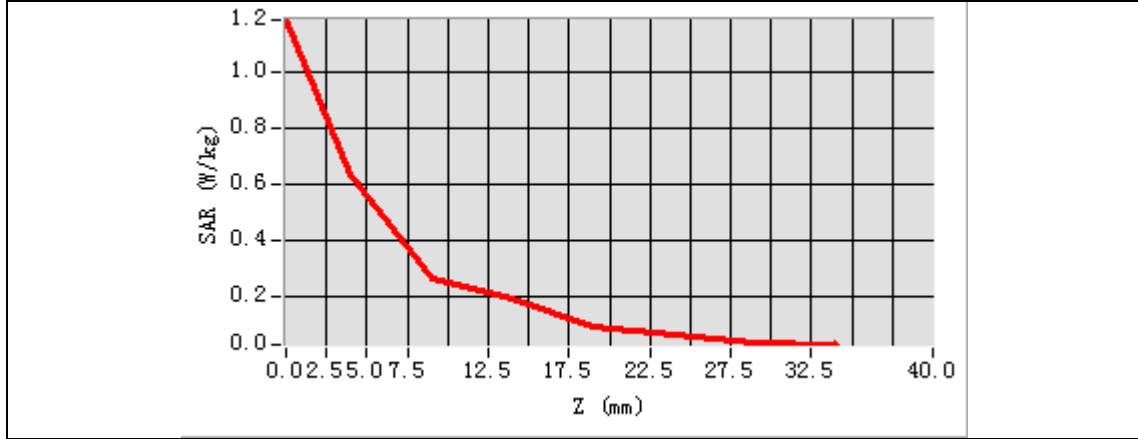

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

# MEASUREMENT 7


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>Band4_WCDMA1700</u>             |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>2.45</u>                        |



## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1732.600000 |
| <b>Relative permittivity (real part)</b>      | 39.508583   |
| <b>Relative permittivity (imaginary part)</b> | 13.753805   |
| <b>Conductivity (S/m)</b>                     | 1.323422    |
| <b>Variation (%)</b>                          | -0.270000   |

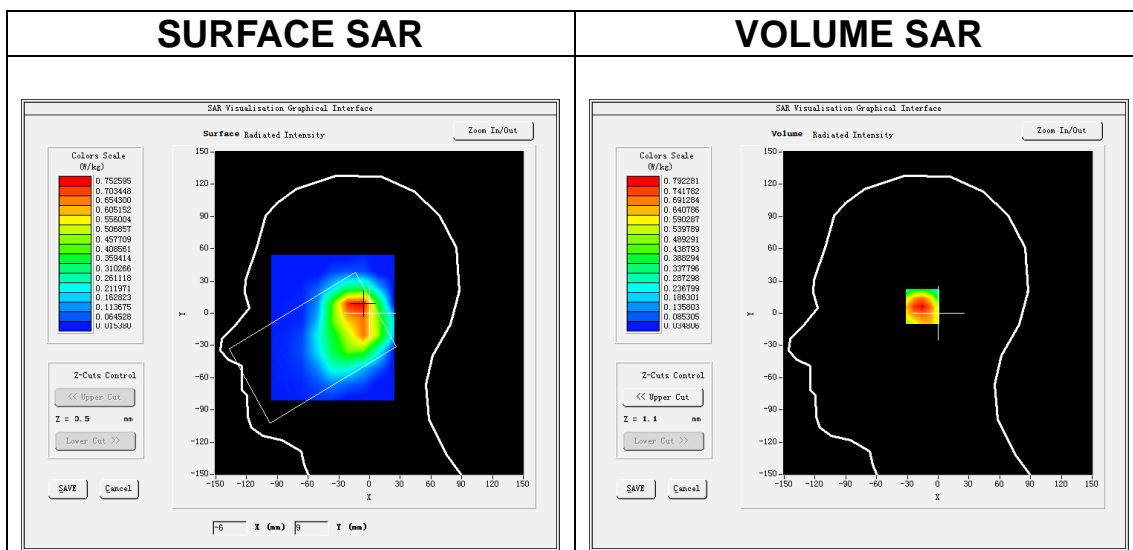

**Maximum location: X=-11.00, Y=6.00**  
**SAR Peak: 1.13 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.463028 |
| <b>SAR 1g (W/Kg)</b>  | 0.760190 |

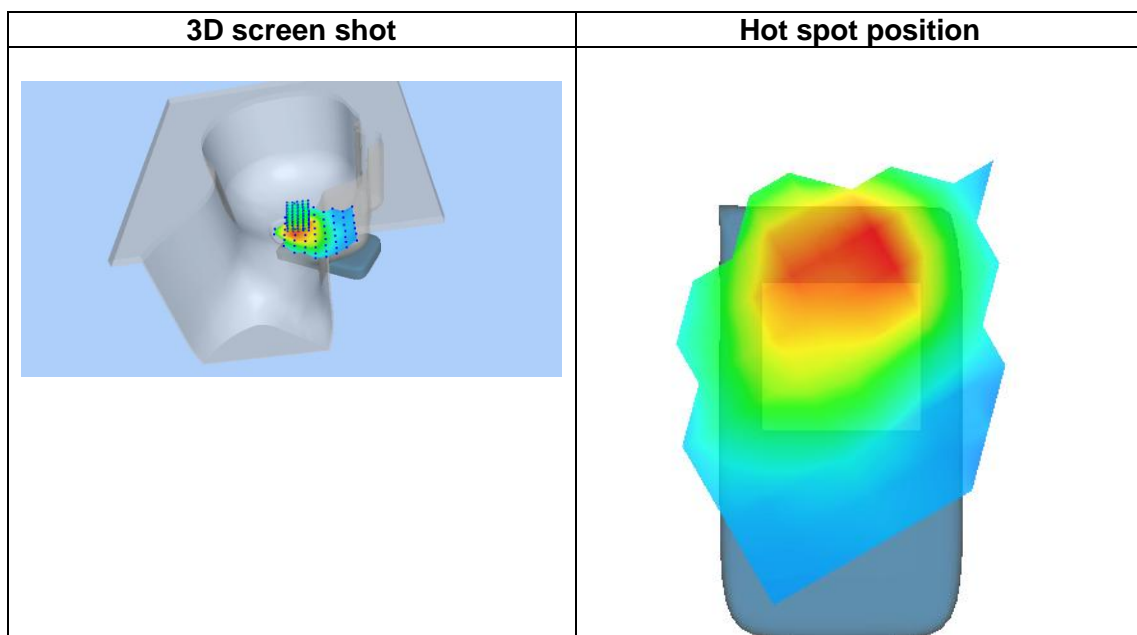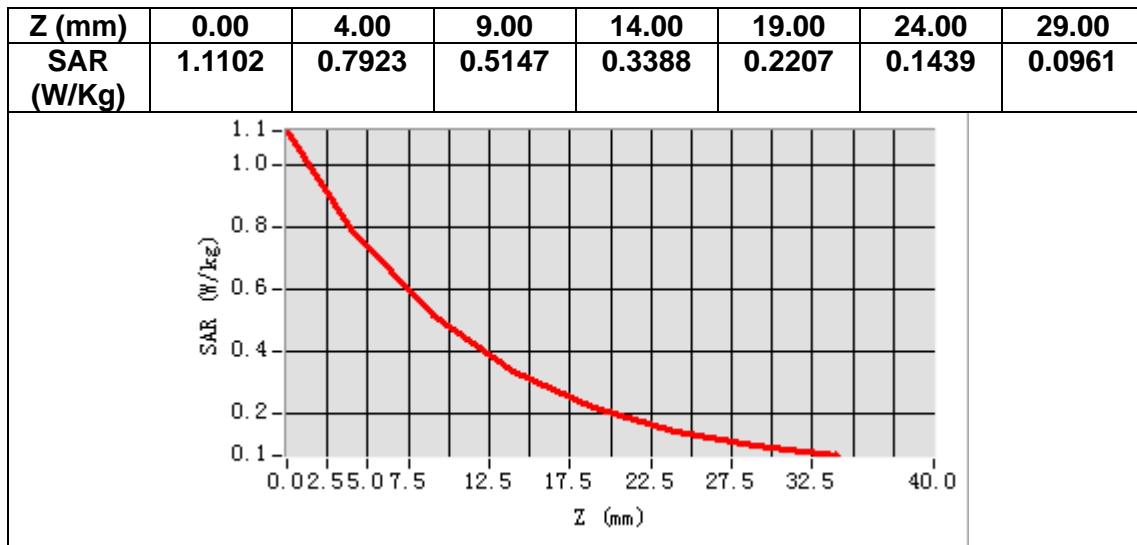

# MEASUREMENT 8


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>Band4_WCDMA1700</u>             |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>2.45</u>                        |



## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1732.600000 |
| <b>Relative permittivity (real part)</b>      | 39.508583   |
| <b>Relative permittivity (imaginary part)</b> | 13.753805   |
| <b>Conductivity (S/m)</b>                     | 1.323422    |
| <b>Variation (%)</b>                          | -2.240000   |

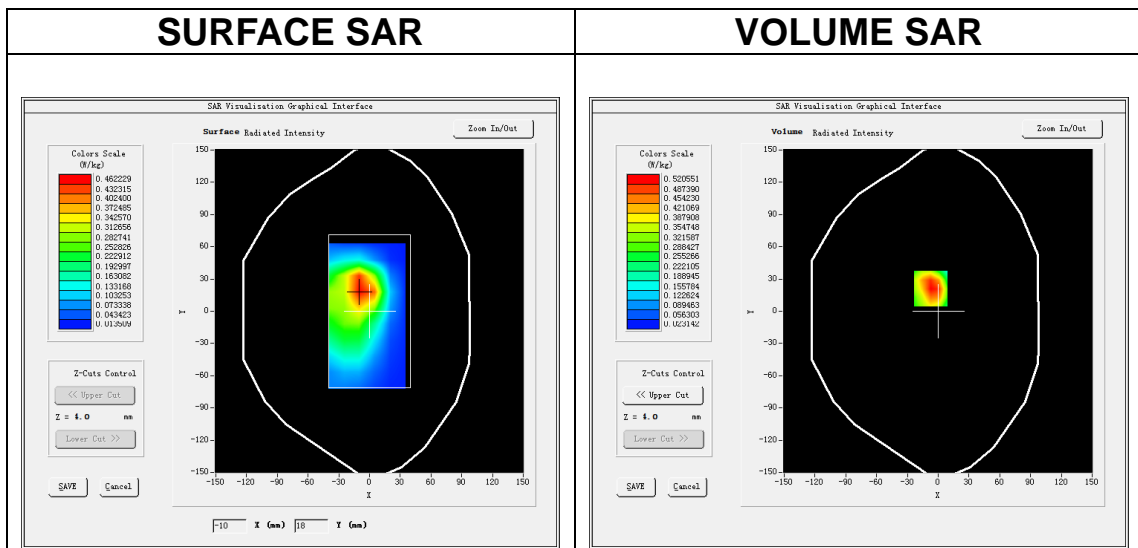

**Maximum location: X=-7.00, Y=21.00**  
**SAR Peak: 0.84 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.280195 |
| <b>SAR 1g (W/Kg)</b>  | 0.506498 |

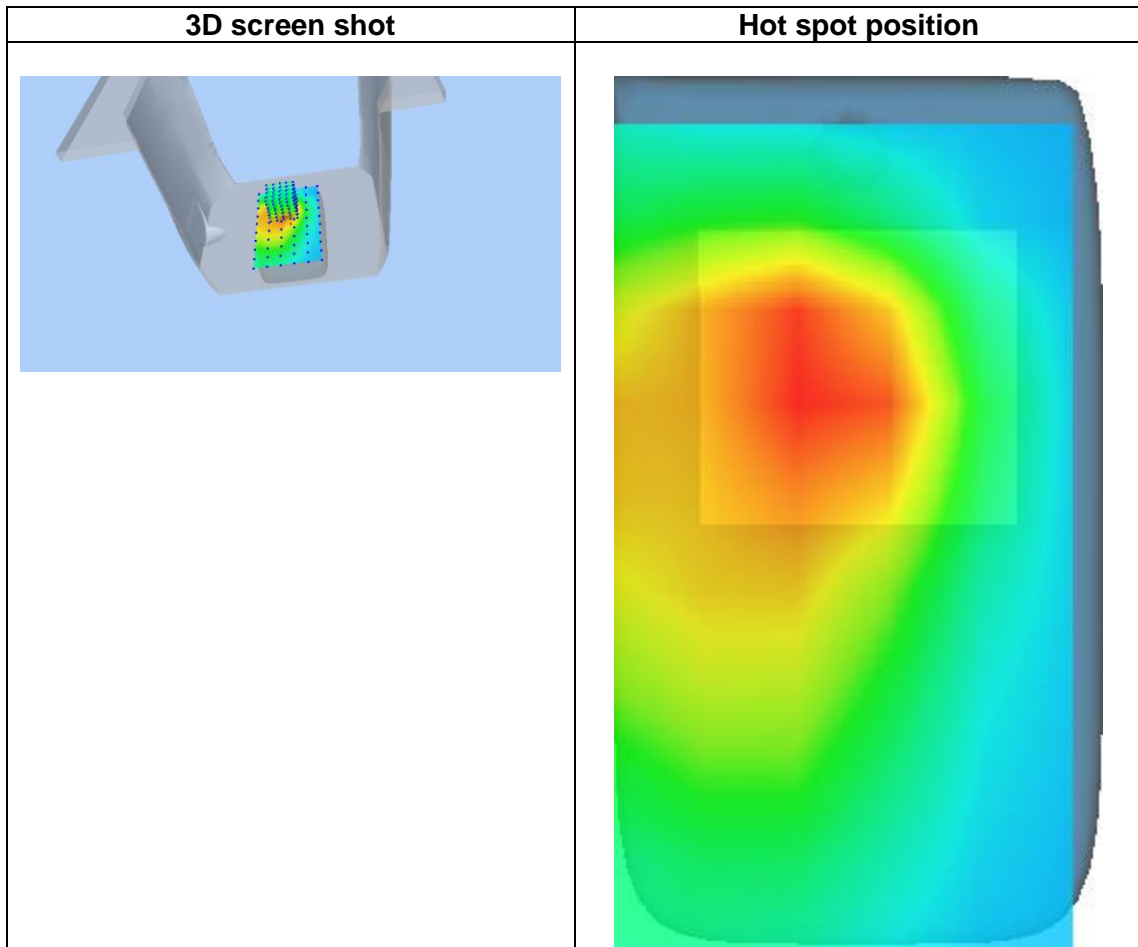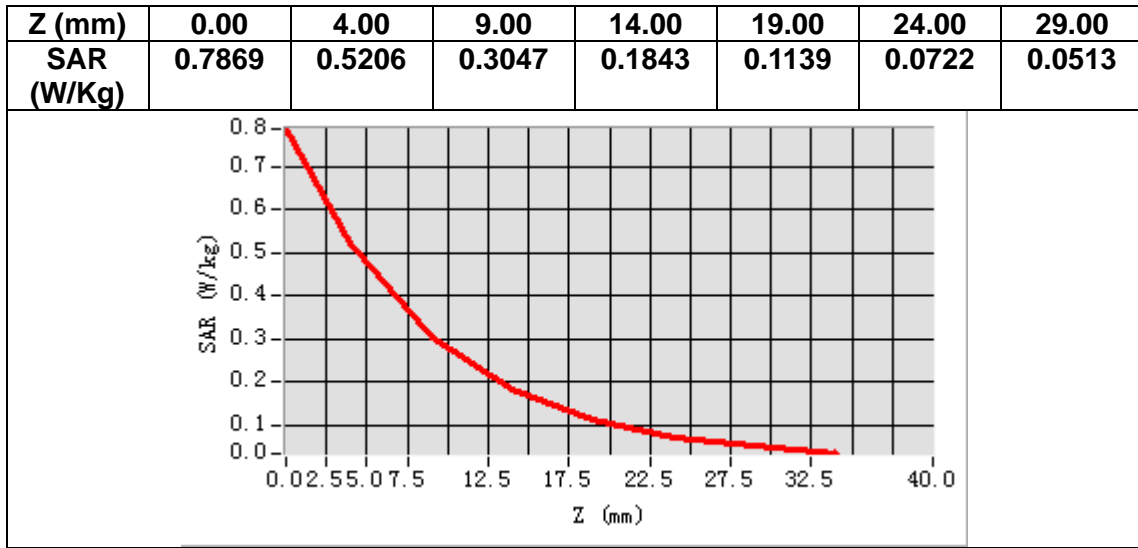

# MEASUREMENT 9


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>Band5_WCDMA850</u>              |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>2.32</u>                        |

## B. SAR Measurement Results



|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 836.400000 |
| <b>Relative permittivity (real part)</b>      | 41.154320  |
| <b>Relative permittivity (imaginary part)</b> | 19.199738  |
| <b>Conductivity (S/m)</b>                     | 0.892148   |
| <b>Variation (%)</b>                          | 2.990000   |

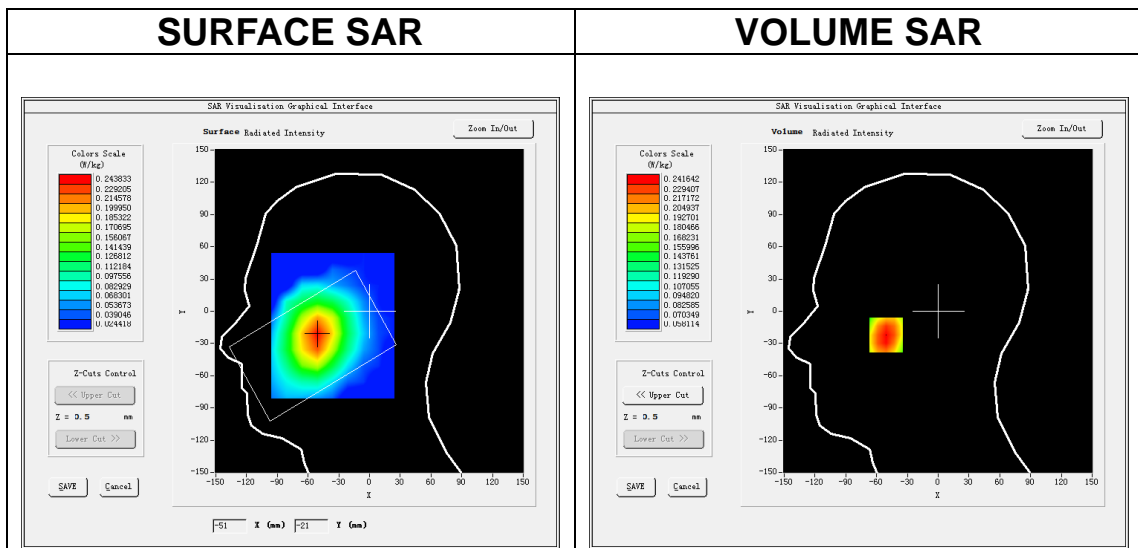

**Maximum location: X=-51.00, Y=-22.00**  
**SAR Peak: 0.29 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.181608 |
| <b>SAR 1g (W/Kg)</b>  | 0.234955 |



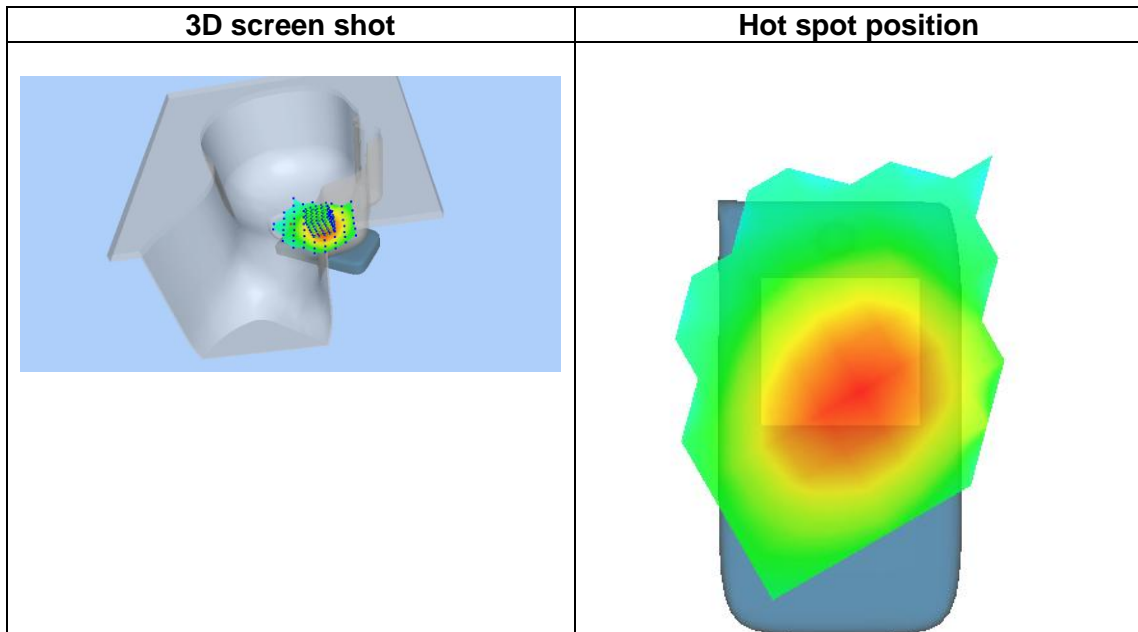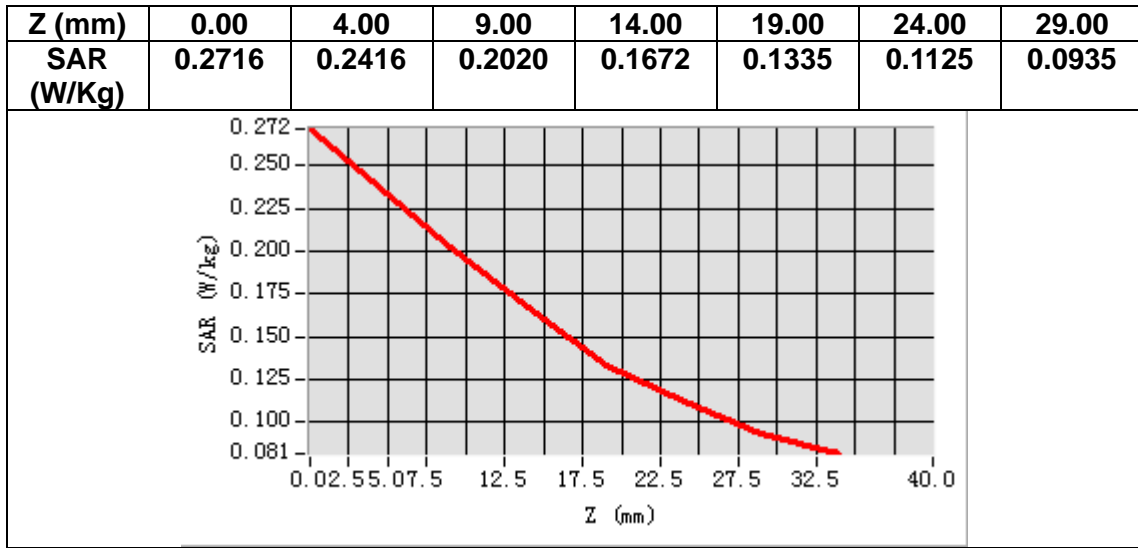

# MEASUREMENT 10


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>Band5_WCDMA850</u>              |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>2.32</u>                        |



## B. SAR Measurement Results

|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 836.400000 |
| <b>Relative permittivity (real part)</b>      | 41.154320  |
| <b>Relative permittivity (imaginary part)</b> | 19.199738  |
| <b>Conductivity (S/m)</b>                     | 0.892148   |
| <b>Variation (%)</b>                          | 0.960000   |

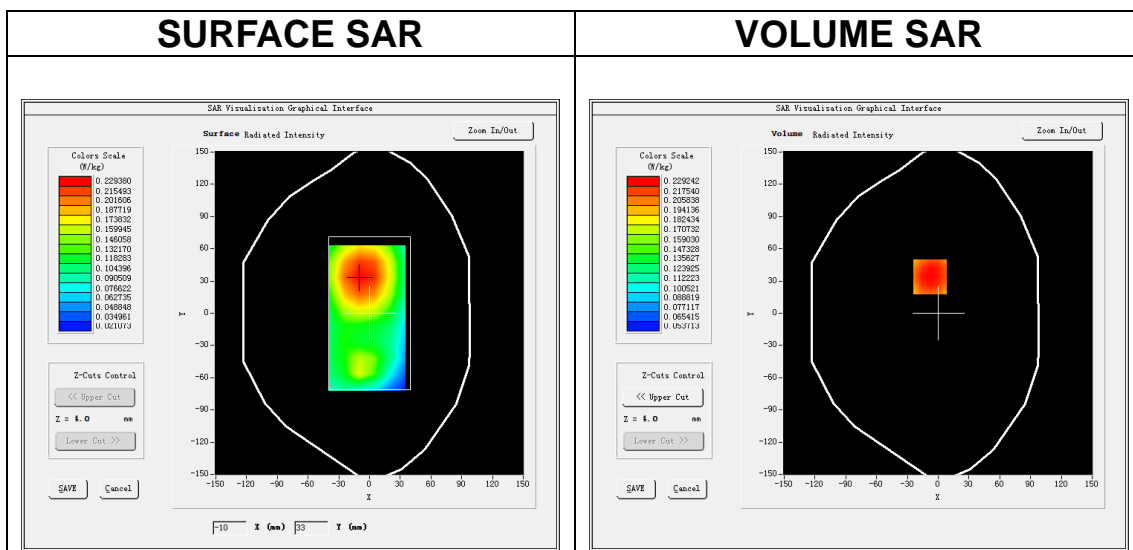

**Maximum location: X=-8.00, Y=34.00**  
**SAR Peak: 0.29 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.171797 |
| <b>SAR 1g (W/Kg)</b>  | 0.224710 |

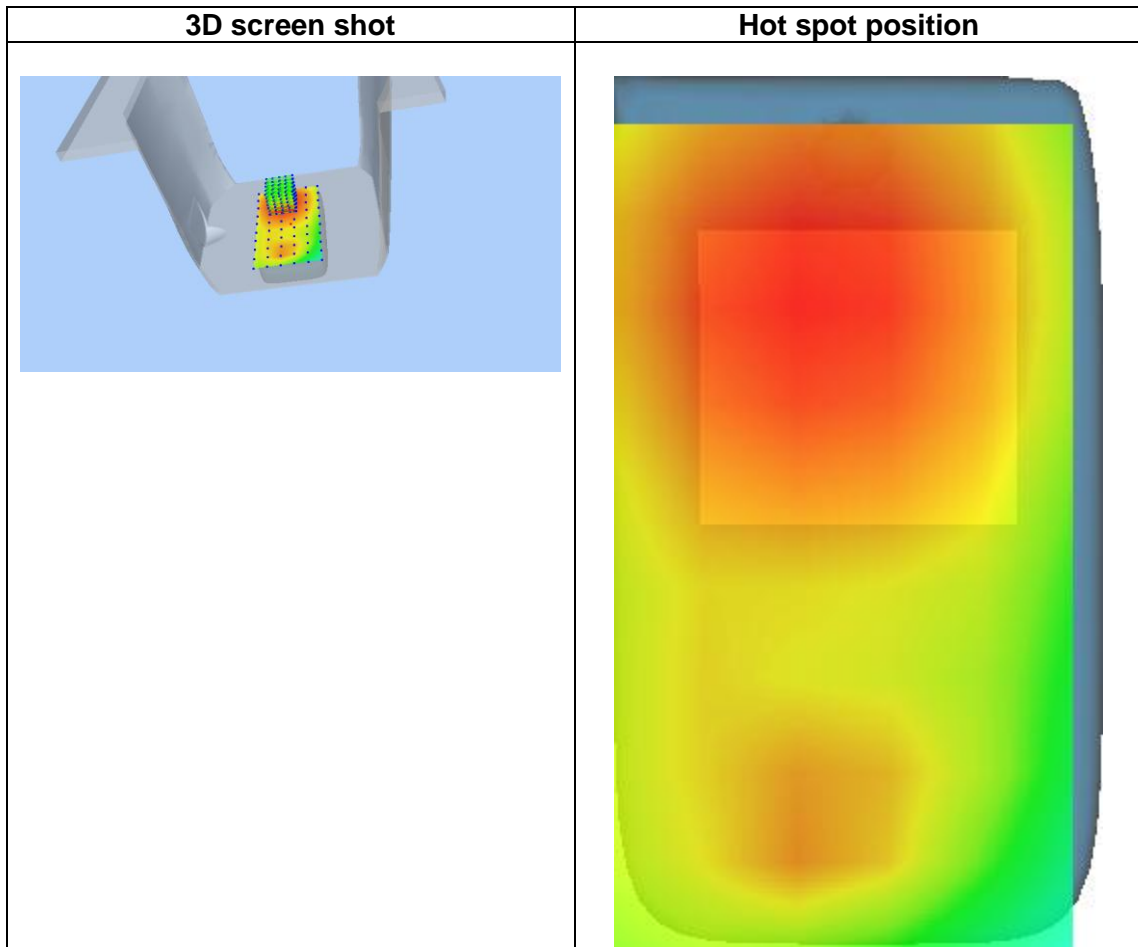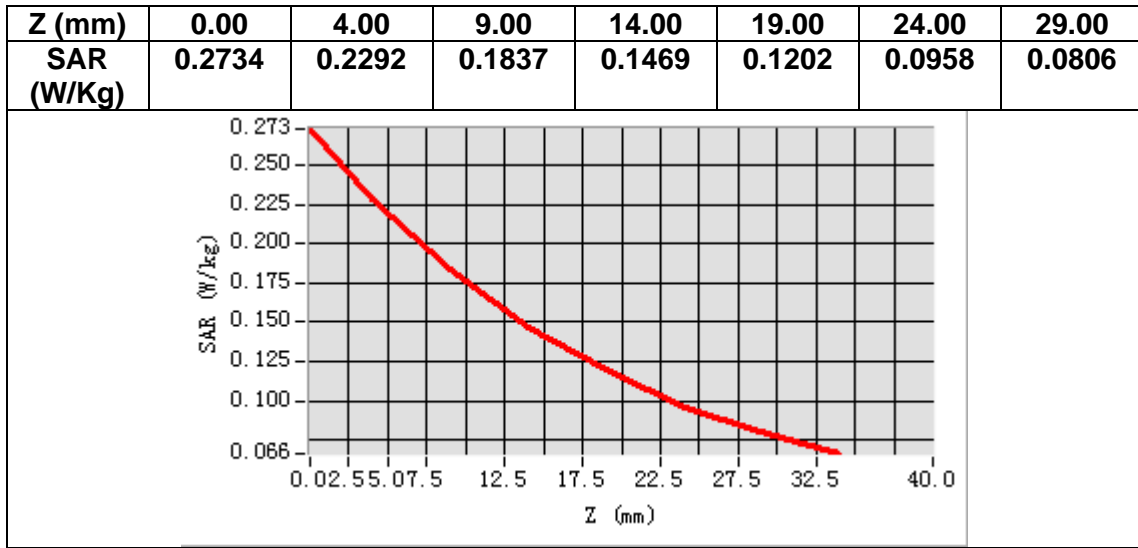

# MEASUREMENT 11


Date of measurement: 26/3/2024

## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <b>Area Scan</b>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u>     |
| <b>Phantom</b>         | <u>Left head</u>                       |
| <b>Device Position</b> | <u>Cheek</u>                           |
| <b>Band</b>            | <u>IEEE 802.11a U-NII</u>              |
| <b>Channels</b>        | <u>High</u>                            |
| <b>Signal</b>          | <u>IEEE802.11a (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>2.07</u>                            |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 5240.000000 |
| <b>Relative permittivity (real part)</b>      | 34.471382   |
| <b>Relative permittivity (imaginary part)</b> | 15.619897   |
| <b>Conductivity (S/m)</b>                     | 4.547126    |
| <b>Variation (%)</b>                          | -3.020000   |

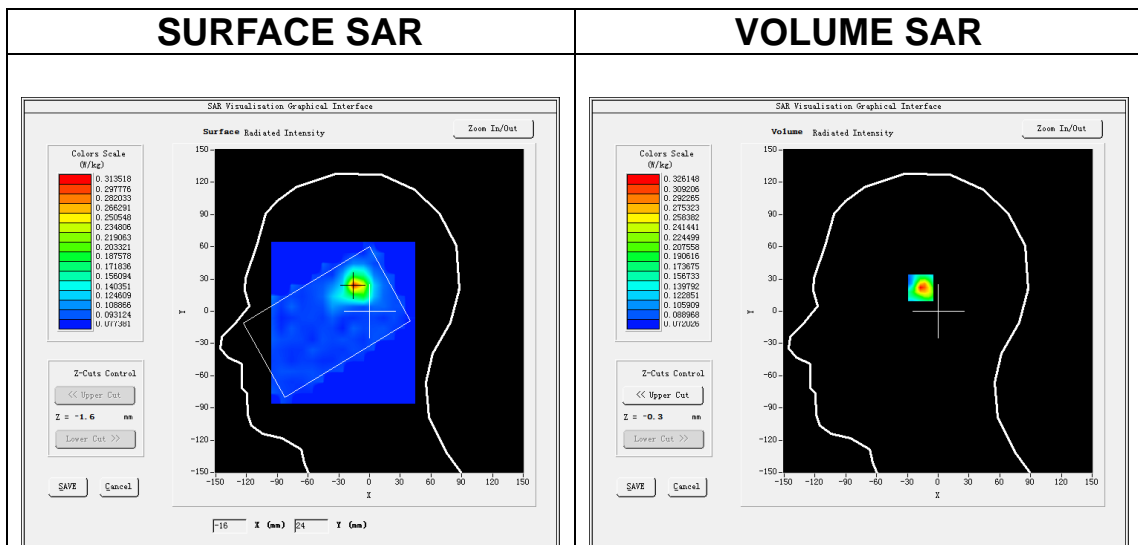

**Maximum location: X=-15.00, Y=24.00**  
**SAR Peak: 0.77 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.151810 |
| <b>SAR 1g (W/Kg)</b>  | 0.308206 |

|                                 |             |             |             |             |             |             |             |             |             |             |             |             |
|---------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Z<br/>(m<br/>m)</b>          | <b>0.00</b> | <b>2.00</b> | <b>4.00</b> | <b>6.00</b> | <b>8.00</b> | <b>10.0</b> | <b>12.0</b> | <b>14.0</b> | <b>16.0</b> | <b>18.0</b> | <b>20.0</b> | <b>22.0</b> |
| <b>SA<br/>R<br/>(W/<br/>Kg)</b> | <b>0.50</b> | <b>0.32</b> | <b>0.18</b> | <b>0.13</b> | <b>0.10</b> | <b>0.09</b> | <b>0.09</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> | <b>0.07</b> | <b>0.08</b> |
|                                 | <b>56</b>   | <b>61</b>   | <b>69</b>   | <b>54</b>   | <b>86</b>   | <b>52</b>   | <b>15</b>   | <b>55</b>   | <b>22</b>   | <b>90</b>   | <b>99</b>   | <b>86</b>   |

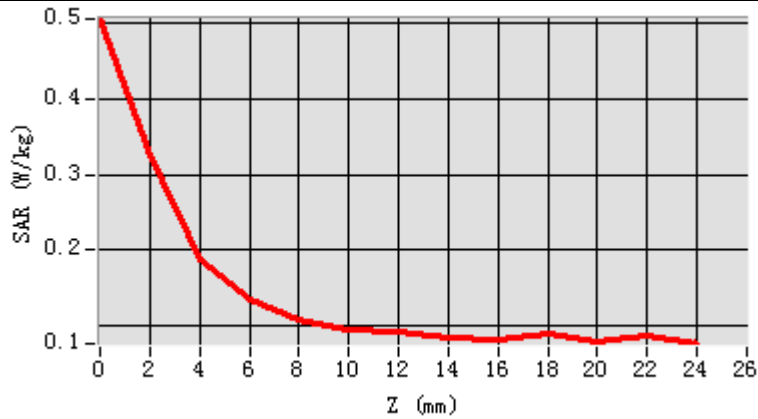

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

# MEASUREMENT 12


Date of measurement: 27/3/2024

## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <b>Area Scan</b>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u>     |
| <b>Phantom</b>         | <u>Left head</u>                       |
| <b>Device Position</b> | <u>Cheek</u>                           |
| <b>Band</b>            | <u>IEEE 802.11a U-NII</u>              |
| <b>Channels</b>        | <u>High</u>                            |
| <b>Signal</b>          | <u>IEEE802.11a (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>2.04</u>                            |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 5825.000000 |
| <b>Relative permittivity (real part)</b>      | 33.990967   |
| <b>Relative permittivity (imaginary part)</b> | 16.113672   |
| <b>Conductivity (S/m)</b>                     | 5.214563    |
| <b>Variation (%)</b>                          | 0.660000    |

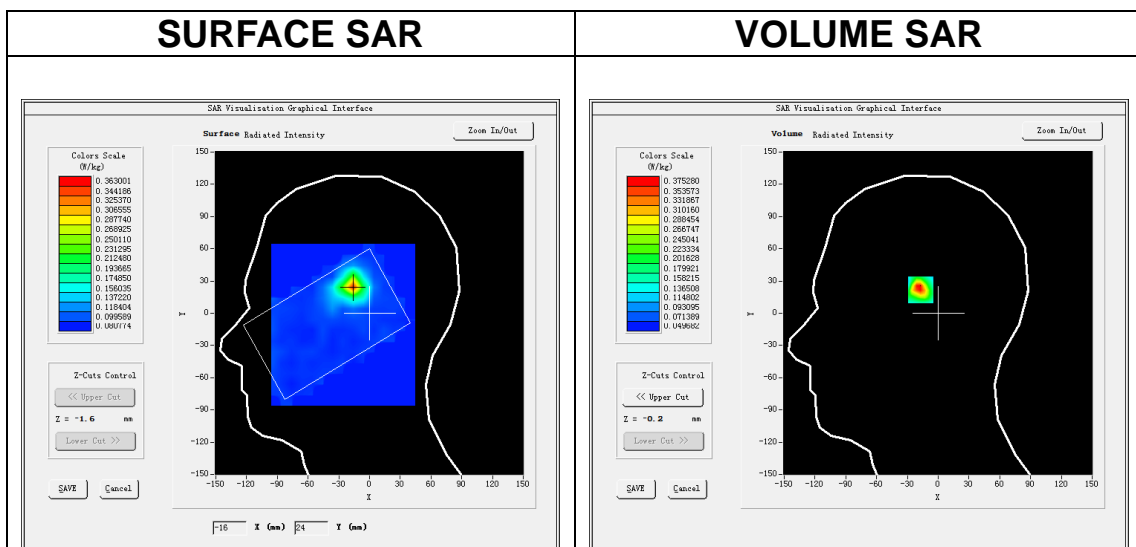

**Maximum location: X=-16.00, Y=25.00**  
**SAR Peak: 0.97 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.170249 |
| <b>SAR 1g (W/Kg)</b>  | 0.362486 |

|                   |               |               |               |               |               |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (m m)</b>    | <b>0.00</b>   | <b>2.00</b>   | <b>4.00</b>   | <b>6.00</b>   | <b>8.00</b>   | <b>10.0</b>   | <b>12.0</b>   | <b>14.0</b>   | <b>16.0</b>   | <b>18.0</b>   | <b>20.0</b>   | <b>22.0</b>   |
| <b>SAR (W/Kg)</b> | <b>0.6061</b> | <b>0.3753</b> | <b>0.1765</b> | <b>0.1393</b> | <b>0.1080</b> | <b>0.1003</b> | <b>0.0867</b> | <b>0.0876</b> | <b>0.0904</b> | <b>0.0880</b> | <b>0.0883</b> | <b>0.0923</b> |

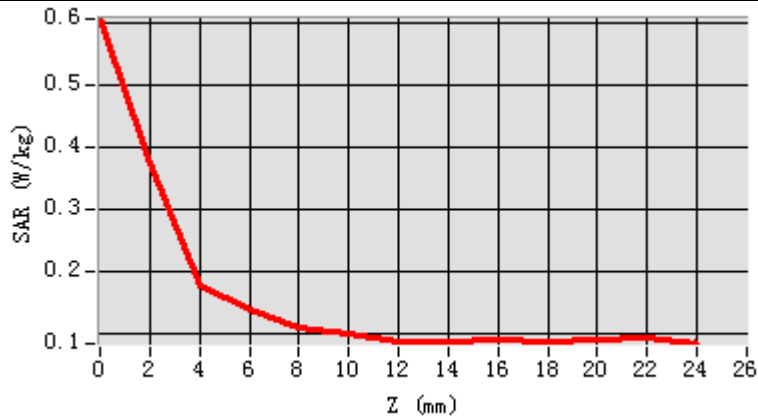

|                       |                          |
|-----------------------|--------------------------|
| <b>3D screen shot</b> | <b>Hot spot position</b> |
|                       |                          |

# MEASUREMENT 13


Date of measurement: 26/3/2024

## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <b>Area Scan</b>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u>     |
| <b>Phantom</b>         | <u>Validation plane</u>                |
| <b>Device Position</b> | <u>Body</u>                            |
| <b>Band</b>            | <u>IEEE 802.11a U-NII</u>              |
| <b>Channels</b>        | <u>High</u>                            |
| <b>Signal</b>          | <u>IEEE802.11a (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>2.07</u>                            |

## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 5240.000000 |
| <b>Relative permittivity (real part)</b>      | 34.471382   |
| <b>Relative permittivity (imaginary part)</b> | 15.619897   |
| <b>Conductivity (S/m)</b>                     | 4.547126    |
| <b>Variation (%)</b>                          | 3.640000    |

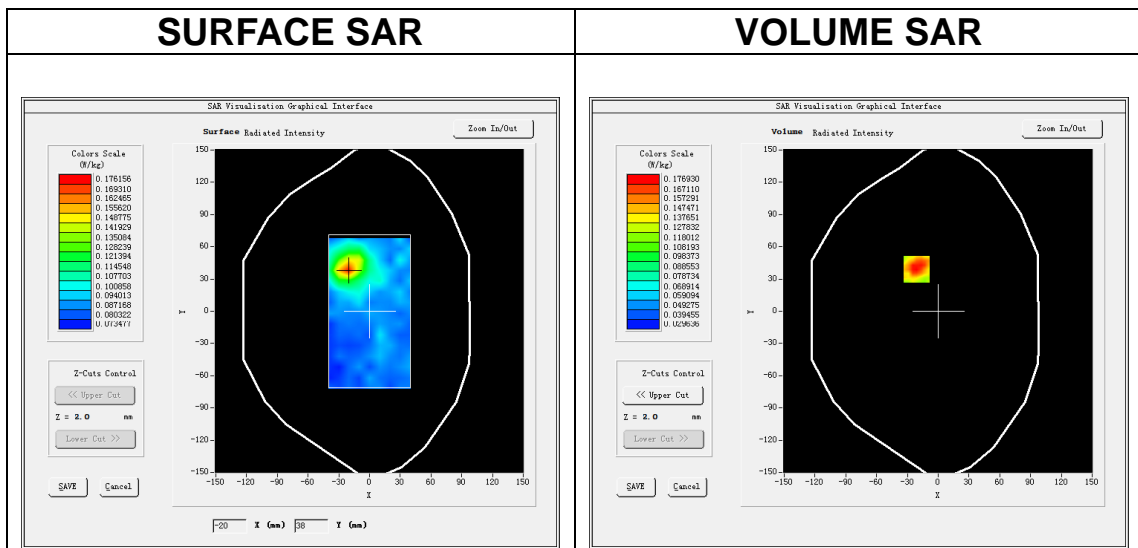




**Maximum location: X=-21.00, Y=39.00**  
**SAR Peak: 0.28 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.106052 |
| <b>SAR 1g (W/Kg)</b>  | 0.133720 |



|                                  |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |
|----------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| <b>Z<br/>(m<br/>m)</b>           | <b>0.00</b>        | <b>2.00</b>        | <b>4.00</b>        | <b>6.00</b>        | <b>8.00</b>        | <b>10.0</b>        | <b>12.0</b>        | <b>14.0</b>        | <b>16.0</b>        | <b>18.0</b>        | <b>20.0</b>        | <b>22.0</b>        |
| <b>SAR<br/>R<br/>(W/<br/>Kg)</b> | <b>0.24<br/>14</b> | <b>0.17<br/>69</b> | <b>0.12<br/>57</b> | <b>0.10<br/>19</b> | <b>0.09<br/>55</b> | <b>0.09<br/>12</b> | <b>0.09<br/>32</b> | <b>0.08<br/>65</b> | <b>0.08<br/>05</b> | <b>0.08<br/>29</b> | <b>0.08<br/>54</b> | <b>0.09<br/>65</b> |

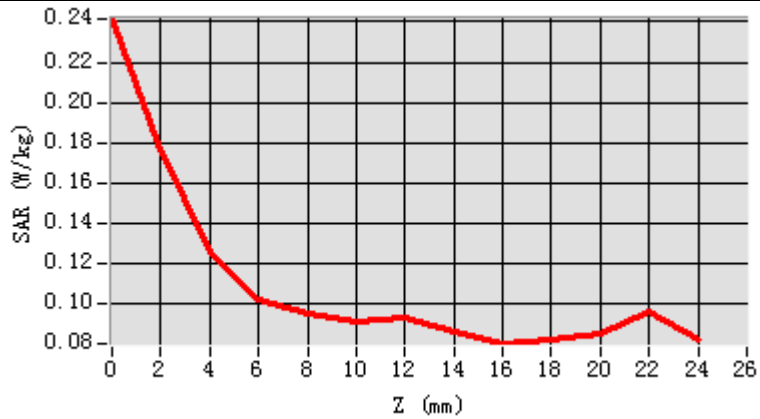
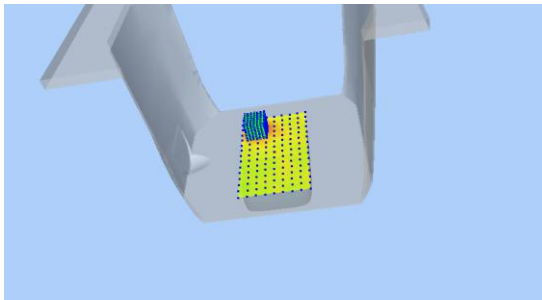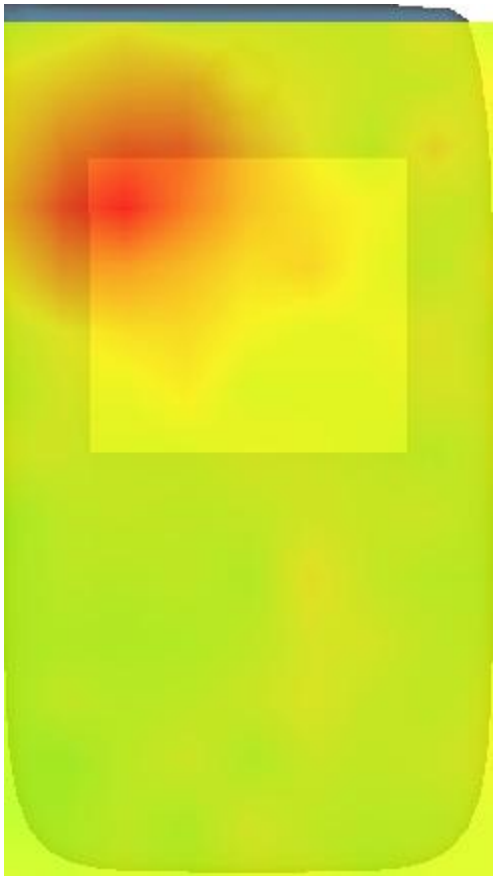
|  |  |
|--|--|
| <p style="text-align: center;"><b>3D screen shot</b></p>  | <p style="text-align: center;"><b>Hot spot position</b></p>  |
|--|--|

# MEASUREMENT 14


Date of measurement: 27/3/2024

## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <b>Area Scan</b>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u>     |
| <b>Phantom</b>         | <u>Validation plane</u>                |
| <b>Device Position</b> | <u>Body</u>                            |
| <b>Band</b>            | <u>IEEE 802.11a U-NII</u>              |
| <b>Channels</b>        | <u>High</u>                            |
| <b>Signal</b>          | <u>IEEE802.11a (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>2.04</u>                            |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 5825.000000 |
| <b>Relative permittivity (real part)</b>      | 33.990967   |
| <b>Relative permittivity (imaginary part)</b> | 16.113672   |
| <b>Conductivity (S/m)</b>                     | 5.214563    |
| <b>Variation (%)</b>                          | -0.320000   |

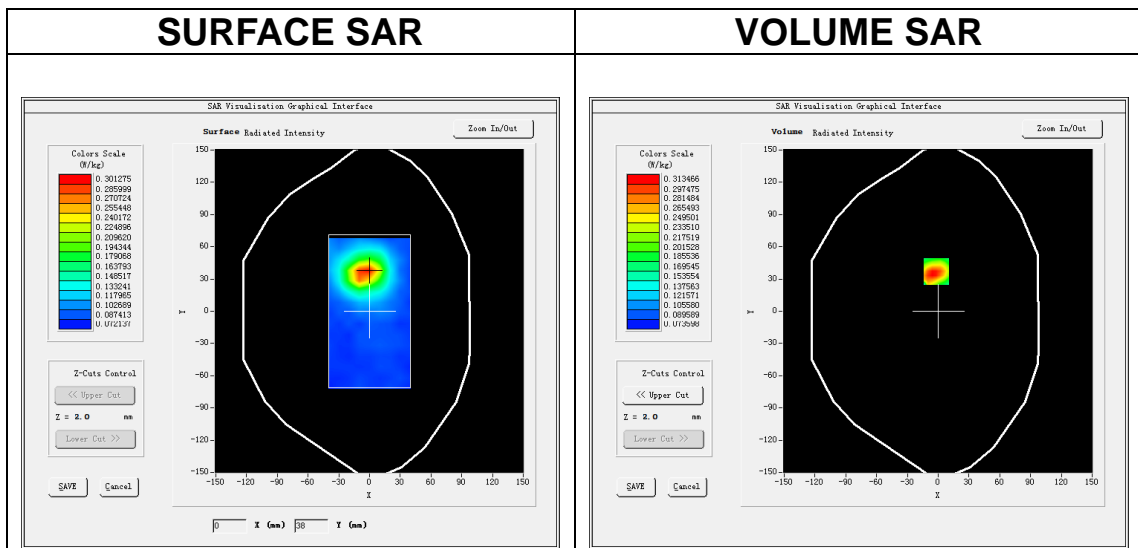


**Maximum location: X=-2.00, Y=37.00**  
**SAR Peak: 0.54 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.131982 |
| <b>SAR 1g (W/Kg)</b>  | 0.214777 |


|                                  |             |             |             |             |             |             |             |             |             |             |             |             |
|----------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Z<br/>(m<br/>m)</b>           | <b>0.00</b> | <b>2.00</b> | <b>4.00</b> | <b>6.00</b> | <b>8.00</b> | <b>10.0</b> | <b>12.0</b> | <b>14.0</b> | <b>16.0</b> | <b>18.0</b> | <b>20.0</b> | <b>22.0</b> |
| <b>SAR<br/>R<br/>(W/<br/>Kg)</b> | <b>0.50</b> | <b>0.31</b> | <b>0.17</b> | <b>0.12</b> | <b>0.09</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> | <b>0.08</b> |
|                                  | <b>27</b>   | <b>35</b>   | <b>08</b>   | <b>29</b>   | <b>42</b>   | <b>56</b>   | <b>26</b>   | <b>41</b>   | <b>03</b>   | <b>04</b>   | <b>07</b>   | <b>15</b>   |

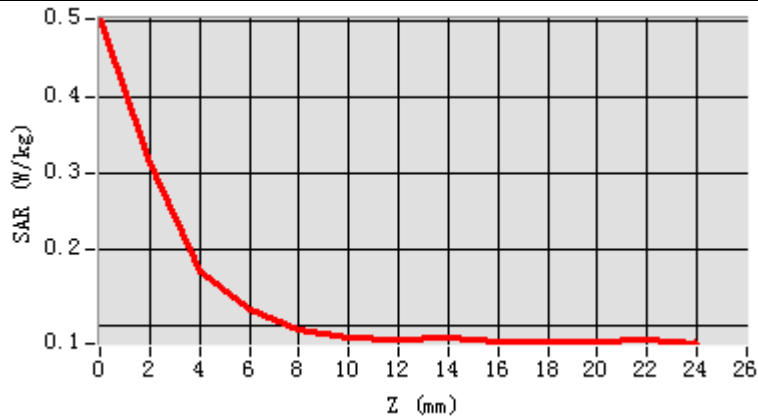

**3D screen shot**

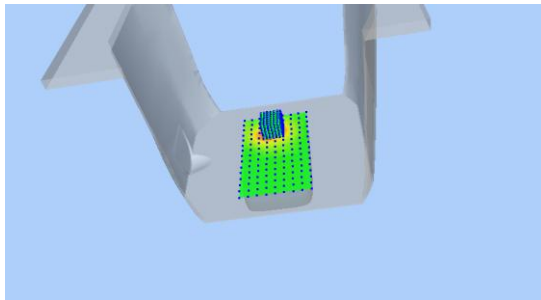

**Hot spot position**

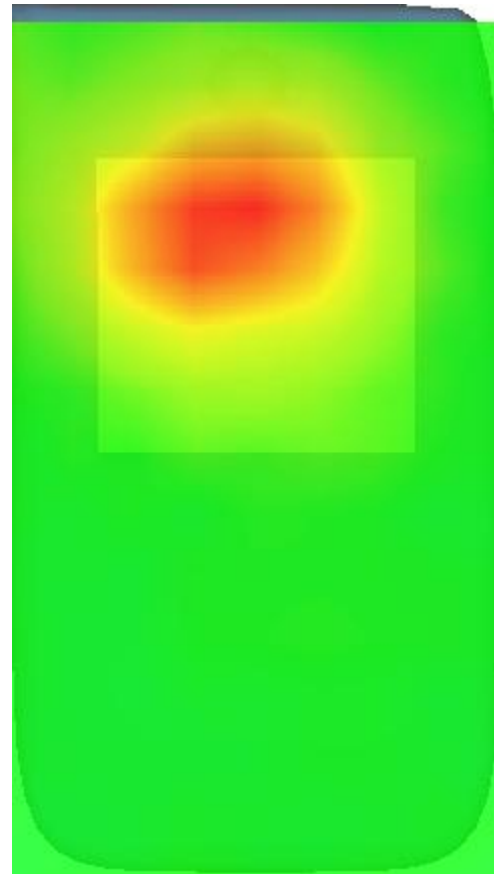

# MEASUREMENT 15

Date of measurement: 24/3/2024


## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <u>Area Scan</u>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u>     |
| <u>ZoomScan</u>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>      |
| <u>Phantom</u>         | <u>Left head</u>                       |
| <u>Device Position</u> | <u>Cheek</u>                           |
| <u>Band</u>            | <u>IEEE 802.11b ISM</u>                |
| <u>Channels</u>        | <u>Middle</u>                          |
| <u>Signal</u>          | <u>IEEE802.11b (Crest factor: 1.0)</u> |
| <u>ConvF</u>           | <u>2.85</u>                            |


## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2437.000000 |
| <b>Relative permittivity (real part)</b>      | 37.626736   |
| <b>Relative permittivity (imaginary part)</b> | 12.841736   |
| <b>Conductivity (S/m)</b>                     | 1.738628    |
| <b>Variation (%)</b>                          | -0.130000   |

### SURFACE SAR

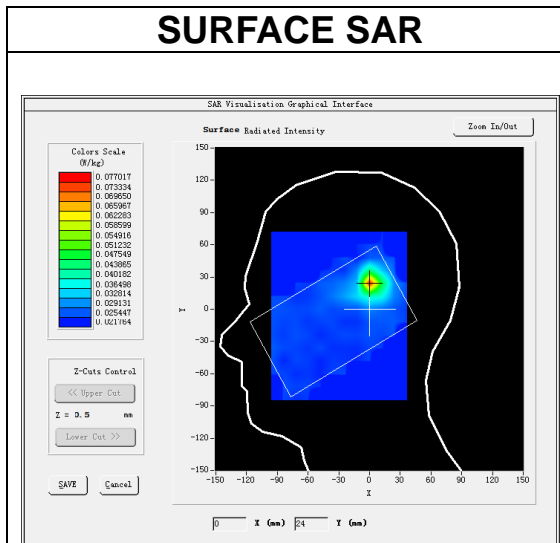



### VOLUME SAR

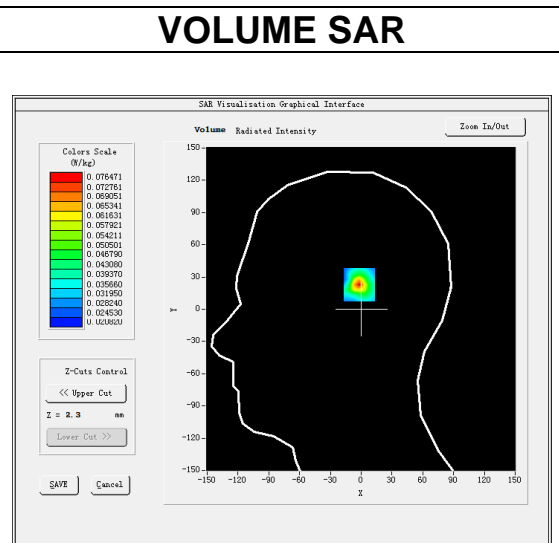

**Maximum location: X=1.00, Y=24.00**

**SAR Peak: 0.15 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.037760 |
| <b>SAR 1g (W/Kg)</b>  | 0.070983 |

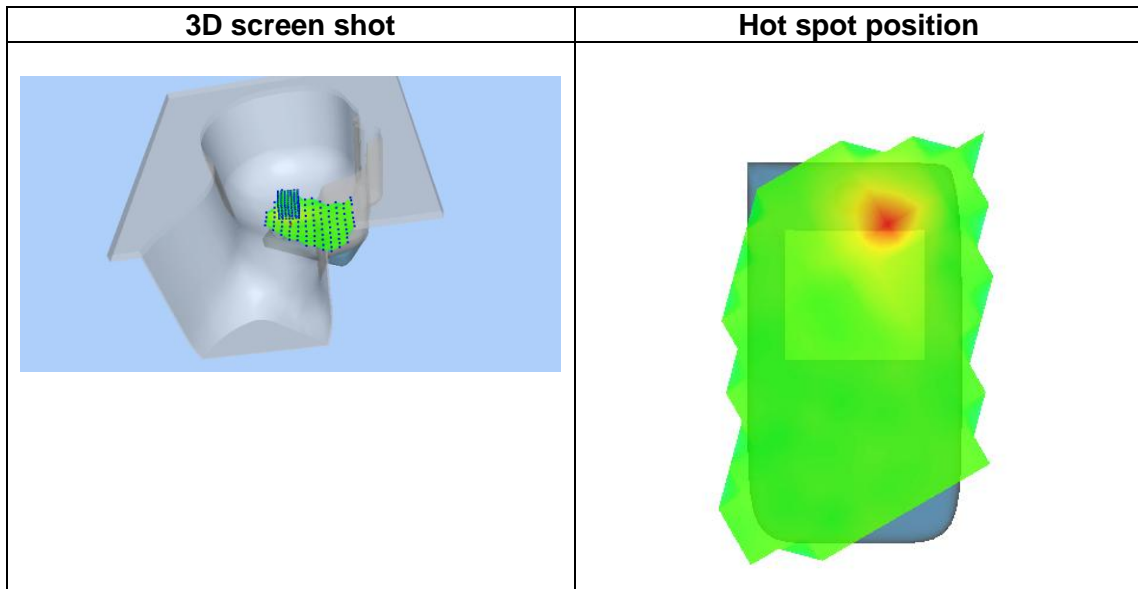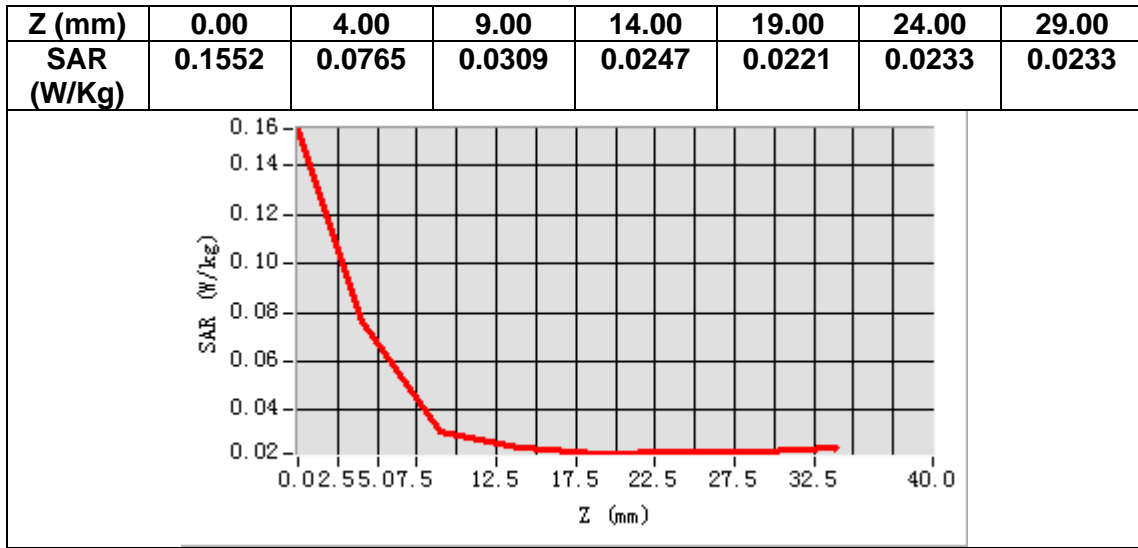

# MEASUREMENT 16


Date of measurement: 24/3/2024

## A. Experimental conditions.

|                        |  |
|------------------------|--|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>      |
| <b>Phantom</b>         | <u>Validation plane</u>                |
| <b>Device Position</b> | <u>Body</u>                            |
| <b>Band</b>            | <u>IEEE 802.11b ISM</u>                |
| <b>Channels</b>        | <u>Middle</u>                          |
| <b>Signal</b>          | <u>IEEE802.11b (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>2.85</u>                            |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2437.000000 |
| <b>Relative permittivity (real part)</b>      | 37.626736   |
| <b>Relative permittivity (imaginary part)</b> | 12.841736   |
| <b>Conductivity (S/m)</b>                     | 1.738628    |
| <b>Variation (%)</b>                          | -1.080000   |

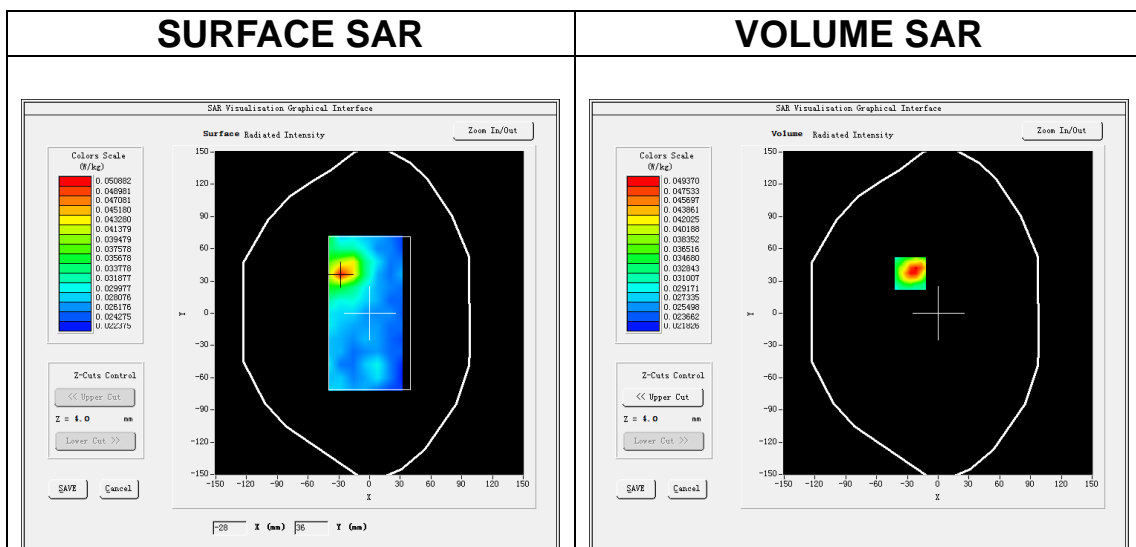

**Maximum location: X=-27.00, Y=37.00**  
**SAR Peak: 0.09 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.033164 |
| <b>SAR 1g (W/Kg)</b>  | 0.050716 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>0.0900</b> | <b>0.0494</b> | <b>0.0261</b> | <b>0.0245</b> | <b>0.0236</b> | <b>0.0234</b> | <b>0.0238</b> |

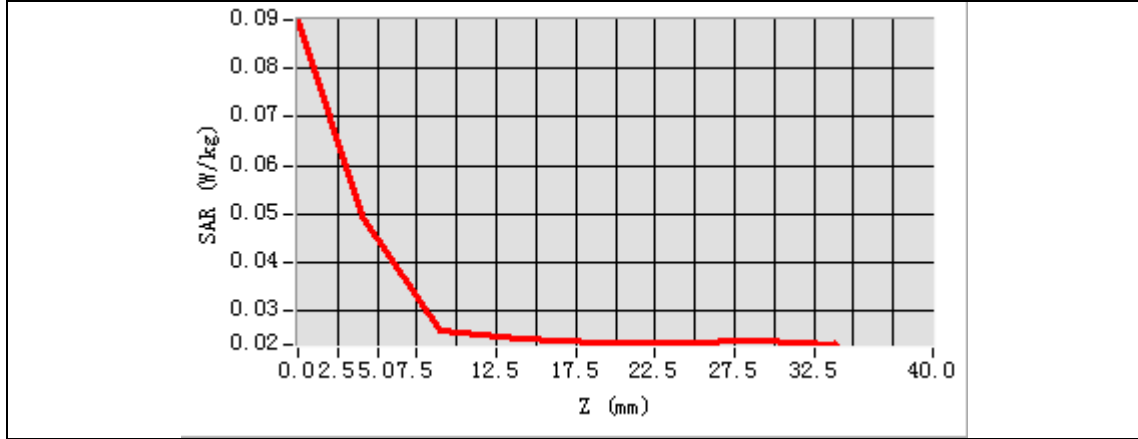

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

# MEASUREMENT 17


Date of measurement: 22/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>LTE band 2</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.63</u>                        |

## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.828300   |
| <b>Relative permittivity (imaginary part)</b> | 13.629750   |
| <b>Conductivity (S/m)</b>                     | 1.423552    |
| <b>Variation (%)</b>                          | -1.150000   |

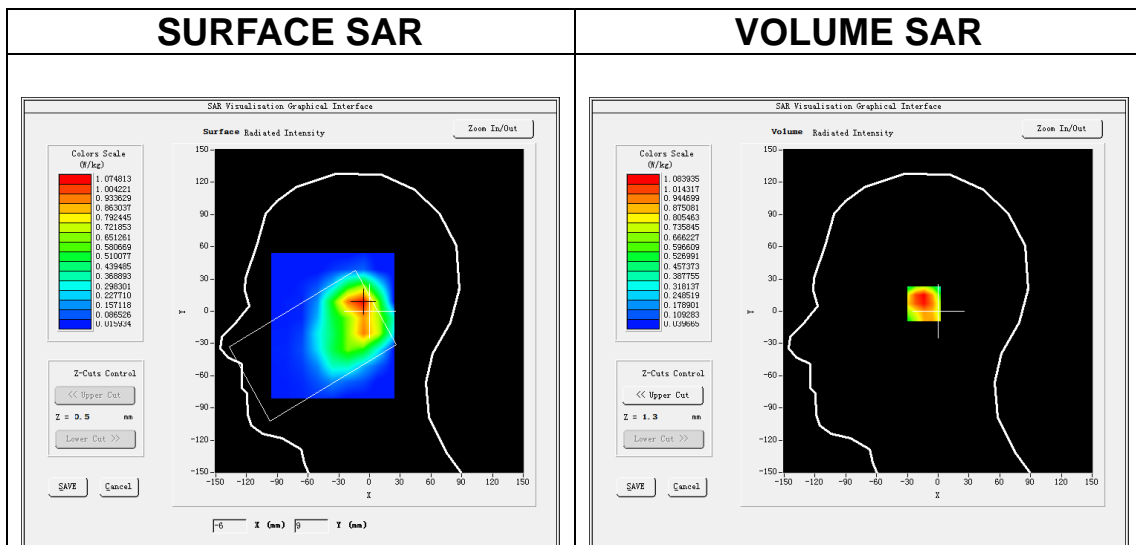


**Maximum location: X=-9.00, Y=7.00**  
**SAR Peak: 1.62 W/kg**


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.615340 |
| <b>SAR 1g (W/Kg)</b>  | 1.068438 |




|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.7889</b> | <b>1.0839</b> | <b>0.5672</b> | <b>0.4247</b> | <b>0.2134</b> | <b>0.1641</b> | <b>0.0850</b> |

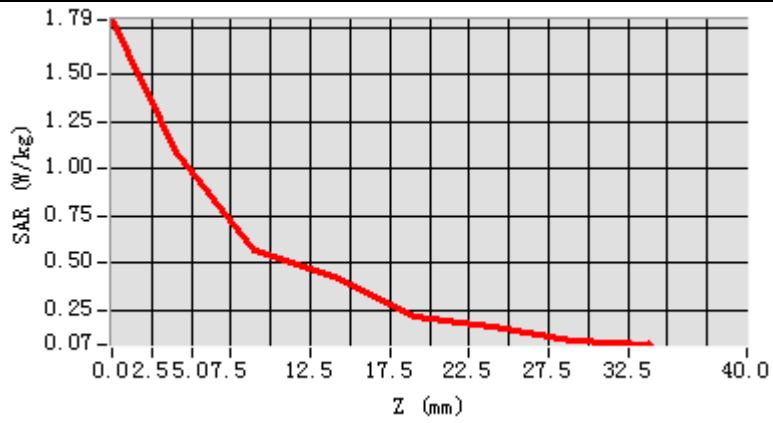

**3D screen shot**

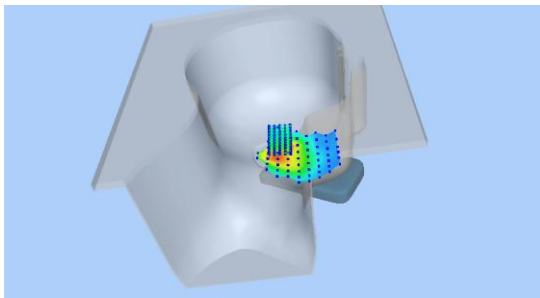

**Hot spot position**

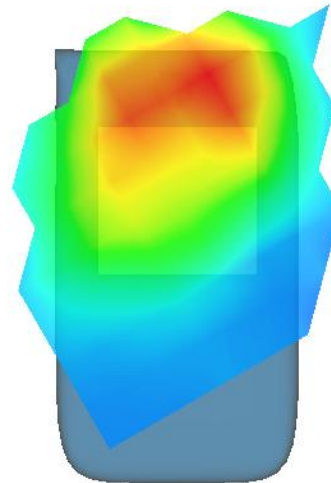

# MEASUREMENT 18


Date of measurement: 22/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 2</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.63</u>                        |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.828300   |
| <b>Relative permittivity (imaginary part)</b> | 13.629750   |
| <b>Conductivity (S/m)</b>                     | 1.423552    |
| <b>Variation (%)</b>                          | -2.580000   |


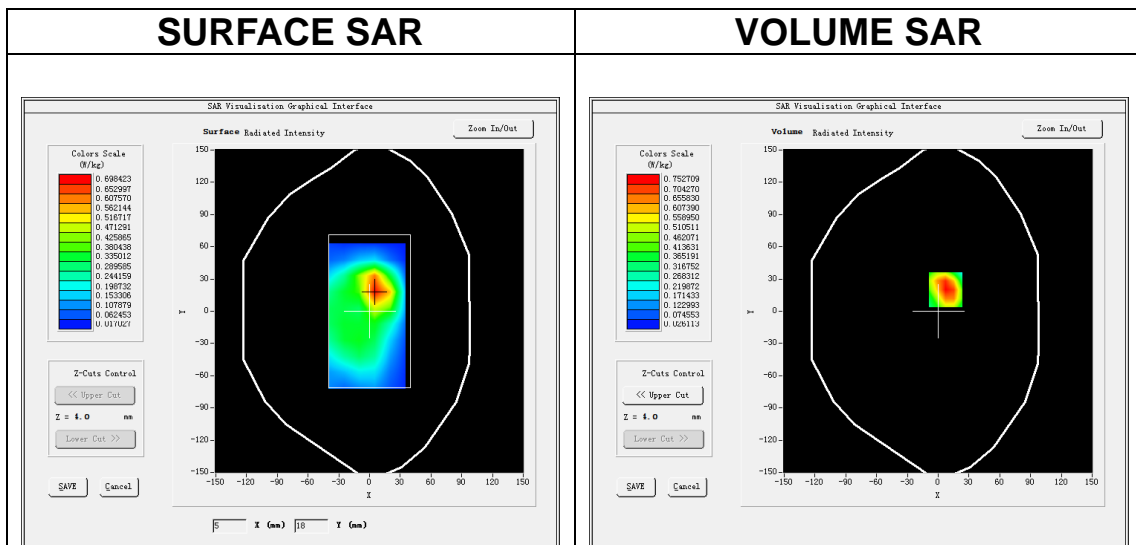


**Maximum location: X=7.00, Y=20.00**  
**SAR Peak: 1.21 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.397589 |
| <b>SAR 1g (W/Kg)</b>  | 0.739409 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.1677</b> | <b>0.7527</b> | <b>0.4274</b> | <b>0.2497</b> | <b>0.1492</b> | <b>0.0907</b> | <b>0.0574</b> |

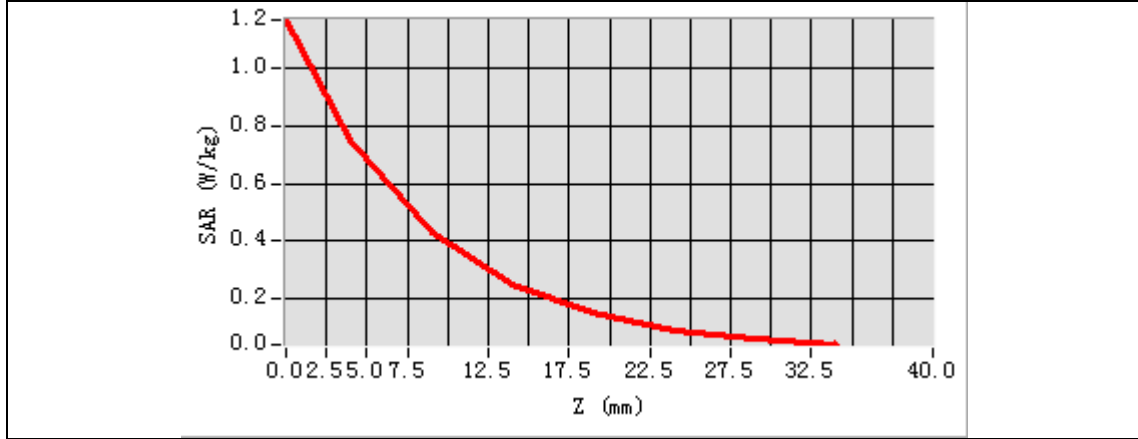
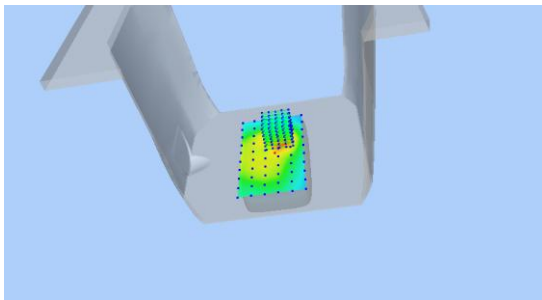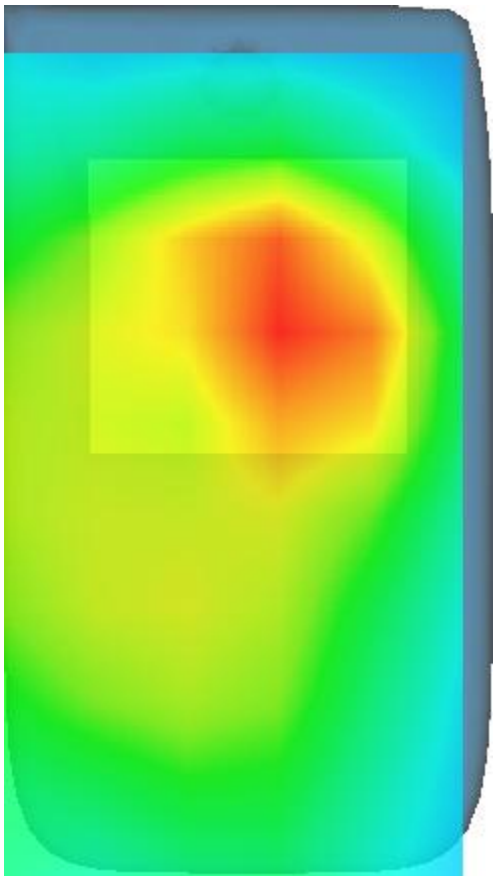
| 3D screen shot  | Hot spot position  |
|---|--|
|  |  |

# MEASUREMENT 19


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>LTE band 4</u>                  |
| <b>Channels</b>        | <u>High</u>                        |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.45</u>                        |



## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1745.000000 |
| <b>Relative permittivity (real part)</b>      | 39.444683   |
| <b>Relative permittivity (imaginary part)</b> | 13.736205   |
| <b>Conductivity (S/m)</b>                     | 1.331649    |
| <b>Variation (%)</b>                          | -1.240000   |

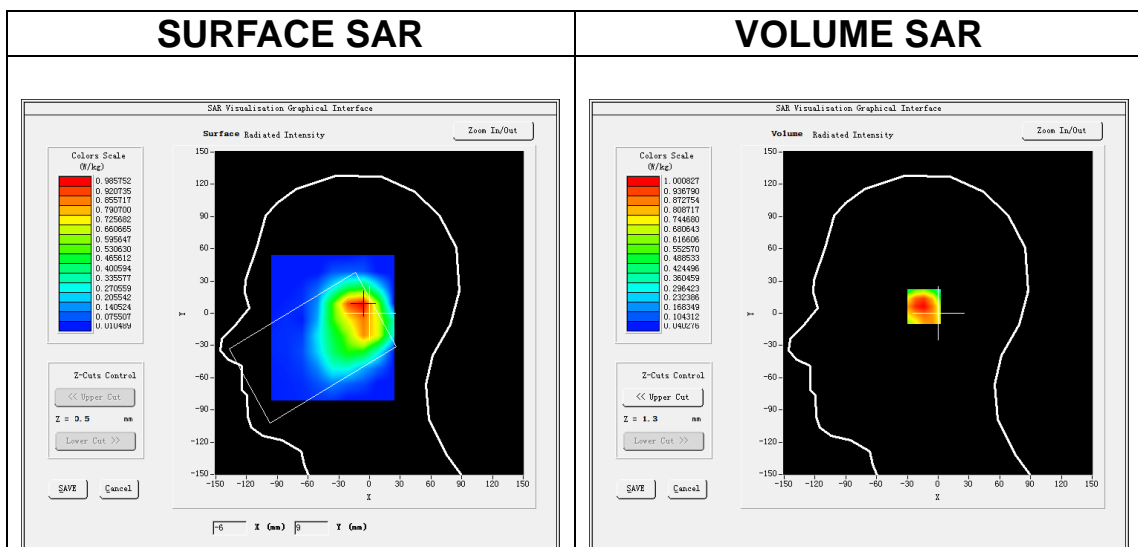

**Maximum location: X=-9.00, Y=6.00**  
**SAR Peak: 1.42 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.594218 |
| <b>SAR 1g (W/Kg)</b>  | 0.967224 |

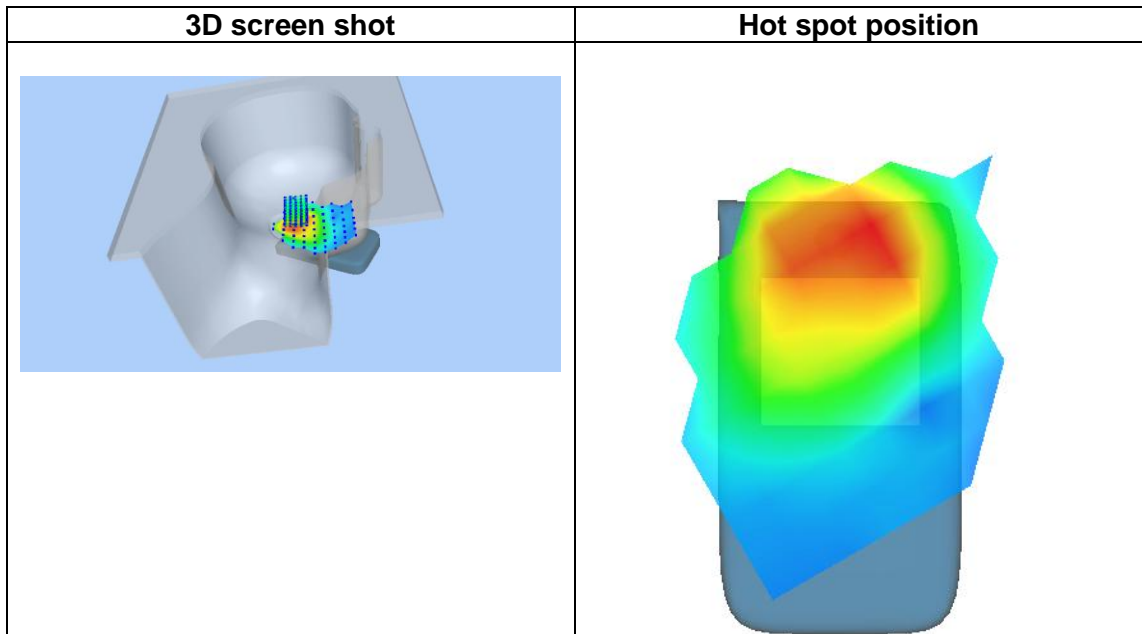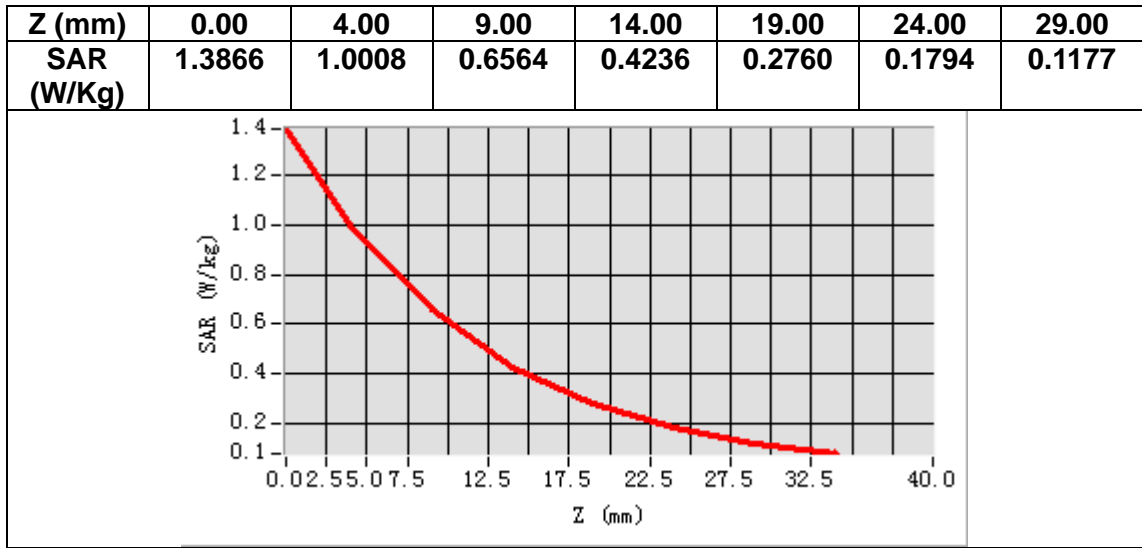

# MEASUREMENT 20


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>LTE band 4</u>                  |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>LTE (Crest factor: 1.0)</u>     |
| <u>ConvF</u>           | <u>2.45</u>                        |

## B. SAR Measurement Results



|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1732.500000 |
| <b>Relative permittivity (real part)</b>      | 39.516483   |
| <b>Relative permittivity (imaginary part)</b> | 13.738655   |
| <b>Conductivity (S/m)</b>                     | 1.322346    |
| <b>Variation (%)</b>                          | -1.110000   |

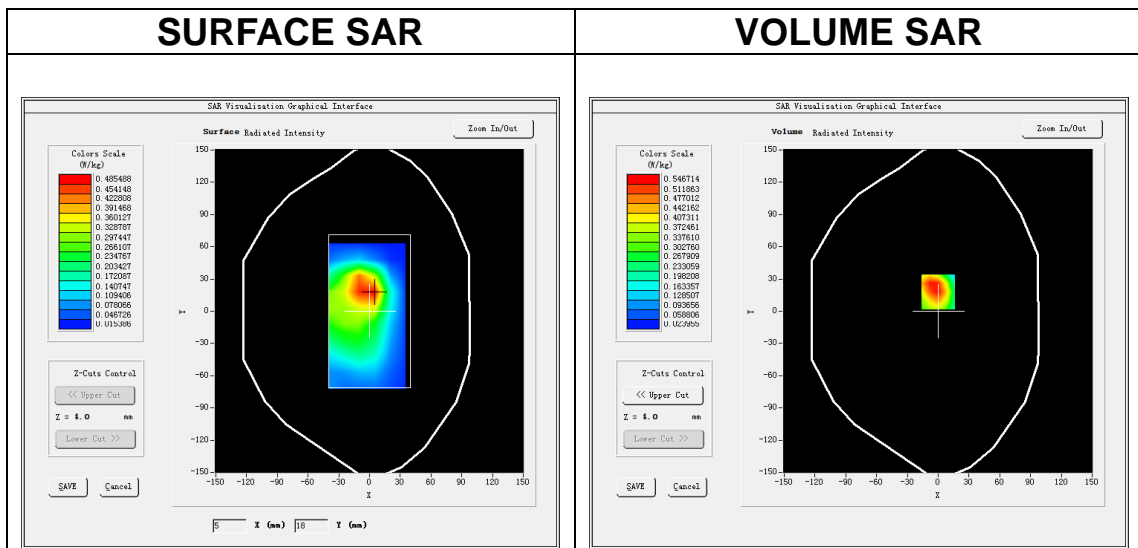

**Maximum location: X=0.00, Y=18.00**

**SAR Peak: 0.87 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.300182 |
| <b>SAR 1g (W/Kg)</b>  | 0.534472 |

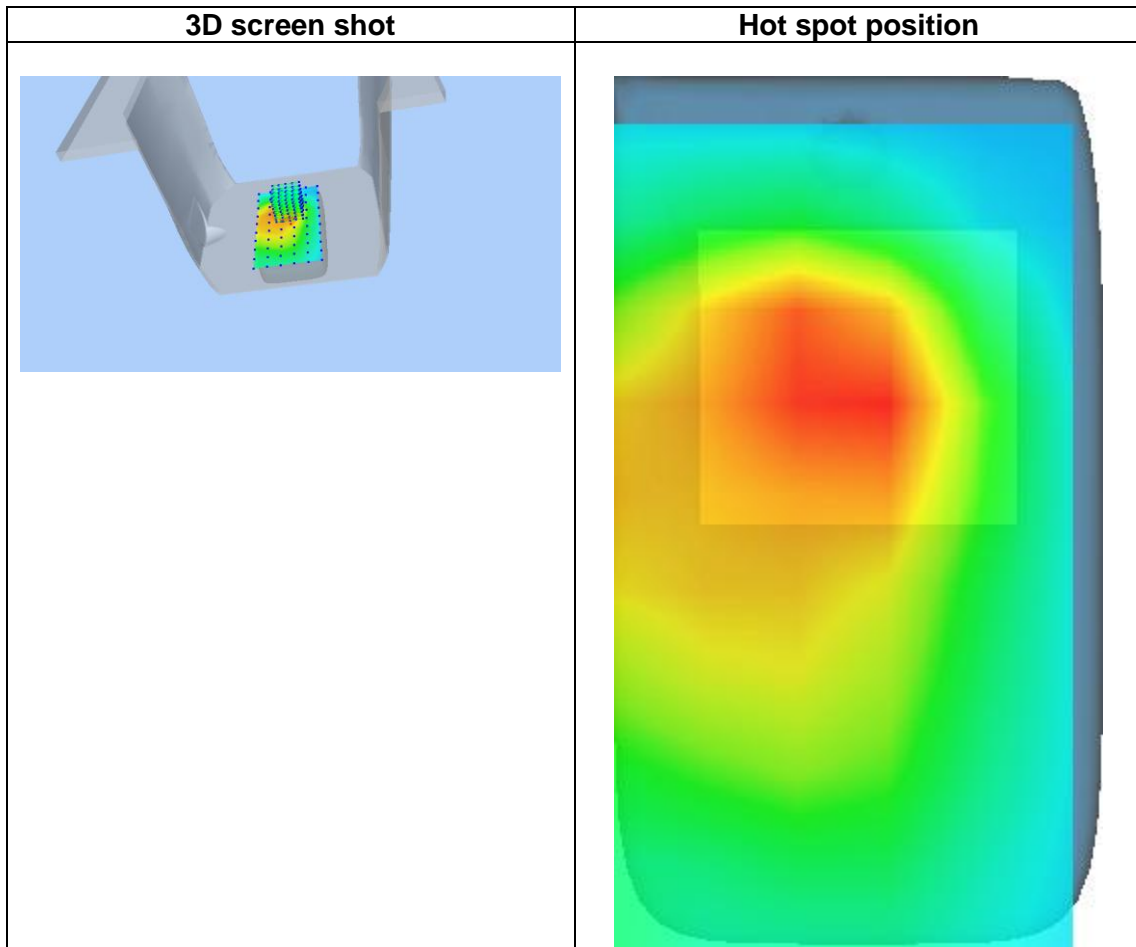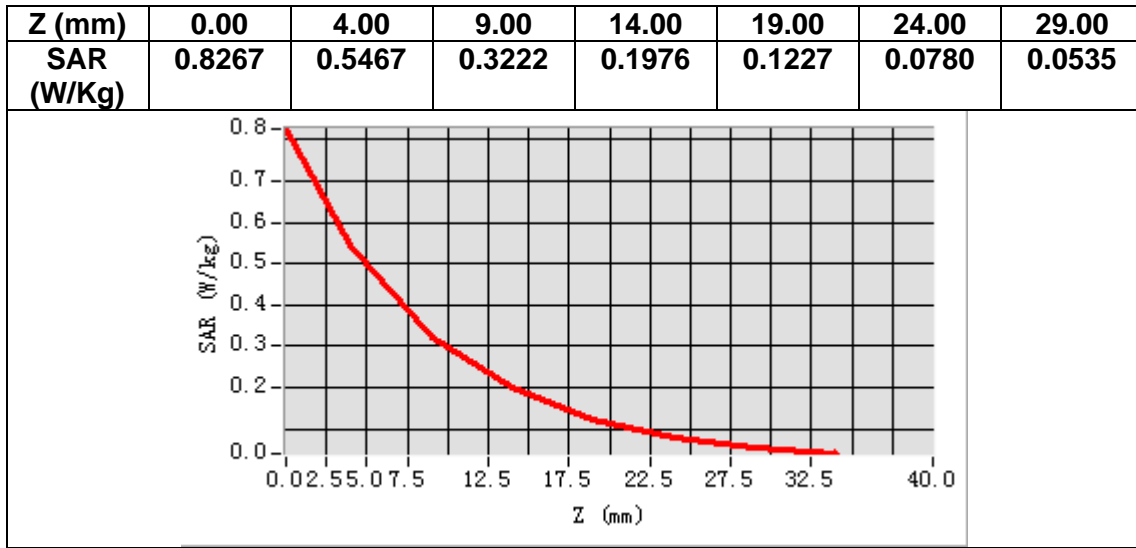

# MEASUREMENT 21


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>LTE band 5</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.32</u>                        |

## B. SAR Measurement Results



|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 836.500000 |
| <b>Relative permittivity (real part)</b>      | 41.156590  |
| <b>Relative permittivity (imaginary part)</b> | 19.201538  |
| <b>Conductivity (S/m)</b>                     | 0.892338   |
| <b>Variation (%)</b>                          | -1.020000  |

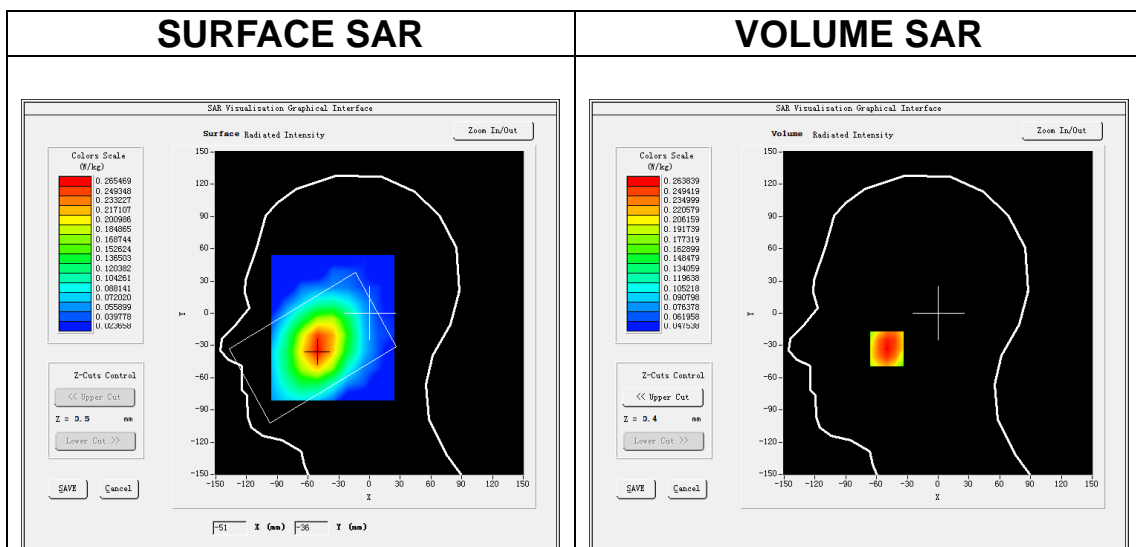

**Maximum location: X=-50.00, Y=-33.00**  
**SAR Peak: 0.31 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.199643 |
| <b>SAR 1g (W/Kg)</b>  | 0.257157 |



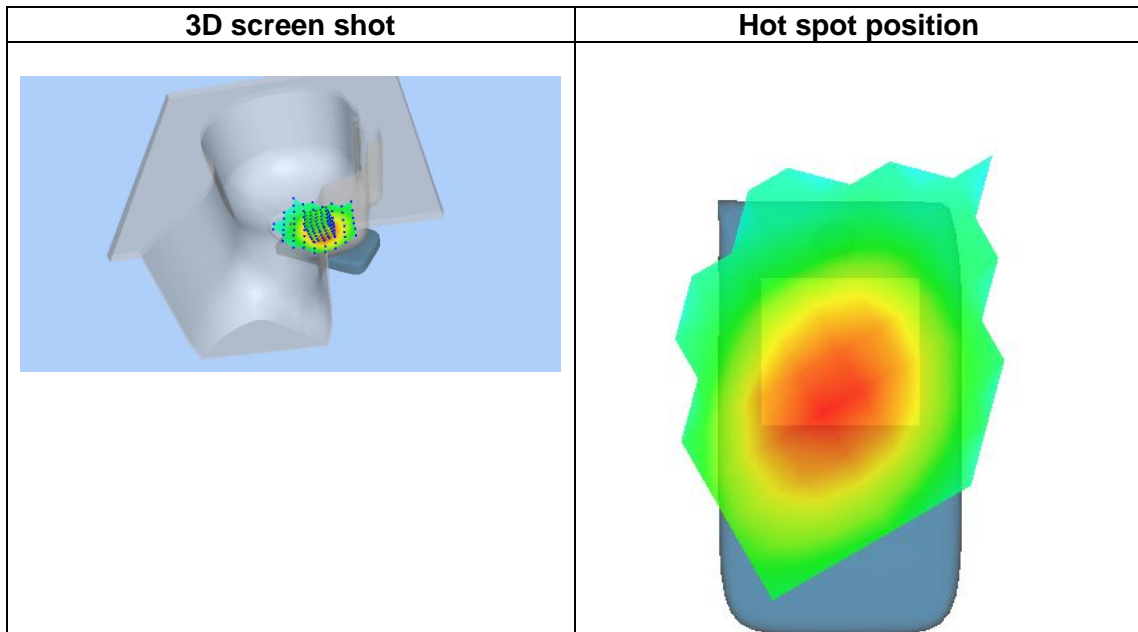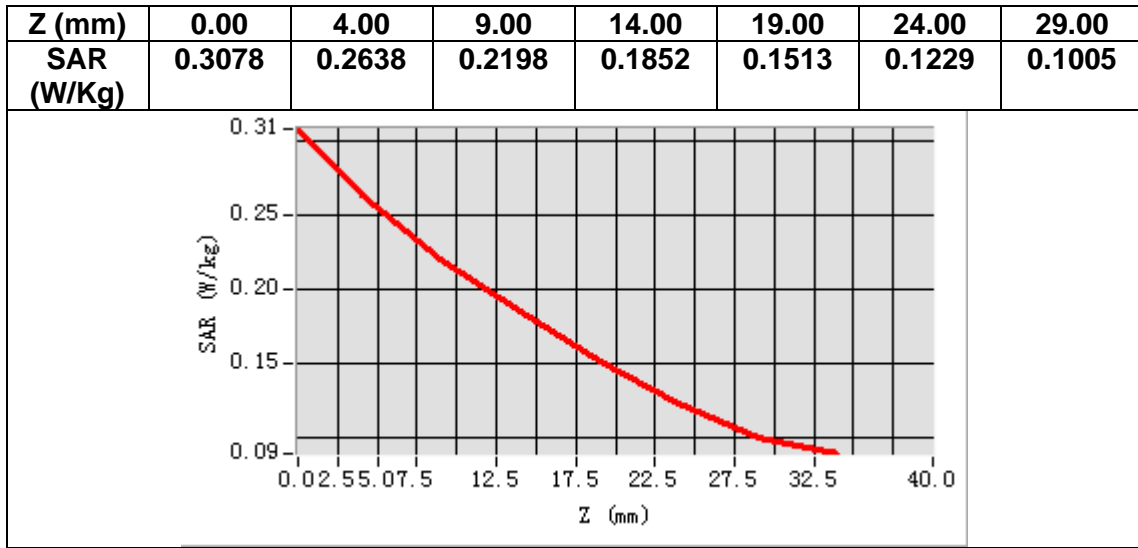

# MEASUREMENT 22


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 5</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.32</u>                        |



## B. SAR Measurement Results

|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 836.500000 |
| <b>Relative permittivity (real part)</b>      | 41.156590  |
| <b>Relative permittivity (imaginary part)</b> | 19.201538  |
| <b>Conductivity (S/m)</b>                     | 0.892338   |
| <b>Variation (%)</b>                          | -0.870000  |

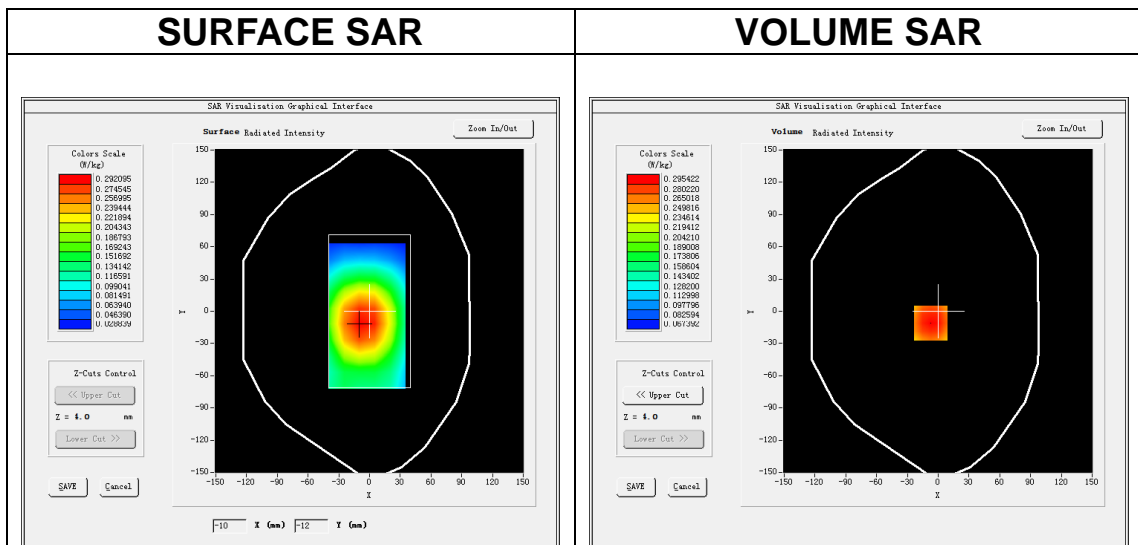

**Maximum location: X=-7.00, Y=-11.00**  
**SAR Peak: 0.35 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.220915 |
| <b>SAR 1g (W/Kg)</b>  | 0.287223 |

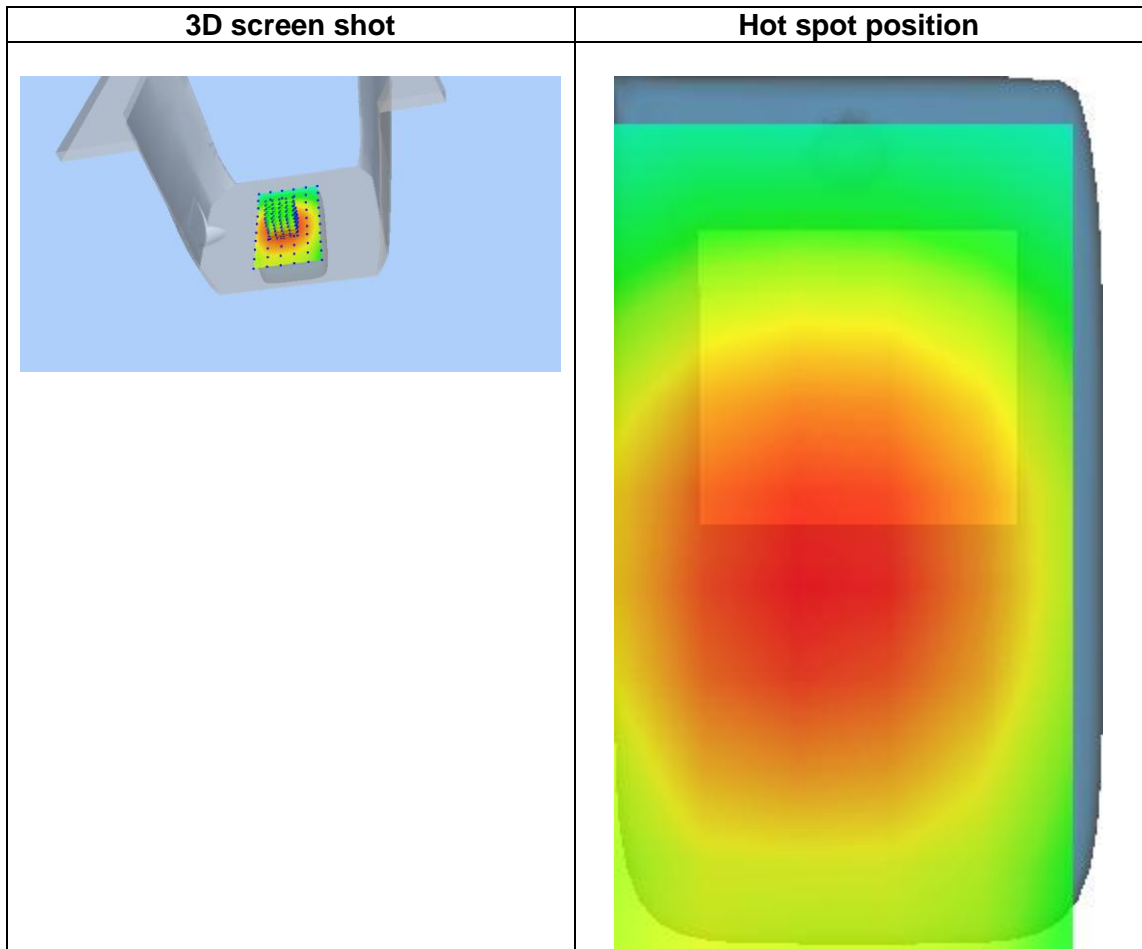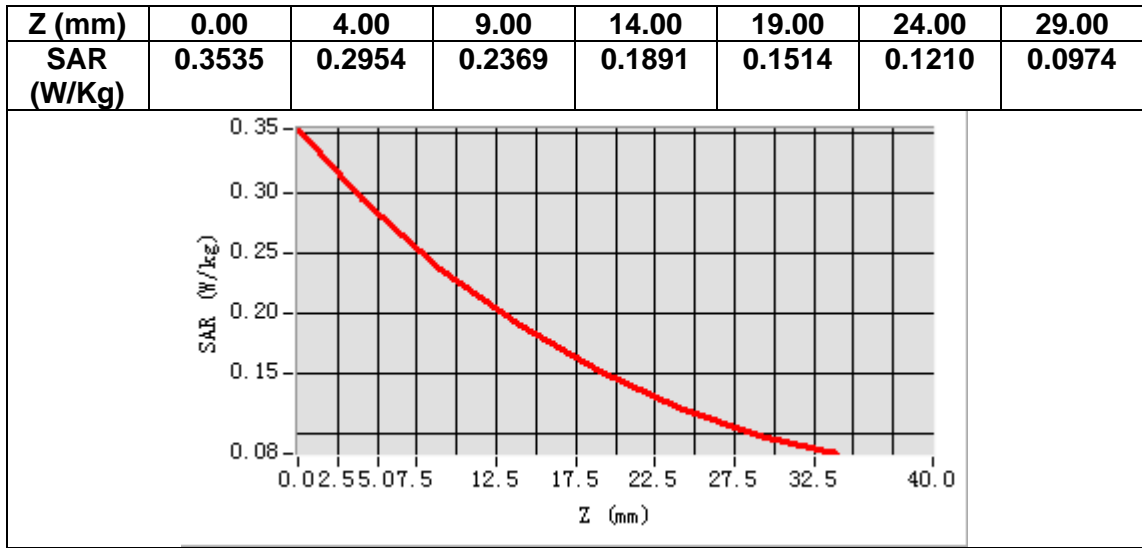

# MEASUREMENT 23


Date of measurement: 25/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>LTE band 7</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.65</u>                        |



## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2535.000000 |
| <b>Relative permittivity (real part)</b>      | 38.969021   |
| <b>Relative permittivity (imaginary part)</b> | 13.309774   |
| <b>Conductivity (S/m)</b>                     | 1.874460    |
| <b>Variation (%)</b>                          | -2.190000   |

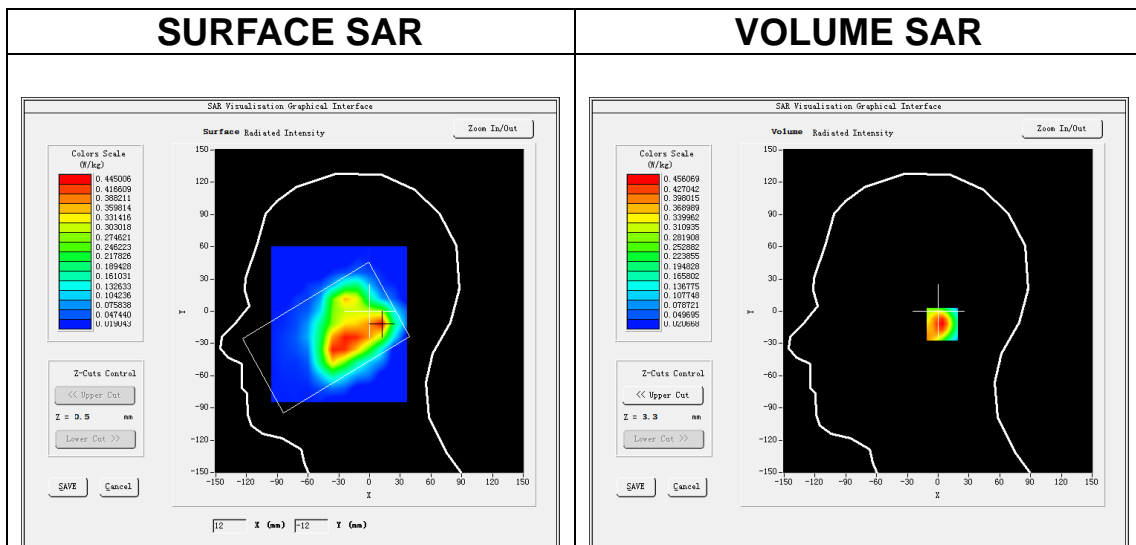

**Maximum location: X=10.00, Y=-12.00**  
**SAR Peak: 0.73 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.221132 |
| <b>SAR 1g (W/Kg)</b>  | 0.425370 |

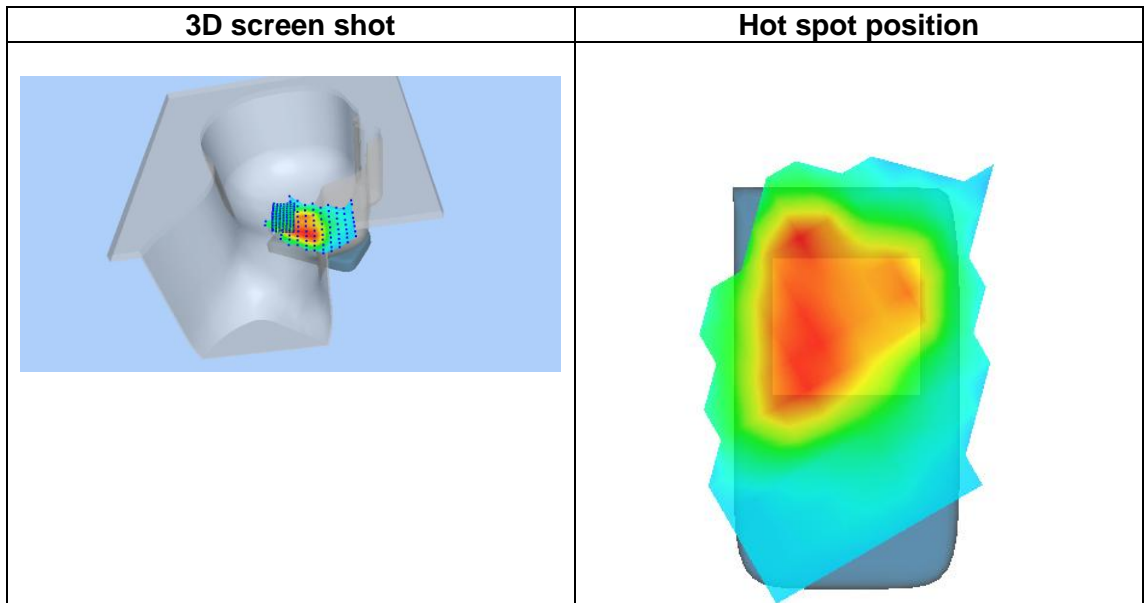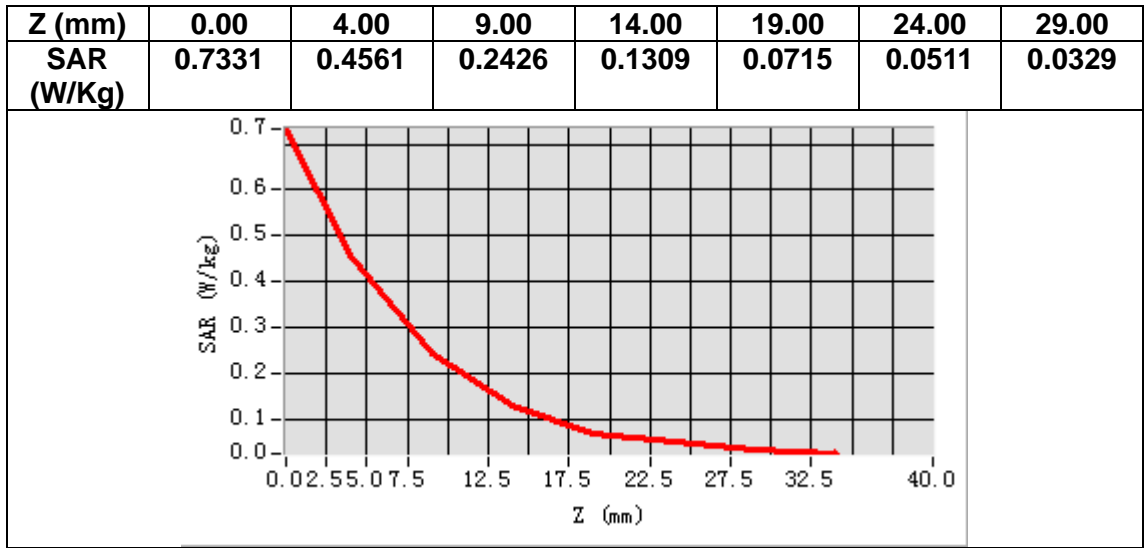

# MEASUREMENT 24


Date of measurement: 25/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 7</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.65</u>                        |

## B. SAR Measurement Results



|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2535.000000 |
| <b>Relative permittivity (real part)</b>      | 38.969021   |
| <b>Relative permittivity (imaginary part)</b> | 13.309774   |
| <b>Conductivity (S/m)</b>                     | 1.874460    |
| <b>Variation (%)</b>                          | 3.400000    |

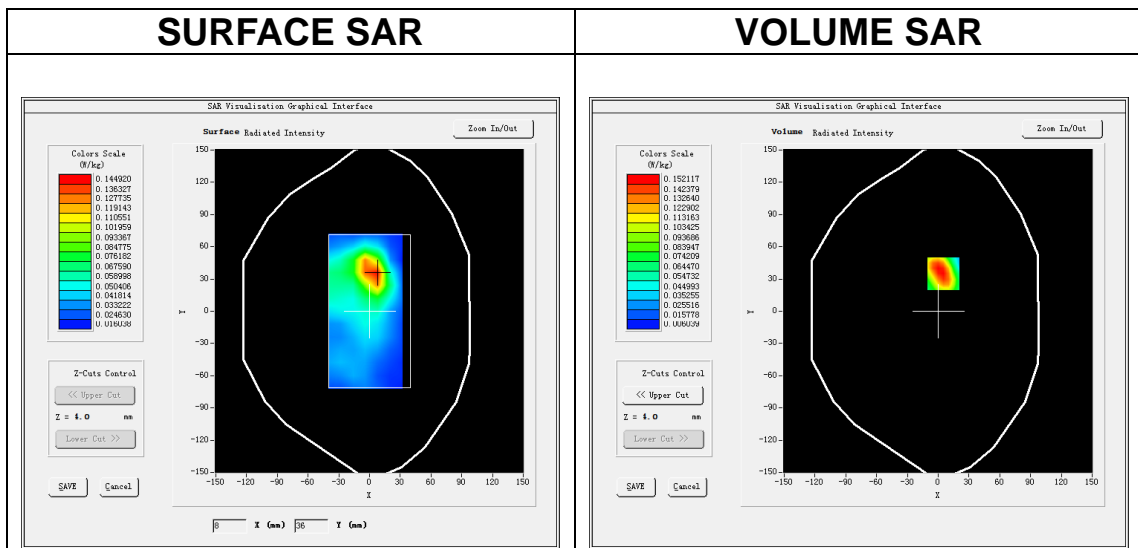

**Maximum location: X=5.00, Y=35.00**

**SAR Peak: 0.25 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.078769 |
| <b>SAR 1g (W/Kg)</b>  | 0.142970 |

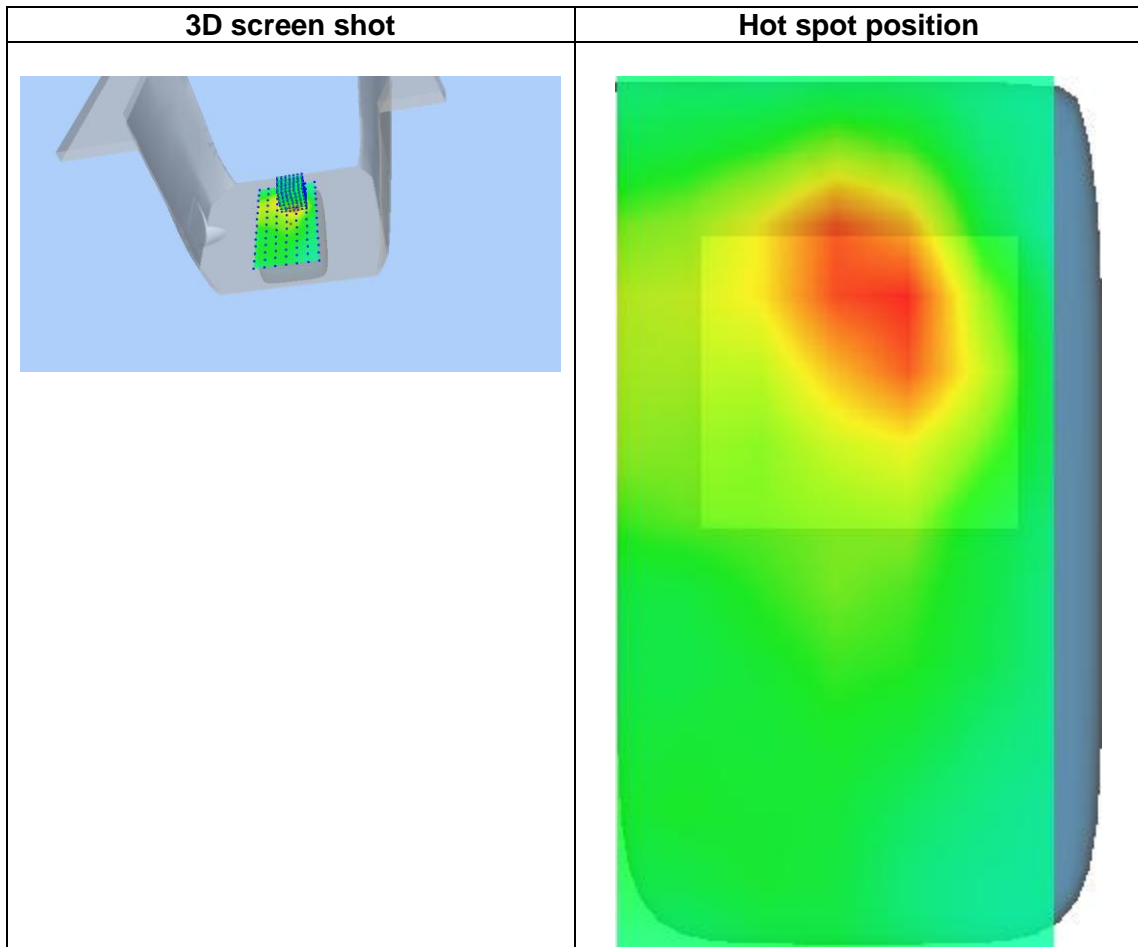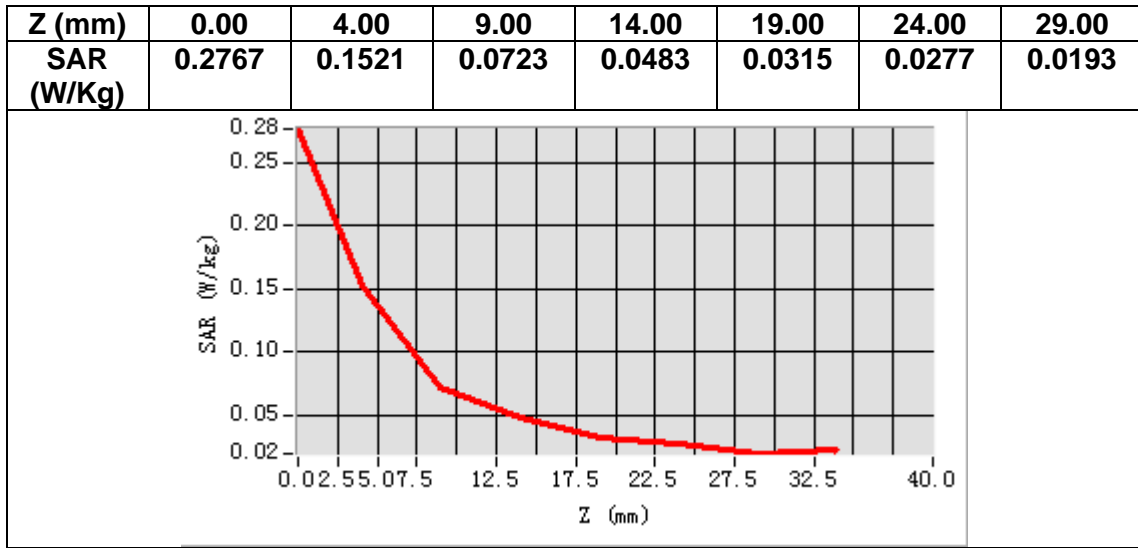

# MEASUREMENT 25


Date of measurement: 22/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Left head</u>                   |
| <u>Device Position</u> | <u>Cheek</u>                       |
| <u>Band</u>            | <u>LTE band 25</u>                 |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>LTE (Crest factor: 1.0)</u>     |
| <u>ConvF</u>           | <u>2.63</u>                        |

## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1882.500000 |
| <b>Relative permittivity (real part)</b>      | 38.836304   |
| <b>Relative permittivity (imaginary part)</b> | 13.620550   |
| <b>Conductivity (S/m)</b>                     | 1.424104    |
| <b>Variation (%)</b>                          | -0.730000   |

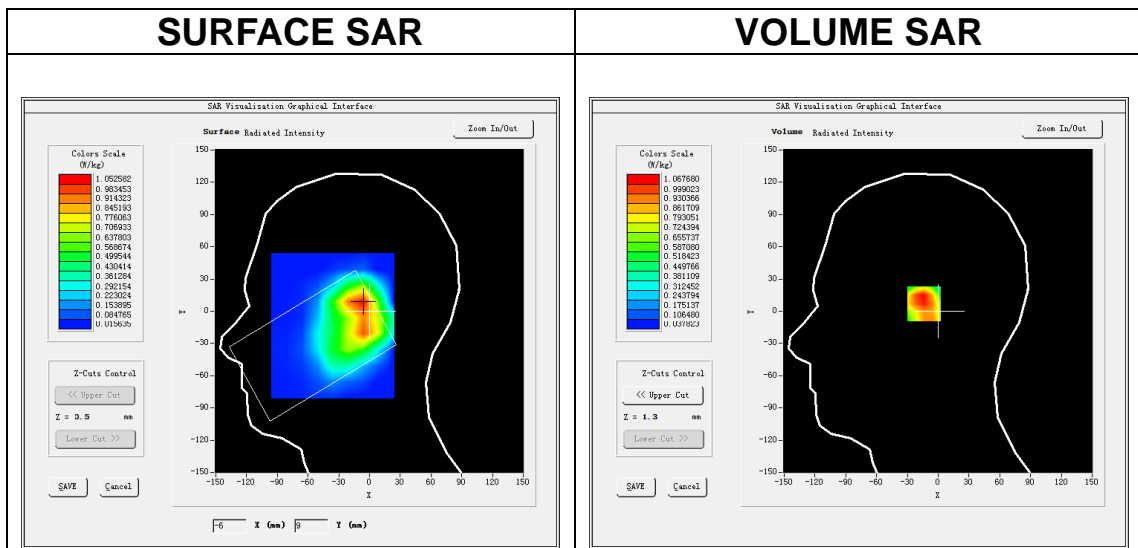


**Maximum location: X=-9.00, Y=7.00**  
**SAR Peak: 1.59 W/kg**


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.602379 |
| <b>SAR 1g (W/Kg)</b>  | 1.048665 |




|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.7268</b> | <b>1.0677</b> | <b>0.5740</b> | <b>0.4157</b> | <b>0.2123</b> | <b>0.1627</b> | <b>0.0853</b> |

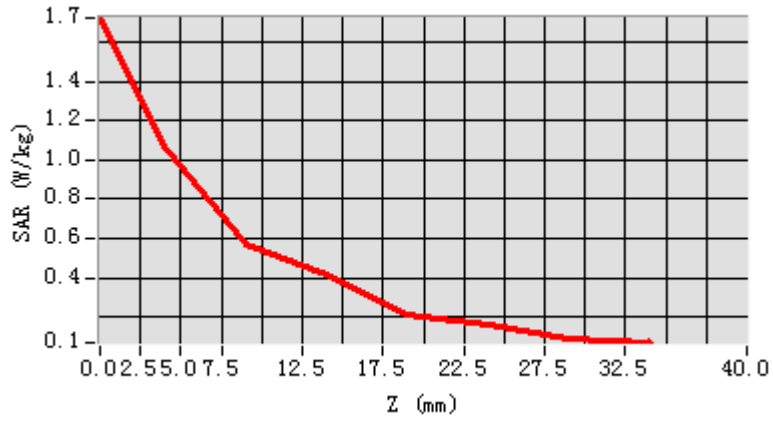

**3D screen shot**

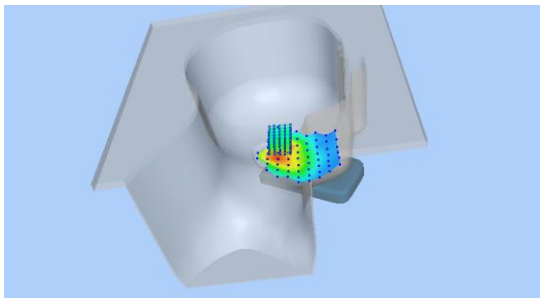

**Hot spot position**

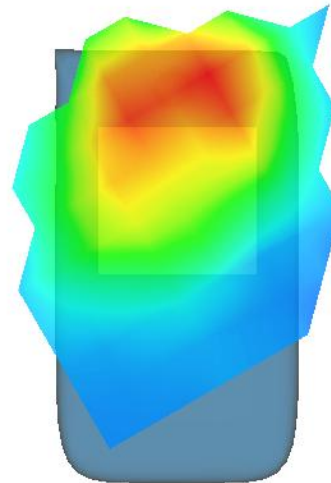

# MEASUREMENT 26


Date of measurement: 22/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>LTE band 25</u>                 |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>LTE (Crest factor: 1.0)</u>     |
| <u>ConvF</u>           | <u>2.63</u>                        |

## B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1882.500000 |
| <b>Relative permittivity (real part)</b>      | 38.836304   |
| <b>Relative permittivity (imaginary part)</b> | 13.620550   |
| <b>Conductivity (S/m)</b>                     | 1.424104    |
| <b>Variation (%)</b>                          | -0.050000   |

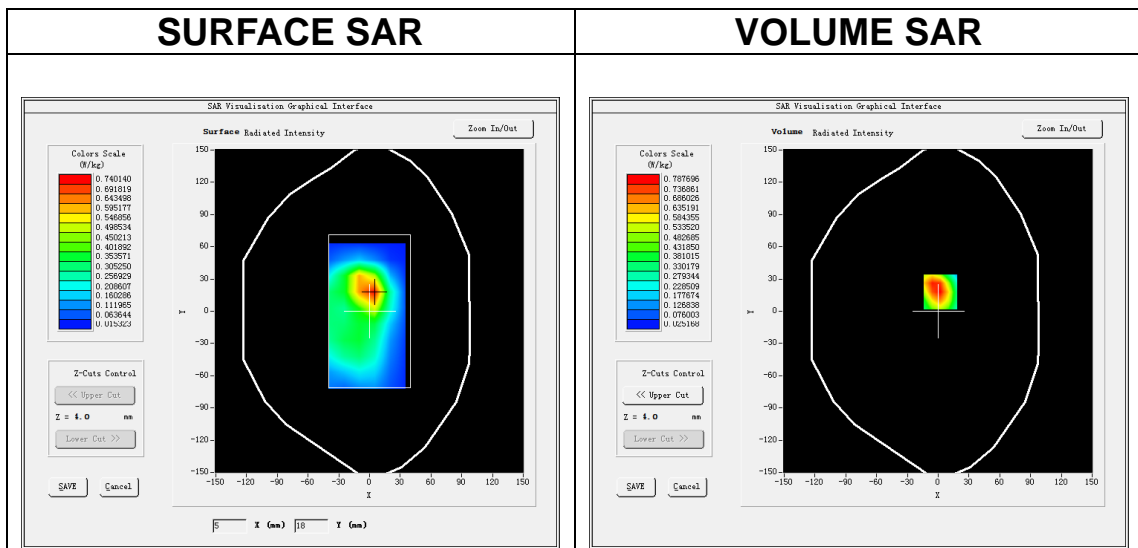


**Maximum location: X=2.00, Y=18.00**

**SAR Peak: 1.30 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.415846 |
| <b>SAR 1g (W/Kg)</b>  | 0.779707 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.2241</b> | <b>0.7877</b> | <b>0.4451</b> | <b>0.2567</b> | <b>0.1521</b> | <b>0.0927</b> | <b>0.0586</b> |

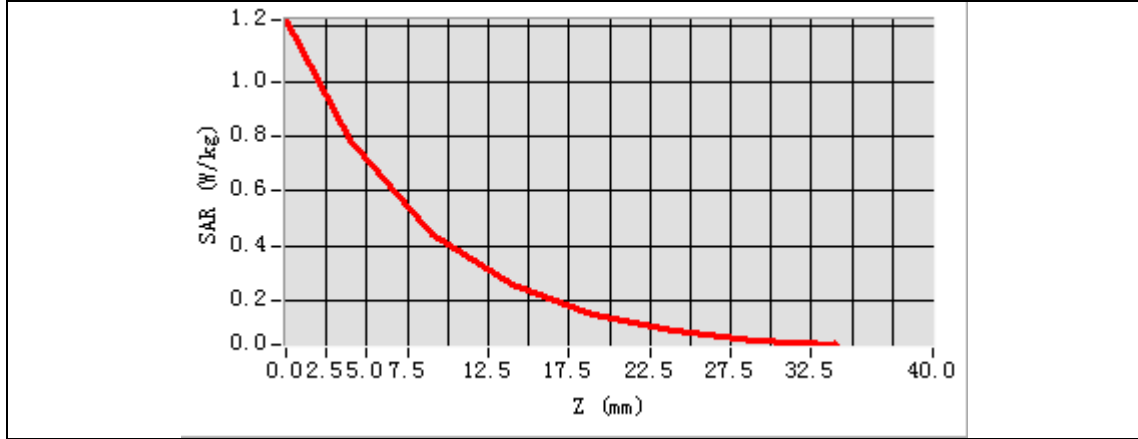

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

# MEASUREMENT 27


Date of measurement: 25/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>LTE band 41</u>                 |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.65</u>                        |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2595.000000 |
| <b>Relative permittivity (real part)</b>      | 38.601121   |
| <b>Relative permittivity (imaginary part)</b> | 13.523574   |
| <b>Conductivity (S/m)</b>                     | 1.949649    |
| <b>Variation (%)</b>                          | -1.970000   |

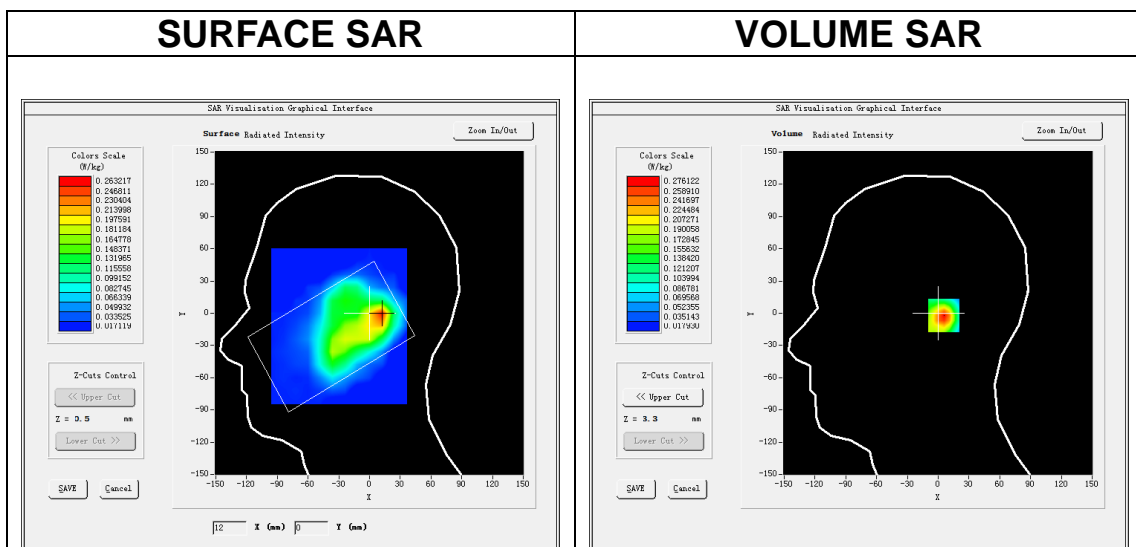

**Maximum location: X=11.00, Y=-2.00**  
**SAR Peak: 0.45 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.127170 |
| <b>SAR 1g (W/Kg)</b>  | 0.252336 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>0.4566</b> | <b>0.2761</b> | <b>0.1406</b> | <b>0.0756</b> | <b>0.0441</b> | <b>0.0307</b> | <b>0.0257</b> |

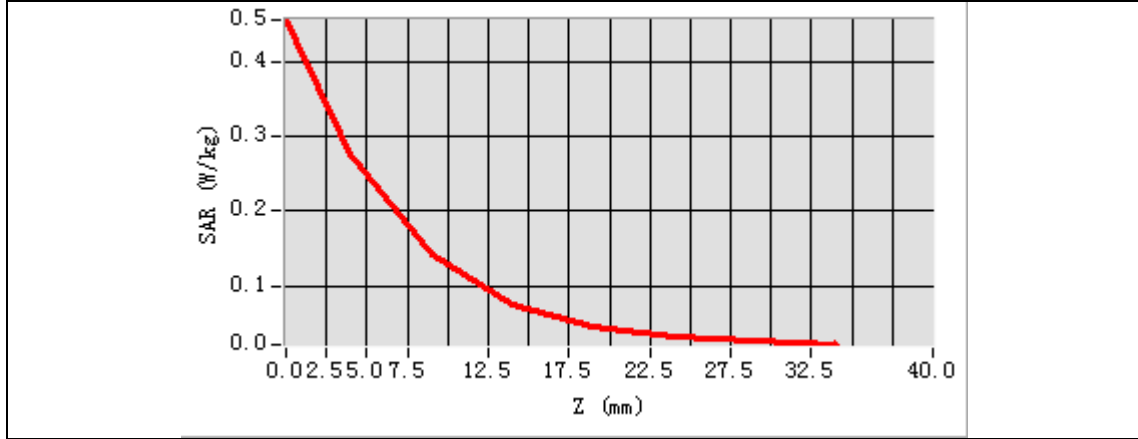

| 3D screen shot | Hot spot position |
|----------------|-------------------|
|                |                   |

## MEASUREMENT 28


Date of measurement: 25/3/2024

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 41</u>                 |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>2.65</u>                        |



### B. SAR Measurement Results

|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 2595.000000 |
| <b>Relative permittivity (real part)</b>      | 38.601121   |
| <b>Relative permittivity (imaginary part)</b> | 13.523574   |
| <b>Conductivity (S/m)</b>                     | 1.949649    |
| <b>Variation (%)</b>                          | -1.390000   |

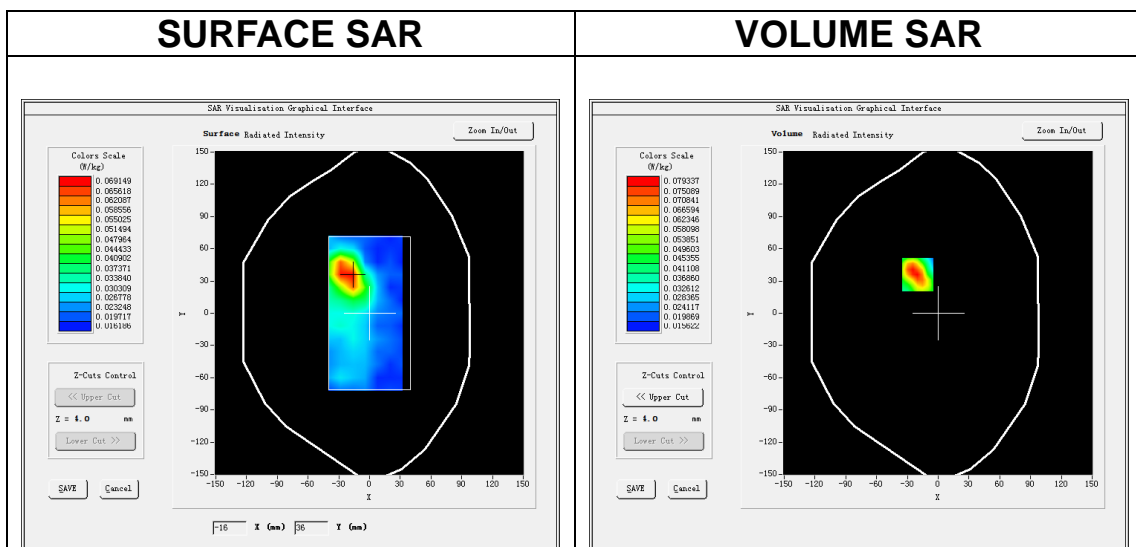

**Maximum location: X=-20.00, Y=36.00**  
**SAR Peak: 0.13 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.044445 |
| <b>SAR 1g (W/Kg)</b>  | 0.075380 |

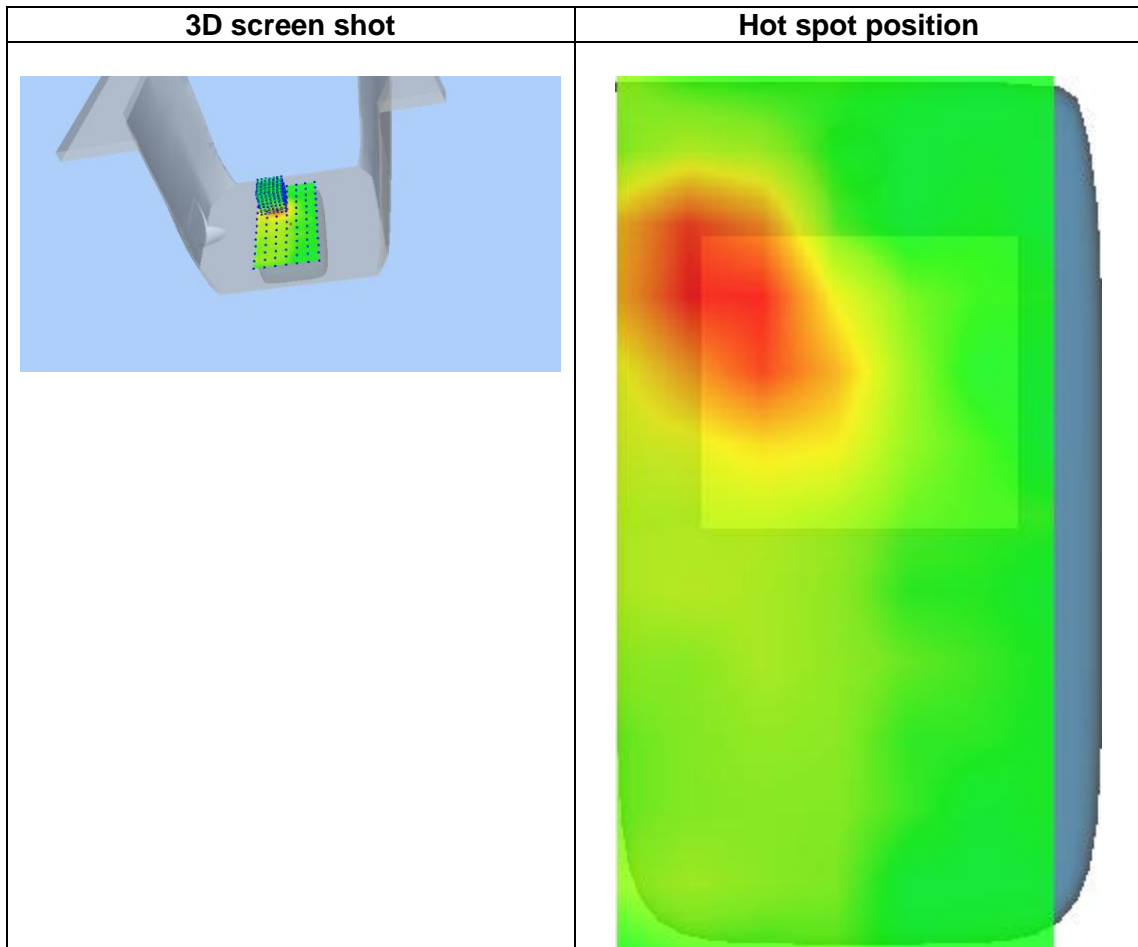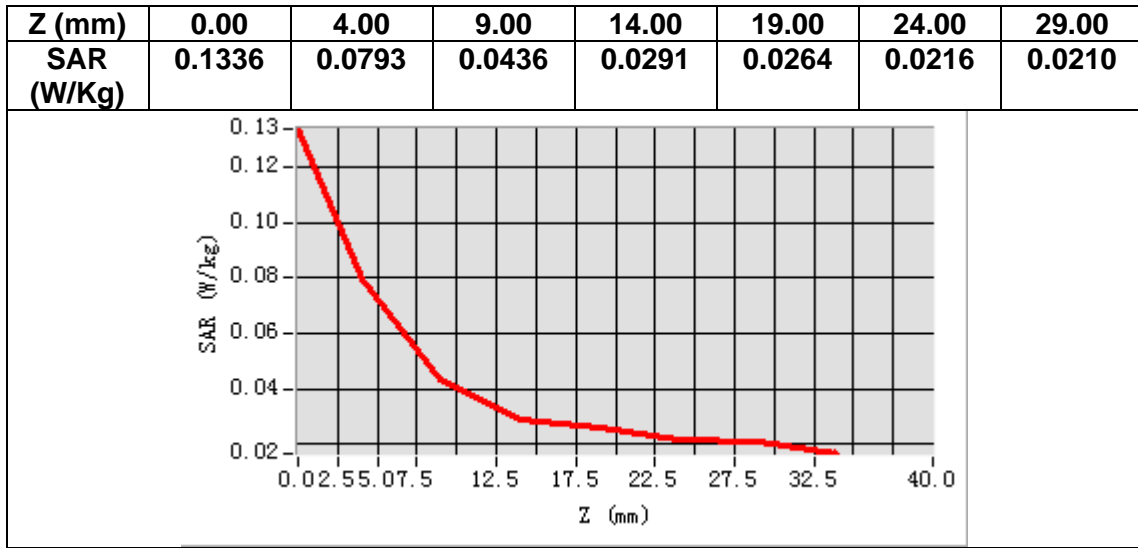

# MEASUREMENT 29


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Left head</u>                   |
| <b>Device Position</b> | <u>Cheek</u>                       |
| <b>Band</b>            | <u>FDDBand26A</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>(Crest factor: 1.0)</u>         |
| <b>ConvF</b>           | <u>2.32</u>                        |

## B. SAR Measurement Results



|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 819.000000 |
| <b>Relative permittivity (real part)</b>      | 41.412338  |
| <b>Relative permittivity (imaginary part)</b> | 19.125538  |
| <b>Conductivity (S/m)</b>                     | 0.870212   |
| <b>Variation (%)</b>                          | 0.210000   |

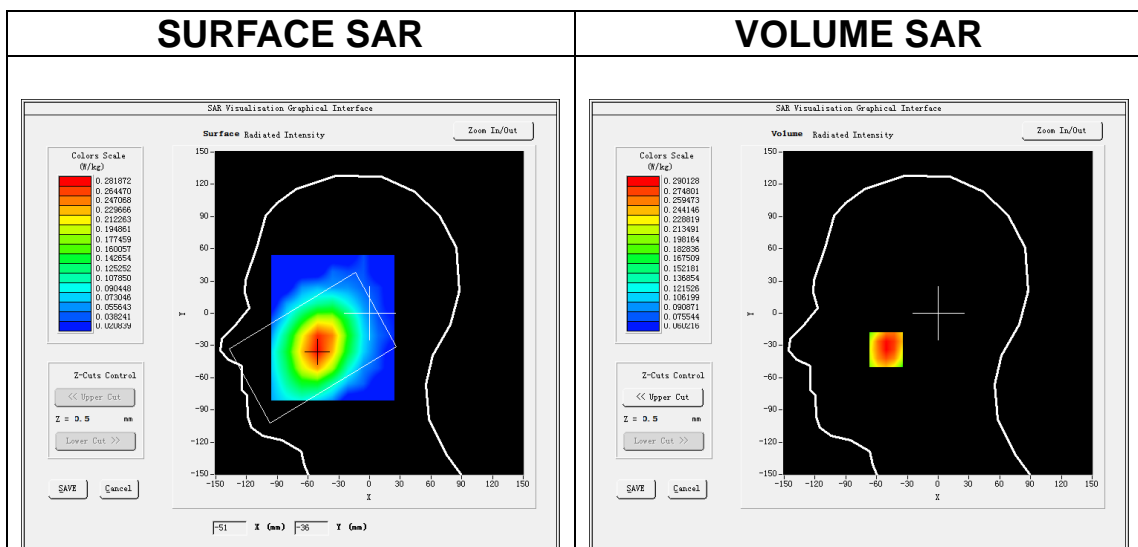

**Maximum location: X=-51.00, Y=-34.00**  
**SAR Peak: 0.33 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.220599 |
| <b>SAR 1g (W/Kg)</b>  | 0.281216 |



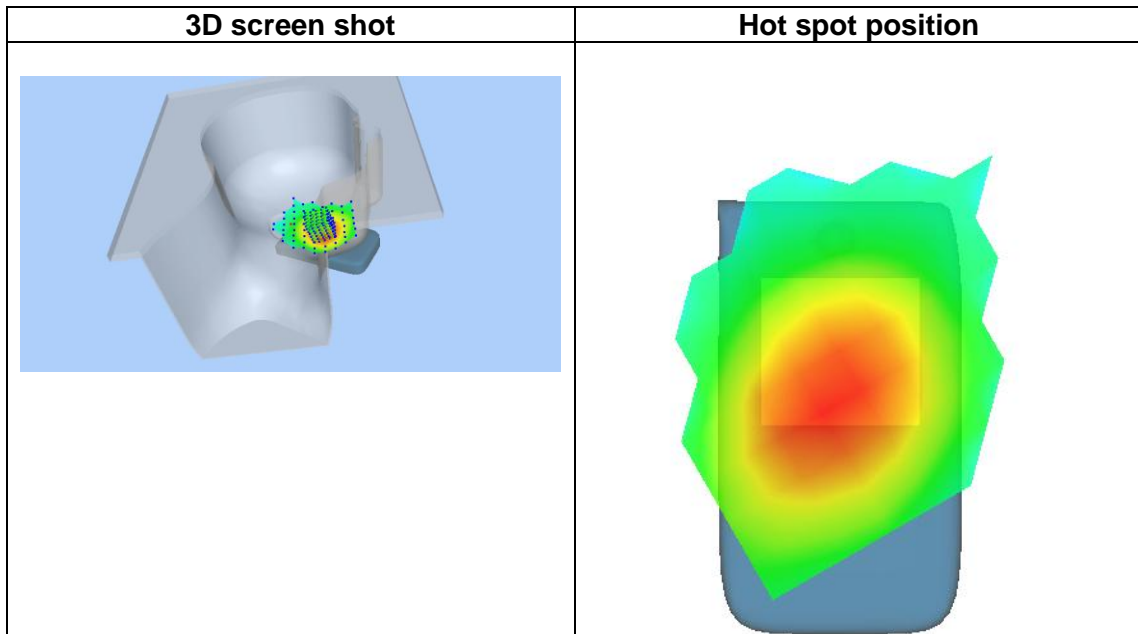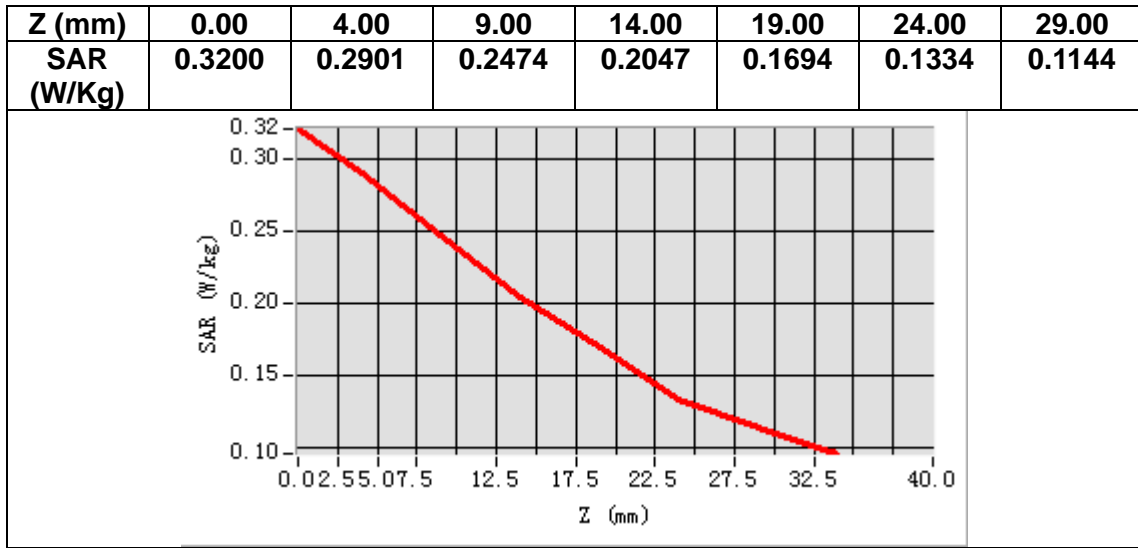

# MEASUREMENT 30


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>FDDBand26A</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>(Crest factor: 1.0)</u>         |
| <b>ConvF</b>           | <u>2.32</u>                        |



## B. SAR Measurement Results

|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 819.000000 |
| <b>Relative permittivity (real part)</b>      | 41.412338  |
| <b>Relative permittivity (imaginary part)</b> | 19.125538  |
| <b>Conductivity (S/m)</b>                     | 0.870212   |
| <b>Variation (%)</b>                          | -0.850000  |

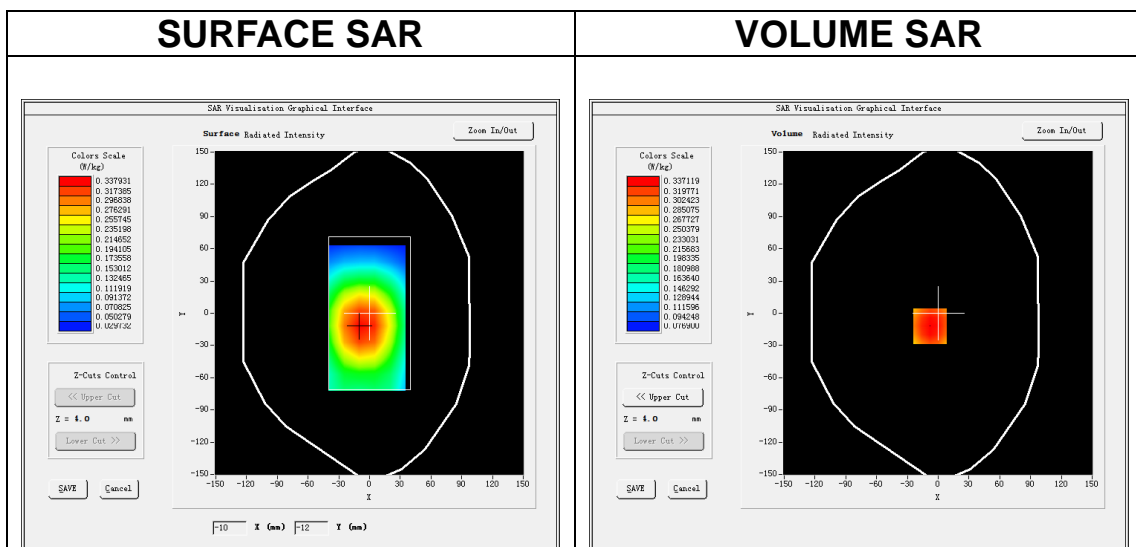

**Maximum location: X=-8.00, Y=-12.00**  
**SAR Peak: 0.40 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.254748 |
| <b>SAR 1g (W/Kg)</b>  | 0.327721 |

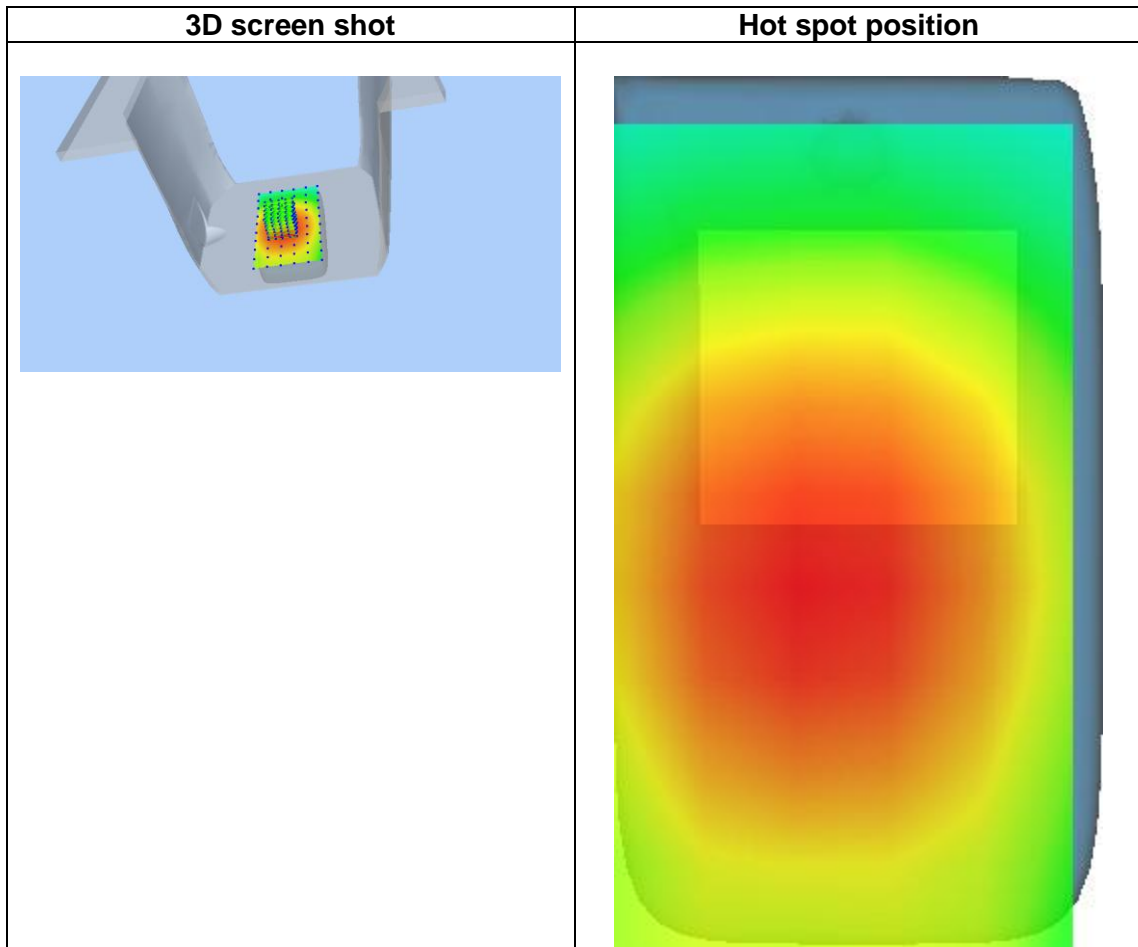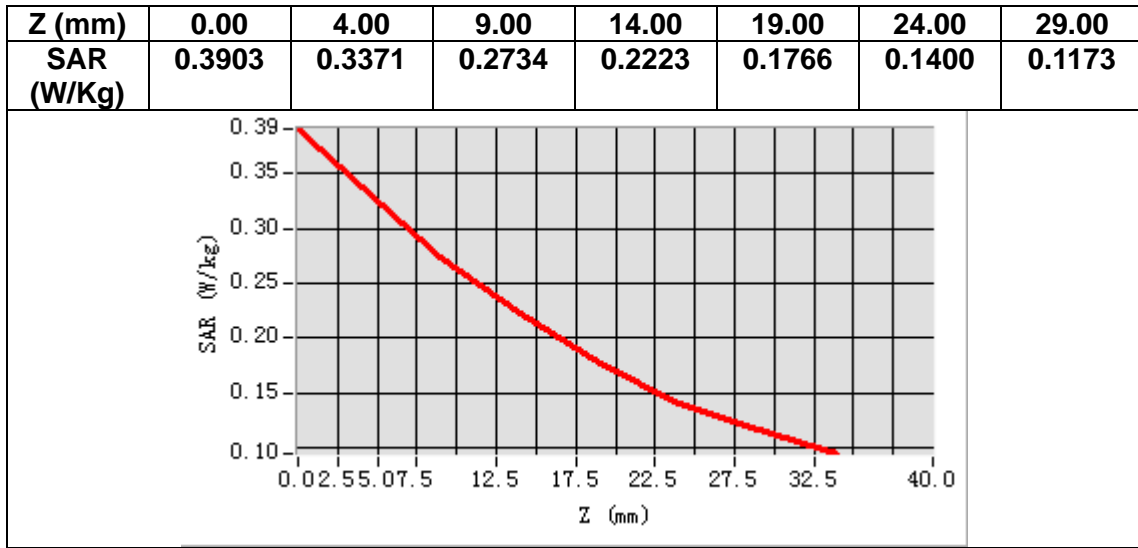

# MEASUREMENT 31


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Left head</u>                   |
| <u>Device Position</u> | <u>Cheek</u>                       |
| <u>Band</u>            | <u>FDDBand26B</u>                  |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>(Crest factor: 1.0)</u>         |
| <u>ConvF</u>           | <u>2.32</u>                        |



## B. SAR Measurement Results

|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 831.500000 |
| <b>Relative permittivity (real part)</b>      | 41.205238  |
| <b>Relative permittivity (imaginary part)</b> | 19.182089  |
| <b>Conductivity (S/m)</b>                     | 0.886106   |
| <b>Variation (%)</b>                          | -0.850000  |

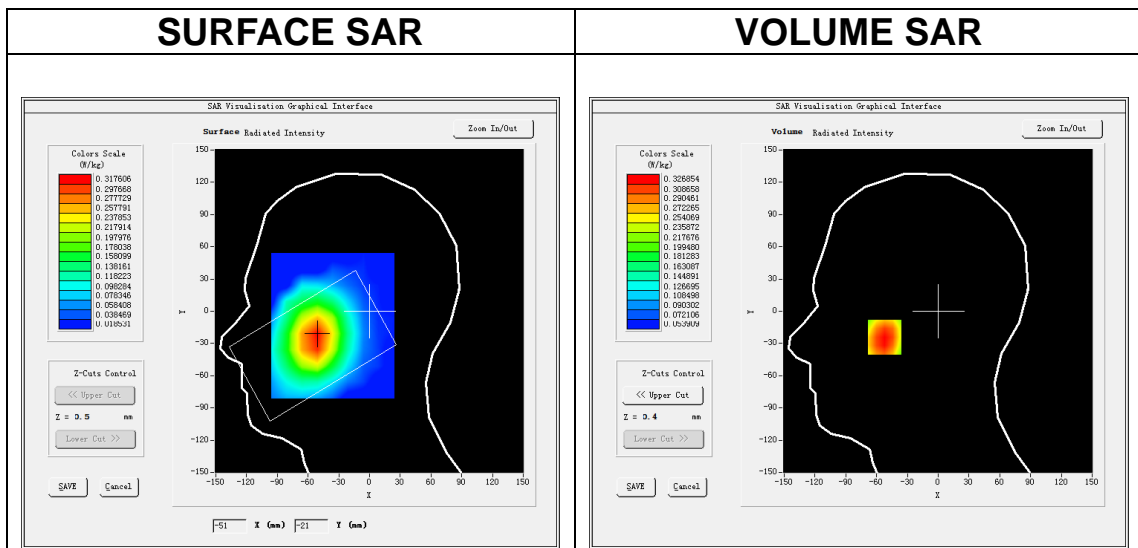

**Maximum location: X=-52.00, Y=-24.00**  
**SAR Peak: 0.38 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.241042 |
| <b>SAR 1g (W/Kg)</b>  | 0.316850 |

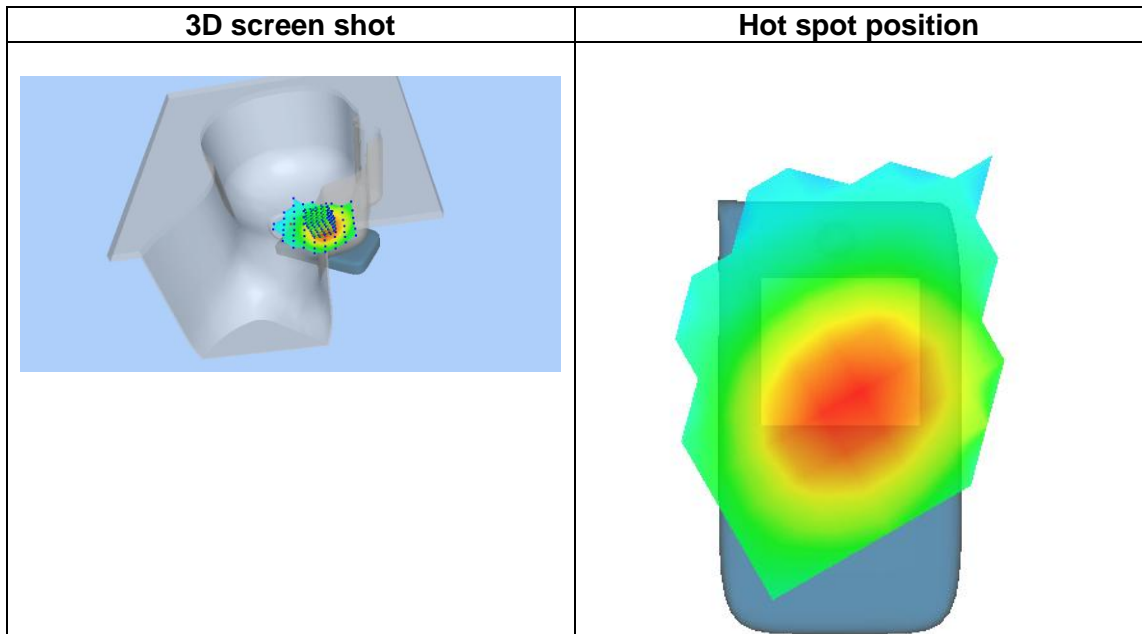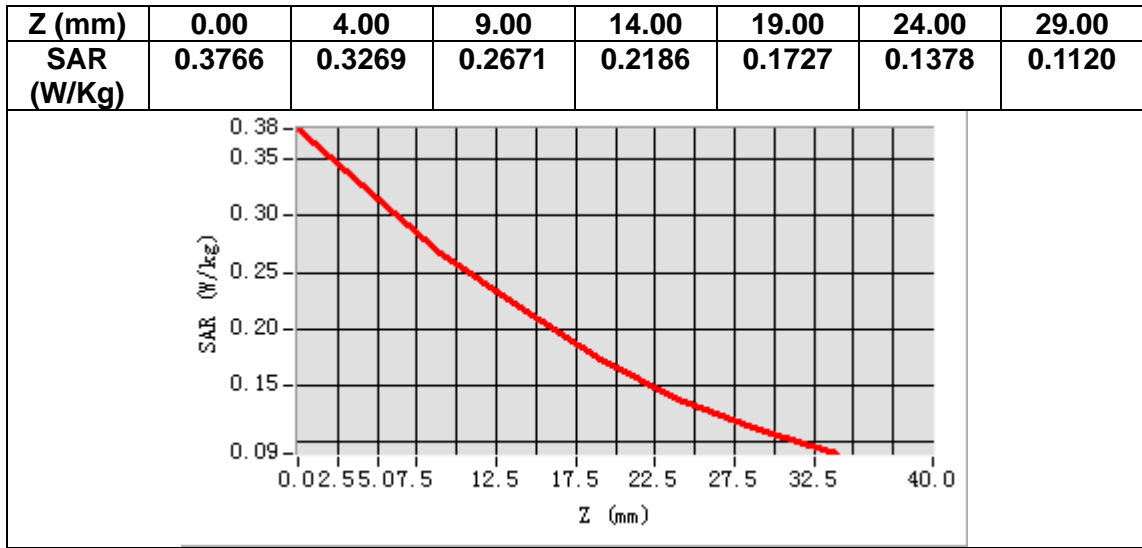

# MEASUREMENT 32


Date of measurement: 20/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>FDDBand26B</u>                  |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>(Crest factor: 1.0)</u>         |
| <u>ConvF</u>           | <u>2.32</u>                        |



## B. SAR Measurement Results

|   |            |
|---|------------|
| <b>Frequency (MHz)</b>                        | 831.500000 |
| <b>Relative permittivity (real part)</b>      | 41.205238  |
| <b>Relative permittivity (imaginary part)</b> | 19.182089  |
| <b>Conductivity (S/m)</b>                     | 0.886106   |
| <b>Variation (%)</b>                          | -0.770000  |

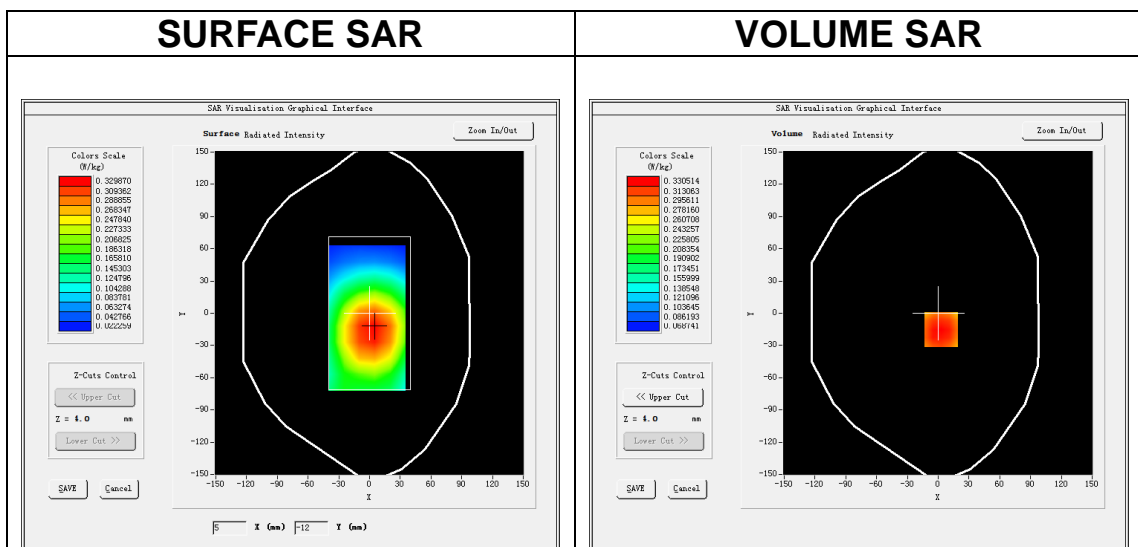

**Maximum location: X=3.00, Y=-15.00**  
**SAR Peak: 0.40 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.245762 |
| <b>SAR 1g (W/Kg)</b>  | 0.321823 |

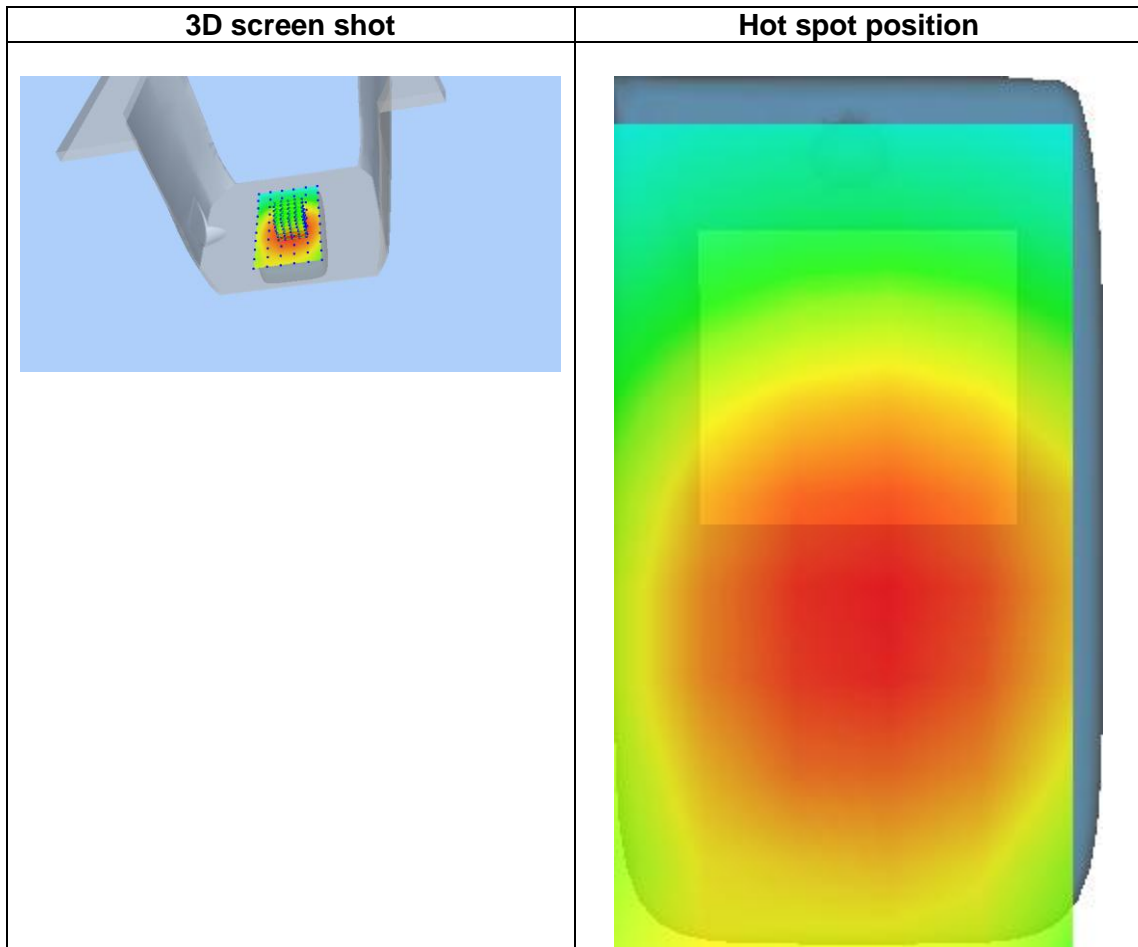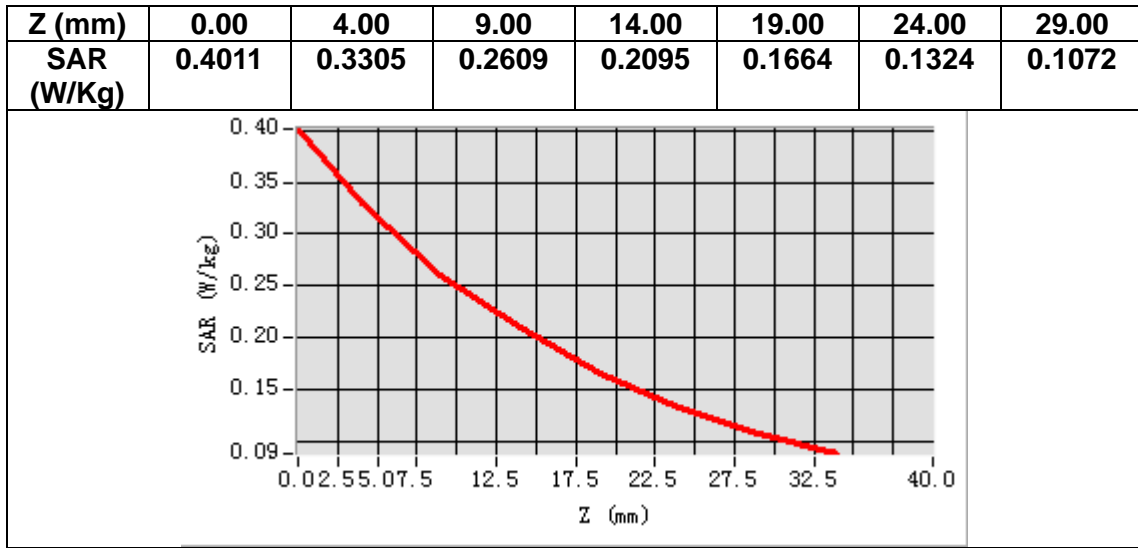

# MEASUREMENT 33


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Left head</u>                   |
| <u>Device Position</u> | <u>Cheek</u>                       |
| <u>Band</u>            | <u>FDDBand66</u>                   |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>(Crest factor: 1.0)</u>         |
| <u>ConvF</u>           | <u>2.45</u>                        |

## B. SAR Measurement Results



|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1745.000000 |
| <b>Relative permittivity (real part)</b>      | 39.444683   |
| <b>Relative permittivity (imaginary part)</b> | 13.736205   |
| <b>Conductivity (S/m)</b>                     | 1.331649    |
| <b>Variation (%)</b>                          | -1.730000   |

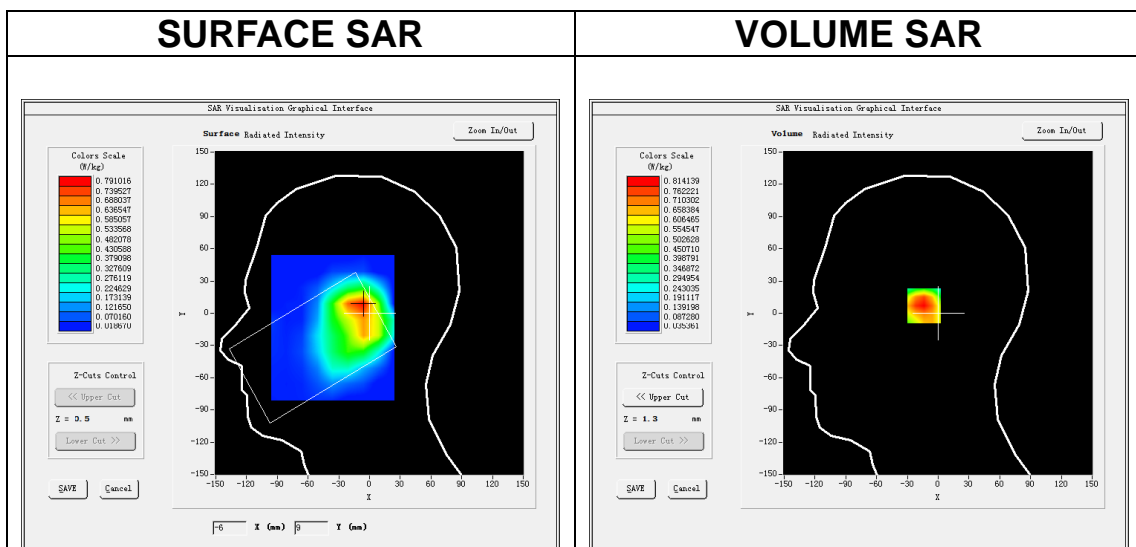

**Maximum location: X=-9.00, Y=7.00**  
**SAR Peak: 1.17 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.468936 |
| <b>SAR 1g (W/Kg)</b>  | 0.779783 |



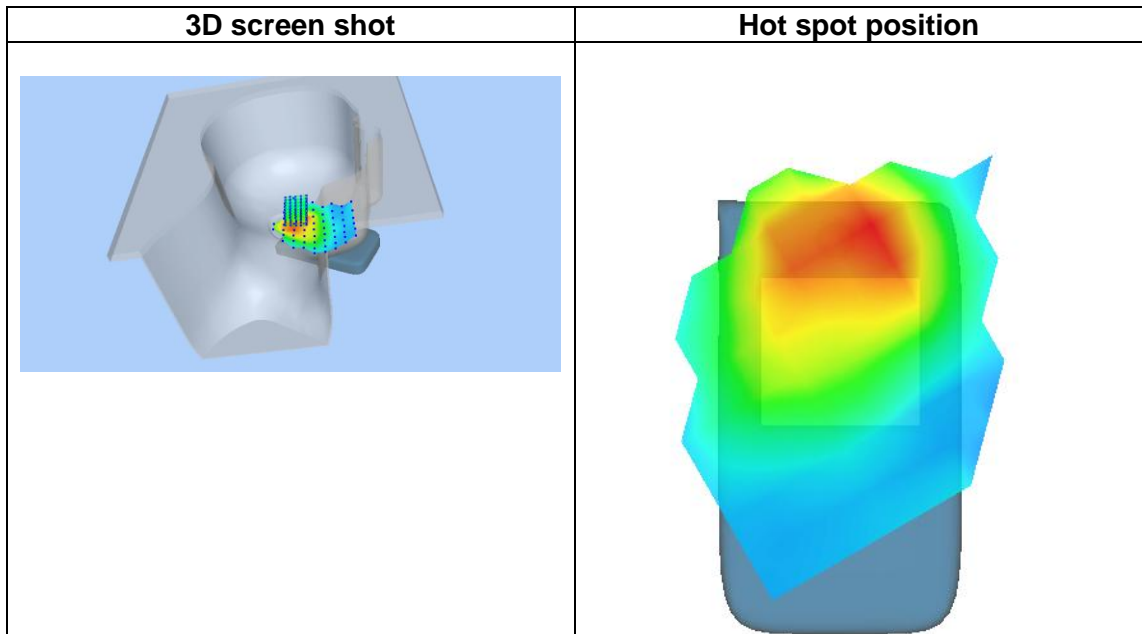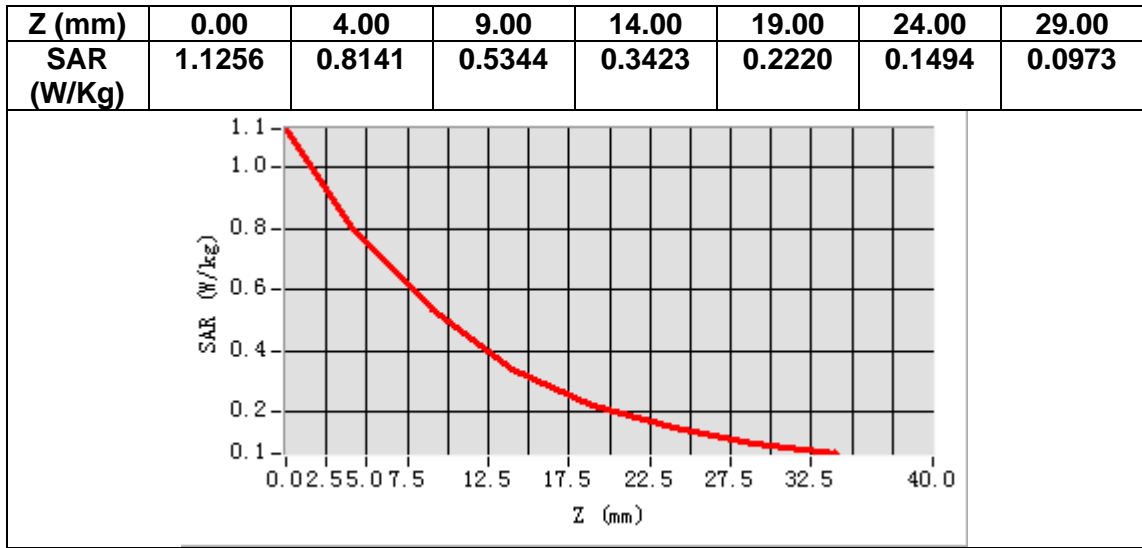

# MEASUREMENT 34


Date of measurement: 21/3/2024

## A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>FDDBand66</u>                   |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>(Crest factor: 1.0)</u>         |
| <b>ConvF</b>           | <u>2.45</u>                        |

## B. SAR Measurement Results


|   |             |
|---|-------------|
| <b>Frequency (MHz)</b>                        | 1745.000000 |
| <b>Relative permittivity (real part)</b>      | 39.444683   |
| <b>Relative permittivity (imaginary part)</b> | 13.736205   |
| <b>Conductivity (S/m)</b>                     | 1.331649    |
| <b>Variation (%)</b>                          | -0.930000   |


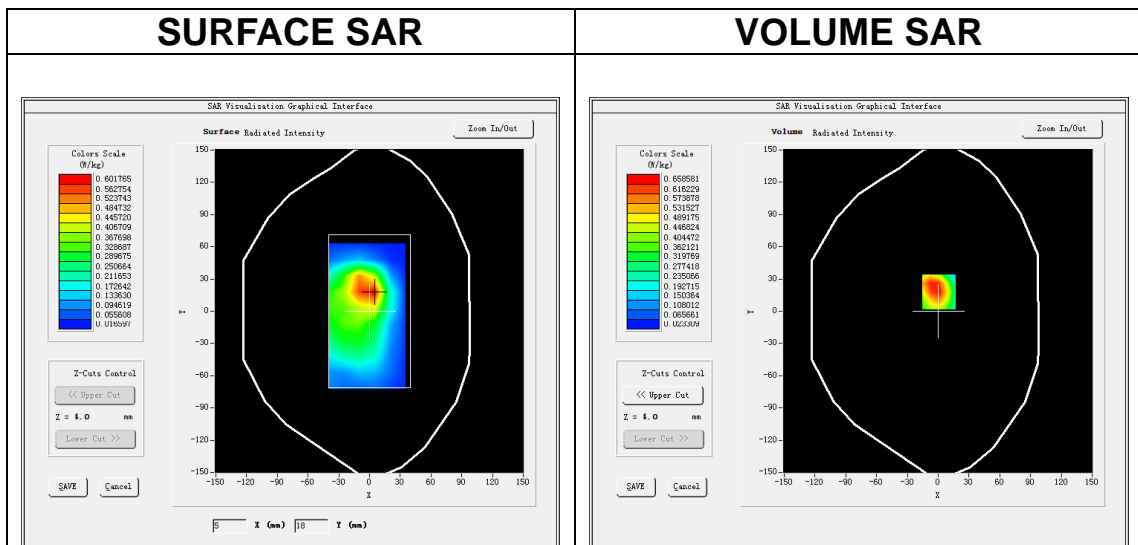


**Maximum location: X=1.00, Y=18.00**  
**SAR Peak: 1.06 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.356779 |
| <b>SAR 1g (W/Kg)</b>  | 0.644719 |

|                   |               |               |               |               |               |               |               |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| <b>Z (mm)</b>     | <b>0.00</b>   | <b>4.00</b>   | <b>9.00</b>   | <b>14.00</b>  | <b>19.00</b>  | <b>24.00</b>  | <b>29.00</b>  |
| <b>SAR (W/Kg)</b> | <b>1.0046</b> | <b>0.6586</b> | <b>0.3836</b> | <b>0.2313</b> | <b>0.1418</b> | <b>0.0893</b> | <b>0.0587</b> |

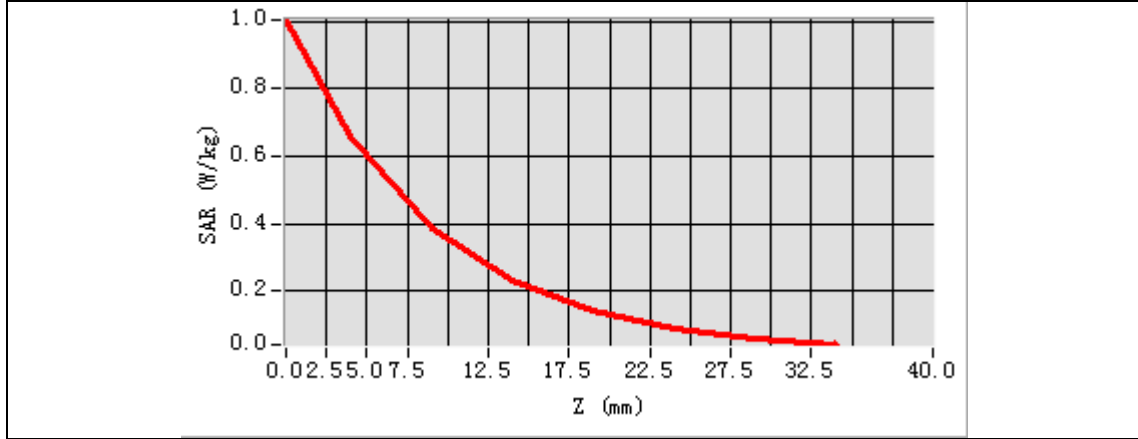
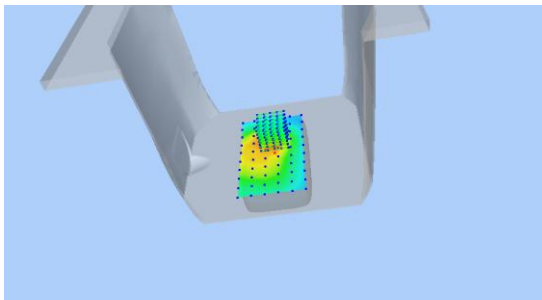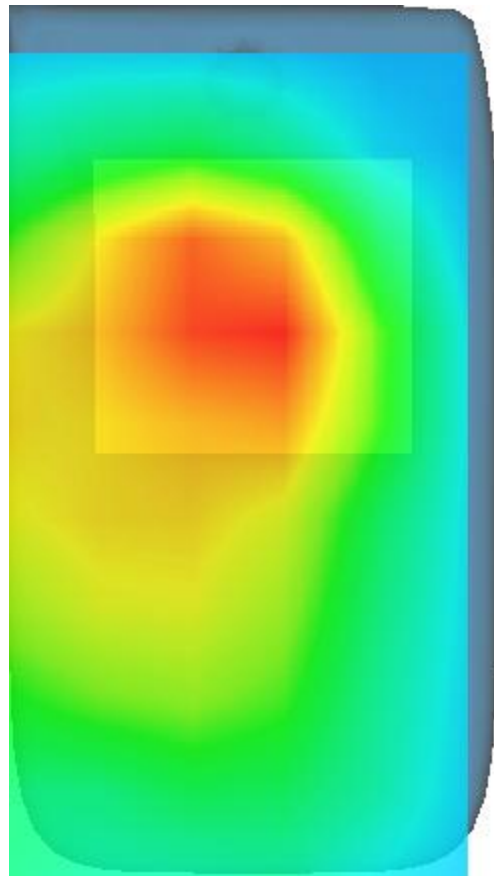
| 3D screen shot  | Hot spot position  |
|---|--|
|  |  |

## 2. Appendix D. Calibration Certificate

| <b>Table of contents</b>                 |
|--|
| E Field Probe - 3423-EPGO-426            |
| 835 MHz Dipole - SN 03/15 DIP 0G835-347  |
| 1800 MHz Dipole - SN 03/15 DIP 1G800-349 |
| 1900 MHz Dipole - SN 03/15 DIP 1G900-350 |
| 2450 MHz Dipole - SN 03/15 DIP 2G450-352 |
| 2600 MHz Dipole - SN 03/15 DIP 2G600-356 |
| 5000-6000 MHz Dipole - SN 13/14 WGA 33   |
| Extended Calibration Certificate         |



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.261.11.23.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY  
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA  
MVG COMOSAR DOSIMETRIC E-FIELD PROBE  
SERIAL NO.: 3423-EPGO-426**

**Calibrated at MVG**

**Z.I. de la pointe du diable**

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE**

**Calibration date: 09/18/2023**



Accreditations #2-6789  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)

**The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.**




### *Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

|                                   | <i>Name</i>   | <i>Function</i>         | <i>Date</i> | <i>Signature</i>  |
|-----------------------------------|---------------|-------------------------|-------------|---|
| <i>Prepared by:</i>               | Cyrille ONNEE | Measurement Responsible | 9/18/2023   |  |
| <i>Checked &amp; approved by:</i> | Jérôme Luc    | Technical Manager       | 9/18/2023   |  |
| <i>Authorized by:</i>             | Yann Toutain  | Laboratory Director     | 9/19/2023   |  |

Yann  
Toutain ID  Signature numérique de Yann Toutain ID  
Date: 2023.09.19 09:08:14 +02'00'

|                       | <i>Customer Name</i>                       |
|-----------------------|--|
| <i>Distribution :</i> | SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD. |

| <i>Issue</i> | <i>Name</i>   | <i>Date</i> | <i>Modifications</i> |
|--------------|---------------|-------------|----------------------|
| A            | Cyrille ONNEE | 9/18/2023   | Initial release      |
|              |               |             |                      |
|              |               |             |                      |
|              |               |             |                      |



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

TABLE OF CONTENTS

1 Device Under Test ..... 4

2 Product Description ..... 4

    2.1 General Information ..... 4

3 Measurement Method ..... 4

    3.1 Sensitivity ..... 4

    3.2 Linearity ..... 5

    3.3 Isotropy ..... 5

    3.4 Boundary Effect ..... 5

4 Measurement Uncertainty ..... 6

5 Calibration Results ..... 6

    5.1 Calibration in air ..... 6

    5.2 Calibration in liquid ..... 7

6 Verification Results ..... 8

7 List of Equipment ..... 9



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

**1 DEVICE UNDER TEST**

| Device Under Test                        |   |
|--|---|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE  |
| Manufacturer                             | MVG   |
| Model                                    | SSE2  |
| Serial Number                            | 3423-EPGO-426   |
| Product Condition (new / used)           | New   |
| Frequency Range of Probe                 | 0.15 GHz-7.5GHz   |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.261 MΩ<br>Dipole 2: R2=0.213 MΩ<br>Dipole 3: R3=0.233 MΩ |

**2 PRODUCT DESCRIPTION**

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

|  |        |
|--|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 2 mm   |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 2.5 mm |
| Distance between dipoles / probe extremity | 1 mm   |

**3 MEASUREMENT METHOD**

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and  $d_{be} + d_{step}$  along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \text{ for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

- $SAR_{uncertainty}$  is the uncertainty in percent of the probe boundary effect
- $d_{be}$  is the distance between the surface and the closest *zoom-scan* measurement point, in millimetre
- $\Delta_{step}$  is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
- $\delta$  is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e.,  $\delta \approx 14$  mm at 3 GHz;
- $\Delta SAR_{be}$  in percent of SAR is the deviation between the measured SAR value, at the distance  $d_{be}$  from the boundary, and the analytical SAR value.

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

| Ambient condition  |             |
|--------------------|-------------|
| Liquid Temperature | 20 +/- 1 °C |
| Lab Temperature    | 20 +/- 1 °C |
| Lab Humidity       | 30-70 %     |

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

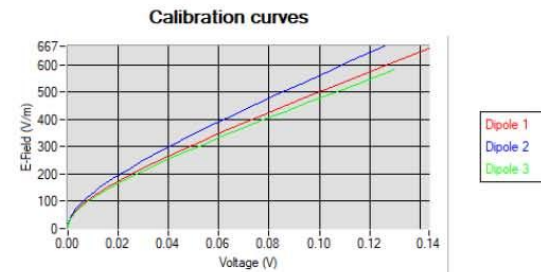

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

Vi=voltage readings on the 3 channels of the probe

DCPi=diode compression point given below for the 3 channels of the probe

Normi=dipole sensitivity given below for the 3 channels of the probe



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

|   |   |   |
|---|---|---|
| Normx dipole 1 (μV/(V/m) <sup>2</sup> ) | Normy dipole 2 (μV/(V/m) <sup>2</sup> ) | Normz dipole 3 (μV/(V/m) <sup>2</sup> ) |
| 0.78                                    | 0.62                                    | 0.85                                    |

|                   |                   |                   |
|-------------------|-------------------|-------------------|
| DCP dipole 1 (mV) | DCP dipole 2 (mV) | DCP dipole 3 (mV) |
| 105               | 108               | 107               |

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$ConvF = \frac{E_{liquid}^2}{E_{air}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{liquid}^2 = \frac{\rho SAR}{\sigma}$$

where

σ=the conductivity of the liquid

ρ=the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$SAR = c \frac{dT}{dt}$$

where

c=the specific heat for the liquid

dT/dt=the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$SAR = \frac{4P_w}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

a=the larger cross-sectional of the waveguide

b=the smaller cross-sectional of the waveguide

δ=the skin depth for the liquid in the waveguide

Pw=the power delivered to the liquid





COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.


| Liquid | Frequency (MHz*) | ConvF |
|--------|------------------|-------|
| HL750  | 750              | 2.37  |
| HL850  | 835              | 2.32  |
| HL900  | 900              | 2.23  |
| HL1800 | 1800             | 2.45  |
| HL1900 | 1900             | 2.63  |
| HL2000 | 2000             | 2.83  |
| HL2300 | 2300             | 2.81  |
| HL2450 | 2450             | 2.85  |
| HL2600 | 2600             | 2.65  |
| HL3300 | 3300             | 2.21  |
| HL3500 | 3500             | 2.20  |
| HL3700 | 3700             | 2.11  |
| HL3900 | 3900             | 2.40  |
| HL4200 | 4200             | 2.40  |
| HL4600 | 4600             | 2.33  |
| HL4900 | 4900             | 2.37  |
| HL5200 | 5200             | 2.07  |
| HL5400 | 5400             | 2.11  |
| HL5600 | 5600             | 2.20  |
| HL5800 | 5800             | 2.04  |

(\*) Frequency validity is +/-50MHz below 600MHz, +/-100MHz from 600MHz to 6GHz and +/-700MHz above 6GHz




6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is +/-0.2 dB for linearity and +/-0.15 dB for axial isotropy.

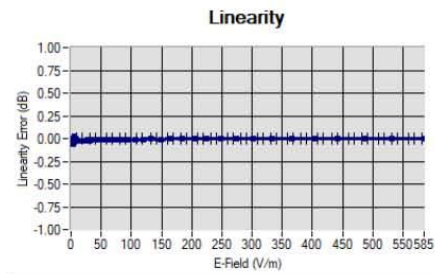

Linearity +/- 1.42% (+/- 0.06dB)



Isotropy +/- 0.21% (+/- 0.01dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

7 LIST OF EQUIPMENT

| Equipment Summary Sheet            |                         |                        |   |   |
|------------------------------------|-------------------------|------------------------|---|---|
| Equipment Description              | Manufacturer / Model    | Identification No.     | Current Calibration Date                      | Next Calibration Date                         |
| CALIPROBE Test Bench               | Version 2               | NA                     | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                   | Rohde & Schwarz ZVM     | 100203                 | 08/2021                                       | 08/2024                                       |
| Network Analyzer                   | Agilent 8753ES          | MY40003210             | 10/2019                                       | 10/2023                                       |
| Network Analyzer – Calibration kit | HP 85033D               | 3423A08186             | 06/2021                                       | 06/2027                                       |
| Network Analyzer – Calibration kit | Rohde & Schwarz ZV-Z235 | 101223                 | 07/2022                                       | 07/2025                                       |
| Multimeter                         | Keithley 2000           | 4013982                | 02/2023                                       | 02/2026                                       |
| Signal Generator                   | Rohde & Schwarz SMB     | 106589                 | 03/2022                                       | 03/2025                                       |
| Amplifier                          | MVG                     | MODU-023-C-0002        | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                        | NI-USB 5680             | 170100013              | 06/2021                                       | 06/2024                                       |
| Power Meter                        | Keysight U2000A         | SN: MY62340002         | 10/2022                                       | 10/2025                                       |
| Directional Coupler                | Krytar 158020           | 131467                 | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Fluoroptic Thermometer             | LumaSense Luxtron 812   | 94264                  | 09/2022                                       | 09/2025                                       |
| Coaxial cell                       | MVG                     | SN 32/16 COAXCELL_1    | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                          | MVG                     | SN 32/16 WG2_1         | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition                  | MVG                     | SN 32/16 WGLIQ_0G600_1 | Validated. No cal required.                   | Validated. No cal required.                   |

Page: 9/10

Template\_ACR.DDD.N.YY.MVGB.ISSUE\_COMOSAR Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.261.11.23.BES.A

|                               |              |                         |                             |                             |
|-------------------------------|--------------|-------------------------|-----------------------------|-----------------------------|
| Waveguide                     | MVG          | SN 32/16 WG4_1          | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_0G900_1  | Validated. No cal required. | Validated. No cal required. |
| Waveguide                     | MVG          | SN 32/16 WG6_1          | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_1G500_1  | Validated. No cal required. | Validated. No cal required. |
| Waveguide                     | MVG          | SN 32/16 WG8_1          | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_1G800B_1 | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_1G800H_1 | Validated. No cal required. | Validated. No cal required. |
| Waveguide                     | MVG          | SN 32/16 WG10_1         | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_3G500_1  | Validated. No cal required. | Validated. No cal required. |
| Waveguide                     | MVG          | SN 32/16 WG12_1         | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_5G000_1  | Validated. No cal required. | Validated. No cal required. |
| Waveguide                     | MVG          | SN 32/16 WG14_1         | Validated. No cal required. | Validated. No cal required. |
| Liquid transition             | MVG          | SN 32/16 WGLIQ_7G000_1  | Validated. No cal required. | Validated. No cal required. |
| Temperature / Humidity Sensor | Testo 184 H1 | 44225320                | 06/2021                     | 06/2024                     |



## SAR Reference Dipole Calibration Report

Ref : ACR.53.24.24.BES.A

**SHENZHEN NTEK TESTING TECHNOLOGY  
CO., LTD.**

**BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA**

**MVG COMOSAR REFERENCE DIPOLE**

**FREQUENCY: 835 MHZ**

**SERIAL NO.: SN 03/15DIP0G835-347**

**Calibrated at MVG**

**Z.I. de la pointe du diable**

**Technopôle Brest Iroise – 295 avenue Alexis de Rochon**

**29280 PLOUZANE - FRANCE**

**Calibration date: 02/21/2024**



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)

**The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.**

### *Summary:*

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.