

## 4.3 OUTPUT POWER MEASUREMENT

### 4.3.1 Test Limit

According to §15.407 (a)(1), 15.407(a)(2) and 15.407(a)(3),

#### UNII-1 :

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24 dBm), whichever power is less. B is the 99% emission bandwidth in megahertz, provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### UNII-2a and 2c:

the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. and The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Report No.: T200928D02-RP4

**UNII-3:**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

UNII-1 Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 24dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 24 – (DG – 6)]
UNII-2a/2c Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 24dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 24 – (DG – 6)]
UNII-3 Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)]


**4.3.2 Test Procedure**

Test method Refer as KDB 789033 D02, Section E.3.b for BW 20MHz and 40MHz, E.2.b for BW 80MHz.


1. The EUT RF output connected to the power meter or spectrum by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Average output power. in the test report.

**4.3.3 Test Setup**

For BW 20MHz and 40MHz

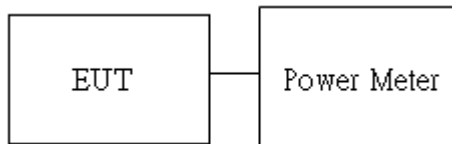

For BW 80MHz

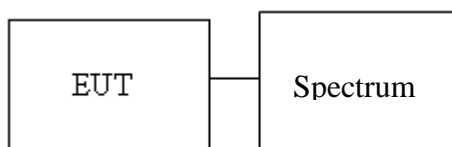

Report No.: T200928D02-RP4

### 4.3.4 Test Result

#### Conducted output power :

Temperature: 25.1°C

Humidity: 54% RH

Tested by: Rick Lee

Test date: December 1, 2020

UNII-1										
Config	CH	Freq. (MHz)	Power Set		AV Power (dBm)		AV Total Power (dBm)	AV Total Power (W)	DG (dBi)	Limit (dBm)
			Chain 0	Chain 1	Chain 0	Chain 1				
IEEE 802.11a Data rate: 6Mbps	36	5180	8	8	7.69	7.62	10.67	0.0059	3.35	24
	44	5220	8	8	7.96	7.80	<b>10.89</b>	0.0063		
	48	5240	8	8	7.69	7.63	10.67	0.0059		
IEEE 802.11n HT20 Data rate: MCS8	36	5180	6	6	5.98	5.96	<b>8.98</b>	0.0079		
	44	5220	6	6	5.94	5.90	8.93	0.0078		
	48	5240	6	6	5.97	5.93	8.96	0.0079		
IEEE 802.11n HT40 Data rate: MCS8	38	5190	6	6	5.97	5.96	<b>8.98</b>	0.0079		
	46	5230	6	6	5.93	5.91	8.93	0.0078		
IEEE 802.11ac VHT80 Data rate: MCS8	42	5210	5	5	5.83	5.79	<b>8.82</b>	0.0076		

Report No.: T200928D02-RP4

UNII-2a										
Config	CH	Freq. (MHz)	Power Set		AV Power (dBm)		AV Total Power (dBm)	AV Total Power (W)	DG (dBi)	Limit (dBm)
			Chain 0	Chain 1	Chain 0	Chain 1				
IEEE 802.11a Data rate: 6Mbps	52	5260	8	8	7.66	7.59	10.64	0.0057	3.35	24
	56	5280	8	8	7.65	7.73	<b>10.70</b>	0.0059		
	64	5320	8	8	7.51	7.33	10.43	0.0054		
IEEE 802.11n HT20 Data rate: MCS8	52	5260	6	6	5.98	5.93	8.97	0.0079		
	56	5280	6	6	5.96	5.91	8.95	0.0079		
	64	5320	6	6	5.98	5.97	<b>8.99</b>	0.0079		
IEEE 802.11n HT40 Data rate: MCS8	54	5270	6	6	5.94	5.96	8.96	0.0079		
	62	5310	6	6	5.97	5.94	<b>8.97</b>	0.0079		
IEEE 802.11ac VHT80 Data rate: MCS8	58	5290	5	5	5.79	5.72	<b>8.77</b>	0.0075		

Report No.: T200928D02-RP4

UNII-2c										
Config	CH	Freq. (MHz)	Power Set		AV Power (dBm)		AV Total Power (dBm)	AV Total Power (W)	DG (dBi)	Limit (dBm)
			Chain 0	Chain 1	Chain 0	Chain 1				
IEEE 802.11a Data rate: 6Mbps	100	5500	8	8	7.62	7.59	<b>10.62</b>	0.0058	3.35	24
	116	5580	8	8	7.56	7.53	10.56	0.0057		
	140	5700	8	8	7.57	7.51	10.55	0.0057		
IEEE 802.11n HT20 Data rate: MCS8	100	5500	5	5	5.53	5.56	8.56	0.0072		
	116	5580	5	5	5.71	5.69	8.71	0.0074		
	140	5700	5	5	5.98	5.97	<b>8.99</b>	0.0079		
IEEE 802.11n HT40 Data rate: MCS8	102	5510	5	5	5.73	5.69	<b>8.72</b>	0.0074		
	110	5550	5	5	5.60	5.59	8.61	0.0073		
	134	5670	5	5	5.59	5.53	8.57	0.0072		
IEEE 802.11ac VHT80 Data rate: MCS8	106	5530	4	4	5.57	5.56	<b>8.58</b>	0.0072		
	122	5610	4	4	5.59	5.51	8.56	0.0036		

Report No.: T200928D02-RP4

UNII-3										
Config	CH	Freq. (MHz)	Power Set		AV Power (dBm)		AV Total Power (dBm)	AV Total Power (W)	DG (dBi)	Limit (dBm)
			Chain 0	Chain 1	Chain 0	Chain 1				
IEEE 802.11a Data rate: 6Mbps	149	5745	7	7	7.59	7.56	<b>10.58</b>	0.0057	3.35	30
	157	5785	7	7	7.56	7.53	10.56	0.0057		
	165	5825	7	7	7.54	7.51	10.54	0.0057		
IEEE 802.11n HT20 Data rate: MCS8	149	5745	7	7	7.74	7.95	<b>10.86</b>	0.0122		
	157	5785	7	7	7.74	7.96	10.86	0.0122		
	165	5825	7	7	7.69	7.92	10.82	0.0121		
IEEE 802.11n HT40 Data rate: MCS8	151	5755	6	6	6.82	6.70	9.77	0.0095		
	159	5795	6	6	6.98	6.87	<b>9.94</b>	0.0099		
IEEE 802.11ac VHT80 Data rate: MCS8	155	5775	5	5	6.60	6.53	<b>9.58</b>	0.0091		

Report No.: T200928D02-RP4

## 4.4 POWER SPECTRAL DENSITY

### 4.4.1 Test Limit

According to §15.407 (a)(1), 15.407(a)(2) and 15.407(a)(3)

#### UNII-1 :

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

#### UNII-2a and 2c:

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### UNII-3:

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

UNII-1 Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-2a Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-2c Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-3 Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30 dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)]


Report No.: T200928D02-RP4

#### 4.4.2 Test Procedure

Test method Refer as KDB 789033 D02

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. UNII-1, UNII-2a and UNII-2c, SA set RBW = 1MHz, VBW = 3MHz and Detector = RMS, to measurement Power Density.
4. UNII-3, SA set RBW = 500kHz, VBW = 2MHz and Detector = RMS, to measurement Power Density
5. The path loss and Duty Factor were compensated to the results for each measurement by SA.
6. Mark the maximum level.
7. Measure and record the result of power spectral density. in the test report.

#### 4.4.3 Test Setup

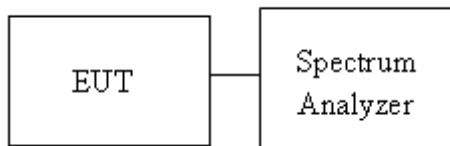



Report No.: T200928D02-RP4

#### 4.4.4 Test Result

##### Chain 0

**Temperature:** 24.6°C                      **Humidity:** 53.5% RH  
**Tested by:** Rick Lee                      **Test date:** November 16, 2020

##### Chain 1

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

UNII-1 5150-5250 MHz					
Test mode: IEEE 802.11a mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5180	-2.615	-2.756	0.33	11
Mid	5220	-2.946	-3.258	-0.09	
High	5240	-3.246	-3.261	-0.24	
Test mode: IEEE 802.11n HT20 mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5180	-2.573	-3.189	0.14	11
Mid	5220	-3.385	-3.403	-0.38	
High	5240	-3.14	-3.387	-0.25	
Test mode: IEEE 802.11n HT40 mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5190	-6.920	-7.259	-4.08	11
High	5230	-7.238	-7.465	-4.34	
Test mode: IEEE 802.11ac VHT80 mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5210	-10.362	-11.221	-7.76	11

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.6°C                      **Humidity:** 53.5% RH  
**Tested by:** Rick Lee                      **Test date:** November 16, 2020

**Chain 1**

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

<b>UNII-2a 5250-5350 MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5260	-3.212	-3.234	-0.21	11
Mid	5280	-3.089	-2.749	0.09	
High	5320	-2.851	-3.033	0.07	
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5260	-3.227	-3.244	-0.23	11
Mid	5280	-3.113	-3.141	-0.12	
High	5320	-3.076	-3.284	-0.17	

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.1°C                      **Humidity:** 54.2% RH  
**Tested by:** Rick Lee                      **Test date:** November 17, 2020

**Chain 1**

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

<b>UNII-2a 5250-5350 MHz</b>					
<b>Test mode: IEEE 802.11n HT40 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5270	-6.559	-7.211	-3.86	11
High	5310	-6.680	-7.214	-3.93	
<b>Test mode: IEEE 802.11ac VHT80 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5290	-9.692	-10.158	-6.91	11

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.6°C

**Humidity:** 53.5% RH

**Tested by:** Rick Lee

**Test date:** November 16, 2020

**Chain 1**

**Temperature:** 25.9°C

**Humidity:** 50% RH

**Tested by:** Rick Lee

**Test date:** November 24, 2020

<b>UNII-2c 5470-5725 MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5500	-2.573	-2.637	0.41	11
Mid	5580	-2.210	-2.070	0.87	
High	5700	-1.548	-1.437	1.52	
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5500	-2.533	-2.660	0.41	11
Mid	5580	-2.412	-2.230	0.69	
High	5700	-1.595	-1.848	1.29	

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.1°C                      **Humidity:** 54.2% RH  
**Tested by:** Rick Lee                      **Test date:** November 17, 2020

**Chain 1**

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

<b>UNII-2c 5470-5725 MHz</b>					
<b>Test mode: IEEE 802.11n HT40 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5510	-6.488	-6.754	-3.61	11
Mid	5550	-6.043	-6.564	-3.29	
High	5670	-5.792	-5.600	-2.68	
<b>Test mode: IEEE 802.11ac VHT80 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5530	-10.219	-10.704	-7.44	11
High	5610	-10.097	-10.135	-7.11	

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.6°C                      **Humidity:** 53.5% RH  
**Tested by:** Rick Lee                      **Test date:** November 16, 2020

**Chain 1**

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

<b>UNII-3 5725-5825 MHz</b>					
<b>Test mode: IEEE 802.11a mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5745	-5.292	-5.293	-2.28	30
Mid	5785	-5.368	-4.934	-2.14	
High	5825	-5.505	-5.357	-2.42	
<b>Test mode: IEEE 802.11n HT20 mode</b>					
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Chain 0 PPSD (dBm)</b>	<b>Chain 1 PPSD (dBm)</b>	<b>Total PPSD (dBm)</b>	<b>Limit (dBm)</b>
Low	5745	-6.375	-6.073	-3.21	30
Mid	5785	-6.380	-6.239	-3.30	
High	5825	-6.618	-6.144	-3.36	

Report No.: T200928D02-RP4

**Chain 0**

**Temperature:** 24.1°C                      **Humidity:** 54.2% RH  
**Tested by:** Rick Lee                      **Test date:** November 17, 2020


**Chain 1**

**Temperature:** 25.9°C                      **Humidity:** 50% RH  
**Tested by:** Rick Lee                      **Test date:** November 24, 2020

Test mode: IEEE 802.11n HT40 mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5755	-10.011	-9.877	-6.93	30
High	5795	-10.116	-10.090	-7.09	
Test mode: IEEE 802.11ac VHT80 mode					
Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)
Low	5775	-13.990	-14.733	-11.34	30


Report No.: T200928D02-RP4

## Test Data

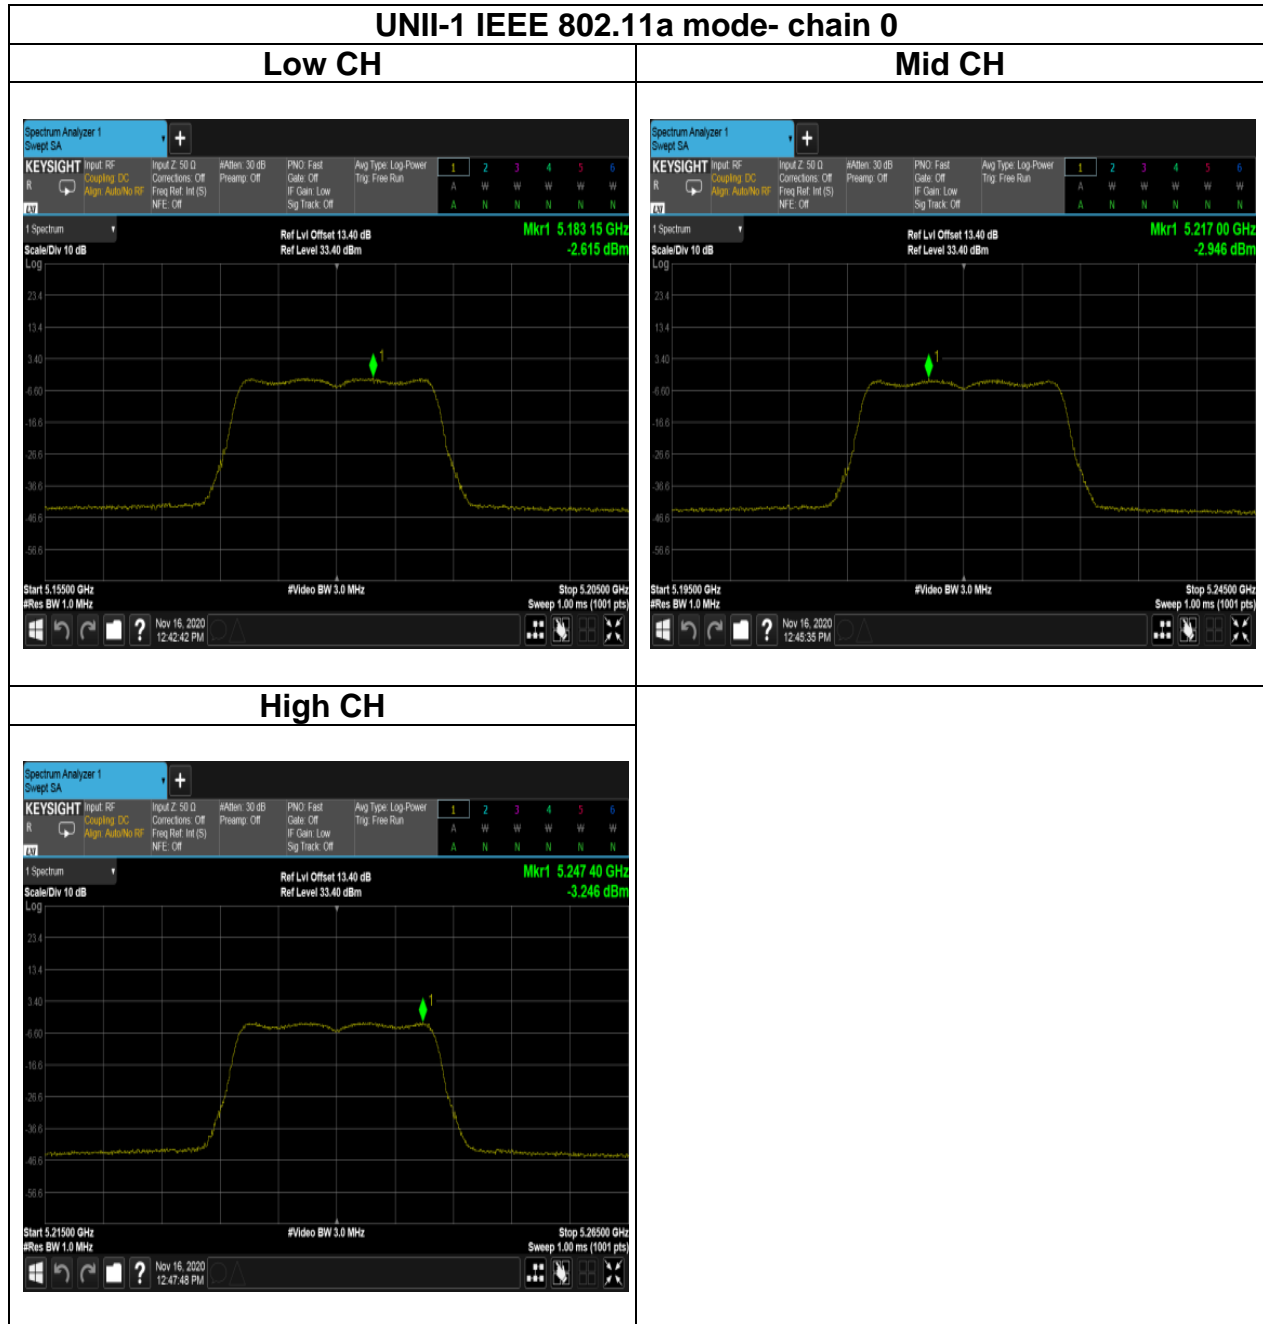




Report No.: T200928D02-RP4

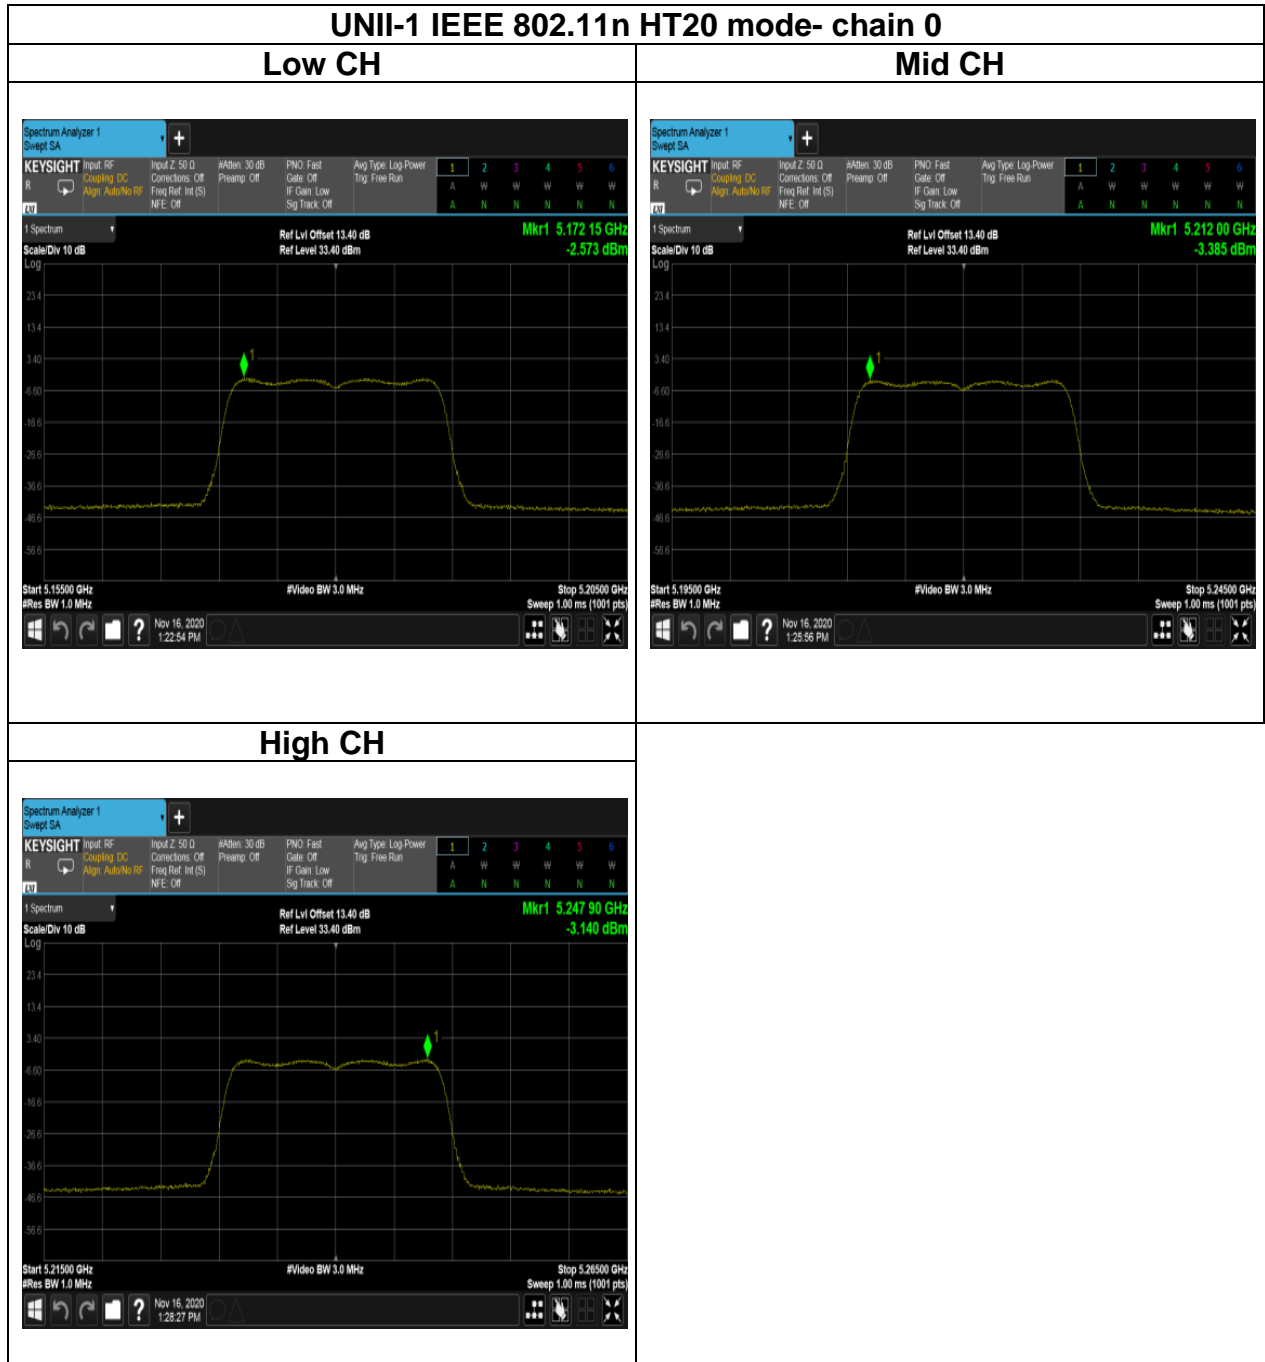


Report No.: T200928D02-RP4

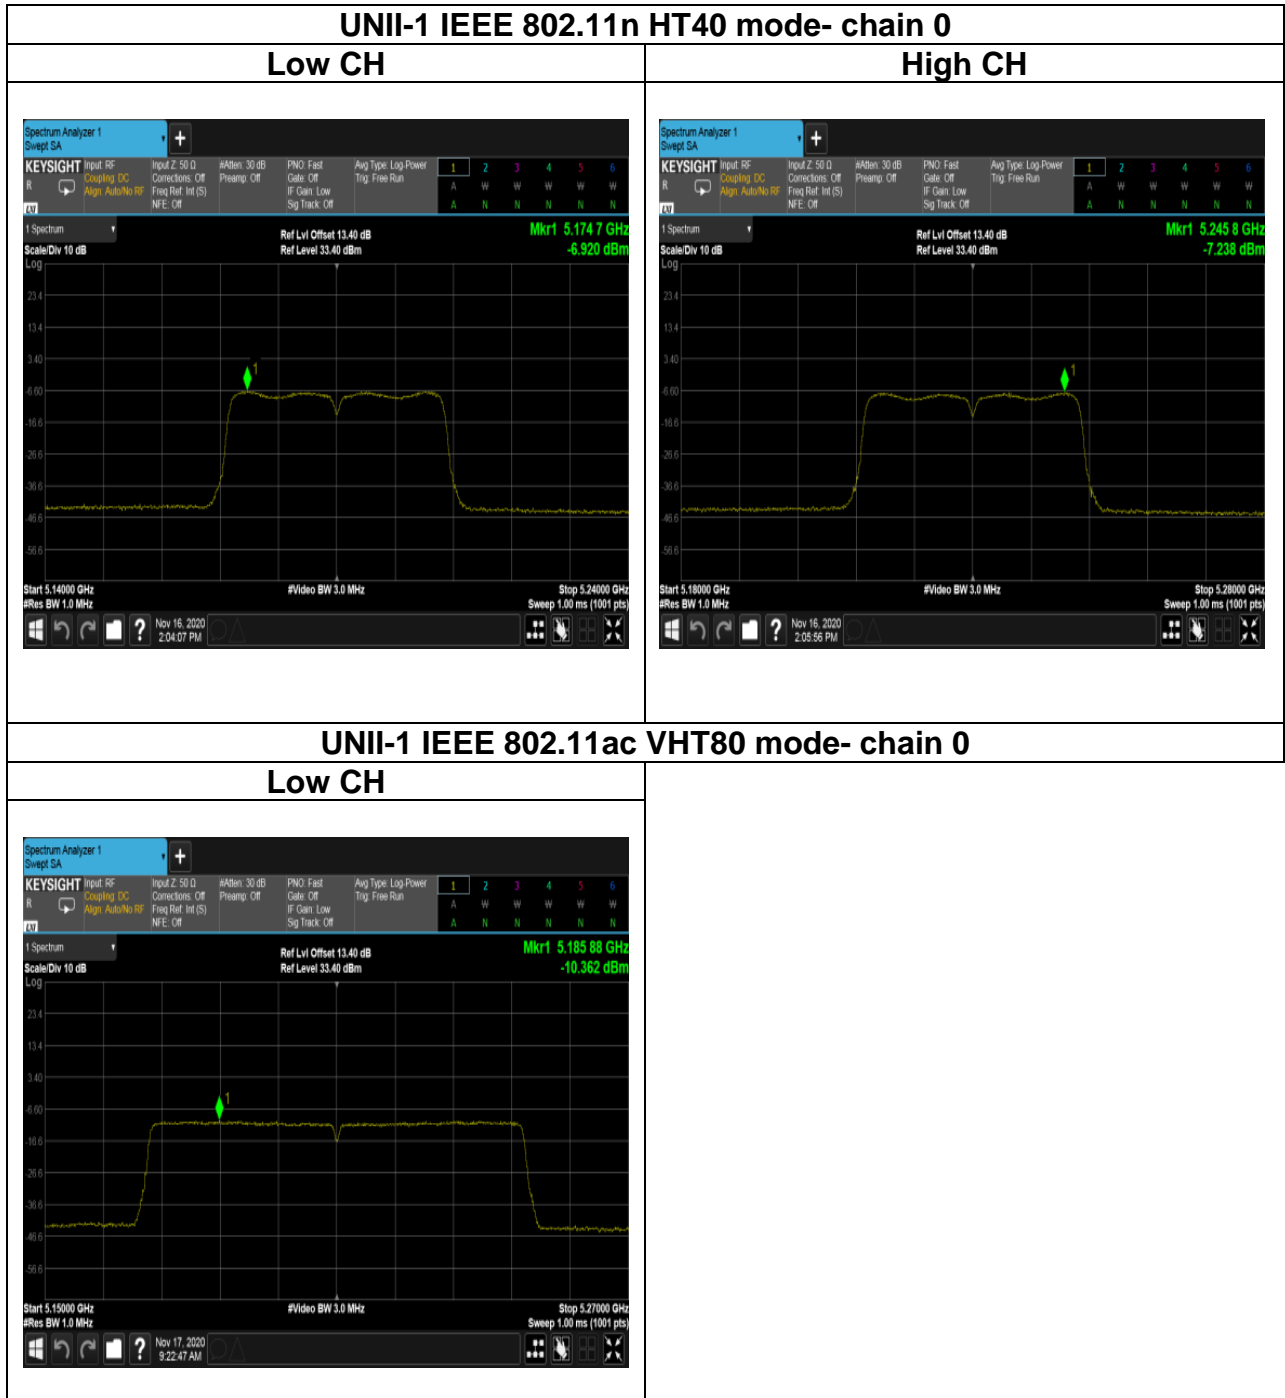


Report No.: T200928D02-RP4


## Test Data

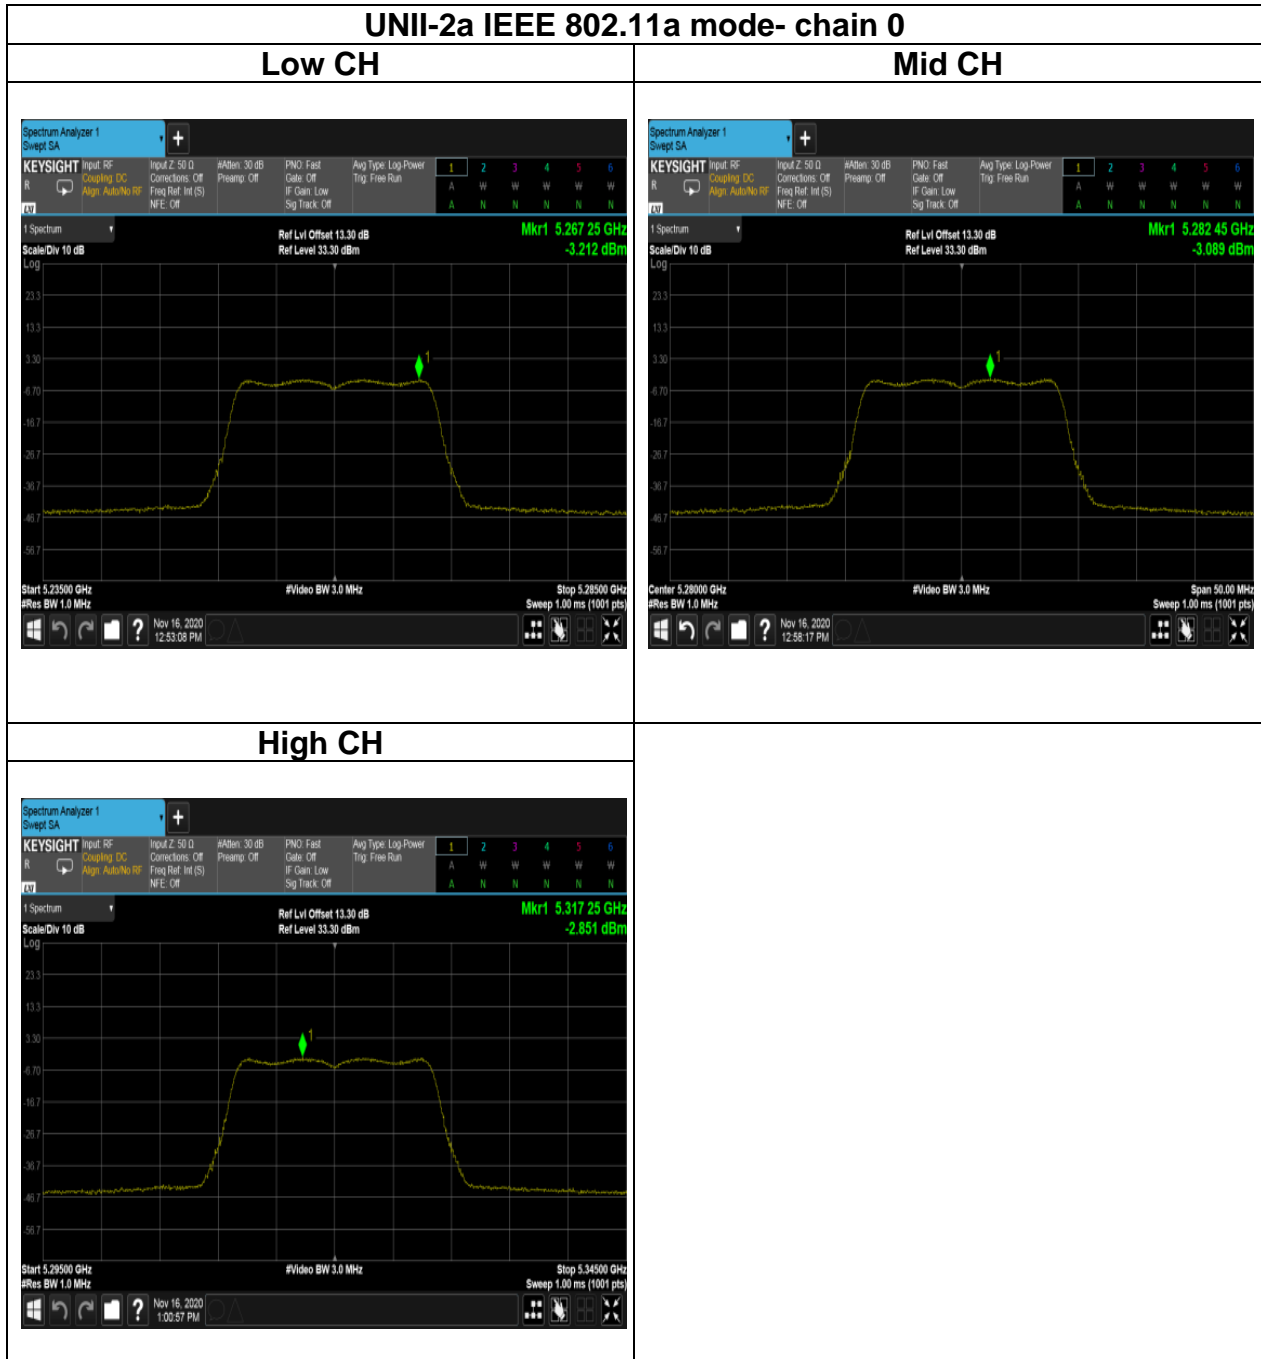


Report No.: T200928D02-RP4

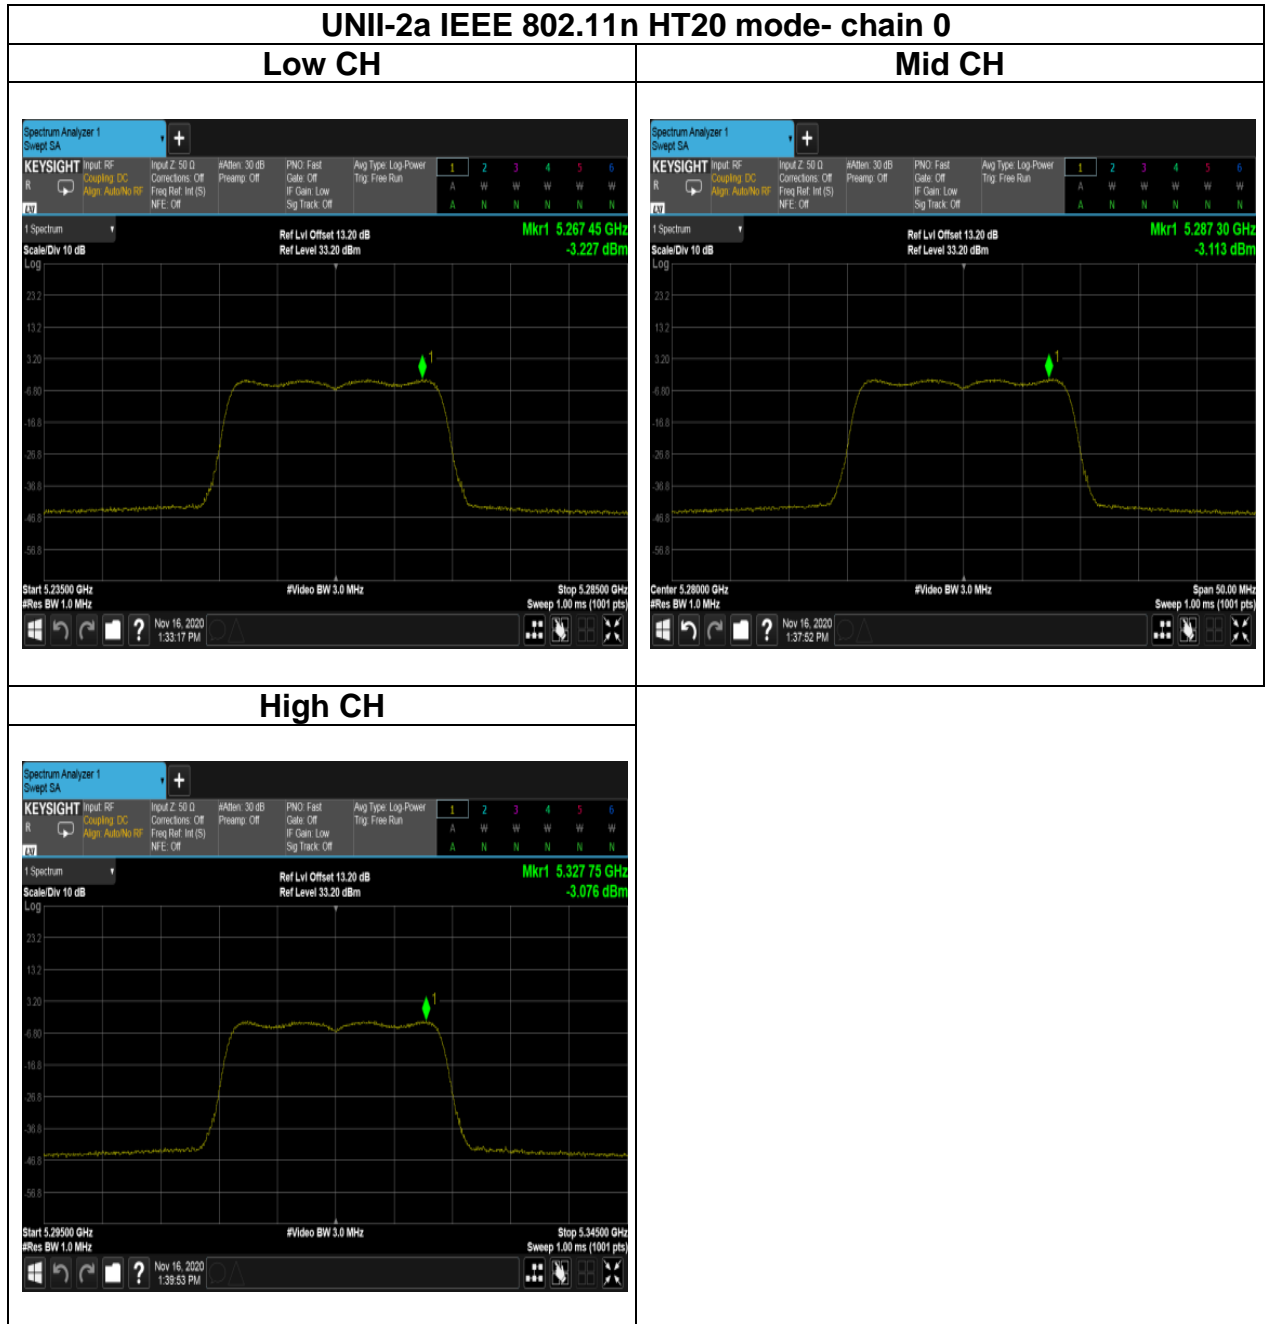


Report No.: T200928D02-RP4

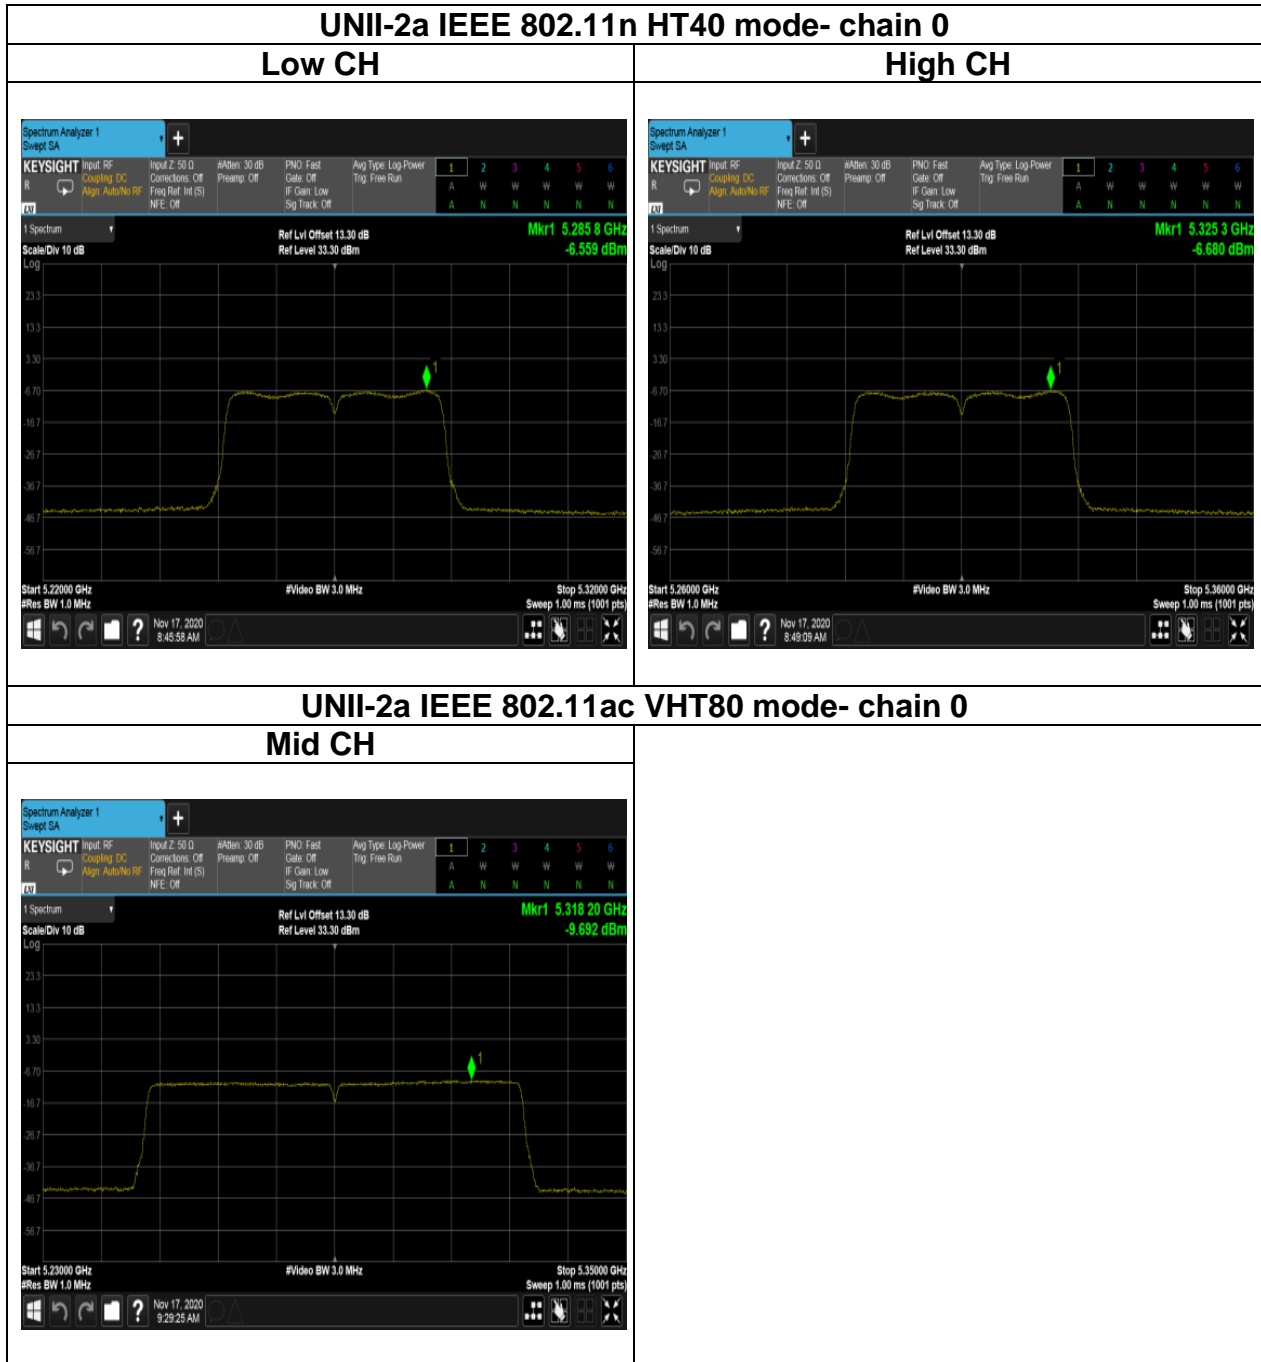


**Test Data**

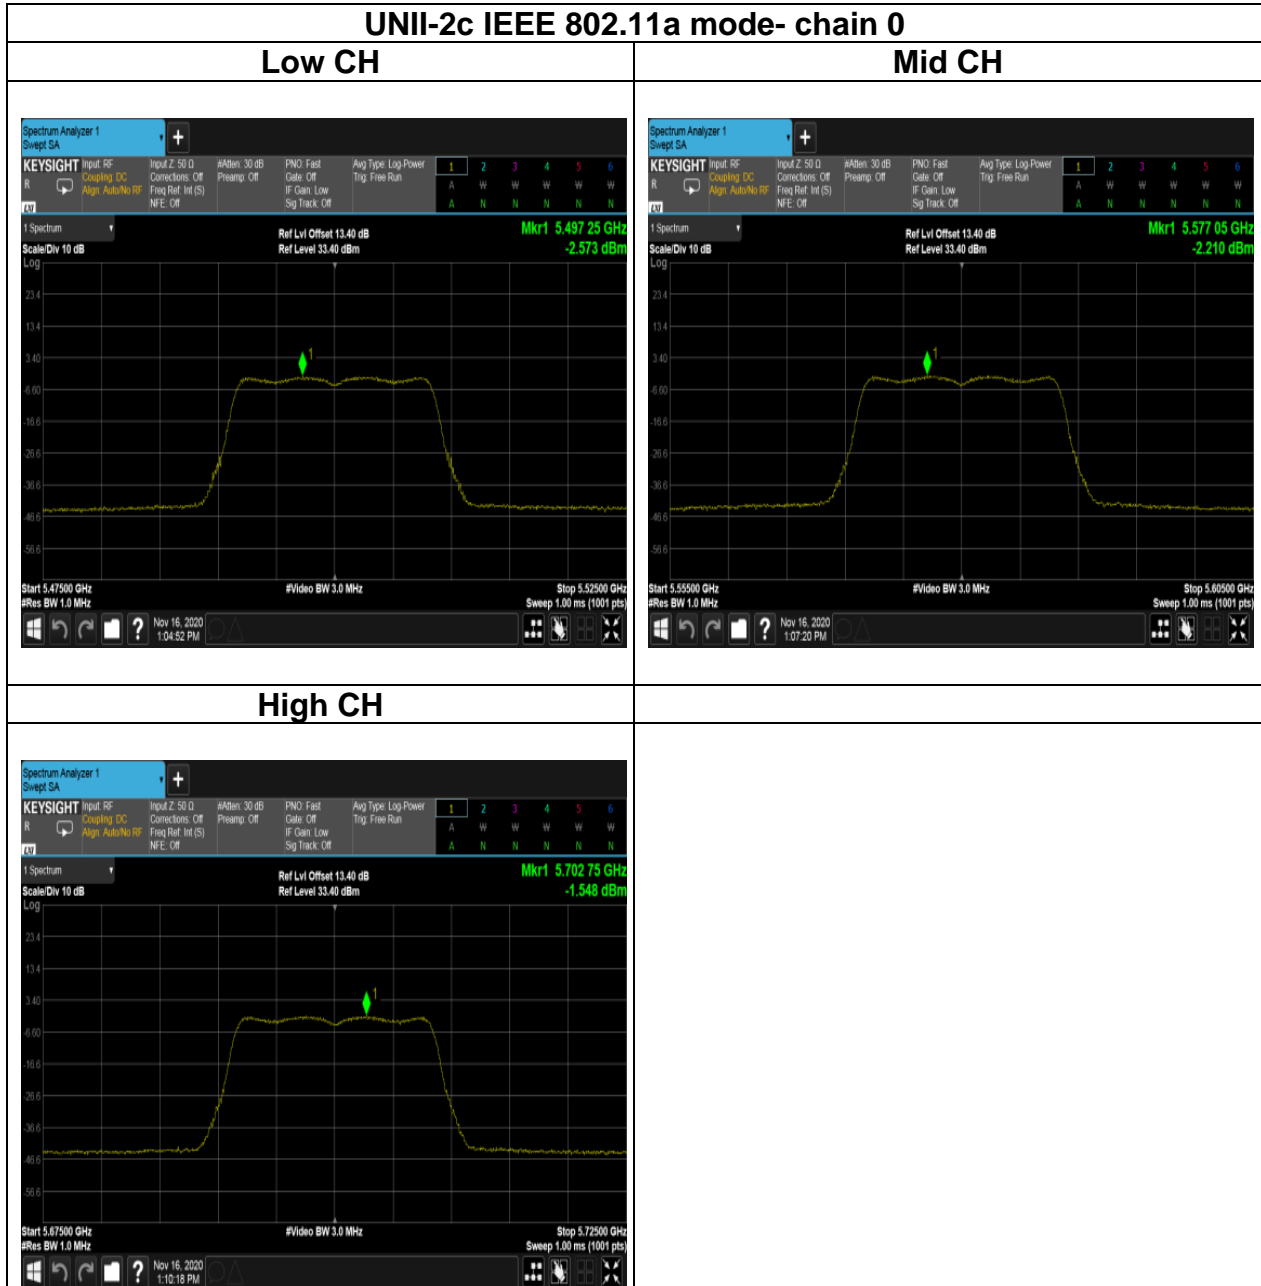

Report No.: T200928D02-RP4

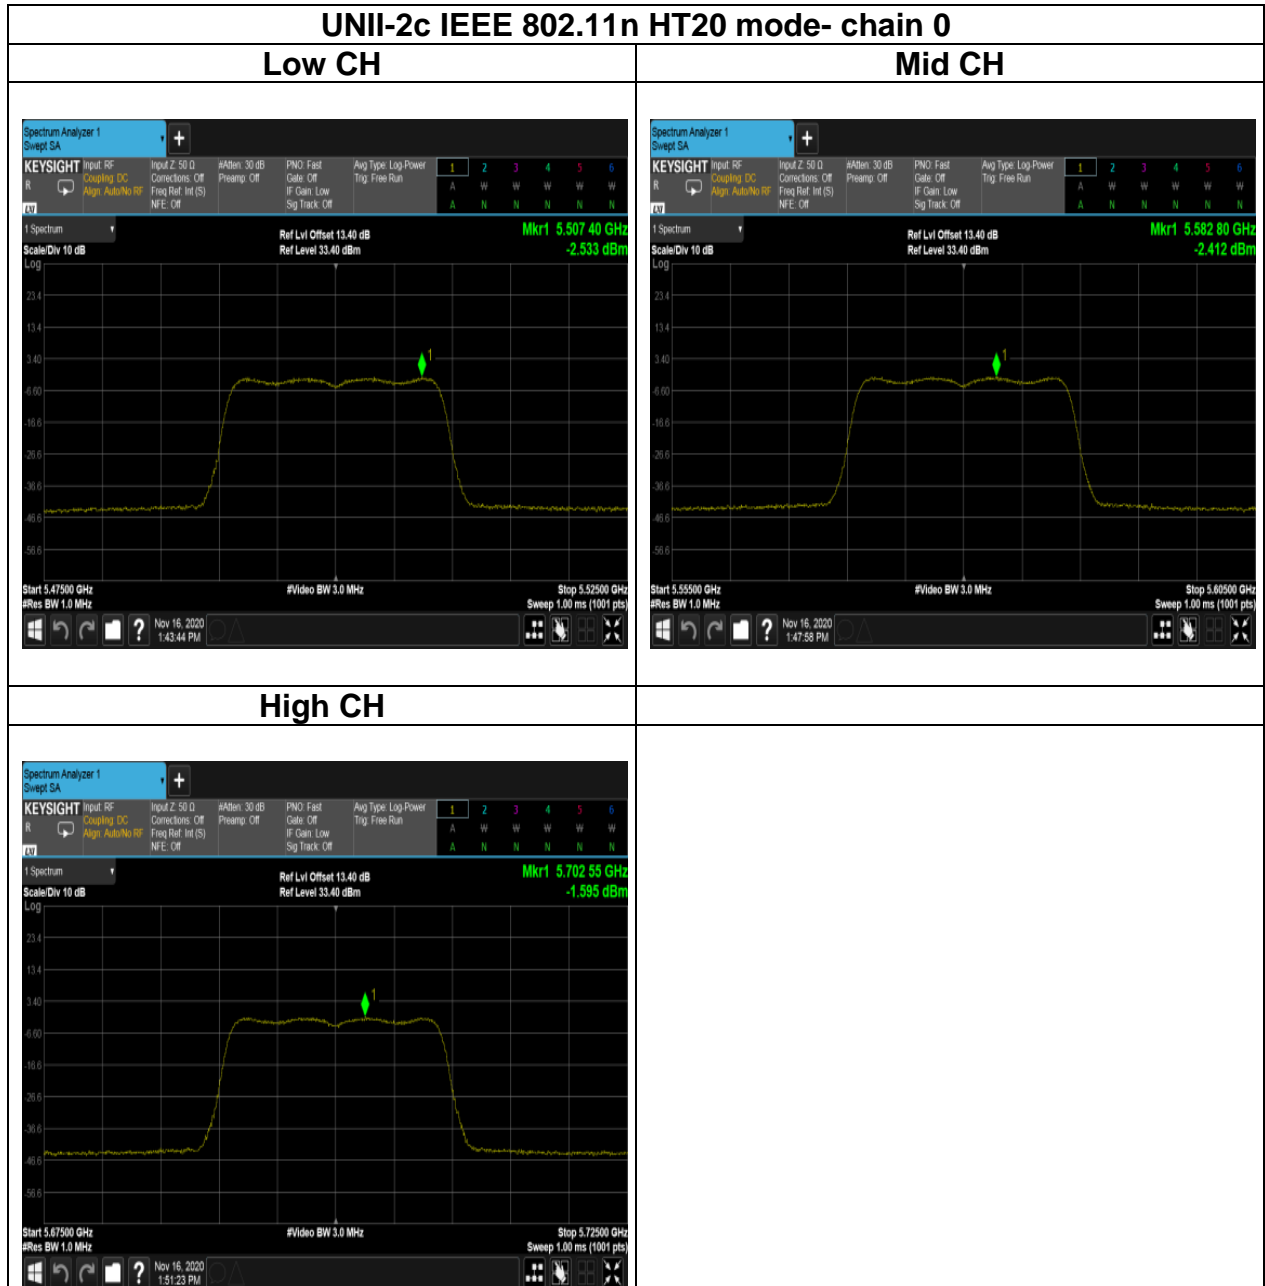


Report No.: T200928D02-RP4

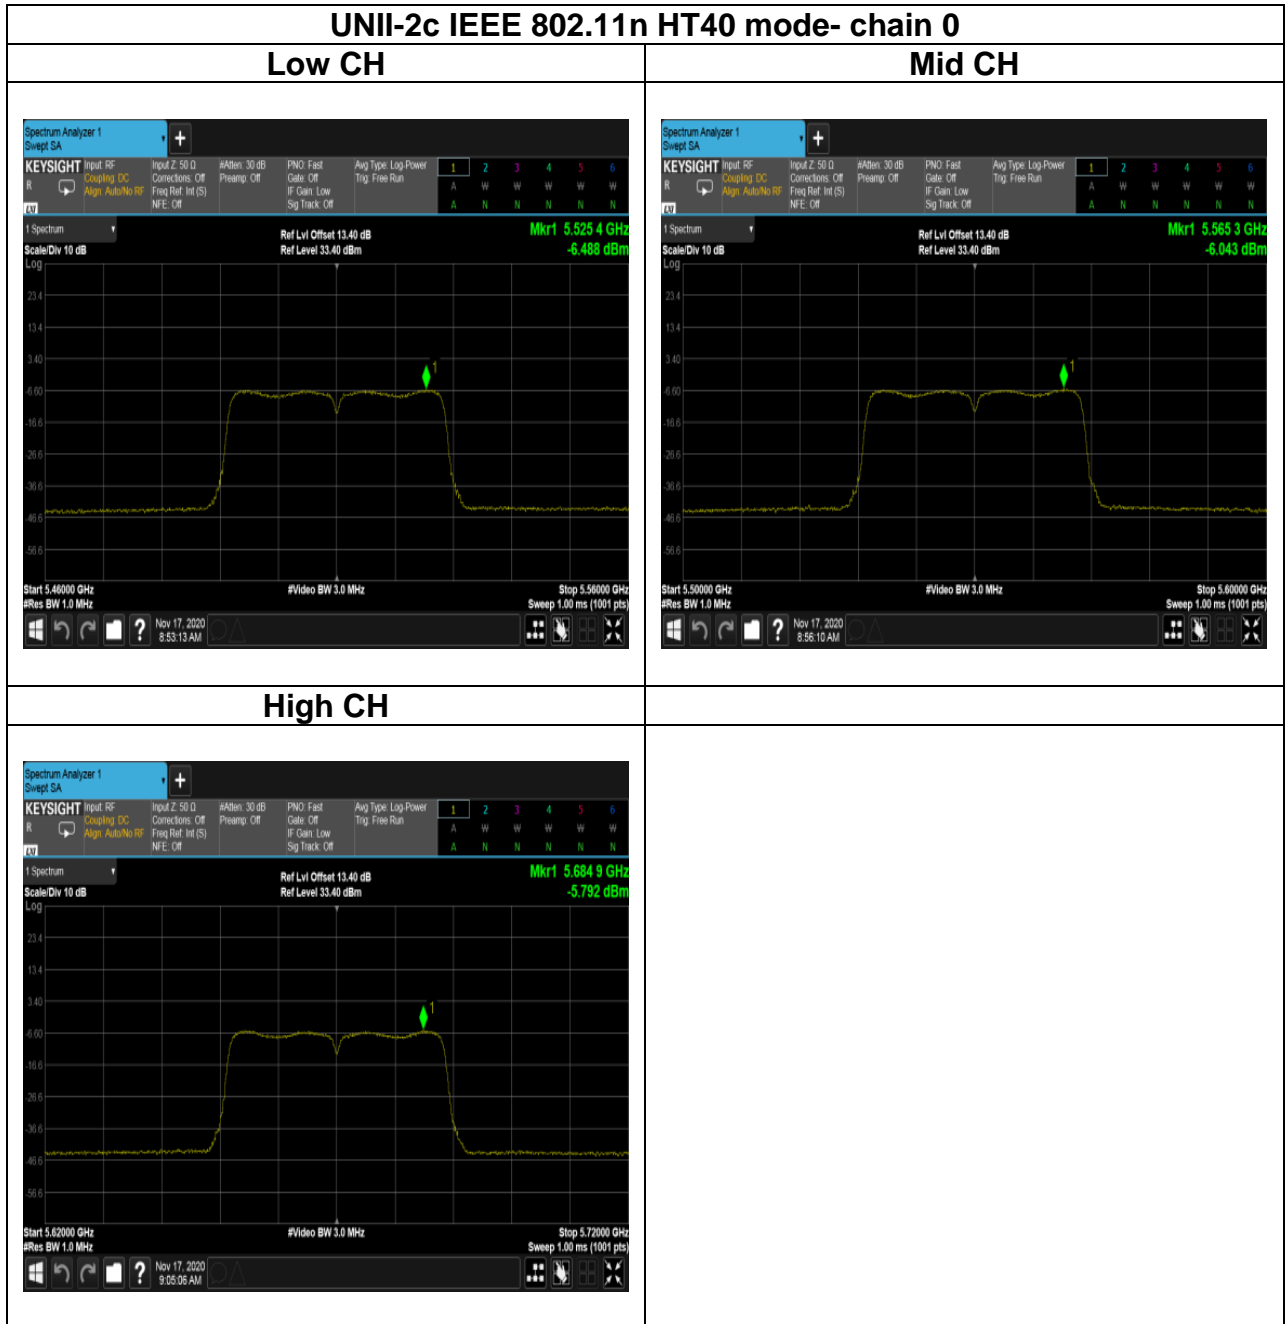




Report No.: T200928D02-RP4

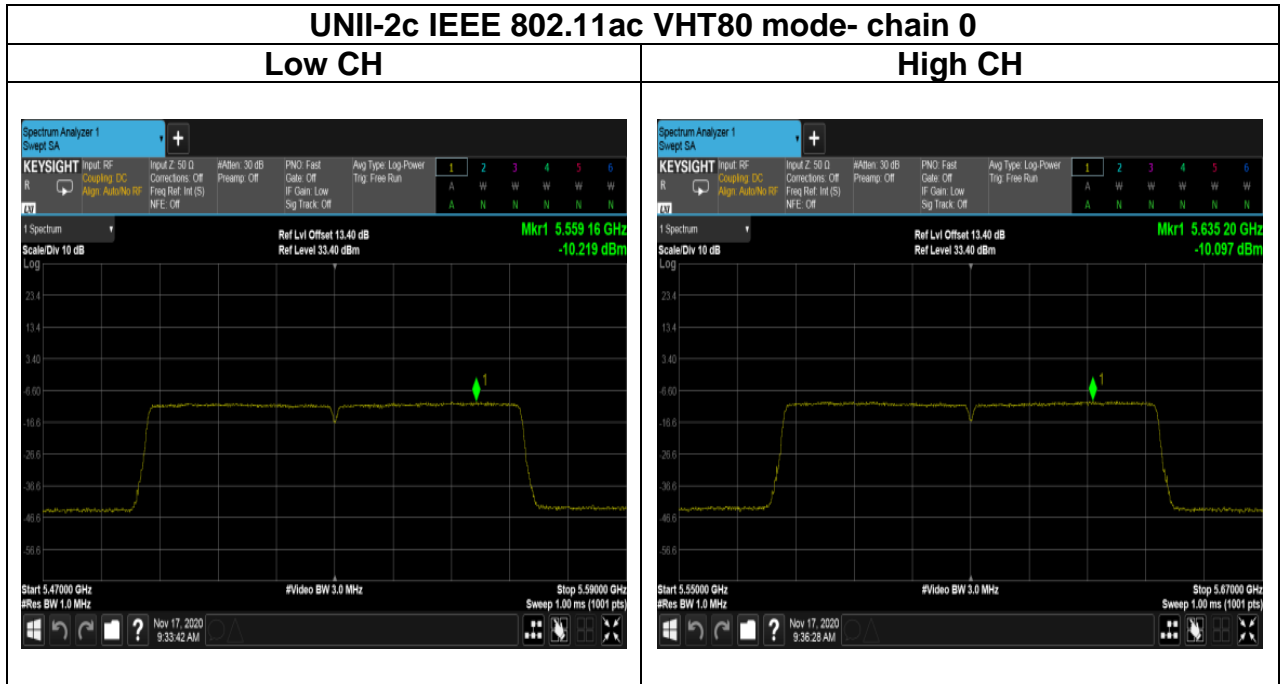


Report No.: T200928D02-RP4


**Test Data**

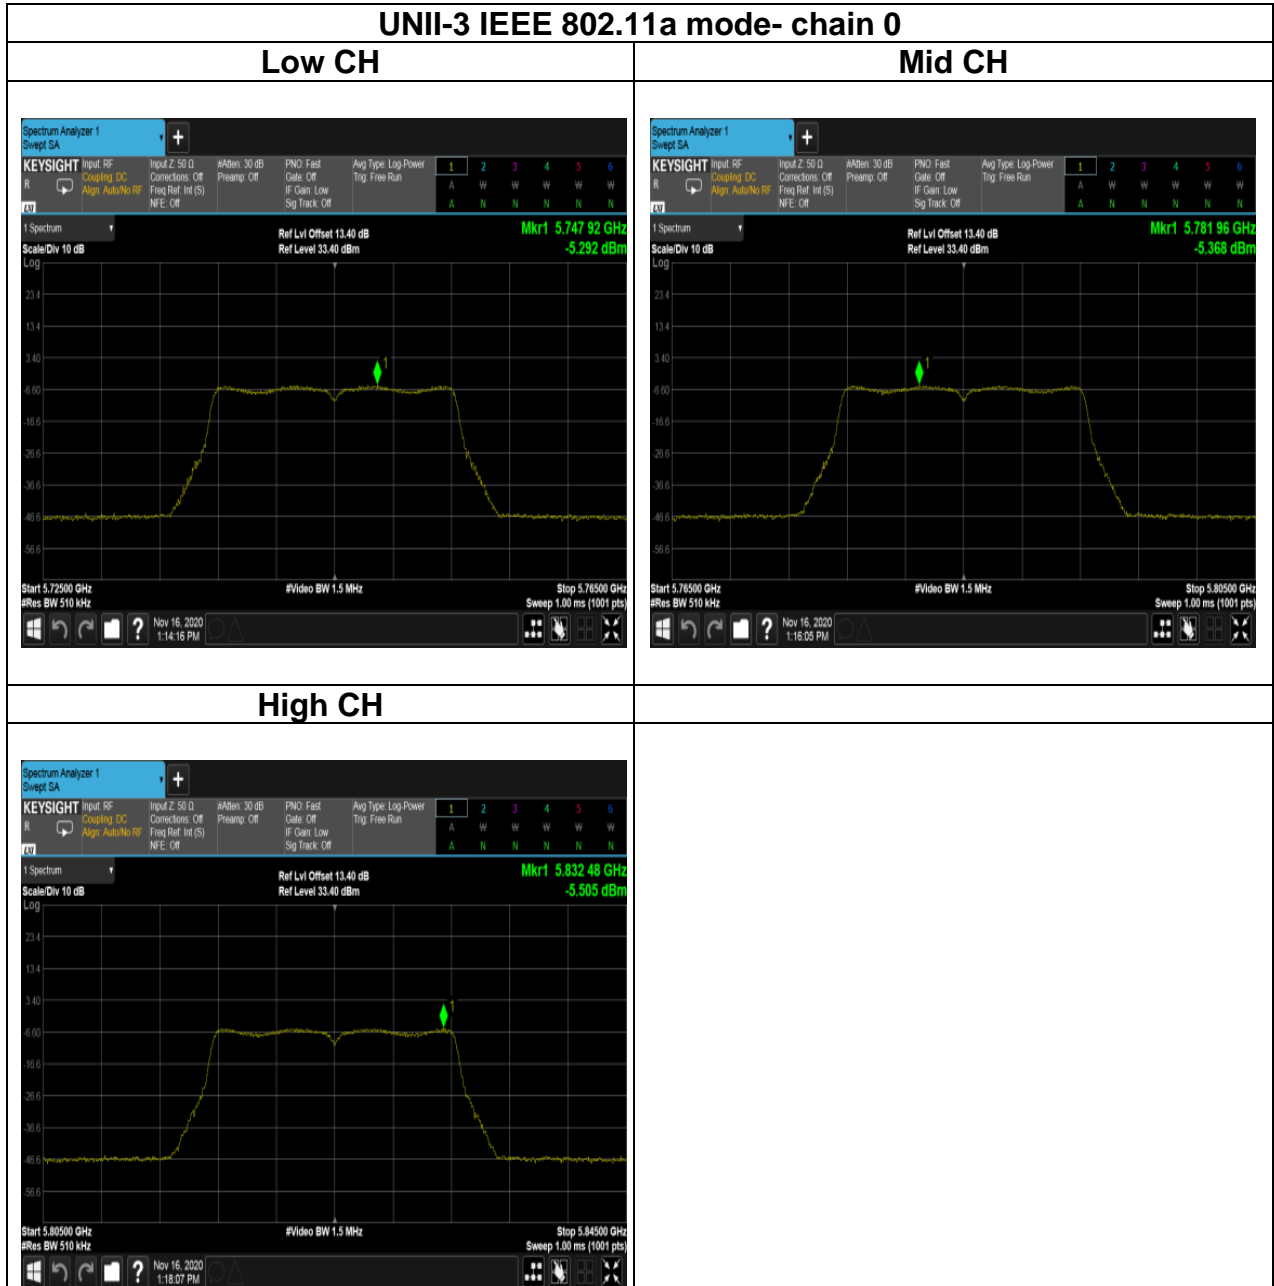

Report No.: T200928D02-RP4

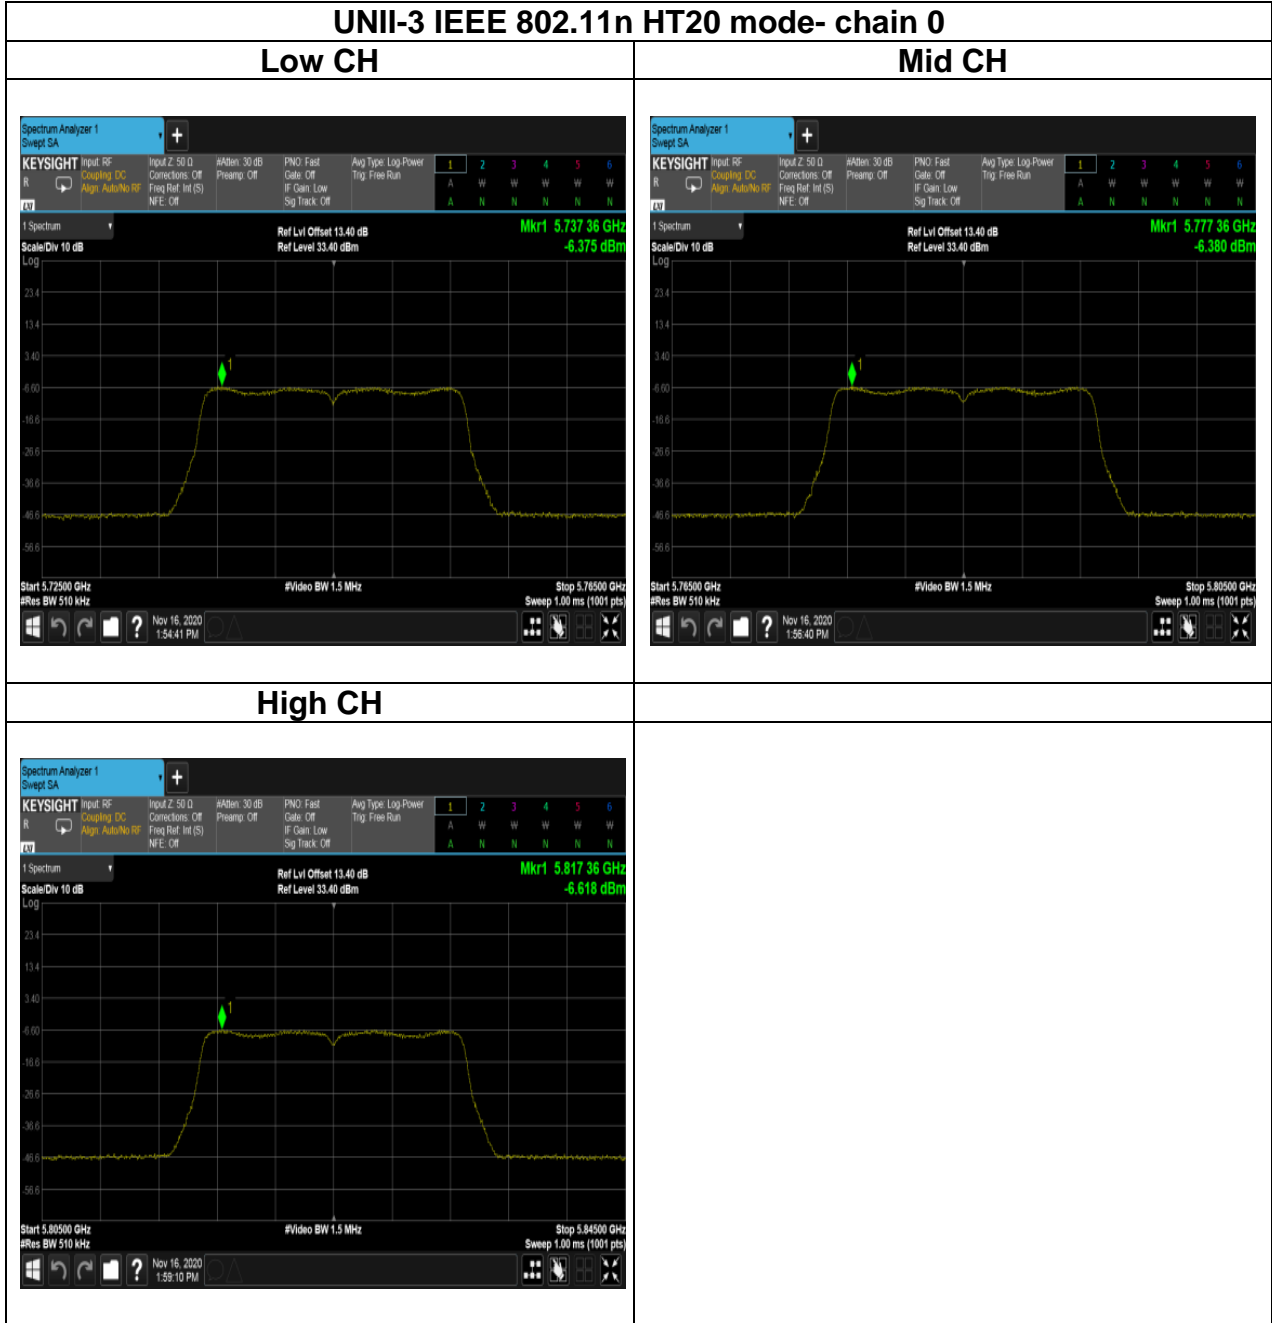


Report No.: T200928D02-RP4

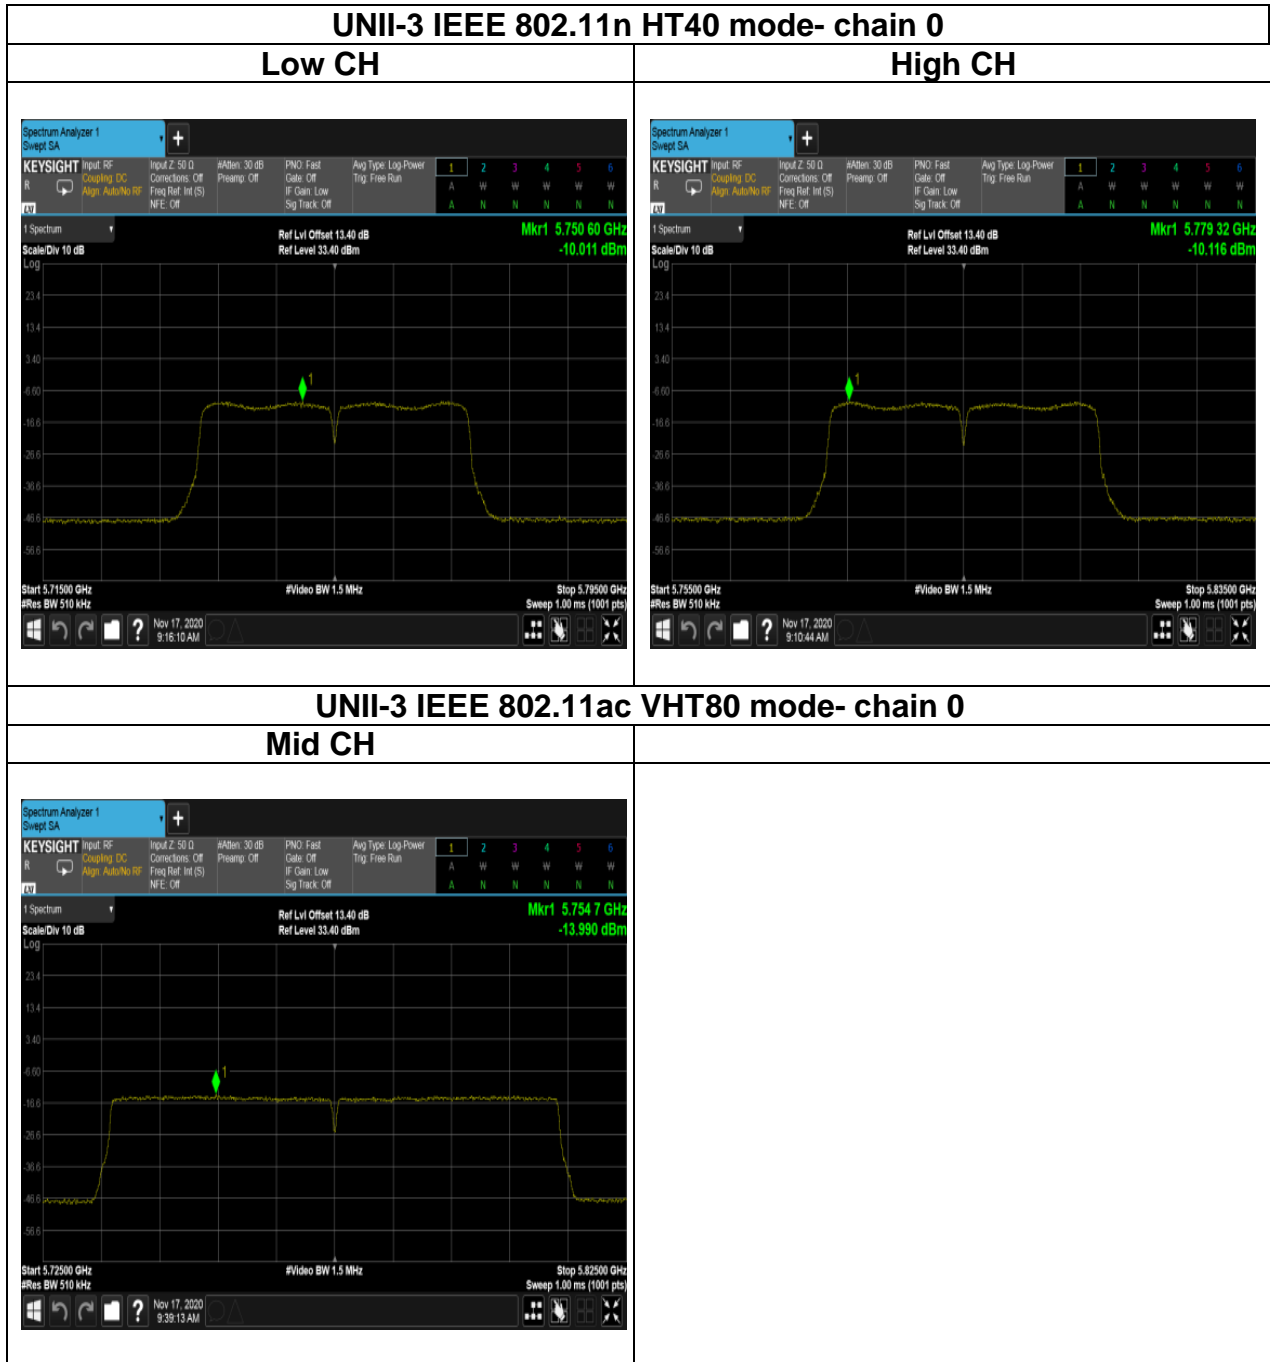


Report No.: T200928D02-RP4


**Chain 1:**

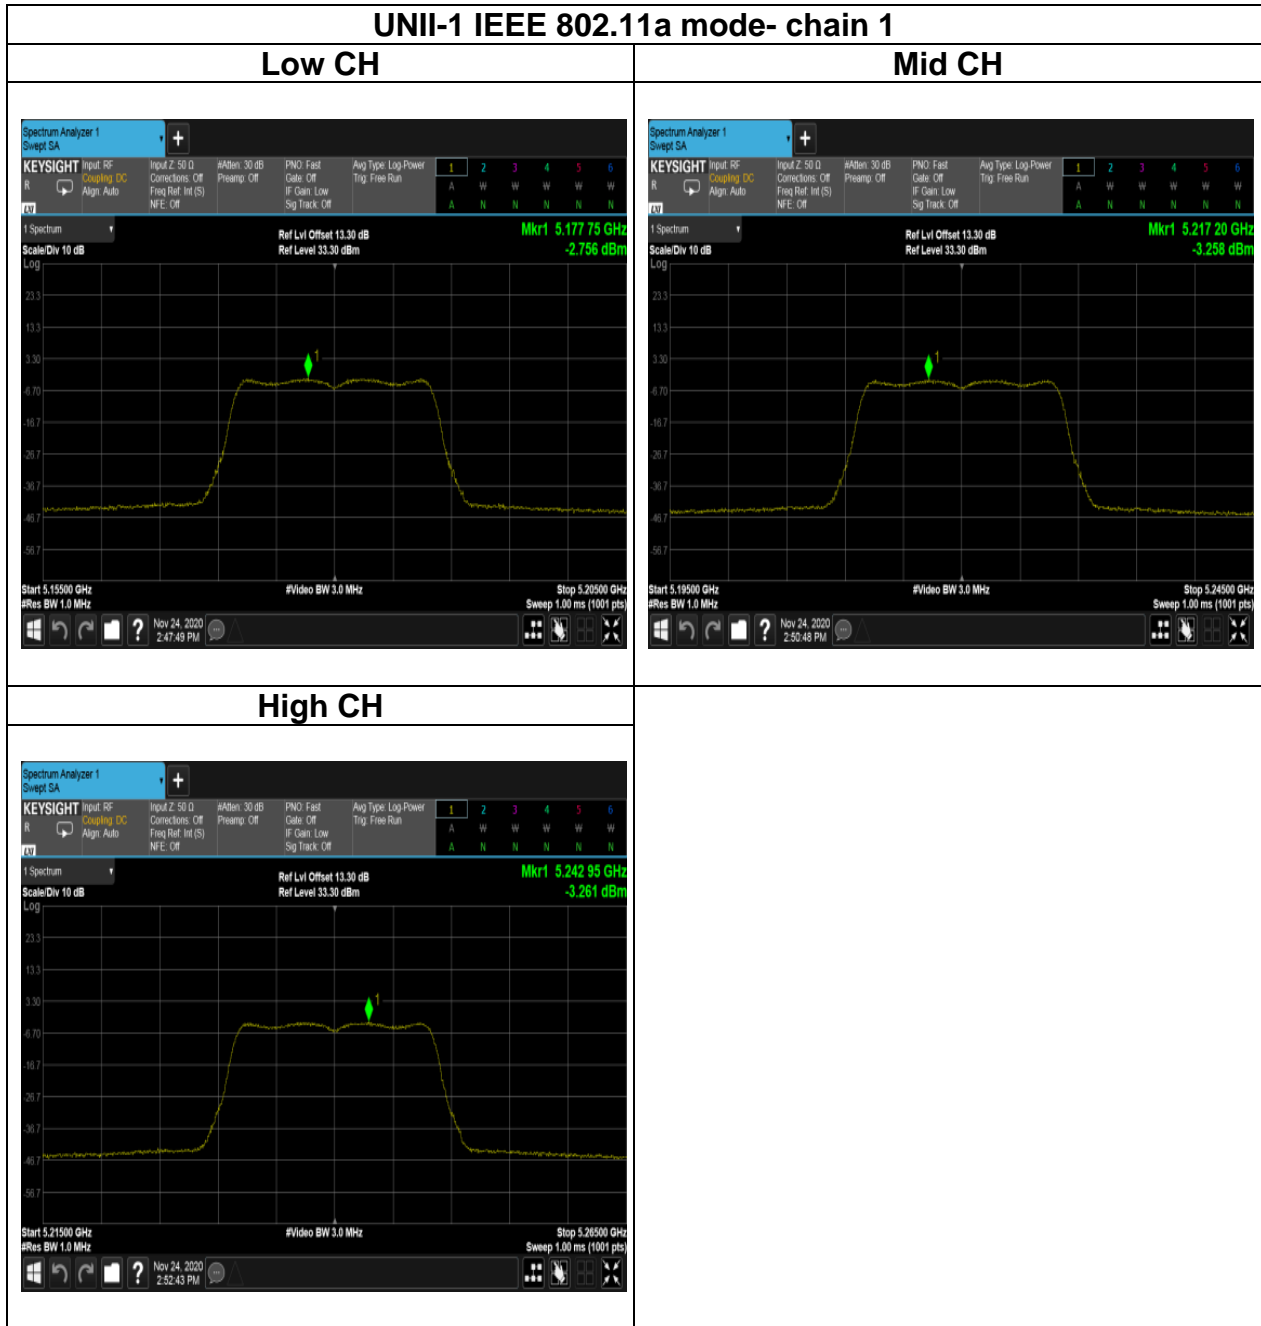

Report No.: T200928D02-RP4

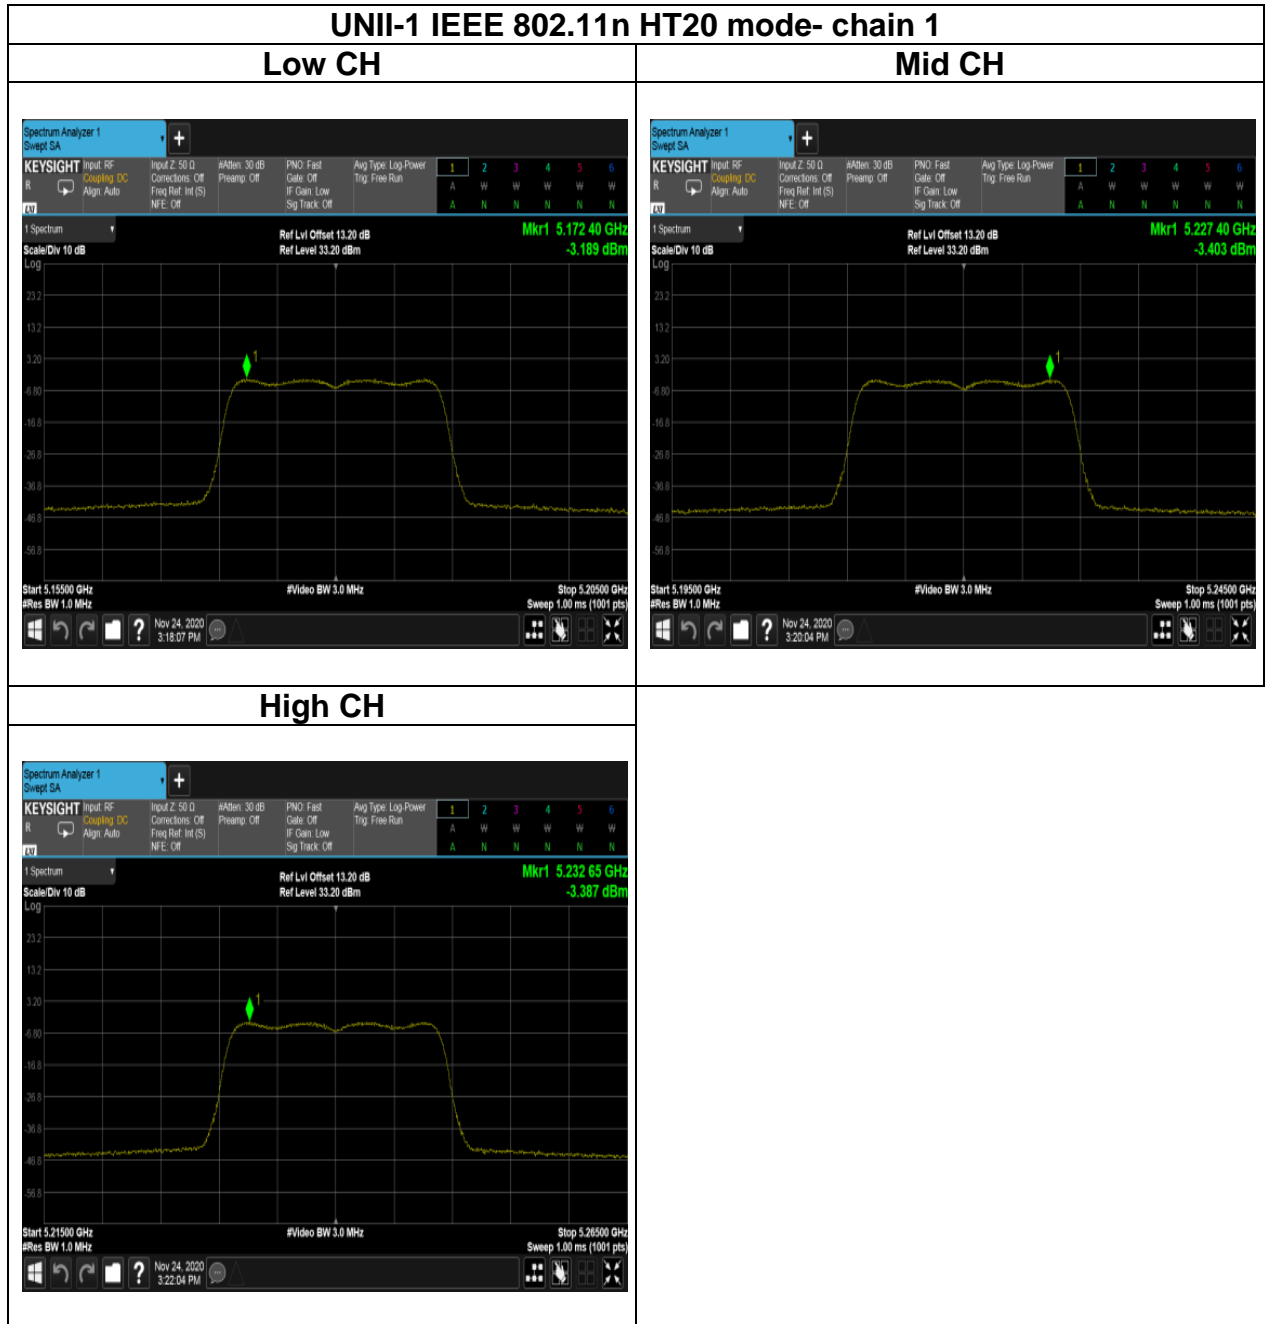


Report No.: T200928D02-RP4

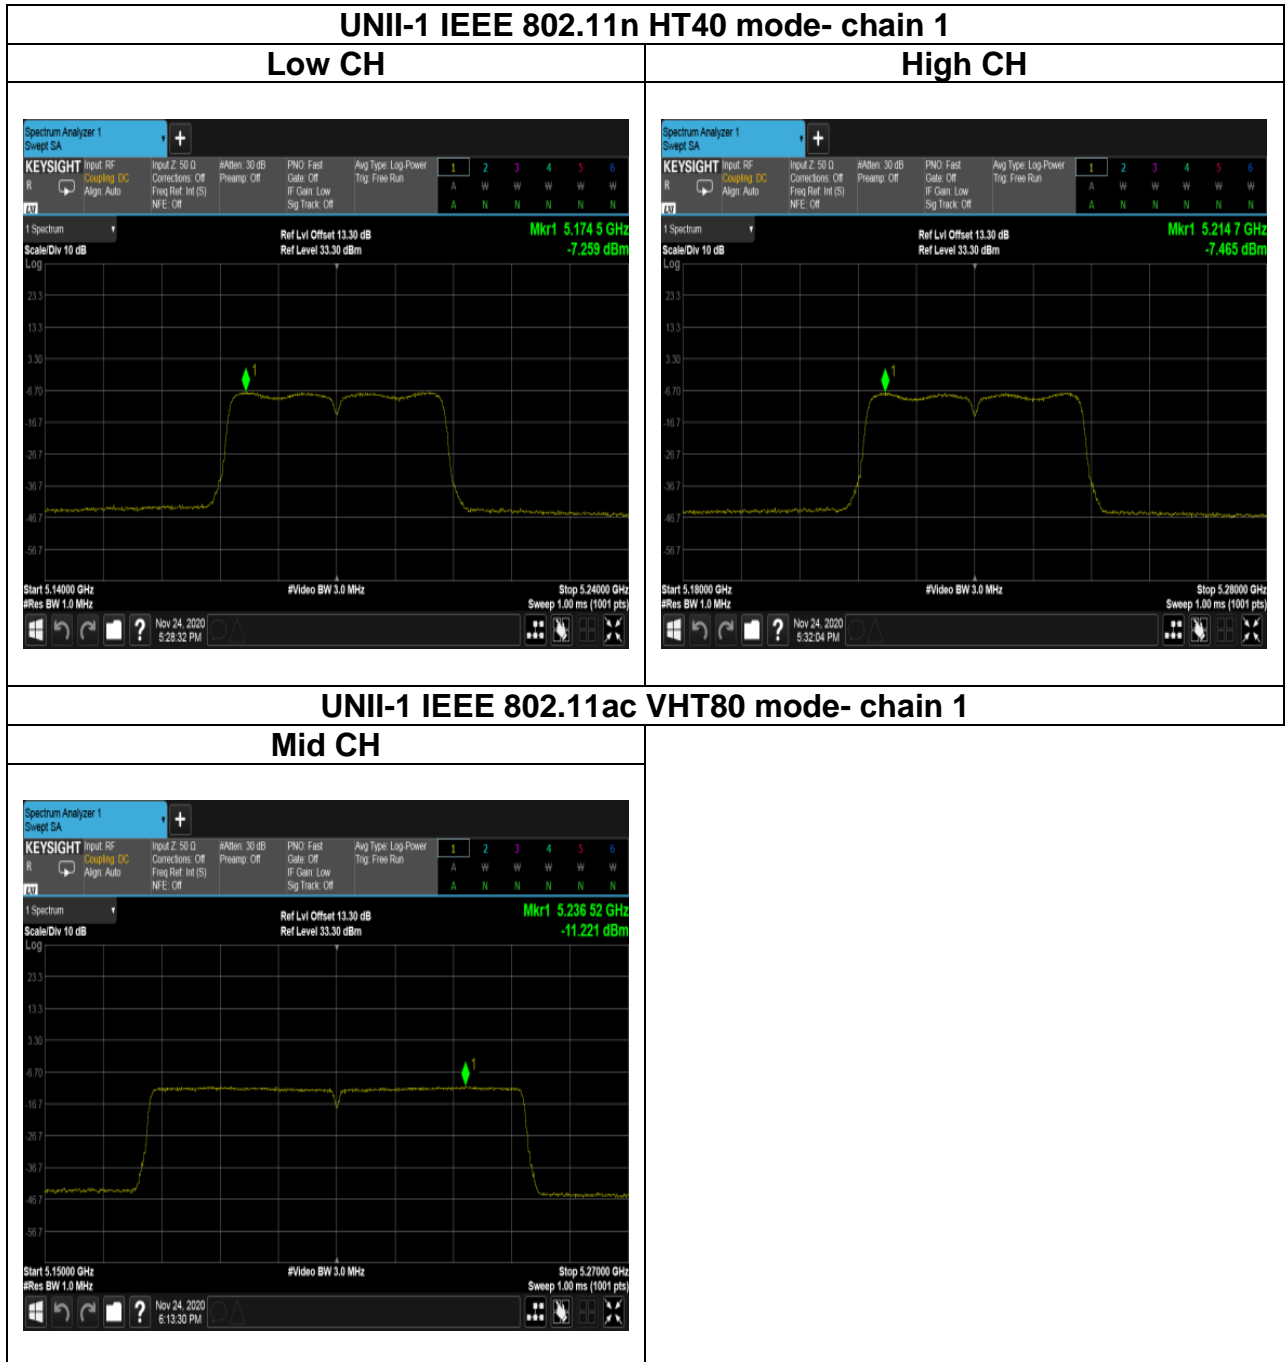


Report No.: T200928D02-RP4

## Test Data

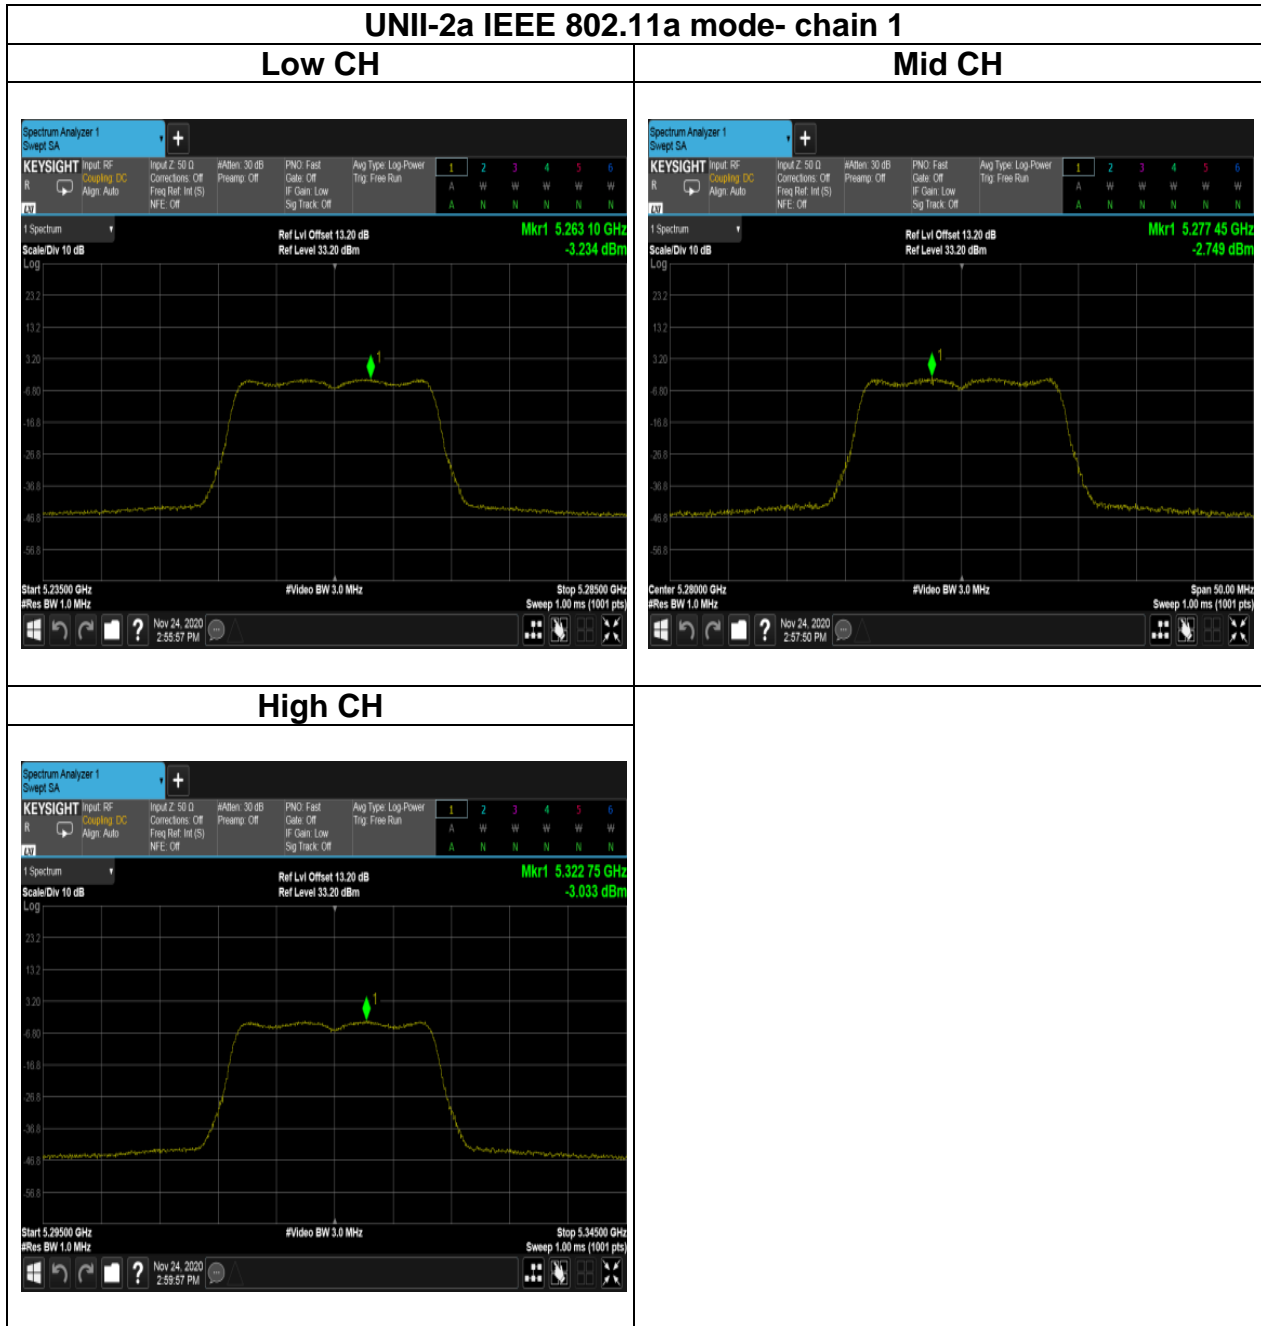





Report No.: T200928D02-RP4

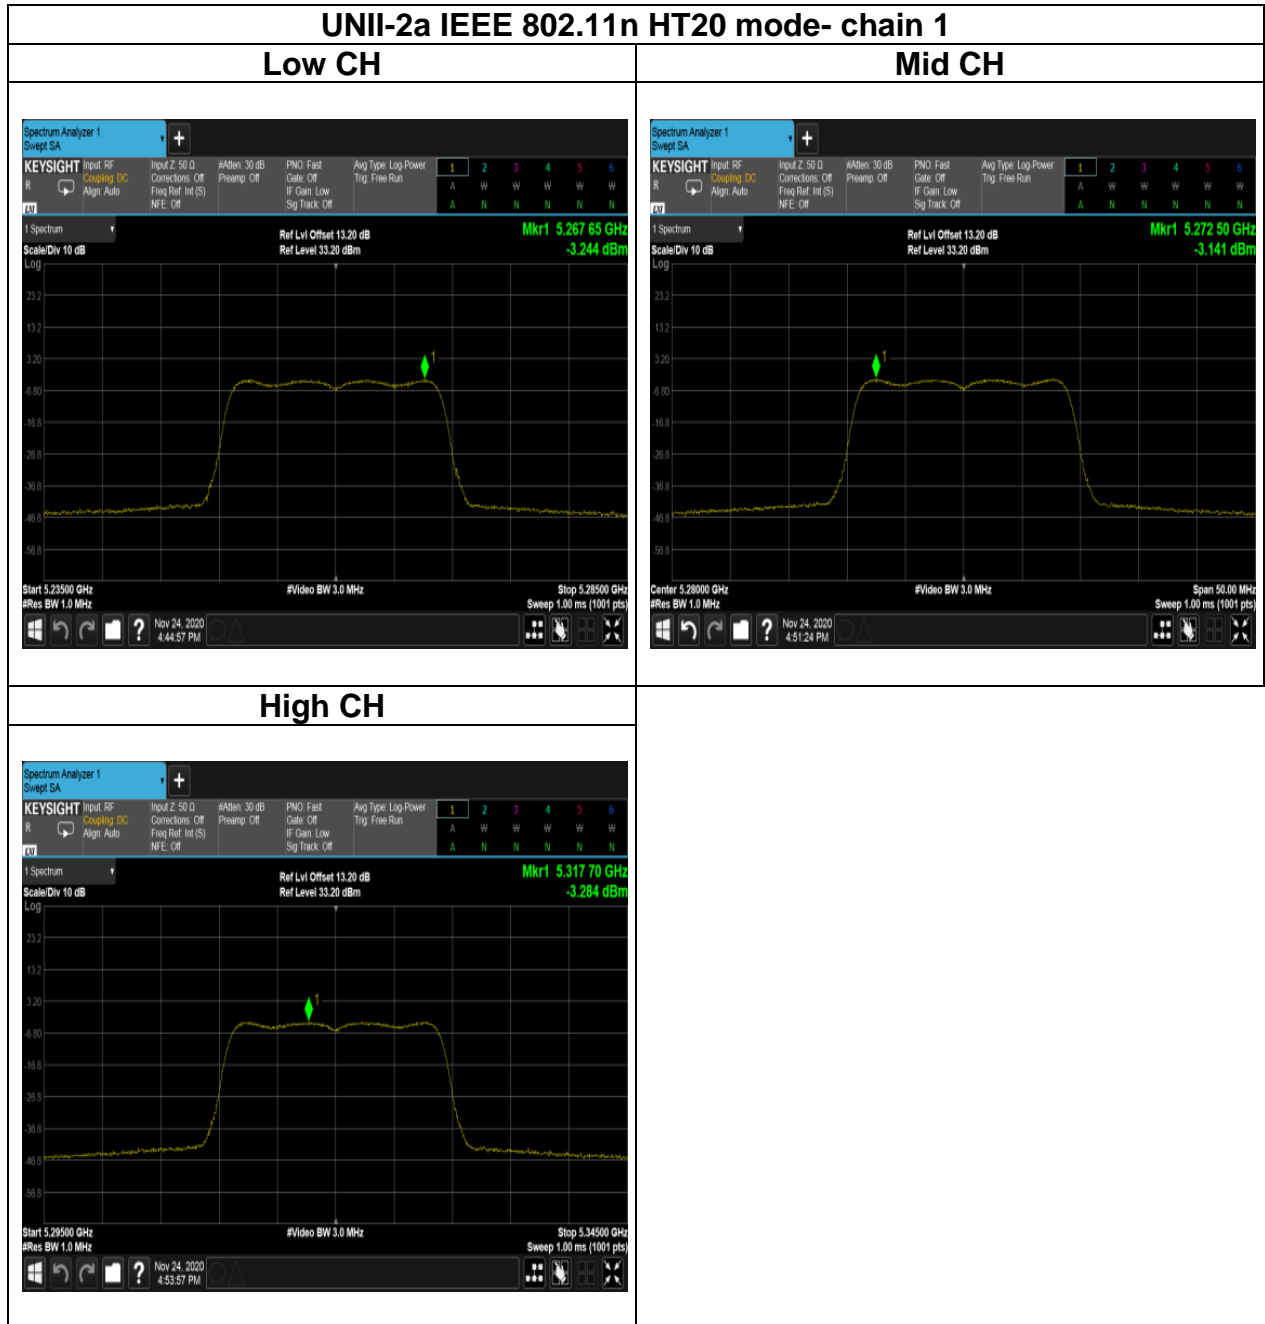


Report No.: T200928D02-RP4

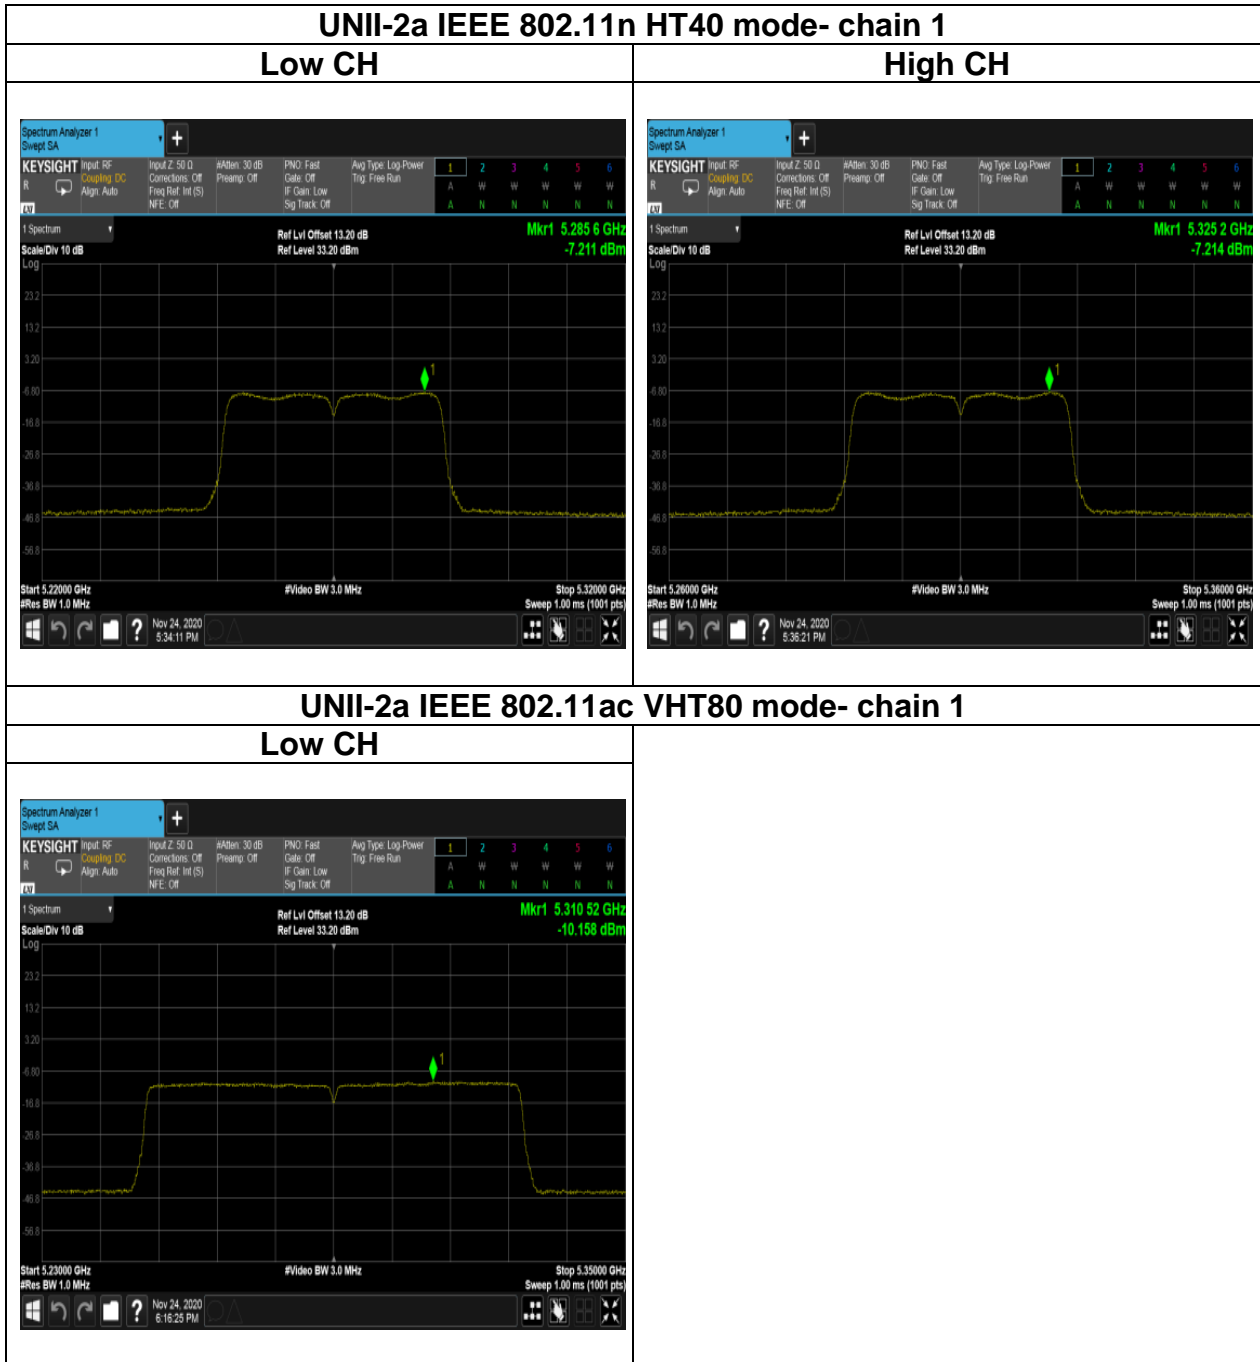


**Test Data**

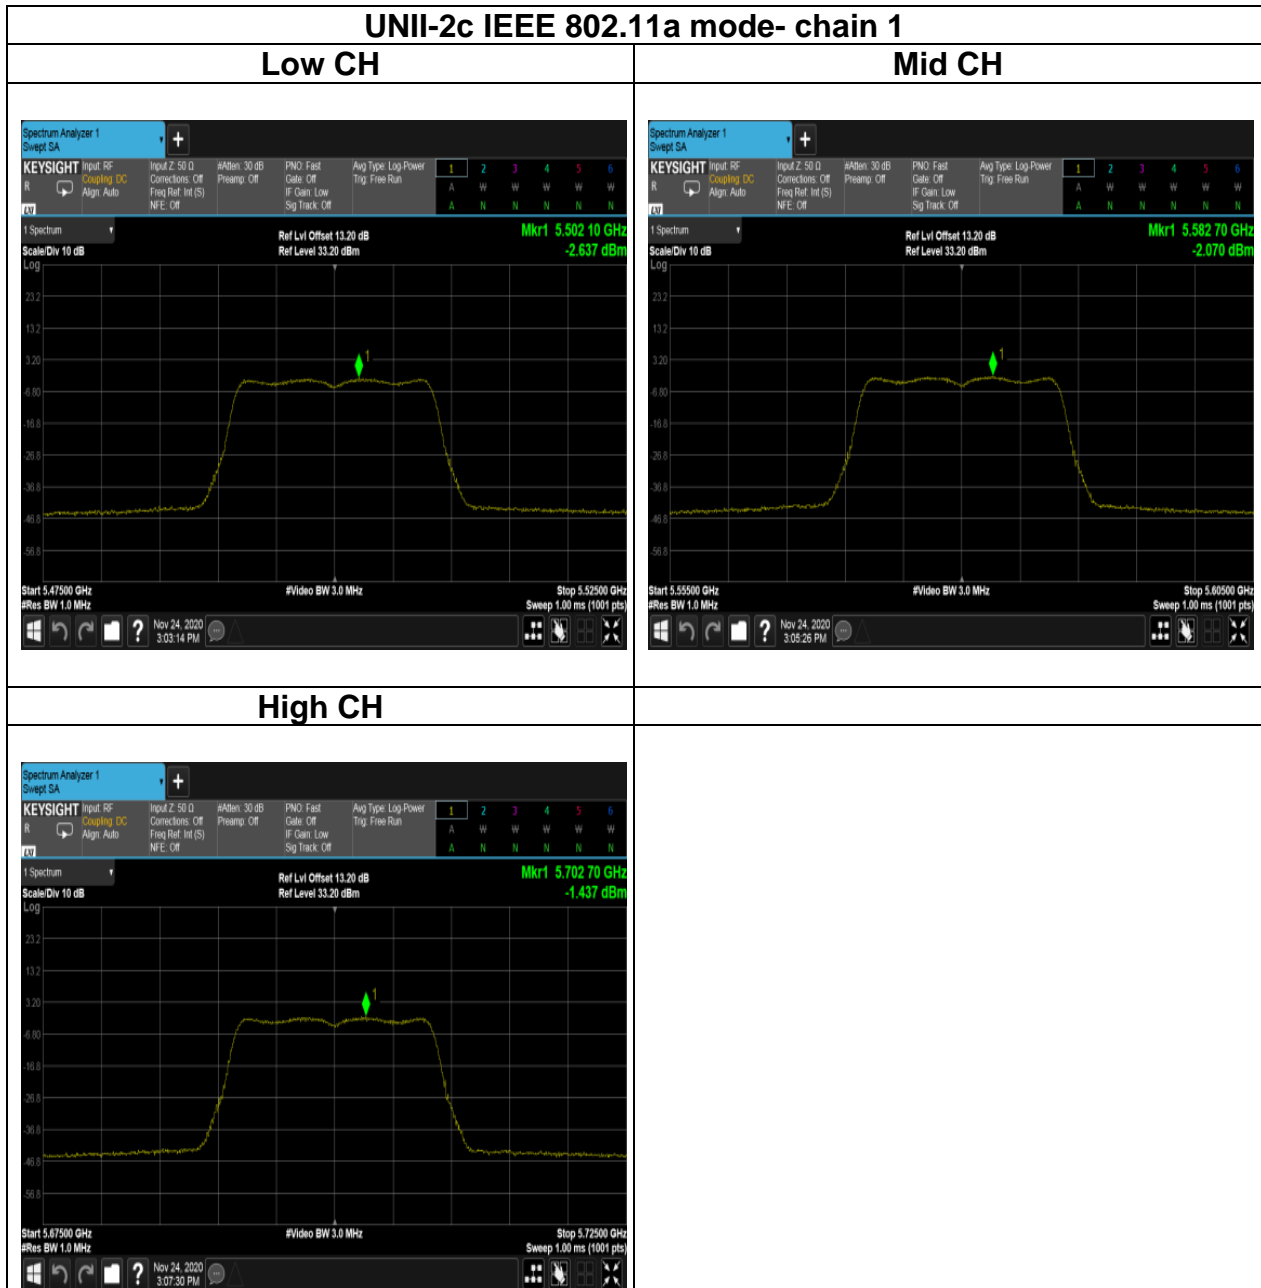


Report No.: T200928D02-RP4

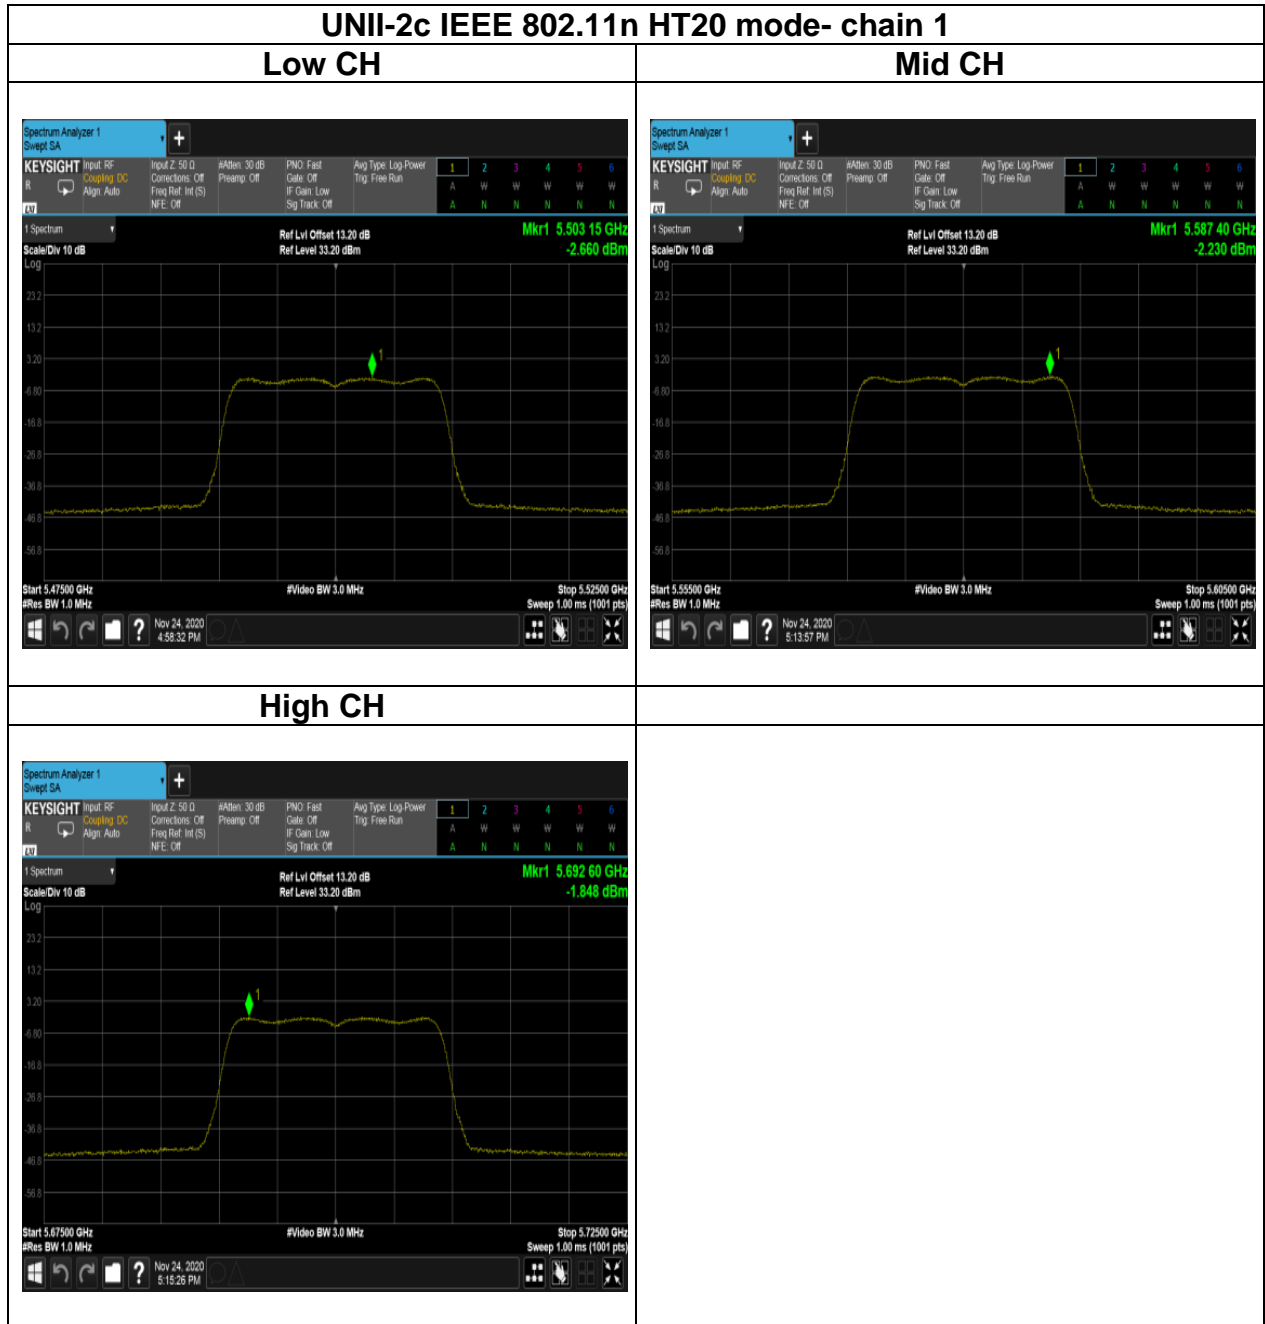

Report No.: T200928D02-RP4

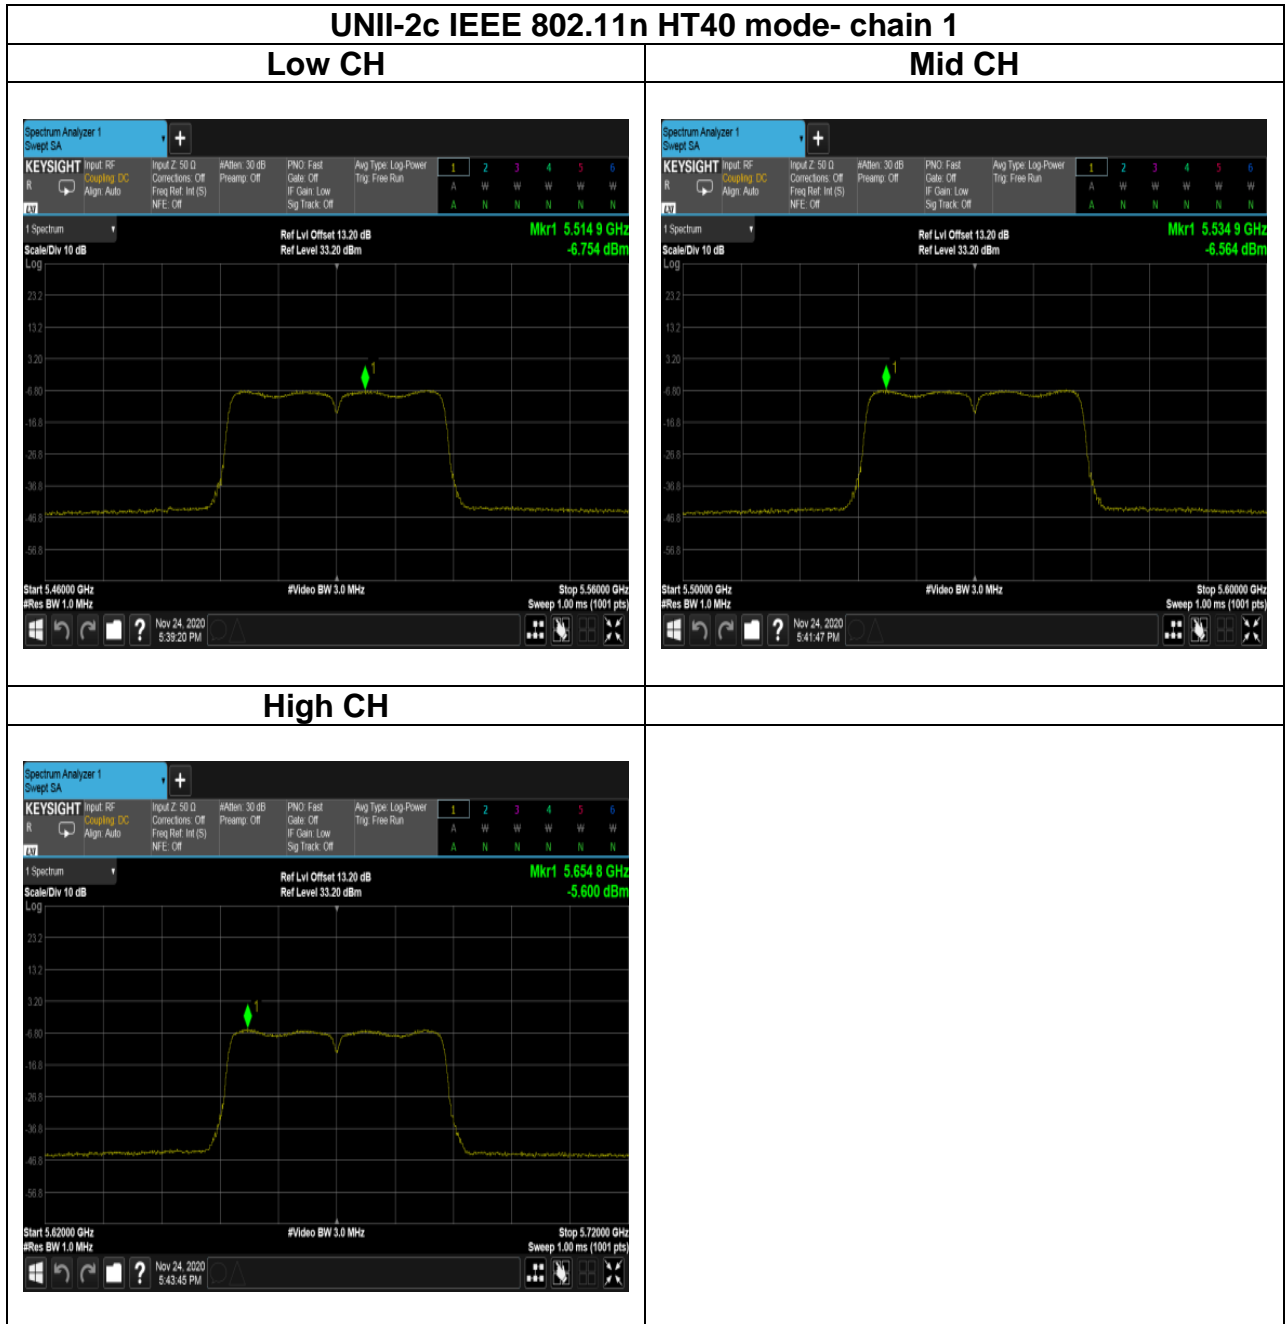


Report No.: T200928D02-RP4

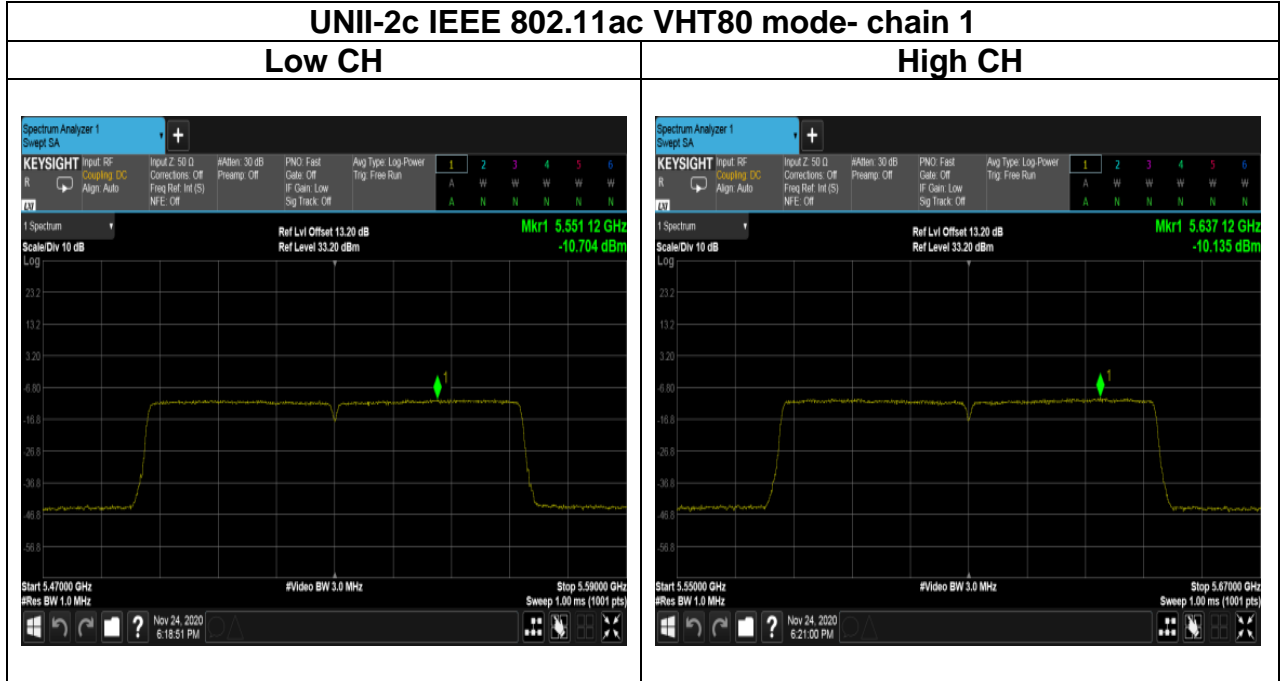


Report No.: T200928D02-RP4

**Test Data**

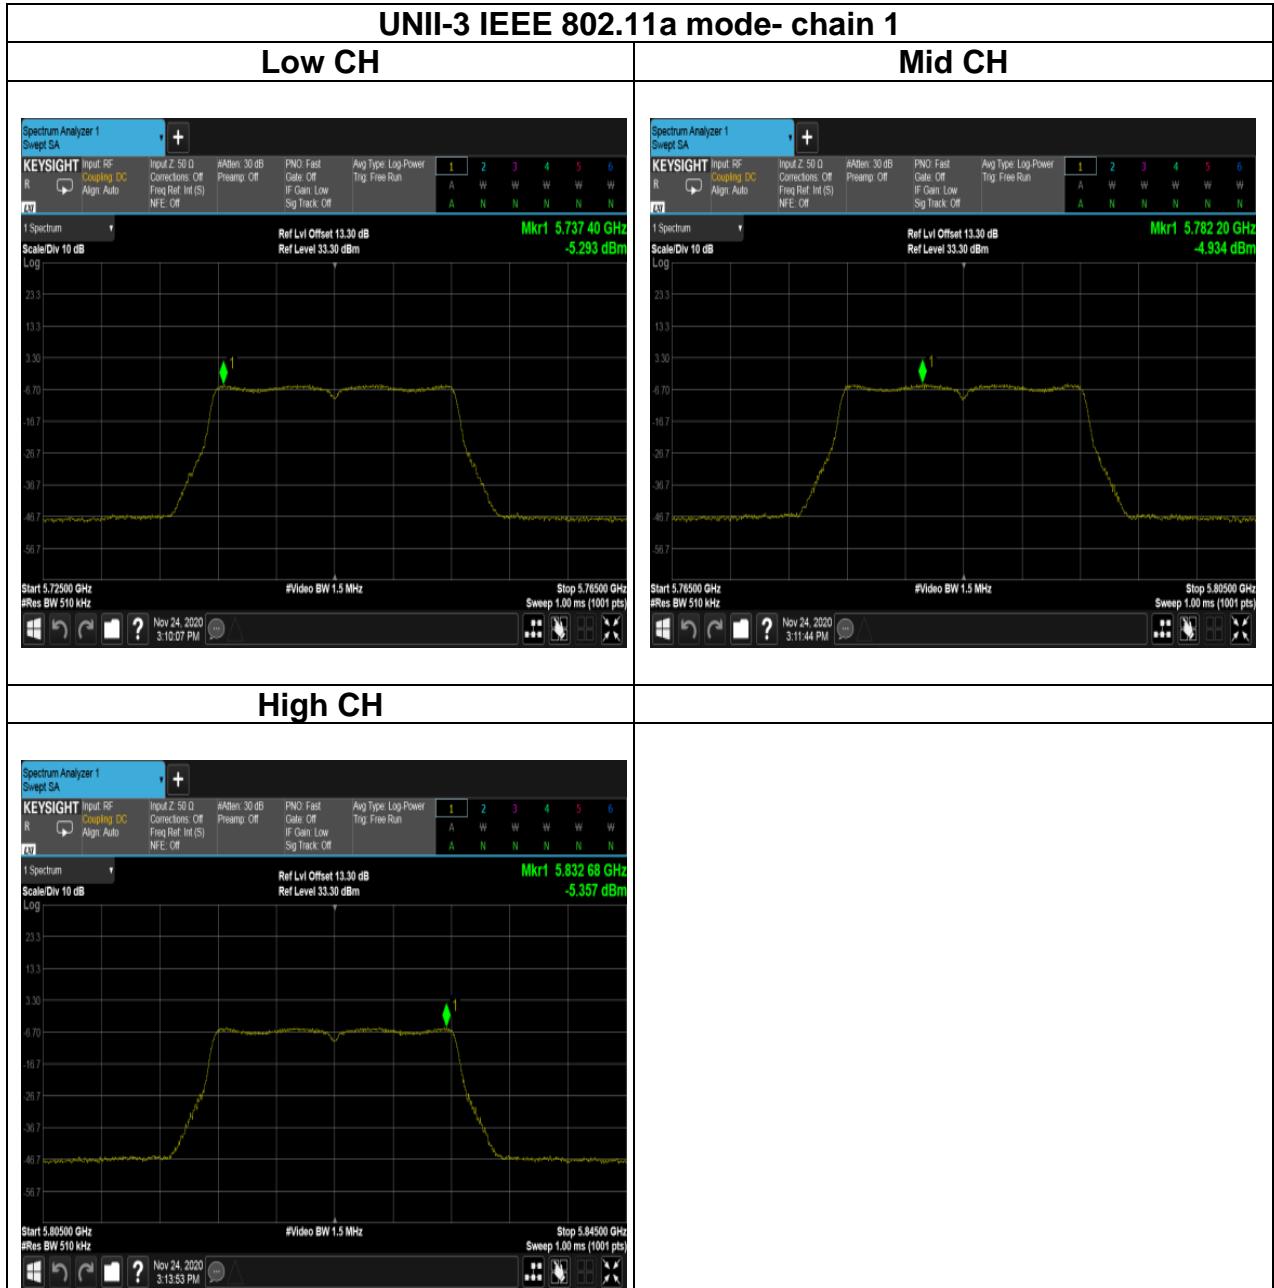

Report No.: T200928D02-RP4

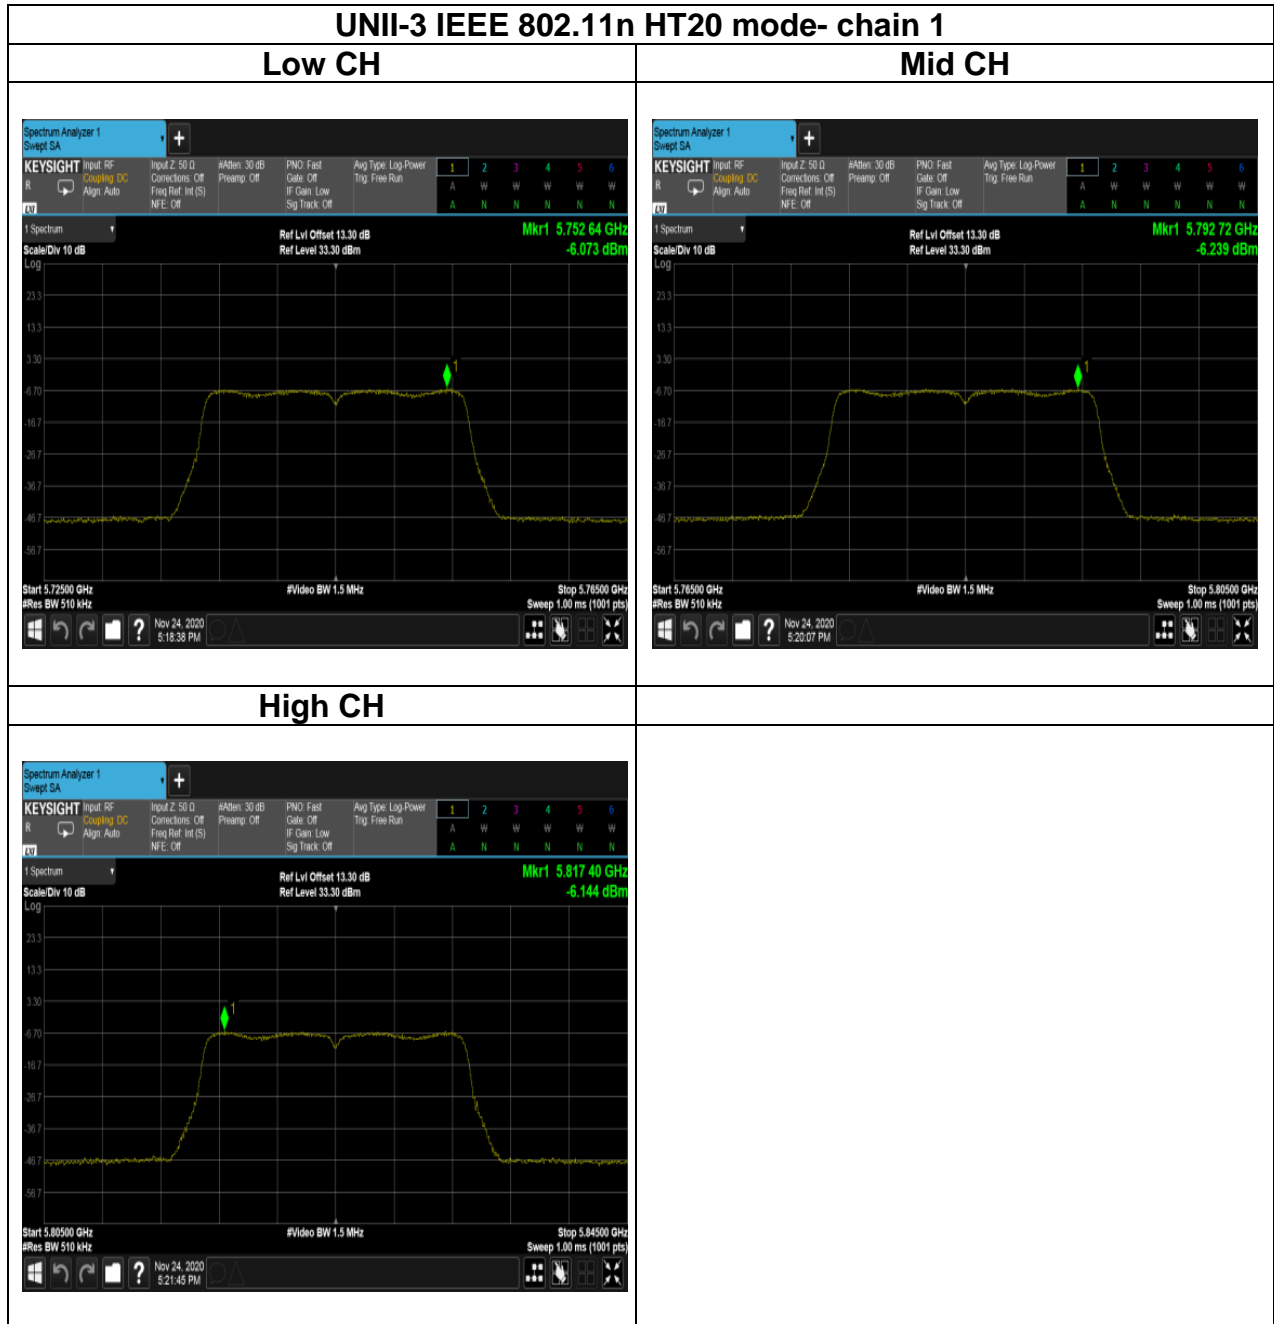



Report No.: T200928D02-RP4

