



# FCC Test Report

Report No: FCS202009050W01

Issued for

Applicant:	Camco Mfg Inc.
Address:	121 Landmark Drive Greensboro, NC 27409
Product Name:	Wireless remote
Brand Name:	N/A
Model Name:	T10208
Series Model:	NA
FCC ID:	2AX9V -T10208
<p>Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.FCS-lab.com">http://www.FCS-lab.com</a></p>	

**TEST RESULT CERTIFICATION**

Applicant's Name .....: Camco Mfg Inc.  
Address.....: 121 Landmark Drive Greensboro, NC 27409  
Manufacture's Name .....: HON SHUN PLASTIC FTY.LTD.  
Address.....: PING HU TOWN, #239 PING HU STREET, SHEN ZHEN CITY, CHINA  
Zip code 518111

**Product Description**

Product Name .....: Wireless remote  
Brand Name .....: N/A  
Model Name.....: T10208  
Series Model .....: N/A  
Test Standards .....: FCC Rules and Regulations Part 15 Subpart C, Section 231  
Test Procedure .....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

**Date of Test** .....

Date (s) of performance of tests : Oct, 08. 2020 ~ Oct, 20. 2020

Date of Issue .....: Oct, 20. 2020

Test Result.....: Pass

Tested by : Scott Shen  
(Scott Shen)

Reviewed by : Duke Qian  
(Duke Qian)

Approved by : Kait Chen  
(Kait Chen)

Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
<b>3 CONDUCTED EMISSION MEASUREMENT</b>	<b>12</b>
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST RESULTS	13
<b>4. RADIATED EMISSION MEASUREMENT</b>	<b>14</b>
4.1 LIMIT	14
4.2 TEST PROCEDURE	15
4.3 TEST SETUP	16
4.4 TEST RESULTS	17
<b>5. TRANSMITTER TIME</b>	<b>22</b>
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 TEST SETUP	22
5.4 TEST RESULTS	22
<b>6. 20 DB BANDWIDTH TEST</b>	<b>24</b>
6.1 LIMIT	24
6.2 TEST PROCEDURE	24
6.3 TEST SETUP	24
6.4 TEST RESULTS	25
<b>7. DUTY CYCLE</b>	<b>26</b>
7.1 LIMIT	26
7.2 TEST PROCEDURE	26
7.3 TEST SETUP	26

Table of Contents	Page
7.4 TEST RESULTS	27
<b>8 ANTENNA REQUIREMENT</b>	<b>29</b>
7.1 STANDARD REQUIREMENT	29
7.2 EUT ANTENNA	29

**Revision History**

Rev.	Issue Date	Effect Page	Contents
00	Oct, 20. 2020	All	Initial Issue

## 1. SUMMARY OF TEST RESULTS

FCC Part 15.231,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	NA	--
15.209, 15.231(b)	Radiated Emission	PASS	--
15.231(a) (1)	Transmitter time	PASS	--
15.231(c)	20dB Bandwidth	PASS	
15.231	Duty cycle	PASS	--
15.203	Antenna Requirement	PASS	--

## NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

### 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.98$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
5	All emissions, radiated (<1G) 30MHz-1000MHz	$\pm 3.2$ dB
6	All emissions, radiated (1GHz -18GHz)	$\pm 3.66$ dB
7	All emissions, radiated (18GHz -40GHz)	$\pm 4.31$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Wireless remote
Trade Name	N/A
Model Name	T10208
Series Model	N/A
Model Difference	N/A
Frequency	315MHZ
Modulation	ASK
Antenna type	PCB antenna
Power Supply	DC 12V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna


Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	keces	PCB antenna	N/A	1.0dBi	Antenna



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

### Configuration and peripherals

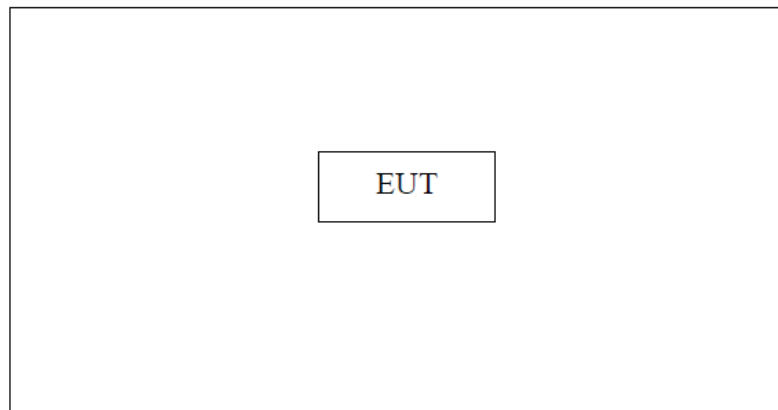

### Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range: 21-25°C

Humidity range: 40-75%

Pressure range: 86-106kPa

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020. 06.26	2021. 06.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2020.06.05	2021.06.04
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.08.09	2021.08.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.08.26	2021.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.08.26	2021.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.06.26	2021.06.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.06.26	2021.06.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2020.06.03	2021.06.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.08.08	2021.08.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.08.26	2021.08.25
Power meter	Agilent	U2021XA	FCS-E020	2020.08.08	2021.08.07

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2020.06.03	2021.06.02
LISN	R&S	ENV216	FCS-E007	2020.08.08	2021.08.07
LISN	ETS	3810/2NM	FCS-E009	2020.06.03	2021.06.02
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.08.08	2021.08.07

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2020.06.03	2021.06.02
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.08.08	2021.08.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.08.26	2021.08.25

### 3 CONDUCTED EMISSION MEASUREMENT

#### 3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

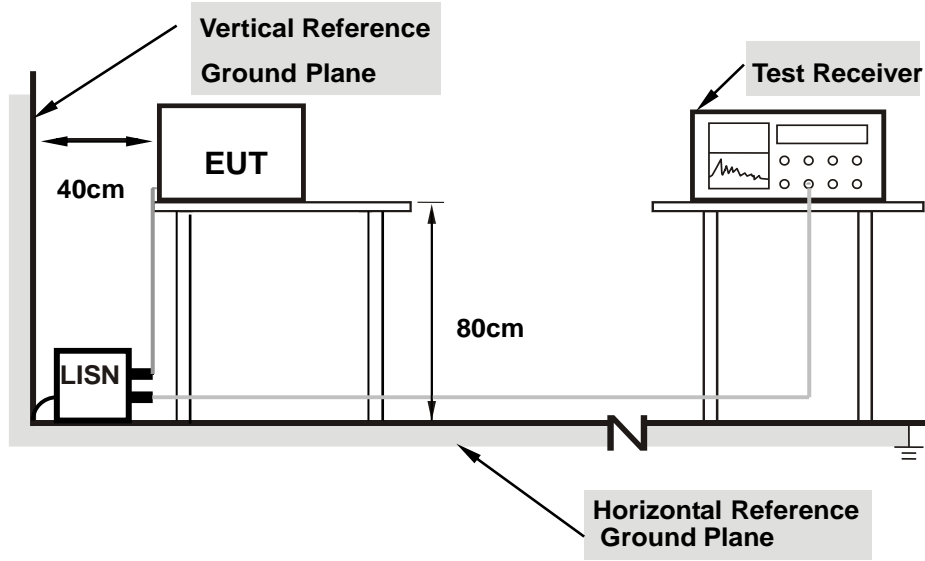

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	ASK	Test Voltage:	DC 12V
Result:	NA		

#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part 15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

##### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

##### LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
315	95.63	75.63

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector

(2) At frequencies below 30MHz, measurement may be performed at a distance closer then that specified, and the limit at closer measurement distance can be extrapolated by below formula:  
 $Limit_{3m}(dBuV/m) = Limit_{300m}(dBuV/m) + 40Log(300m/3m) = Limit_{300m}(dBuV/m) + 80$   
 $Limit_{3m}(dBuV/m) = Limit_{30m}(dBuV/m) + 40Log(30m/3m) = Limit_{30m}(dBuV/m) + 40$

##### (3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions include fundamental emission shall not exceed FCC 15.231 section (b) limit of comply with FCC 15.209 limit which permit higher emission level.

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz, uV/m at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

#### 4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 4.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

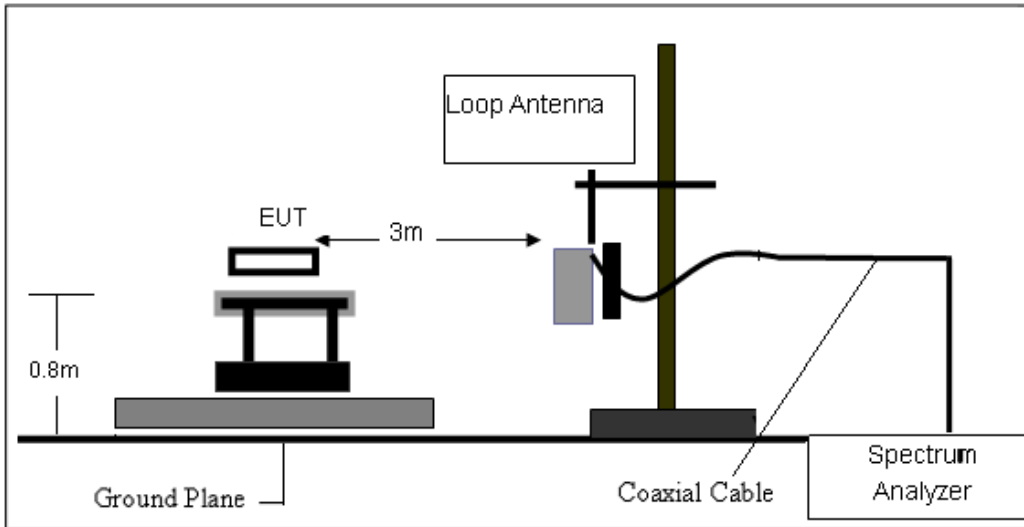

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

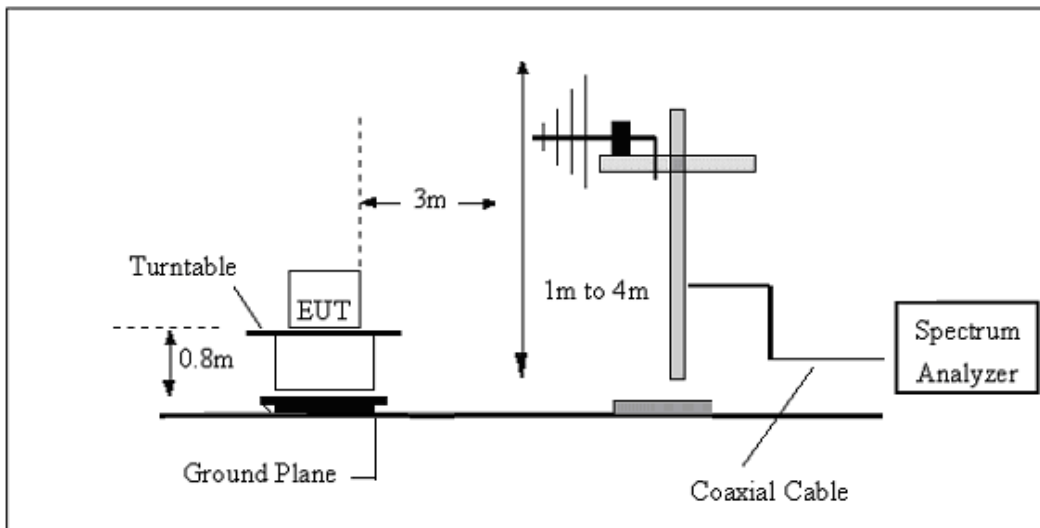

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

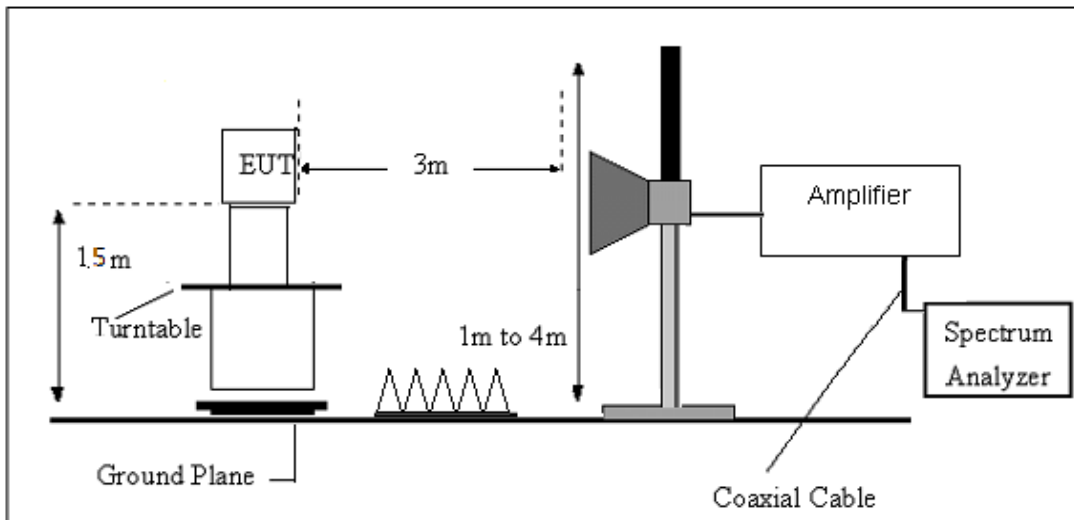



4.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	ASK	Test Voltage:	DC 12V

For field strength of the fundamental/Harmonics signal

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Average Factor (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	PEAK			AV	PEAK	AV	PEAK	AV	PEAK	
<b>315.0806</b>	<b>89.86</b>	<b>-8.58</b>	<b>-10.75</b>	<b>70.53</b>	<b>81.28</b>	<b>75.63</b>	<b>95.63</b>	<b>-5.10</b>	<b>-14.35</b>	Horizontal
630.0884	64.69	-1.95	-10.75	51.99	62.74	55.63	75.63	-3.64	-12.89	
945.0397	53.28	3.03	-10.75	45.56	56.31	55.63	75.63	-10.07	-19.32	
1260.057	68.27	-6.20	-10.75	51.32	62.07	55.63	75.63	-4.31	-13.56	
1575.025	62.51	-5.01	-10.75	46.75	57.50	55.63	75.63	-8.88	-18.13	
1890.094	57.46	-2.25	-10.75	44.46	55.21	55.63	75.63	-11.17	-20.42	
<b>315.0806</b>	<b>88.29</b>	<b>-8.58</b>	<b>-10.75</b>	<b>68.96</b>	<b>79.71</b>	<b>75.63</b>	<b>95.63</b>	<b>-6.67</b>	<b>-15.92</b>	Vertical
629.9772	60.72	-1.97	-10.75	48.00	58.75	55.63	75.63	-7.63	-16.88	
945.0397	50.92	3.03	-10.75	43.17	53.95	55.63	75.63	-12.46	-21.68	
1260.057	62.16	-6.20	-10.75	45.21	55.96	55.63	75.63	-10.42	-19.67	
1575.025	56.81	-5.01	-10.75	41.05	51.80	55.63	75.63	-14.58	-23.83	
1890.094	45.71	-2.25	-10.75	32.71	43.46	55.63	75.63	-22.92	-32.17	

Note: av Level=pk level +duty cycle  
 Duty cycle factor=-10.75

For spurious emission

(9KHz-30MHz)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	ASK		

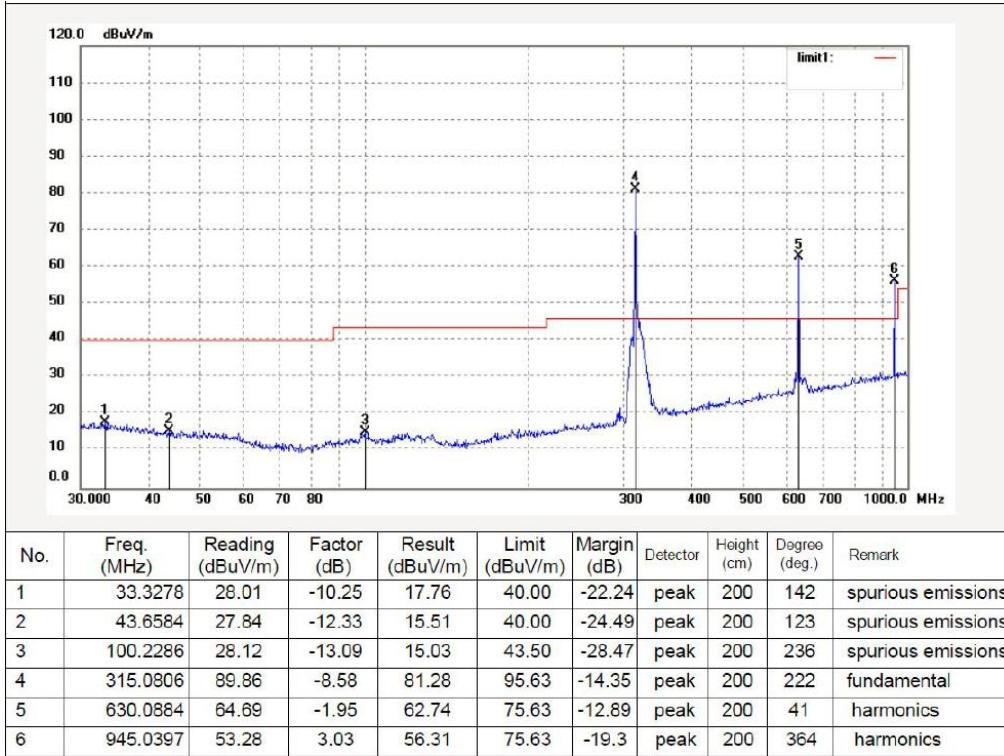


Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	ASK		

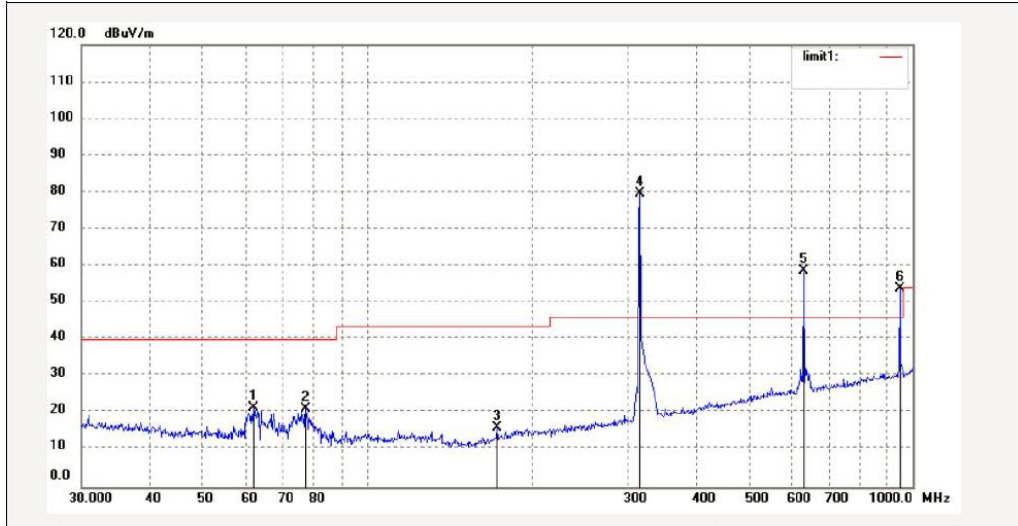


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	61.9951	36.00	-14.62	21.38	40.00	-18.62	peak	100	102	spurious emissions
2	77.3212	37.82	-16.60	21.22	40.00	-18.78	peak	100	156	spurious emissions
3	172.5988	29.66	-13.50	16.16	43.50	-27.34	peak	100	145	spurious emissions
4	315.0806	88.29	-8.58	79.71	95.63	-15.92	peak	100	250	fundamental
5	629.9772	60.72	-1.97	58.75	75.63	-16.88	peak	100	178	harmonics
6	945.0397	50.92	3.03	53.95	75.63	-21.68	peak	100	214	harmonics

(1GHZ~4GHZ)

H

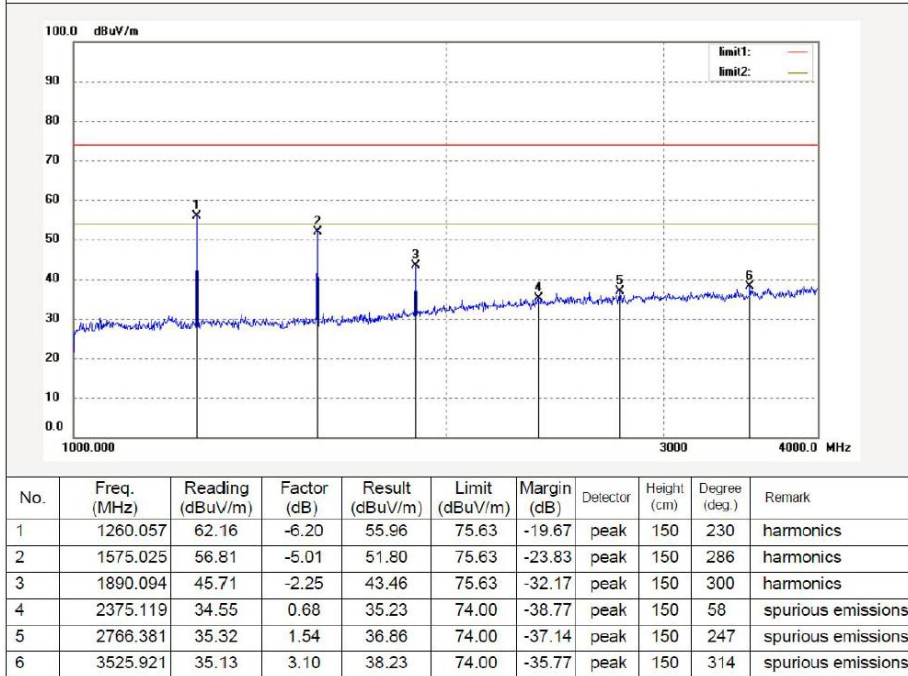

V

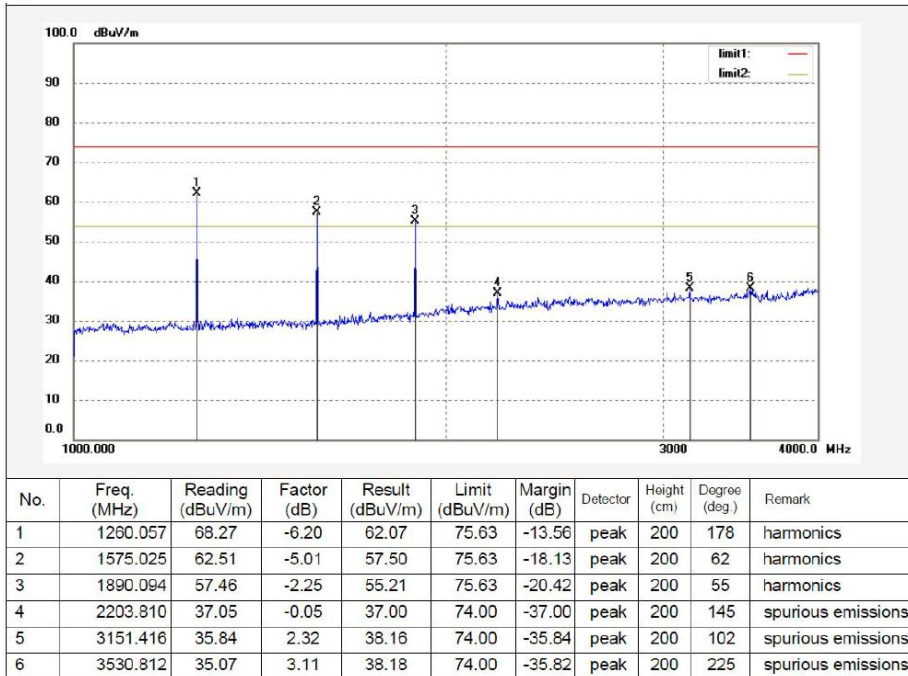

Note:  
 The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor  
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## 5. TRANSMITTER TIME


### 5.1 LIMIT

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

### 5.2 TEST PROCEDURE


- a. The EUT's RF signal was coupled to spectrum analyzer by antenna connected to spectrum analyzer.
- b. Set the spectrum to zero span mode, and centered of EUT frequency.
- c. Measure the stop transmitting time after release EUT button

### 5.3 TEST SETUP

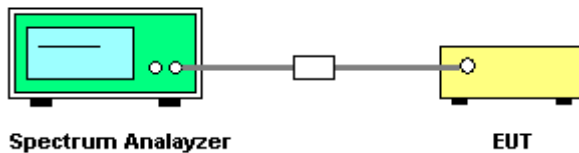

### 5.4 TEST RESULTS

Frequency(MHz)	Transmitter Time	Limit	Result
315.00	3.22s	≤5s	Pass

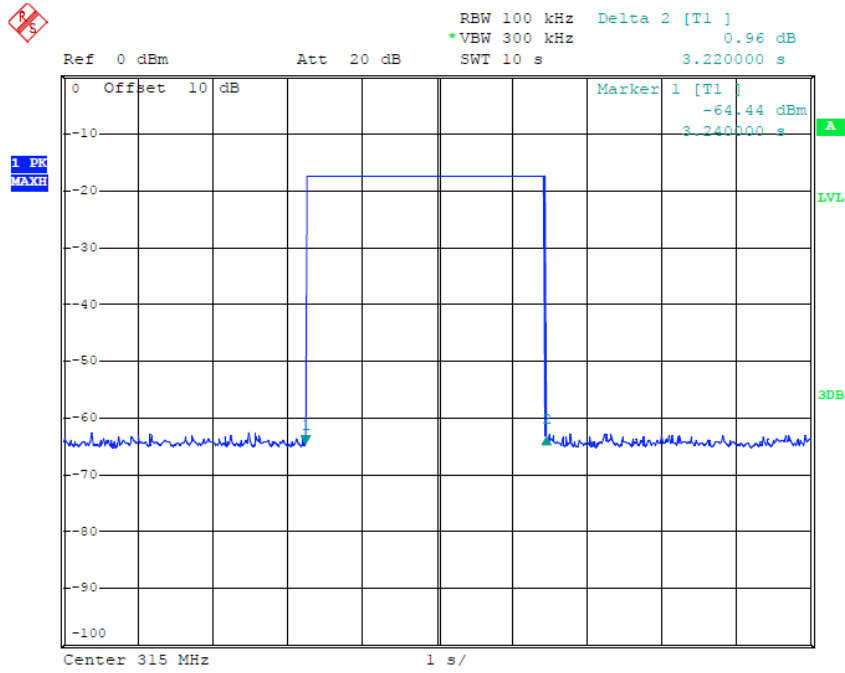

## 6. 20 DB BANDWIDTH TEST

### 6.1 LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency of devices operation above 70MHz and below 900MHz.


### 6.2 TEST PROCEDURE

- a. Connect EUT' s antenna output to spectrum analyzer by RF cable.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10Hz RBW and 30kHz VBW. The 20dB bandwidth is defined as the total spectrum the

- b. power of which is higher than peak power minus 20dB

### 6.3 TEST SETUP

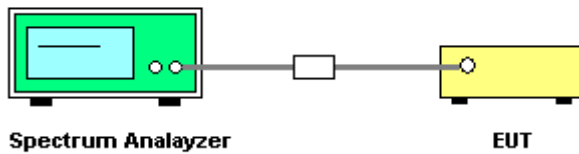




6.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	ASK	Test Voltage:	DC 12V

Frequency	20dB Bandwidth (MHz)	Result
315.00 MHz	0.052	PASS

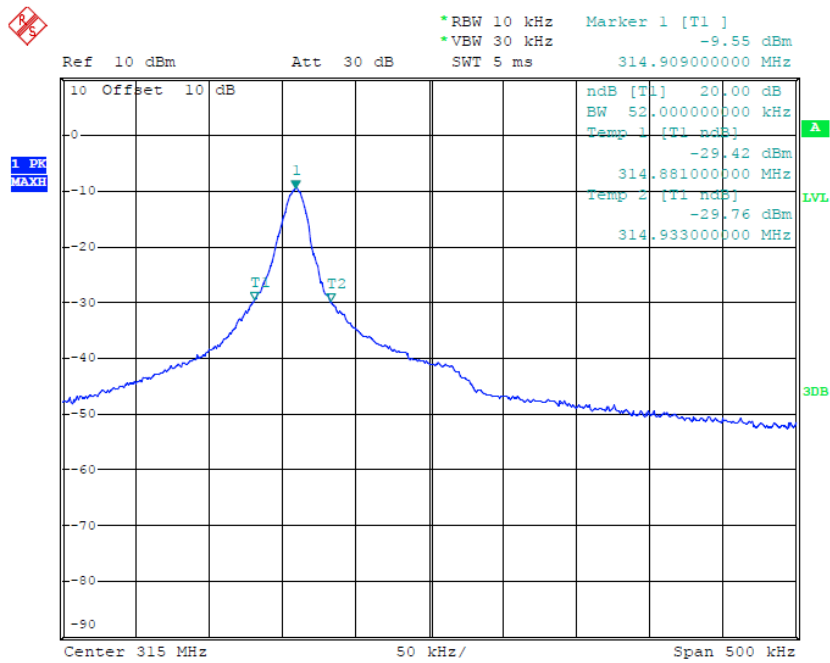

## 7. DUTY CYCLE

### 7.1 LIMIT

None: for reporting purposes only.


### 7.2 TEST PROCEDURE

Set the Centre frequency of the spectrum analyzer to the transmitting frequency;

- a. Set the span=0MHz, RBW=1MHz, VBW=3MHz, Sweep time=50ms;

Trace mode = Single hold

### 7.3 TEST SETUP

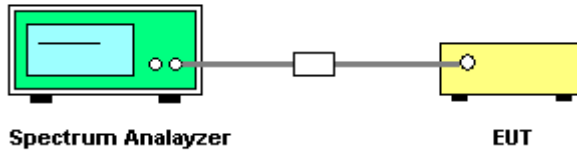




7.4 TEST RESULTS

Frequency	Duty Cycle
315 MHz	29%

The duty cycle is simply the on time divided by the period:  
 The duration of one cycle = 26.3ms  
 Effective period of the cycle =  $0.78 \times 6 + 0.42 \times 7 \text{ms} = 7.62 \text{ms}$   
 Duty Cycle =  $7.62 \text{ms} / 26.3 \text{ms} = 0.29$   
 Duty Cycle Factor(dB) =  $20 \log(\text{duty cycle}(\%)) = -10.75 \text{dB}$

Original test data

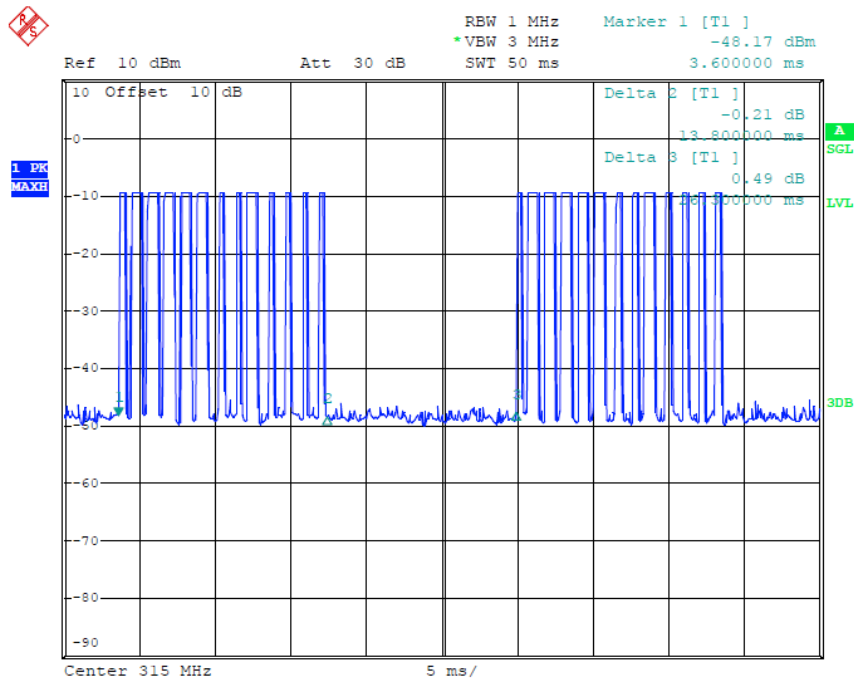

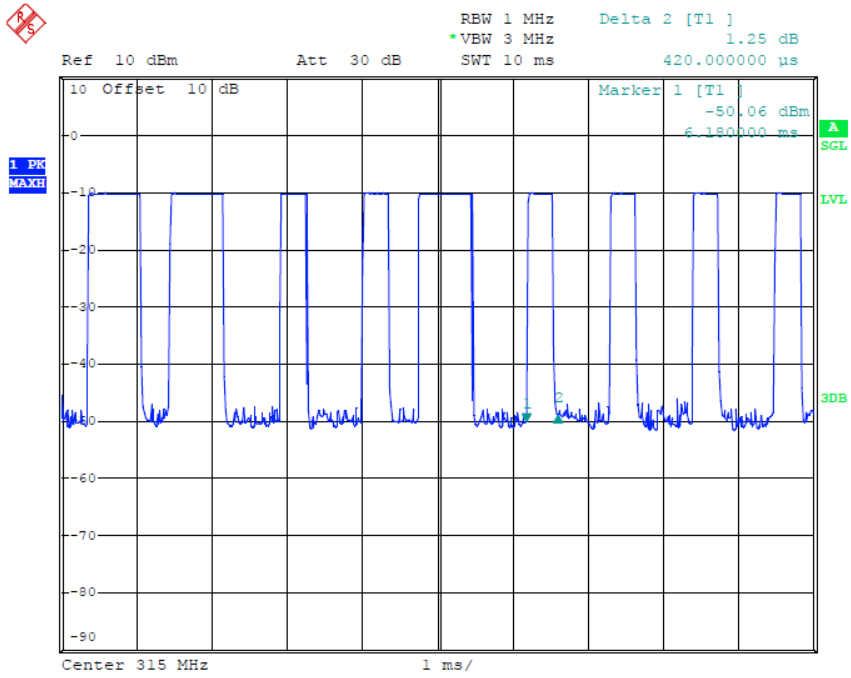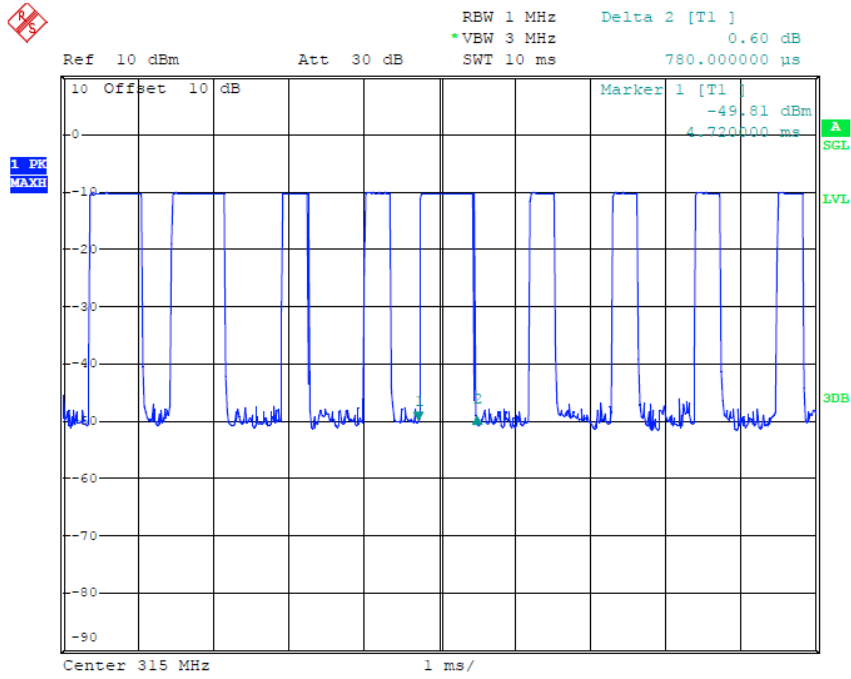

## 8 ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The antennas used for this product are PCB antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*