

November 21, 2023

Trackonomy Systems
214 Devcon Drive
San Jose, CA 95112

Dear Saurabh Sanghai,

Enclosed is the Wireless test report for compliance testing of the Trackonomy Systems, Multifunctional IoT Platform Sensor as tested to the requirements of Title 47 of the CFR, Part 15 Subpart C, RSS 247 for Intentional Radiators.

Thank you for using the services of Eurofins Electrical and Electronic Testing NA, Inc. If you have any questions regarding these results or if Eurofins Electrical and Electronic Testing NA, Inc. can be of further service to you, please feel free to contact me.

Gary Chou

Documentation Department
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIR128432-Track_FCC_ISED_BLE



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins Electrical and Electronic Testing NA, Inc. While use of the A2LA logo in this report reflects Eurofins Electrical and Electronic Testing NA, Inc. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Report: WIR128432-Track_FCC_ISED_BLE

Applicant Address:

**214 Devcon Drive
San Jose, CA 95112**

Manufacturer Address:

**214 Devcon Drive
San Jose, CA 95112**

**Prepared By:
Eurofins Electrical and Electronic Testing NA, Inc.
3162 Belick St.
Santa Clara CA, 95054**

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

558074 D01 15.247 Meas Guidance v05r02

RSS 247 Issue2, February 2017

RSS Gen Issue5, March 2019

ANSI C63.10: 2013

Richard Dollente

Richard Dollente

Test Engineer, Wireless Laboratory

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements FCC Rules under normal use and maintenance.

Gary Chou

Gary Chou

Wireless Engineering Manager, Wireless Laboratory

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 21, 2023	Initial Issue.

Table of Contents

I.	Executive Summary	6
	A. Executive Summary	6
II.	Equipment Information	7
	A. Overview.....	7
	B. References.....	9
	C. Test Site	9
	D. Measurement Uncertainty	10
	E. Modifications	10
	Modifications to EUT	10
	Modifications to Test Standard.....	10
	F. Disposition of EUT	10
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	11
	A. Radiated Emission and Bandage Measurement	11
	B. Conducted Emission Measurement.....	26
	C. 6dB Bandwidth Measurement & 99% Bandwidth Measurement	29
	D. Conducted Output Power Measurement	35
	E. Power Spectral Density Measurement	37
	F. Conducted Out of Band Emission Measurement	40

I. Executive Summary

A. Executive Summary

47 CFR FCC Part 15, Subpart C (SECTION 15.247) RSS 247 Issue2, RSS Gen Issue5				
FCC/ IC Cluse	ISED	Test Item	Result	Remarks
15.207	RSS Gen 8.8	AC Power Conducted Emission	N/A	Powered by battery so test is not required.
15.205 & 15.209 & 15.247(d)	RSS Gen 8.8	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS 247 5.5C	6dB bandwidth & 99% bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS 247 5.2.1 RSS Gen 6.7	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS 247 5.4.4	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	RSS 247 5.2.2	Antenna Requirement	PASS	PCB antenna (without connector) meet the requirement.

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

II. Equipment Information

A. Overview

EUT Summary Table

Product:	Multifunctional IoT Platform Sensor	
Brand:	Trackonomy	
Model(s) Tested:	FBO-2003	
Series Model:	N/A	
Sample Status:	Product Sample	
EUT Specifications:	Primary Power:	3 Vdc battery powered
	Voltage Frequency:	N/A
	Technology / Type of Modulations:	BLUETOOTH LE: GFSK
	Operating Frequency :	2.402 ~ 2.480GHz
	FCC ID:	2AXA8-FBO-2003
	ISED ID:	27299-FBO2003
	Antenna Manufacturer / Model	Molex/ 146180300 (Or similar antenna type with equivalent or lower gain)
	Antenna Type:	Flexible PCB Antenna
	Antenna connector:	U.FL
	Antenna Gain	Antenna Gain: 2.4 dBi
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 20.3° C	
	Relative Humidity: 47.5%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Richard Dollente	
Issue Date(s):	November 21, 2023	

NOTE:

The FBO-2003 is available with the option of mounting lugs to attach the device using mounting fixtures. The mounting lugs do not impact the RF performance of the device in any way. The data in this report covers the scope for the device in both configurations.

The following modules can be chosen to be configured in the EUT.

	Model No.	FCC ID	Note
-	-	-	-
-	-	-	-

FCC/IC RF Testing Units Setting

Model	Hardware (FW) Rev.	Firmware (FW) Rev.	FW operation verification and Instruction
FBO-2003	Nominal HW V2	Nominal FW V2	Verify by Spectrum Analyzer & Laptop

DESCRIPTION OF TEST MODES

Power Setting :

Channel	Frequency(MHz)	Power Setting
0	2402	default
19	2440	default
39	2480	default

40 channels are provided for Bluetooth LE:

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

B. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
B	wideband radio communication tester	ROHDE& SCHARZ	CMW500	1201.0002K50	-	Bluetooth Tester

Note: (Describe the outline of a simulator, if used for the tests, as a note under the table.)

Insert Cable Connections to/from EUT provided by test team.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
	-	-	-	-	0	-

Note: The core(s) is(are) originally attached to the cable(s).

General Description of Applied Standards

C. References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- 47 CFR FCC Part 15, Subpart C (Section 15.247)
- 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10:2013
- RSS 247 Issue2
- RSS Gen Issue5

D. Test Site

All testing was performed at Eurofins Electrical and Electronic Testing NA, Inc., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins Electrical and Electronic Testing NA, Inc. has been accredited by the American Association for Laboratory Accreditation (A2LA) (Certificate #: 0591.02) in accordance with ISO/IEC 17025:2017.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

E. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Uncertainty Calculations Summary**F. Modifications****a) Modifications to EUT**

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

G. Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to Trackonomy System upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Radiated Emission and Bandage Measurement

Limits of Radiated Emission and Bandage Measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Test Procedures:


The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

Test Setup


For Radiated Emission Below 30MHz

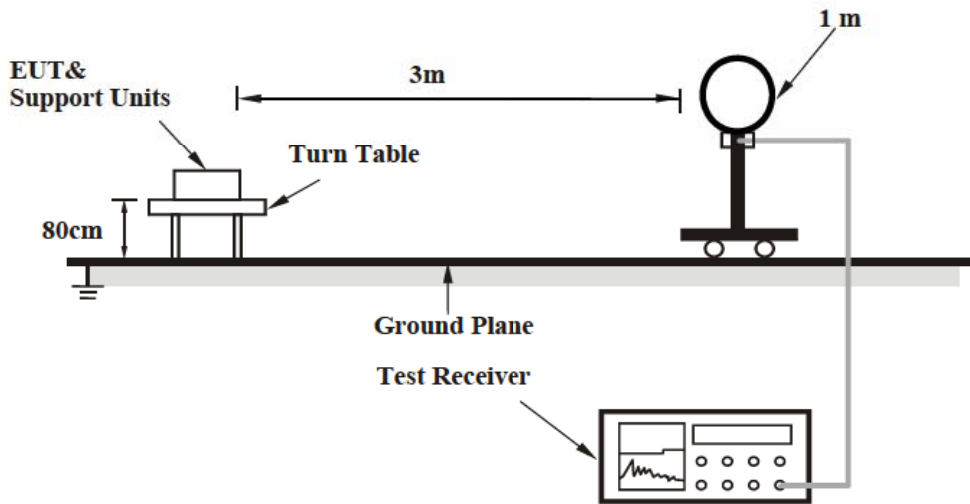

For Radiated emission 30 MHz to 1GHz

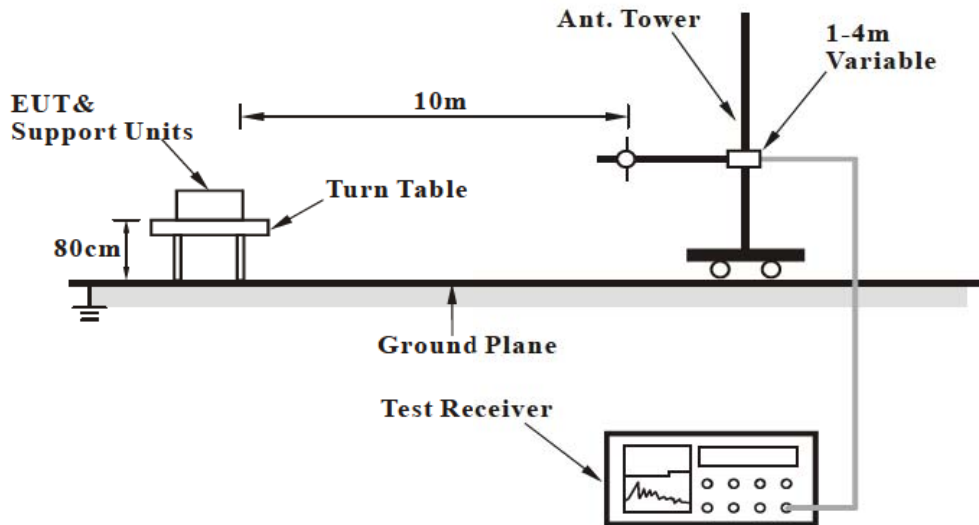

For Radiated emission 1GHz to 40GHz

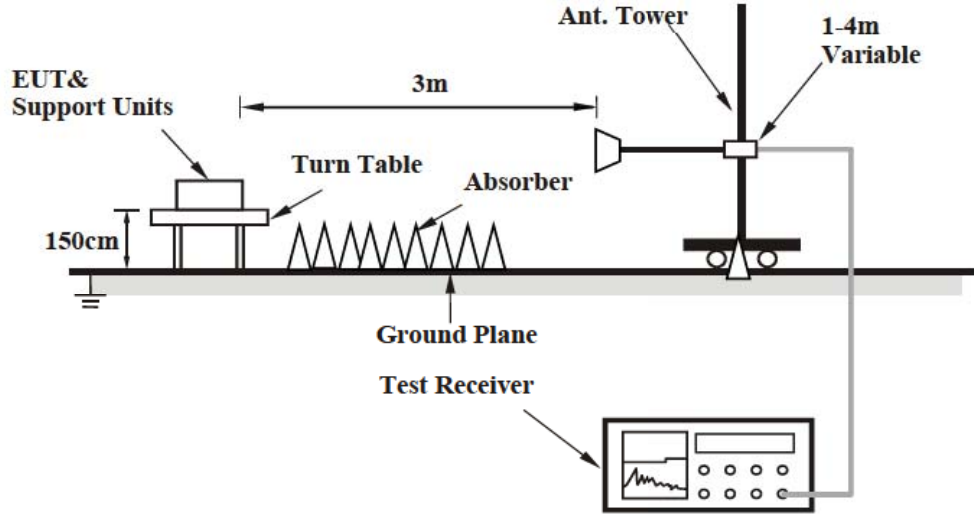

Test Results: The EUT was tested is **compliant** with Radiated Spurious Emissions Requirements.

Test Equipment List

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
1S2399	Turntable Controller	SUNOL SCIENCE	SC99V	Not Required	Not Required
1S2486	5 Meter Chamber Control Room	Panashield	5 Meter Control Room	Not Required	Not Required
1S3826	Horn Antenna	ETS-LINDGREN	3117	04/06/2023	04/06/2025
1S4802	Preamplifier	EMC Instrument	EMC118A45SE	Note 1	Note 1
1S2668	Preamplifier	Sonoma Instrument	310N	Note 1	Note 1
1S2600	Antenna	Sunol Sciences Corp	JB3	04/ 11/ 2023	04/ 11/ 2025
1S3983	Loop Antenna	ETS-LINDGREN	6512	10/ 14 /2021	10/ 14 /2023

Note 1: Verified by calibrated instrumentation at the time of testing

Test Engineer: Richard Dollente


Test Date(s): 11/06/2023

Test Data

Radiated Emissions (30 MHz~1000 MHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - 30MHz-1GHz (Vertical)

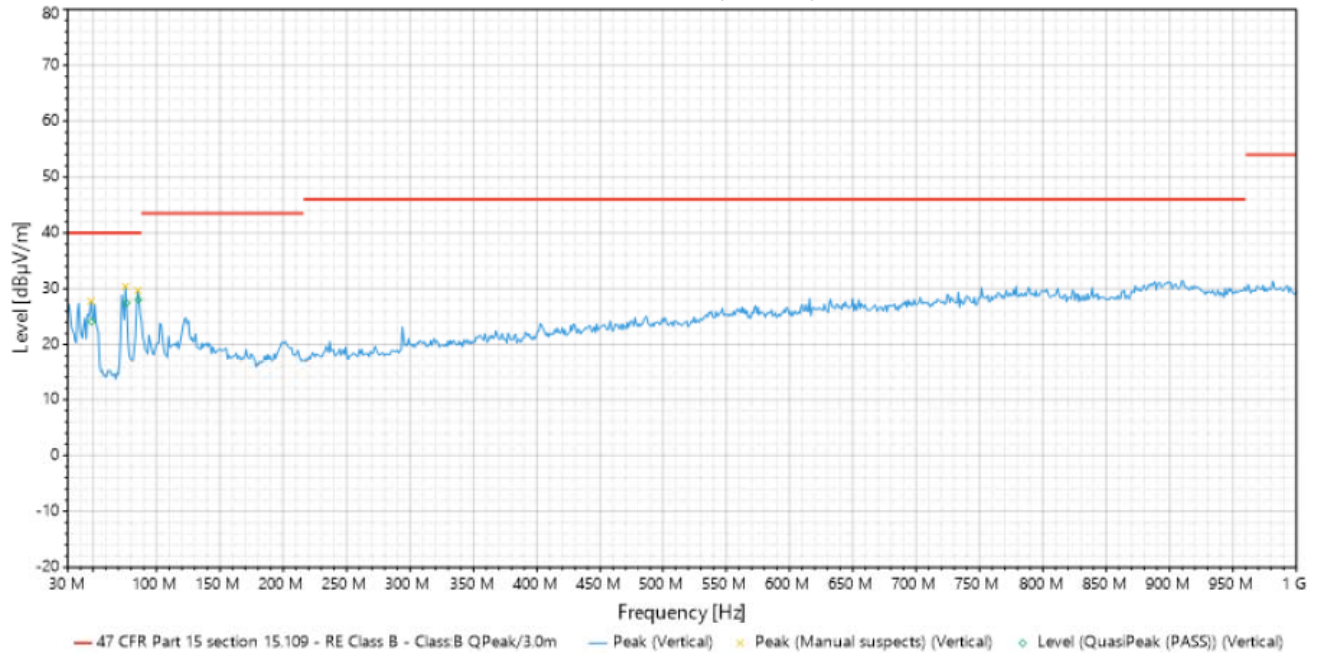

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	48.87	Vertical	24.139	40	-15.861	1	272	-14.079	Pass
2	76.36	Vertical	27.474	40	-12.526	1.08	212	-15.07	Pass
3	85.7	Vertical	28.065	40	-11.935	1.319	164	-13.911	Pass


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier

3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - 30MHz-1GHz (Horizontal)

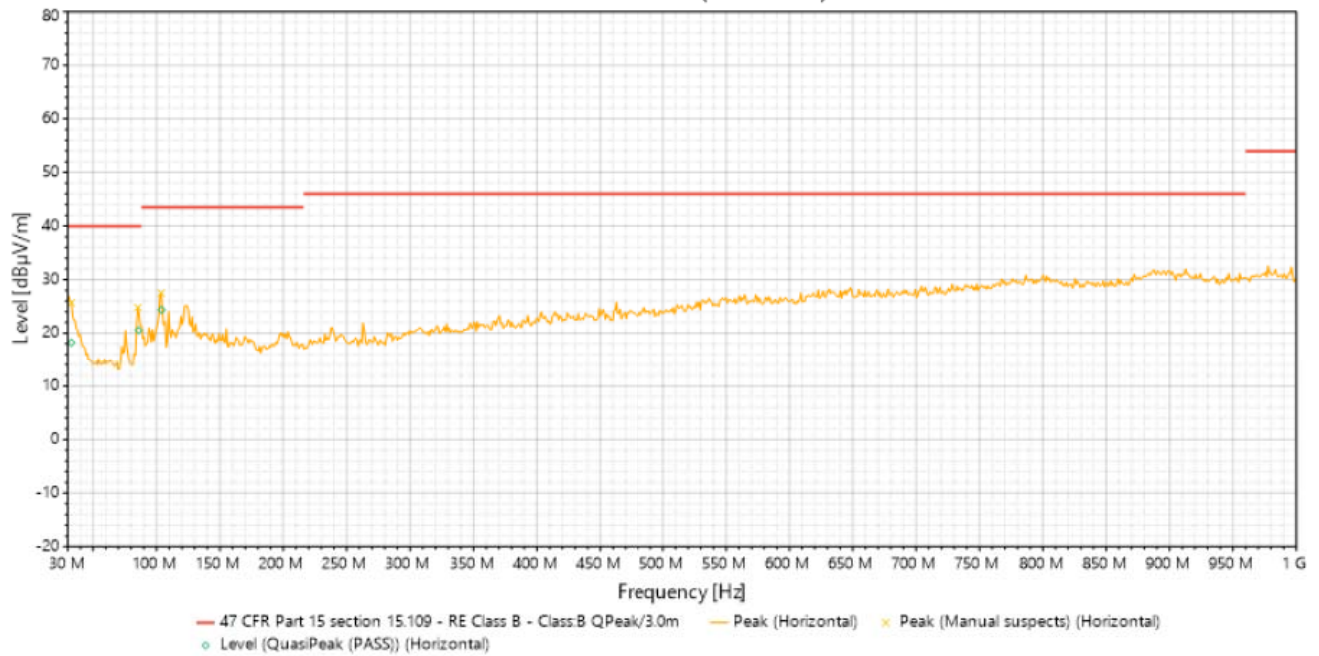

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	32.84	Horizontal	18.23	40	-21.77	1.26	152	-3.019	Pass
2	85.88	Horizontal	20.535	40	-19.465	2.209	94	-14.522	Pass
3	103.99	Horizontal	24.359	43.5	-19.141	2.368	119	-9.727	Pass


REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.

4. The emission levels of other frequencies were less than 20dB margin against the limit.

Radiated Emissions (Above 1GHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

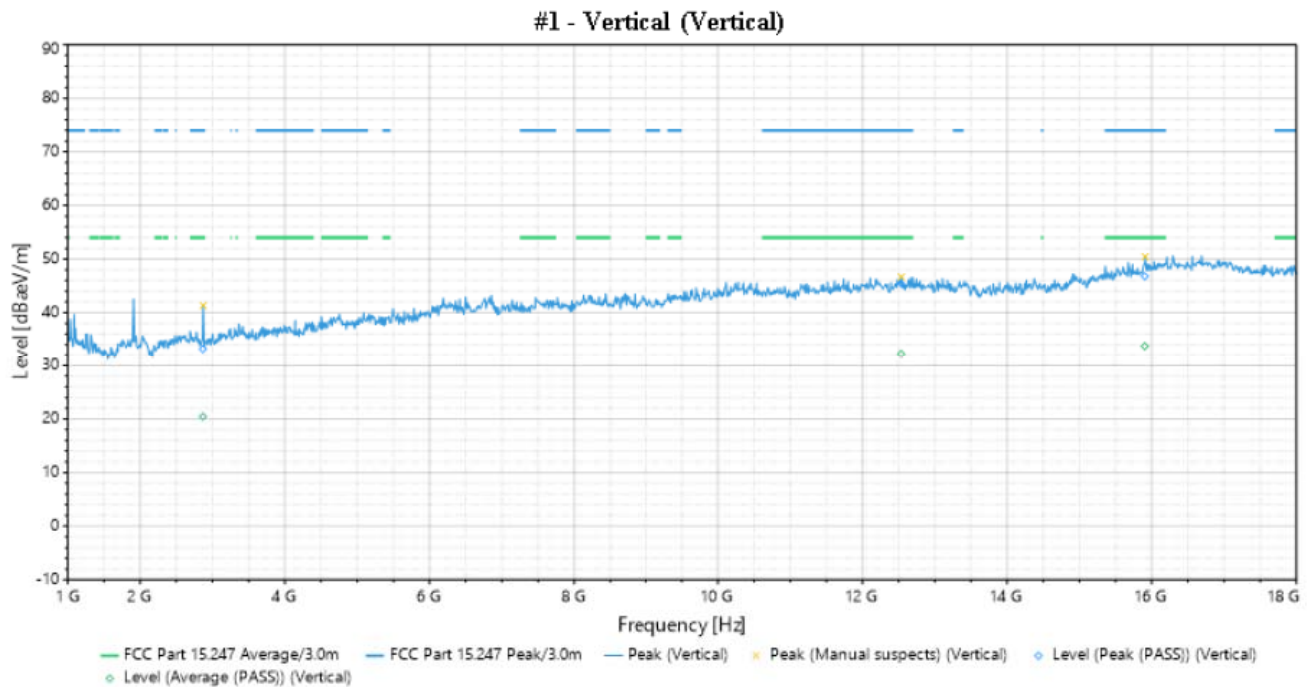

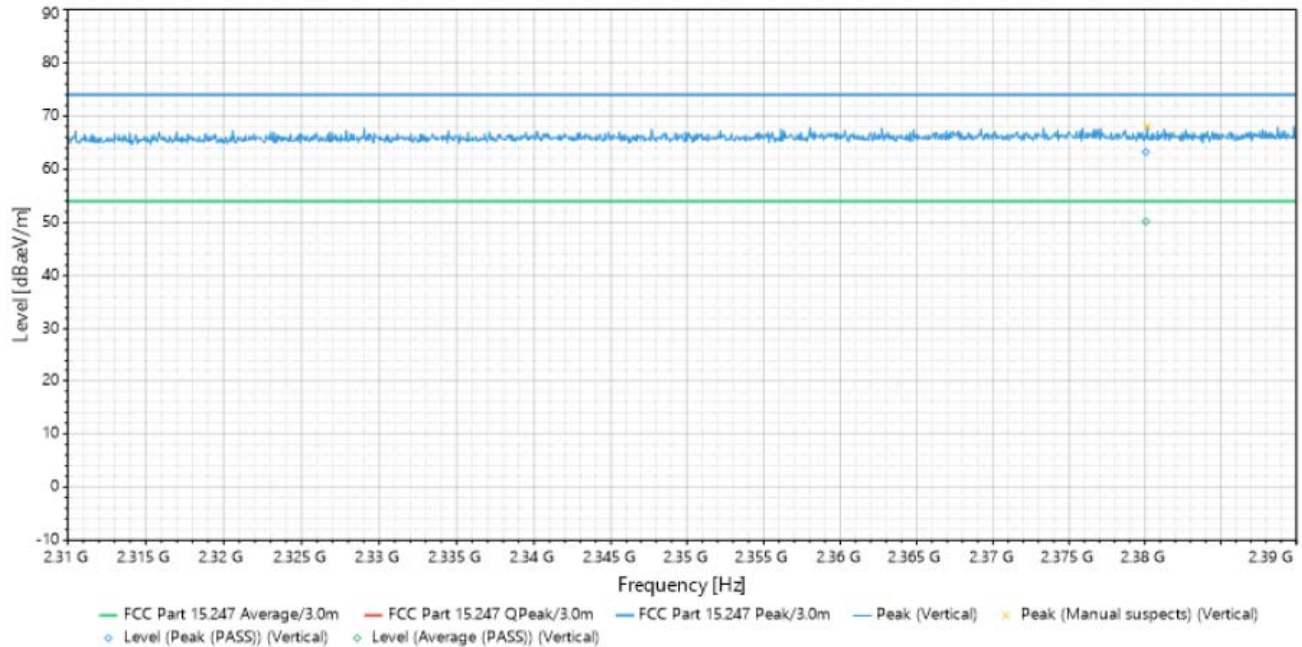


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	2869.47	Vertical	33.211	74	-40.789	1.008	346	1.755	Peak (PASS)
2	2869.47	Vertical	20.448	54	-33.552	1.008	346	1.755	Average (PASS)
3	12533.24	Vertical	45.41	74	-28.59	3.13	287	9.001	Peak (PASS)
4	12533.24	Vertical	32.268	54	-21.732	3.13	287	9.001	Average (PASS)
5	15904.27	Vertical	46.796	74	-27.204	2.813	252	10.287	Peak (PASS)
6	15904.27	Vertical	33.743	54	-20.257	2.813	252	10.287	Average (PASS)
7	2380.06	Vertical	63.247	74	-10.753	1.316	205	38.184	Peak (PASS)
8	2380.06	Vertical	50.174	54	-3.826	1.316	205	38.184	Average (PASS)

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2402 MHz		

#2 - Horizontal (Horizontal)

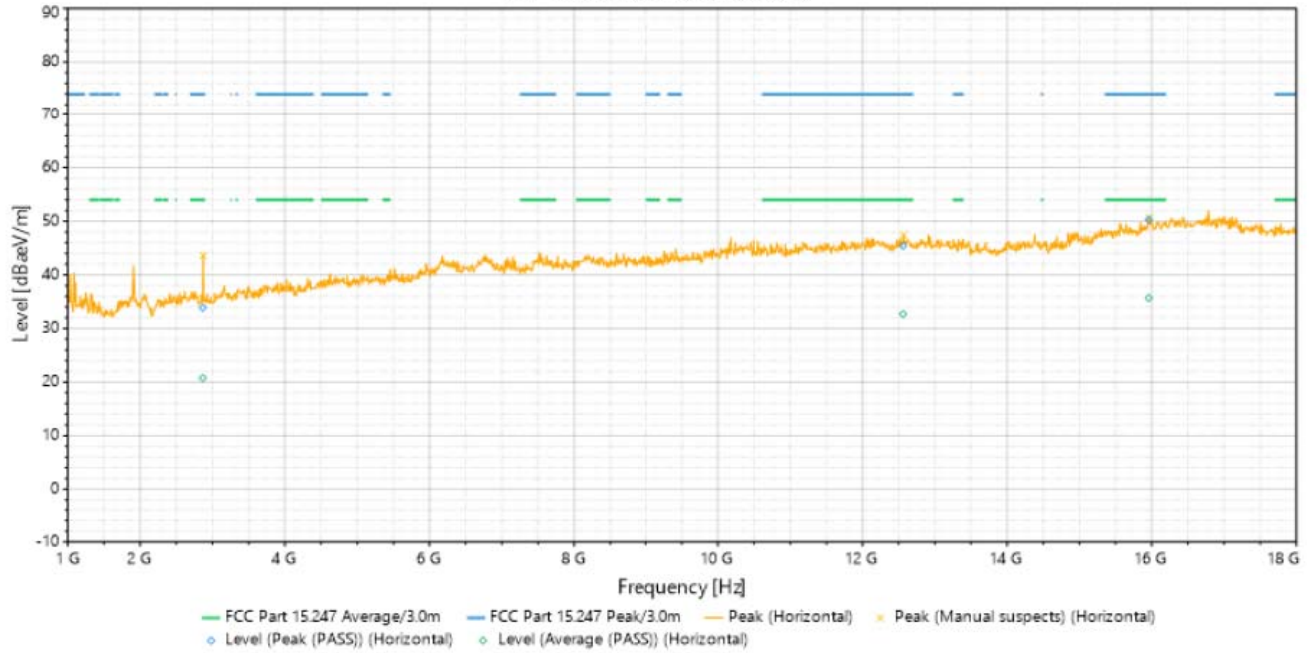

#2 - 2.31GHz-2.39GHz (Horizontal)

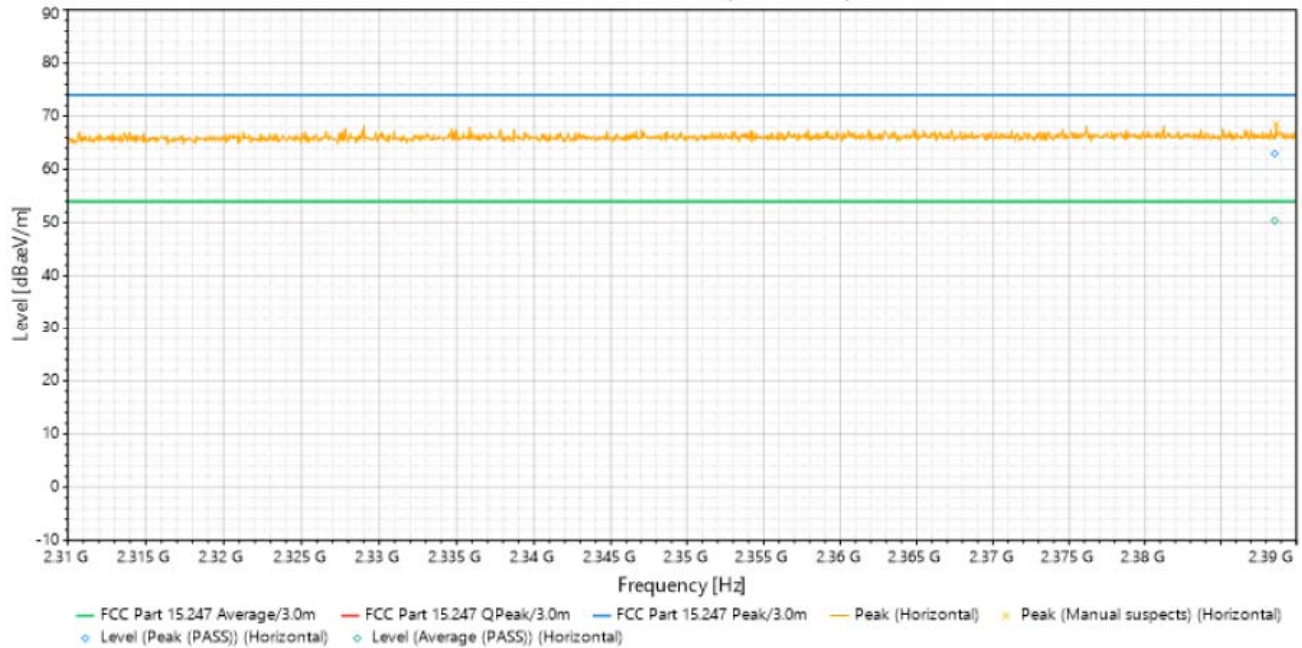


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	2866.22	Horizontal	33.885	74	-40.115	2.104	337	1.807	Peak (PASS)
2	2866.22	Horizontal	20.77	54	-33.23	2.104	337	1.807	Average (PASS)
3	12561.56	Horizontal	45.412	74	-28.588	3.009	248	9.038	Peak (PASS)
4	12561.56	Horizontal	32.674	54	-21.326	3.009	248	9.038	Average (PASS)
5	15959.44	Horizontal	50.305	74	-23.695	3.5	348	10.271	Peak (PASS)
6	15959.44	Horizontal	35.677	54	-18.323	3.5	348	10.271	Average (PASS)
7	2388.572	Horizontal	62.977	74	-11.023	2.874	139	38.313	Peak (PASS)
8	2388.572	Horizontal	50.376	54	-3.624	2.874	139	38.313	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#1 - Vertical (Vertical)

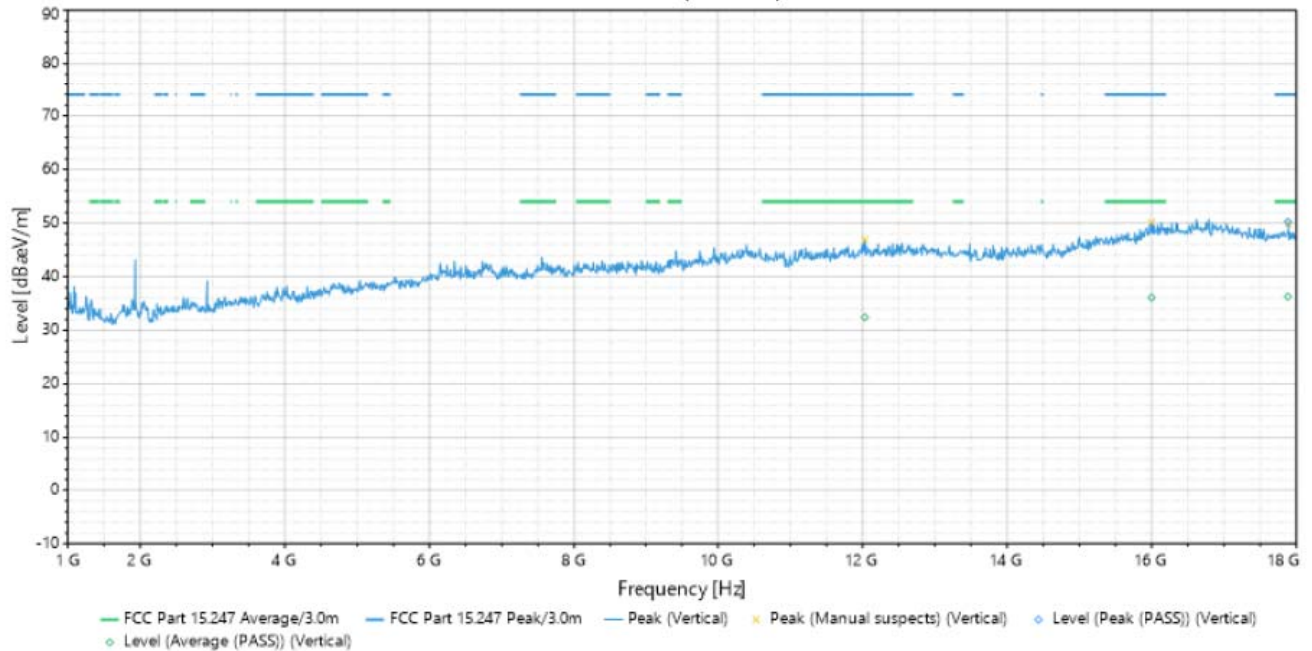


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12031.12	Vertical	45.21	74	-28.79	3.1	184	8.851	Peak (PASS)
2	12031.12	Vertical	32.421	54	-21.579	3.1	184	8.851	Average (PASS)
3	15997.99	Vertical	49.068	74	-24.932	3.42	183	10.365	Peak (PASS)
4	15997.99	Vertical	36.102	54	-17.898	3.42	183	10.365	Average (PASS)
5	17885.03	Vertical	50.245	74	-23.755	3.103	10	8.868	Peak (PASS)
6	17885.03	Vertical	36.268	54	-17.732	3.103	10	8.868	Average (PASS)

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2440 MHz		

#2 - Horizontal (Horizontal)

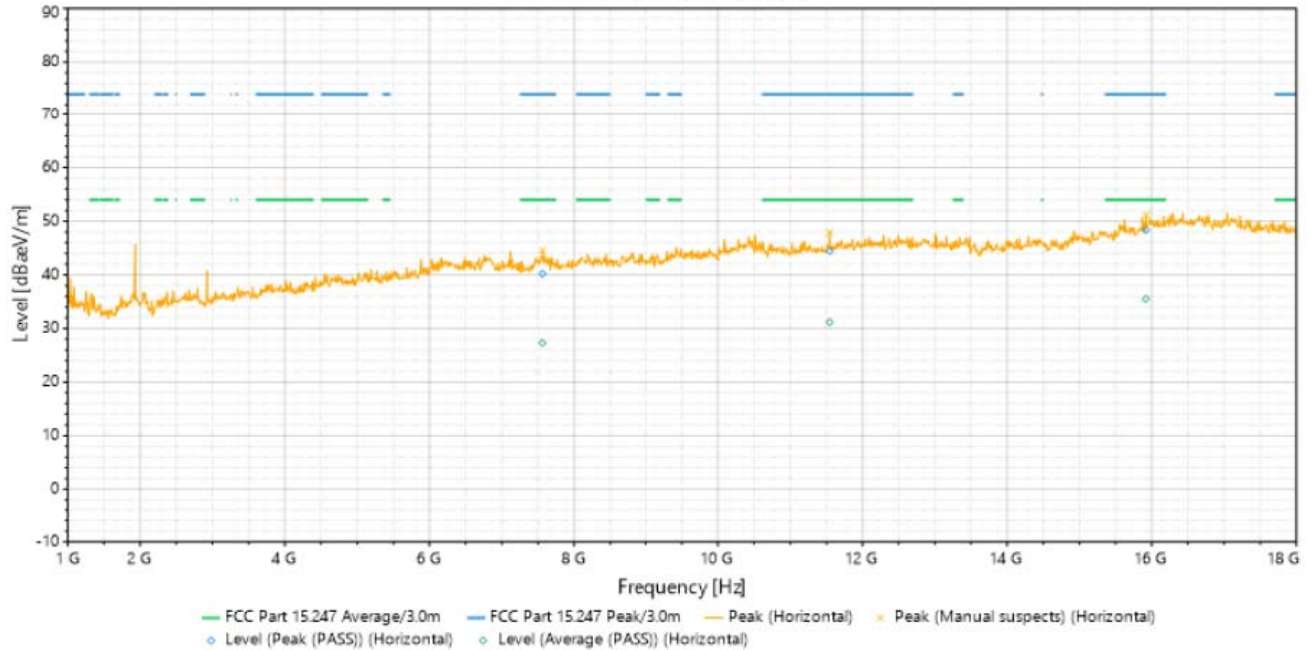


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	7560.52	Horizontal	40.21	74	-33.79	2.599	162	6.553	Peak (PASS)
2	7560.52	Horizontal	27.296	54	-26.704	2.599	162	6.553	Average (PASS)
3	11545.32	Horizontal	44.478	74	-29.522	2.604	313	8.137	Peak (PASS)
4	11545.32	Horizontal	31.185	54	-22.815	2.604	313	8.137	Average (PASS)
5	15918.96	Horizontal	48.37	74	-25.63	3.5	159	10.232	Peak (PASS)
6	15918.96	Horizontal	35.529	54	-18.471	3.5	159	10.232	Average (PASS)

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#1 - Vertical (Vertical)

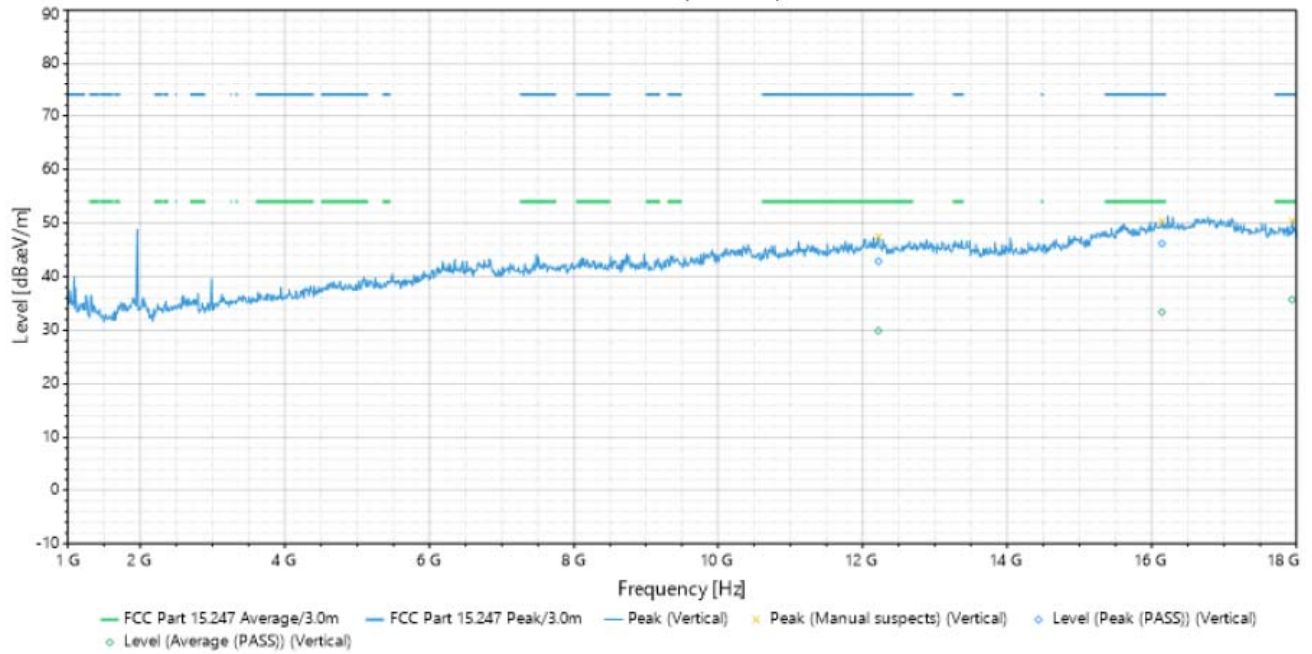

#1 - 2.4835GHz-2.5GHz (Vertical)

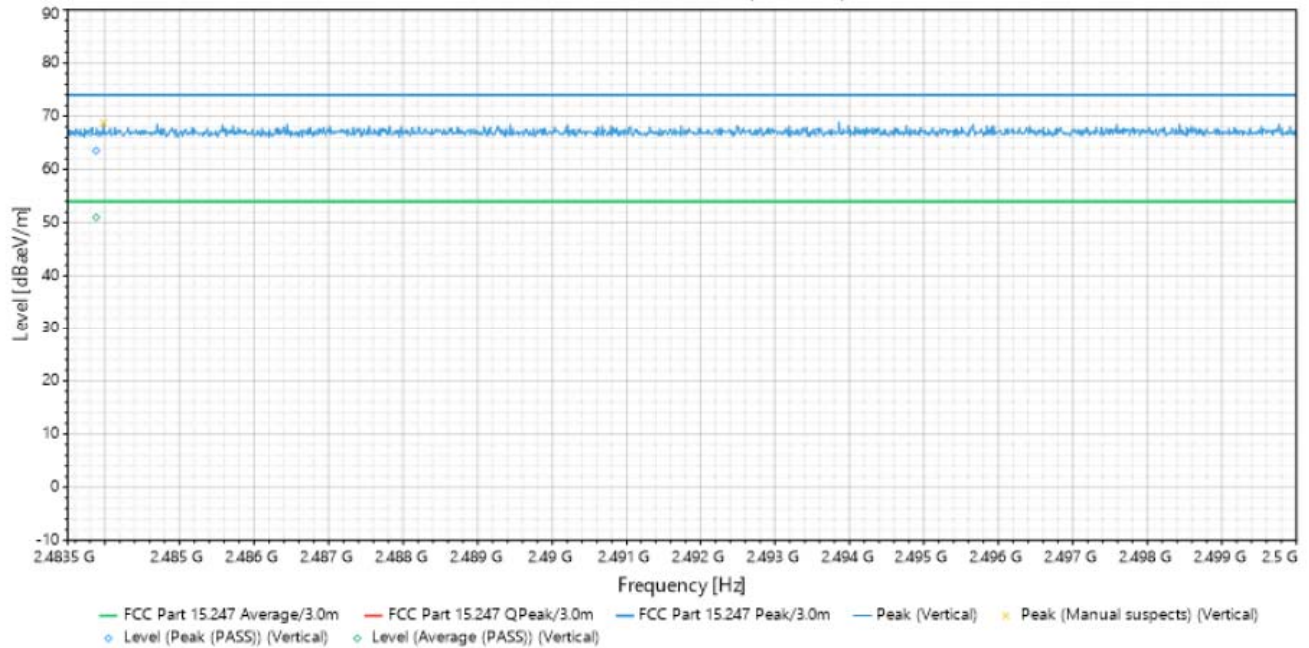


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	12220.08	Vertical	42.87	74	-31.13	1.277	353	8.965	Peak (PASS)
2	12220.08	Vertical	29.905	54	-24.095	1.277	353	8.965	Average (PASS)
3	16141.32	Vertical	46.198	74	-27.802	1.315	212	10.326	Peak (PASS)
4	16141.32	Vertical	33.382	54	-20.618	1.315	212	10.326	Average (PASS)
5	17940.23	Vertical	48.83	74	-25.17	1.144	102	8.817	Peak (PASS)
6	17940.23	Vertical	35.709	54	-18.291	1.144	102	8.817	Average (PASS)
7	2483.882	Vertical	63.544	74	-10.456	2.529	337	38.63	Peak (PASS)
8	2483.882	Vertical	51.008	54	-2.992	2.529	337	38.63	Average (PASS)


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vcd	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE BLE 2480 MHz		

#2 - Horizontal (Horizontal)

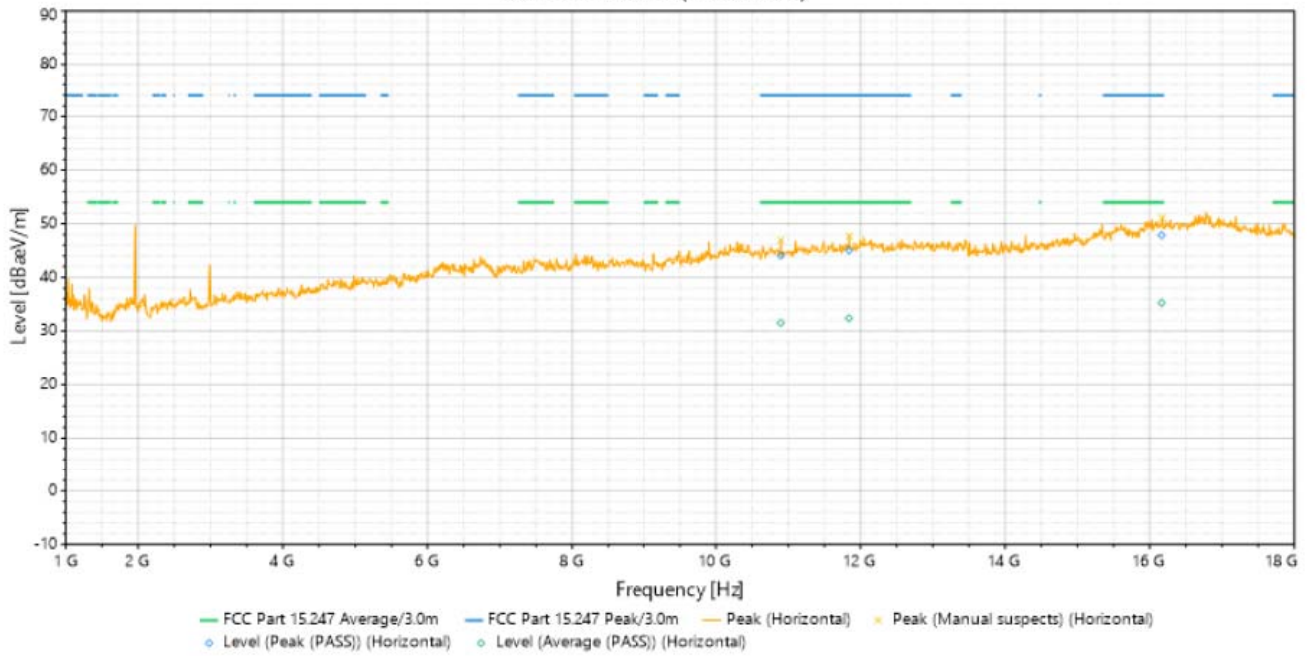

#2 - 2.4835GHz-2.5GHz (Horizontal)

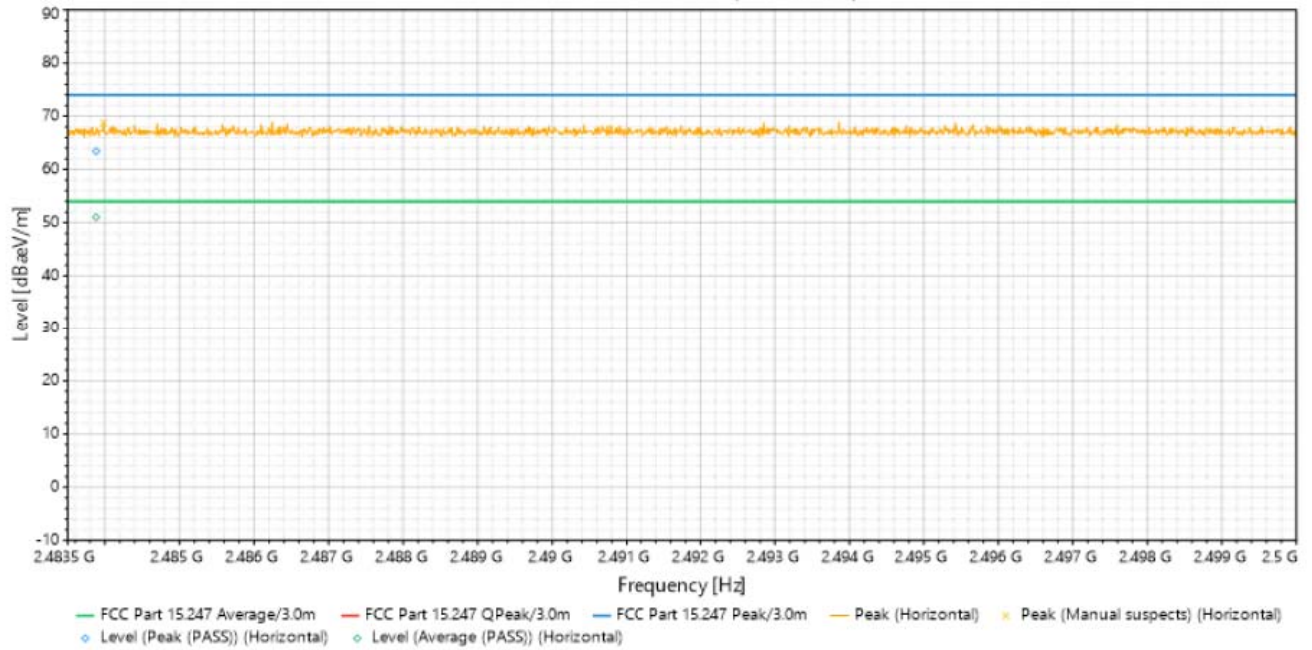

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	10897	Horizontal	44.085	74	-29.915	3.5	355	7.822	Peak (PASS)
2	10897	Horizontal	31.509	54	-22.491	3.5	355	7.822	Average (PASS)
3	11841.05	Horizontal	45.041	74	-28.959	3.5	290	8.682	Peak (PASS)
4	11841.05	Horizontal	32.374	54	-21.626	3.5	290	8.682	Average (PASS)
5	16165.62	Horizontal	47.866	74	-26.134	2.825	35	10.324	Peak (PASS)
6	16165.62	Horizontal	35.263	54	-18.737	2.825	35	10.324	Average (PASS)
7	2483.882	Horizontal	63.434	74	-10.566	1.533	312	38.634	Peak (PASS)
8	2483.882	Horizontal	51.034	54	-2.966	1.533	312	38.634	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

Conducted Emission Measurement**Limits of Conducted Emission Measurement :**

The following standards specified below are covered in the scope of this section of the test report:


Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Conducted Emissions - Test Procedure

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency ranges from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Conducted Emissions - Test Setup

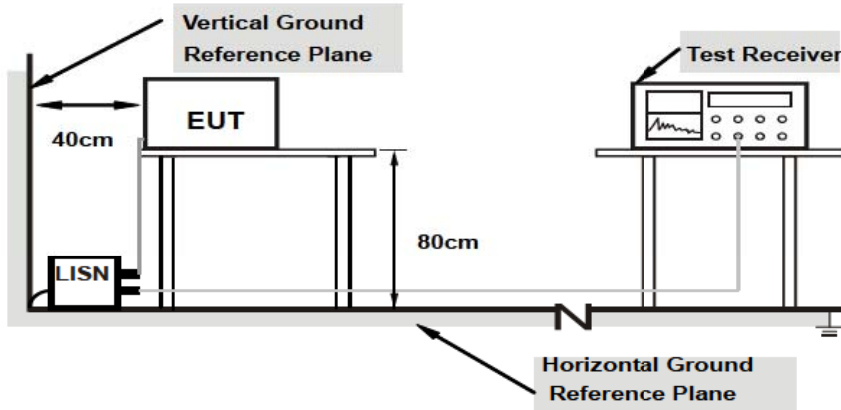

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Results:

N/A

6dB Bandwidth Measurement & 99% Bandwidth Measurement

Limits of Conducted Emission Measurement :

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

Test Procedure


99% Bandwidth Measurement

Refer to ANSI C63.10 section 6.9.3

-6dB Bandwidth Measurement

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Conducted Emissions - Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: 6dB Bandwidth Measurement & 99% Bandwidth Measurement			Test Date(s): 11/11/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:**DATA RATE:****2 MHz**


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.225	2.1010	0.5	PASS
19	2440	1.365	2.1059	0.5	PASS
39	2480	1.361	2.1061	0.5	PASS

Test Plots:


-6dB Bandwidth:




BLE-2402MHz -Data Rate- 2Mbps

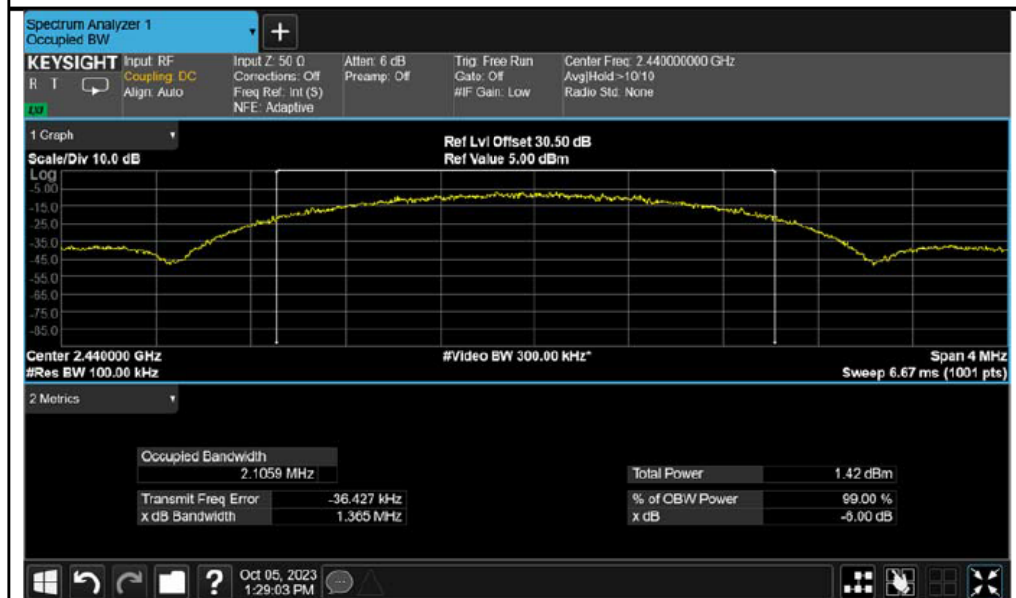


BLE-2440MHz-Data Rate- 2Mbps

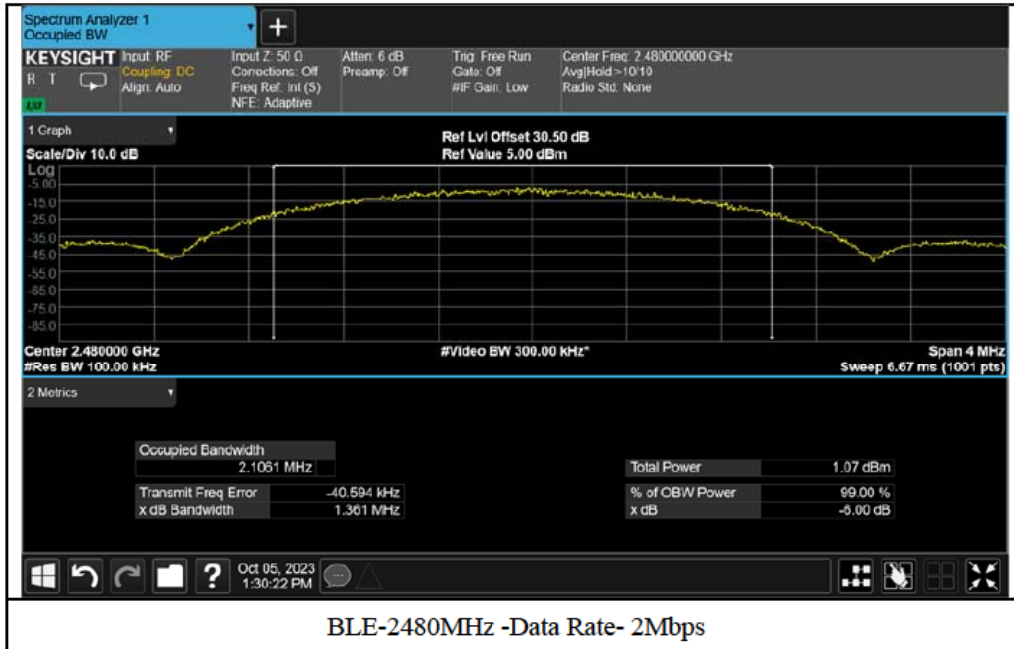


99% Occupied Bandwidth:

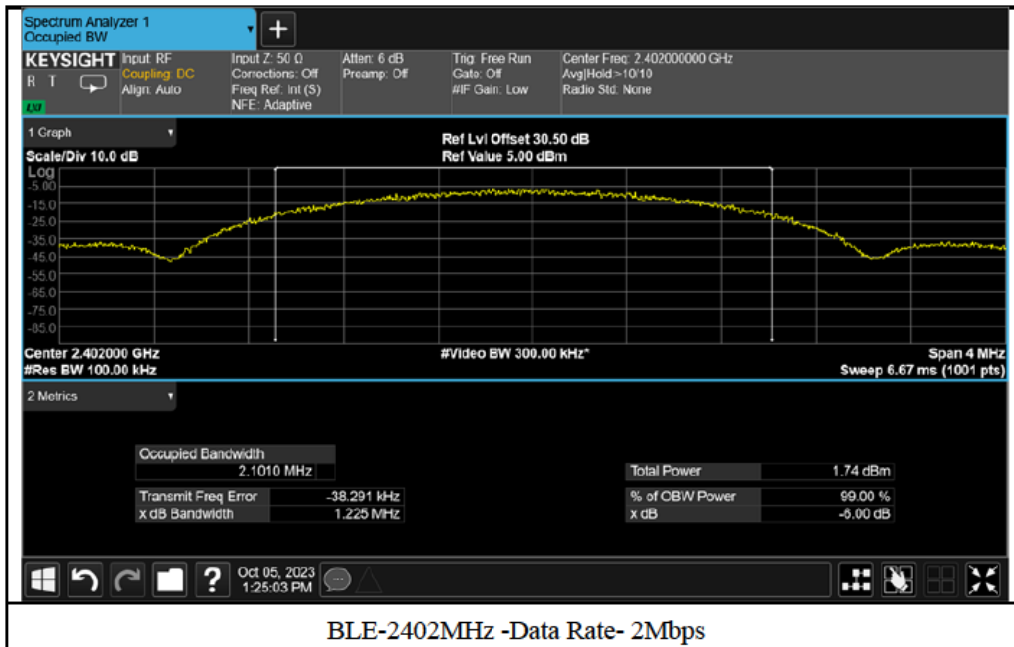

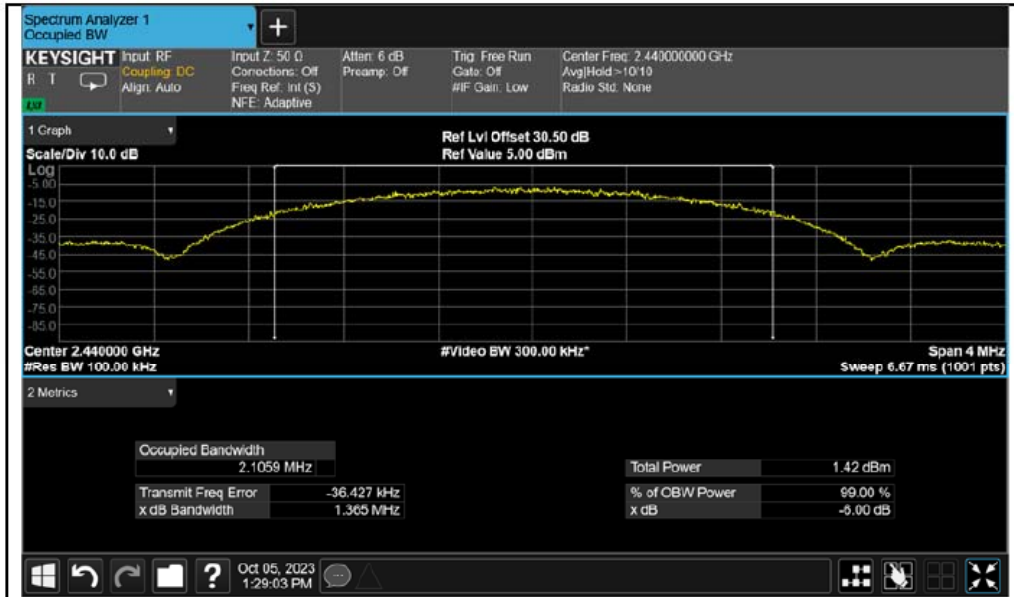

BLE-2440MHz-Data Rate- 2Mbps

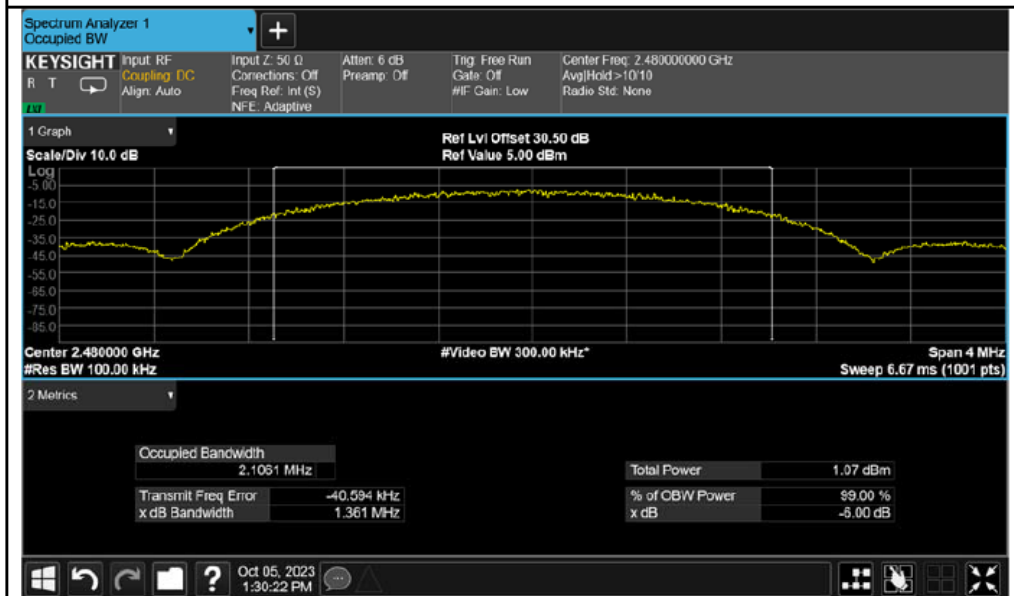

BLE-2480MHz -Data Rate- 2Mbps

Conducted Output Power Measurement

Limits of Output Power Measurement :

FCC 15.247

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)


RSS 247

E.I.R.P for systems using digital modulation in the 2400–2483.5 MHz bands: 4 Watt (36.02dBm)

Test Procedure

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Output Power Measurement			Test Date(s): 09/27/2023		
Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
N/A	Power Meter	ROHDE & SCHWARZ	NRQ6	06/26/2023	06/26/2024

Test Result:

FCC

Data Rate: 2Mbps (Time-Average Power)

Channel	Frequency (MHz)	Conducted Power (dBm)
0	2402	1.71
19	2440	1.42
39	2480	1.20

ISED:

Channel	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Pass/Fail
0	2402	1.71	30	4.11	36.02	Pass
19	2440	1.42	30	3.82	36.02	Pass
39	2480	1.20	30	3.6	36.02	Pass

Power Spectral Density Measurement


Limits of Power Spectral Measurement :

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

Test Procedure

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.


Test Name: Power Spectral Density Measurement			Test Date(s): 11/11/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					


Test Result:

Data Rate: 2Mbps


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
0	2402	-14.61	8	Pass
19	2440	-15.11	8	Pass
39	2480	-15.44	8	Pass

Test Plots:

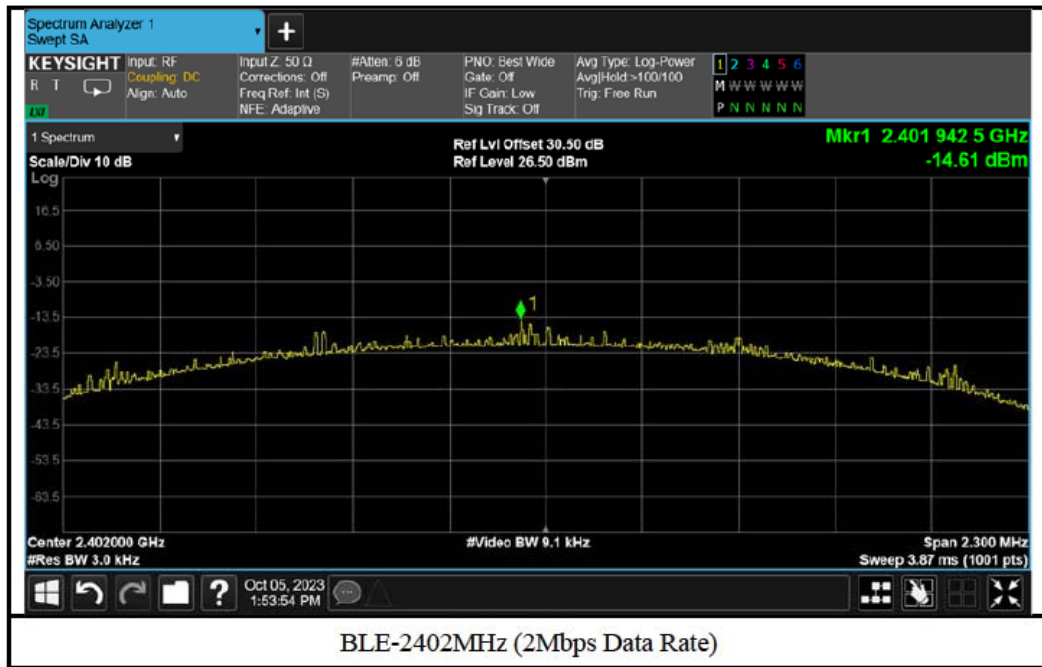

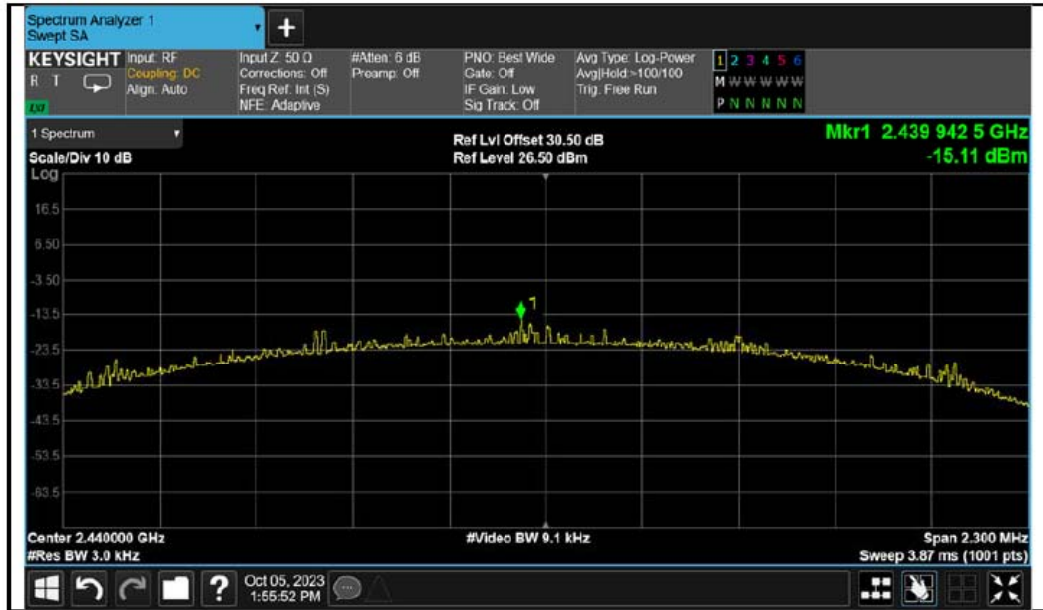

BLE-2440MHz (2Mbps Data Rate)

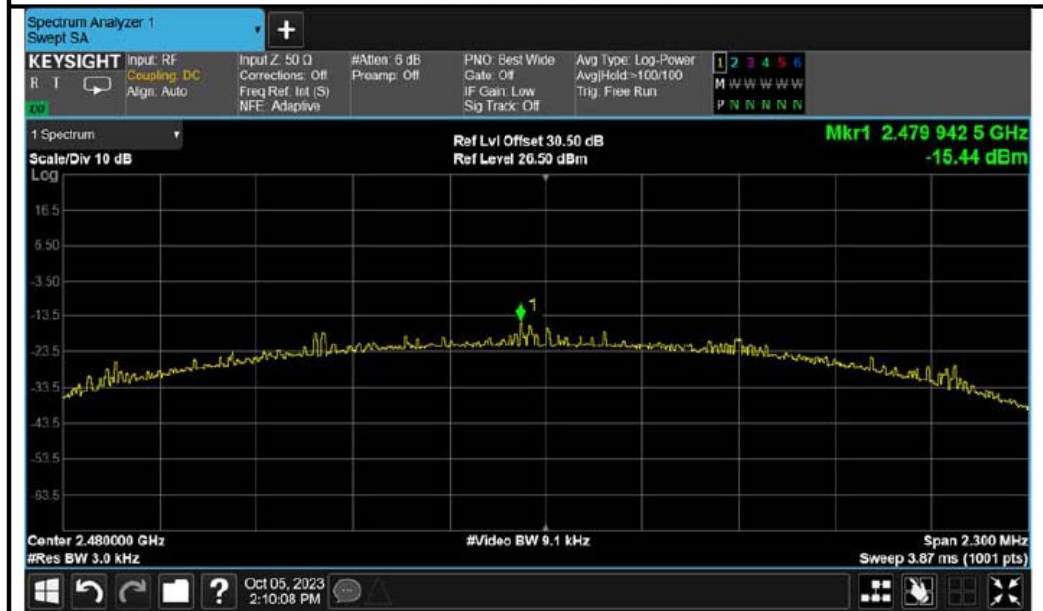

BLE-2480MHz (2Mbps Data Rate)

Conducted Out of Band Emission Measurement**Limits of Conducted Out of Band Emission Measurement:**


Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth)

Test Procedure**MEASUREMENT PROCEDURE REF**

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Setup

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment


Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Out of Band Emission Measurement			Test Date(s): 11/11/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/06/2023	11/06/2024
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:

Data Rate: 2Mbps

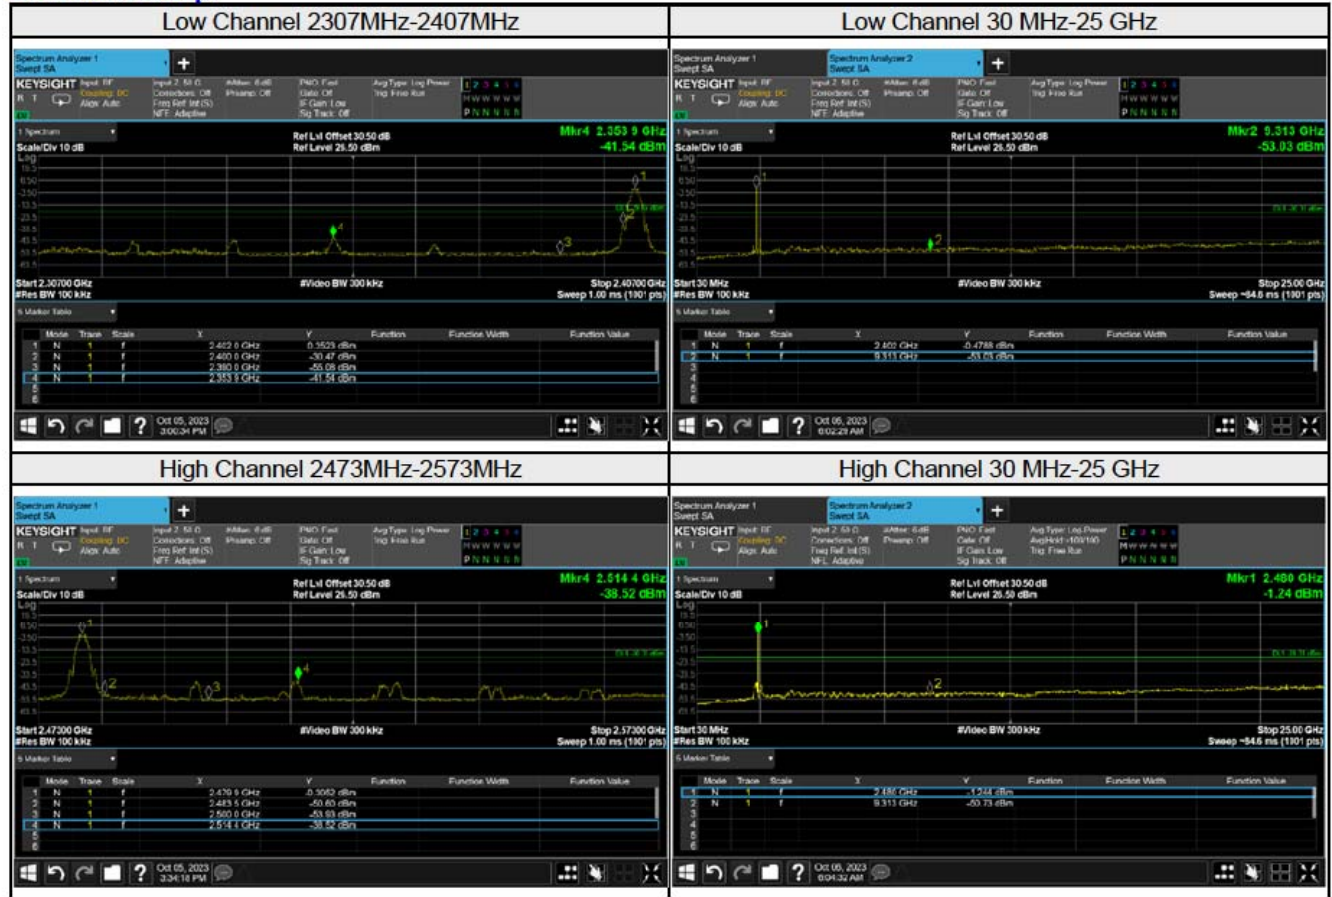

IV. Pictures of test Arrangements

Please see setup photo file

END OF REPORT