

September 12, 2023

Trackonomy Systems
214 Devcon Drive
San Jose, CA 95112

Dear Saurabh Sanghai

Enclosed is the Wireless test report compliance testing of the Trackonomy Systems, Multifunctional IoT Platform Sensor as tested to the requirements of Title 47 of the CFR, , Part 15 Subpart C, RSS 247 for Intentional Radiators.

Thank you for using the services of Eurofins Electrical and Electronic Testing NA, Inc. If you have any questions regarding these results or if Eurofins Electrical and Electronic Testing NA, Inc. can be of further service to you, please feel free to contact me.

Gary Chou

Documentation Department
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIR128383-Track_FCC_ISED-LORA



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins Electrical and Electronic Testing NA, Inc. While use of the A2LA logo in this report reflects Eurofins Electrical and Electronic Testing NA, Inc. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Report: WIR128383-Track_FCC_ISED-LORA

Applicant Address:

**214 Devcon Drive
San Jose, CA 95112**

Manufacturer Address:

**214 Devcon Drive
San Jose, CA 95112**

**Prepared By:
Eurofins Electrical and Electronic Testing NA, Inc.
3162 Belick St.
Santa Clara CA, 95054**

FCC/ ISED Test Report

Applicant name: Trackonomy Systems

Product: Multifunctional IoT Platform Sensor

Standard

47 CFR FCC Part 15, Subpart C (Section 15.247)

558074 D01 15.247 Meas Guidance v05r02

RSS 247 Issue2, February 2017

RSS Gen Issue5, March 2019

ANSI C63.10: 2013

Richard Dollent

Richard Dollente

Test Engineer, Wireless Laboratory

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements FCC Rules under normal use and maintenance.

Gary Chou

Gary Chou

Wireless Engineering Manager, Wireless Laboratory

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	September 12, 2023	Initial Issue.

Table of Contents

I.	Executive Summary	6
	A. Executive Summary	6
II.	Equipment Information	7
	A. Overview	7
	B. References	9
	C. Test Site	9
	D. Measurement Uncertainty	9
	E. Modifications	10
	Modifications to EUT	10
	Modifications to Test Standard	10
	F. Disposition of EUT	10
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	11
	A. Radiated Emission and Bandage Measurement	11
	B. Conducted Emission Measurement	30
	C. 6dB Bandwidth Measurement & 99% Bandwidth Measurement	33
	D. Conducted Output Power Measurement	40
	E. Power Spectral Density Measurement	42
	F. Conducted Out of Band Emission Measurement	46

I. Executive Summary

A. Executive Summary

47 CFR FCC Part 15, Subpart C (SECTION 15.247) RSS 247 Issue2, RSS Gen Issue5				
FCC/ IC Cluse	ISED	Test Item	Result	Remarks
15.207	RSS Gen 8.8	AC Power Conducted Emission	N/A	Powered by battery so test is not required.
15.205 &15.209 & 15.247(d)	RSS Gen 8.8	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	RSS 247 5.5C	6dB bandwidth & 99% bandwidth	PASS	Meet the requirement of limit.
15.247(b)	RSS 247 5.2.1 RSS Gen 6.7	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	RSS 247 5.4.4	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	RSS 247 5.2.2	Antenna Requirement	PASS	FPCB Antenna (with U.FL connector) meet the requirement.

Note:

1.Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

II. Equipment Information

A. Overview

EUT Summary Table

Product:	Multifunctional IoT Platform Sensor		
Brand:	Trackonomy Systems		
Model(s) Tested:	FGB-2008		
Series Model:	N/A		
Sample Status:	Original		
EUT Specifications:	Primary Power:	3 Vdc battery powered	
	Voltage Frequency:	N/A	
	Technology / Type of Modulations:	DTS	
	Operating Frequency :	903 ~ 927 MHz	
	FCC ID:	2AXA8-FGB-2008	
	ISED ID:	27299-FGB2008	
	Antenna Brand/ Model	N/A	
	Antenna Type:	PCB trace antenna	Antenna Gain: 1.5 dBi
	Antenna connector:	N/A	
Analysis:	The results obtained relate only to the item(s) tested.		
Environmental Test Conditions:	Temperature: 20.3° C		
	Relative Humidity: 47.5%		
	Barometric Pressure: 860-1060 mbar		
Evaluated by:	Richard Dollente		
Issue Date(s):	September 02, 2023		

NOTE: The following modules can be chosen to be configured in the EUT.

	Model No.	FCC ID	Note
-	-	-	-
-	-	-	-

FCC/IC RF Testing Units Setting

Model	Hardware (FW) Rev.	Firmware (FW) Rev.	FW operation verification and Instruction
FGB-2008	Nominal HW V2	Nominal FW V2	Verify by Spectrum Analyzer & Laptop

B. Description of Operator Modes

Channel List:

Channel	Frequency (MHz)	Channel	Frequency
3	903	16	916
4	904	17	917
5	905	18	918
6	906	19	919
7	907	20	920
8	908	21	921
9	909	22	922
10	910	23	923
11	911	24	924
12	912	25	925
13	913	26	926
14	914	27	927
15	915		

Power setting is as below:

Lora	Power Setting
Channel	
3	default
14	default
27	default

C. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
-	-	-	-	-	-	-

Note: (Describe the outline of a simulator, if used for the tests, as a note under the table.)

Insert Cable Connections to/from EUT provided by test team.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
-	-	-	-	-	0	-

Note: The core(s) is(are) originally attached to the cable(s).

General Description of Applied Standards

D. References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- 47 CFR FCC Part 15, Subpart C (Section 15.247)
- 558074 D01 15.247 Meas Guidance v05r02
- RSS 247 Issue2
- RSS Gen Issue5
- ANSI C63.10:2013

E. Test Site

All testing was performed at Eurofins Electrical and Electronic Testing NA, Inc., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins Electrical and Electronic Testing NA, Inc. has been accredited by the American Association for Laboratory Accreditation (A2LA) (Certificate #: 0591.02) in accordance with ISO/IEC 17025:2017.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

F. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.32 dB	2	95%
RF Power Conducted Spurious Emissions	±2.25 dB	2	95%
RF Power Radiated Emissions	±3.01 dB	2	95%

Uncertainty Calculations Summary

G. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

H. Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to Trackonomy Systems upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Radiated Emission and Bandage Measurement

Limits of Radiated Emission and Bandage Measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Test Procedures:


The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

Test Setup


For Radiated Emission Below 30MHz

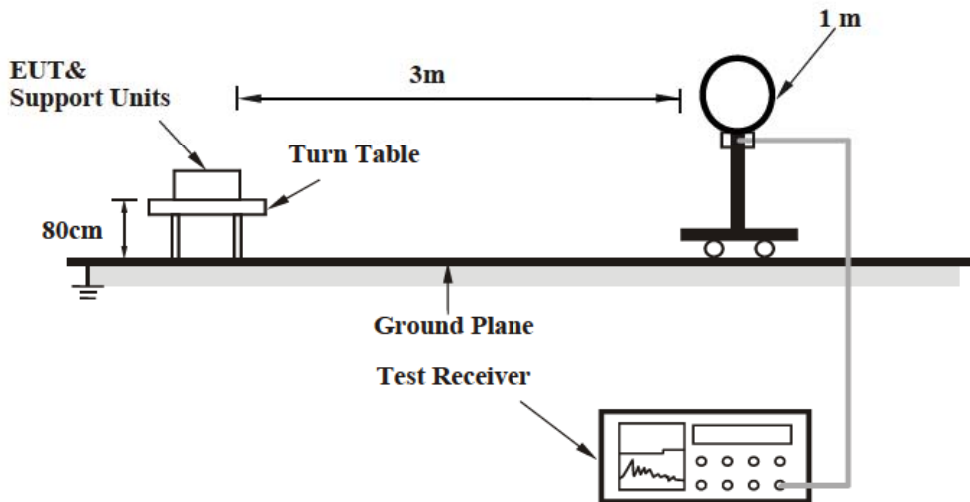

For Radiated emission 30 MHz to 1GHz

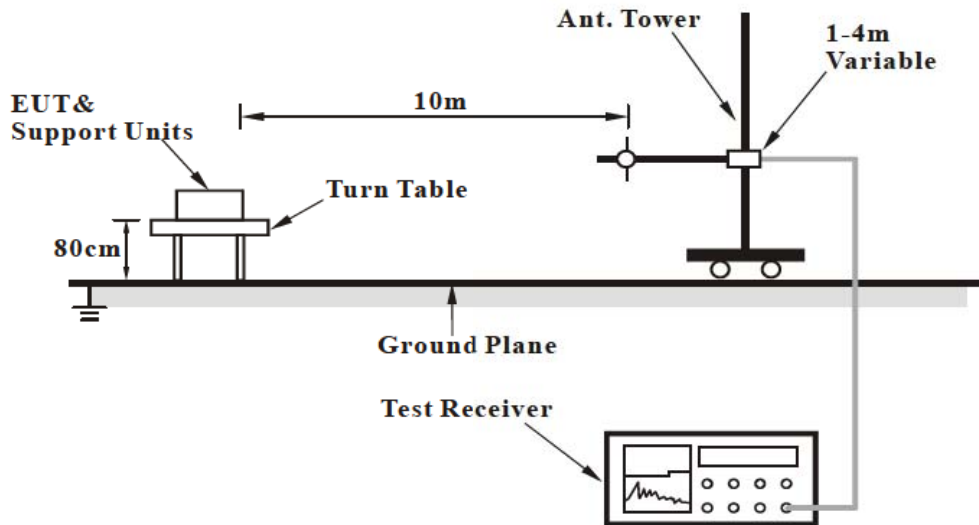

For Radiated emission 1GHz to 40GHz

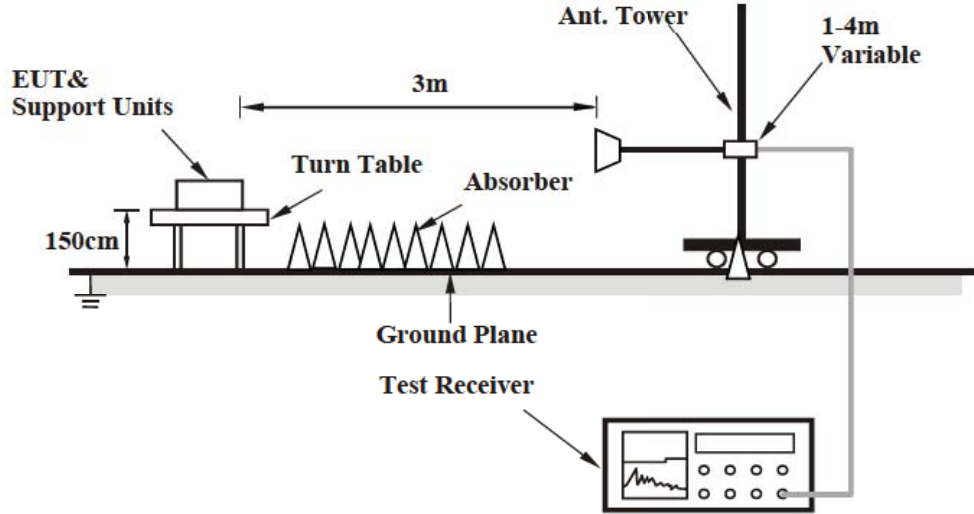

Test Results: The EUT was tested is **compliant** with Radiated Spurious Emissions Requirements.

Test Equipment List

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
1S2399	Turntable Controller	SUNOL SCIENCE	SC99V	Not Required	Not Required
1S2486	5 Meter Chamber Control Room	Panashield	5 Meter Control Room	Not Required	Not Required
1S3826	Horn Antenna	ETS-LINDGREN	3117	04/06/2023	04/06/2025
1S4802	Preamplifier	EMC Instrument	EMC118A45SE	Note 1	Note 1
1S2668	Preamplifier	Sonoma Instrument	310N	Note 1	Note 1
1S2600	Antenna	Sunol Sciences Corp	JB3	04/ 11/ 2023	04/ 11/ 2025
1S3983	Loop Antenna	ETS-LINDGREN	6512	10/ 14 /2021	10/ 14 /2023
Note 1: Verified by calibrated instrumentation at the time of testing					

Test Engineer: Richard Dollente


Test Date(s): 09/02/2023

Test Data

Radiated Emissions (30 MHz~1000 MHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 915 MHz		

#1 - 30MHz-1GHz (Vertical)

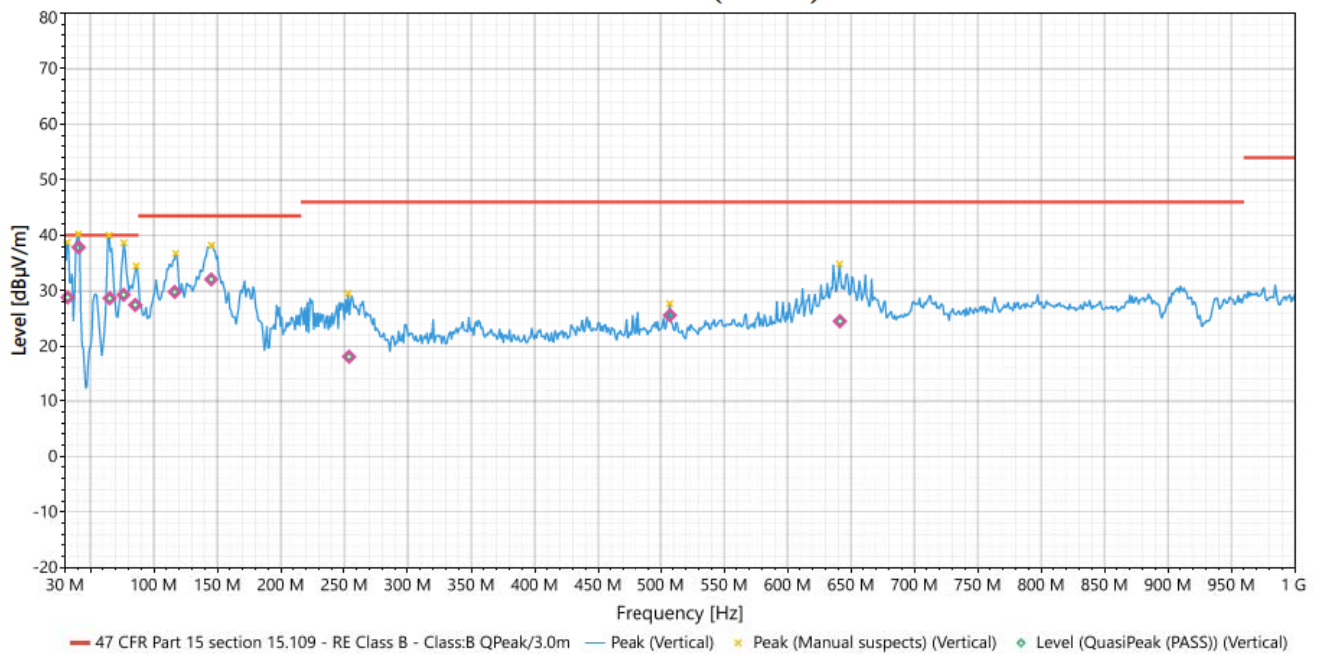


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	32.26	Vertical	28.816	40	-11.184	1.43	224	-4.09	Pass
2	40.89	Vertical	37.822	40	-2.178	1.08	166	-10.48	Pass
3	65.36	Vertical	28.65	40	-11.35	1.19	347	-13.28	Pass
4	76.35	Vertical	29.281	40	-10.719	2.62	206	-15.07	Pass
5	85.55	Vertical	27.475	40	-12.525	2.91	334	-13.94	Pass
6	116.57	Vertical	29.787	43.5	-13.713	2.62	329	-7.83	Pass
7	145.31	Vertical	32.056	43.5	-11.444	1.14	178	-7.65	Pass
8	253.84	Vertical	18.135	46	-27.865	1.61	89	-8.67	Pass
9	507.35	Vertical	25.612	46	-20.388	1.01	229	-2.52	Pass
10	641.35	Vertical	24.523	46	-21.477	1.09	177	0.02	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	30MHz-1GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 915MHz		

#2 - 30MHz-1GHz (Horizontal)

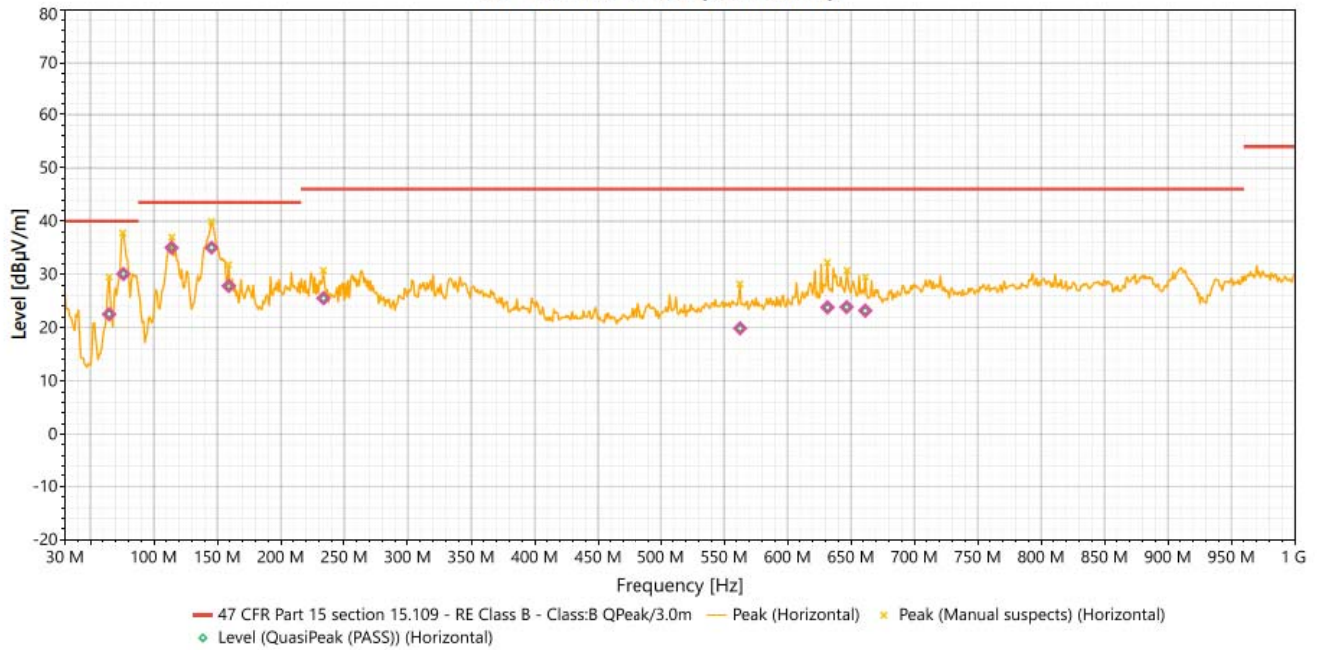

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	64.89	Horizontal	22.533	40	-17.467	2.49	319	22.533	Pass
2	76.14	Horizontal	30.1	40	-9.9	2.86	166	30.1	Pass
3	114.17	Horizontal	35.008	43.5	-8.492	2.68	284	35.008	Pass
4	145.58	Horizontal	35.032	43.5	-8.468	2.15	91	35.032	Pass
5	159.11	Horizontal	27.82	43.5	-15.68	2.97	60	27.82	Pass
6	233.72	Horizontal	25.501	46	-20.499	1.67	145	25.501	Pass
7	562.66	Horizontal	19.879	46	-26.121	2.72	209	19.879	Pass
8	631.6	Horizontal	23.787	46	-22.213	1.88	6	23.787	Pass
9	646.63	Horizontal	23.858	46	-22.142	1.95	262	23.858	Pass
10	661.28	Horizontal	23.192	46	-22.808	2.21	163	23.192	Pass

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).

2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

Radiated Emissions (Above 1GHz)

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 903 MHz		

#1 - 1GHz-18GHz (Vertical)

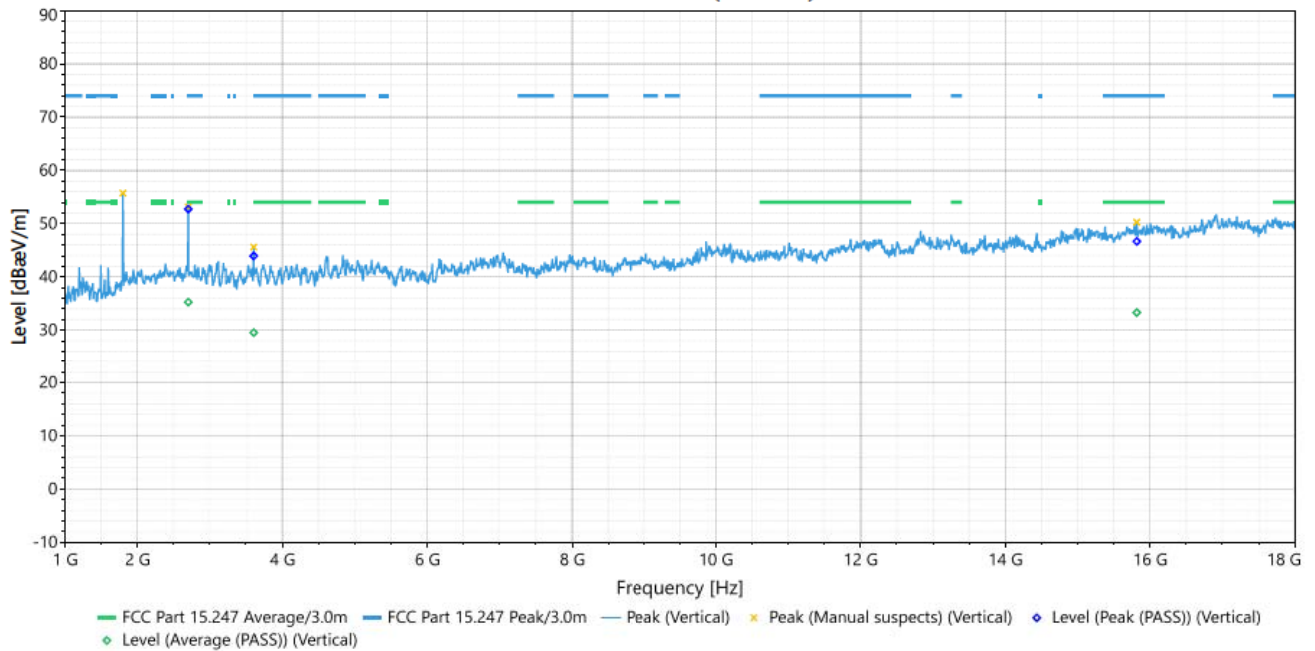

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1802.4	Vertical	55.744	NaN	NaN	1	0	0.49	Peak
2	2705	Vertical	52.742	74	-21.258	3.39	281	2.3	Peak (PASS)
3	2705	Vertical	35.269	54	-18.731	3.39	281	2.3	Average (PASS)
4	3607.7	Vertical	43.921	74	-30.079	1	324	3.05	Peak (PASS)
5	3607.7	Vertical	29.537	54	-24.463	1	324	3.05	Average (PASS)
6	15817.1	Vertical	46.657	74	-27.343	1.26	2	8.35	Peak (PASS)
7	15817.1	Vertical	33.299	54	20.701	1.26	2	8.35	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).

2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. "NaN": Emissions that do not fall within the restricted frequency bands where the attenuation below the general field strength limits specified in FCC§15.205/ RSS-Gen is not required.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 903 MHz		

#2 - 1GHz-18GHz (Horizontal)

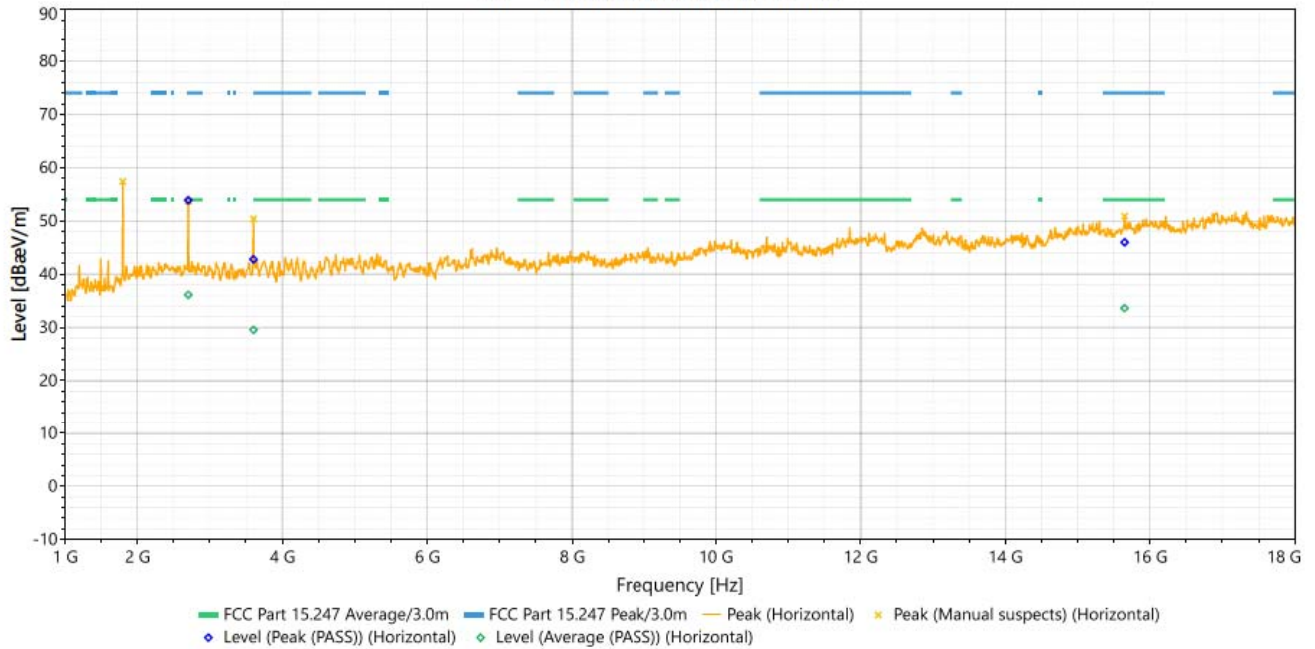

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1802.4	Horizontal	57.376	NaN	NaN	3	150	0.41	Peak
2	2705	Horizontal	53.87	74	-20.13	3.5	153	2.21	Peak (PASS)
3	2705	Horizontal	36.13	54	-17.87	3.5	153	2.21	Average (PASS)
4	3606	Horizontal	42.789	74	-31.211	3.48	263	3	Peak (PASS)
5	3606	Horizontal	29.533	54	-24.467	3.48	263	3	Average (PASS)
6	15648.8	Horizontal	45.994	74	-28.006	1.07	280	8.19	Peak (PASS)
7	15648.8	Horizontal	33.617	54	-20.383	1.07	280	8.19	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier

3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 915 MHz		

#1 - 1GHz-18GHz (Vertical)

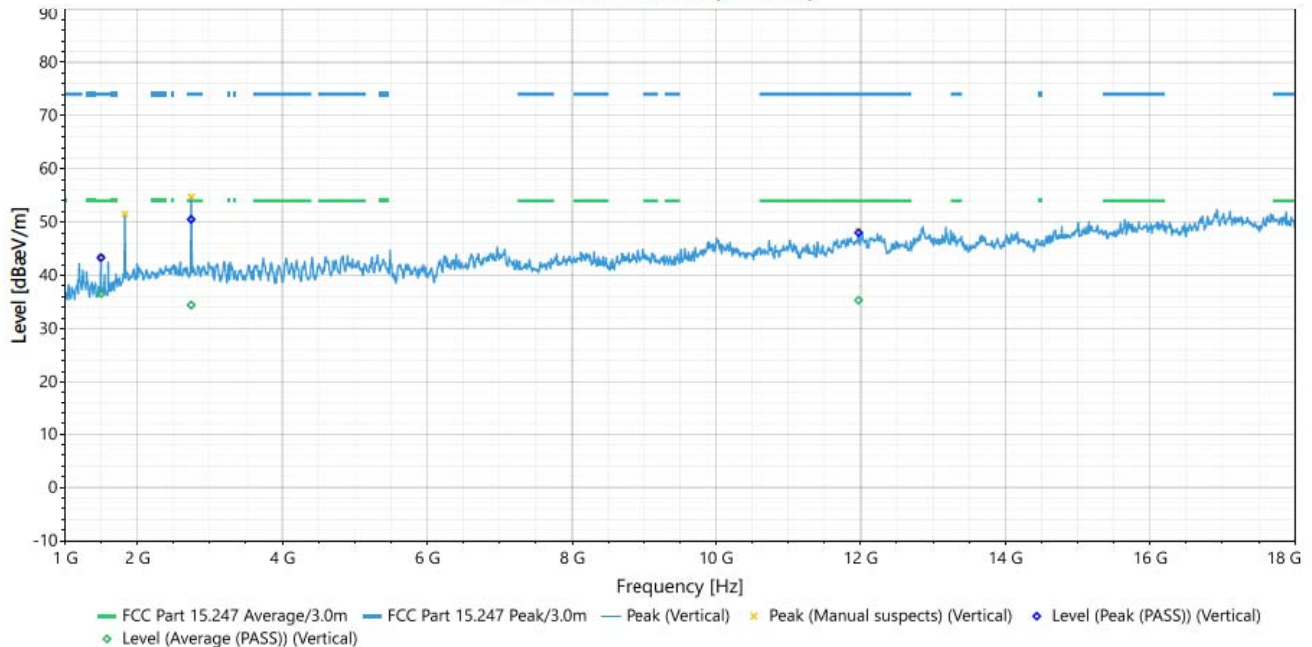

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1829.6	Vertical	51.527	NaN	NaN	1	331	0.61	Peak
2	1499.7	Vertical	43.298	74	-30.702	1.13	357	-2.5	Peak (PASS)
3	1499.7	Vertical	36.562	54	-17.438	1.13	357	-2.5	Average (PASS)
4	2744.1	Vertical	50.523	74	-23.477	1	352	2.21	Peak (PASS)
5	2744.1	Vertical	34.439	54	-19.561	1	352	2.21	Average (PASS)
6	11971.7	Vertical	48.01	74	-25.99	3.48	316	7.47	Peak (PASS)
7	11971.7	Vertical	35.326	54	-18.674	3.48	316	7.47	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier

3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. "NaN": Emissions that do not fall within the restricted frequency bands where the attenuation below the general field strength limits specified in FCC§15.205/ RSS-Gen is not required.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 915 MHz		

#2 - 1GHz-18GHz (Horizontal)

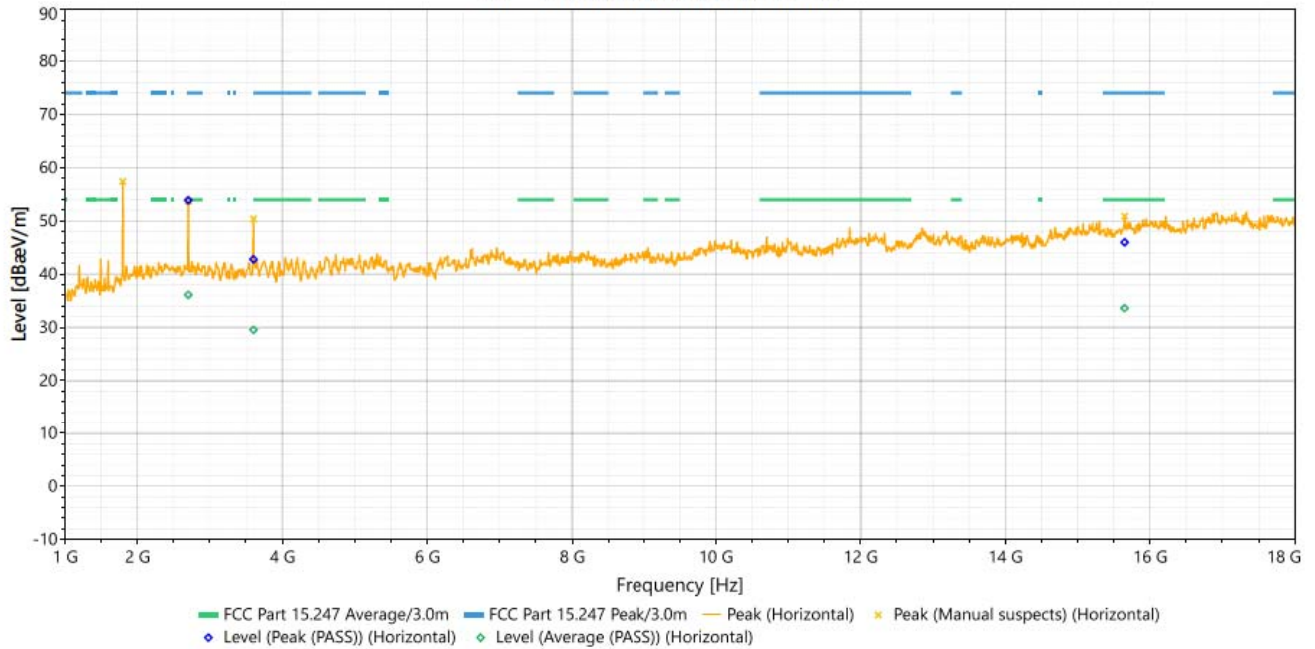

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1827.9	Horizontal	54.872	NaN	NaN	3	161	0.58	Peak
2	1499.7	Horizontal	46.239	74	-27.761	1.6	286	-2.42	Peak (PASS)
3	1499.7	Horizontal	40.683	54	-13.317	1.6	286	-2.42	Average (PASS)
4	2744.1	Horizontal	57.215	74	-16.785	3.5	357	2.24	Peak (PASS)
5	2744.1	Horizontal	40.673	54	-13.327	3.5	357	2.24	Average (PASS)
6	12206.3	Horizontal	48.922	74	-25.078	3.45	182	7.53	Peak (PASS)
7	12206.3	Horizontal	35.873	54	-18.127	3.45	182	7.53	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).

2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. "NaN": Emissions that do not fall within the restricted frequency bands where the attenuation below the general field strength limits specified in FCC§15.205/ RSS-Gen is not required.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 927 MHz		

#1 - 1GHz-18GHz (Vertical)

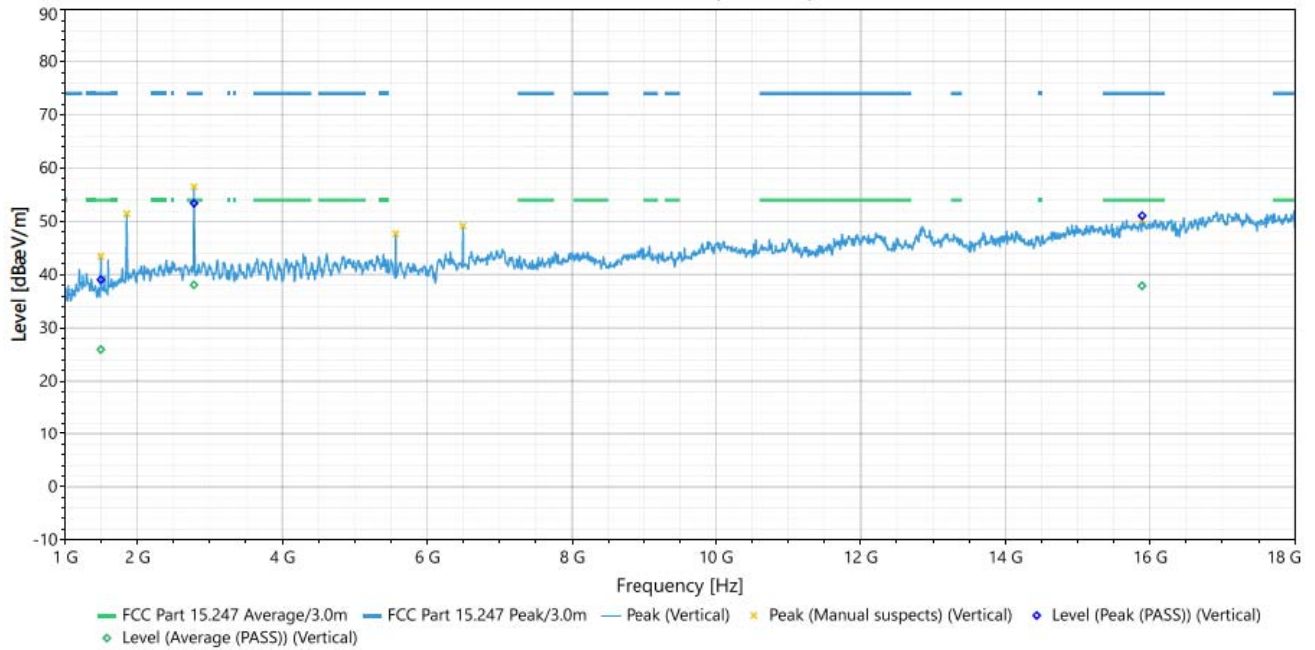

Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level [dB(uV/m)]	Limit dB(uV/m)	Margin [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1855.1	Vertical	51.412	NaN	NaN	2.5	287	0.7	Peak
2	5567.9	Vertical	47.713	NaN	NaN	3	0	4.65	Peak
3	6496.1	Vertical	49.115	NaN	NaN	3.5	0	6.06	Peak
4	1498	Vertical	39.052	74	-34.948	2.96	358	-2.49	Peak (PASS)
5	1498	Vertical	25.929	54	-28.071	2.96	358	-2.49	Average (PASS)
6	2783.2	Vertical	53.387	74	-20.613	1	353	2.14	Peak (PASS)
7	2783.2	Vertical	38.044	54	-15.956	1	353	2.14	Average (PASS)
8	15890.2	Vertical	51.064	74	-22.936	3.44	296	8.47	Peak (PASS)
9	15890.2	Vertical	37.898	54	-16.102	3.44	296	8.47	Average (PASS)


REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier

3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. "NaN": Emissions that do not fall within the restricted frequency bands where the attenuation below the general field strength limits specified in FCC§15.205/ RSS-Gen is not required.

EUT Test Condition		Measurement Detail	
Input Power	3Vdc	Frequency Range	1GHz-18GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Richard Dollente
Test Mode	TX MODE 927 MHz		

#2 - 1GHz-18GHz (Horizontal)

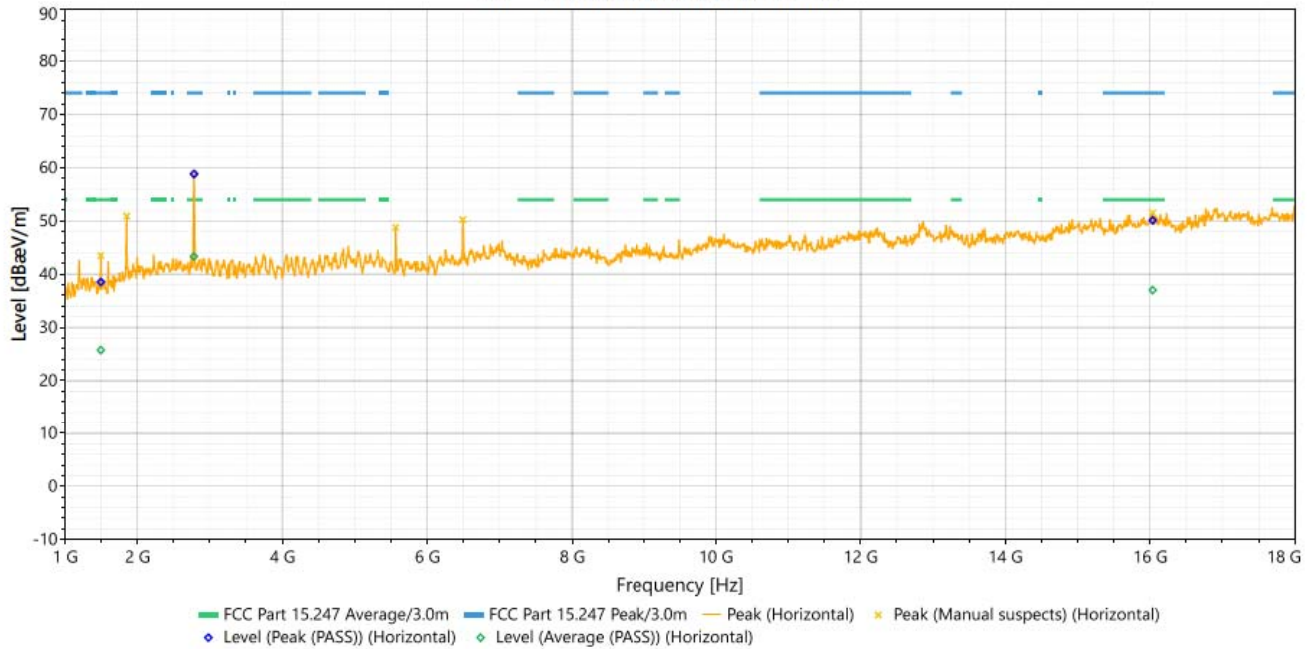

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (m)	Angle (Deg)	Factor [dB(1/m)]	Measure Type/ Result
1	1855.1	Horizontal	50.923	NaN	NaN	2	157	0.7	Peak
2	5566.2	Horizontal	48.766	NaN	NaN	1.5	169	4.6	Peak
3	6494.4	Horizontal	50.219	NaN	NaN	3	0	6.02	Peak
4	1498	Horizontal	38.506	74	-35.494	3.4	218	-2.41	Peak (PASS)
5	1498	Horizontal	25.759	54	-28.241	3.4	218	-2.41	Average (PASS)
6	2783.2	Horizontal	58.805	74	-15.195	2.03	358	2.22	Peak (PASS)
7	2783.2	Horizontal	43.34	54	-10.66	2.03	358	2.22	Average (PASS)
8	16036.4	Horizontal	50.113	74	-23.887	2.67	348	8.51	Peak (PASS)
9	16036.4	Horizontal	37.014	54	-16.986	2.67	348	8.51	Average (PASS)

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).

2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. "NaN": Emissions that do not fall within the restricted frequency bands where the attenuation below the general field strength limits specified in FCC§15.205/ RSS-Gen is not required.

Conducted Emission Measurement**Limits of Conducted Emission Measurement :**

The following standards specified below are covered in the scope of this section of the test report:


Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Conducted Emissions - Test Procedure

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency ranges from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Conducted Emissions - Test Setup

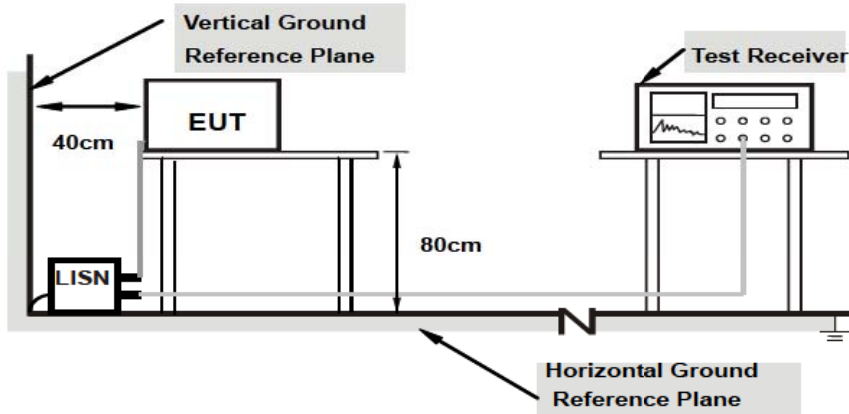

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Results: N/A

6dB Bandwidth Measurement & 99% Bandwidth Measurement

Limits of Conducted Emission Measurement :

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

Test Procedure


99% Bandwidth Measurement

Refer to ANSI C63.10 section 6.9.3

-6dB Bandwidth Measurement

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Conducted Emissions - Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.


Test Name: 6dB Bandwidth Measurement & 99% Bandwidth Measurement			Test Date(s): 04/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					


Test Result:

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
3	903	0.5795	0.67233	0.5	PASS
15	915	0.5764	0.66971	0.5	PASS
27	927	0.5764	0.66913	0.5	PASS

Test Plots:

-6dB Bandwidth:

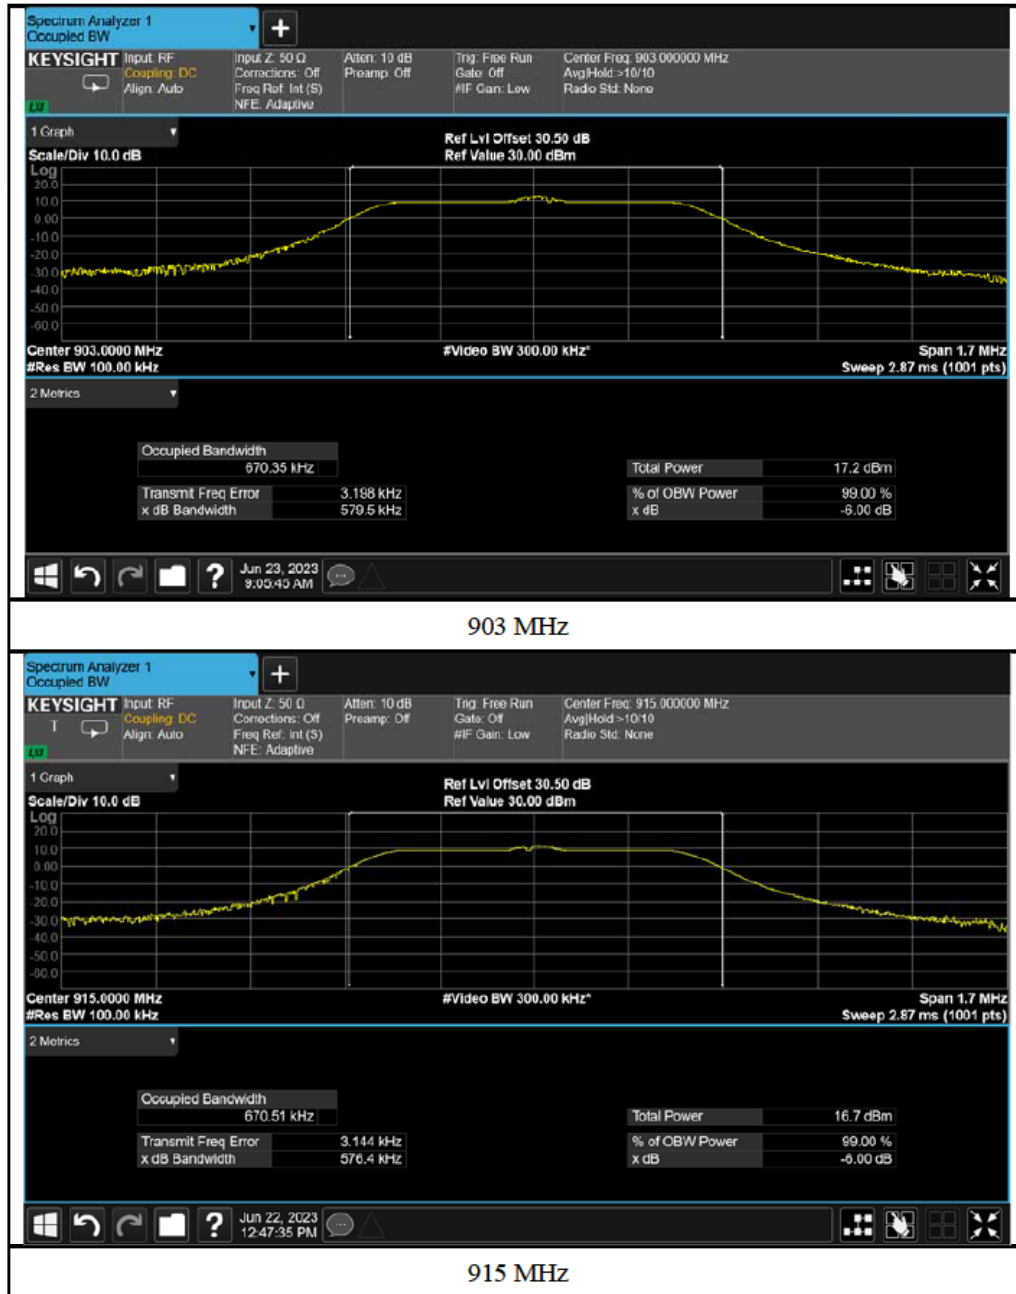


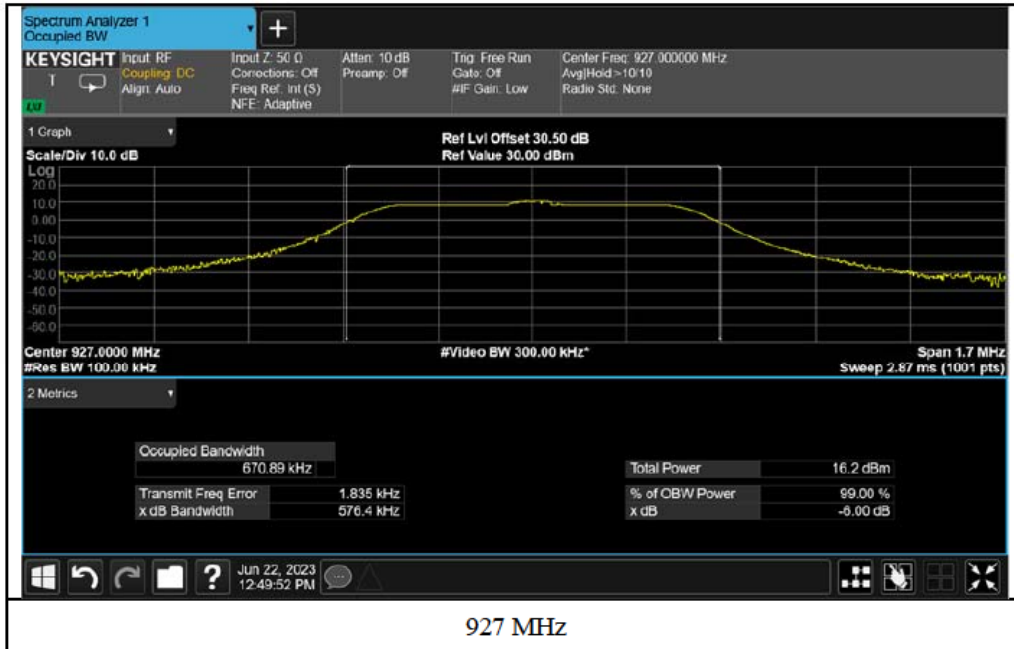


99% Bandwidth:



903 MHz

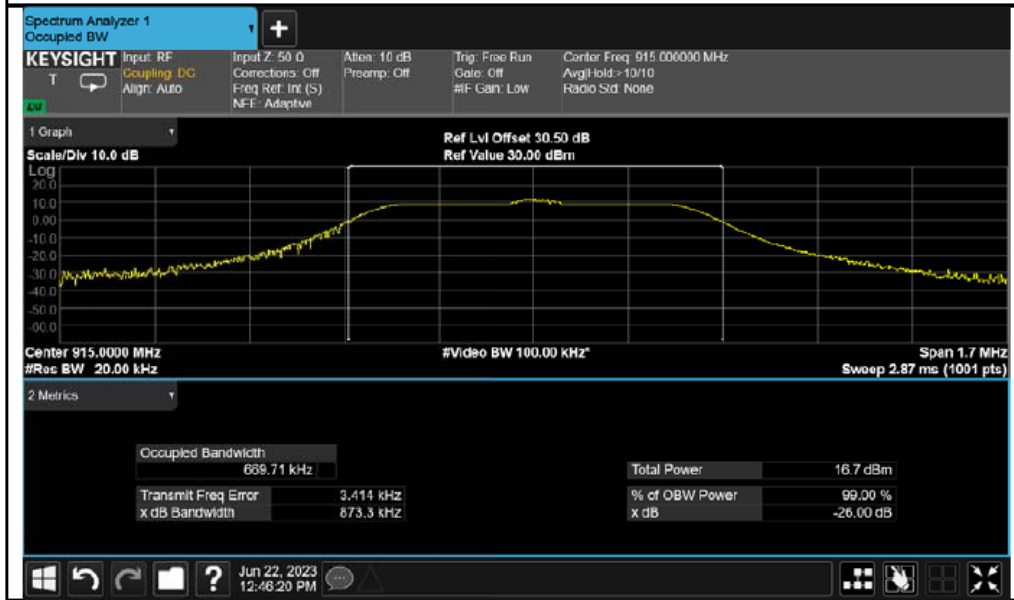

915 MHz

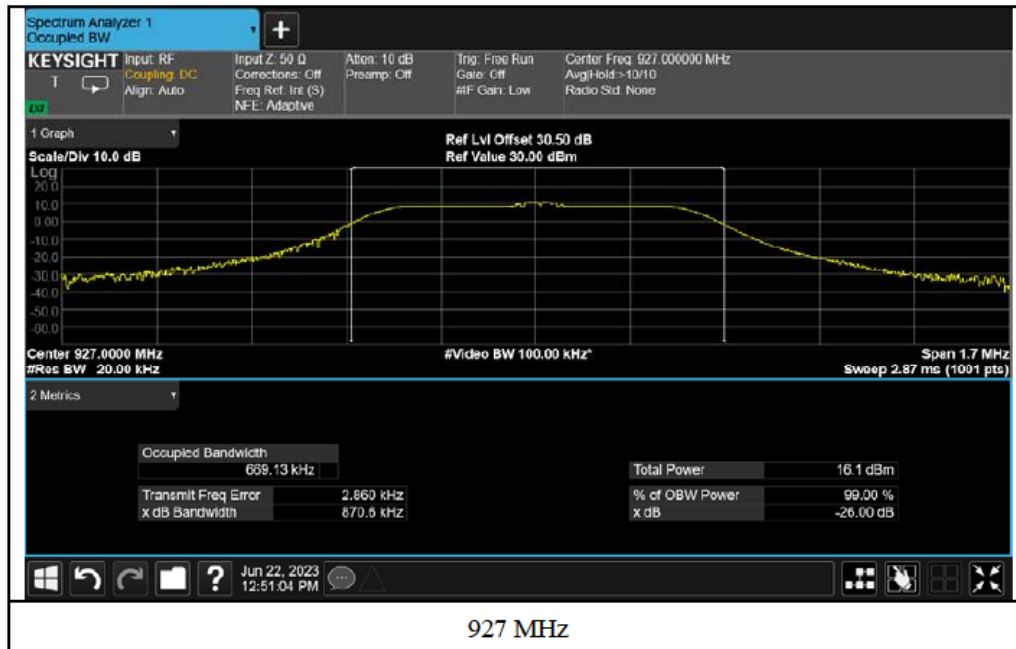

Conducted Output Power Measurement


Limits of Output Power Measurement :

For systems using digital modulation in the 908–928 MHz bands: 1 Watt (30dBm)

Test Procedure

A power meter sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Output Power Measurement			Test Date(s): 04/27/2023		
Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
N/A	Power Meter	ROHDE & SCHWARZ	NRQ6	06/22/2022	06/22/2023

Test Result:**LORA**

Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Pass/Fail
903	5.92	30	Pass
915	5.33	30	Pass
927	4.70	30	Pass

Power Spectral Density Measurement


Limits of Power Spectral Measurement :

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Setup



For the actual test configuration, please refer to the attached file (Test Setup Photo)

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.


Test Name: Power Spectral Density Measurement			Test Date(s): 04/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					


Test Result:

Lora:

Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass/Fail
903	-13.845	8	Pass
915	-15.166	8	Pass
927	-14.845	8	Pass

Test Plots:

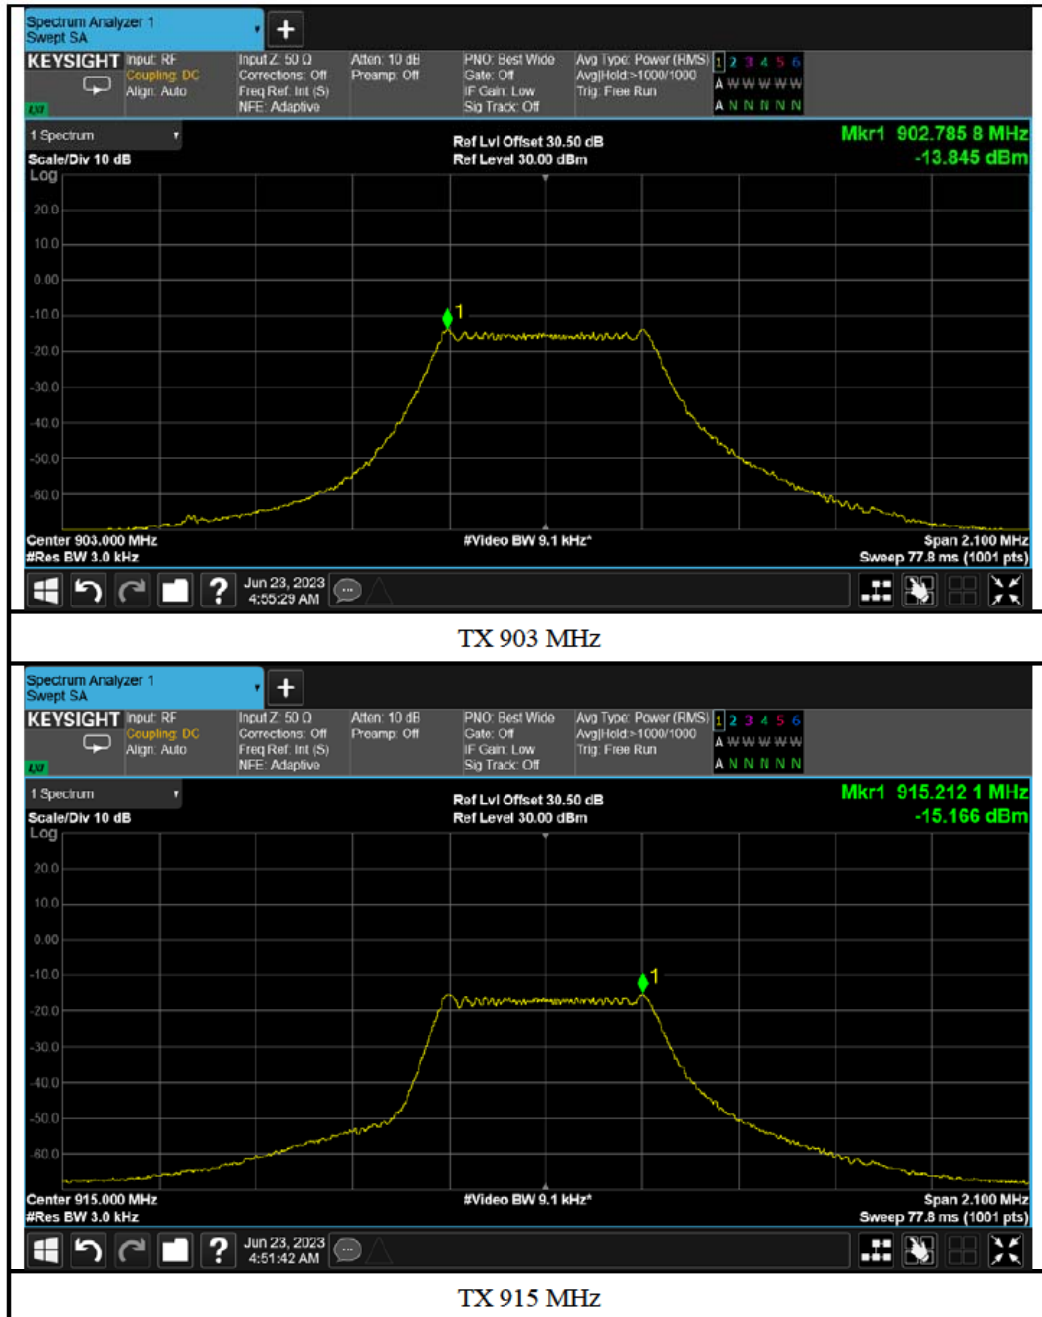

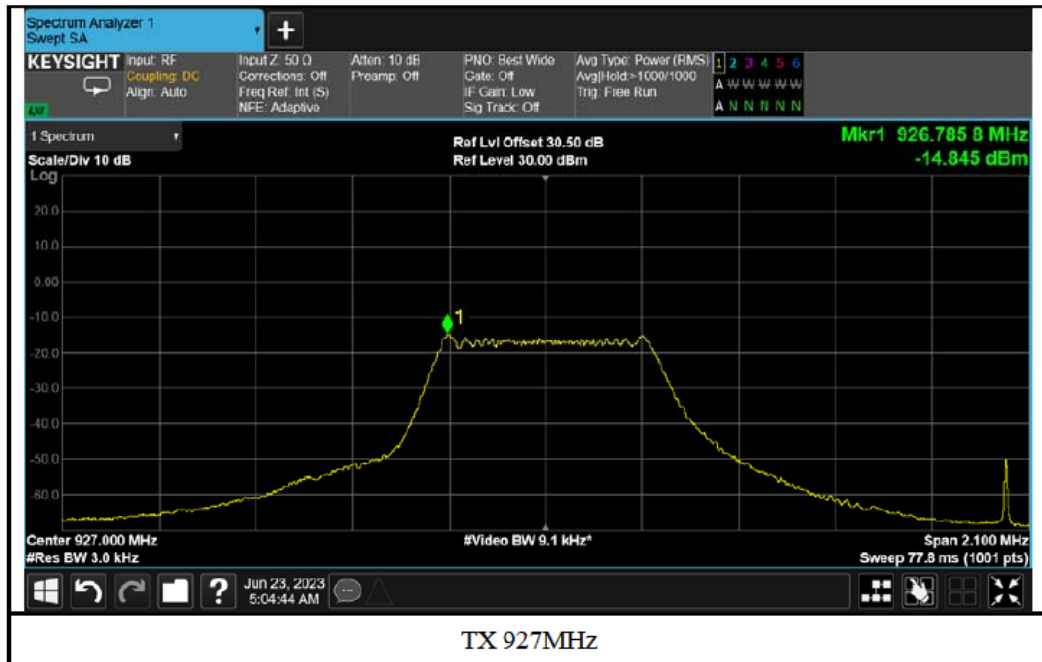

Conducted Out of Band Emission Measurement**Limits of Conducted Out of Band Emission Measurement:**


Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth)

Test Procedure**MEASUREMENT PROCEDURE REF**

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Setup

For the actual test configuration, please refer to the attached file (Test Setup Photo)


Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Test Name: Conducted Out of Band Emission Measurement			Test Date(s): 04/27/2023		
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2003	EMI Test Receiver	Keysight	N9030B	11/01/2022	11/01/2023
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Test Result:

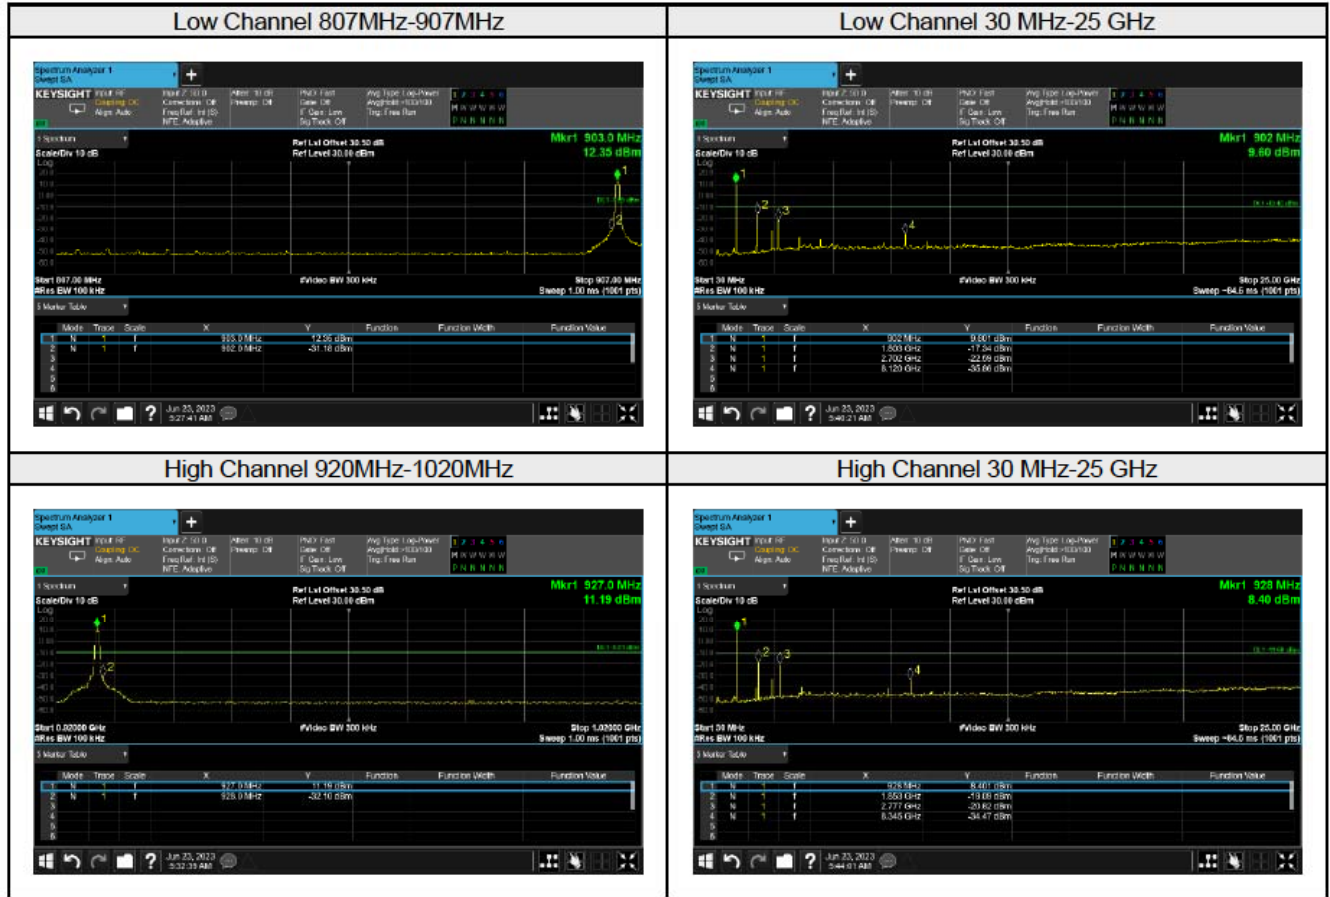

IV. Pictures of test Arrangements

Please see setup photo file

END OF REPORT