

# FCC RADIO TEST REPORT

## FCC ID: 2AXDW-PT1

**Product:** Puductor

**Trade Mark:** Pudu

**Model No.:** PT1

**Family Model:** PT8, PT9

**Report No.:** S20051600804004

**Issue Date:** 11 Aug. 2020

### Prepared for

SHENZHEN PUDU TECHNOLOGY CO., LTD.  
Room 301, Wearnes Science and Technology Mansion, No.10,  
Kefa Road, Yuehai Street, Nanshan District , Shenzhen,  
Guangdong, China, 518057

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an  
District Shenzhen, Guangdong, China  
Tel.: +86-755-6115 6588  
Fax.: +86-755-6115 6599  
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address : Room 301, Wearnes Science and Technology Mansion, No.10, Kefa Road, Yuehai Street, Nanshan District , Shenzhen, Guangdong, China, 518057

Manufacturer's Name : SHENZHEN PUDU TECHNOLOGY CO., LTD.
Address : Room 301, Wearnes Science and Technology Mansion, No.10, Kefa Road, Yuehai Street, Nanshan District , Shenzhen, Guangdong, China, 518057

Product description

Product name : Puductor
Model and/or type reference : PT1
Family Model : PT8, PT9

Standards : FCC Part15.407

Test procedure : ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures New Rules v02r01
FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
KDB 905462 D03 Client Without DFS New Rules v01r02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 16 May. 2020 ~ 11 Aug. 2020

Date of Issue : 11 Aug. 2020

Test Result : Pass

Testing Engineer : [Signature: Allen Liu]
(Allen Liu)

Technical Manager : [Signature: Jason Chen]
(Jason Chen)

Authorized Signatory : [Signature: Alex Li]
(Alex Li)

**Table of Contents**

	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 FACILITIES AND ACCREDITATIONS	8
1.2 MEASUREMENT UNCERTAINTY	8
<b>1 . GENERAL INFORMATION</b>	<b>9</b>
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 DESCRIPTION OF TEST MODES	12
1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	14
1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
<b>2 . EMC EMISSION TEST</b>	<b>17</b>
2.1 CONDUCTED EMISSION MEASUREMENT	17
2.1.1 APPLICABLE STANDARD	17
2.1.2 CONFORMANCE LIMIT	17
2.1.3 TEST CONFIGURATION	17
2.1.4 TEST PROCEDURE	17
2.2 RADIATED EMISSION MEASUREMENT	34
2.2.1 APPLICABLE STANDARD	34
2.2.2 CONFORMANCE LIMIT	34
2.2.3 MEASURING INSTRUMENTS	34
2.2.4 TEST CONFIGURATION	35
2.2.5 TEST PROCEDURE	36
2.2.6 TEST RESULTS (9KHZ – 30 MHZ)	37
2.2.7 TEST RESULTS (30MHZ – 1GHZ)	38
2.2.8 TEST RESULTS (1GHZ-18GHZ)	46
2.2.10 TEST RESULTS (18GHZ-40GHZ)	51
<b>3 . POWER SPECTRAL DENSITY TEST</b>	<b>59</b>
3.1 APPLIED PROCEDURES / LIMIT	59
3.2 TEST PROCEDURE	60
3.3 DEVIATION FROM STANDARD	60
3.4 TEST SETUP	60
3.5 EUT OPERATION CONDITIONS	60
3.6 TEST RESULTS	61
<b>4 . 26DB &amp; 99% EMISSION BANDWIDTH</b>	<b>62</b>
4.1 APPLIED PROCEDURES / LIMIT	62
4.2 TEST PROCEDURE	62
4.3 EUT OPERATION CONDITIONS	63

**Table of Contents**

	<b>Page</b>
<b>4.4 TEST RESULTS</b>	<b>63</b>
<b>5 . MINIMUM 6 DB BANDWIDTH</b>	<b>64</b>
5.1 APPLIED PROCEDURES / LIMIT	64
5.2 TEST PROCEDURE	64
5.3 DEVIATION FROM STANDARD	64
5.4 TEST SETUP	64
5.5 EUT OPERATION CONDITIONS	64
5.6 TEST RESULTS	65
<b>6 . MAXIMUM CONDUCTED OUTPUT POWER</b>	<b>66</b>
6.1 PPLIED PROCEDURES / LIMIT	66
6.2 TEST RESULTS	68
<b>7 . OUT OF BAND EMISSIONS</b>	<b>69</b>
7.1 APPLICABLE STANDARD	69
7.2 TEST PROCEDURE	69
7.3 DEVIATION FROM STANDARD	69
7.4 TEST SETUP	69
7.5 EUT OPERATION CONDITIONS	70
7.6 TEST RESULTS	71
<b>8. FREQUENCY STABILITY MEASUREMENT</b>	<b>72</b>
8.1 LIMIT	72
8.2 TEST PROCEDURES	72
8.3 TEST SETUP LAYOUT	72
8.4 EUT OPERATION DURING TEST	72
8.5 TEST RESULTS	73
<b>9. DYNAMIC FREQUENCY SELECTION(DFS)</b>	<b>85</b>
9.1 APPLICABILITY OF DFS REQUIREMENTS	85
9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING	85
9.3 DFS RESPONSE REQUIREMENT VALUES	86
9.4 SHORT PULSE RADAR TEST WAVEFORMS	86
9.5 CALIBRATION SETUP AND DFS TEST RESULTS	87
9.6 CONDUCTED CALIBRATION SETUP	87
9.7 RADAR WAVEFORM CALIBRATION RESULT	88
9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	89
9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	

**Table of Contents**

	<b>Page</b>
<b>AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST</b>	<b>90</b>
<b>10. ANTENNA REQUIREMENT</b>	<b>91</b>
10.1 STANDARD REQUIREMENT	91
10.2 EUT ANTENNA	91
<b>11. TEST RESULTS</b>	<b>92</b>
11.1 DUTY CYCLE	92
11.2 MAXIMUM CONDUCTED OUTPUT POWER	155
11.3 OCCUPIED CHANNEL BANDWIDTH	159
11.4 -6DB EMISSION BANDWIDTH	281
11.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL	296
11.6 BAND EDGE	360
11.7 CONDUCTED RF SPURIOUS EMISSION	410
11.8 DFS	474



**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

<b>FCC Part15 (15.407) , Subpart E</b>			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (b)(1) 15.407 (b)(2) 15.407 (b)(3) 15.407 (b)(4)	Band Edge	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.407(h)	Dynamic Frequency Selection(DFS)	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

- (1) " N/A " denotes test is not applicable in this Test Report
- (2) This device operates with a duty cycle greater than 99%

## 1.1 FACILITIES AND ACCREDITATIONS

### FACILITIES

All measurement facilities used to collect the measurement data are located at  
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### LABORATORY ACCREDITATIONS AND LISTINGS

#### Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with  
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.  
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.  
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01  
This laboratory is accredited in accordance with the recognized  
International Standard ISO/IEC 17025:2005 General requirements for the  
competence of testing and calibration laboratories.  
This accreditation demonstrates technical competence for a defined  
scope and the operation of a laboratory quality management system  
(refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$



**1. GENERAL INFORMATION**  
**1.1 GENERAL DESCRIPTION OF EUT**

Equipment	Puductor																				
Trade Mark	Pudu																				
Model Name	PT1																				
Family Model	PT8, PT9																				
Model Difference	All models are the same circuit and RF module, except different models use different radars or cameras.																				
FCC ID	2AXDW-PT1																				
Product Description	<table border="1"> <tr> <td>Mode Supported</td> <td> <input checked="" type="checkbox"/>802.11a  <input checked="" type="checkbox"/>802.11n(HT20)  <input checked="" type="checkbox"/>802.11n(HT40)  <input checked="" type="checkbox"/>802.11ac(HT20)  <input checked="" type="checkbox"/>802.11ac(HT40)  <input checked="" type="checkbox"/>802.11ac(HT80)                 </td> </tr> <tr> <td>Data Rate</td> <td>802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9</td> </tr> <tr> <td>Modulation</td> <td>OFDM with BPSK/QPSK/16QAM/64QAM</td> </tr> <tr> <td>Operating Frequency Range</td> <td> <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz  <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz  <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz  <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz                 </td> </tr> <tr> <td>Function:</td> <td> <input type="checkbox"/>Outdoor AP <input type="checkbox"/>Indoor AP <input type="checkbox"/>Fixed P2P  <input checked="" type="checkbox"/>Client                 </td> </tr> <tr> <td>DFS type:</td> <td> <input type="checkbox"/>master devices  <input type="checkbox"/>Slave devices with radar detection  <input checked="" type="checkbox"/>Slave devices without radar detection                 </td> </tr> <tr> <td>Support TPC</td> <td> <input type="checkbox"/>YES  <input checked="" type="checkbox"/>NO                 </td> </tr> <tr> <td>Antenna Type</td> <td>Main Antenna 1: Built-in helical antenna AUX Antenna 2: Built-in helical antenna</td> </tr> <tr> <td>Antenna Gain</td> <td>Antenna 1: 2.0dBi Antenna 2: 3.0dBi</td> </tr> <tr> <td>Smart system</td> <td> <input checked="" type="checkbox"/>SISO for 802.11a/n/ac  <input checked="" type="checkbox"/>MIMO for 802.11n/ac                 </td> </tr> </table>	Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> 802.11ac(HT20) <input checked="" type="checkbox"/> 802.11ac(HT40) <input checked="" type="checkbox"/> 802.11ac(HT80)	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz	Function:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input checked="" type="checkbox"/> Client	DFS type:	<input type="checkbox"/> master devices <input type="checkbox"/> Slave devices with radar detection <input checked="" type="checkbox"/> Slave devices without radar detection	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	Antenna Type	Main Antenna 1: Built-in helical antenna AUX Antenna 2: Built-in helical antenna	Antenna Gain	Antenna 1: 2.0dBi Antenna 2: 3.0dBi	Smart system	<input checked="" type="checkbox"/> SISO for 802.11a/n/ac <input checked="" type="checkbox"/> MIMO for 802.11n/ac
	Mode Supported	<input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input checked="" type="checkbox"/> 802.11n(HT40) <input checked="" type="checkbox"/> 802.11ac(HT20) <input checked="" type="checkbox"/> 802.11ac(HT40) <input checked="" type="checkbox"/> 802.11ac(HT80)																			
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9																			
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM																			
	Operating Frequency Range	<input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz <input checked="" type="checkbox"/> U-NII-3: 5725 MHz ~5850 MHz																			
	Function:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P <input checked="" type="checkbox"/> Client																			
	DFS type:	<input type="checkbox"/> master devices <input type="checkbox"/> Slave devices with radar detection <input checked="" type="checkbox"/> Slave devices without radar detection																			
	Support TPC	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO																			
	Antenna Type	Main Antenna 1: Built-in helical antenna AUX Antenna 2: Built-in helical antenna																			
	Antenna Gain	Antenna 1: 2.0dBi Antenna 2: 3.0dBi																			
Smart system	<input checked="" type="checkbox"/> SISO for 802.11a/n/ac <input checked="" type="checkbox"/> MIMO for 802.11n/ac																				
Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.																					
Ratings	DC 25.2V from battery or DC 29V from adapter																				
Adapter	<input checked="" type="checkbox"/> Adapter 1 supply: Model: FY2903500 Input: 100-240V~50-60Hz 1.5A Max Output: 29V---3.5A																				
Battery	DC 25.2V, 21.21Ah																				
Connecting I/O Port(s)	Please refer to the User's Manual																				
HW Version	V3.1																				
SW Version	6.2.0.29																				

Note:


1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

Band	20MHz		40MHz		80MHz	
	Channel	Frequency	Channel	Frequency	Channel	Frequency
U-NII-1	36	5180 MHz	38	5190 MHz	42	5210 MHz
	40	5200 MHz	46	5230 MHz	-	-
	44	5220 MHz				
	48	5240 MHz				
U-NII-2A	52	5260 MHz	54	5270 MHz	58	5290 MHz
	56	5280 MHz	62	5310 MHz		
	60	5300 MHz				
	64	5320 MHz				
U-NII-2C	100	5500 MHz	102	5510 MHz	106	5530 MHz
	104	5520 MHz	110	5550 MHz	122	5610 MHz
	108	5540 MHz	118	5590 MHz		
	112	5560 MHz	126	5630 MHz		
	116	5580 MHz	134	5670 MHz		
	120	5600 MHz				
	124	5620 MHz				
	128	5640 MHz				
	132	5660 MHz				
	136	5680 MHz				
U-NII-3	149	5745 MHz	151	5755 MHz	155	5775 MHz
	153	5765 MHz	159	5795 MHz		
	157	5785 MHz				
	161	5805 MHz				
	165	5825 MHz				

Table for Filed Antenna

Antenna	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Built-in helical antenna	IPEX	2.0	Wifi Antenna
2	N/A	N/A	Built-in helical antenna	IPEX	3.0	Wifi Antenna

This EUT has two modules, A module supports Bluetooth, WIFI2.4G / 5G, A module has two antennas, 1 antenna supports Bluetooth, WIFI2.4G / 5G, 2 antenna supports WIFI2.4G / 5G. The B module only supports WIFI 2.4G.

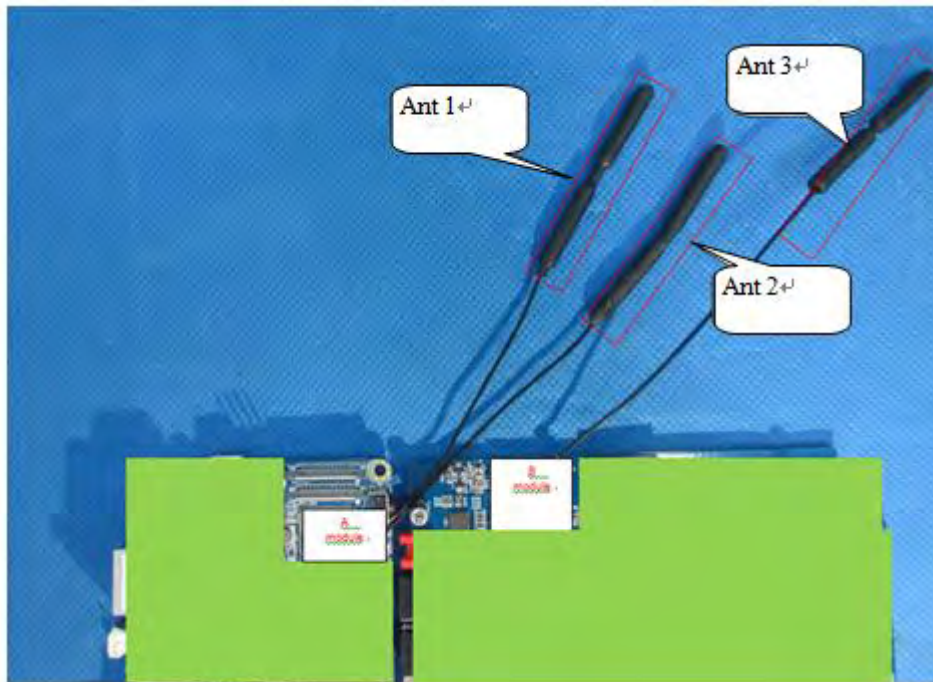

The module A for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1TX, 1RX
802.11n/ac	1TX/2TX, 1RX/2RX

For 5GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.  
 For MIMO mode, Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$  dBi =5.5dBi in 5GHz  
 the 802.11n(20/40) ac(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.  
 G2 means antenna gain for ANT 2 in dBi.  
 N<sub>ANT</sub> means the number of Antennas.

## 1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH48/CH52/CH56/CH64/CH100/CH120/CH140/CH149/ CH157/CH165
Mode 3	802.11n40/ac40 CH38/CH46/CH54/CH62/CH102/CH118/CH134/CH151/ CH159
Mode 4	802.11ac80 CH42/CH58/CH106/CH122/CH155

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

**1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**


For AC Conducted Emission Mode



For Radiated Test Cases



For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

**1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	Adapter	N/A	FY2903500	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.2m	C-1
C-3	RF Cable	YES	NO	0.1m	C-3

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

### 1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2020.05.11	2021.05.10	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2020.05.11	2021.05.10	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2020.05.11	2021.05.10	1 year
4	Test Receiver	R&S	ESPI7	101318	2020.05.11	2021.05.10	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.15	2021.04.14	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2019.12.11	2020.12.10	1 year
9	Amplifier	EMC	EMC051835SE	980246	2020.05.11	2021.05.10	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2019.12.11	2020.12.10	1 year
11	Power Meter	DARE	RPR3006W	15I00041SNO84	2020.05.11	2021.05.10	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2018.04.21	2021.04.20	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2018.04.21	2021.04.20	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2018.04.21	2021.04.20	3 year
15	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2018.04.21	2021.04.20	3 year
16	Filter	TRILTHIC	2400MHz	29	2020.04.07	2023.04.06	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2020.05.13	2021.05.12	1 year
2	LISN	R&S	ENV216	101313	2020.04.15	2021.04.14	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2020.05.13	2021.05.12	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11	2023.05.10	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2018.04.21	2021.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2018.04.21	2021.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2018.04.21	2021.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.



## 2. EMC EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

#### 2.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 2.1.3 TEST CONFIGURATION

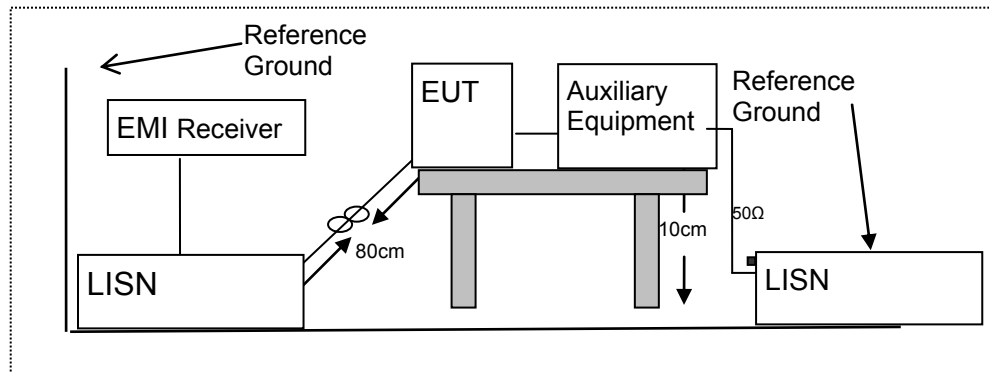

#### 2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.1m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	49.32	9.75	59.07	65.78	-6.71	QP
0.1539	31.76	9.75	41.51	55.78	-14.27	AVG
0.5100	30.35	9.74	40.09	56.00	-15.91	QP
0.5100	20.89	9.74	30.63	46.00	-15.37	AVG
1.3300	34.37	9.75	44.12	56.00	-11.88	QP
1.3300	16.18	9.75	25.93	46.00	-20.07	AVG
2.7620	33.01	9.82	42.83	56.00	-13.17	QP
2.7620	21.17	9.82	30.99	46.00	-15.01	AVG
15.9618	35.02	10.12	45.14	60.00	-14.86	QP
15.9618	25.08	10.12	35.20	50.00	-14.80	AVG
25.0259	32.91	10.72	43.63	60.00	-16.37	QP
25.0259	27.61	10.72	38.33	50.00	-11.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

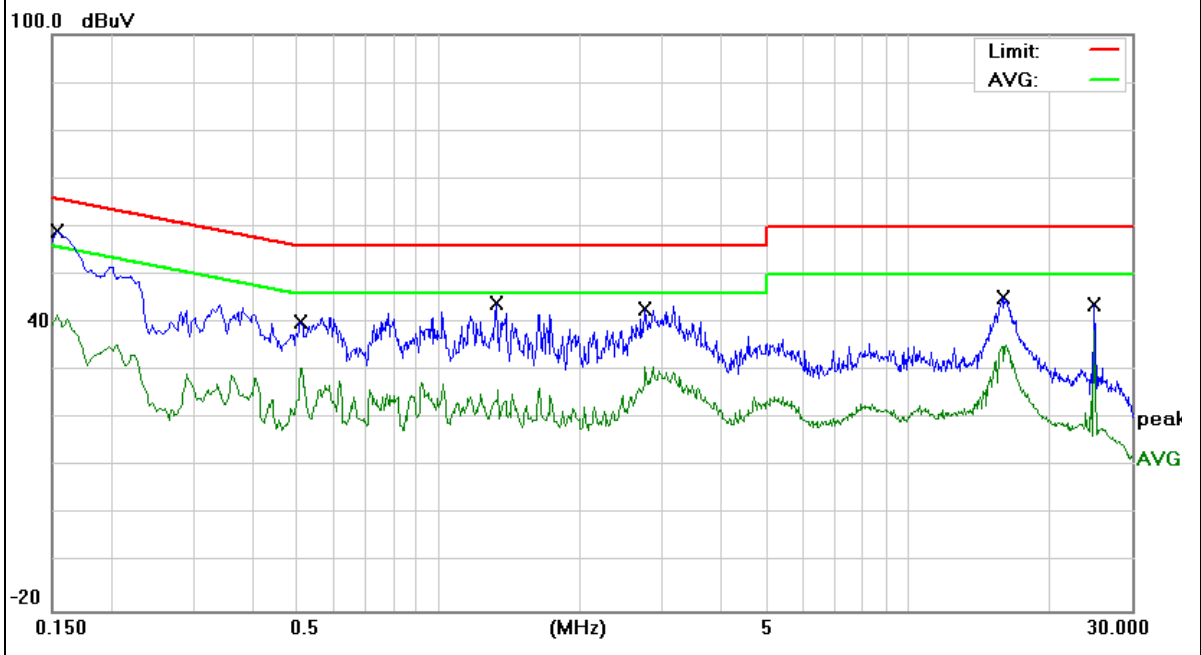


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	48.42	9.74	58.16	65.56	-7.40	QP
0.1580	34.01	9.74	43.75	55.56	-11.81	AVG
0.5140	33.78	9.75	43.53	56.00	-12.47	QP
0.5140	19.98	9.75	29.73	46.00	-16.27	AVG
1.3340	34.12	9.76	43.88	56.00	-12.12	QP
1.3340	17.99	9.76	27.75	46.00	-18.25	AVG
2.8699	32.59	9.86	42.45	56.00	-13.55	QP
2.8699	19.45	9.86	29.31	46.00	-16.69	AVG
16.1858	35.24	10.11	45.35	60.00	-14.65	QP
16.1858	25.66	10.11	35.77	50.00	-14.23	AVG
24.9377	30.74	10.65	41.39	60.00	-18.61	QP
24.9377	26.02	10.65	36.67	50.00	-13.33	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

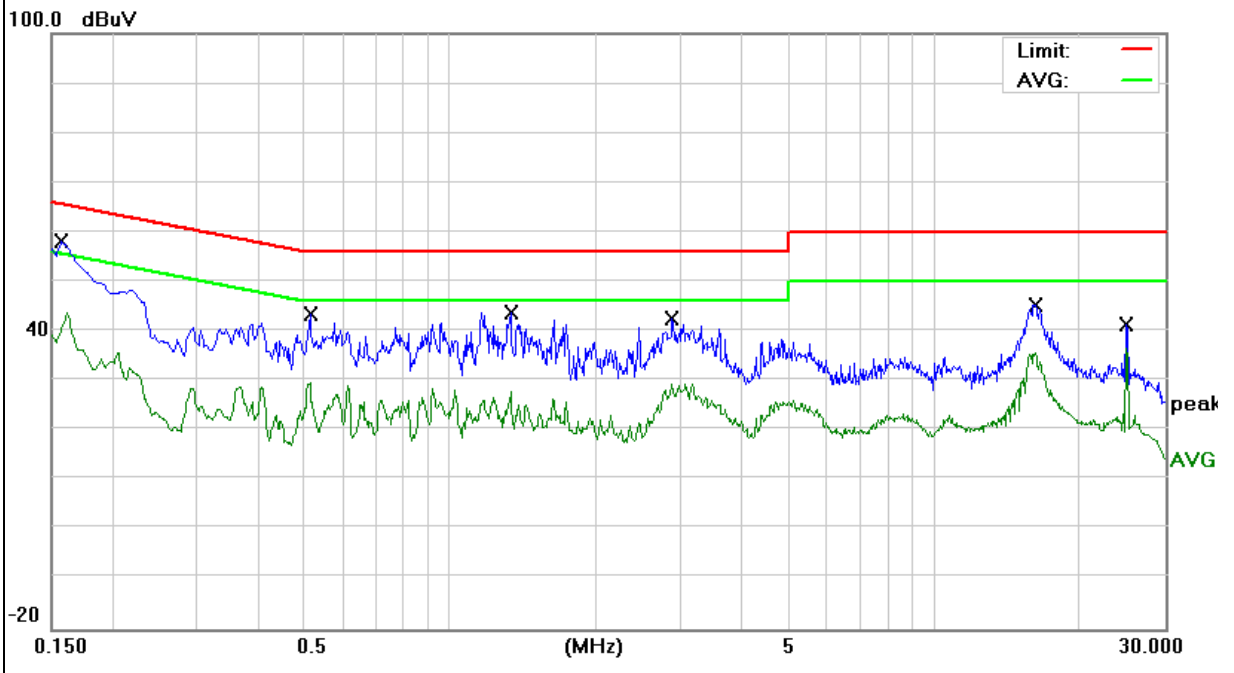


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	47.02	9.75	56.77	65.78	-9.01	QP
0.1539	30.51	9.75	40.26	55.78	-15.52	AVG
0.17	46.29	9.76	56.05	64.96	-8.91	QP
0.1700	29.72	9.76	39.48	54.96	-15.48	AVG
0.2220	42.22	9.76	51.98	62.74	-10.76	QP
0.2220	25.03	9.76	34.79	52.74	-17.95	AVG
0.3578	34.72	9.74	44.46	58.78	-14.32	QP
0.3578	18.56	9.74	28.30	48.78	-20.48	AVG
0.6179	30.66	9.74	40.40	56.00	-15.60	QP
0.6179	20.08	9.74	29.82	46.00	-16.18	AVG
0.8378	30.53	9.74	40.27	56.00	-15.73	QP
0.8378	13.01	9.74	22.75	46.00	-23.25	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

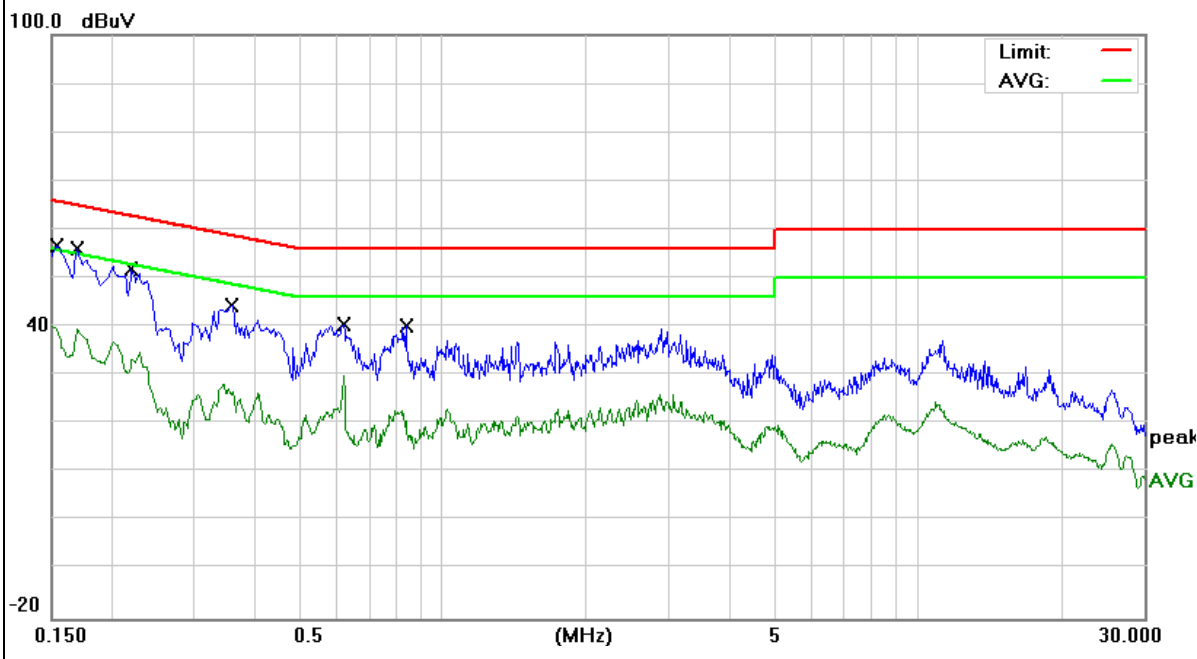


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.2G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.17	46.10	9.73	55.83	64.96	-9.13	QP
0.1700	29.45	9.73	39.18	54.96	-15.78	AVG
0.2260	40.37	9.73	50.10	62.59	-12.49	QP
0.2260	23.89	9.73	33.62	52.59	-18.97	AVG
0.6099	27.01	9.75	36.76	56.00	-19.24	QP
0.6099	18.72	9.75	28.47	46.00	-17.53	AVG
0.8339	27.86	9.75	37.61	56.00	-18.39	QP
0.8339	11.32	9.75	21.07	46.00	-24.93	AVG
1.0260	26.38	9.75	36.13	56.00	-19.87	QP
1.0260	12.94	9.75	22.69	46.00	-23.31	AVG
2.8660	29.09	9.86	38.95	56.00	-17.05	QP
2.8660	15.06	9.86	24.92	46.00	-21.08	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

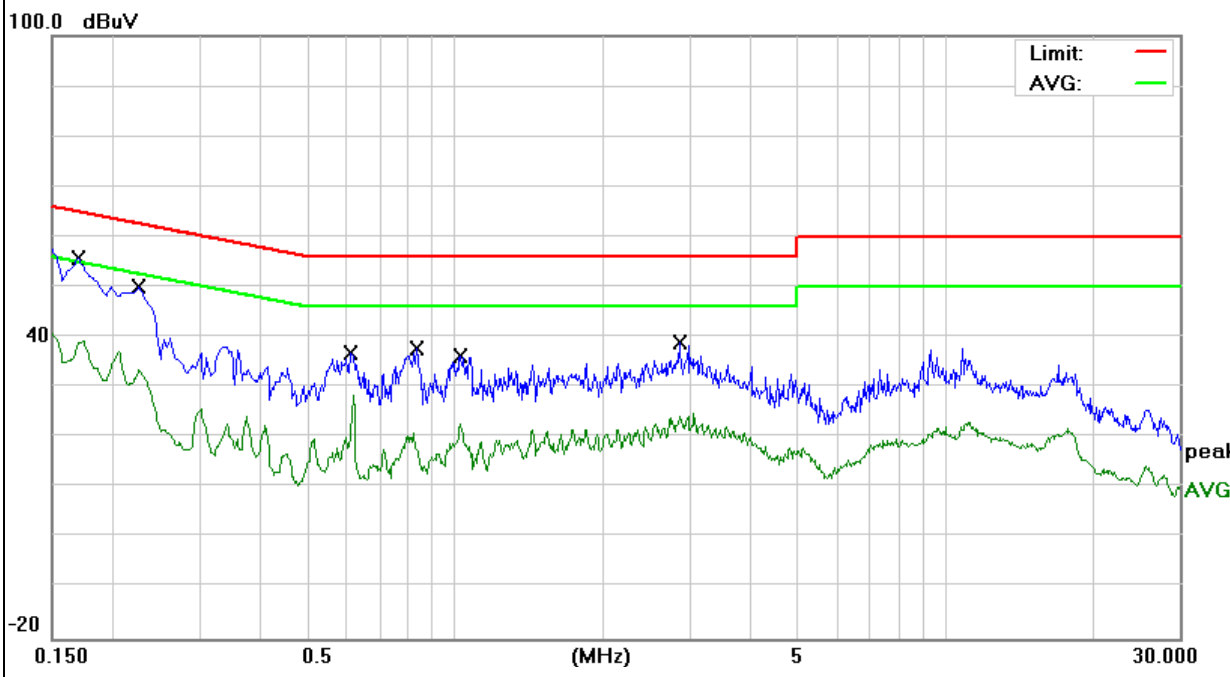


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	48.80	9.75	58.55	65.56	-7.01	QP
0.1580	32.73	9.75	42.48	55.56	-13.08	AVG
0.2179	40.46	9.76	50.22	62.89	-12.67	QP
0.2179	30.56	9.76	40.32	52.89	-12.57	AVG
0.4097	34.03	9.74	43.77	57.65	-13.88	QP
0.4097	23.51	9.74	33.25	47.65	-14.40	AVG
1.1737	32.19	9.74	41.93	56.00	-14.07	QP
1.1737	21.51	9.74	31.25	46.00	-14.75	AVG
2.8580	32.23	9.82	42.05	56.00	-13.95	QP
2.8580	22.29	9.82	32.11	46.00	-13.89	AVG
25.0020	34.93	10.72	45.65	60.00	-14.35	QP
25.0020	27.35	10.72	38.07	50.00	-11.93	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

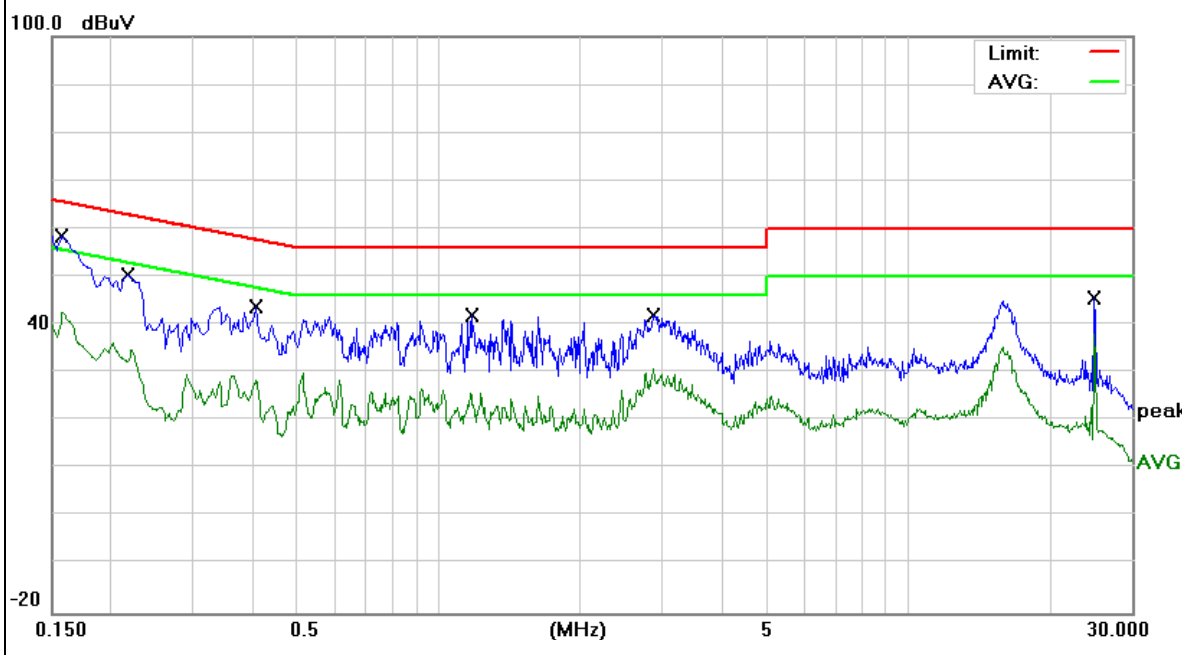


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1620	48.69	9.73	58.42	65.36	-6.94	QP
0.1620	33.42	9.73	43.15	55.36	-12.21	AVG
0.5140	31.97	9.75	41.72	56.00	-14.28	QP
0.5140	21.27	9.75	31.02	46.00	-14.98	AVG
1.2660	33.78	9.75	43.53	56.00	-12.47	QP
1.2660	22.50	9.75	32.25	46.00	-13.75	AVG
3.0619	33.22	9.87	43.09	56.00	-12.91	QP
3.0619	23.25	9.87	33.12	46.00	-12.88	AVG
16.0459	34.89	10.11	45.00	60.00	-15.00	QP
16.0459	26.04	10.11	36.15	50.00	-13.85	AVG
24.9818	31.46	10.66	42.12	60.00	-17.88	QP
24.9818	21.49	10.66	32.15	50.00	-17.85	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

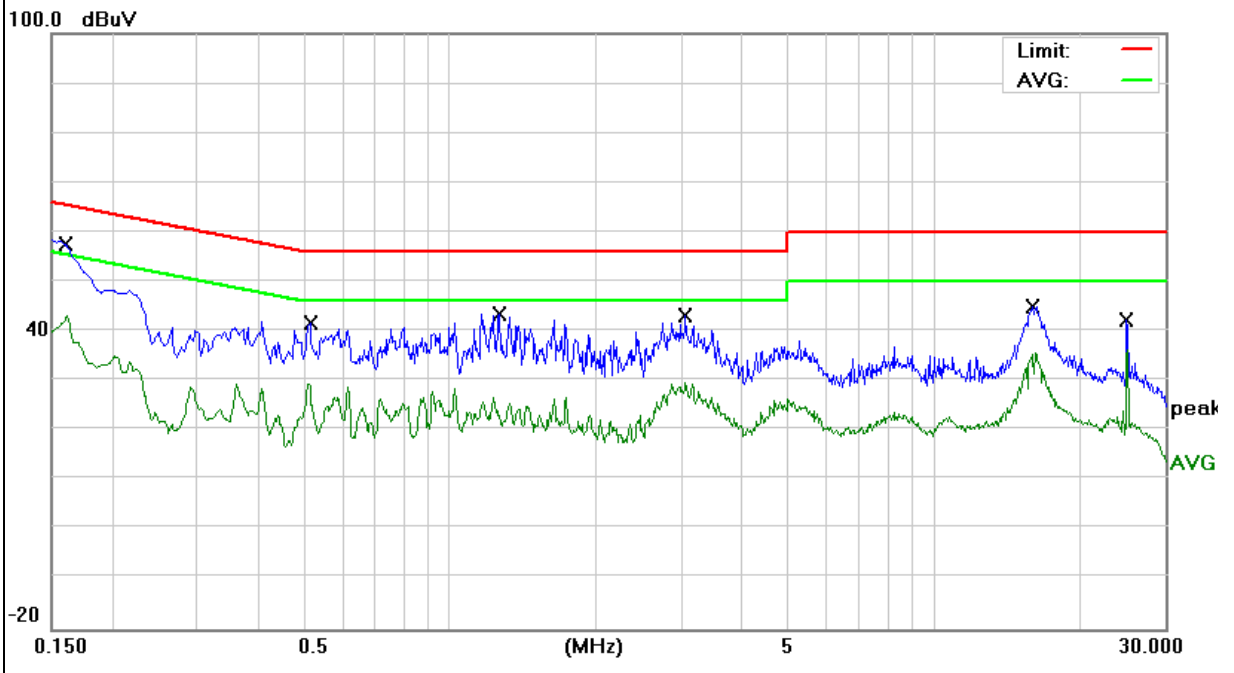


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1739	44.23	9.76	53.99	64.77	-10.78	QP
0.1739	33.39	9.76	43.15	54.77	-11.62	AVG
0.2220	40.28	9.76	50.04	62.74	-12.70	QP
0.2220	30.49	9.76	40.25	52.74	-12.49	AVG
0.6139	31.18	9.74	40.92	56.00	-15.08	QP
0.6139	20.62	9.74	30.36	46.00	-15.64	AVG
0.7940	30.79	9.74	40.53	56.00	-15.47	QP
0.7940	19.59	9.74	29.33	46.00	-16.67	AVG
2.8860	28.30	9.82	38.12	56.00	-17.88	QP
2.8860	18.63	9.82	28.45	46.00	-17.55	AVG
10.8419	24.60	10.02	34.62	60.00	-25.38	QP
10.8419	15.63	10.02	25.65	50.00	-24.35	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

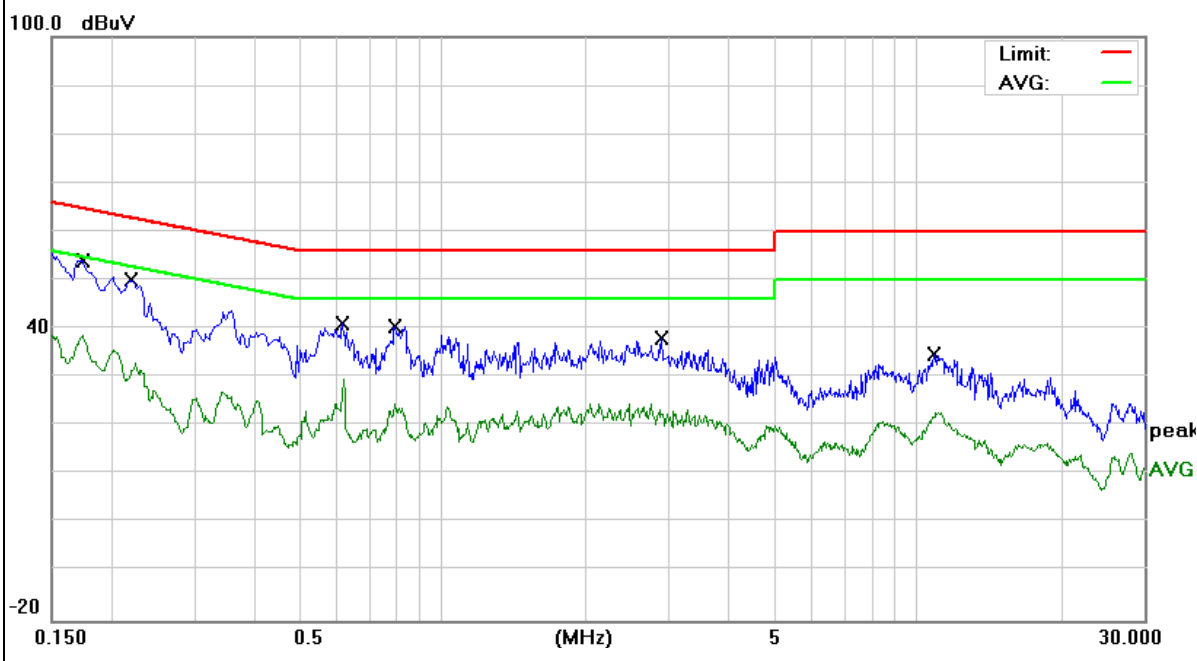




EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.3G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	47.43	9.74	57.17	65.78	-8.61	QP
0.1539	35.58	9.74	45.32	55.78	-10.46	AVG
0.1700	44.55	9.73	54.28	64.96	-10.68	QP
0.1700	34.63	9.73	44.36	54.96	-10.60	AVG
0.2260	41.72	9.73	51.45	62.59	-11.14	QP
0.2260	31.52	9.73	41.25	52.59	-11.34	AVG
0.8219	28.78	9.75	38.53	56.00	-17.47	QP
0.8219	20.27	9.75	30.02	46.00	-15.98	AVG
2.8699	30.05	9.86	39.91	56.00	-16.09	QP
2.8699	21.39	9.86	31.25	46.00	-14.75	AVG
9.5978	28.79	10.04	38.83	60.00	-21.17	QP
9.5978	19.29	10.04	29.33	50.00	-20.67	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

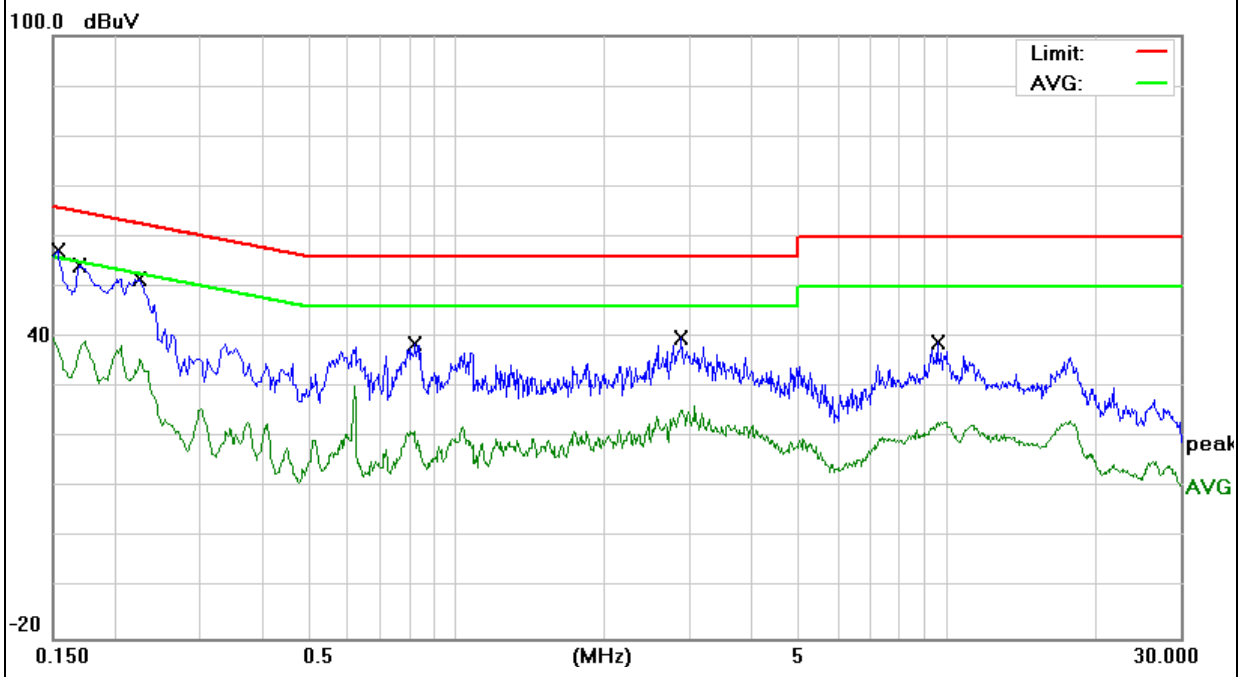


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	45.82	9.75	55.57	65.56	-9.99	QP
0.1580	35.27	9.75	45.02	55.56	-10.54	AVG
0.1940	41.05	9.76	50.81	63.86	-13.05	QP
0.1940	30.56	9.76	40.32	53.86	-13.54	AVG
1.0220	31.43	9.74	41.17	56.00	-14.83	QP
1.0220	20.51	9.74	30.25	46.00	-15.75	AVG
1.3300	31.52	9.75	41.27	56.00	-14.73	QP
1.3300	20.46	9.75	30.21	46.00	-15.79	AVG
2.7580	31.75	9.82	41.57	56.00	-14.43	QP
2.7580	21.43	9.82	31.25	46.00	-14.75	AVG
16.0178	33.87	10.12	43.99	60.00	-16.01	QP
16.0178	23.20	10.12	33.32	50.00	-16.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

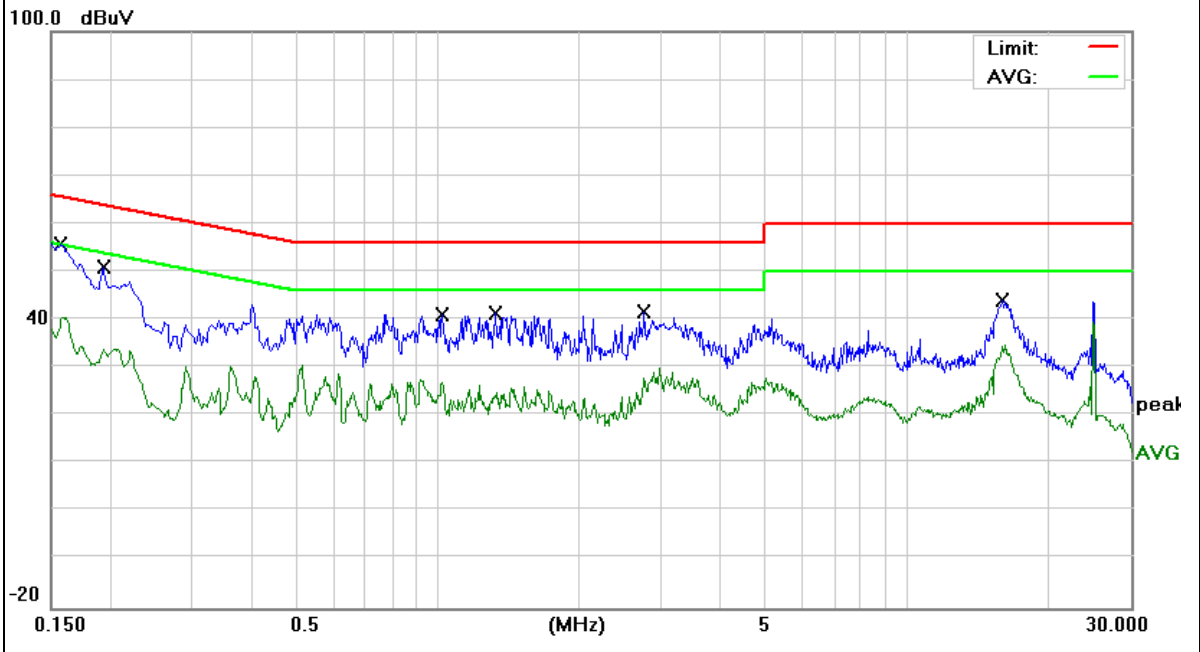


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	47.16	9.74	56.90	65.78	-8.88	QP
0.1539	36.28	9.74	46.02	55.78	-9.76	AVG
0.4097	32.60	9.75	42.35	57.65	-15.30	QP
0.4097	23.61	9.75	33.36	47.65	-14.29	AVG
0.5735	32.30	9.75	42.05	56.00	-13.95	QP
0.5735	22.50	9.75	32.25	46.00	-13.75	AVG
1.3260	32.19	9.76	41.95	56.00	-14.05	QP
1.3260	21.89	9.76	31.65	46.00	-14.35	AVG
3.6139	30.50	9.90	40.40	56.00	-15.60	QP
3.6139	20.66	9.90	30.56	46.00	-15.44	AVG
5.3258	29.94	9.94	39.88	60.00	-20.12	QP
5.3258	19.64	9.94	29.58	50.00	-20.42	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

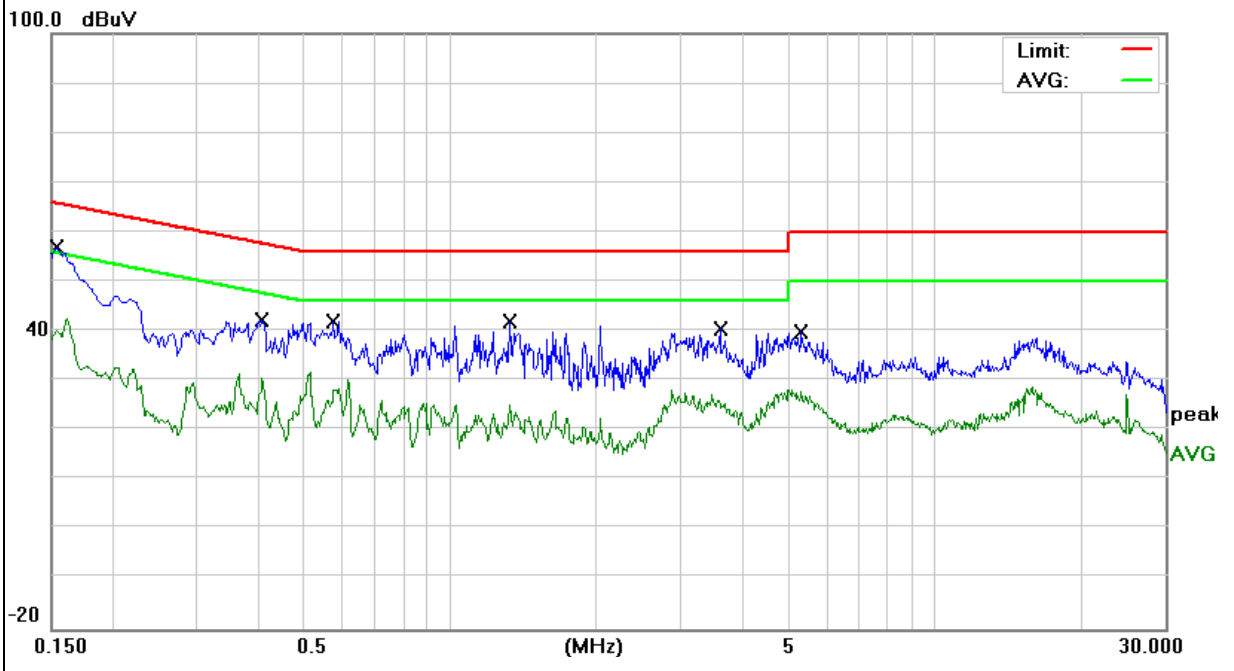


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	45.52	9.75	55.27	65.78	-10.51	QP
0.1539	35.40	9.75	45.15	55.78	-10.63	AVG
0.2020	40.25	9.76	50.01	63.52	-13.51	QP
0.2020	30.57	9.76	40.33	53.52	-13.19	AVG
0.3618	35.14	9.74	44.88	58.69	-13.81	QP
0.3618	24.51	9.74	34.25	48.69	-14.44	AVG
0.5823	31.12	9.74	40.86	56.00	-15.14	QP
0.5823	20.48	9.74	30.22	46.00	-15.78	AVG
1.4336	28.49	9.76	38.25	56.00	-17.75	QP
1.4336	18.88	9.76	28.64	46.00	-17.36	AVG
2.8860	30.75	9.82	40.57	56.00	-15.43	QP
2.8860	20.92	9.82	30.74	46.00	-15.26	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

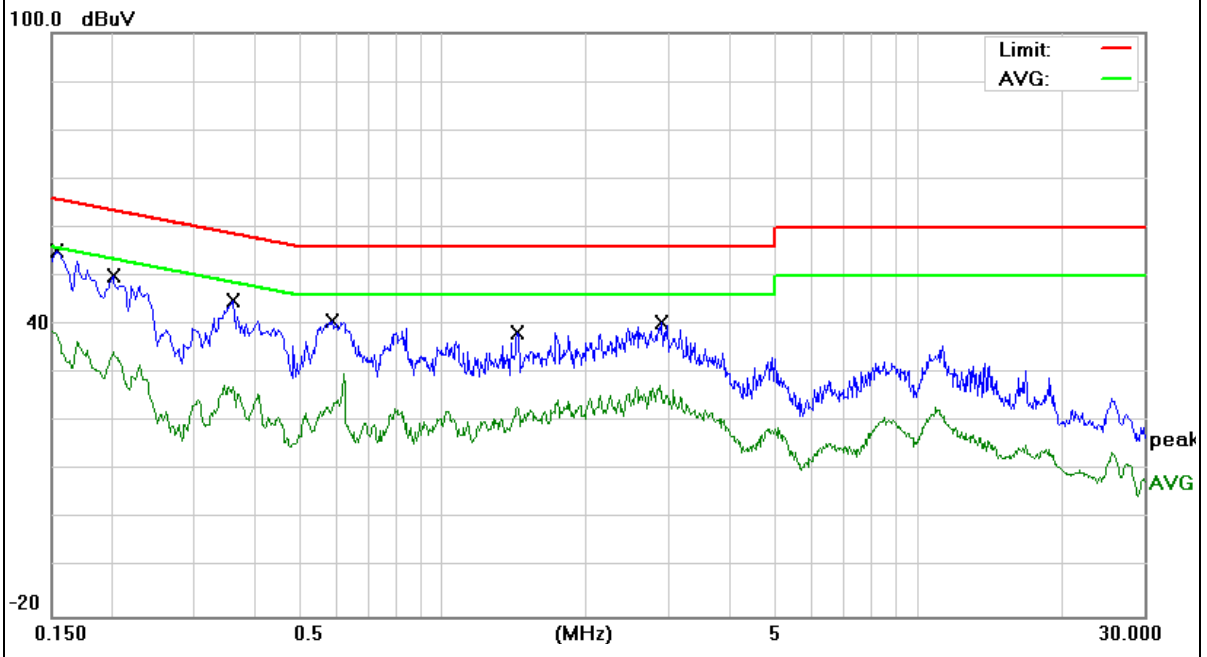


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.6G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2260	41.37	9.73	51.10	62.59	-11.49	QP
0.226	31.42	9.73	41.15	52.59	-11.44	AVG
0.6097	28.51	9.75	38.26	56.00	-17.74	QP
0.6097	18.50	9.75	28.25	46.00	-17.75	AVG
0.8217	30.18	9.75	39.93	56.00	-16.07	QP
0.8217	19.61	9.75	29.36	46.00	-16.64	AVG
1.0260	27.38	9.75	37.13	56.00	-18.87	QP
1.0260	17.40	9.75	27.15	46.00	-18.85	AVG
2.8660	28.59	9.86	38.45	56.00	-17.55	QP
2.8660	18.49	9.86	28.35	46.00	-17.65	AVG
9.3099	26.35	10.03	36.38	60.00	-23.62	QP
9.3099	16.46	10.03	26.49	50.00	-23.51	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

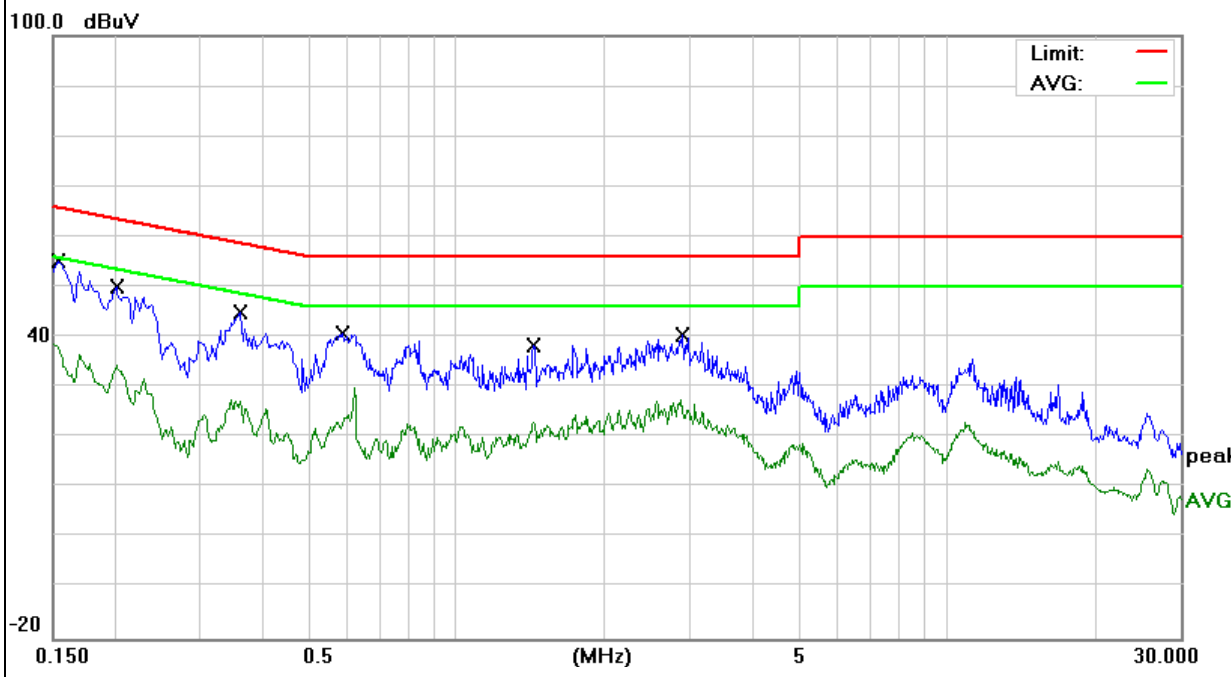


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1580	46.54	9.75	56.29	65.56	-9.27	QP
0.1580	36.58	9.75	46.33	55.56	-9.23	AVG
0.4020	32.82	9.74	42.56	57.81	-15.25	QP
0.4020	24.28	9.74	34.02	47.81	-13.79	AVG
0.7780	32.39	9.74	42.13	56.00	-13.87	QP
0.7780	23.95	9.74	33.69	46.00	-12.31	AVG
3.1979	30.10	9.83	39.93	56.00	-16.07	QP
3.1979	19.53	9.83	29.36	46.00	-16.64	AVG
16.0178	30.87	10.12	40.99	60.00	-19.01	QP
16.0178	20.23	10.12	30.35	50.00	-19.65	AVG
25.0620	32.76	10.72	43.48	60.00	-16.52	QP
25.0620	22.93	10.72	33.65	50.00	-16.35	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

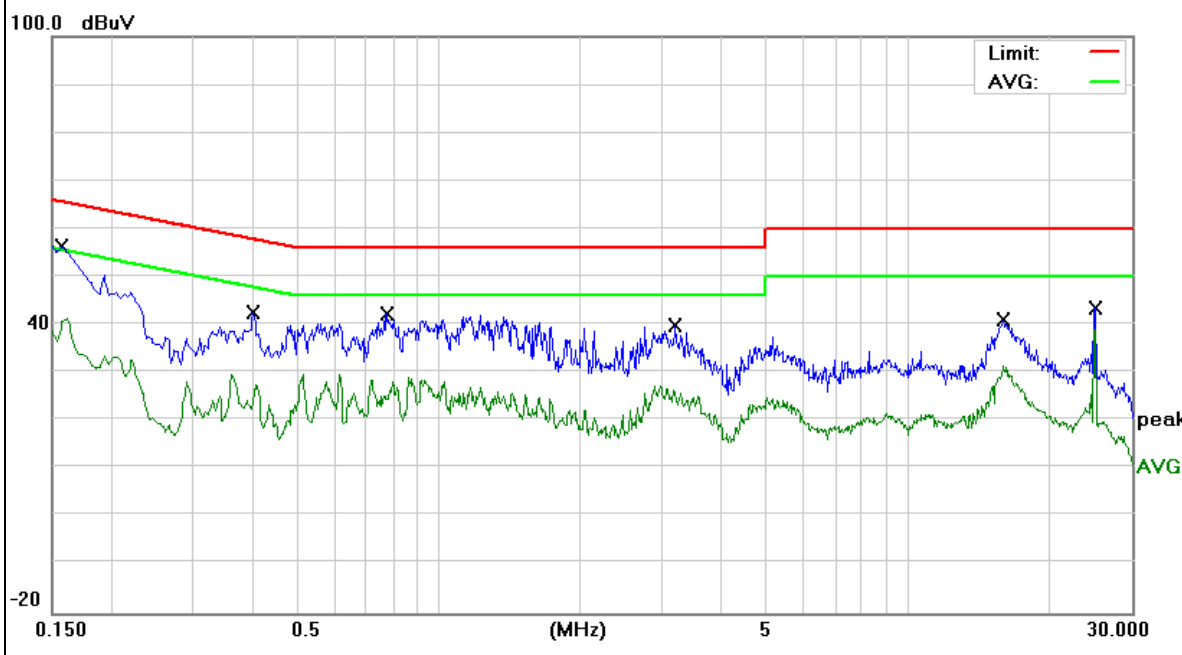


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 120V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	47.16	9.74	56.90	65.78	-8.88	QP
0.1539	36.95	9.74	46.69	55.78	-9.09	AVG
0.8020	31.47	9.75	41.22	56.00	-14.78	QP
0.8020	22.61	9.75	32.36	46.00	-13.64	AVG
1.2257	33.04	9.75	42.79	56.00	-13.21	QP
1.2257	25.58	9.75	35.33	46.00	-10.67	AVG
3.6139	32.50	9.90	42.40	56.00	-13.60	QP
3.6139	26.12	9.90	36.02	46.00	-9.98	AVG
4.5377	29.99	9.94	39.93	56.00	-16.07	QP
4.5377	19.64	9.94	29.58	46.00	-16.42	AVG
14.9859	28.07	10.09	38.16	60.00	-21.84	QP
14.9859	20.16	10.09	30.25	50.00	-19.75	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

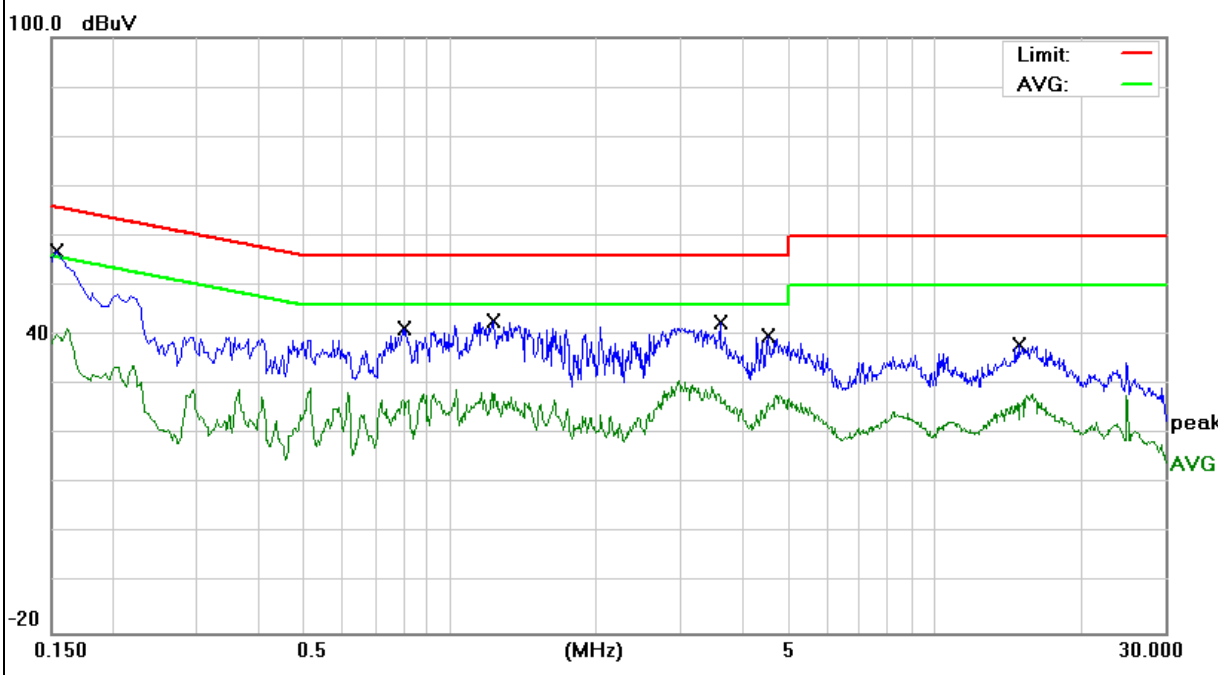


EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1703	43.65	9.76	53.41	64.94	-11.53	QP
0.1703	33.60	9.76	43.36	54.94	-11.58	AVG
0.2220	40.28	9.76	50.04	62.74	-12.70	QP
0.2220	30.39	9.76	40.15	52.74	-12.59	AVG
0.3458	33.80	9.73	43.53	59.06	-15.53	QP
0.3458	23.63	9.73	33.36	49.06	-15.70	AVG
0.6139	30.18	9.74	39.92	56.00	-16.08	QP
0.6139	18.51	9.74	28.25	46.00	-17.75	AVG
0.7940	29.29	9.74	39.03	56.00	-16.97	QP
0.7940	19.60	9.74	29.34	46.00	-16.66	AVG
1.0300	29.16	9.74	38.90	56.00	-17.10	QP
1.0300	19.13	9.74	28.87	46.00	-17.13	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

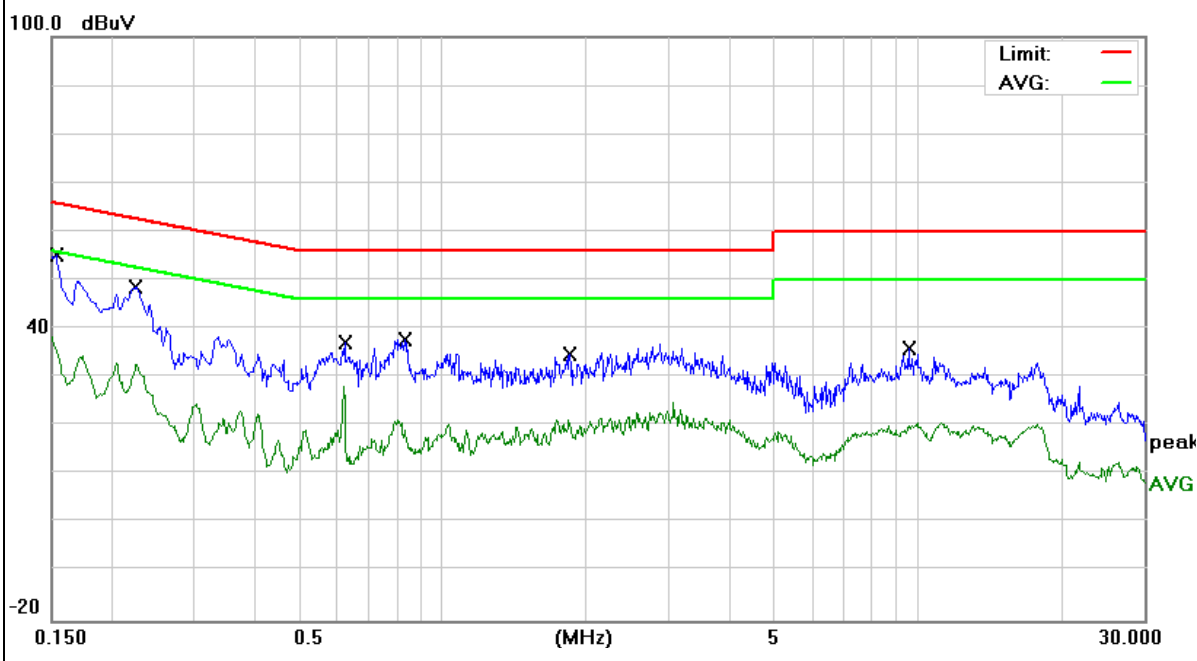




EUT :	Puductor	Model Name. :	PT1
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 29V from Adapter AC 240V/60Hz	Test Mode :	Mode 1(5.8G)

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	45.43	9.74	55.17	65.78	-10.61	QP
0.1539	35.95	9.74	45.69	55.78	-10.09	AVG
0.2260	38.72	9.73	48.45	62.59	-14.14	QP
0.2260	28.52	9.73	38.25	52.59	-14.34	AVG
0.6219	27.41	9.75	37.16	56.00	-18.84	QP
0.6219	19.50	9.75	29.25	46.00	-16.75	AVG
0.8338	28.07	9.75	37.82	56.00	-18.18	QP
0.8338	17.39	9.75	27.14	46.00	-18.86	AVG
1.8500	24.87	9.79	34.66	56.00	-21.34	QP
1.8500	15.87	9.79	25.66	46.00	-20.34	AVG
9.5977	25.79	10.04	35.83	60.00	-24.17	QP
9.5977	17.16	10.04	27.20	50.00	-22.80	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

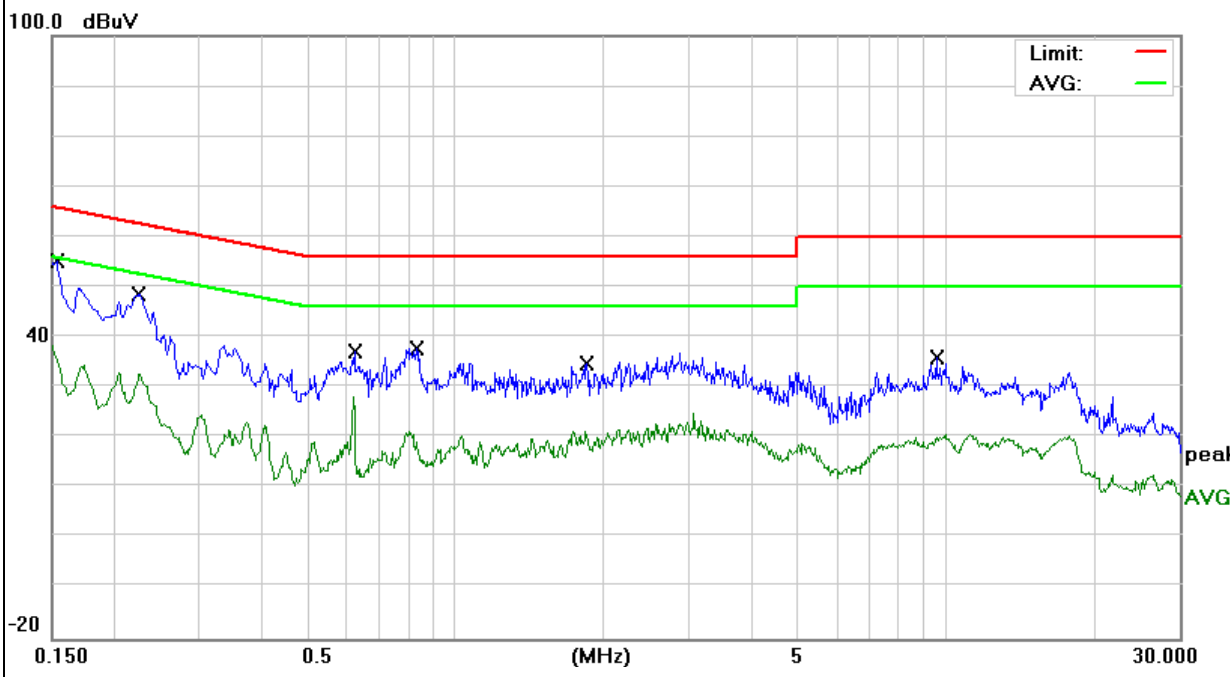

## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


Remark : 1. Emission level in dBuV/m=20 log (uV/m)  
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
 3. For Frequency 9kHz~30MHz:  
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.  
 For Frequency above 30MHz:  
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

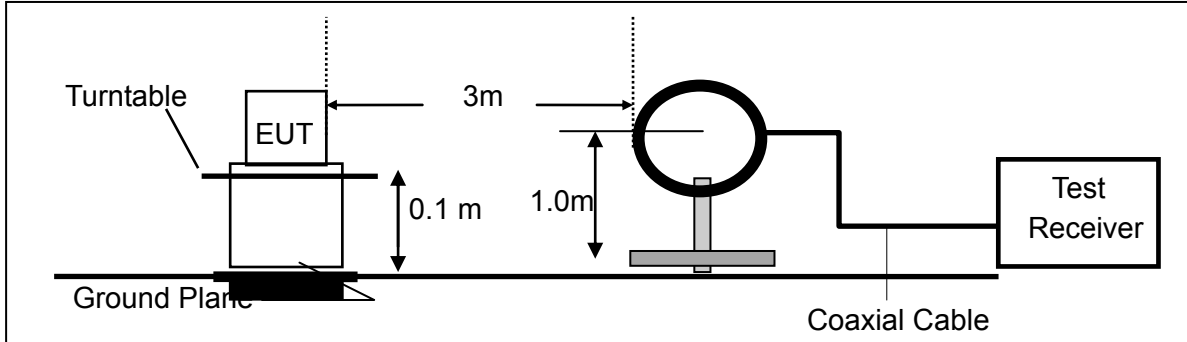

(b) For radiated emissions from 30MHz to 1000MHz

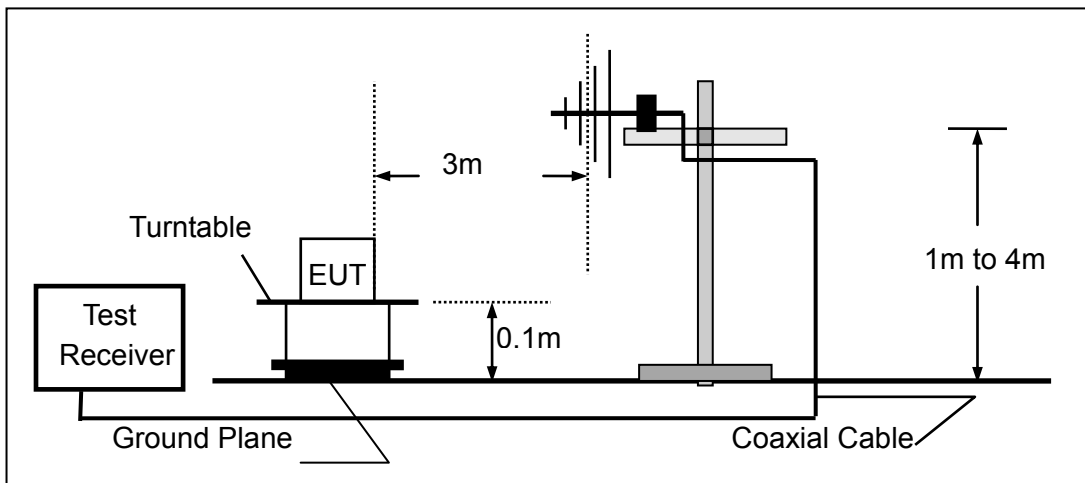

(c) For radiated emissions above 1000MHz

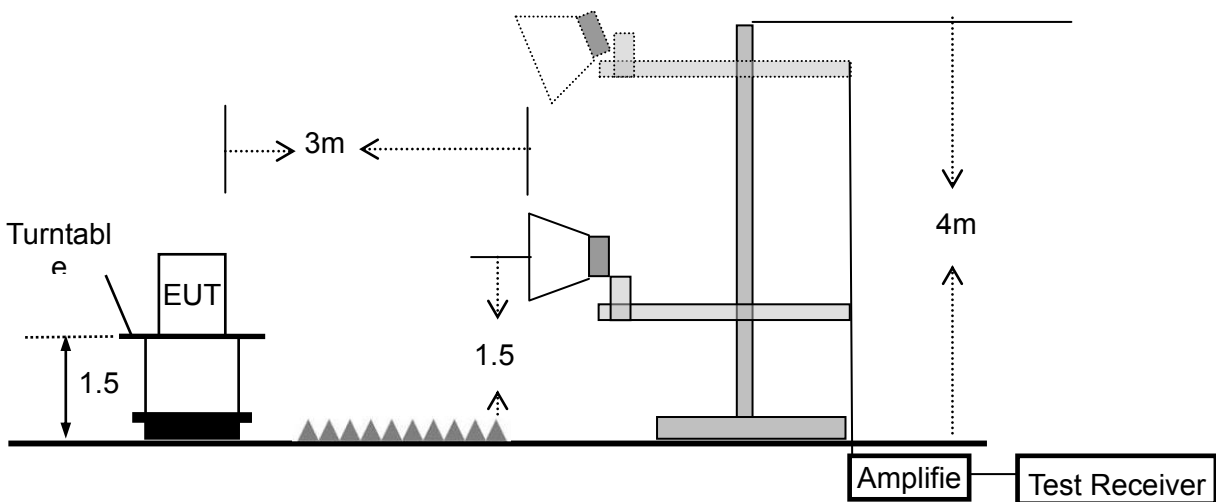

### 2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.1 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**2.2.6 TEST RESULTS (9KHZ – 30 MHZ)**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure:	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

All modes have been tested, just the the worst mode has been recorded in the report.


**2.2.7 TEST RESULTS (30MHZ – 1GHZ)**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.2G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.4215	24.03	13.08	37.11	40.00	-2.89	QP
V	60.4919	32.29	5.96	38.25	40.00	-1.75	QP
V	223.7333	33.42	10.91	44.33	46.00	-1.67	QP
V	289.002	27.21	14.32	41.53	46.00	-4.47	QP
V	446.4141	25.56	18.56	44.12	46.00	-1.88	QP
V	801.7862	19.39	24.97	44.36	46.00	-1.64	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

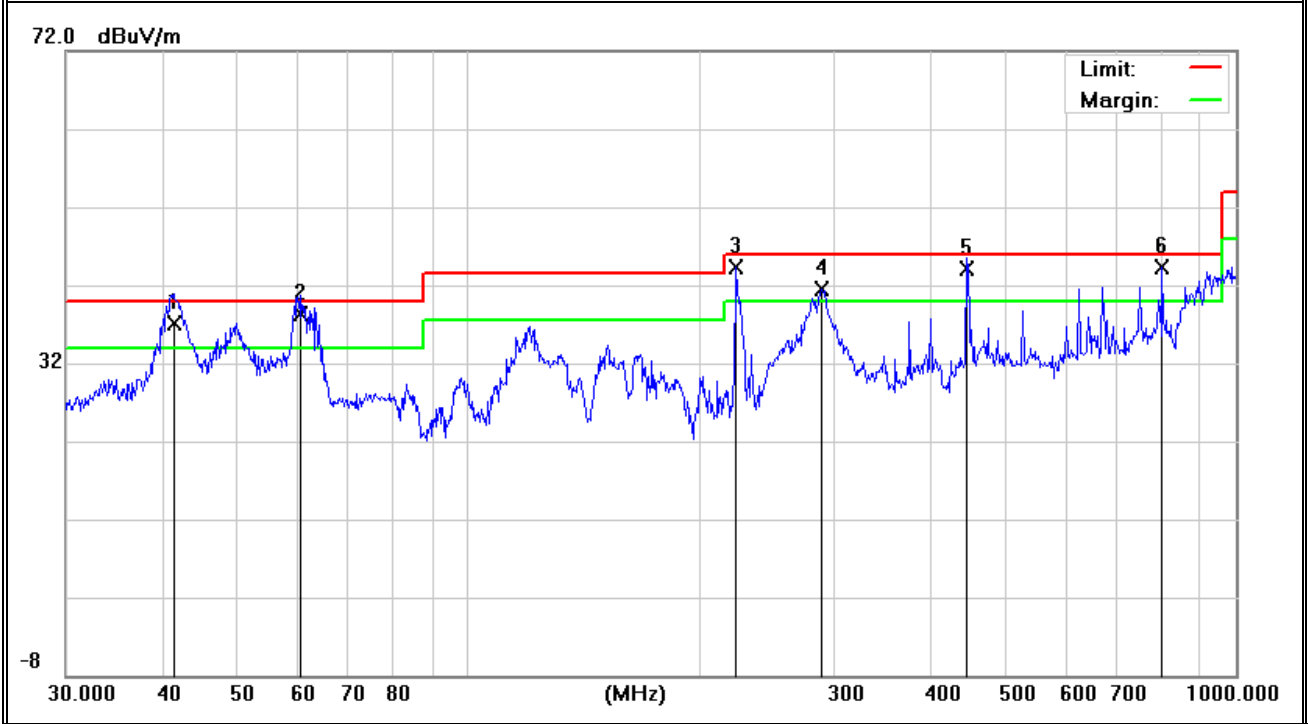

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	152.1297	25.37	11.84	37.21	43.50	-6.29	QP
H	222.9499	32.97	10.91	43.88	46.00	-2.12	QP
H	289.002	29.70	14.32	44.02	46.00	-1.98	QP
H	552.8831	19.10	22.54	41.64	46.00	-4.36	QP
H	782.3451	18.30	24.95	43.25	46.00	-2.75	QP
H	952.0937	15.88	28.40	44.28	46.00	-1.72	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

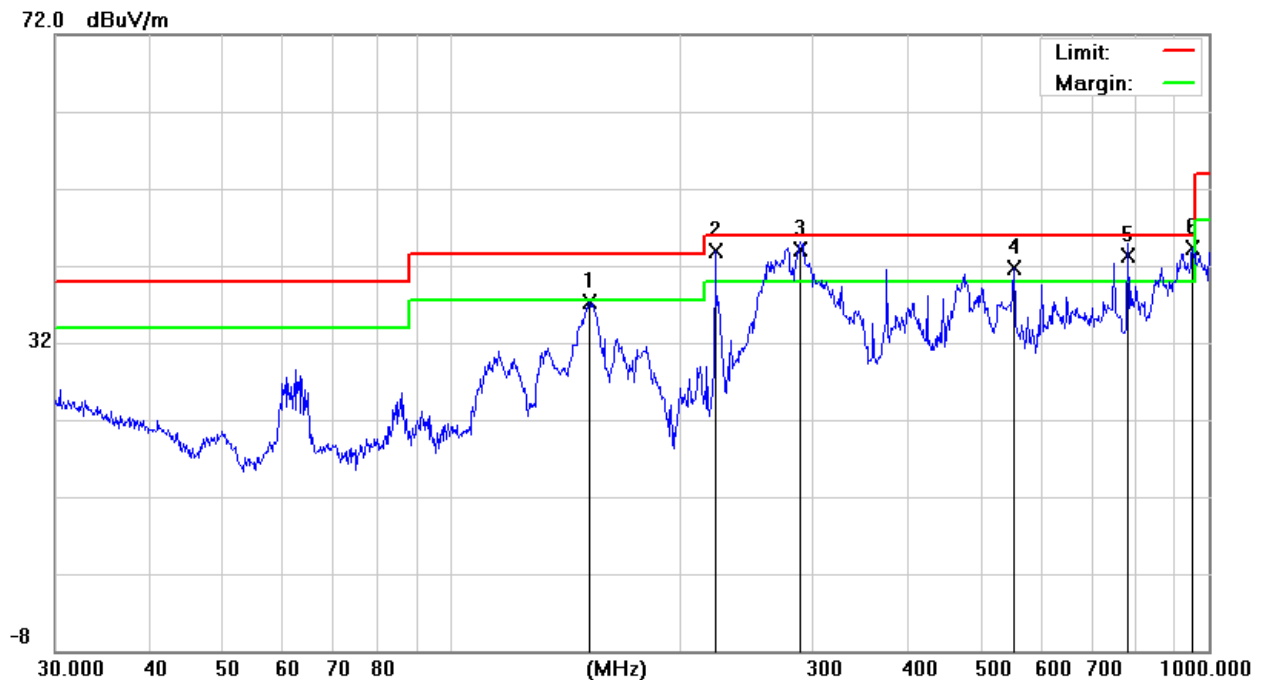


EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.3G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.4215	25.04	13.08	38.12	40.00	-1.88	QP
V	63.0915	30.94	6.11	37.05	40.00	-2.95	QP
V	120.6991	24.76	12.39	37.15	43.50	-6.35	QP
V	223.7333	33.42	10.91	44.33	46.00	-1.67	QP
V	446.4141	24.76	18.56	43.32	46.00	-2.68	QP
V	801.7862	18.39	24.97	43.36	46.00	-2.64	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

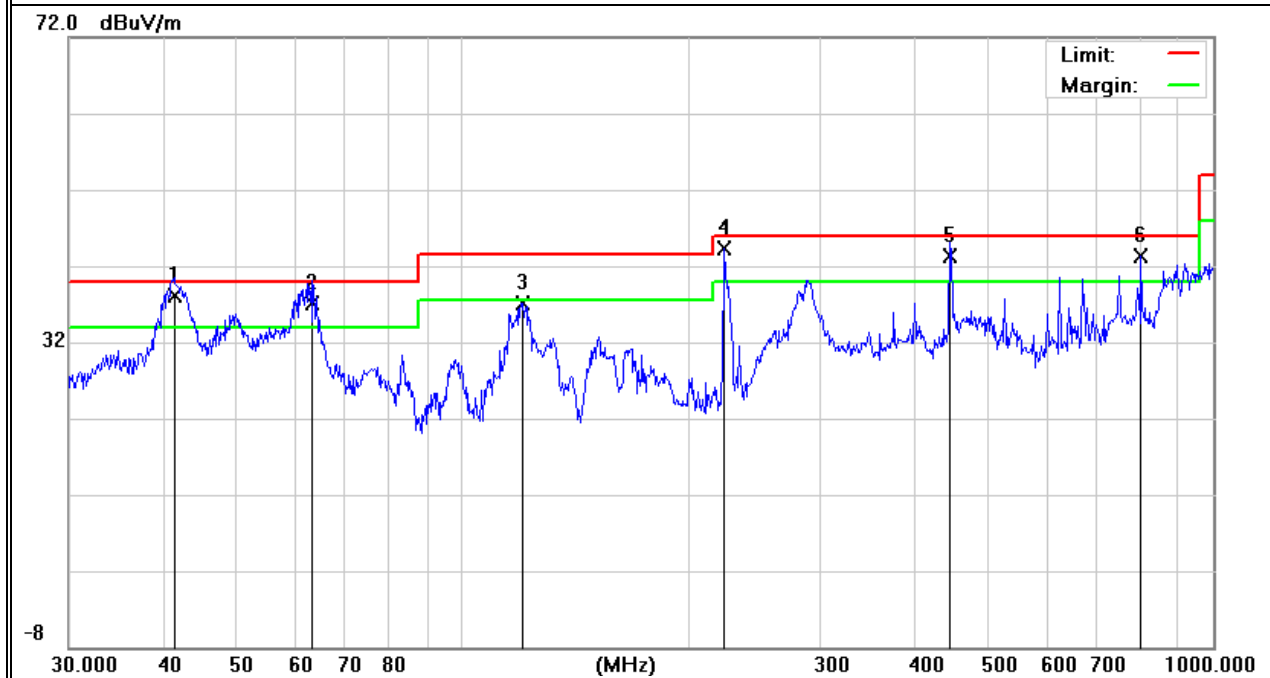




Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	151.0663	23.06	11.91	34.97	43.50	-8.53	QP
H	222.9499	32.47	10.91	43.38	46.00	-2.62	QP
H	289.002	28.72	14.32	43.04	46.00	-2.96	QP
H	375.9384	24.12	16.97	41.09	46.00	-4.91	QP
H	782.3451	18.07	24.95	43.02	46.00	-2.98	QP
H	952.0937	13.85	28.40	42.25	46.00	-3.75	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

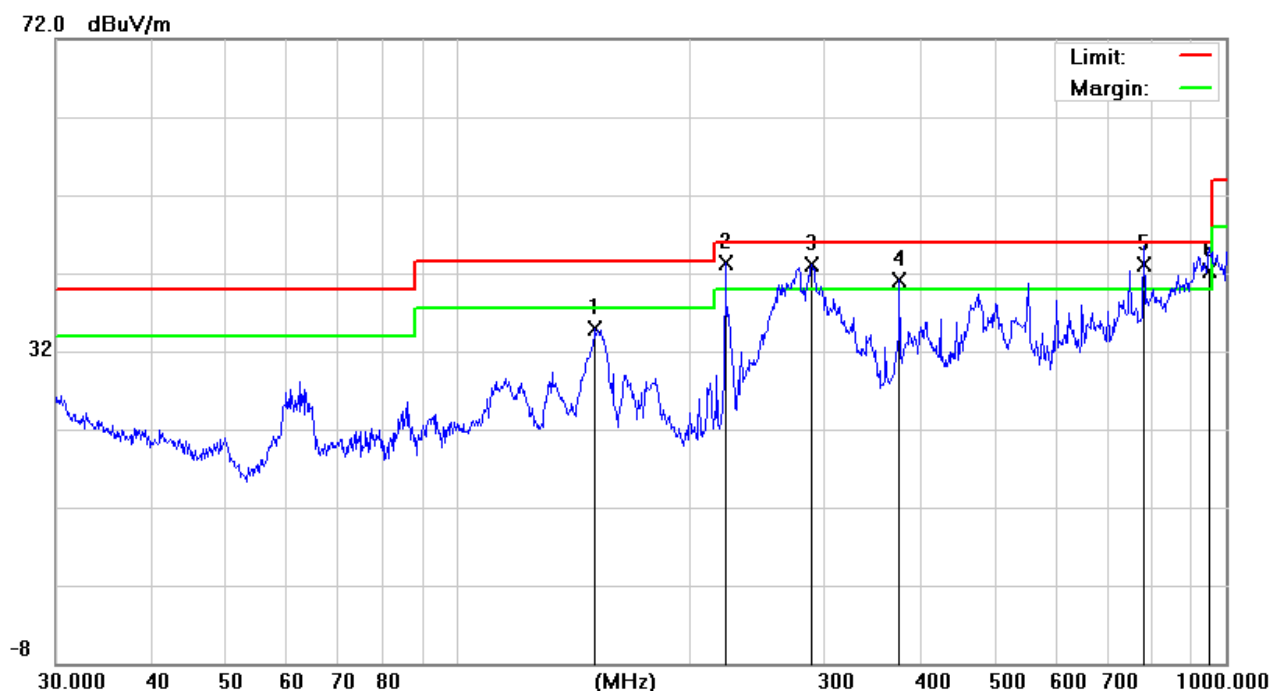


EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.6G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.4215	24.94	13.08	38.02	40.00	-1.98	QP
V	60.4919	30.40	5.96	36.36	40.00	-3.64	QP
V	223.7333	32.92	10.91	43.83	46.00	-2.17	QP
V	289.002	25.21	14.32	39.53	46.00	-6.47	QP
V	446.4141	25.55	18.56	44.11	46.00	-1.89	QP
V	801.7862	18.89	24.97	43.86	46.00	-2.14	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

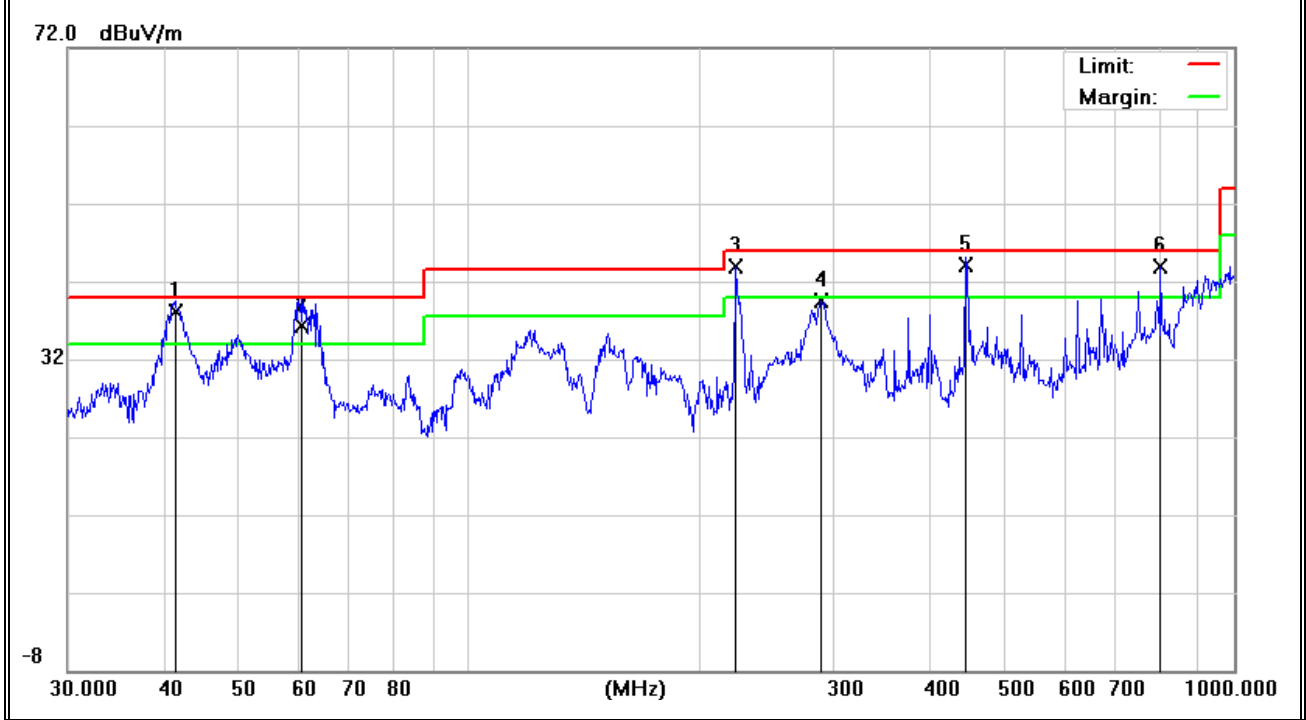

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	151.0663	24.56	11.91	36.47	43.50	-7.03	QP
H	222.9499	32.47	10.91	43.38	46.00	-2.62	QP
H	289.002	29.22	14.32	43.54	46.00	-2.46	QP
H	552.8831	18.10	22.54	40.64	46.00	-5.36	QP
H	782.3451	19.27	24.95	44.22	46.00	-1.78	QP
H	1000.000 0	16.24	28.07	44.31	54.00	-9.69	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

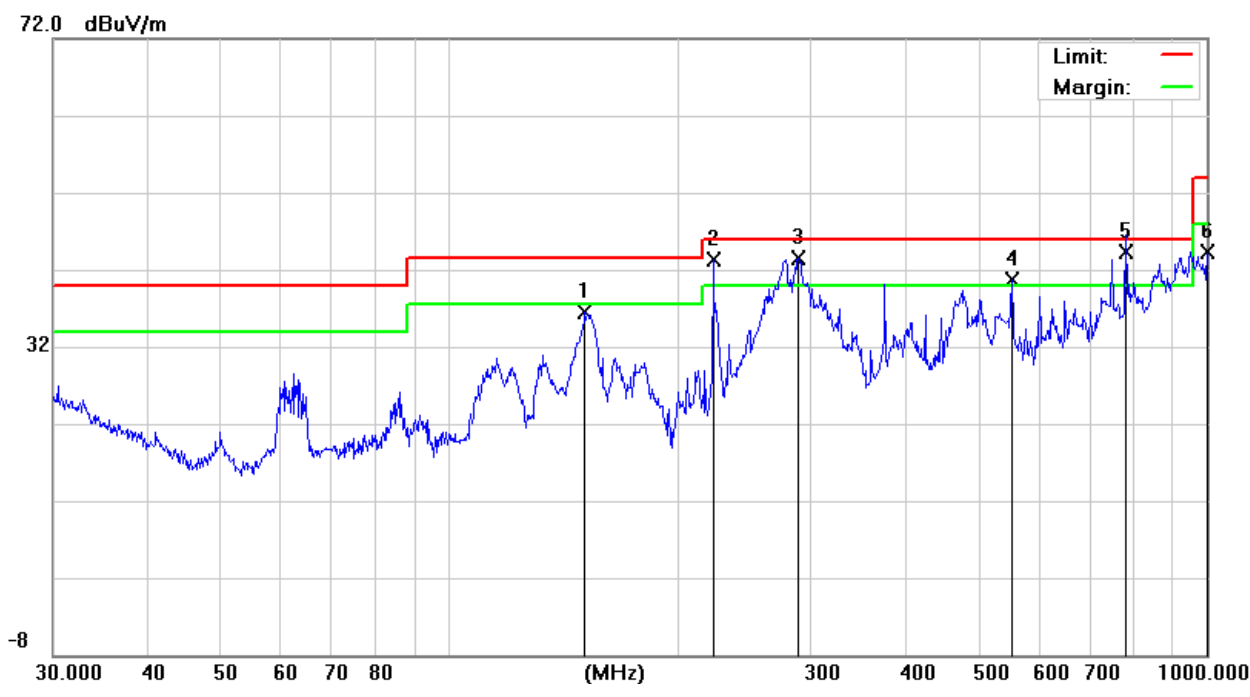


EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.8G) - 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.4215	23.97	13.08	37.05	40.00	-2.95	QP
V	60.4919	32.26	5.96	38.22	40.00	-1.78	QP
V	223.7333	32.92	10.91	43.83	46.00	-2.17	QP
V	289.002	27.71	14.32	42.03	46.00	-3.97	QP
V	446.4141	25.56	18.56	44.12	46.00	-1.88	QP
V	801.7862	18.89	24.97	43.86	46.00	-2.14	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

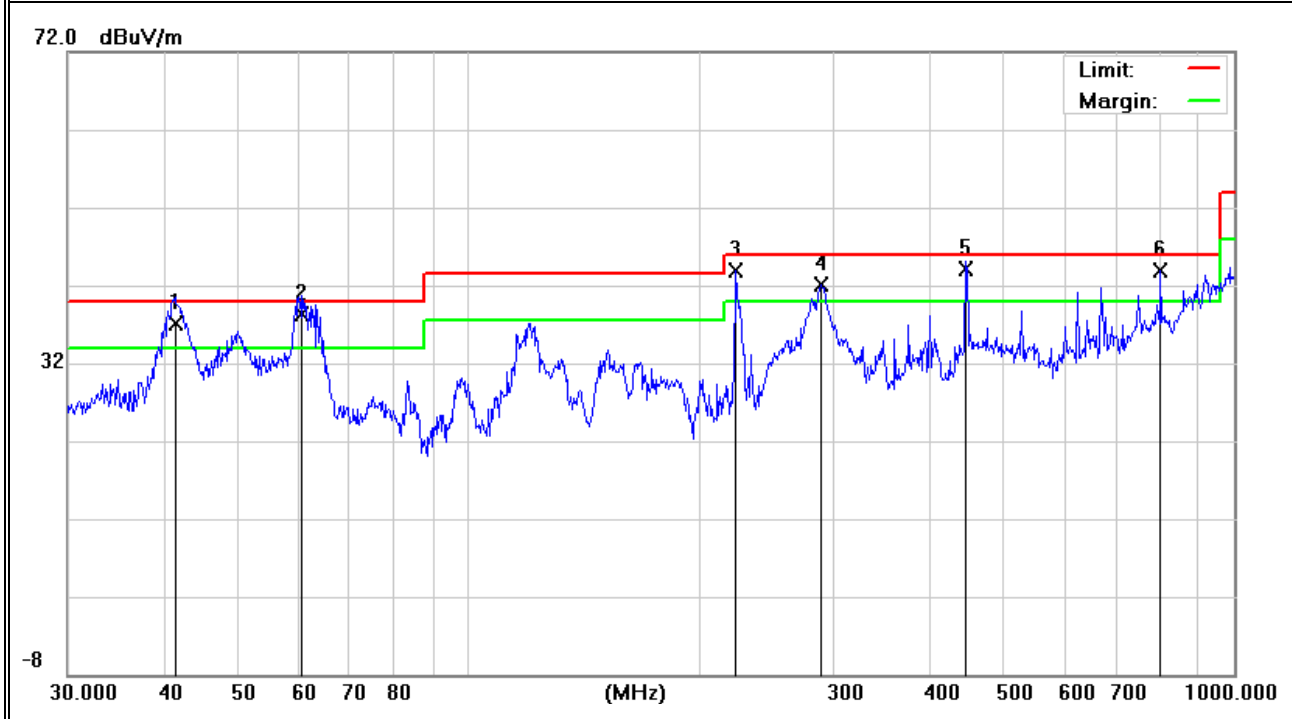

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	222.9499	31.97	10.91	42.88	46.00	-3.12	QP
H	289.002	28.72	14.32	43.04	46.00	-2.96	QP
H	375.9384	23.62	16.97	40.59	46.00	-5.41	QP
H	475.499	20.57	19.31	39.88	46.00	-6.12	QP
H	782.3451	19.52	24.95	44.47	46.00	-1.53	QP
H	952.0937	15.88	28.40	44.28	46.00	-1.72	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

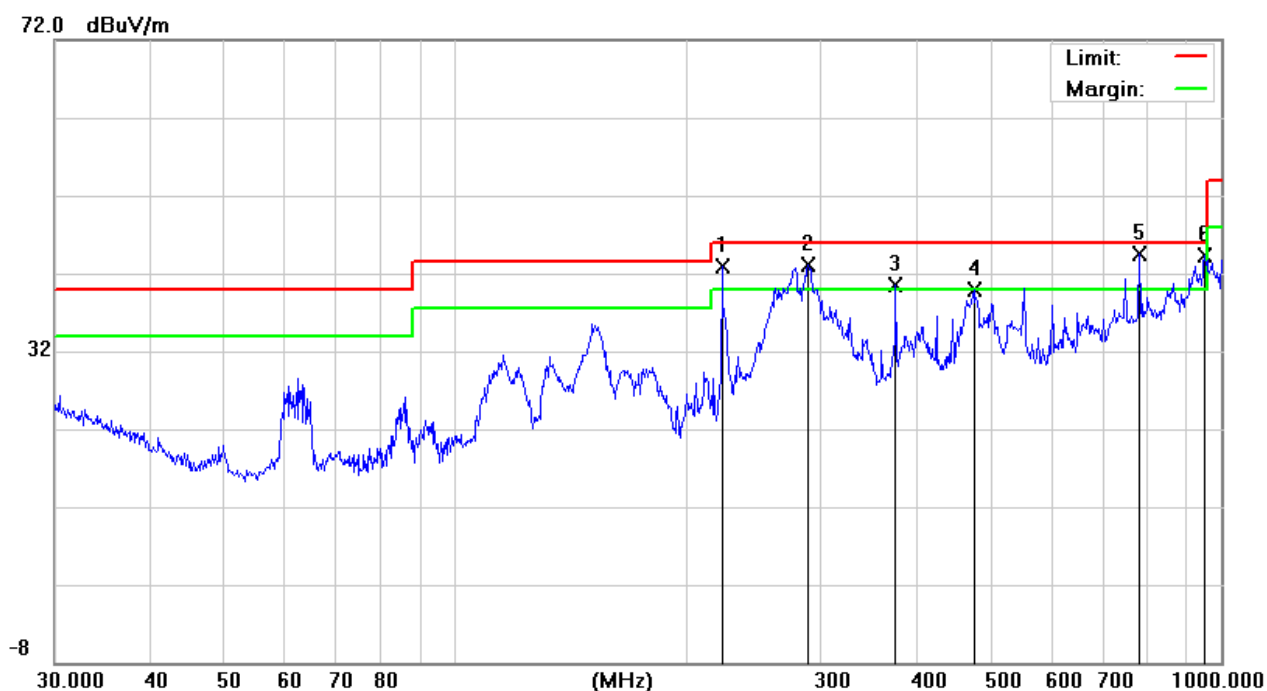

### 2.2.8 TEST RESULTS (1GHz-18GHz)

EUT :	Puductor	Model Name. :	PT1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.2G) - 802.11n20_5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	3015.854	63.43	5.94	35.40	44.00	60.77	68.20	-7.43	Pk
Vertical	10360	60.06	8.46	39.75	44.50	63.77	68.20	-4.43	Pk
Vertical	10360	44.59	8.46	39.75	44.50	48.30	54.00	-5.70	AV
Vertical	15540	58.63	10.12	38.80	44.10	63.45	74.00	-10.55	Pk
Vertical	15540	40.85	10.12	38.80	42.70	47.07	54.00	-6.93	AV
Horizontal	2981.857	63.59	5.94	35.18	44.00	60.71	68.20	-7.49	Pk
Horizontal	10360	59.32	8.46	38.71	44.50	61.99	68.20	-6.21	Pk
Horizontal	10360	40.63	8.46	38.71	44.50	43.30	54.00	-10.70	AV
Horizontal	15540	56.98	10.12	38.38	44.10	61.38	74.00	-12.62	Pk
Horizontal	15540	41.82	10.12	38.38	44.10	46.22	54.00	-7.78	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	3561.325	64.02	6.48	36.35	44.05	62.80	68.20	-5.40	Pk
Vertical	10400	61.28	8.47	37.88	44.51	63.12	68.20	-5.08	Pk
Vertical	15600	58.55	10.12	38.80	44.10	63.37	74.00	-10.63	Pk
Vertical	15600	39.49	10.12	38.80	42.70	45.71	54.00	-8.29	AV
Horizontal	3362.854	64.34	6.48	36.37	44.05	63.14	68.20	-5.06	Pk
Horizontal	10400	59.60	8.47	38.64	44.50	62.21	68.20	-5.99	Pk
Horizontal	15600	59.00	10.12	38.38	44.10	63.40	74.00	-10.60	Pk
Horizontal	15600	44.45	10.12	38.38	44.10	48.85	54.00	-5.15	AV
High Channel (5240 MHz)-Above 1G									
Vertical	3926.547	61.55	7.10	37.24	43.50	62.39	68.20	-5.81	Pk
Vertical	10480	62.01	8.46	37.68	44.50	63.65	68.20	-4.55	Pk
Vertical	15720	58.16	10.12	38.80	44.10	62.98	74.00	-11.02	Pk
Vertical	15720	39.08	10.12	38.80	42.70	45.30	54.00	-8.70	AV
Horizontal	3884.696	62.10	7.10	37.24	43.50	62.94	68.20	-5.26	Pk
Horizontal	10480	59.30	8.46	38.57	44.50	61.83	68.20	-6.37	Pk
Horizontal	15720	58.03	10.12	38.38	44.10	62.43	74.00	-11.57	Pk
Horizontal	15720	40.64	10.12	38.38	44.10	45.04	54.00	-8.96	AV

Note:"802.11n20(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Puductor	Model Name. :	PT1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.3G) - 802.11a_5260~5320MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5260 MHz)-Above 1G									
Vertical	4633.25	60.97	5.44	35.40	44.00	57.82	74.00	-16.18	Pk
Vertical	4633.25	42.45	5.74	35.40	44.00	39.59	54.00	-14.41	AV
Vertical	10520.12	58.40	8.26	39.75	44.50	61.91	68.20	-6.29	Pk
Vertical	15780.34	59.73	10.12	38.80	44.10	64.55	74.00	-9.45	Pk
Vertical	15780.34	38.60	9.62	38.80	42.70	44.32	54.00	-9.68	AV
Horizontal	4366.15	63.12	5.57	35.18	44.00	59.86	74.00	-14.14	Pk
Horizontal	4366.15	42.38	5.74	35.18	44.00	39.30	54.00	-14.70	AV
Horizontal	10520.26	58.19	8.38	38.71	44.50	60.78	68.20	-7.42	Pk
Horizontal	15780.34	56.34	9.88	38.38	44.10	60.50	74.00	-13.50	Pk
Horizontal	15780.34	39.34	9.94	38.38	44.10	43.56	54.00	-10.44	AV
middle Channel (5280 MHz)-Above 1G									
Vertical	4122.34	57.78	6.08	36.35	44.05	56.16	74.00	-17.84	Pk
Vertical	4122.34	41.41	6.39	36.35	44.05	40.10	54.00	-13.90	AV
Vertical	10560.19	58.52	8.28	37.88	44.51	60.17	68.20	-8.03	Pk
Vertical	15840.36	60.25	9.79	38.8	44.10	64.73	74.00	-9.27	Pk
Vertical	15840.36	38.40	9.70	38.8	42.70	44.20	54.00	-9.80	AV
Horizontal	3869.48	57.52	6.11	36.37	44.05	55.95	74.00	-18.05	Pk
Horizontal	3869.48	44.83	6.27	36.37	44.05	43.42	54.00	-10.58	AV
Horizontal	10560.74	61.00	8.33	38.64	44.50	63.47	68.20	-4.73	Pk
Horizontal	15840.37	59.02	9.99	38.38	44.10	63.29	74.00	-10.71	Pk
Horizontal	15840.37	39.64	9.81	38.38	44.10	43.73	54.00	-10.27	AV
High Channel (5320 MHz)-Above 1G									
Vertical	5366.52	61.20	6.96	37.24	43.50	61.90	74.00	-12.10	Pk
Vertical	5366.52	42.20	7.07	37.24	43.50	43.00	54.00	-11.00	AV
Vertical	10640.58	60.59	8.14	37.68	44.50	61.91	74.00	-12.09	Pk
Vertical	10640.58	40.31	8.35	37.68	44.50	41.84	54.00	-12.16	AV
Vertical	15960.41	59.39	10.11	38.8	44.10	64.19	74.00	-9.81	Pk
Vertical	15960.41	37.67	9.64	38.8	42.70	43.42	54.00	-10.58	AV
Horizontal	5436.59	60.17	7.05	37.24	43.50	60.96	74.00	-13.04	Pk
Horizontal	5436.59	40.44	7.05	37.24	43.50	41.23	54.00	-12.77	AV
Horizontal	10640.24	59.37	8.20	38.57	44.50	61.64	74.00	-12.36	Pk
Horizontal	10640.24	42.12	8.03	38.57	44.50	44.22	54.00	-9.78	AV
Horizontal	15960.88	59.09	9.81	38.38	44.10	63.19	74.00	-10.81	Pk
Horizontal	15960.88	42.12	9.96	38.38	44.10	46.36	54.00	-7.64	AV

Note: ANT 1 802.11a(5G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Puductor	Model Name. :	PT1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX(5.6G) - 802.11n20_5500~5700MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5500 MHz)-Above 1G									
Vertical	5481.33	61.94	5.61	35.40	44.00	58.95	68.20	-9.2	Pk
Vertical	12831.02	57.71	8.24	39.75	44.50	61.20	68.20	-7.0	Pk
Vertical	16500.41	48.70	10.05	38.80	44.10	53.45	68.20	-14.8	Pk
Horizontal	5481.35	58.23	5.78	35.18	44.00	55.19	68.20	-13.0	Pk
Horizontal	12831.12	55.91	8.22	38.71	44.50	58.34	68.20	-9.9	Pk
Horizontal	16500.47	59.54	10.04	38.38	44.10	63.86	68.20	-4.3	Pk
middle Channel (5600 MHz)-Above 1G									
Vertical	5169.44	60.37	6.29	36.35	44.05	58.95	68.20	-9.25	Pk
Vertical	13311.45	57.58	8.24	37.88	44.51	59.20	68.20	-9.00	Pk
Vertical	16800.45	57.61	9.71	38.8	44.10	62.02	68.20	-6.18	Pk
Horizontal	5169.85	58.16	6.44	36.37	44.05	56.92	68.20	-11.28	Pk
Horizontal	13311.29	58.55	8.31	38.64	44.50	61.00	68.20	-7.20	Pk
Horizontal	16800.33	59.87	10.09	38.38	44.10	64.24	68.20	-3.96	Pk
High Channel (5700 MHz)-Above 1G									
Vertical	5647.33	59.70	6.79	37.24	43.50	60.23	68.20	-7.97	Pk
Vertical	12825.11	58.95	8.10	37.68	44.50	60.23	68.20	-7.97	Pk
Vertical	17100.54	59.76	9.70	38.8	44.10	64.17	68.20	-4.03	Pk
Horizontal	5647.39	58.56	6.74	37.24	43.50	59.04	68.20	-9.16	Pk
Horizontal	12825.23	58.05	8.25	38.57	44.50	60.37	68.20	-7.83	Pk
Horizontal	17100.58	57.15	9.70	38.38	44.10	61.13	68.20	-7.07	Pk

Note:"802.11n20(5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



EUT :	Puductor	Model Name. :	PT1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX (5.8G) -- 802.11n20_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	5122.51	61.72	5.94	35.40	44.00	59.06	68.20	-9.14	Pk
Vertical	13351.42	58.05	8.46	39.75	44.50	61.76	68.20	-6.44	Pk
Vertical	17235.65	50.03	10.12	38.80	44.10	54.85	68.20	-13.35	Pk
Horizontal	5122.48	57.53	5.94	35.18	44.00	54.65	68.20	-13.55	Pk
Horizontal	13351.54	56.98	8.46	38.71	44.50	59.65	68.20	-8.55	Pk
Horizontal	17235.47	59.51	10.12	38.38	44.10	63.91	68.20	-4.29	Pk
middle Channel (5785 MHz)-Above 1G									
Vertical	5233.40	60.64	6.48	36.35	44.05	59.42	68.20	-8.78	Pk
Vertical	12874.21	58.50	8.47	37.88	44.51	60.34	68.20	-7.86	Pk
Vertical	17355.84	59.39	10.12	38.8	44.10	64.21	68.20	-3.99	Pk
Horizontal	5233.48	57.95	6.48	36.37	44.05	56.75	68.20	-11.45	Pk
Horizontal	12874.36	60.69	8.47	38.64	44.50	63.30	68.20	-4.90	Pk
Horizontal	17355.49	60.50	10.12	38.38	44.10	64.90	68.20	-3.30	Pk
High Channel (5825 MHz)-Above 1G									
Vertical	5244.48	60.90	7.10	37.24	43.50	61.74	68.20	-6.46	Pk
Vertical	12935.58	60.61	8.46	37.68	44.50	62.25	68.20	-5.95	Pk
Vertical	17473.74	59.47	10.12	38.8	44.10	64.29	68.20	-3.91	Pk
Horizontal	5244.36	59.13	7.10	37.24	43.50	59.97	68.20	-8.23	Pk
Horizontal	12935.74	59.18	8.46	38.57	44.50	61.71	68.20	-6.49	Pk
Horizontal	17474.68	57.09	10.12	38.38	44.10	61.49	68.20	-6.71	Pk

Note:"802.11n20(5G)" mode is the worst mode.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 2.2.9 Spurious Emission in Bandedge Test Results

All the modulation modes have been tested, The report just record the worst data mode.

Frequency (MHz)	Meter Reading (dBμV)	Cable Loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
5.2G WIFI-802.11n20 MIMO Mode									
4500.00	56.15	5.20	35.60	44.20	52.75	74	-21.25	Pk	Horizontal
4500.00	38.86	5.20	35.60	44.20	35.46	54	-18.54	AV	Horizontal
4500.00	54.73	5.20	35.60	44.20	51.33	74	-22.67	Pk	Vertical
4500.00	39.76	5.20	35.60	44.20	36.36	54	-17.64	AV	Vertical
5150.00	69.56	5.36	35.66	44.22	66.36	74	-7.64	Pk	Horizontal
5150.00	51.79	5.36	35.66	44.22	48.59	54	-5.41	AV	Horizontal
5150.00	66.19	5.36	35.66	44.22	62.99	74	-11.01	Pk	Vertical
5150.00	49.57	5.36	35.66	44.22	46.37	54	-7.63	AV	Vertical
5.3G WIFI-802.11n20 MIMO Mode									
5350.00	71.57	5.68	35.68	44.22	68.71	74	-5.29	Pk	Vertical
5350.00	53.45	5.68	35.68	44.22	50.59	54	-3.41	AV	Vertical
5350.00	70.42	5.68	35.68	44.22	67.56	74	-6.44	Pk	Horizontal
5350.00	52.89	5.68	35.68	44.22	50.03	54	-3.97	AV	Horizontal
5.6G WIFI-802.11n20 MIMO Mode									
5460.00	62.61	5.71	35.70	44.28	59.74	74	-14.26	Pk	Vertical
5460.00	46.24	5.71	35.70	44.28	43.37	54	-10.63	AV	Vertical
5460.00	56.90	5.71	35.70	44.28	54.03	74	-19.97	Pk	Horizontal
5460.00	41.43	5.71	35.70	44.28	38.56	54	-15.44	AV	Horizontal

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11n20 MIMO" mode is the worst mode. When PK value is lower than the Average value limit, average don't record.


**2.2.10 TEST RESULTS (18GHz-40GHz)**

EUT :	Puductor	Model Name. :	PT1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz; TX (5.3G)-802.11a 5260MHz~5320MHz; TX (5.6G)-802.11a 5500MHz~5700MHz; TX (5.8G)-802.11a 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5180 MHz)-Above 1G

Horizontal

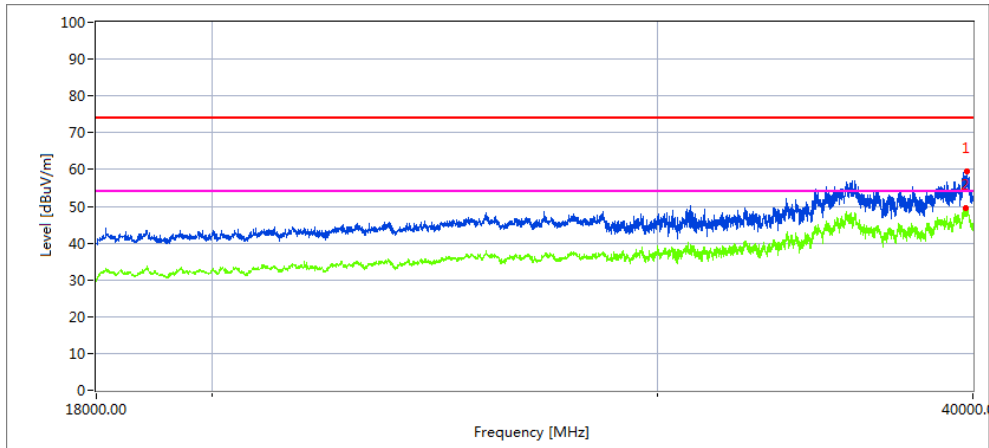

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39678.155	34.65	20.09	44.07	43.48	55.33	68.2	-12.87	Peak


Vertical

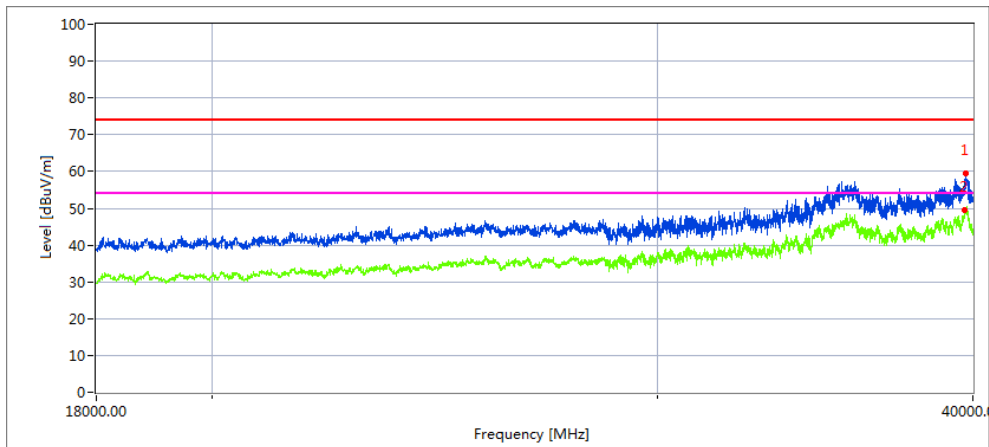

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39744.551	35.39	20.09	44.1	43.22	56.36	68.2	-11.84	Peak


### High Channel (5240 MHz)-Above 1G

Horizontal

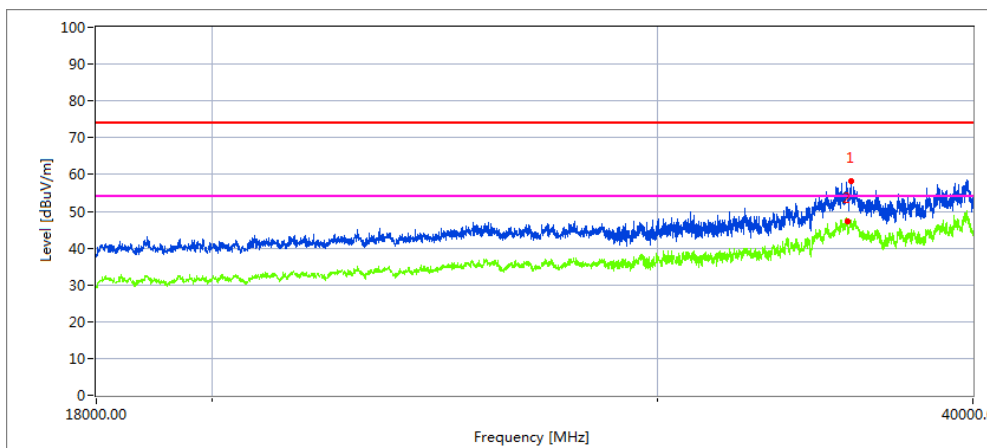

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39772.155	35.48	20.09	44.1	43.22	56.45	68.2	-12.75	Peak

Vertical

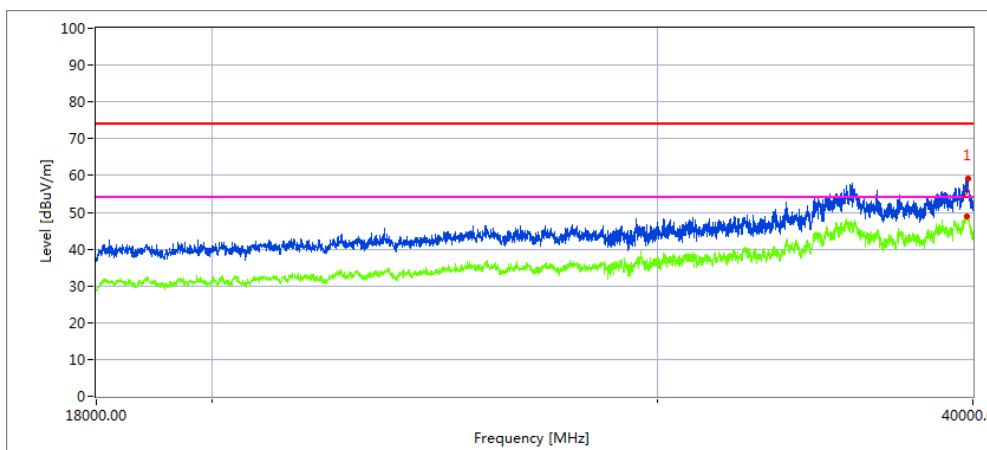


Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39773.15	34.18	20.09	44.1	43.22	55.15	68.2	-13.05	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5260 MHz)-Above 1G

Horizontal

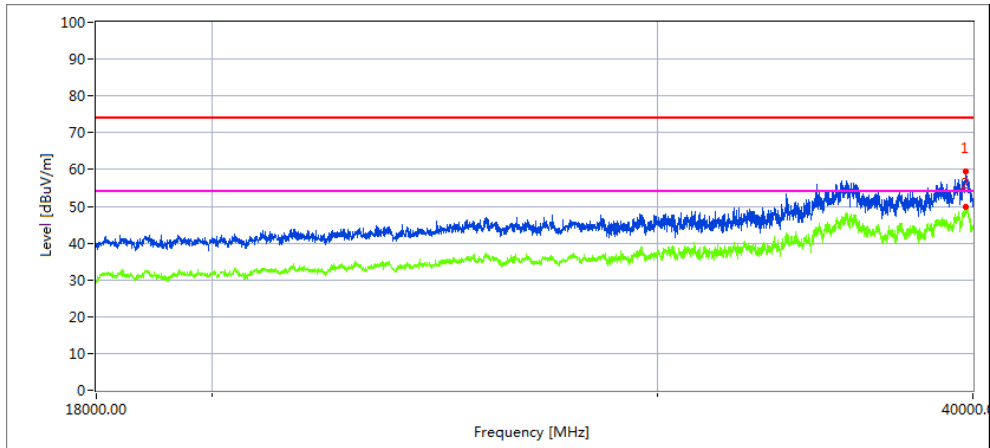

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39790.74	36.53	20.09	44.1	43.22	57.5	68.2	-10.7	Peak


Vertical

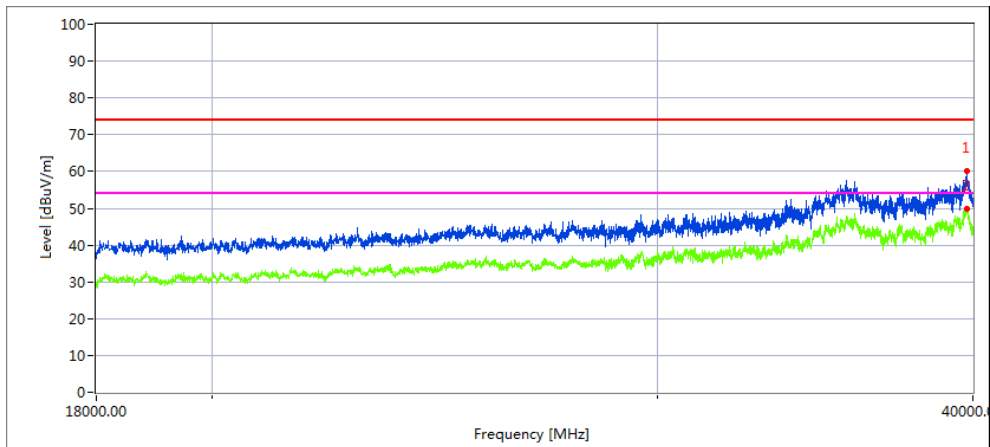

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39478.22	30.58	20.09	44.07	43.48	51.26	74	-16.94	Peak


### High Channel (5320 MHz)-Above 1G

Horizontal

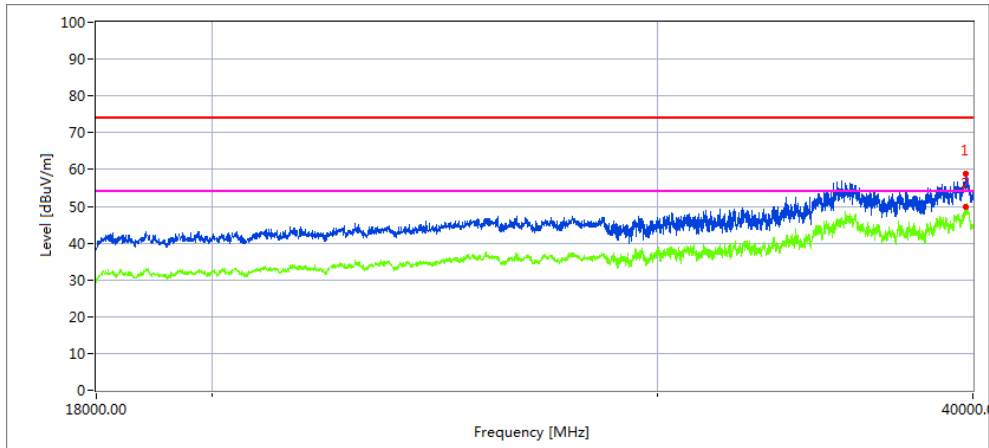

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39665.15	36.05	20.09	44.1	43.22	57.02	68.2	-11.18	Peak

Vertical

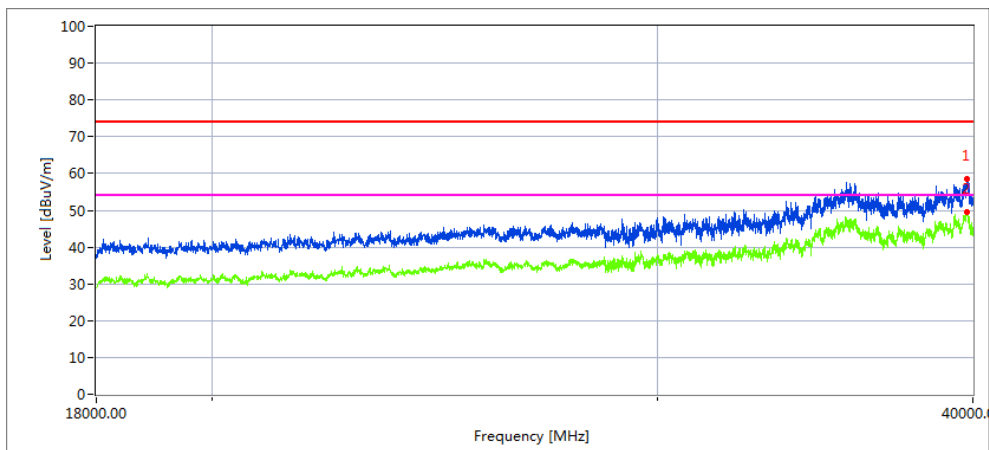


Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39718.932	36.53	20.09	44.1	43.22	57.5	68.2	-10.7	Peak

Note:802.11n20 MIMO mode is the worst mode.


Low Channel (5500 MHz)-Above 1G

Horizontal

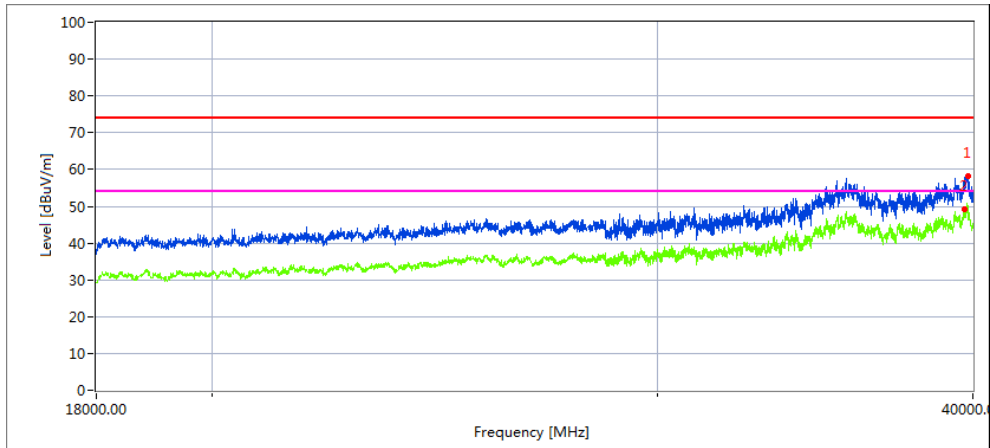

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39665.854	35.34	20.09	44.07	43.48	56.02	68.2	-12.18	Peak


Vertical

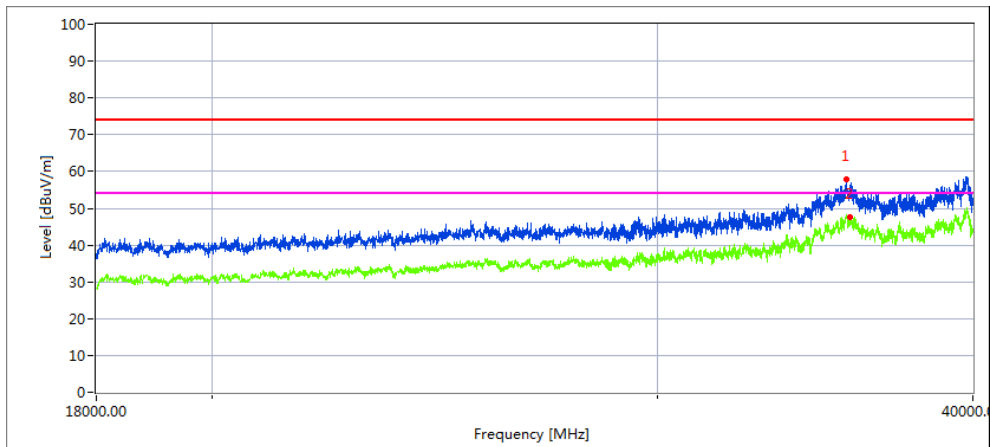

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39698.447	36.28	20.09	44.1	43.22	57.25	68.2	-10.95	Peak


### High Channel (5700 MHz)-Above 1G

Horizontal

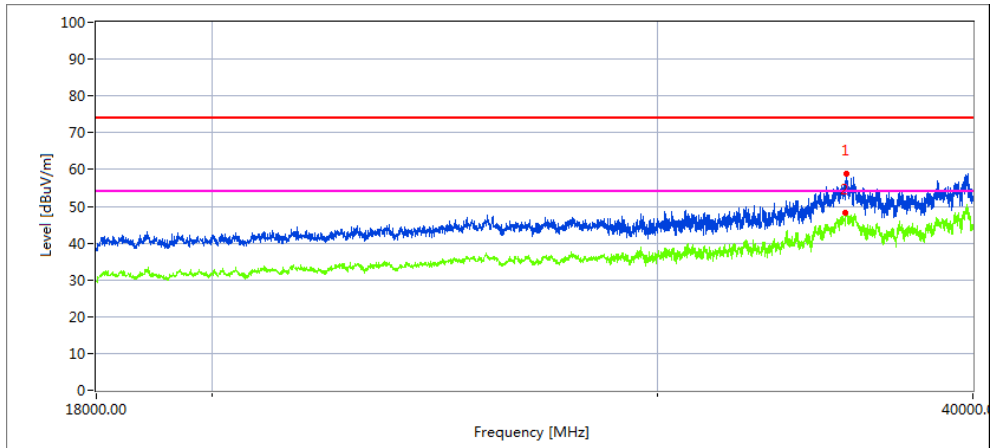

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39758.155	34.18	20.09	44.1	43.22	55.15	68.2	-13.05	Peak

Vertical

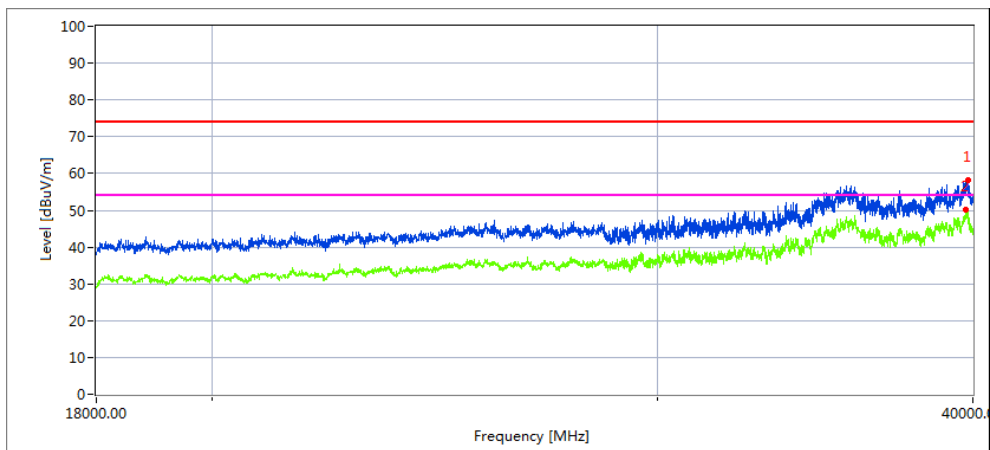


Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39771.25	35.39	20.09	44.1	43.22	56.36	68.2	-11.64	Peak

Note: 802.11n20 MIMO mode is the worst mode.




Low Channel (5745 MHz)-Above 1G

Horizontal

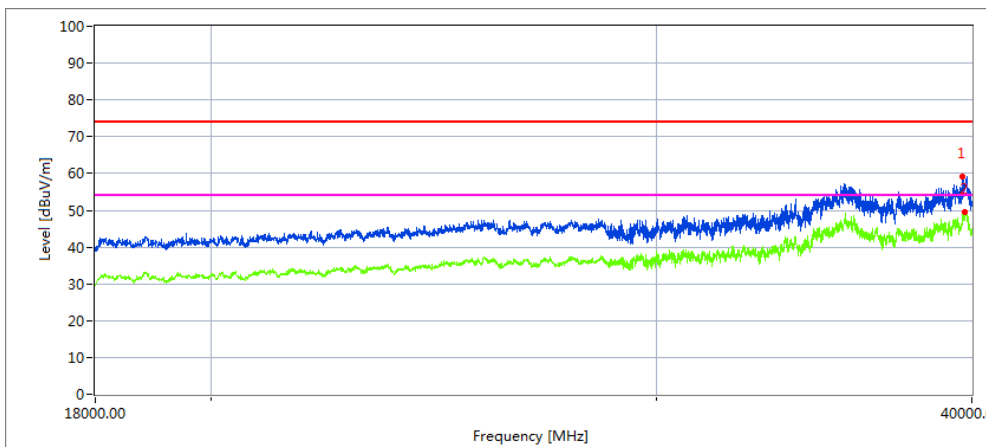

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39788.45	35.48	20.09	44.1	43.22	56.45	68.2	-11.75	Peak


Vertical

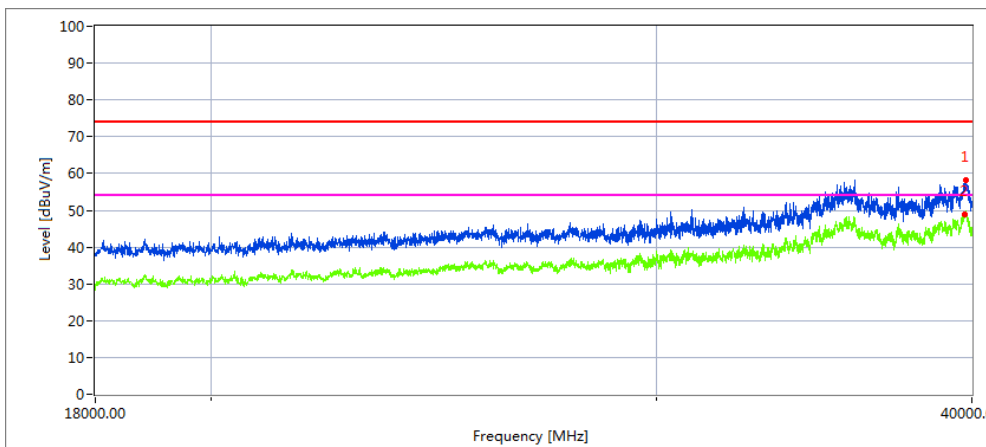

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39485.12	31.68	20.09	44.07	43.48	52.36	68.2	-15.84	Peak


### High Channel (5825 MHz)-Above 1G

Horizontal

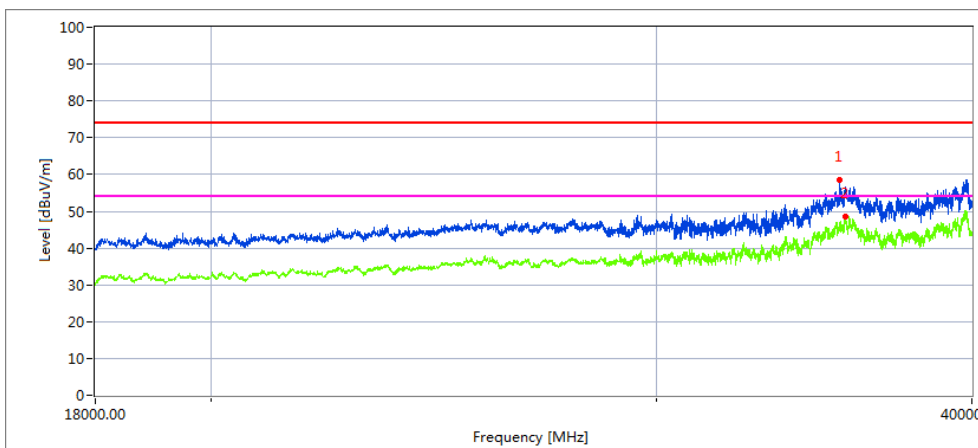

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39698.12	35.91	20.09	44.1	43.22	56.88	68.2	-11.32	Peak

Vertical

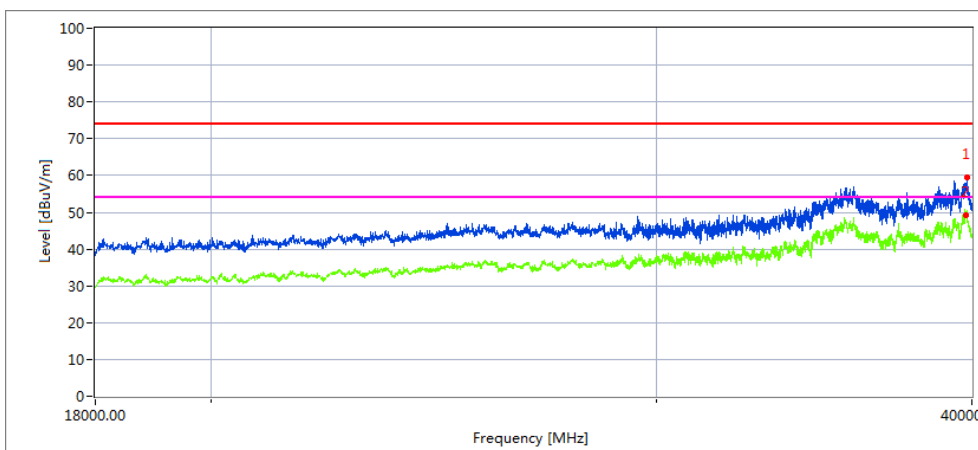

Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark
39774.15	33.18	20.09	44.1	43.22	54.15	68.2	-14.05	Peak

Note:802.11n20 MIMO mode is the worst mode.

### 3. POWER SPECTRAL DENSITY TEST

#### 3.1 APPLIED PROCEDURES / LIMIT

##### According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**3.2 TEST PROCEDURE**

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

**3.3 DEVIATION FROM STANDARD**

No deviation.

**3.4 TEST SETUP**



**3.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.6 TEST RESULTS**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz), Band 3 (5745-5825MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode.Direction gain=5.5dbi  
 5.5dbi<6.0dbi so power density limit don't need to change  
 Band3 For 802.11n/ac 5GHz has MIMO mode.Direction gain=5.5dbi  
 5.5dbi<6.0dbi so power density limit don't need to change

Test data reference attachment.

**4. 26DB & 99% EMISSION BANDWIDTH**

**4.1 APPLIED PROCEDURES / LIMIT**


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

**4.2 TEST PROCEDURE**

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW ≥ 3 · RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

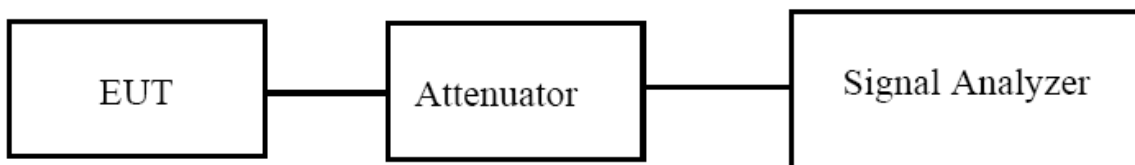

**4.3 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.4 TEST RESULTS**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz), Band 3(5725-5850MHz)		

Test data reference attachment.

**5. MINIMUM 6 DB BANDWIDTH**

**5.1 APPLIED PROCEDURES / LIMIT**

**According to FCC §15.407(e)**

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

**5.2 TEST PROCEDURE**


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**5.3 DEVIATION FROM STANDARD**

No deviation.

**5.4 TEST SETUP**

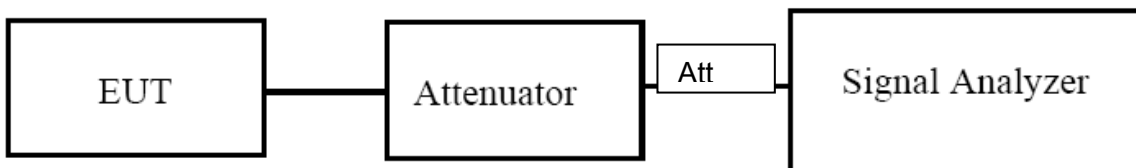

**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



**5.6 TEST RESULTS**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX (5G) Mode Frequency Band 3 (5725-5850MHz)		

Test data reference attachment.

**6. MAXIMUM CONDUCTED OUTPUT POWER**

**6.1 PPLIED PROCEDURES / LIMIT**

**According to FCC §15.407**

The maximum conduced output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5250~5350	250 mW or 11 dBm + 10 log B
5470~5725	250 mW or 11 dBm + 10 log B
5725~5850	1W

Note: The limit is the smaller of the two, B represents -26dB bandwidth.

**6.2 TEST PROCEDURE**


· Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
  - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
  - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
  - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle {e.g.,  $[10 \log (1 / 0.25)]$ , if the duty cycle is 25%}.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

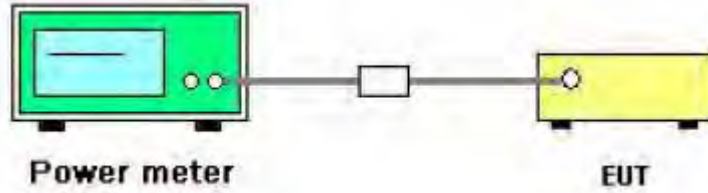

### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2 TEST RESULTS**

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz) Band 2C, (5470-5725MHz), Band 3 (5725-5850MHz)		

Note: Band1&Band2A&Band2C For 802.11n/ac 5GHz has MIMO mode. Directional gain=5.5dbi  
 5.5dbi<6.0dbi so power limit don't need to change  
 Band3 For 802.11n/ac 5GHz has MIMO mode. Directional gain=5.5dbi  
 5.5dbi<6.0dbi so power limit don't need to change

Test data reference attachment.

## 7. OUT OF BAND EMISSIONS

### 7.1 APPLICABLE STANDARD

#### According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.


### 7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

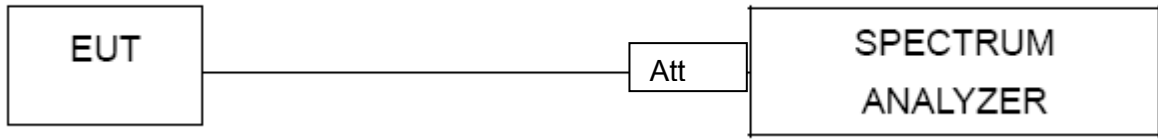

**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 TEST RESULTS

EUT :	Puductor	Model Name :	PT1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V

Test data reference attachment.

## 8. Frequency Stability Measurement


### 8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 8.2 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
6. Extreme temperature is  $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$ .

### 8.3 TEST SETUP LAYOUT

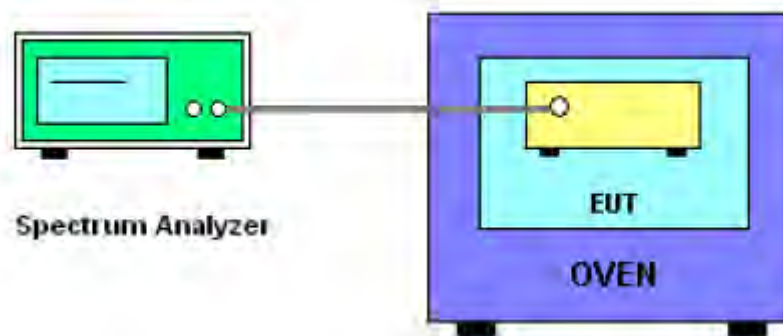

### 8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.



**8.5 TEST RESULTS**

EUT :	Puductor	Model Name. :	PT1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

**Voltage vs. Frequency Stability**

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5180.0231	5180	0.0231	-4.4595
		V max (V)	28.98	5180.0149	5180	0.0149	-2.8764
		V min (V)	21.42	5180.0120	5180	0.0120	-2.3166
Limits				Within 5150-5250MHz			
Result				Complies			

**Temperature vs. Frequency Stability**

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5180.0119	5180	0.0119	-2.2973
		T (°C)	-10	5180.0123	5180	0.0123	-2.3745
		T (°C)	0	5180.0261	5180	0.0261	-5.0386
		T (°C)	10	5180.0144	5180	0.0144	-2.7799
		T (°C)	20	5180.0128	5180	0.0128	-2.4710
		T (°C)	30	5180.0142	5180	0.0142	-2.7413
		T (°C)	40	5180.0125	5180	0.0125	-2.4131
		T (°C)	50	5180.0151	5180	0.0151	-2.9151
		T (°C)	60	5180.0169	5180	0.0169	-3.2625
		T (°C)	70	5180.0125	5180	0.0125	-2.4131
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5200.0165	5200	0.0165	-3.1731
		V max (V)	28.98	5200.0123	5200	0.0123	-2.3654
		V min (V)	21.42	5200.0141	5200	0.0141	-2.7115
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5200.0320	5200	0.0320	-6.1538
		T (°C)	-10	5200.0132	5200	0.0132	-2.5385
		T (°C)	0	5200.0320	5200	0.0320	-6.1538
		T (°C)	10	5200.0215	5200	0.0215	-4.1346
		T (°C)	20	5200.0143	5200	0.0143	-2.7500
		T (°C)	30	5200.0130	5200	0.0130	-2.5000
		T (°C)	40	5200.0189	5200	0.0189	-3.6346
		T (°C)	50	5200.0181	5200	0.0181	-3.4808
		T (°C)	60	5200.0138	5200	0.0138	-2.6538
T (°C)	70	5200.0131	5200	0.0131	-2.5192		
Limits				Within 5150-5250MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5240.0125	5240	0.0125	-2.3855
		V max (V)	28.98	5240.0182	5240	0.0182	-3.4733
		V min (V)	21.42	5240.0165	5240	0.0165	-3.1489
Limits				Within 5150-5250MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5240.0122	5240	0.0122	-2.3282
		T (°C)	-10	5240.0164	5240	0.0164	-3.1298
		T (°C)	0	5240.0162	5240	0.0162	-3.0916
		T (°C)	10	5240.0237	5240	0.0237	-4.5229
		T (°C)	20	5240.0133	5240	0.0133	-2.5382
		T (°C)	30	5240.0155	5240	0.0155	-2.9580
		T (°C)	40	5240.0185	5240	0.0185	-3.5305
		T (°C)	50	5240.0173	5240	0.0173	-3.3015
		T (°C)	60	5240.0135	5240	0.0135	-2.5763
		T (°C)	70	5240.0119	5240	0.0119	-2.2710
Limits				Within 5150-5250MHz			
Result				Complies			

EUT :	Puductor	Model Name. :	PT1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency Band 2A (5250-5350MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5260.01601	5260	0.01601	-3.0437
		V max (V)	28.98	5260.01421	5260	0.01421	-2.7015
		V min (V)	21.42	5260.01961	5260	0.01961	-3.7281
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5260MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5260.00531	5260	0.00531	-1.0095
		T (°C)	-10	5260.02291	5260	0.02291	-4.3555
		T (°C)	0	5260.00661	5260	0.00661	-1.2567
		T (°C)	10	5260.01471	5260	0.01471	-2.7966
		T (°C)	20	5260.00601	5260	0.00601	-1.1426
		T (°C)	30	5260.00801	5260	0.00801	-1.5228
		T (°C)	40	5260.01451	5260	0.01451	-2.7586
		T (°C)	50	5260.00631	5260	0.00631	-1.1996
		T (°C)	60	5260.02261	5260	0.02261	-4.2985
		T (°C)	70	5260.02101	5260	0.02101	-3.9943
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5280.01221	5280	0.01221	-2.3125
		V max (V)	28.98	5280.01201	5280	0.01201	-2.2746
		V min (V)	21.42	5280.01321	5280	0.01321	-2.5019
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5280MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5280.01661	5280	0.01661	-3.1458
		T (°C)	-10	5280.01531	5280	0.01531	-2.8996
		T (°C)	0	5280.00911	5280	0.00911	-1.7254
		T (°C)	10	5280.01001	5280	0.01001	-1.8958
		T (°C)	20	5280.01011	5280	0.01011	-1.9148
		T (°C)	30	5280.00811	5280	0.00811	-1.5360
		T (°C)	40	5280.01661	5280	0.01661	-3.1458
		T (°C)	50	5280.01071	5280	0.01071	-2.0284
		T (°C)	60	5280.01251	5280	0.01251	-2.3693
		T (°C)	70	5280.00711	5280	0.00711	-1.3466
Limits				Within 5250-5350MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5320.02361	5320	0.02361	-4.4380
		V max (V)	28.98	5320.01881	5320	0.01881	-3.5357
		V min (V)	21.42	5320.01651	5320	0.01651	-3.1034
Limits				Within 5250-5350MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5320MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5320.01181	5320	0.01181	-2.2199
		T (°C)	-10	5320.01041	5320	0.01041	-1.9568
		T (°C)	0	5320.01281	5320	0.01281	-2.4079
		T (°C)	10	5320.00601	5320	0.00601	-1.1297
		T (°C)	20	5320.00561	5320	0.00561	-1.0545
		T (°C)	30	5320.01151	5320	0.01151	-2.1635
		T (°C)	40	5320.02351	5320	0.02351	-4.4192
		T (°C)	50	5320.01491	5320	0.01491	-2.8026
		T (°C)	60	5320.00791	5320	0.00791	-1.4868
		T (°C)	70	5320.02161	5320	0.02161	-4.0620
Limits				Within 5250-5350MHz			
Result				Complies			

EUT :	Puductor	Model Name. :	PT1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency Band 2C (5470-5725MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5500.00439	5500	0.00439	-0.7982
		V max (V)	28.98	5500.00276	5500	0.00276	-0.5018
		V min (V)	21.42	5500.00045	5500	0.00045	-0.0818
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5500MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5500.00468	5500	0.00468	-0.8509
		T (°C)	-10	5500.01159	5500	0.01159	-2.1073
		T (°C)	0	5500.00519	5500	0.00519	-0.9436
		T (°C)	10	5500.00532	5500	0.00532	-0.9673
		T (°C)	20	5500.00757	5500	0.00757	-1.3764
		T (°C)	30	5500.00459	5500	0.00459	-0.8345
		T (°C)	40	5500.00396	5500	0.00396	-0.7200
		T (°C)	50	5500.00187	5500	0.00187	-0.3400
		T (°C)	60	5500.00456	5500	0.00456	-0.8291
		T (°C)	70	5500.00727	5500	0.00727	-1.3218
Limits				Within 5470-5725MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5600.00586	5600	0.00586	-1.0464
		V max (V)	28.98	5600.00765	5600	0.00765	-1.3661
		V min (V)	21.42	5600.00702	5600	0.00702	-1.2536
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5600MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5600.00867	5600	0.00867	-1.5482
		T (°C)	-10	5600.00244	5600	0.00244	-0.4357
		T (°C)	0	5600.00225	5600	0.00225	-0.4018
		T (°C)	10	5600.00694	5600	0.00694	-1.2393
		T (°C)	20	5600.00946	5600	0.00946	-1.6893
		T (°C)	30	5600.00313	5600	0.00313	-0.5589
		T (°C)	40	5600.00626	5600	0.00626	-1.1179
		T (°C)	50	5600.00643	5600	0.00643	-1.1482
		T (°C)	60	5600.01007	5600	0.01007	-1.7982
		T (°C)	70	5600.00442	5600	0.00442	-0.7893
Limits				Within 5470-5725MHz			
Result				Complies			



Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5700.00589	5700	0.00589	-1.0333
		V max (V)	28.98	5700.00756	5700	0.00756	-1.3263
		V min (V)	21.42	5700.00938	5700	0.00938	-1.6456
Limits				Within 5470-5725MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5700MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5700.01078	5700	0.01078	-1.8912
		T (°C)	-10	5700.00574	5700	0.00574	-1.0070
		T (°C)	0	5700.00459	5700	0.00459	-0.8053
		T (°C)	10	5700.00343	5700	0.00343	-0.6018
		T (°C)	20	5700.00940	5700	0.00940	-1.6491
		T (°C)	30	5700.01103	5700	0.01103	-1.9351
		T (°C)	40	5700.00727	5700	0.00727	-1.2754
		T (°C)	50	5700.00309	5700	0.00309	-0.5421
		T (°C)	60	5700.00534	5700	0.00534	-0.9368
		T (°C)	70	5700.00529	5700	0.00529	-0.9281
Limits				Within 5470-5725MHz			
Result				Complies			

EUT :	Puductor	Model Name. :	PT1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 25.2V
Test Mode :	TX Frequency(5745-5850MHz)		

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5745.01826	5745	0.01826	-3.1776
		V max (V)	28.98	5745.01264	5745	0.01264	-2.2010
		V min (V)	21.42	5745.01963	5745	0.01963	-3.4164
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5745.01845	5745	0.01845	-3.2109
		T (°C)	-10	5745.01680	5745	0.01680	-2.9251
		T (°C)	0	5745.01035	5745	0.01035	-1.8011
		T (°C)	10	5745.01202	5745	0.01202	-2.0920
		T (°C)	20	5745.00959	5745	0.00959	-1.6687
		T (°C)	30	5745.01084	5745	0.01084	-1.8866
		T (°C)	40	5745.01511	5745	0.01511	-2.6300
		T (°C)	50	5745.01475	5745	0.01475	-2.5671
		T (°C)	60	5745.01334	5745	0.01334	-2.3223
		T (°C)	70	5745.01120	5745	0.01120	-1.9493
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5785.01108	5785	0.01108	-1.9160
		V max (V)	28.98	5785.01572	5785	0.01572	-2.7180
		V min (V)	21.42	5785.01364	5785	0.01364	-2.3583
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5785.01171	5785	0.01171	-2.0249
		T (°C)	-10	5785.01388	5785	0.01388	-2.3998
		T (°C)	0	5785.01697	5785	0.01697	-2.9332
		T (°C)	10	5785.01006	5785	0.01006	-1.7391
		T (°C)	20	5785.01479	5785	0.01479	-2.5574
		T (°C)	30	5785.01145	5785	0.01145	-1.9800
		T (°C)	40	5785.00902	5785	0.00902	-1.5587
		T (°C)	50	5785.01322	5785	0.01322	-2.2852
		T (°C)	60	5785.01654	5785	0.01654	-2.8588
		T (°C)	70	5785.01632	5785	0.01632	-2.8217
Limits				Within 5745-5850MHz			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	25.20	5825.00958	5825	0.00958	-1.6454
		V max (V)	28.98	5825.01269	5825	0.01269	-2.1783
		V min (V)	21.42	5825.01825	5825	0.01825	-3.1333
Limits				Within 5745-5850MHz			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	25.2	T (°C)	-20	5825.01014	5825	0.01014	-1.7416
		T (°C)	-10	5825.01567	5825	0.01567	-2.6904
		T (°C)	0	5825.01198	5825	0.01198	-2.0575
		T (°C)	10	5825.00912	5825	0.00912	-1.5652
		T (°C)	20	5825.01001	5825	0.01001	-1.7192
		T (°C)	30	5825.01780	5825	0.01780	-3.0559
		T (°C)	40	5825.01601	5825	0.01601	-2.7489
		T (°C)	50	5825.01008	5825	0.01008	-1.7308
		T (°C)	60	5825.01743	5825	0.01743	-2.9922
		T (°C)	70	5825.01452	5825	0.01452	-2.4921
Limits				Within 5745-5850MHz			
Result				Complies			

Note: antenna 1 is the worst case.

## 9. DYNAMIC FREQUENCY SELECTION(DFS)

### 9.1 APPLICABILITY OF DFS REQUIREMENTS

EUT is client and operates as client without radar detection function.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes
Client Beacon Test	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

#### Note

Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

### 9.2 INTERFERENCE THRESHOLD VALUES, MASTER OR CLIENT INCORPORATING IN-SERVICE MONITORING

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note 3:</b> EIRP is based on the highest antenna gain.</p>	

**9.3 DFS RESPONSE REQUIREMENT VALUES**

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

**Note 1:** The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

**9.4 SHORT PULSE RADAR TEST WAVEFORMS**

As the EUT is a Client Device with no Radar Detection, only one type radar pulse is required for the testing. Radar Pulse type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	60%	30
1	1	Test A Test B	Roundup $\left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{PRI_{min}} \right)$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a  
 Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A


A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.  
 If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

**9.5 CALIBRATION SETUP AND DFS TEST RESULTS**

Radar Waveform Calibration Procedure

- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} - 3\text{dBi} + 1\text{dB} = -64\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset  $-1.0\text{dB}$  to compensate RF cable loss  $1.0\text{dB}$ .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} - 3\text{dBi} + 1\text{dB} = -64\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

**9.6 CONDUCTED CALIBRATION SETUP**

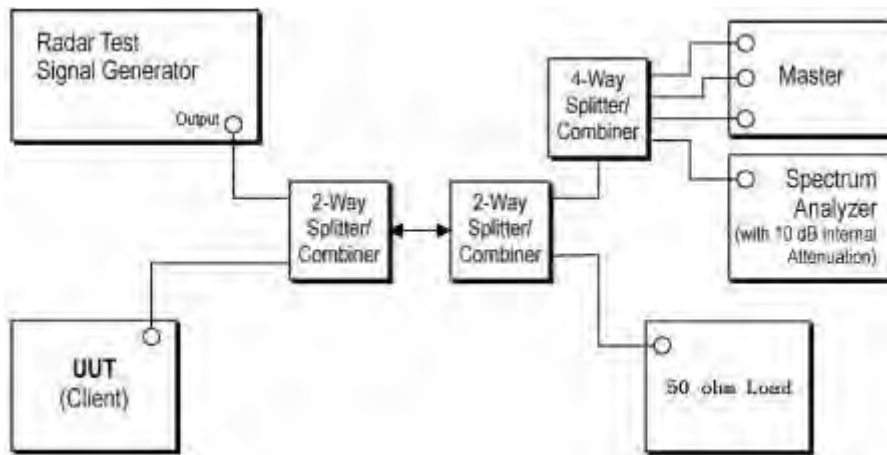

Wireless AP	Manufacturer	LINKSYS LLC
	Model NO.	WRT32X
	FCC ID	Q87-WRT3200ACM

### 9.7 RADAR WAVEFORM CALIBRATION RESULT


Test data reference attachment.



**9.8 IN-SERVICE MONITORING: CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD**

**TEST CONFIGURATION:**

Setup for Client with injection at the Master

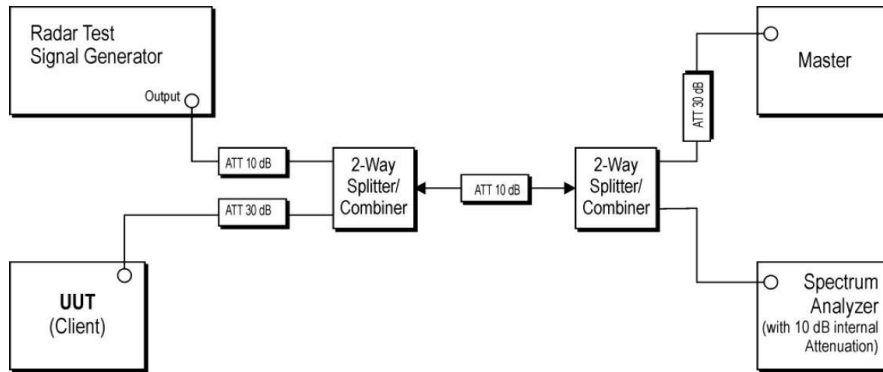

**TEST PROCEDURE:**

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is Streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom In 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

**TEST MODE:**

Please refer to the clause 2.2

**9.9 RESULT OF CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD FOR CLIENT BEACON TEST**

Test data reference attachment.


**10. ANTENNA REQUIREMENT**

**10.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**10.2 EUT ANTENNA**

This EUT has two modules, A module supports Bluetooth, WIFI2.4G / 5G, A module has two antennas, 1 antenna supports Bluetooth, WIFI2.4G / 5G, 2 antenna supports WIFI2.4G / 5G. The B module only supports WIFI 2.4G. The 3 module has only one antenna,

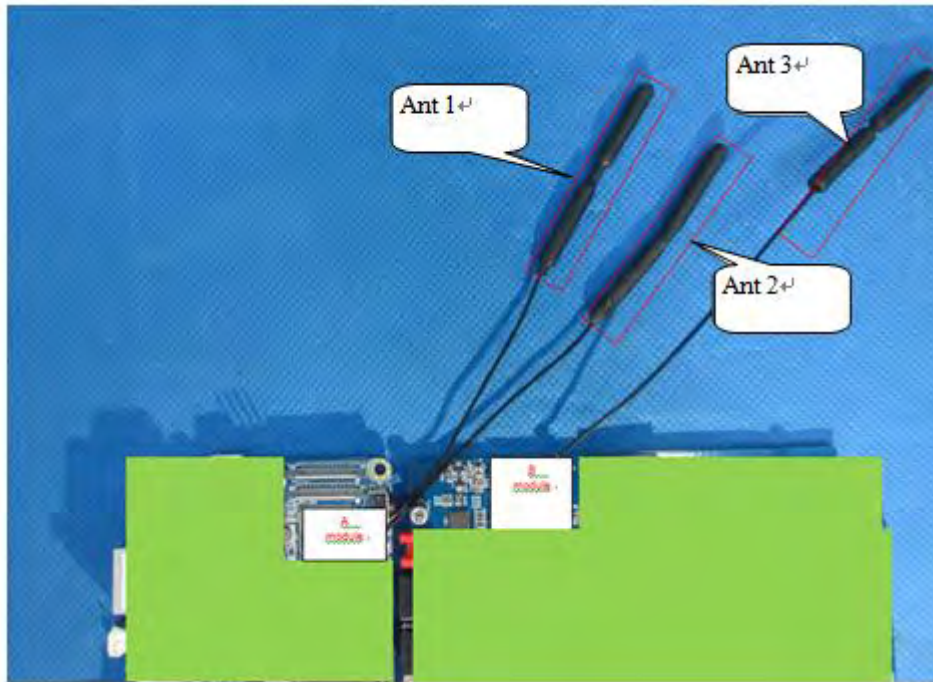

The module A for 5G WIFI has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1TX, 1RX
802.11n/ac	1TX/2TX, 1RX/2RX

For 5GHz mode, Antenna 1,2 are transmitting, each with the same directional gain.  
 For MIMO mode, Directional gain= $[10\log(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$  dBi =5.5dBi in 5GHz  
 the 802.11n(20/40) ac(20/40/80) 5GHz has MIMO mode.

Note: G1 means antenna gain for ANT 1 in dBi.  
 G2 means antenna gain for ANT 2 in dBi.  
 N<sub>ANT</sub> means the number of Antennas.  
 The antenna is permanently fixed, It complies with the standard requirement.


## 11. TEST RESULTS

### 11.1 DUTY CYCLE


5.2G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11n(HT20)	5180	100
Ant 1	NVNT	802.11n(HT20)	5200	100
Ant 1	NVNT	802.11n(HT20)	5240	100
Ant 2	NVNT	802.11n(HT20)	5180	100
Ant 2	NVNT	802.11n(HT20)	5200	100
Ant 2	NVNT	802.11n(HT20)	5240	100
Ant 1	NVNT	802.11a	5200	100
Ant 1	NVNT	802.11a	5240	100
Ant 2	NVNT	802.11a	5180	100
Ant 2	NVNT	802.11a	5200	100
Ant 2	NVNT	802.11a	5240	100
Ant 1	NVNT	802.11ac20	5180	100
Ant 1	NVNT	802.11ac20	5200	100
Ant 1	NVNT	802.11ac20	5240	100
Ant 2	NVNT	802.11ac20	5180	100
Ant 2	NVNT	802.11ac20	5200	100
Ant 2	NVNT	802.11ac20	5240	100
Ant 1	NVNT	802.11ac40	5190	100
Ant 1	NVNT	802.11ac40	5230	99.67
Ant 2	NVNT	802.11ac40	5190	100
Ant 2	NVNT	802.11ac40	5230	99.71
Ant 1	NVNT	802.11ac80	5210	100
Ant 2	NVNT	802.11ac80	5210	100
Ant 1	NVNT	802.11n(HT40)	5190	100
Ant 1	NVNT	802.11n(HT40)	5230	100
Ant 2	NVNT	802.11n(HT40)	5190	100
Ant 2	NVNT	802.11n(HT40)	5230	100


Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 1

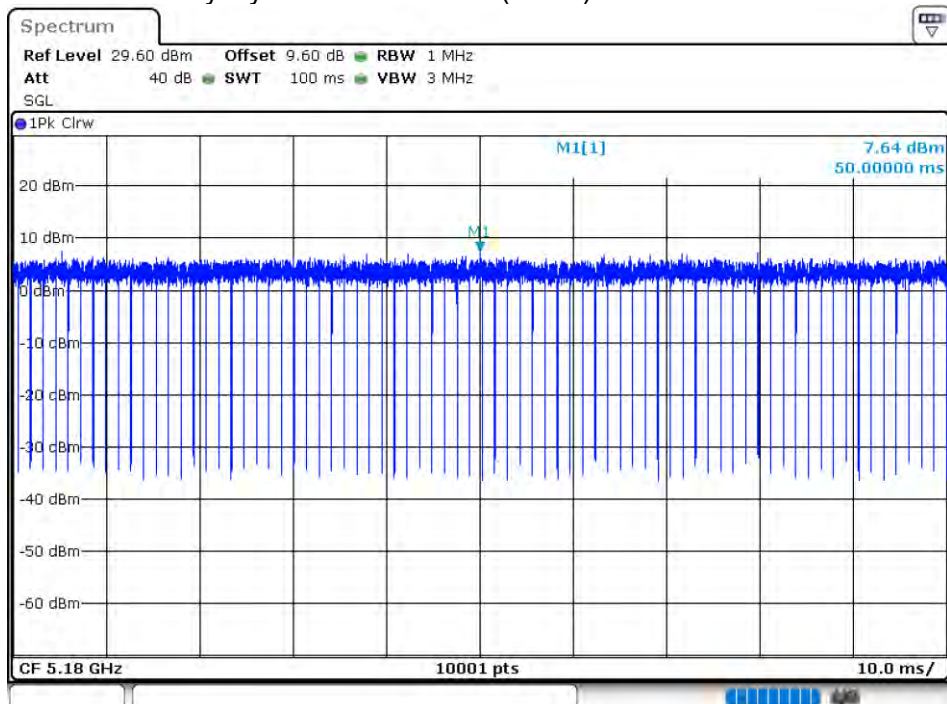


### Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 1

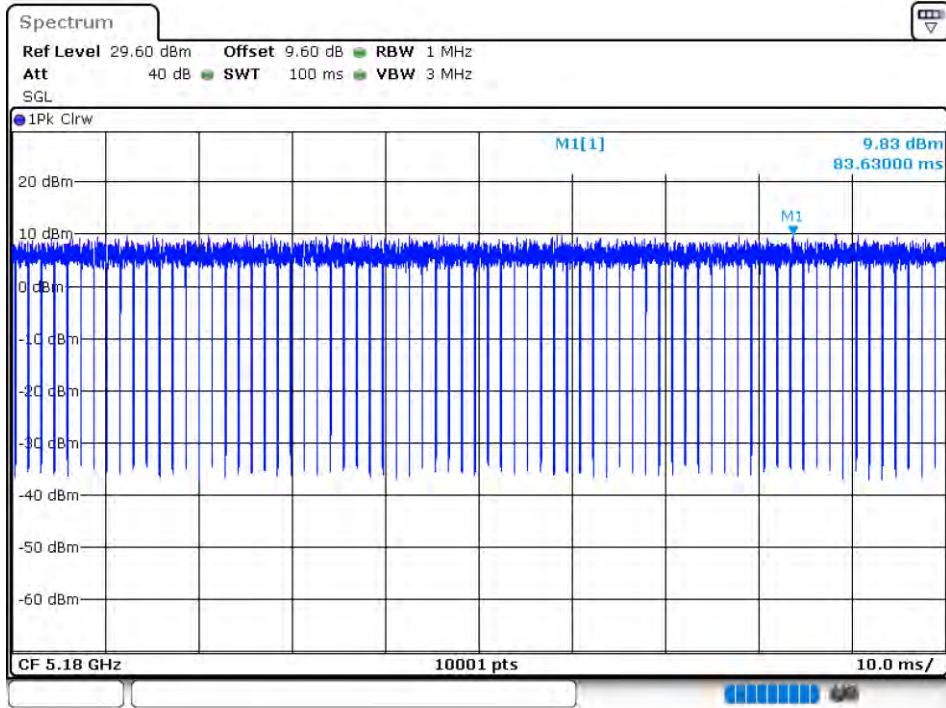


### Duty Cycle NVNT 802.11n(HT20) 5200MHz Ant 1

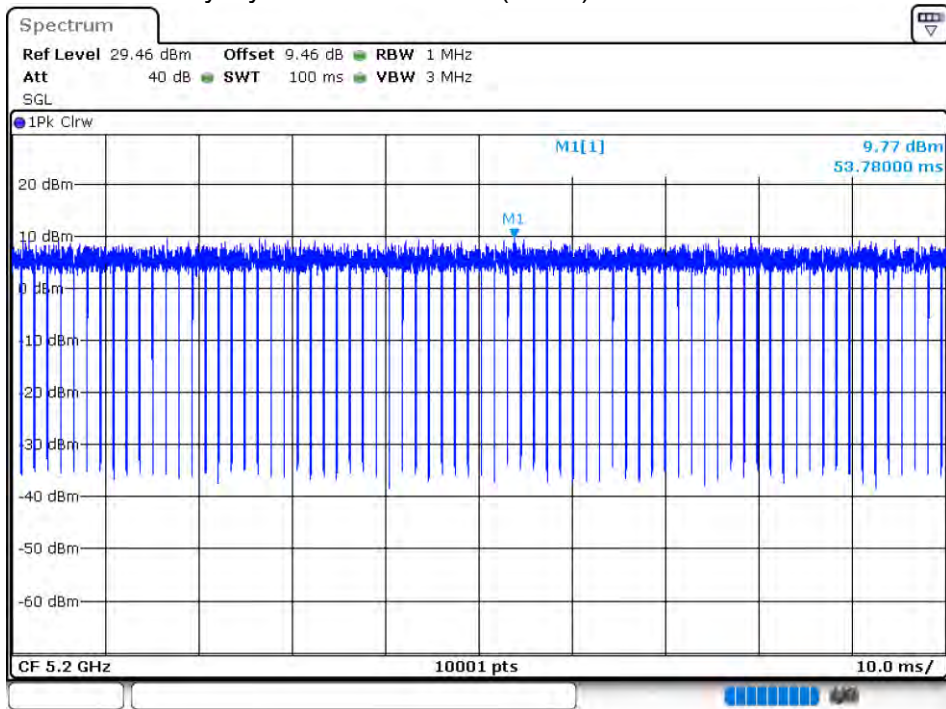


Duty Cycle NVNT 802.11n(HT20) 5240MHz Ant 1

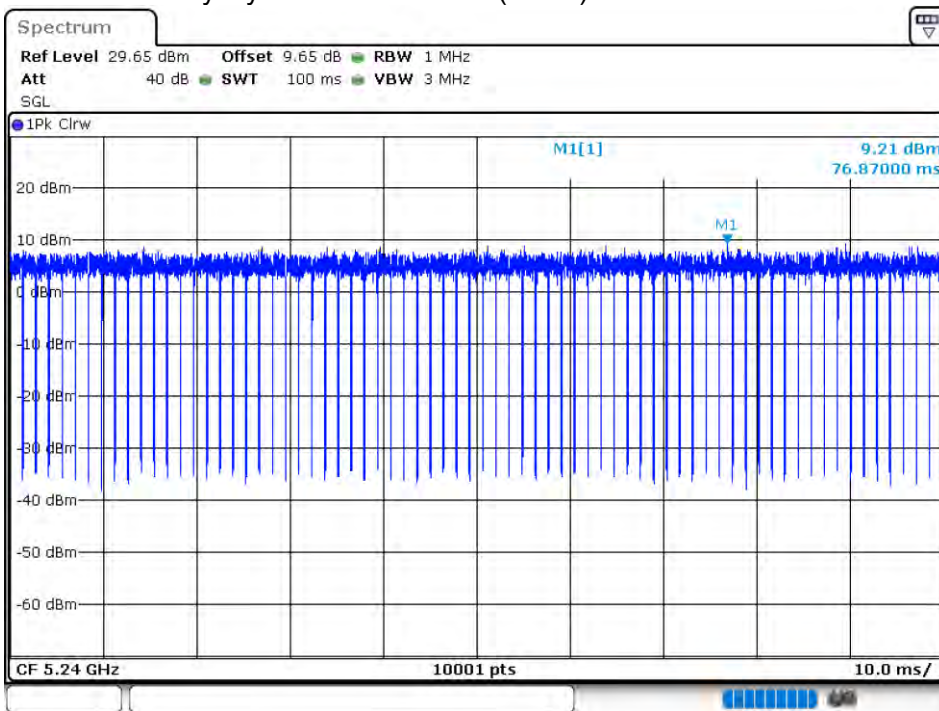


Duty Cycle NVNT 802.11n(HT20) 5180MHz Ant 2

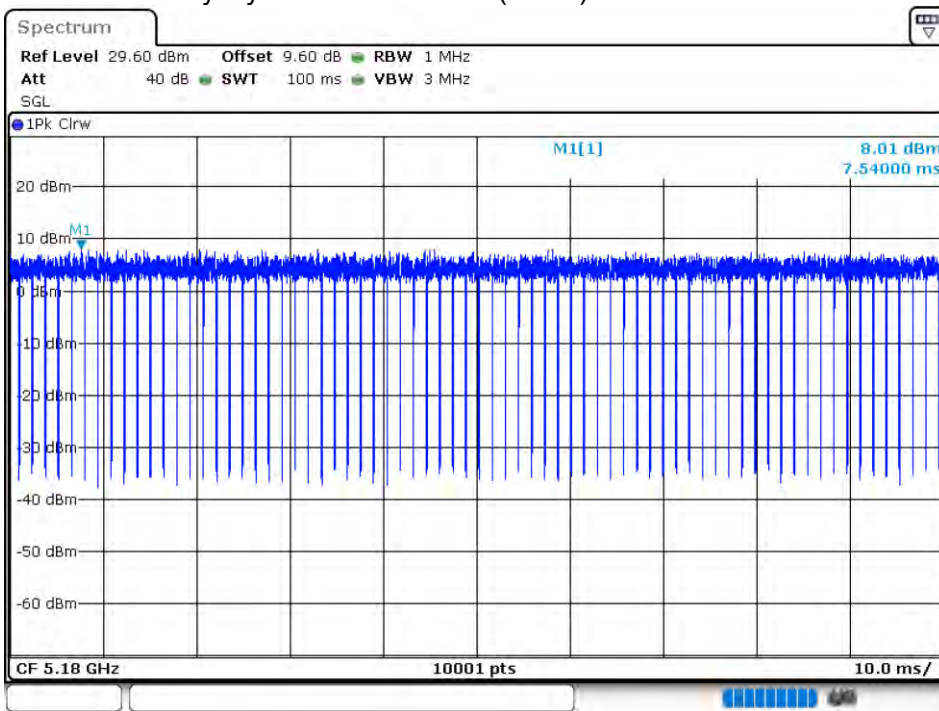


### Duty Cycle NVNT 802.11n(HT20) 5200MHz Ant 2

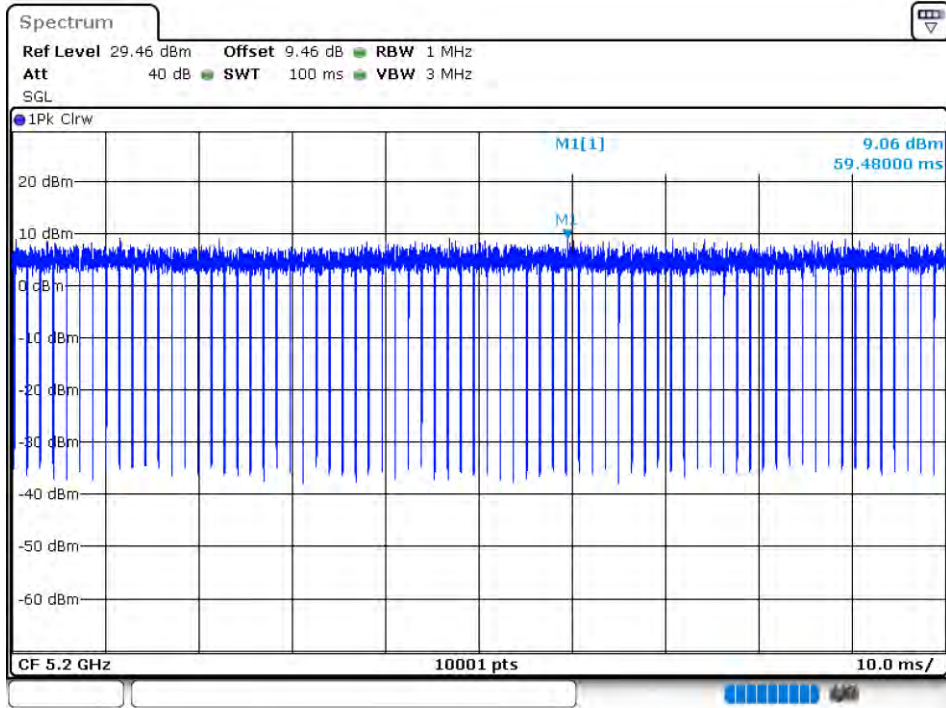


### Duty Cycle NVNT 802.11n(HT20) 5240MHz Ant 2

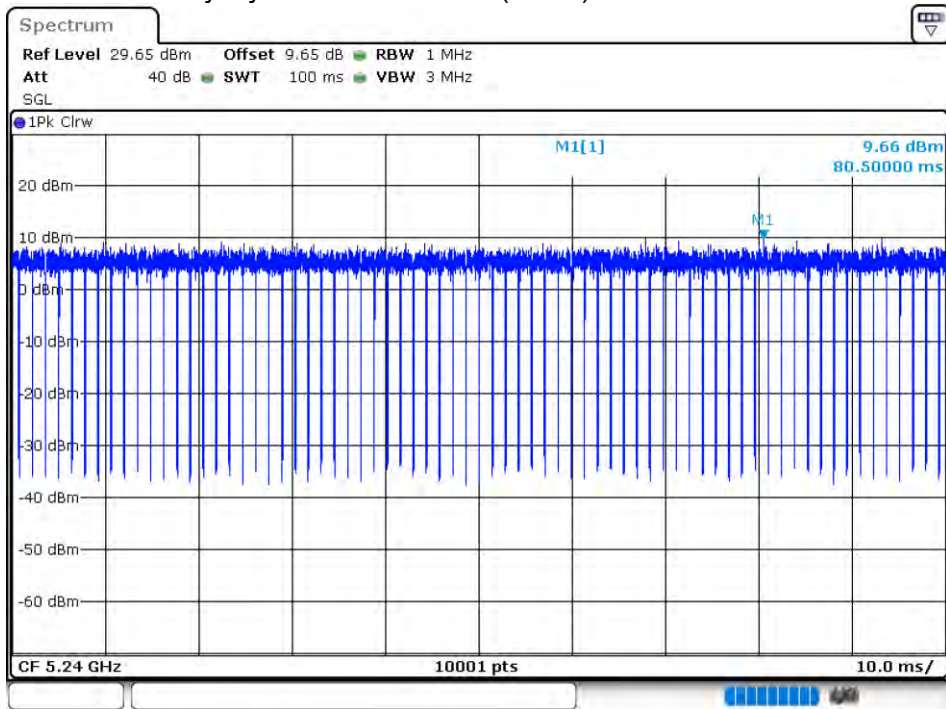

### Duty Cycle NVNT 802.11a 5200MHz Ant 1

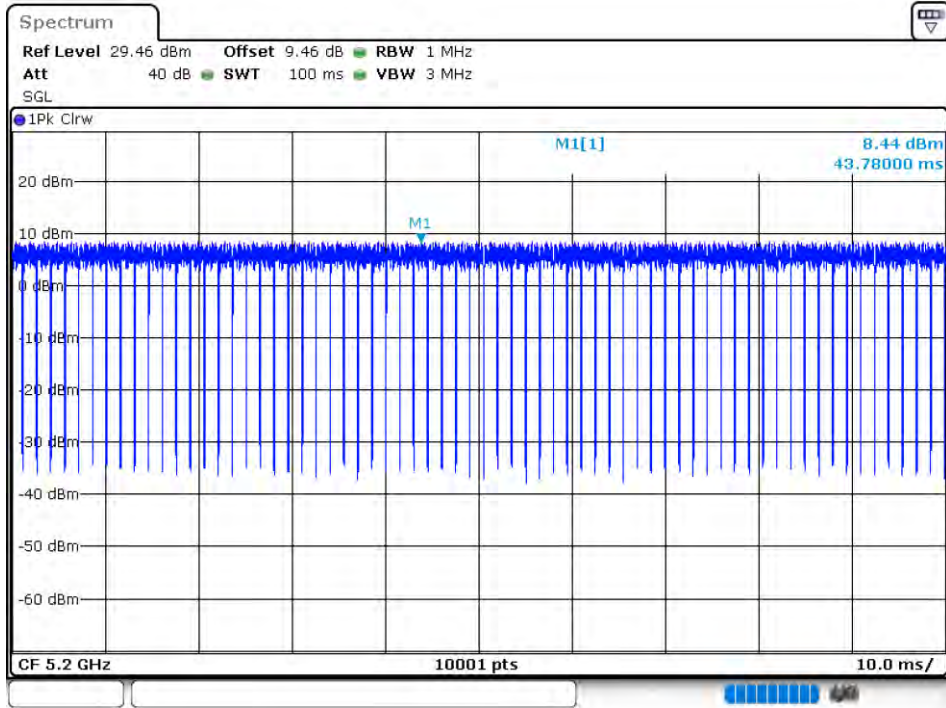


### Duty Cycle NVNT 802.11a 5240MHz Ant 1

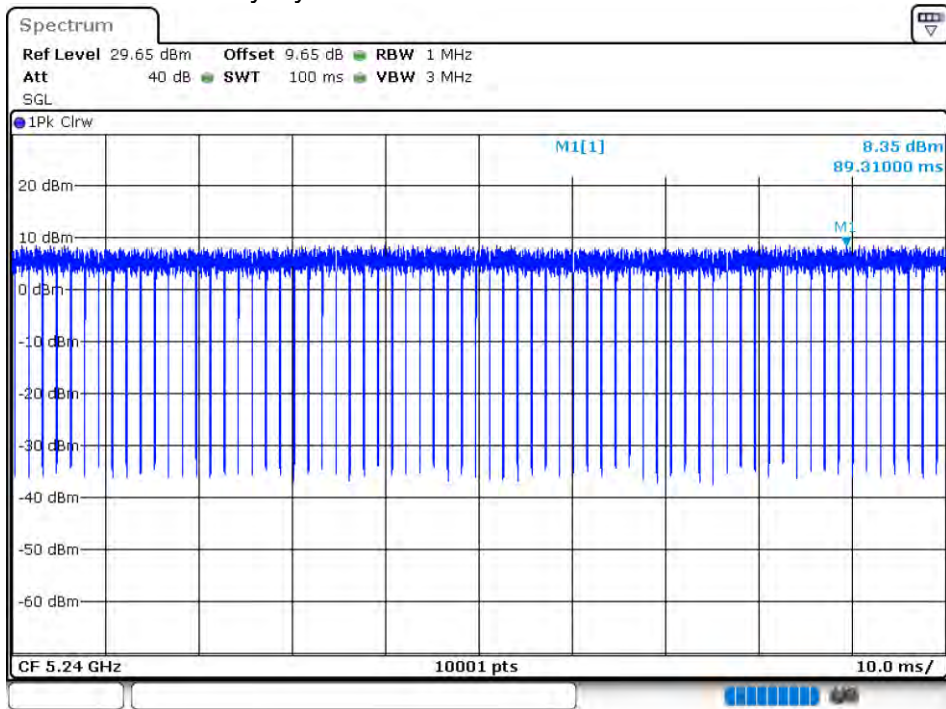





### Duty Cycle NVNT 802.11a 5180MHz Ant 2

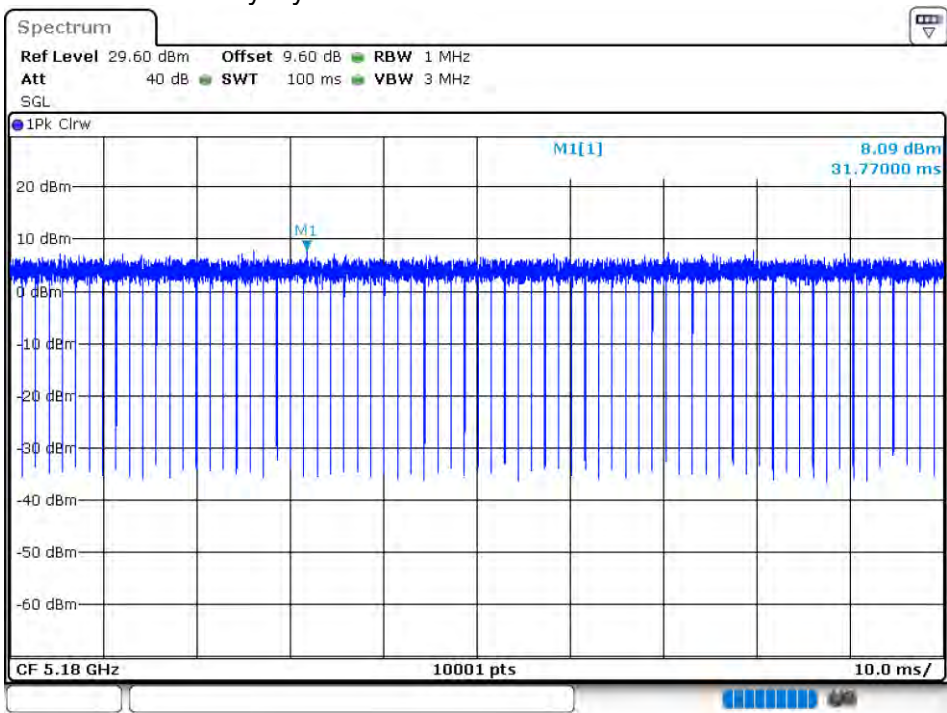


### Duty Cycle NVNT 802.11a 5200MHz Ant 2

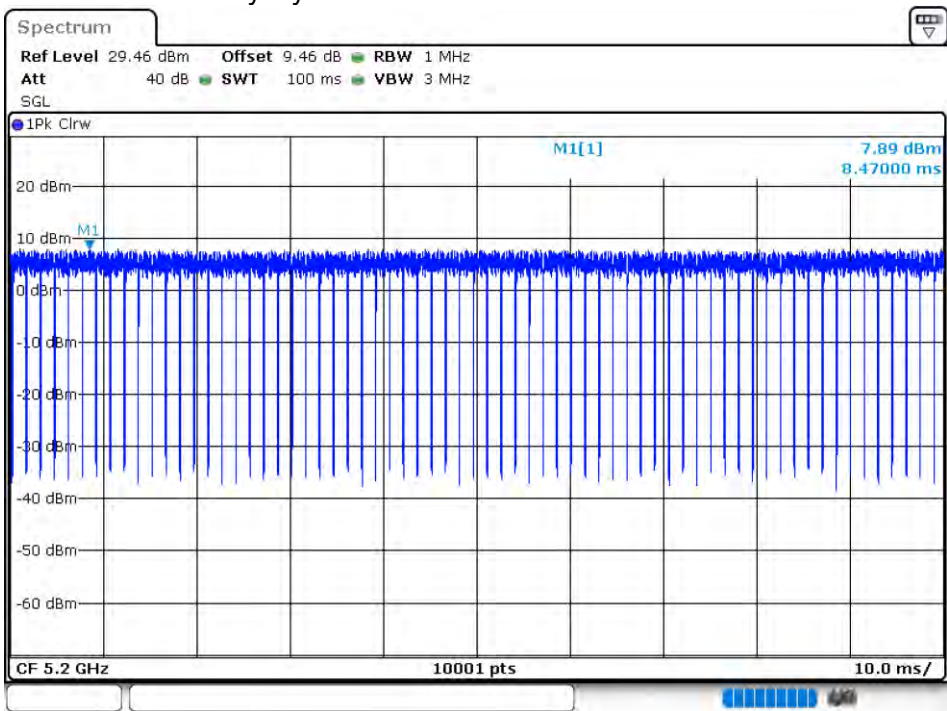


### Duty Cycle NVNT 802.11a 5240MHz Ant 2

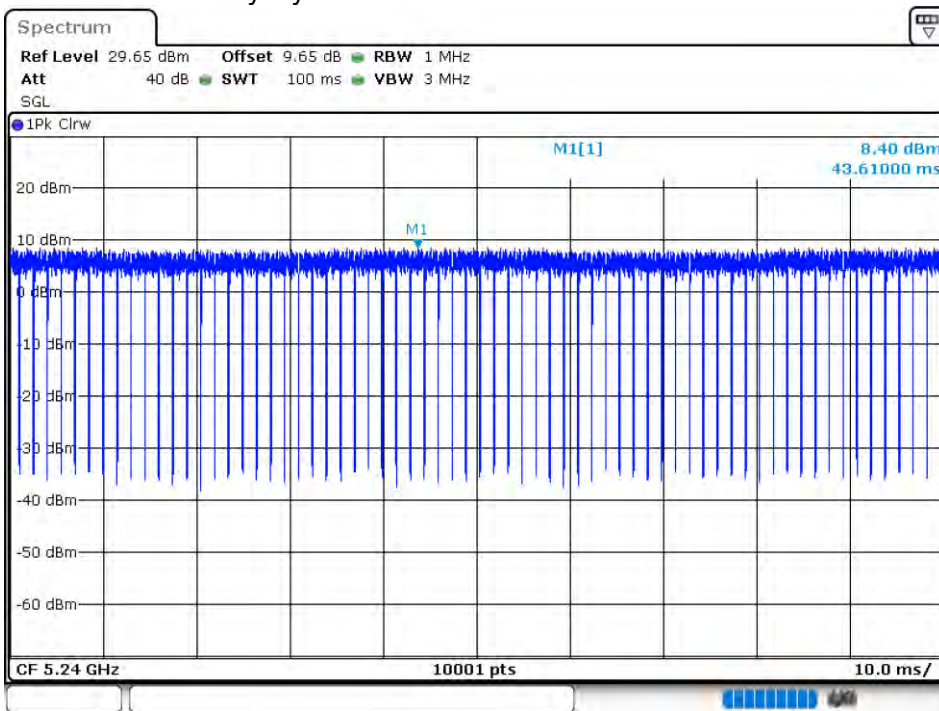


### Duty Cycle NVNT 802.11ac20 5180MHz Ant 1

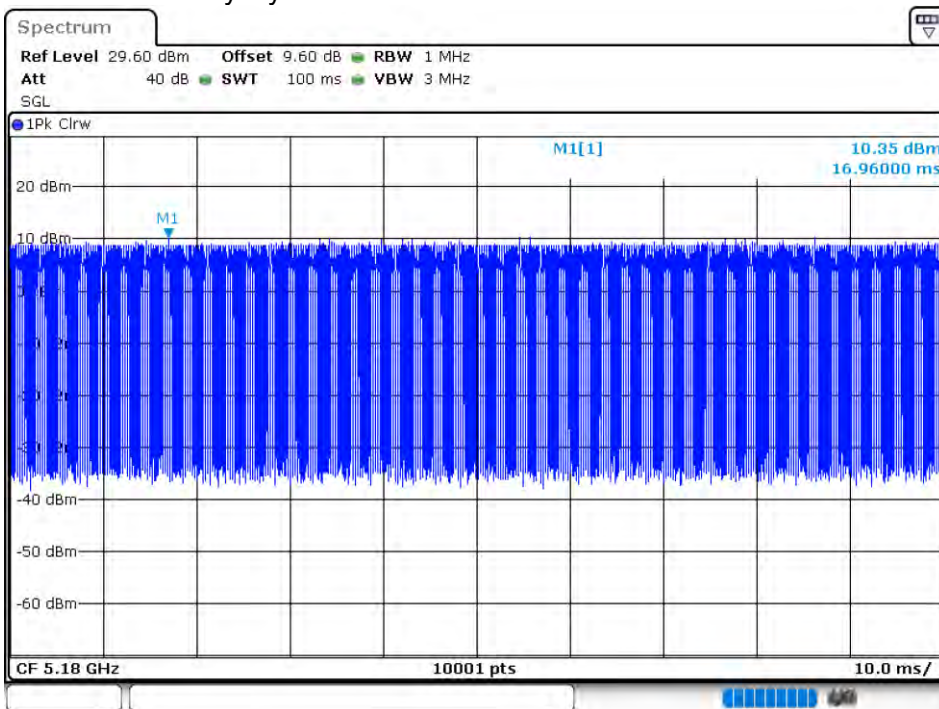


### Duty Cycle NVNT 802.11ac20 5200MHz Ant 1

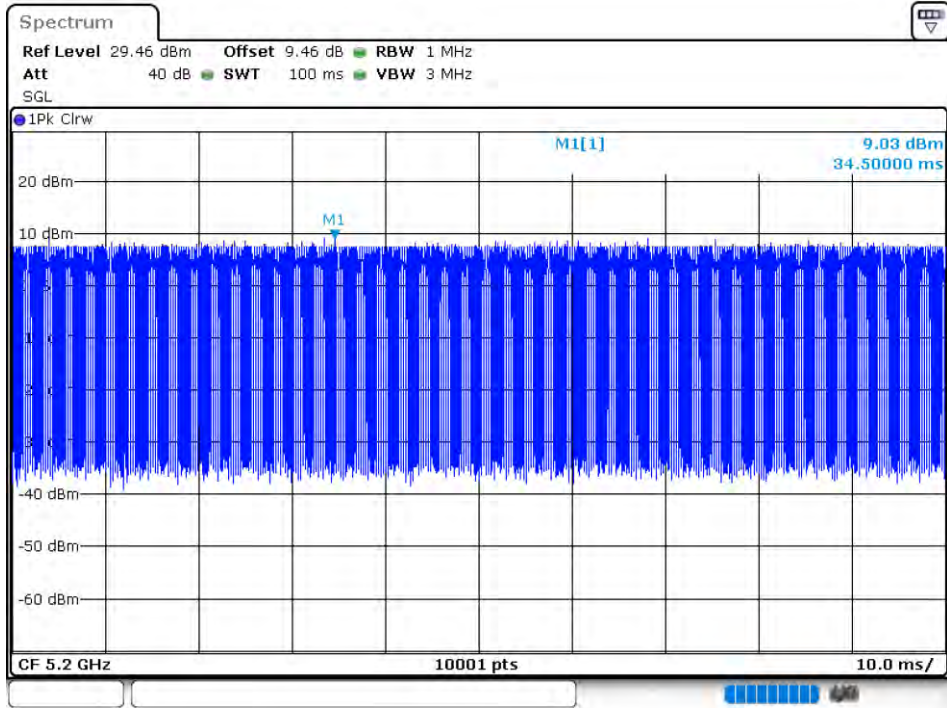


### Duty Cycle NVNT 802.11ac20 5240MHz Ant 1

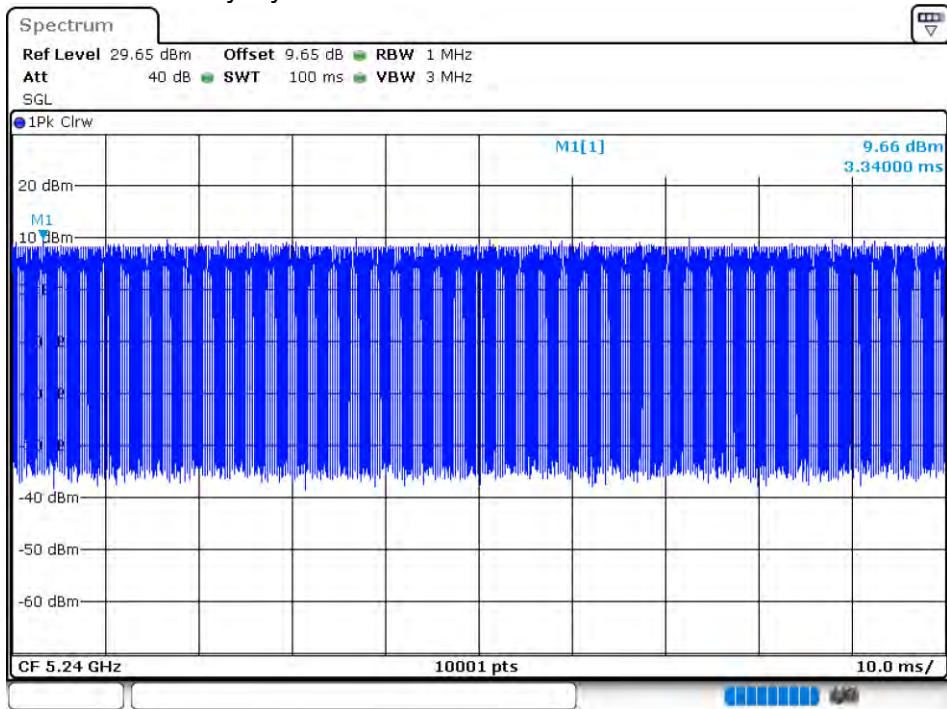


Duty Cycle NVNT 802.11ac20 5180MHz Ant 2

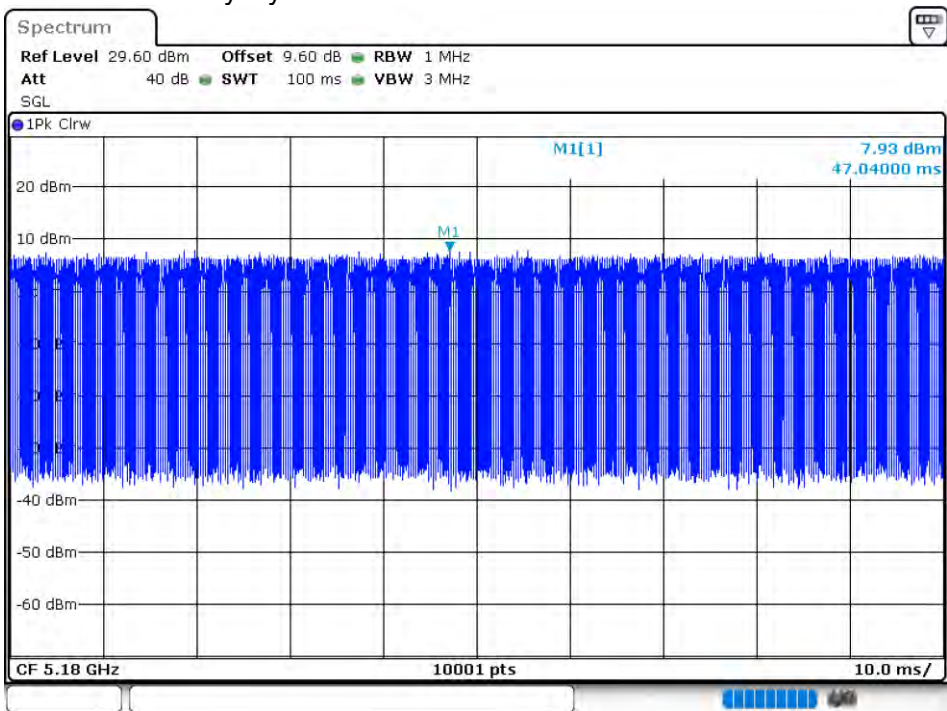


Duty Cycle NVNT 802.11ac20 5200MHz Ant 2

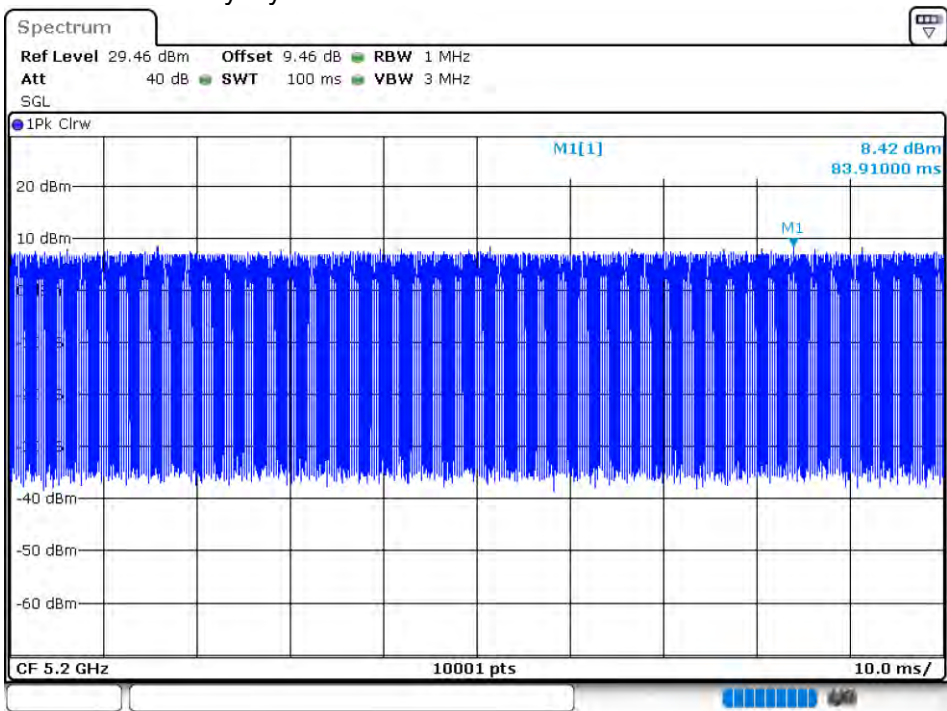


### Duty Cycle NVNT 802.11ac20 5240MHz Ant 2

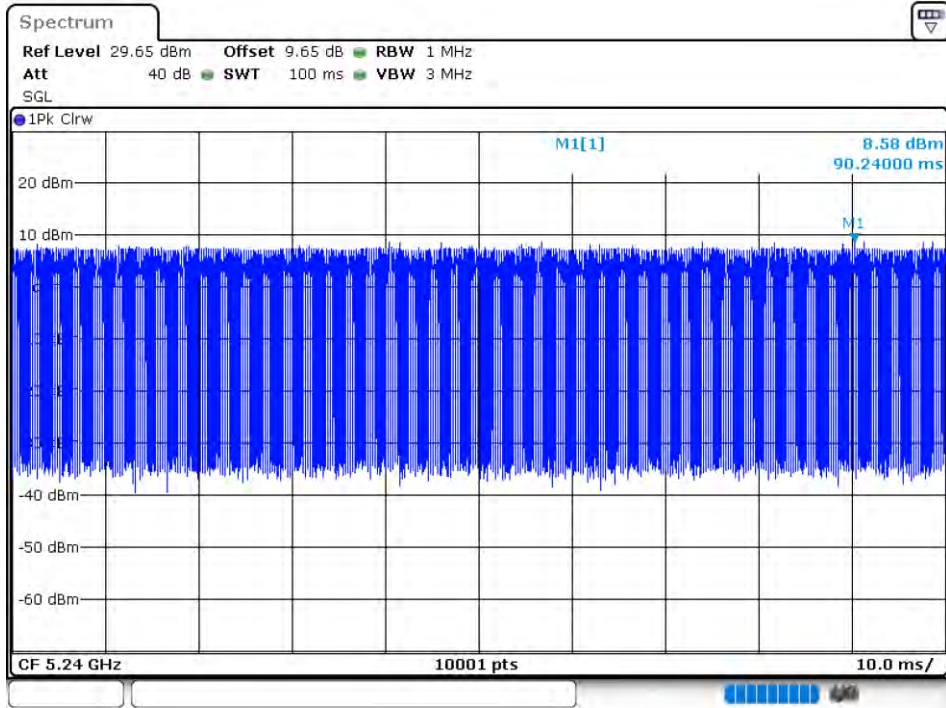


### Duty Cycle NVNT 802.11ac40 5190MHz Ant 1

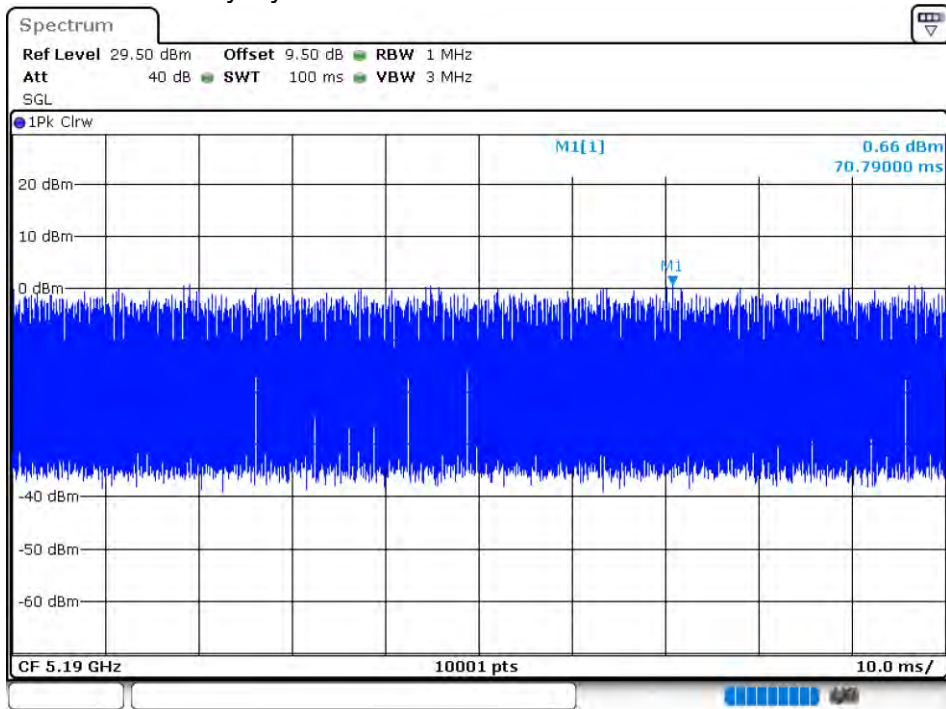


### Duty Cycle NVNT 802.11ac40 5230MHz Ant 1

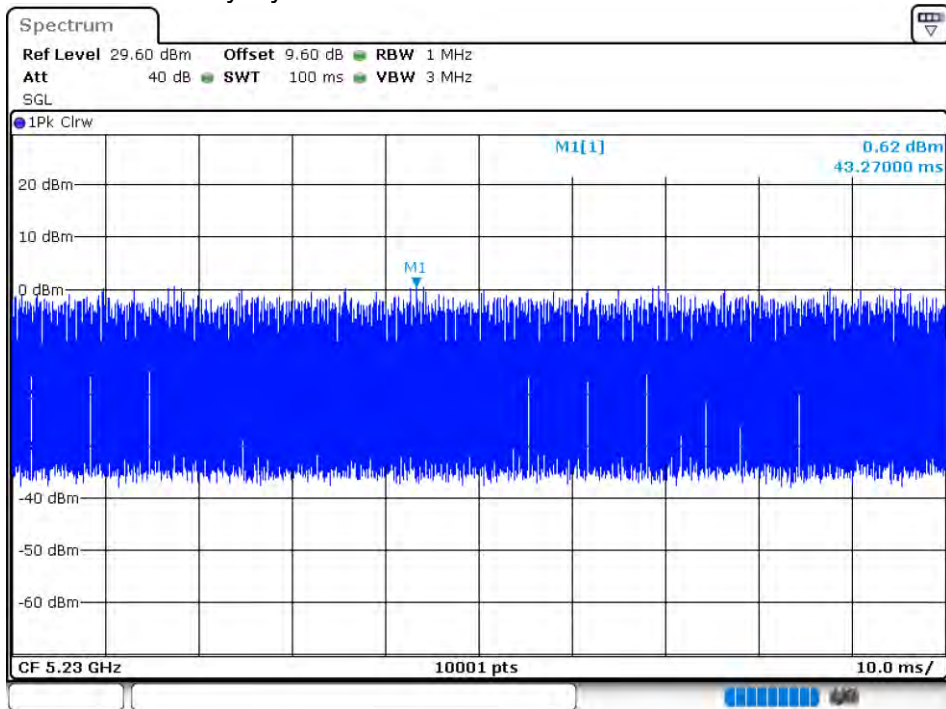


### Duty Cycle NVNT 802.11ac40 5190MHz Ant 2

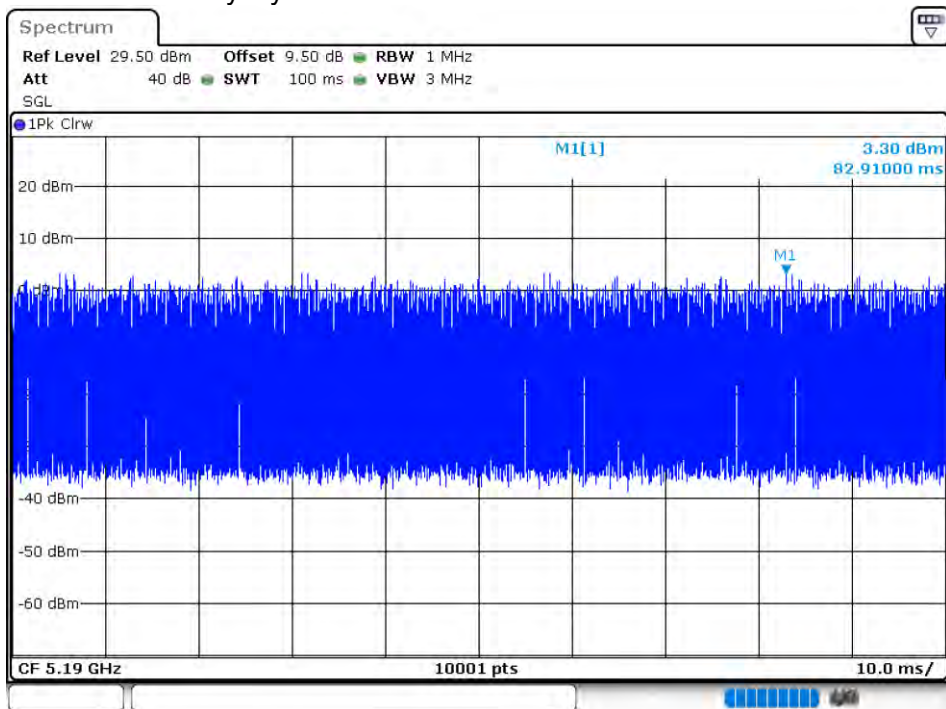


Duty Cycle NVNT 802.11ac40 5230MHz Ant 2

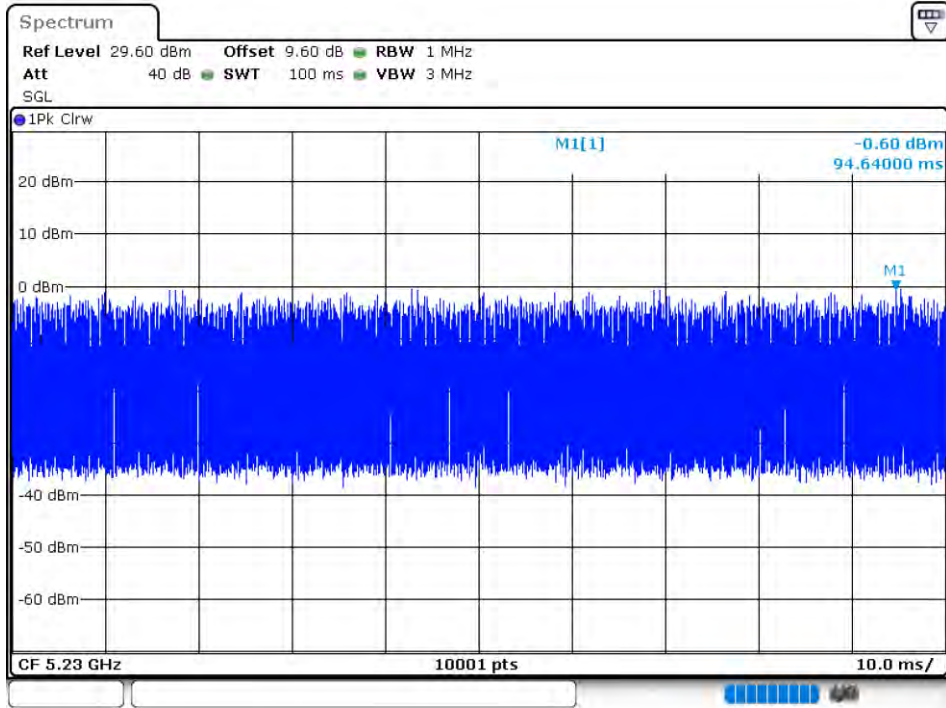


Duty Cycle NVNT 802.11ac80 5210MHz Ant 1

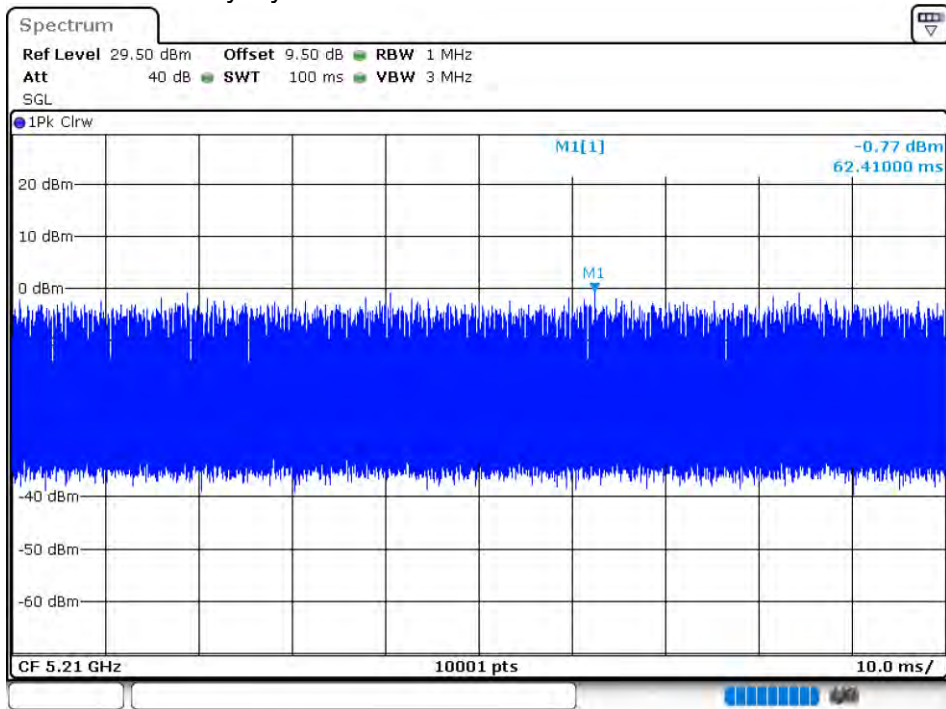

### Duty Cycle NVNT 802.11ac80 5210MHz Ant 2

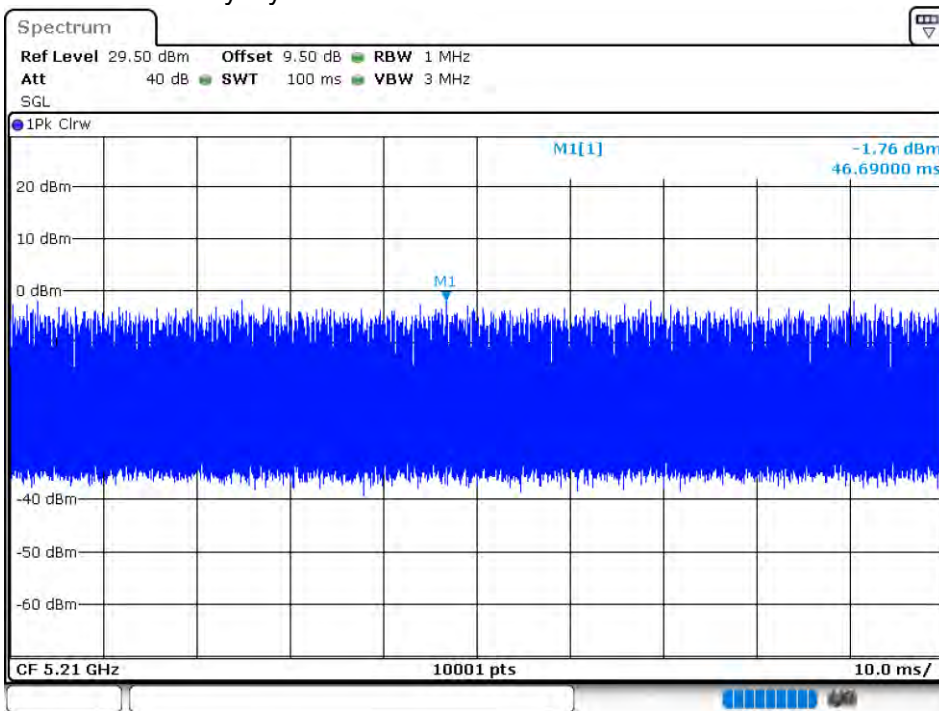


### Duty Cycle NVNT 802.11n(HT40) 5190MHz Ant 1

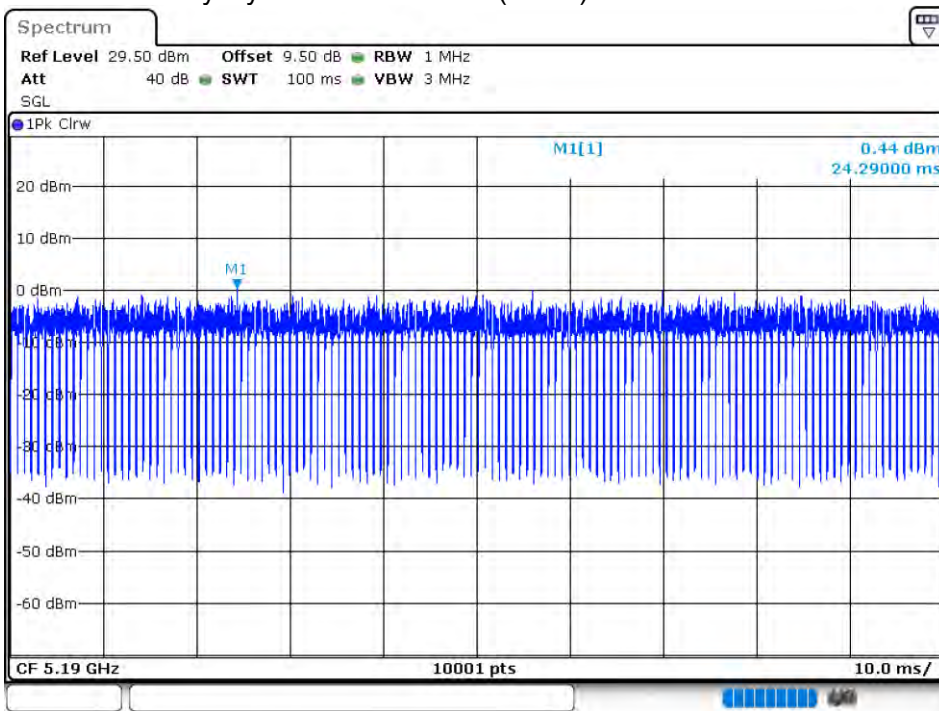





Duty Cycle NVNT 802.11n(HT40) 5230MHz Ant 1

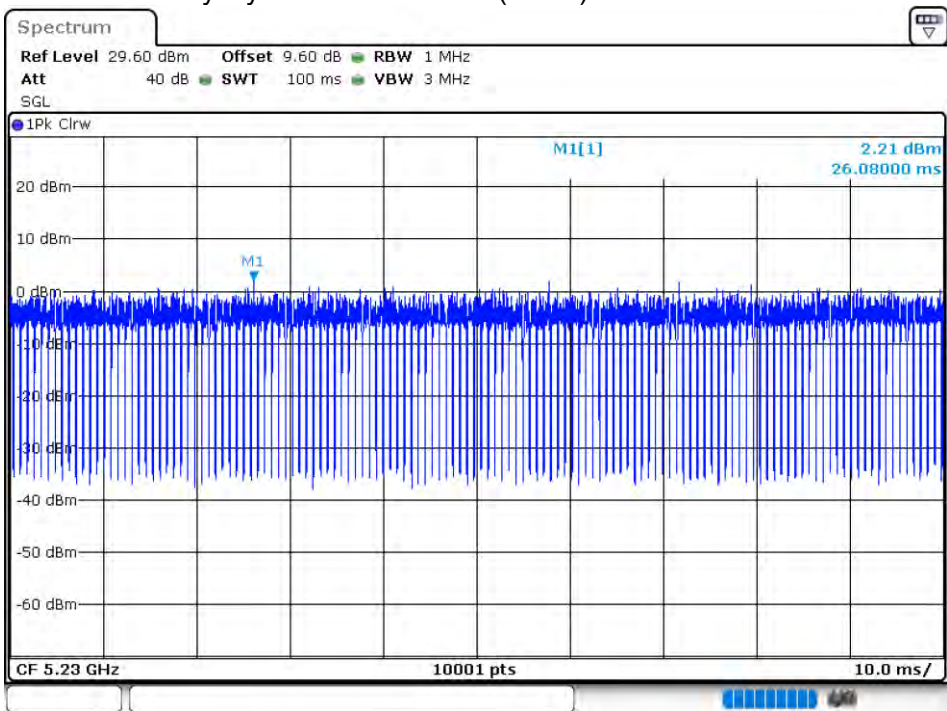

Duty Cycle NVNT 802.11n(HT40) 5190MHz Ant 2

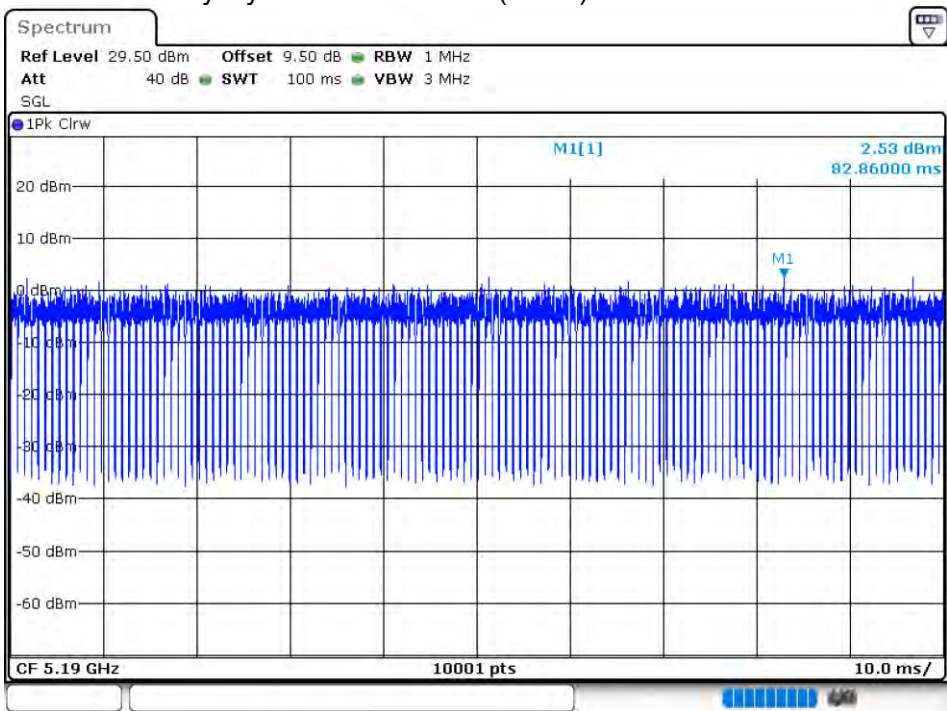


Duty Cycle NVNT 802.11n(HT40) 5230MHz Ant 2

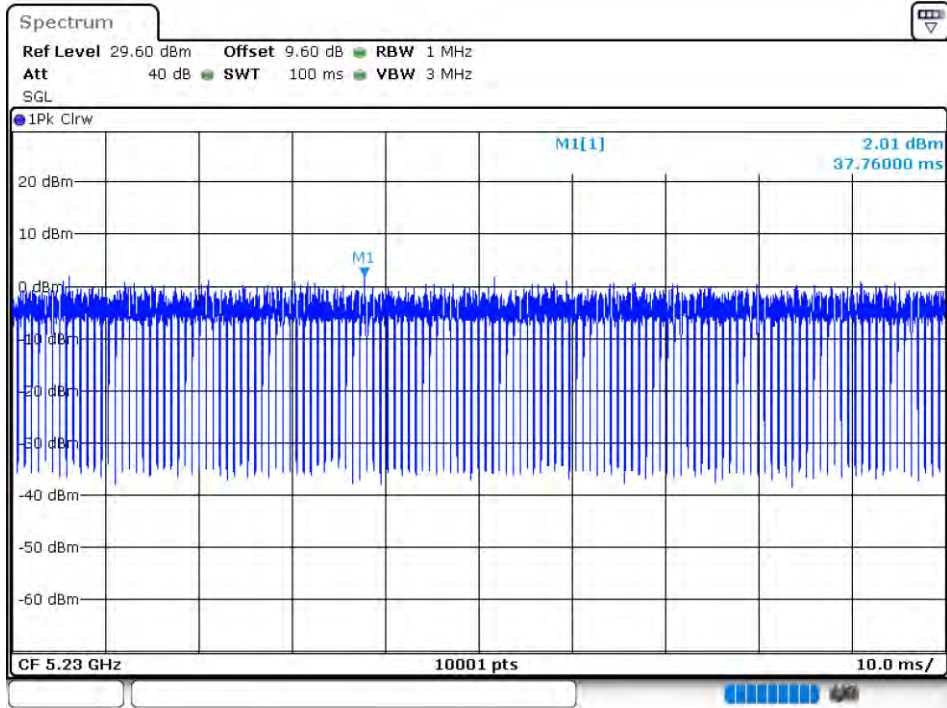


5.3G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11a	5260	100
Ant 1	NVNT	802.11a	5280	100
Ant 1	NVNT	802.11a	5320	100
Ant 2	NVNT	802.11a	5260	100
Ant 2	NVNT	802.11a	5280	100
Ant 2	NVNT	802.11a	5320	100
Ant 1	NVNT	802.11ac20	5260	100
Ant 1	NVNT	802.11ac20	5280	100
Ant 1	NVNT	802.11ac20	5320	100
Ant 2	NVNT	802.11ac20	5260	100
Ant 2	NVNT	802.11ac20	5280	100
Ant 2	NVNT	802.11ac20	5320	100
Ant 1	NVNT	802.11ac40	5270	100
Ant 1	NVNT	802.11ac40	5310	100
Ant 2	NVNT	802.11ac40	5270	100
Ant 2	NVNT	802.11ac40	5310	100
Ant 1	NVNT	802.11ac80	5290	100
Ant 2	NVNT	802.11ac80	5290	100
Ant 1	NVNT	802.11n(HT20)	5260	100
Ant 1	NVNT	802.11n(HT20)	5280	100
Ant 1	NVNT	802.11n(HT20)	5320	100
Ant 2	NVNT	802.11n(HT20)	5260	100
Ant 2	NVNT	802.11n(HT20)	5280	100
Ant 2	NVNT	802.11n(HT20)	5320	100
Ant 1	NVNT	802.11n(HT40)	5270	100
Ant 1	NVNT	802.11n(HT40)	5310	100
Ant 2	NVNT	802.11n(HT40)	5270	100
Ant 2	NVNT	802.11n(HT40)	5310	100


Duty Cycle NVNT 802.11a 5260MHz Ant 1

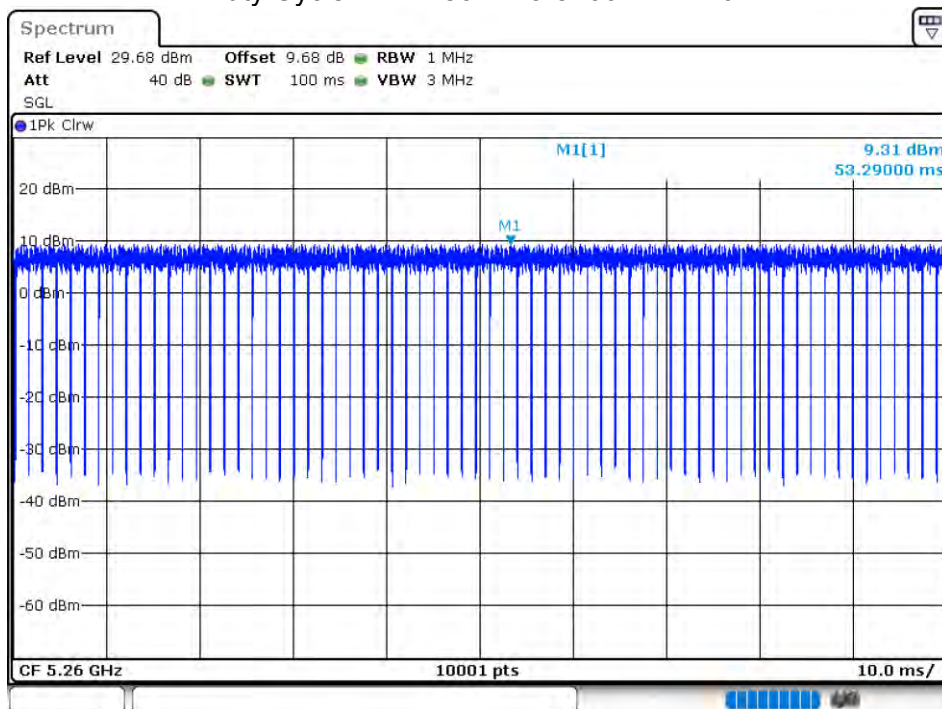


### Duty Cycle NVNT 802.11a 5280MHz Ant 1

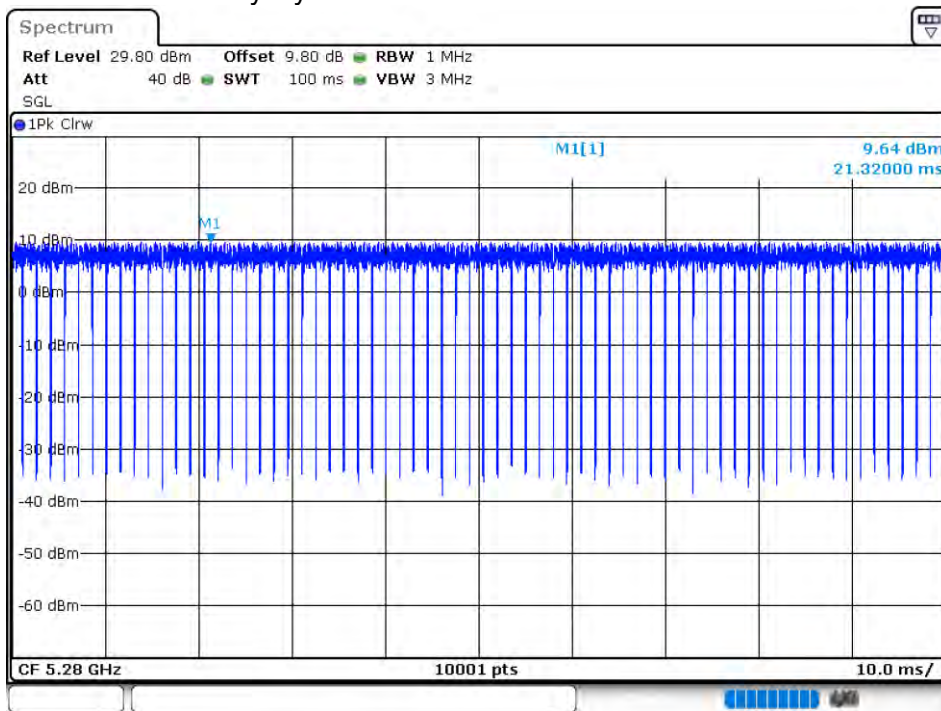


### Duty Cycle NVNT 802.11a 5320MHz Ant 1

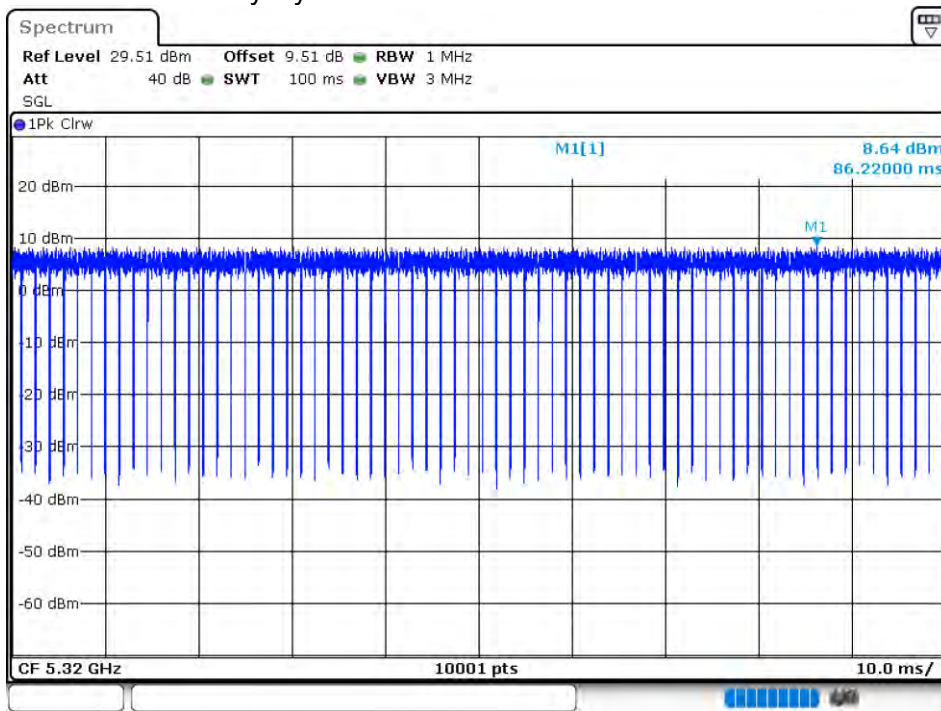


### Duty Cycle NVNT 802.11a 5260MHz Ant 2

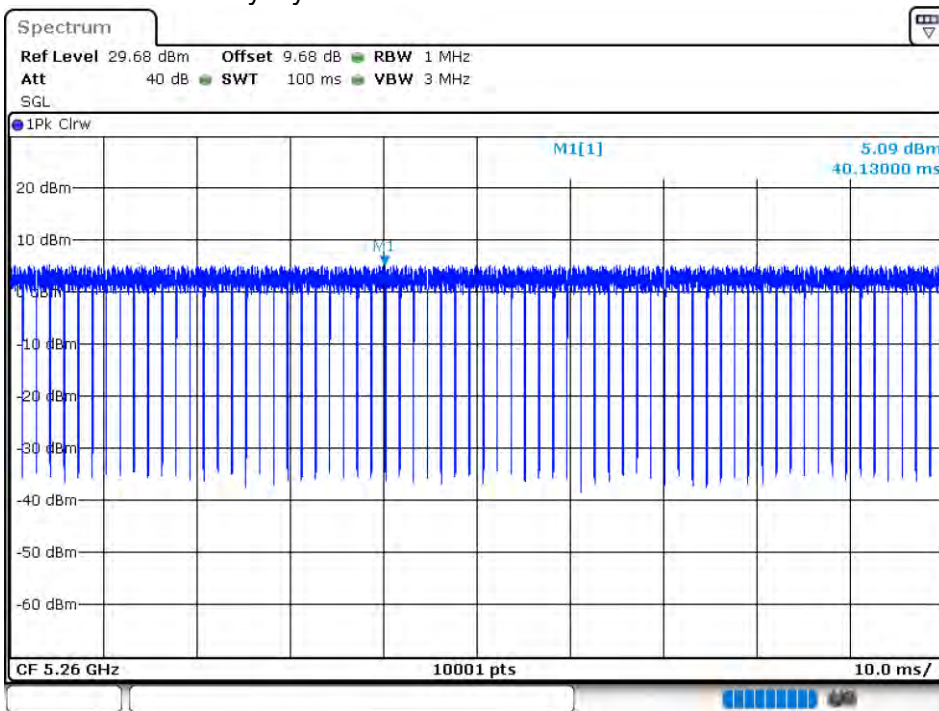


### Duty Cycle NVNT 802.11a 5280MHz Ant 2

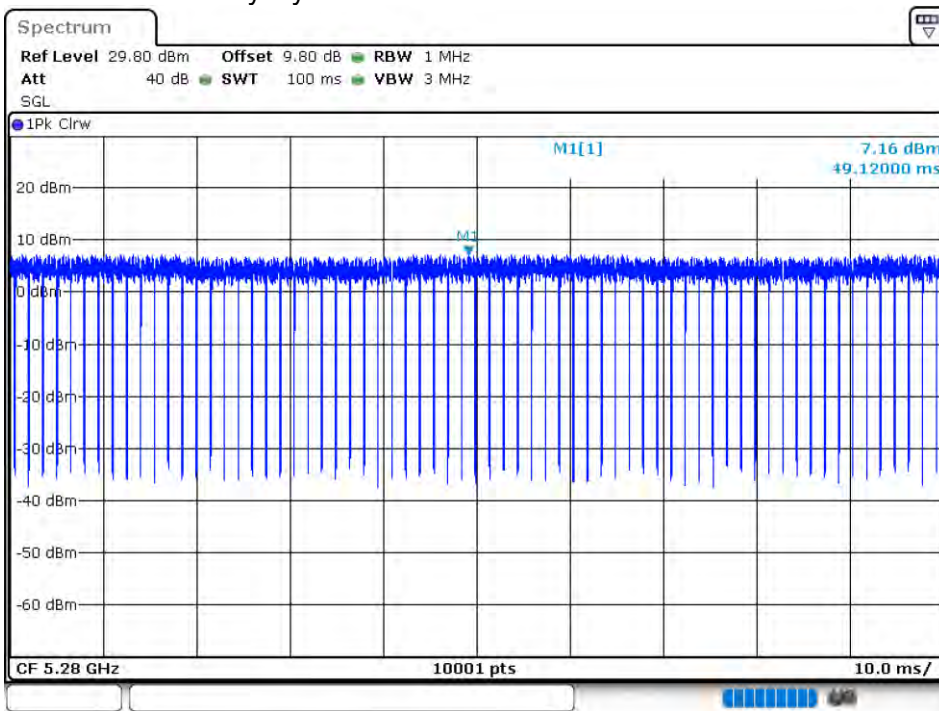


### Duty Cycle NVNT 802.11a 5320MHz Ant 2

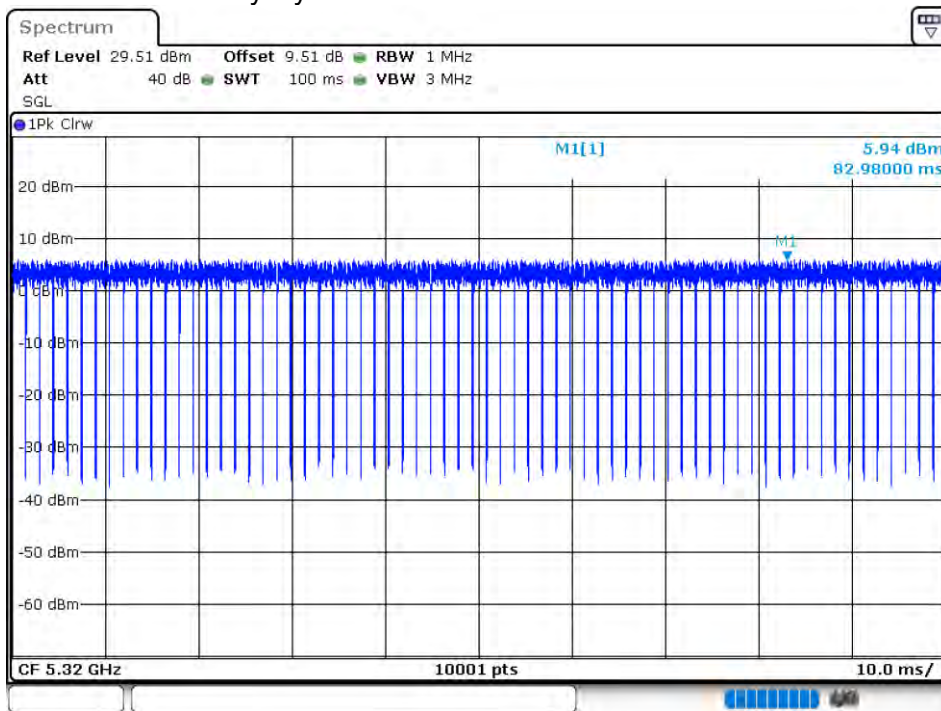


### Duty Cycle NVNT 802.11ac20 5260MHz Ant 1

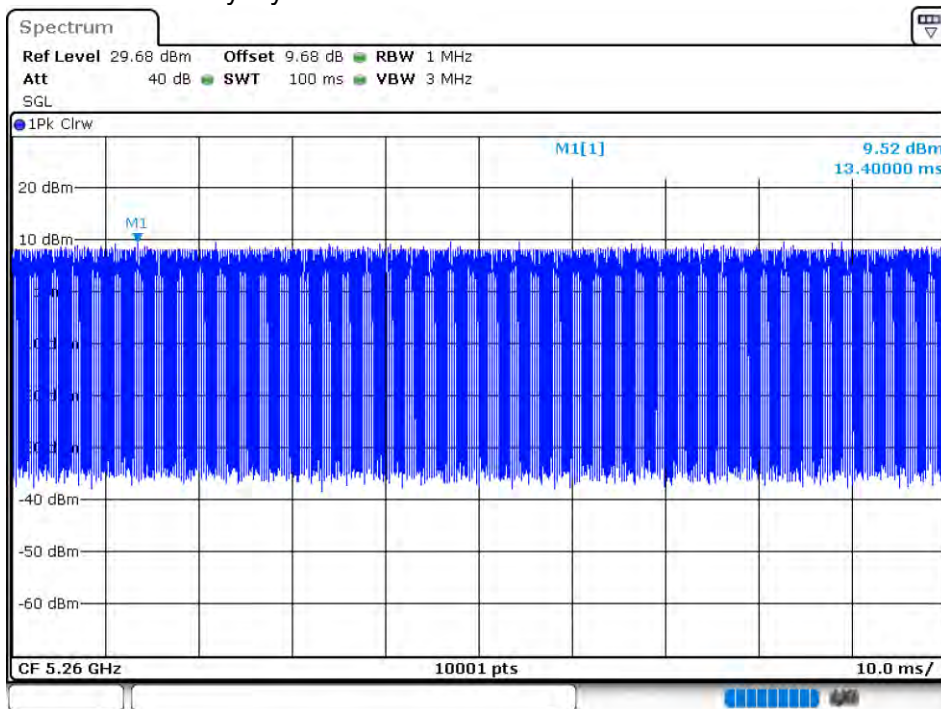


### Duty Cycle NVNT 802.11ac20 5280MHz Ant 1

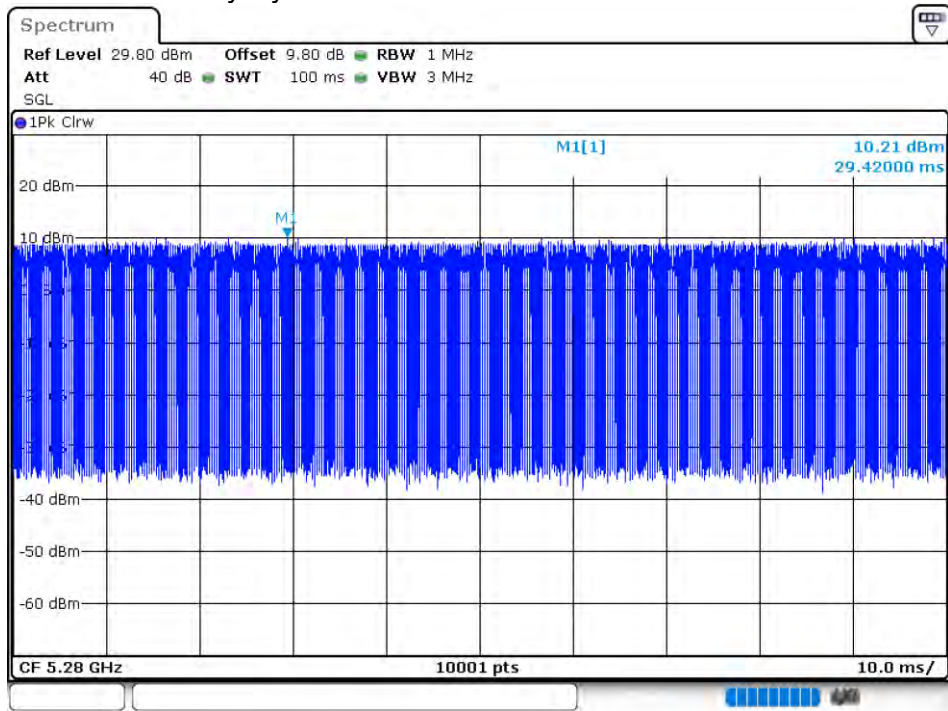


### Duty Cycle NVNT 802.11ac20 5320MHz Ant 1

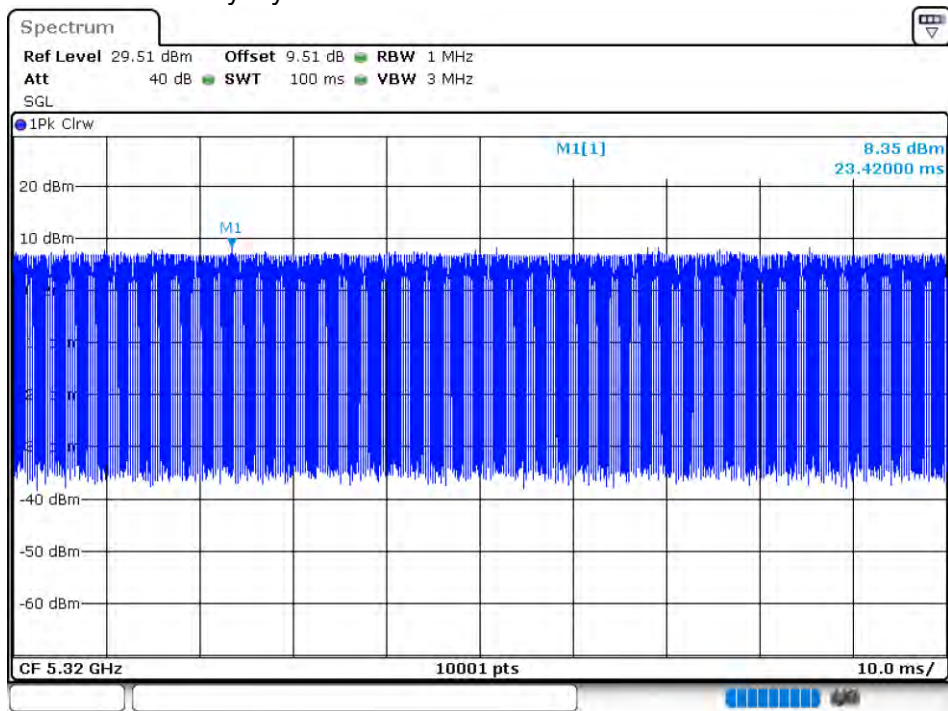

### Duty Cycle NVNT 802.11ac20 5260MHz Ant 2

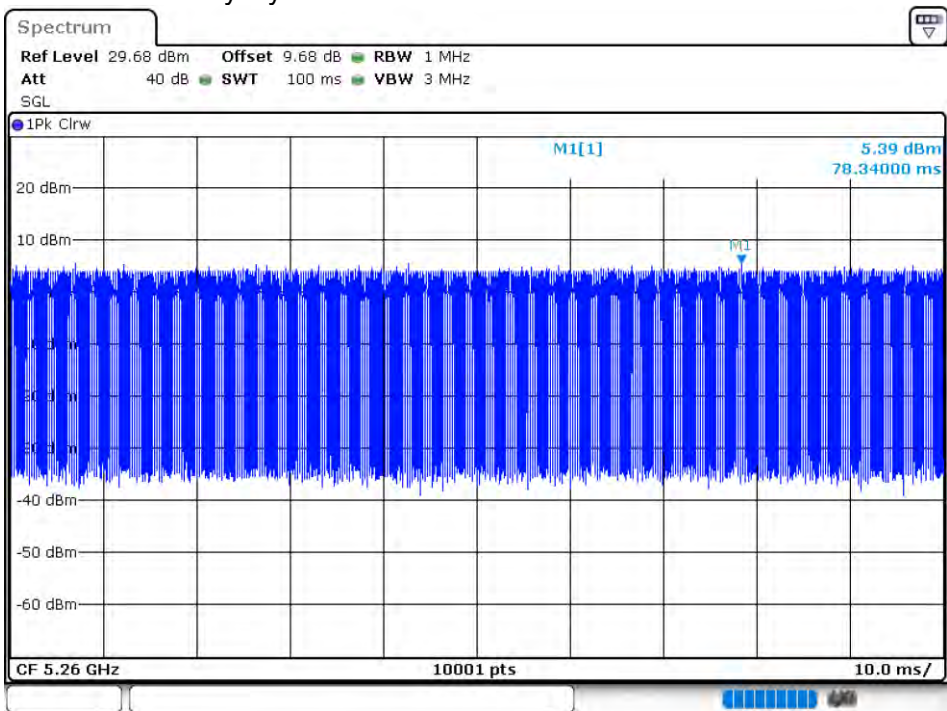


### Duty Cycle NVNT 802.11ac20 5280MHz Ant 2

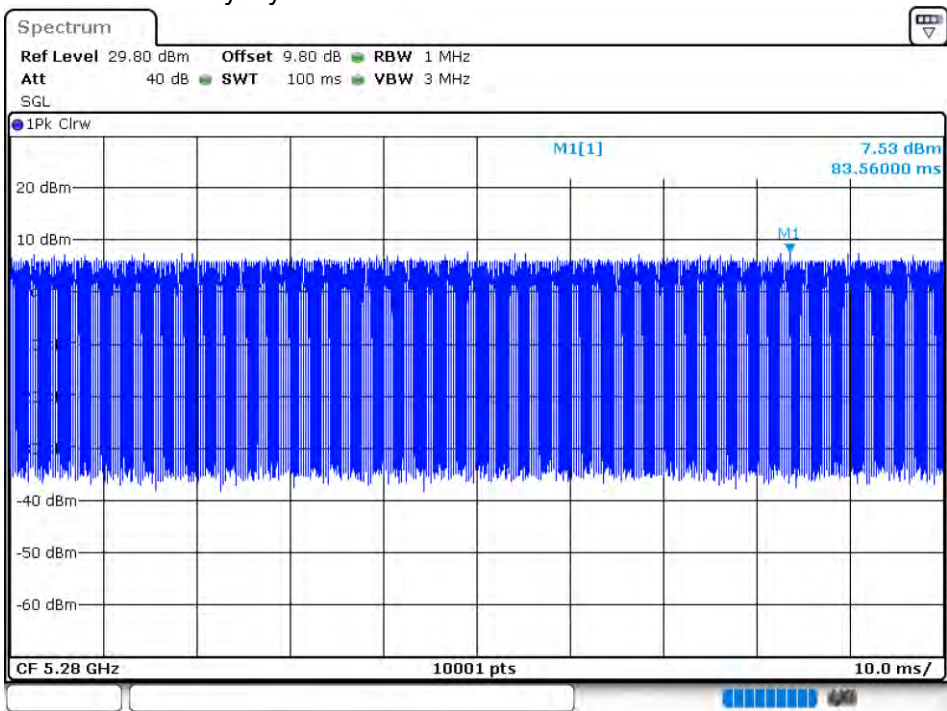





### Duty Cycle NVNT 802.11ac20 5320MHz Ant 2

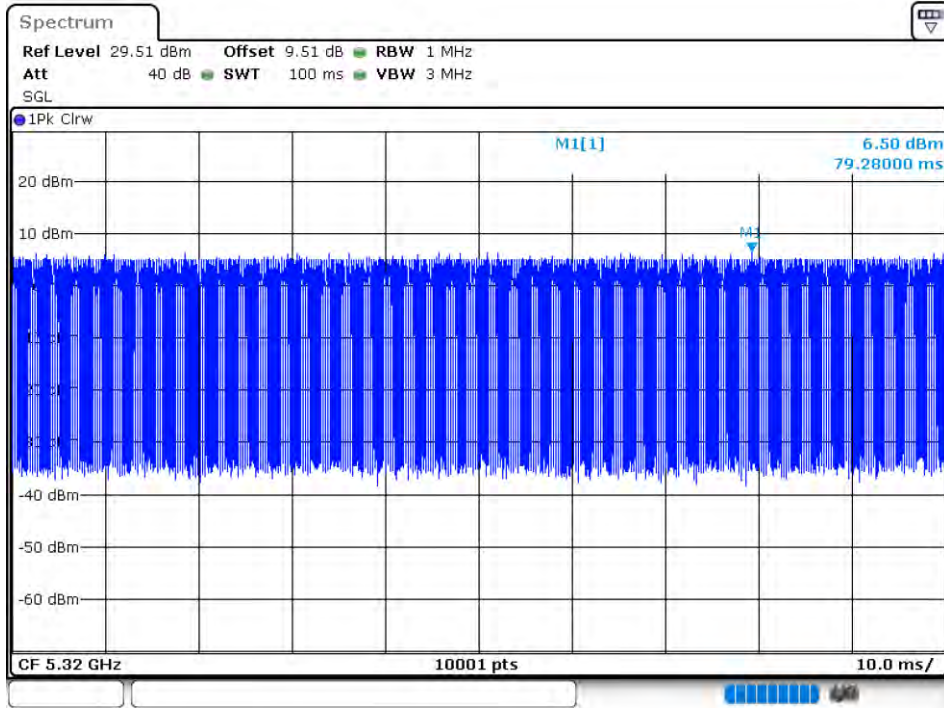


### Duty Cycle NVNT 802.11ac40 5270MHz Ant 1

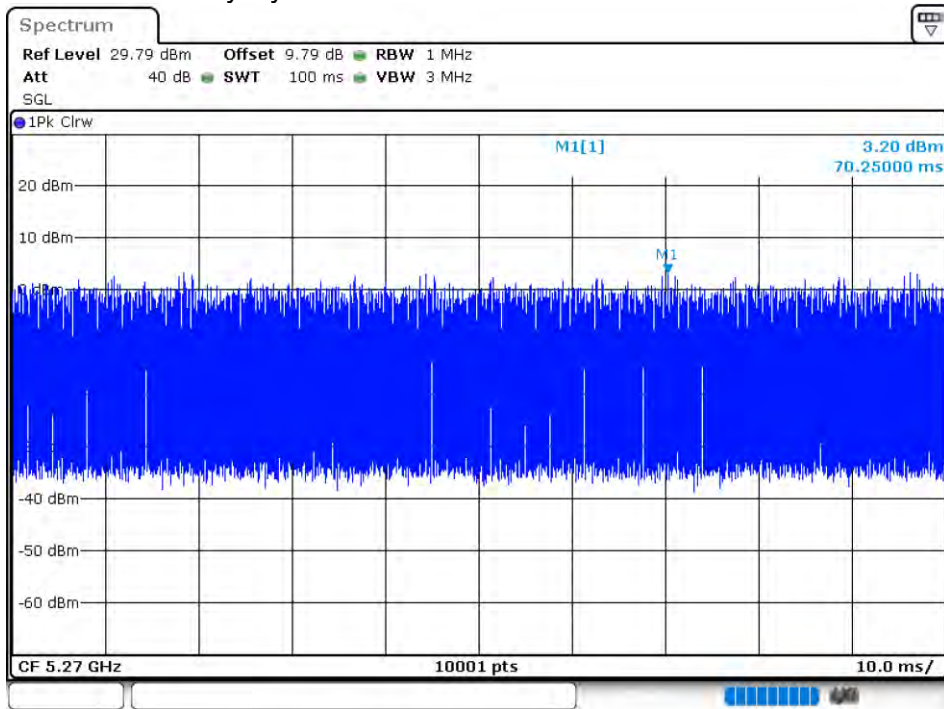


### Duty Cycle NVNT 802.11ac40 5310MHz Ant 1

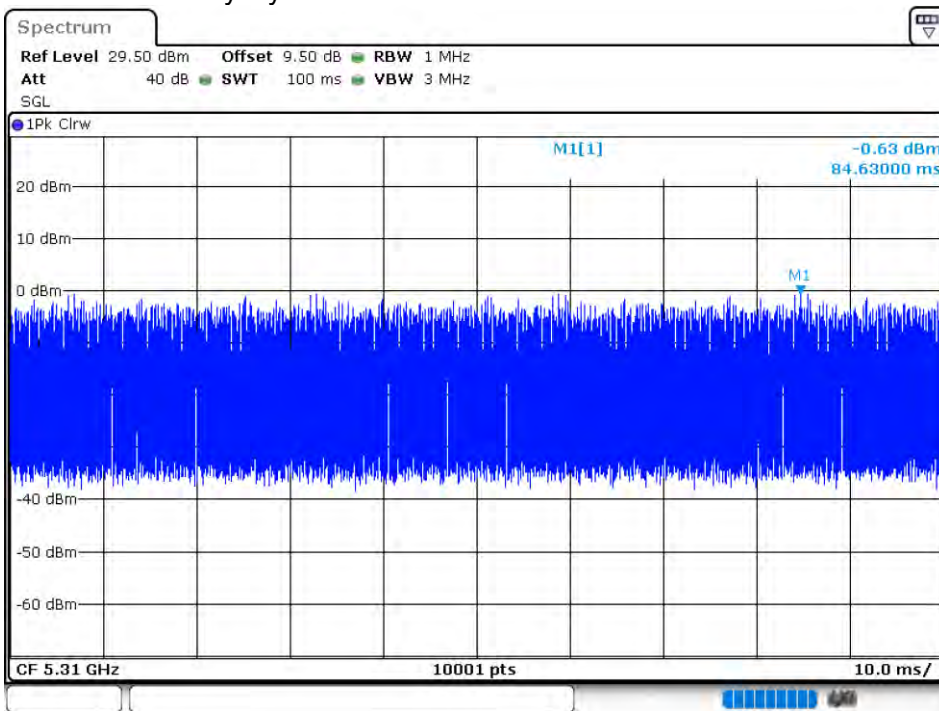


### Duty Cycle NVNT 802.11ac40 5270MHz Ant 2

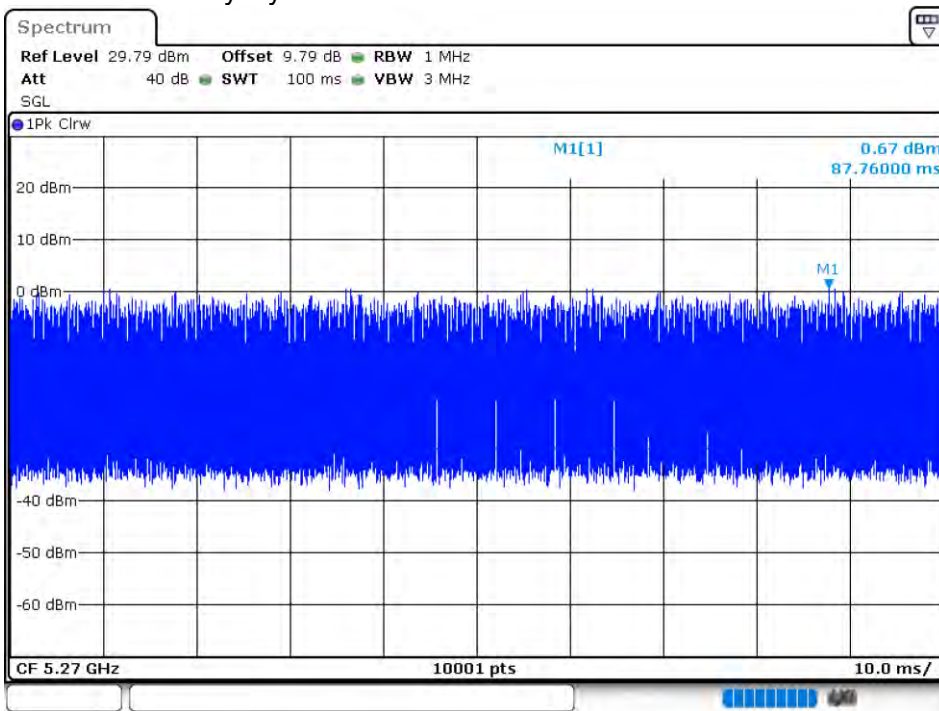


### Duty Cycle NVNT 802.11ac40 5310MHz Ant 2

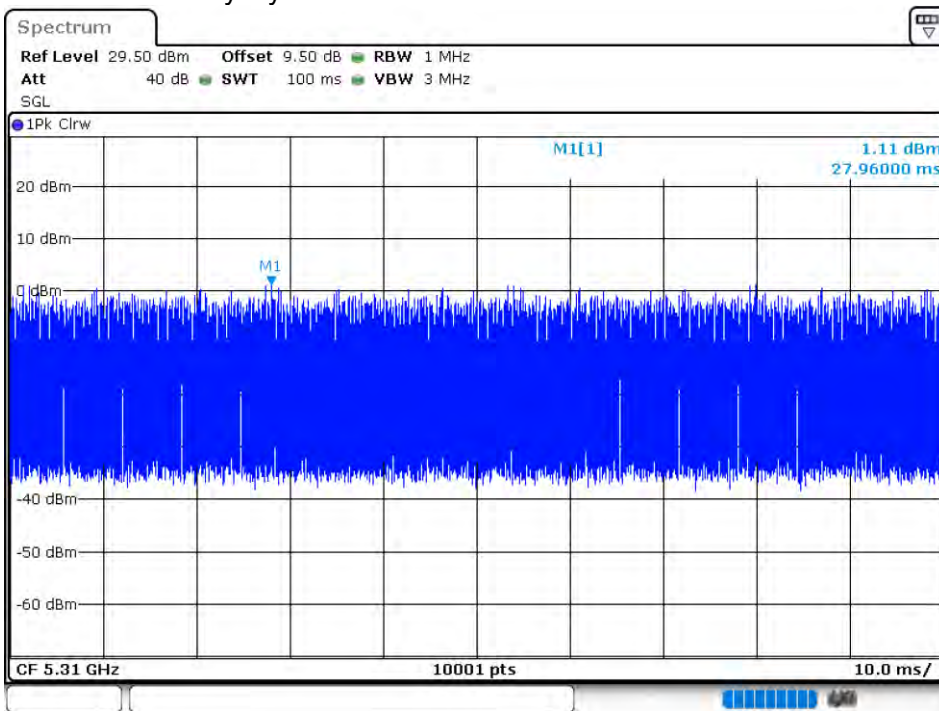


### Duty Cycle NVNT 802.11ac80 5290MHz Ant 1

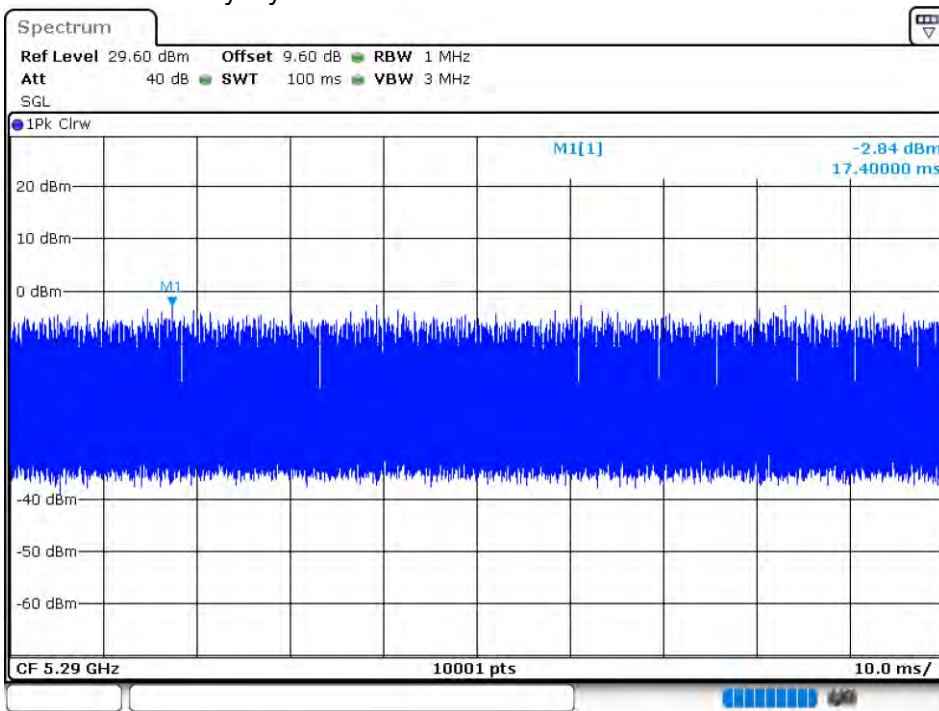


### Duty Cycle NVNT 802.11ac80 5290MHz Ant 2

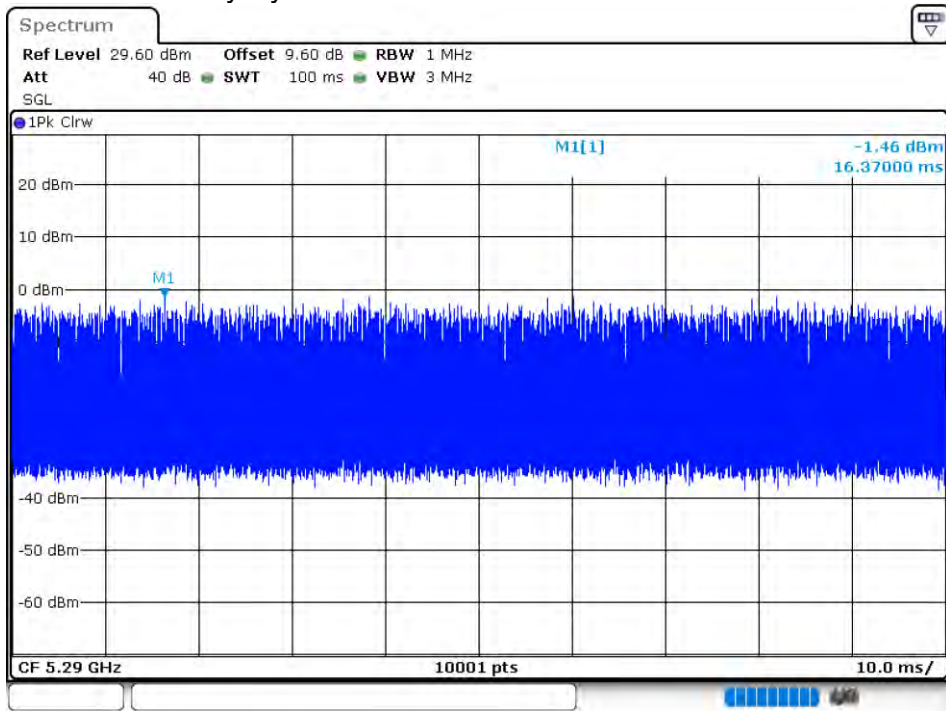


### Duty Cycle NVNT 802.11n(HT20) 5260MHz Ant 1

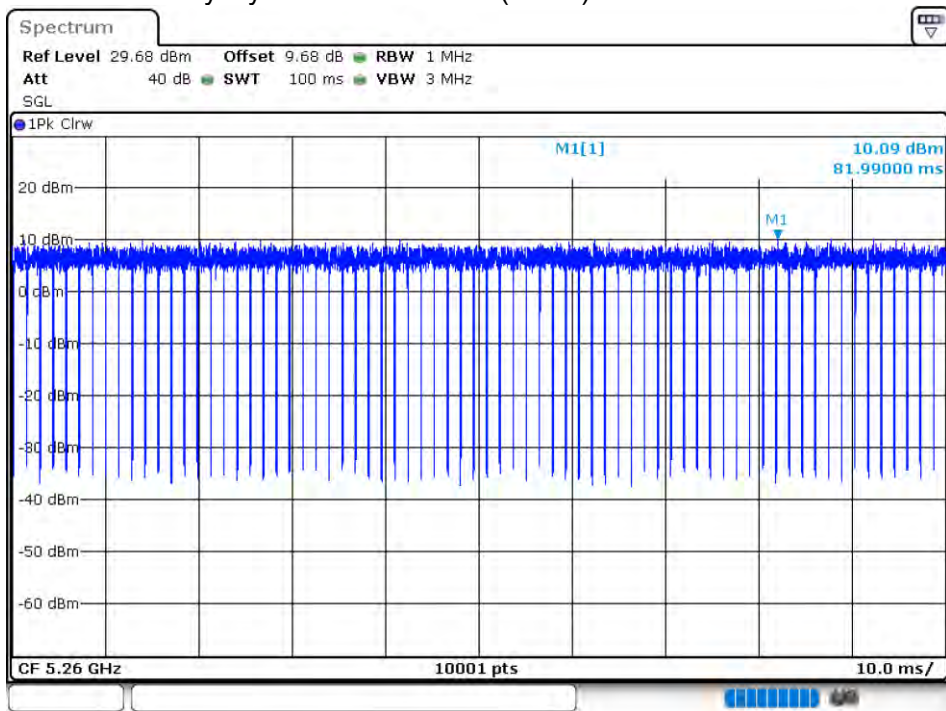


### Duty Cycle NVNT 802.11n(HT20) 5280MHz Ant 1

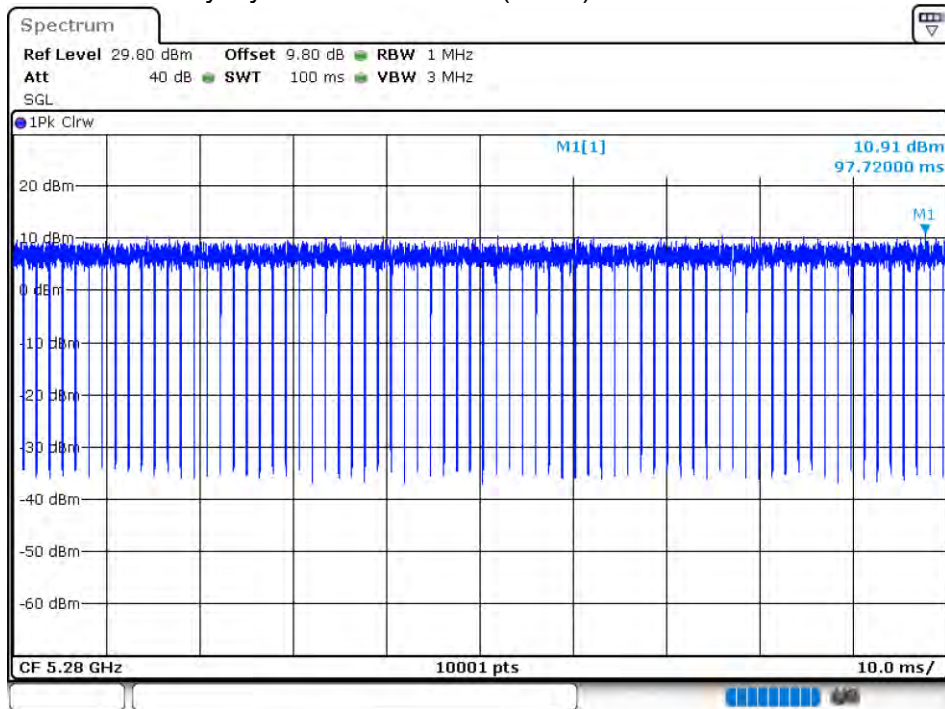


### Duty Cycle NVNT 802.11n(HT20) 5320MHz Ant 1

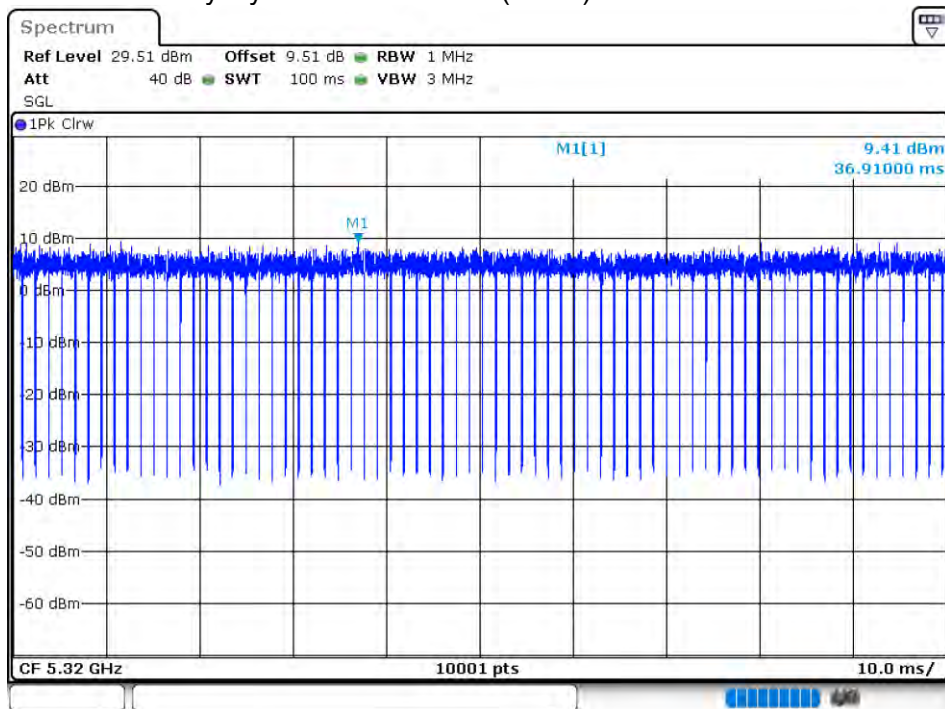


### Duty Cycle NVNT 802.11n(HT20) 5260MHz Ant 2

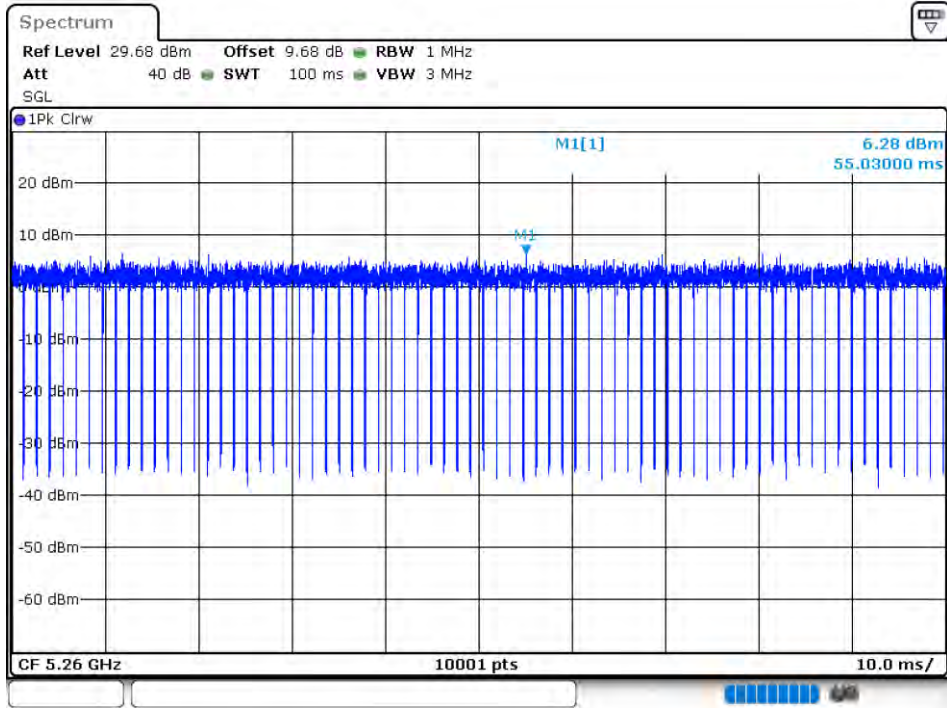


### Duty Cycle NVNT 802.11n(HT20) 5280MHz Ant 2

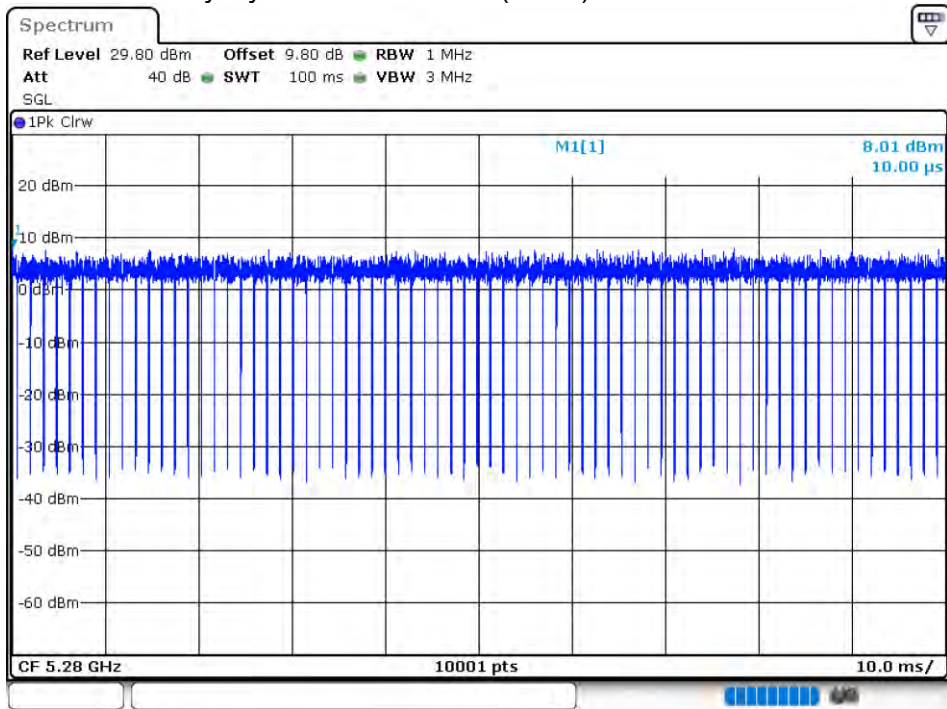


### Duty Cycle NVNT 802.11n(HT20) 5320MHz Ant 2

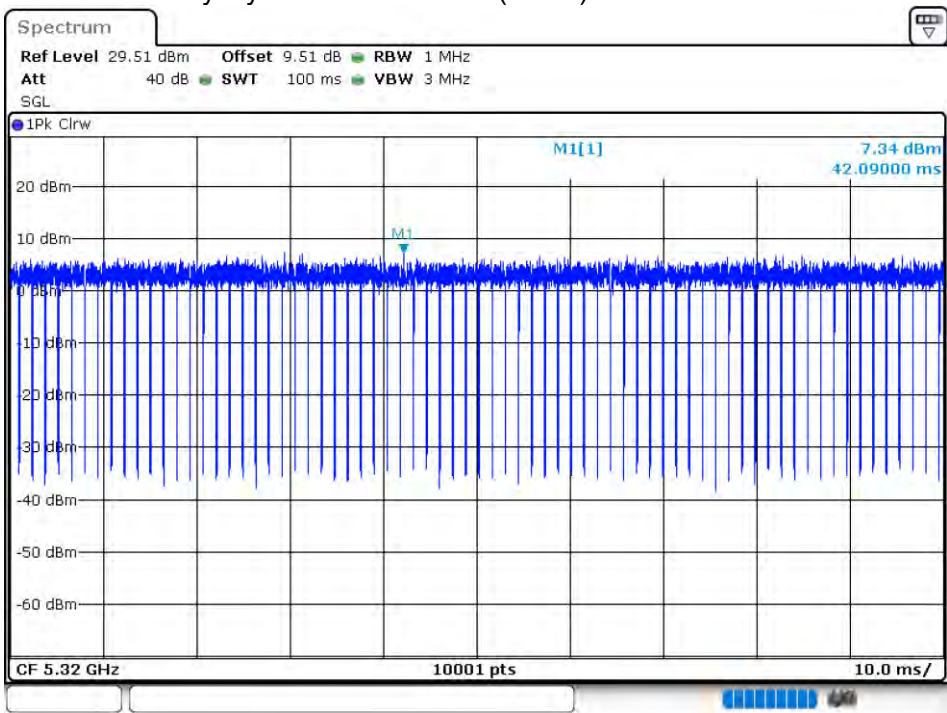


### Duty Cycle NVNT 802.11n(HT40) 5270MHz Ant 1

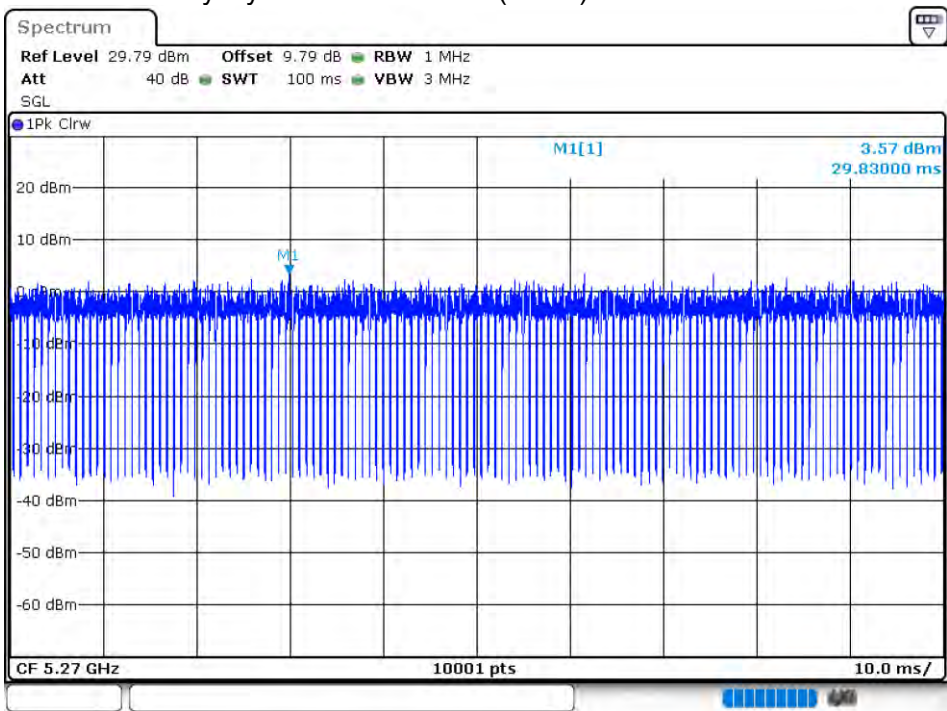

Duty Cycle NVNT 802.11n(HT40) 5310MHz Ant 1

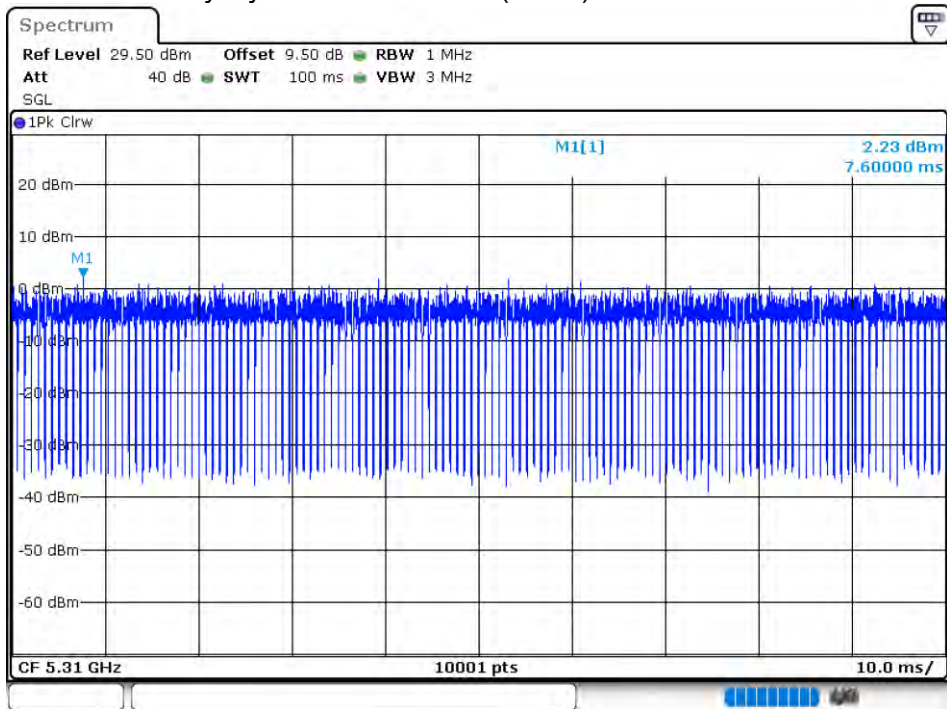


Duty Cycle NVNT 802.11n(HT40) 5270MHz Ant 2

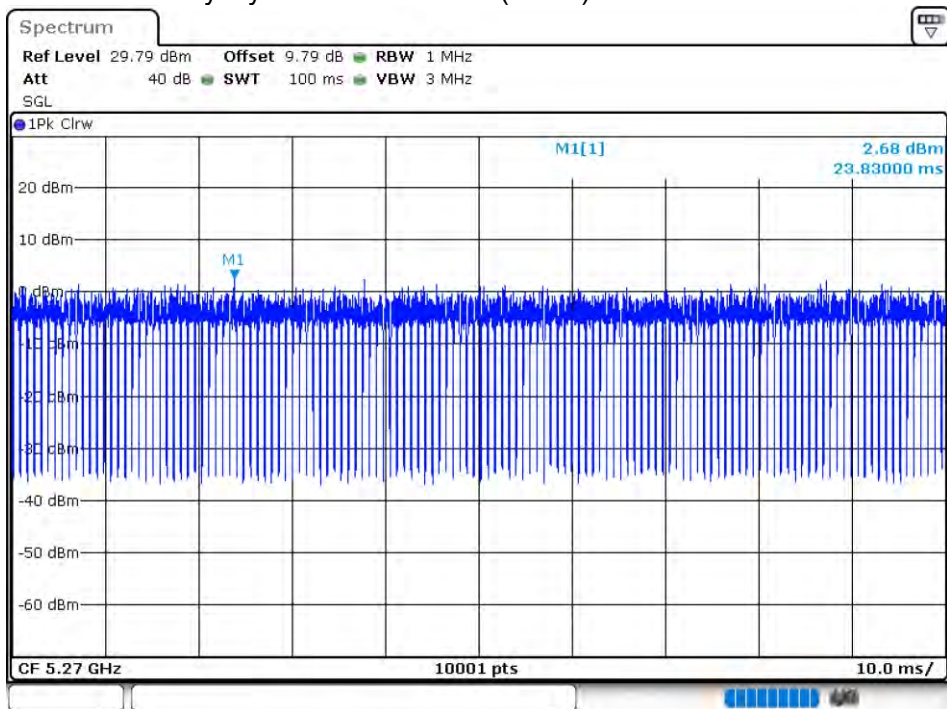




Duty Cycle NVNT 802.11n(HT40) 5310MHz Ant 2

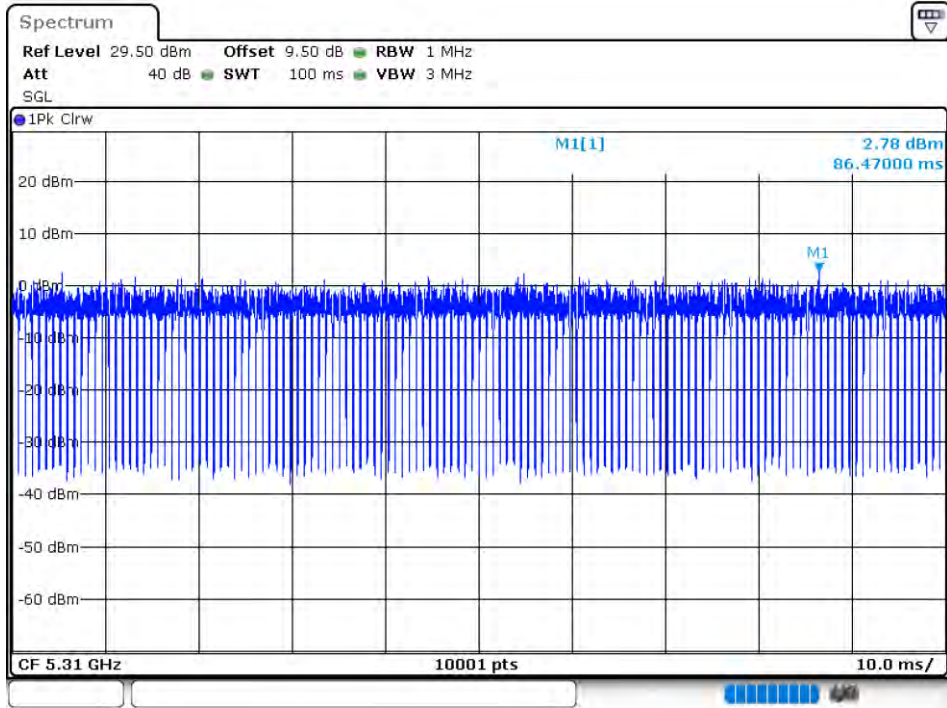


5.6G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11a	5500	100
Ant 1	NVNT	802.11a	5600	100
Ant 1	NVNT	802.11a	5700	100
Ant 2	NVNT	802.11a	5500	100
Ant 2	NVNT	802.11a	5600	100
Ant 2	NVNT	802.11a	5700	100
Ant 1	NVNT	802.11ac20	5500	100
Ant 1	NVNT	802.11ac20	5600	100
Ant 1	NVNT	802.11ac20	5700	100
Ant 2	NVNT	802.11ac20	5500	100
Ant 2	NVNT	802.11ac20	5600	100
Ant 2	NVNT	802.11ac20	5700	100
Ant 1	NVNT	802.11ac40	5510	100
Ant 1	NVNT	802.11ac40	5590	100
Ant 1	NVNT	802.11ac40	5670	100
Ant 2	NVNT	802.11ac40	5510	100
Ant 2	NVNT	802.11ac40	5590	100
Ant 2	NVNT	802.11ac40	5670	100
Ant 1	NVNT	802.11ac80	5530	100
Ant 1	NVNT	802.11ac80	5610	100
Ant 2	NVNT	802.11ac80	5530	100
Ant 2	NVNT	802.11ac80	5610	100
Ant 1	NVNT	802.11n(HT20)	5500	100
Ant 1	NVNT	802.11n(HT20)	5600	100
Ant 1	NVNT	802.11n(HT20)	5700	100
Ant 2	NVNT	802.11n(HT20)	5500	100
Ant 2	NVNT	802.11n(HT20)	5600	100
Ant 2	NVNT	802.11n(HT20)	5700	100
Ant 1	NVNT	802.11n(HT40)	5510	100
Ant 1	NVNT	802.11n(HT40)	5590	100
Ant 1	NVNT	802.11n(HT40)	5670	100
Ant 2	NVNT	802.11n(HT40)	5510	100
Ant 2	NVNT	802.11n(HT40)	5590	100
Ant 2	NVNT	802.11n(HT40)	5670	100


### Duty Cycle NVNT 802.11a 5500MHz Ant 1

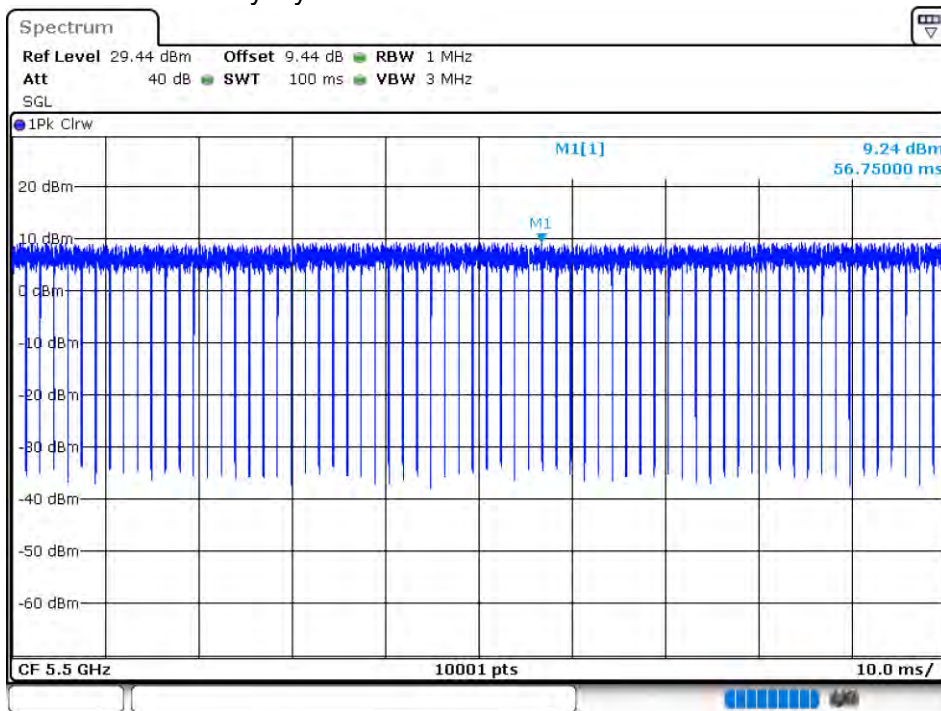


### Duty Cycle NVNT 802.11a 5600MHz Ant 1

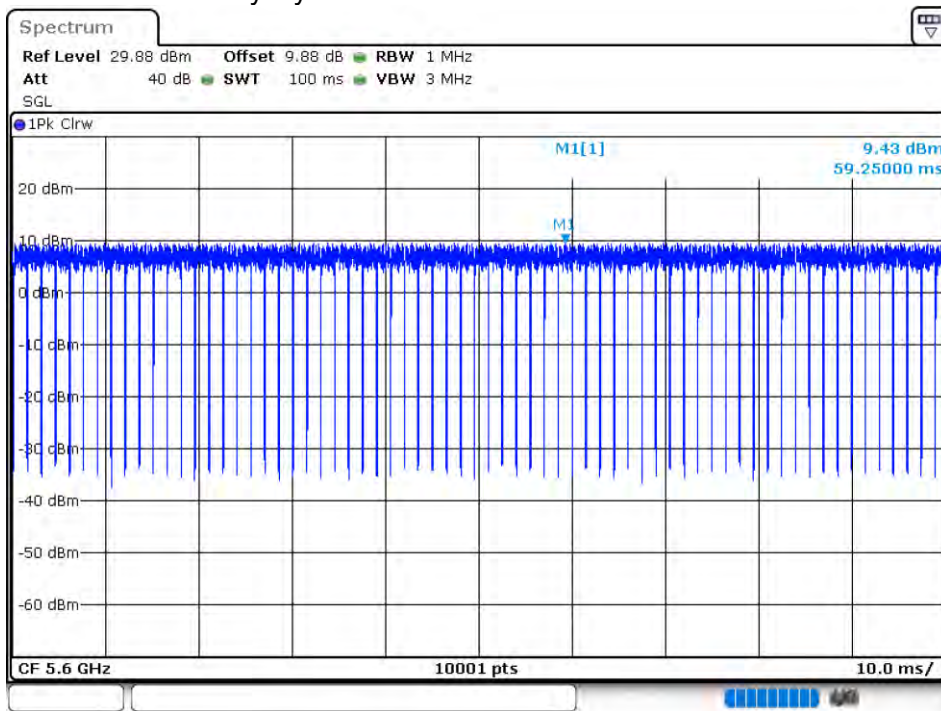


### Duty Cycle NVNT 802.11a 5700MHz Ant 1

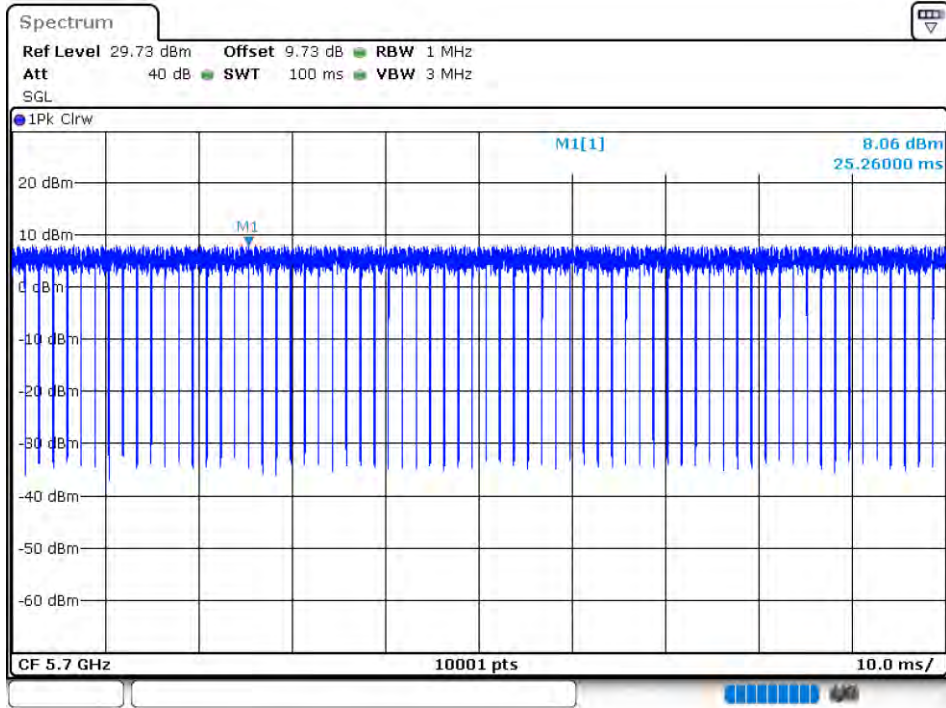


### Duty Cycle NVNT 802.11a 5500MHz Ant 2

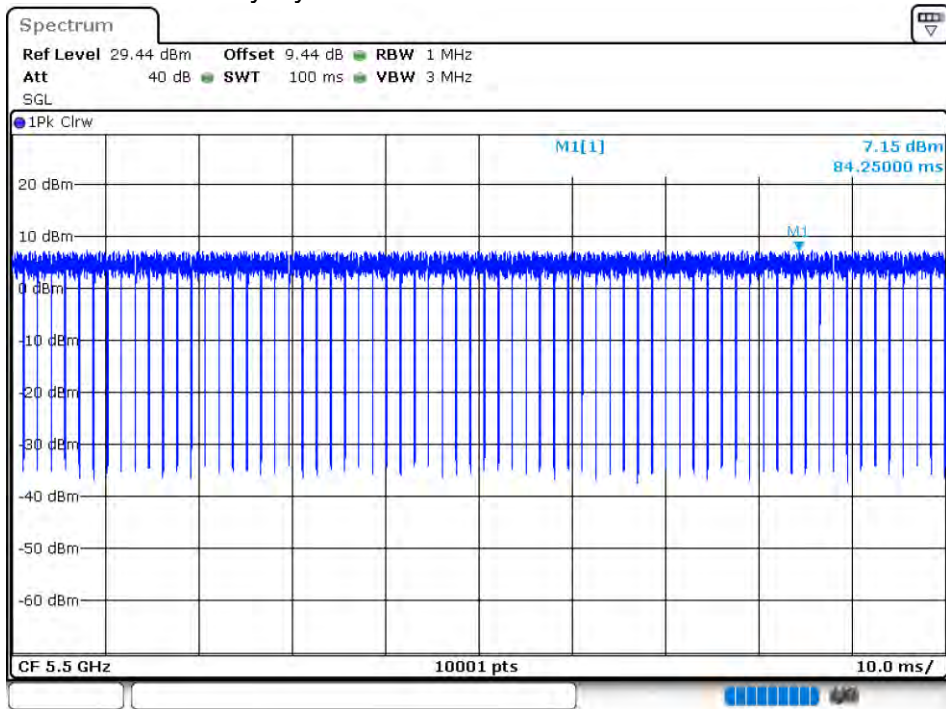


### Duty Cycle NVNT 802.11a 5600MHz Ant 2

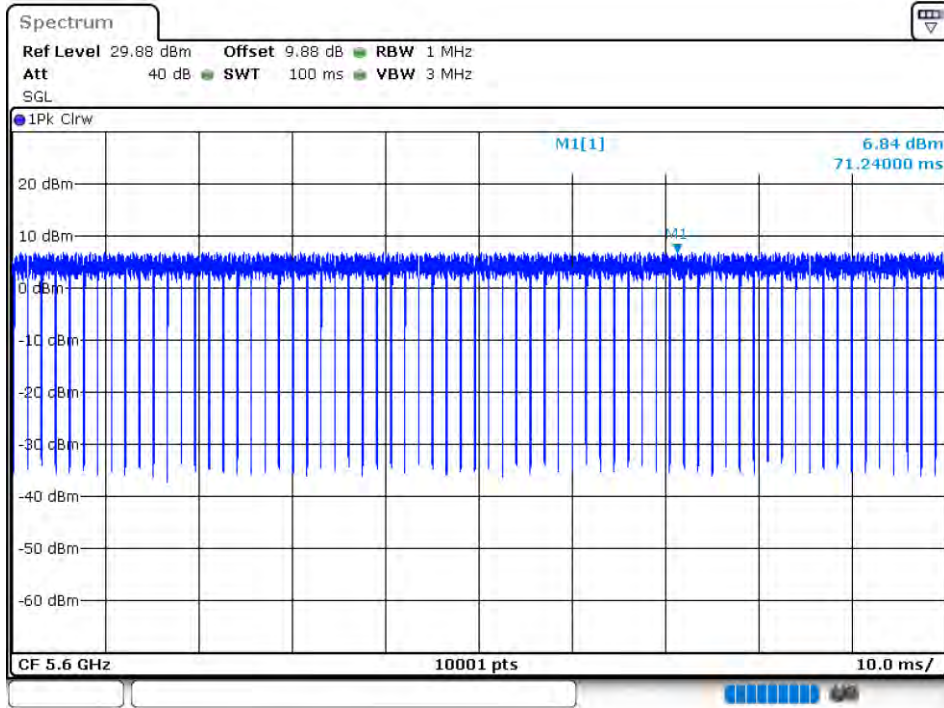


### Duty Cycle NVNT 802.11a 5700MHz Ant 2

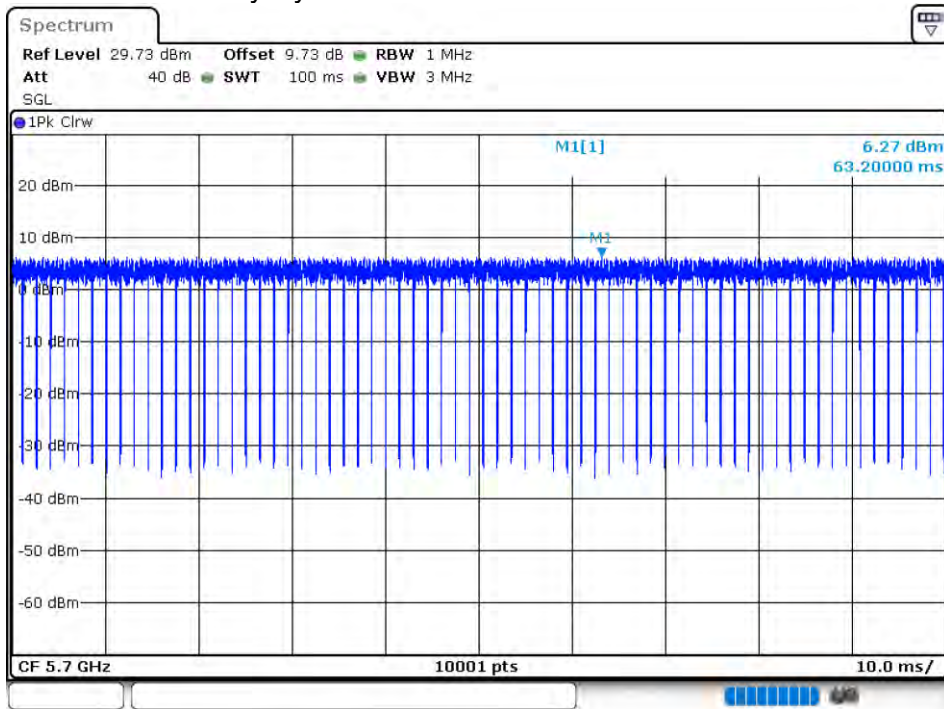


### Duty Cycle NVNT 802.11ac20 5500MHz Ant 1

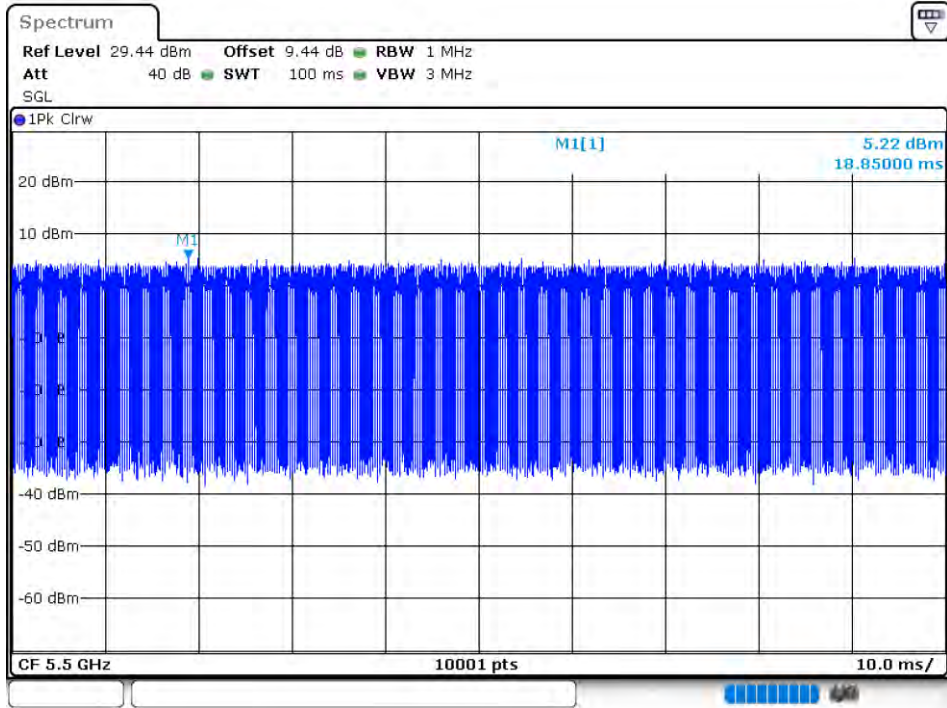


### Duty Cycle NVNT 802.11ac20 5600MHz Ant 1

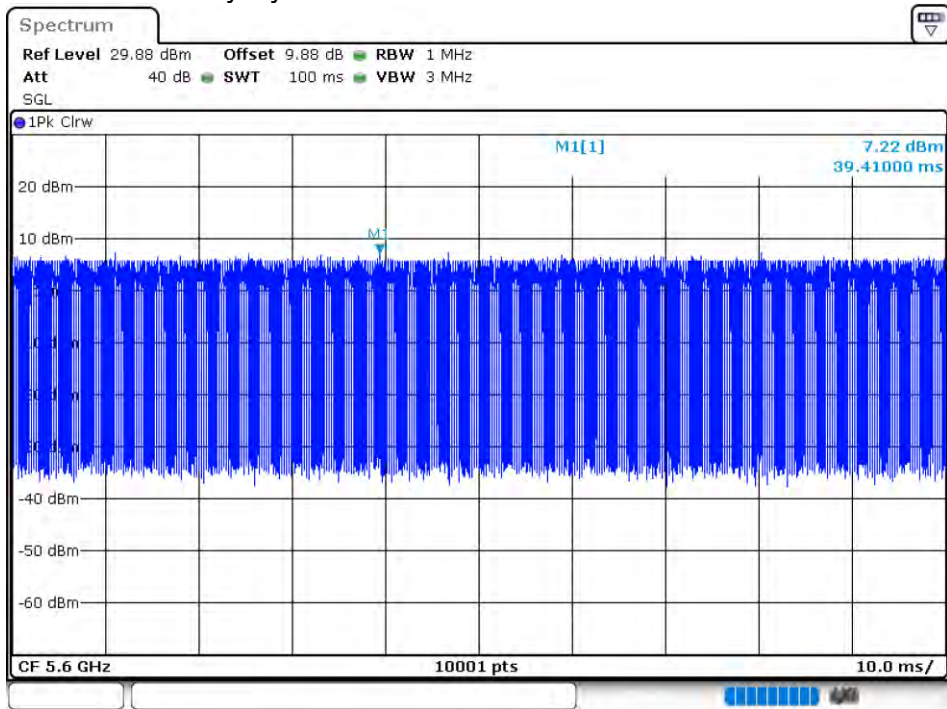


### Duty Cycle NVNT 802.11ac20 5700MHz Ant 1

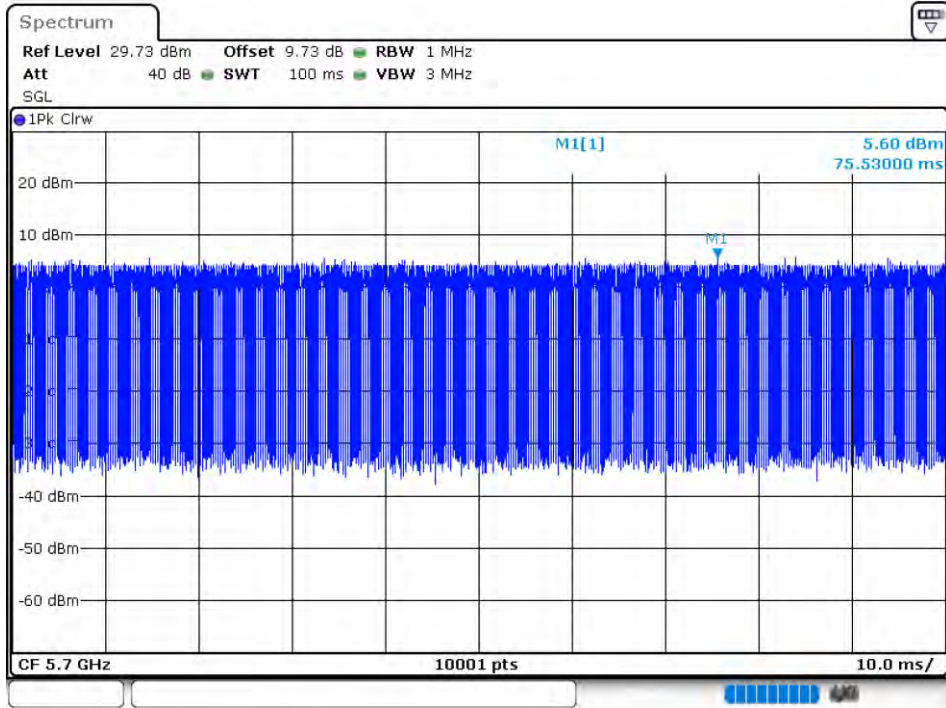


### Duty Cycle NVNT 802.11ac20 5500MHz Ant 2

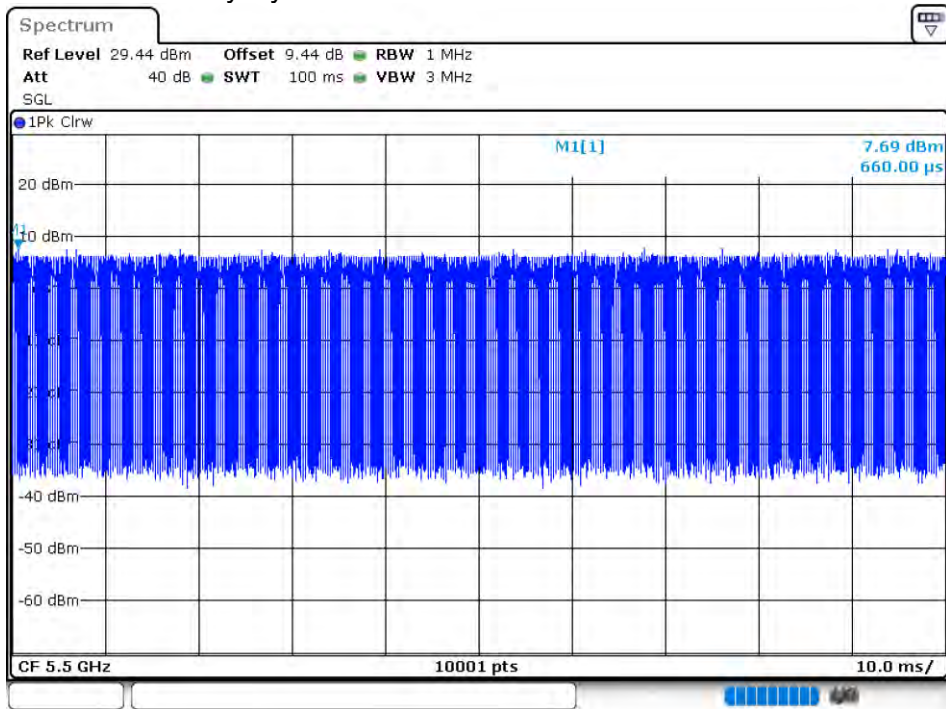

### Duty Cycle NVNT 802.11ac20 5600MHz Ant 2

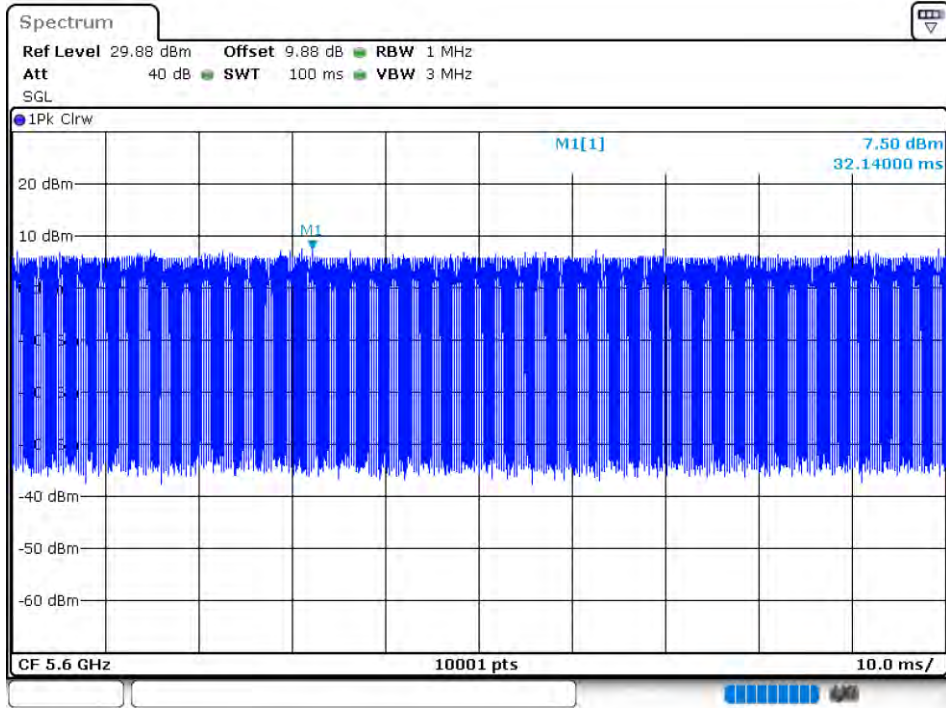


### Duty Cycle NVNT 802.11ac20 5700MHz Ant 2

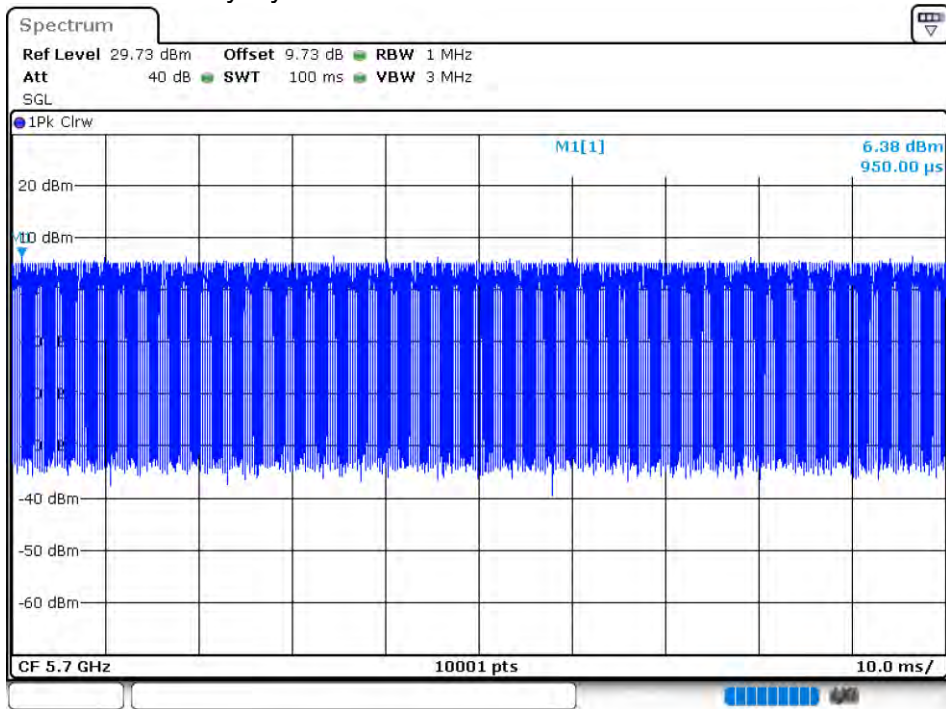





### Duty Cycle NVNT 802.11ac40 5510MHz Ant 1

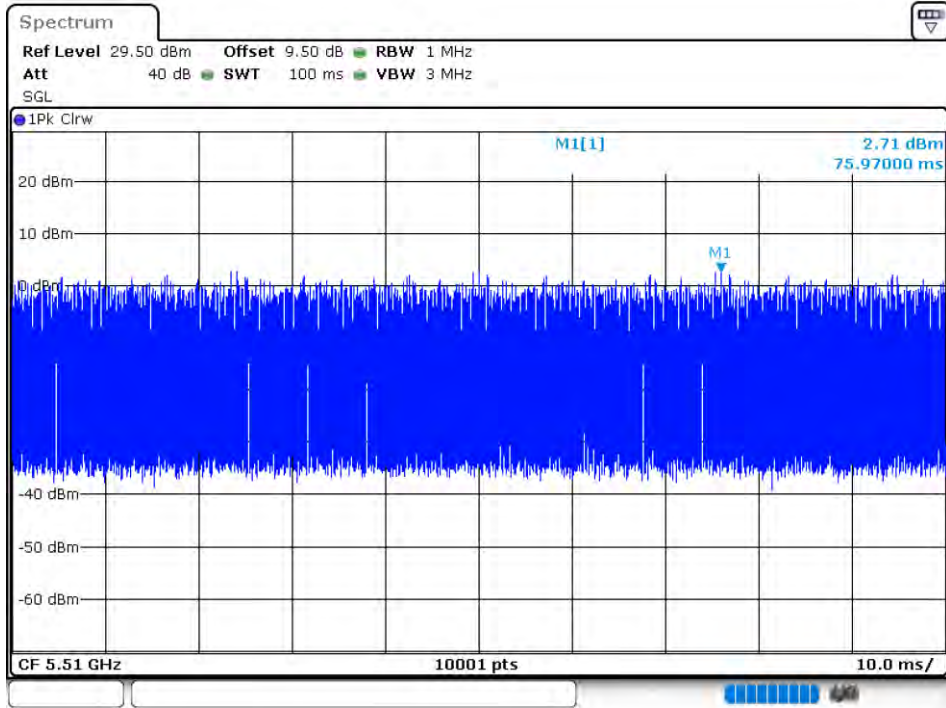


### Duty Cycle NVNT 802.11ac40 5590MHz Ant 1

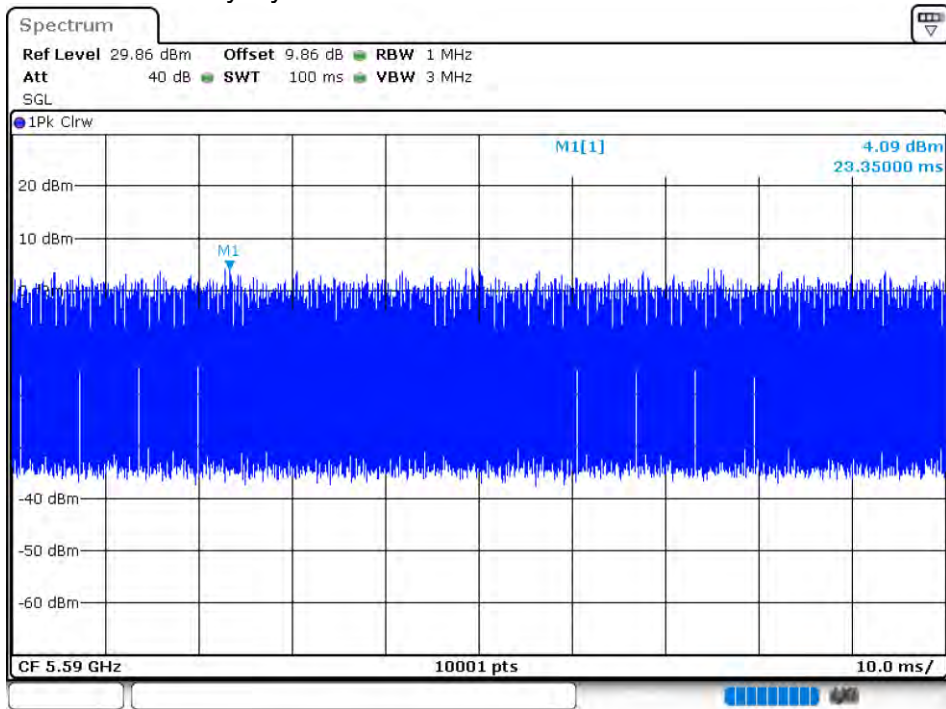


### Duty Cycle NVNT 802.11ac40 5670MHz Ant 1

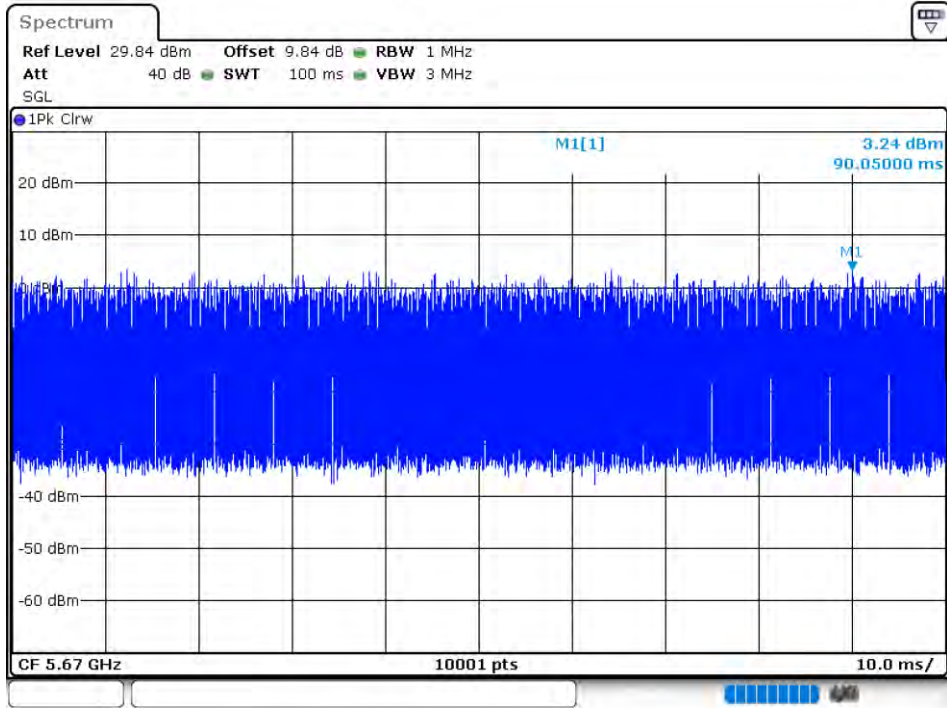


### Duty Cycle NVNT 802.11ac40 5510MHz Ant 2

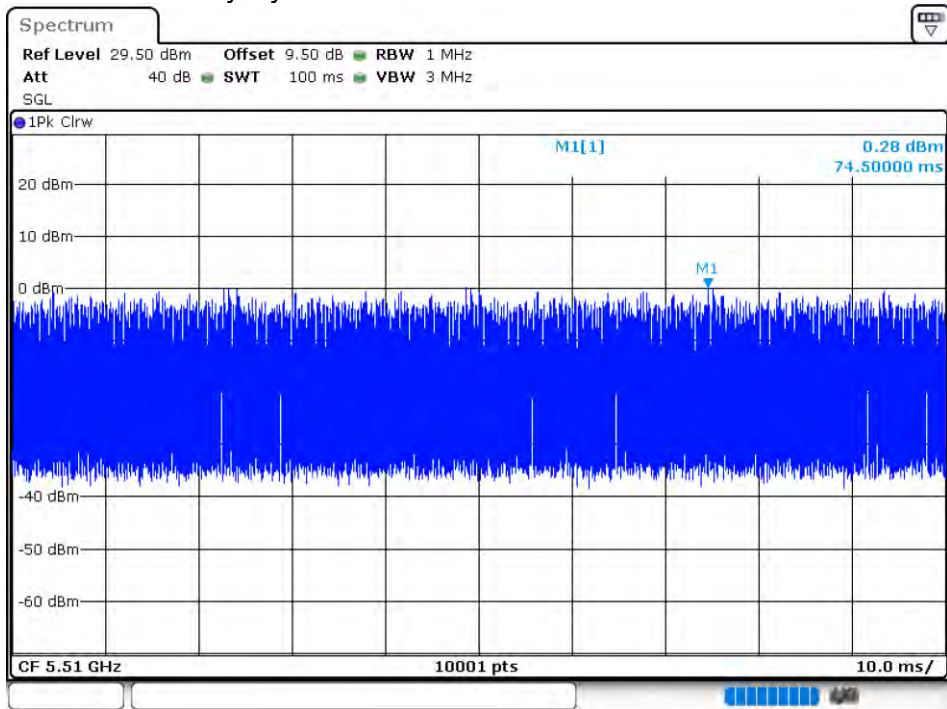


Duty Cycle NVNT 802.11ac40 5590MHz Ant 2

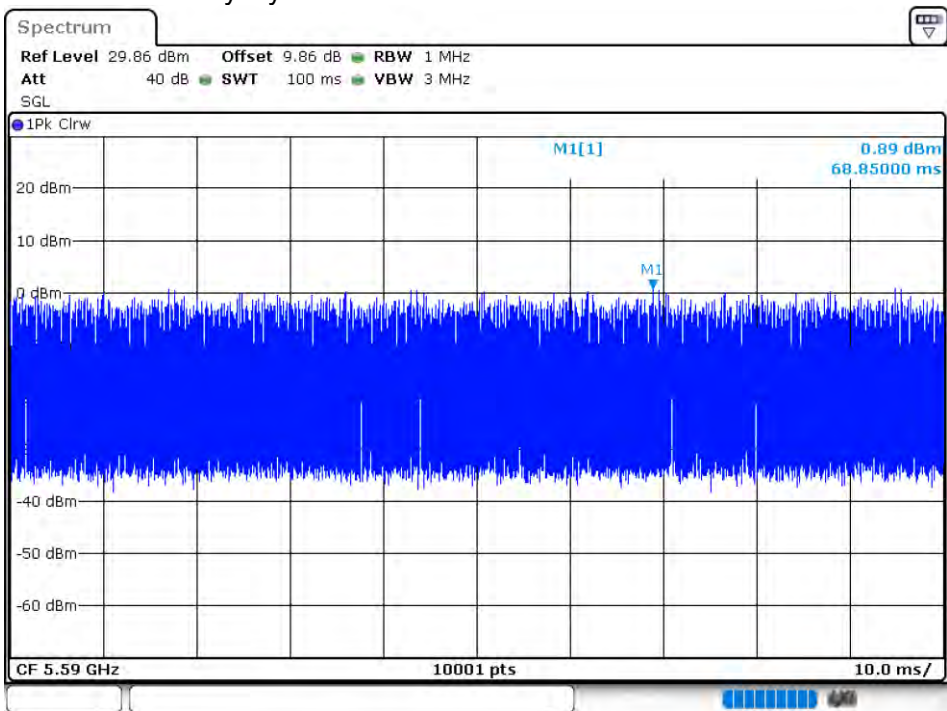


Duty Cycle NVNT 802.11ac40 5670MHz Ant 2

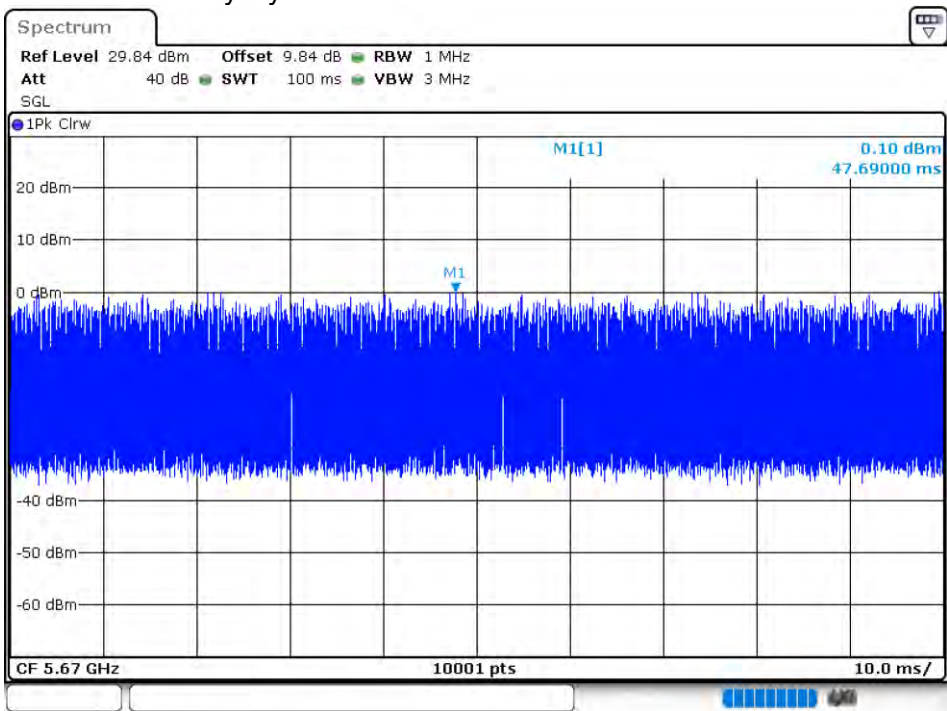


Duty Cycle NVNT 802.11ac80 5530MHz Ant 1

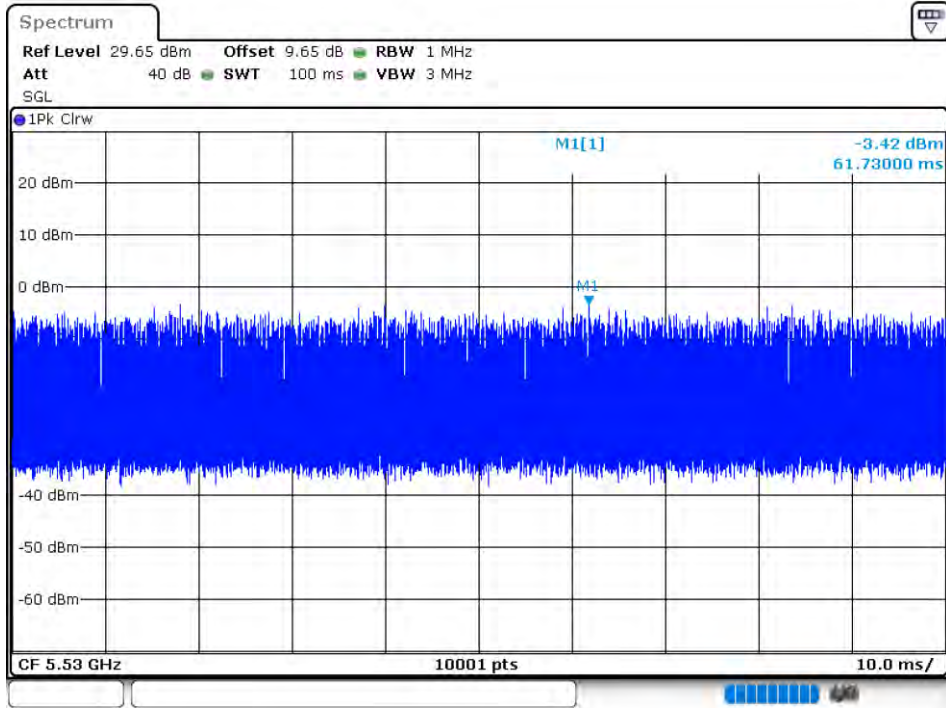


Duty Cycle NVNT 802.11ac80 5610MHz Ant 1

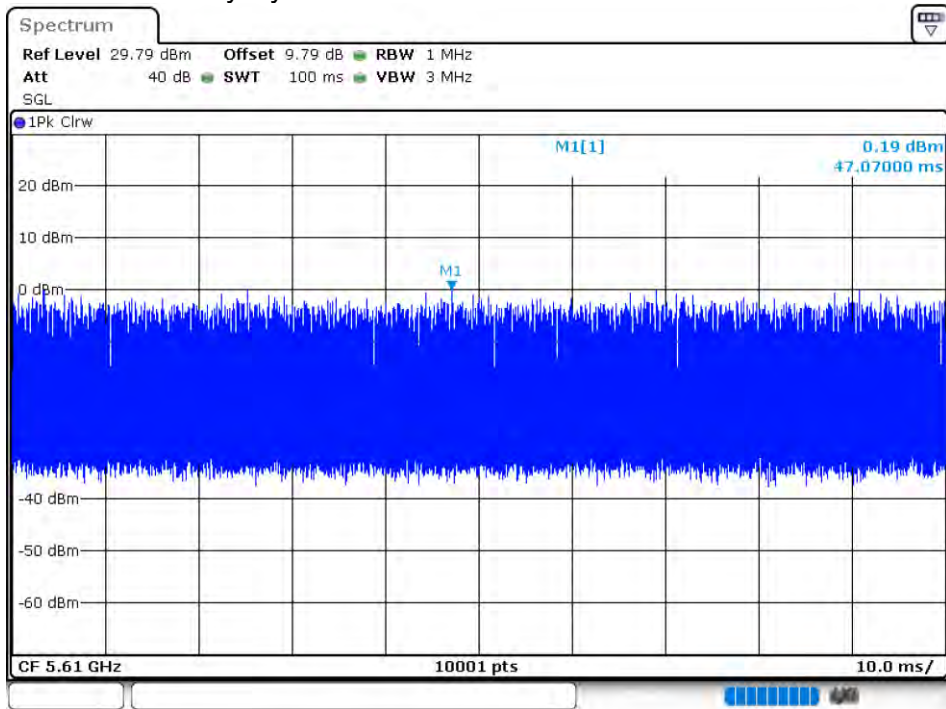


### Duty Cycle NVNT 802.11ac80 5530MHz Ant 2

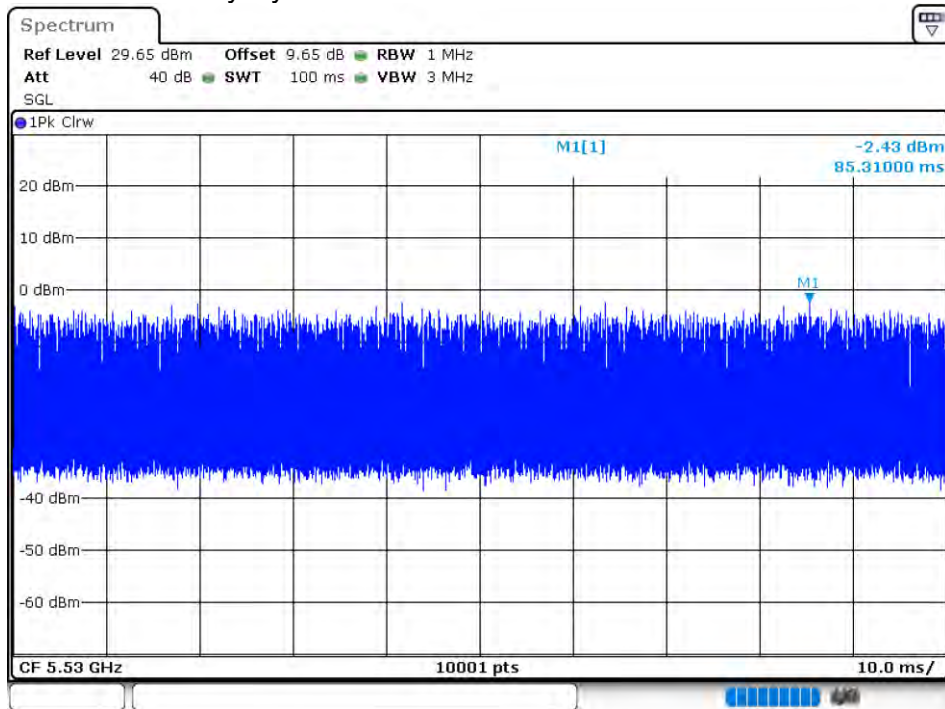


### Duty Cycle NVNT 802.11ac80 5610MHz Ant 2

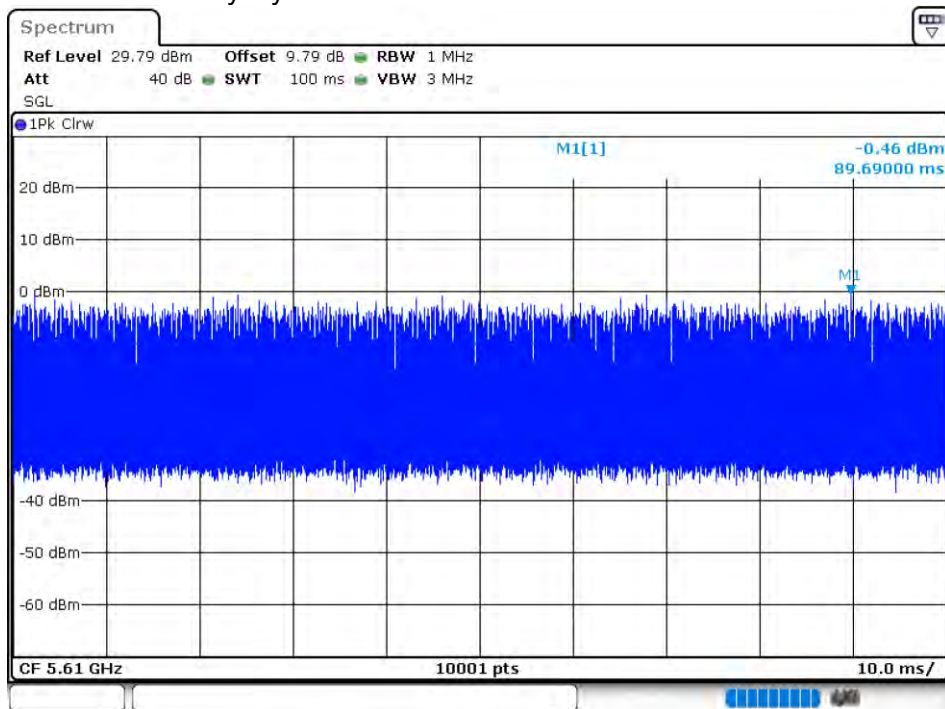


### Duty Cycle NVNT 802.11n(HT20) 5500MHz Ant 1

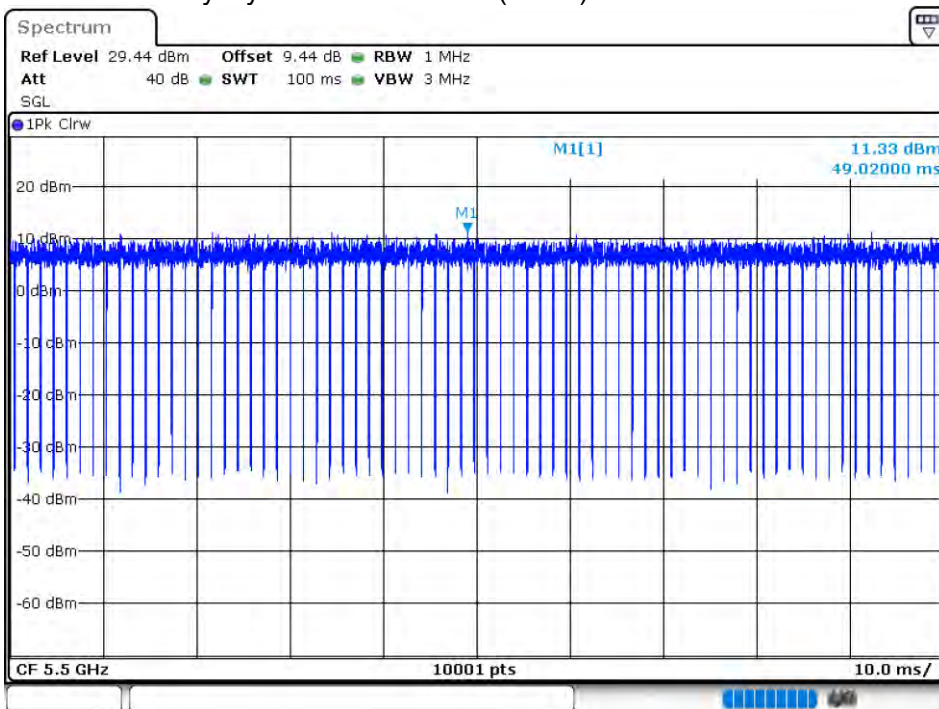


### Duty Cycle NVNT 802.11n(HT20) 5600MHz Ant 1

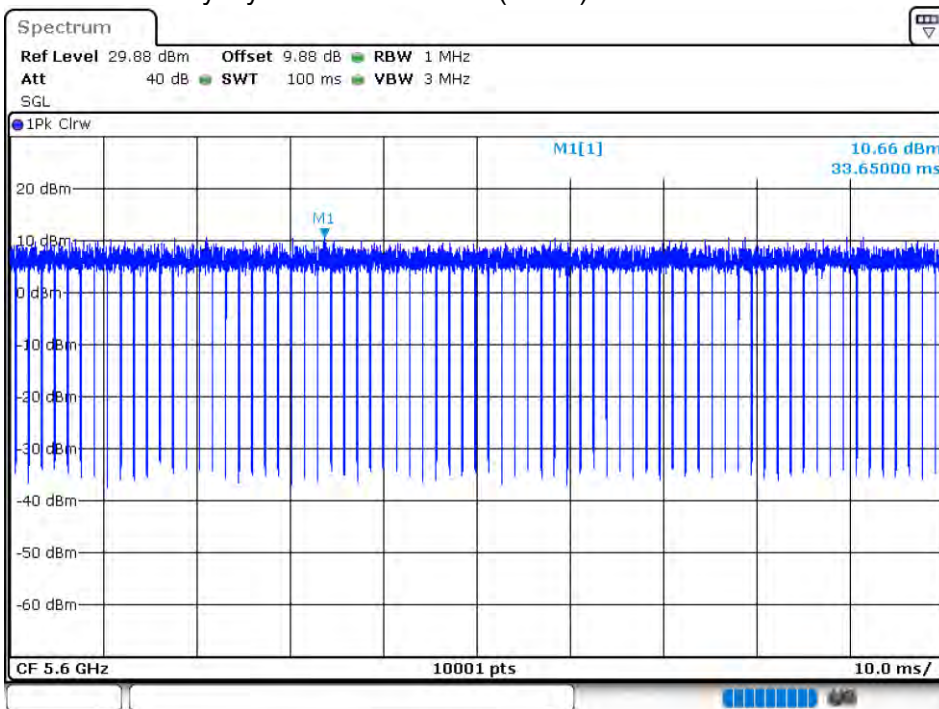


Duty Cycle NVNT 802.11n(HT20) 5700MHz Ant 1

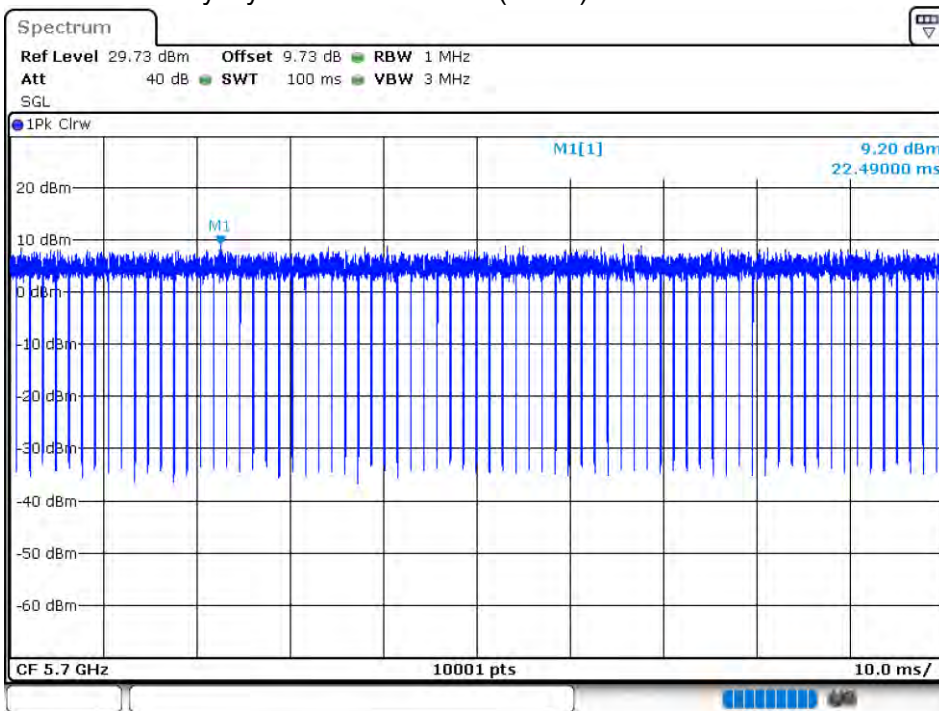


Duty Cycle NVNT 802.11n(HT20) 5500MHz Ant 2

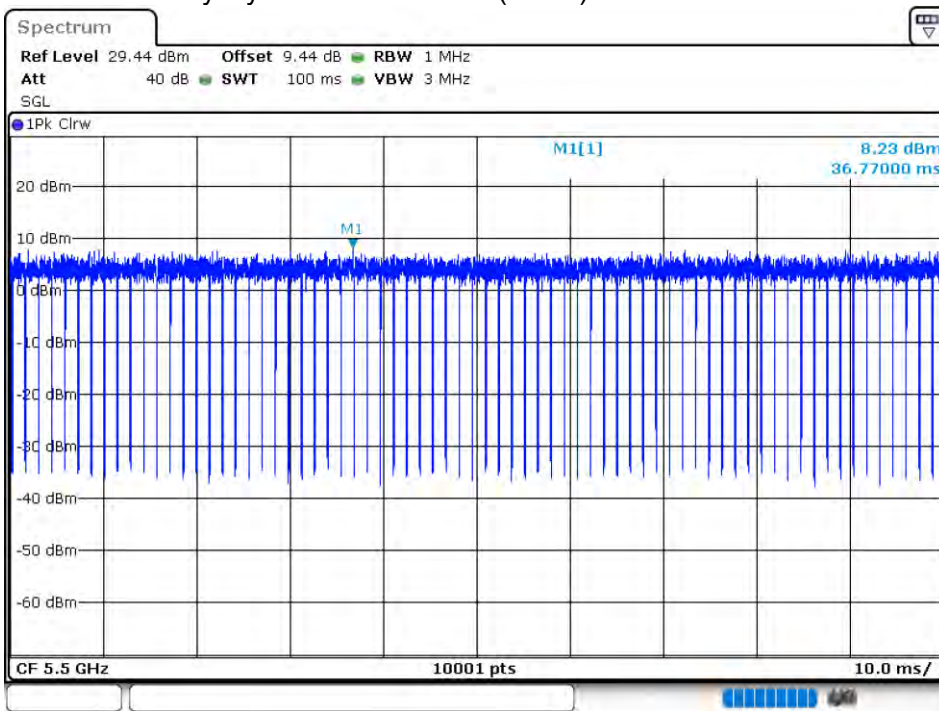

### Duty Cycle NVNT 802.11n(HT20) 5600MHz Ant 2

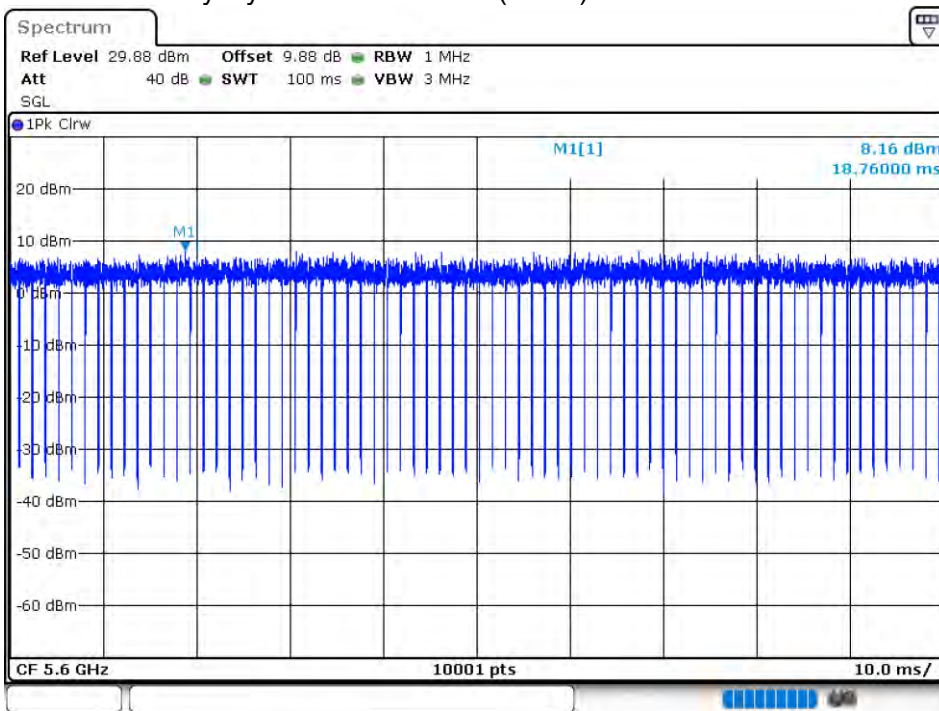


### Duty Cycle NVNT 802.11n(HT20) 5700MHz Ant 2

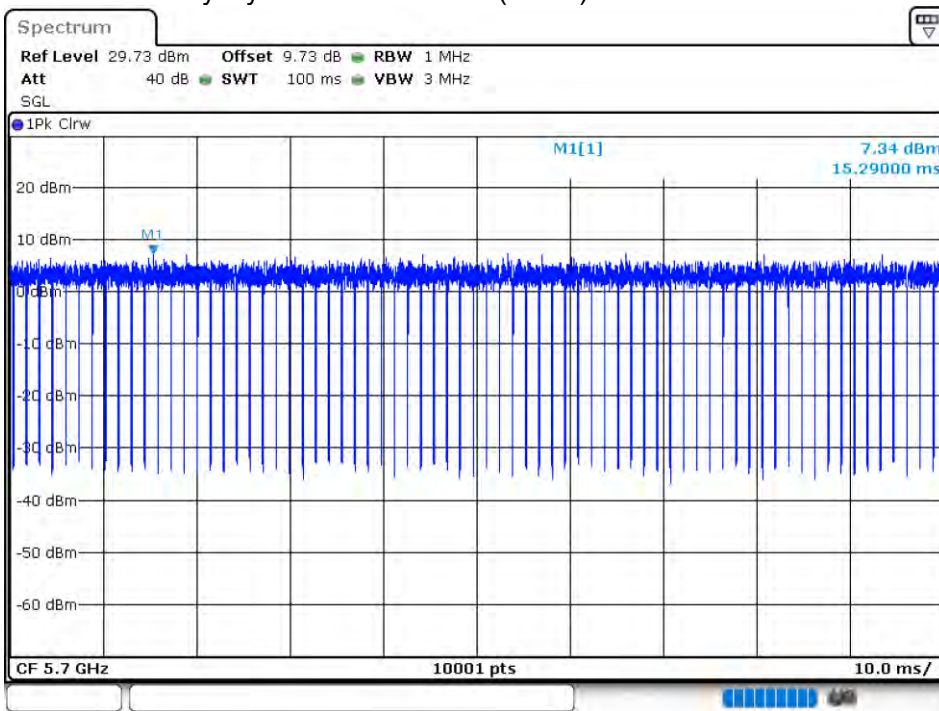





### Duty Cycle NVNT 802.11n(HT40) 5510MHz Ant 1

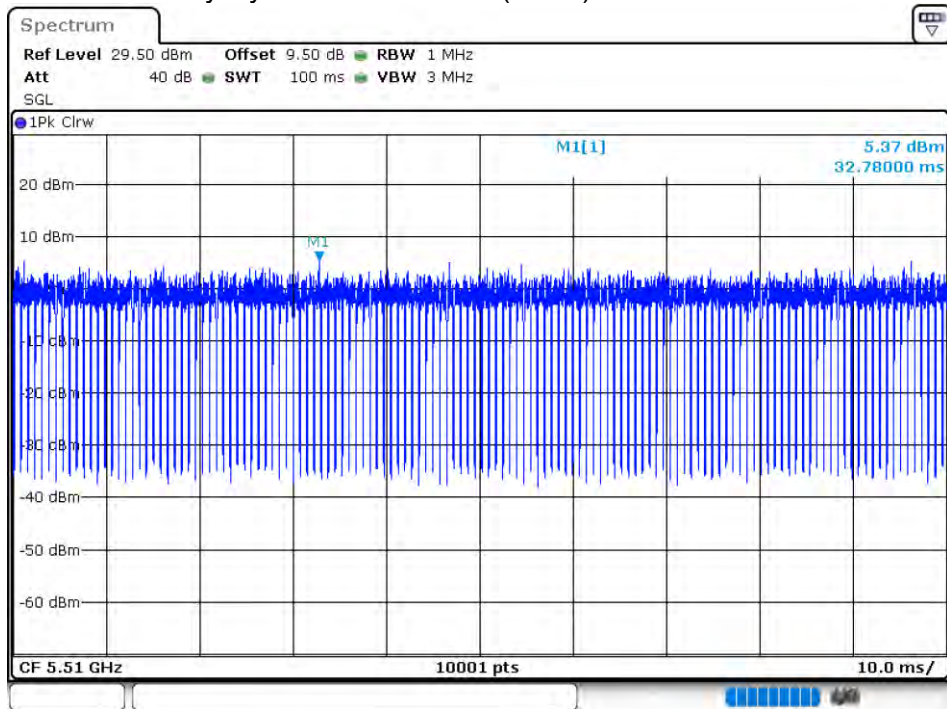


### Duty Cycle NVNT 802.11n(HT40) 5590MHz Ant 1

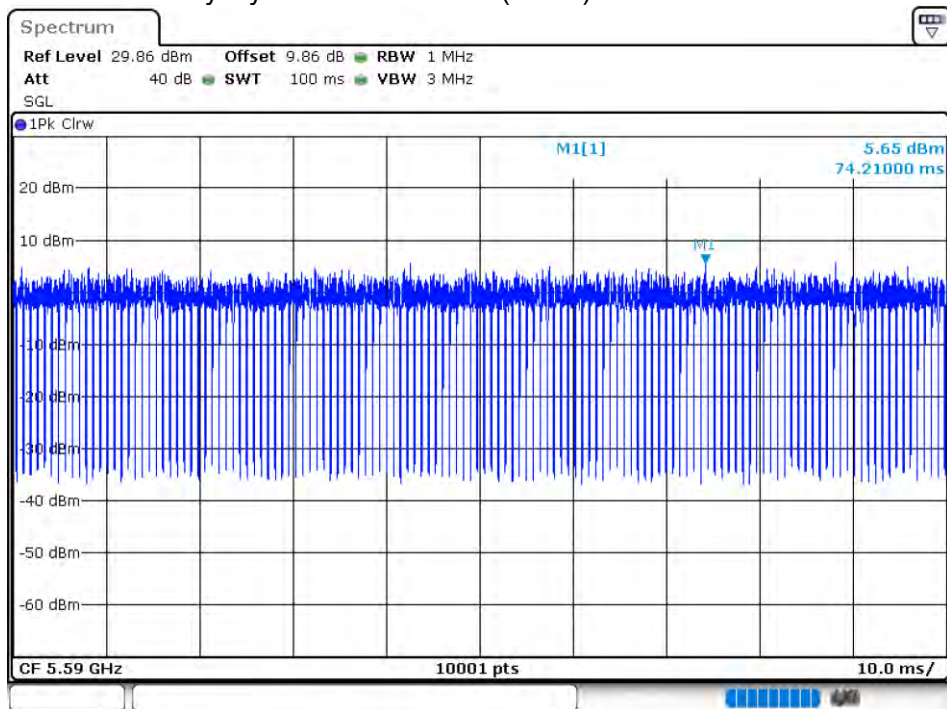


### Duty Cycle NVNT 802.11n(HT40) 5670MHz Ant 1

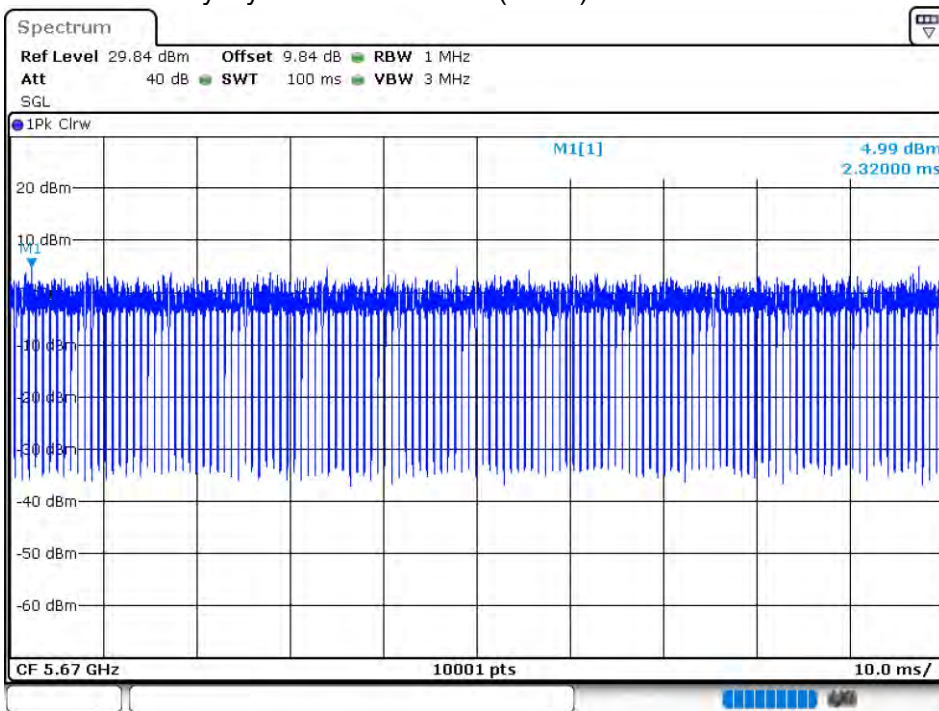


### Duty Cycle NVNT 802.11n(HT40) 5510MHz Ant 2

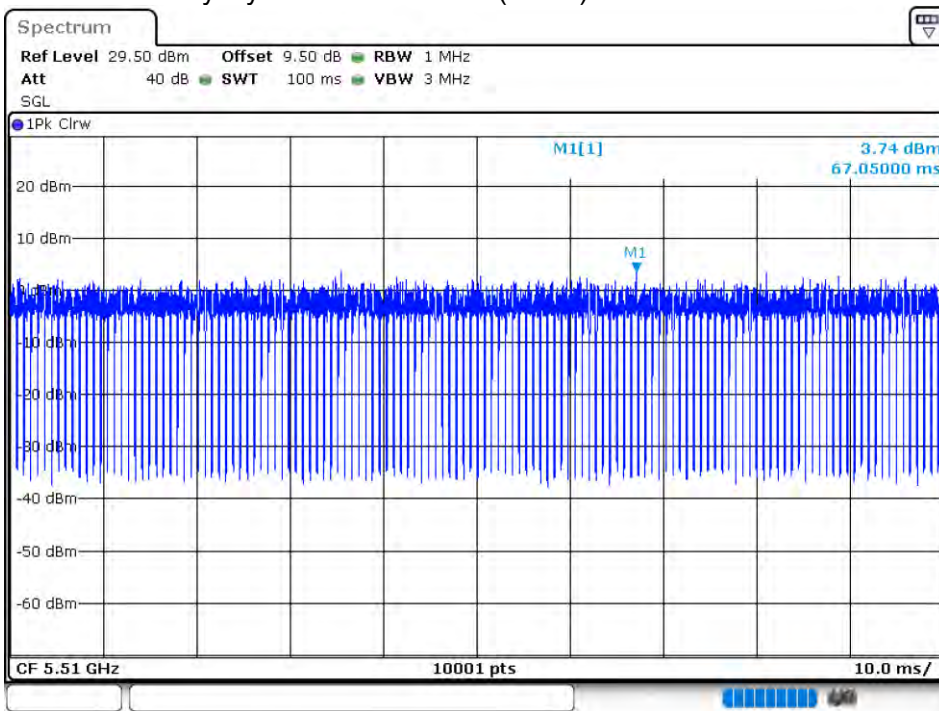

Duty Cycle NVNT 802.11n(HT40) 5590MHz Ant 2

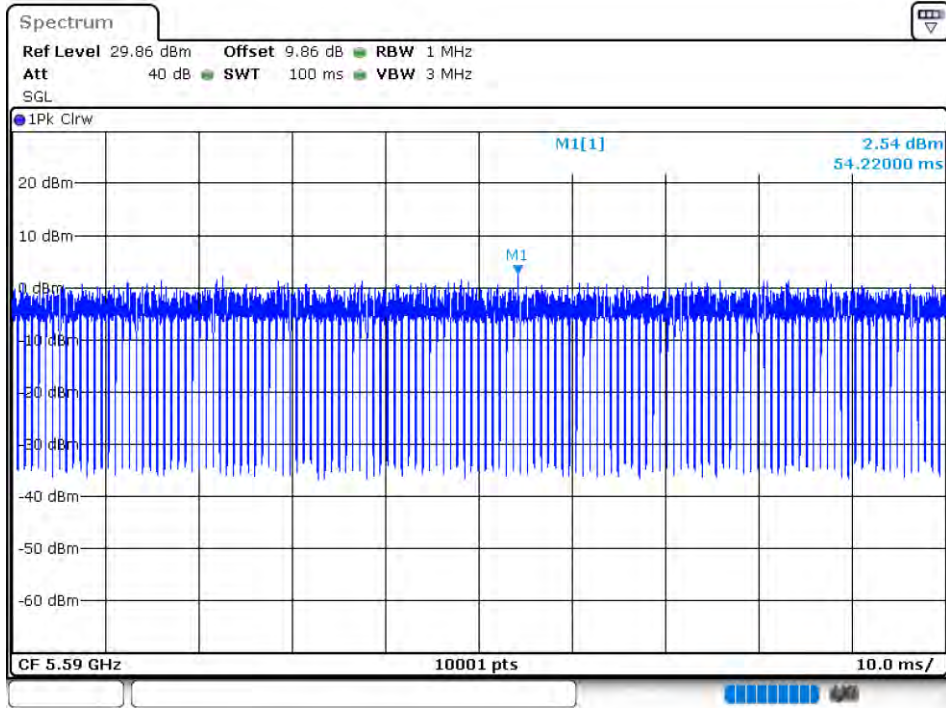


Duty Cycle NVNT 802.11n(HT40) 5670MHz Ant 2

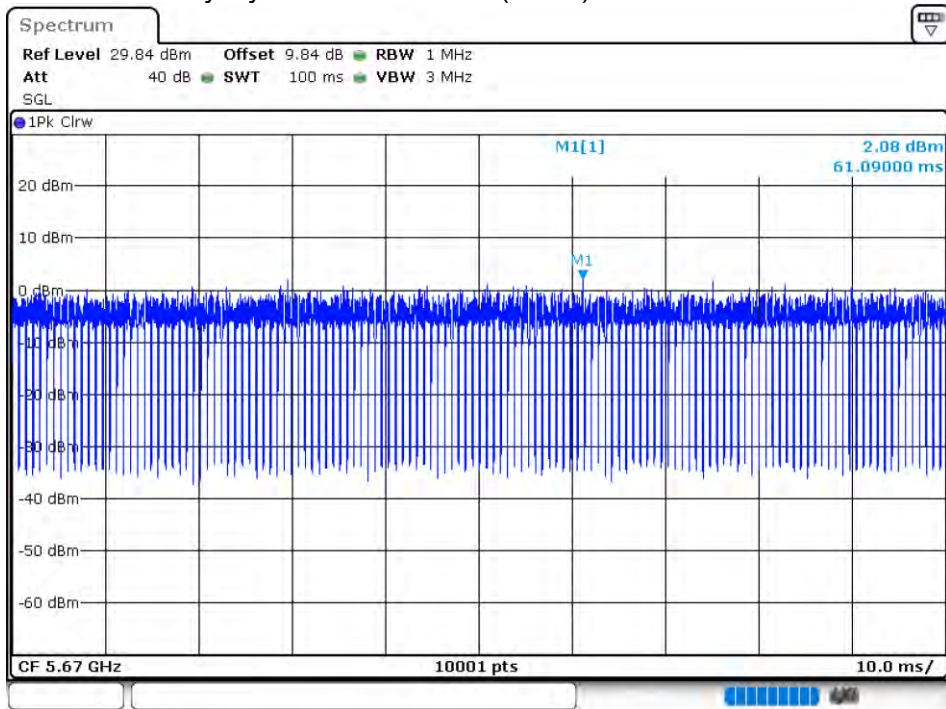


5.8G:

Antenna	Condition	Mode	Frequency (MHz)	Duty Cycle (%)
Ant 1	NVNT	802.11a	5745	100
Ant 1	NVNT	802.11a	5785	100
Ant 1	NVNT	802.11a	5825	100
Ant 2	NVNT	802.11a	5745	100
Ant 2	NVNT	802.11a	5785	100
Ant 2	NVNT	802.11a	5825	100
Ant 1	NVNT	802.11ac20	5745	100
Ant 1	NVNT	802.11ac20	5785	100
Ant 1	NVNT	802.11ac20	5825	100
Ant 2	NVNT	802.11ac20	5745	100
Ant 2	NVNT	802.11ac20	5785	100
Ant 2	NVNT	802.11ac20	5825	100
Ant 1	NVNT	802.11ac40	5755	100
Ant 1	NVNT	802.11ac40	5795	100
Ant 2	NVNT	802.11ac40	5755	100
Ant 2	NVNT	802.11ac40	5795	100
Ant 1	NVNT	802.11ac80	5775	100
Ant 2	NVNT	802.11ac80	5775	100
Ant 1	NVNT	802.11n(HT20)	5745	100
Ant 1	NVNT	802.11n(HT20)	5785	100
Ant 1	NVNT	802.11n(HT20)	5825	100
Ant 2	NVNT	802.11n(HT20)	5745	100
Ant 2	NVNT	802.11n(HT20)	5785	100
Ant 2	NVNT	802.11n(HT20)	5825	100
Ant 1	NVNT	802.11n(HT40)	5755	100
Ant 1	NVNT	802.11n(HT40)	5795	100
Ant 2	NVNT	802.11n(HT40)	5755	100
Ant 2	NVNT	802.11n(HT40)	5795	100


Duty Cycle NVNT 802.11a 5745MHz Ant 1

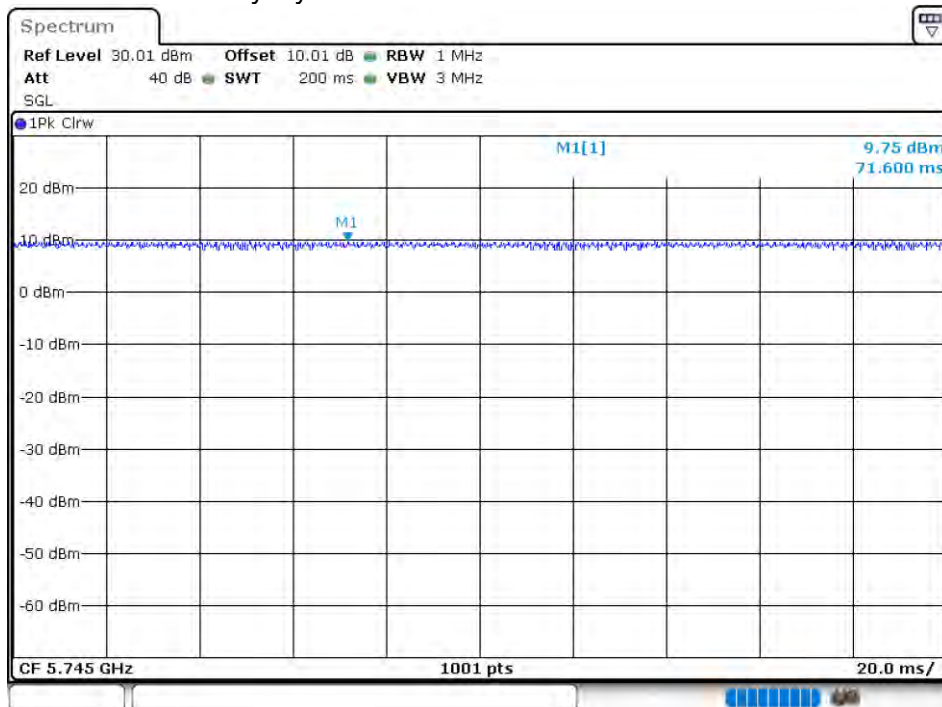


### Duty Cycle NVNT 802.11a 5785MHz Ant 1

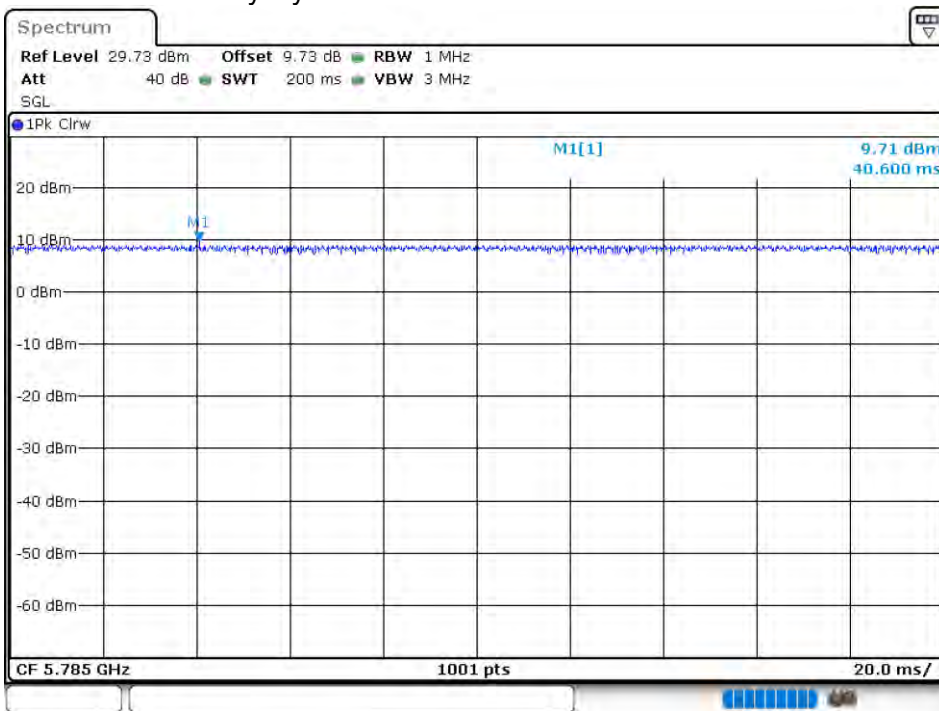


### Duty Cycle NVNT 802.11a 5825MHz Ant 1

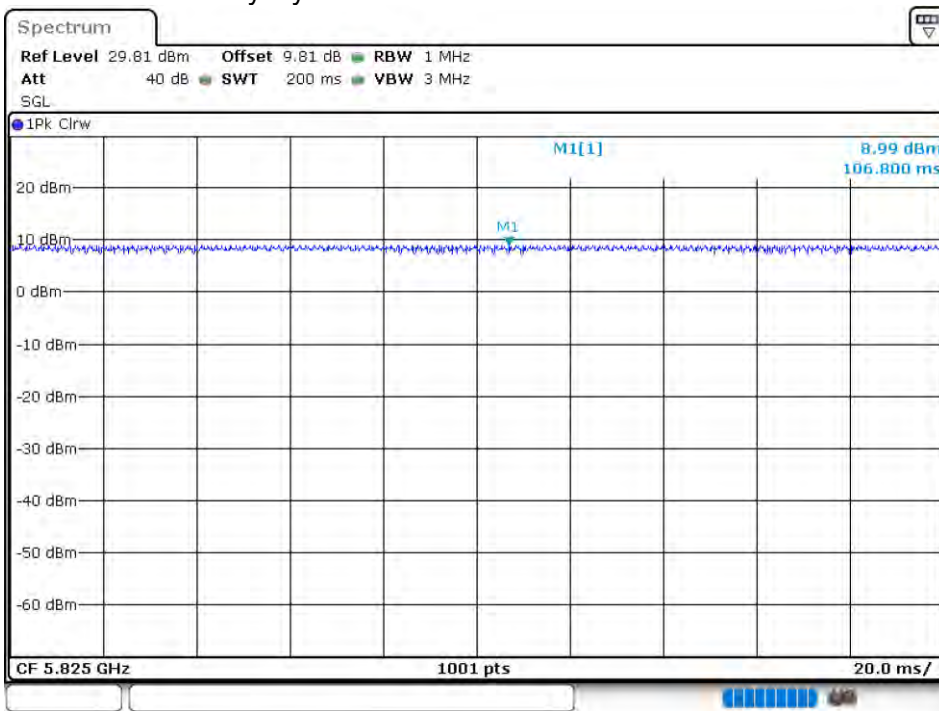


### Duty Cycle NVNT 802.11a 5745MHz Ant 2

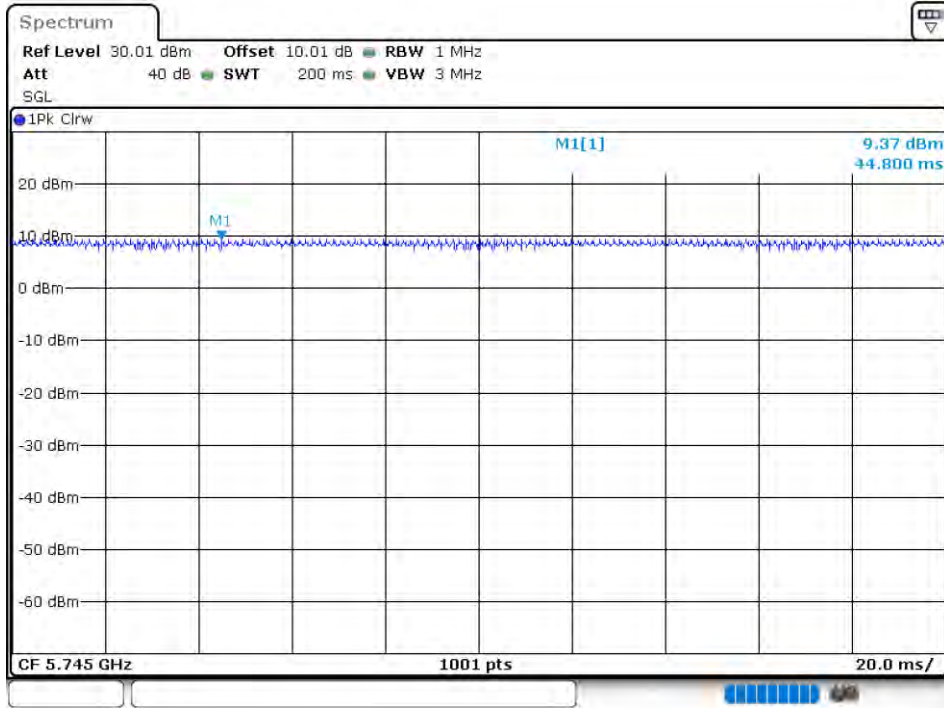


### Duty Cycle NVNT 802.11a 5785MHz Ant 2

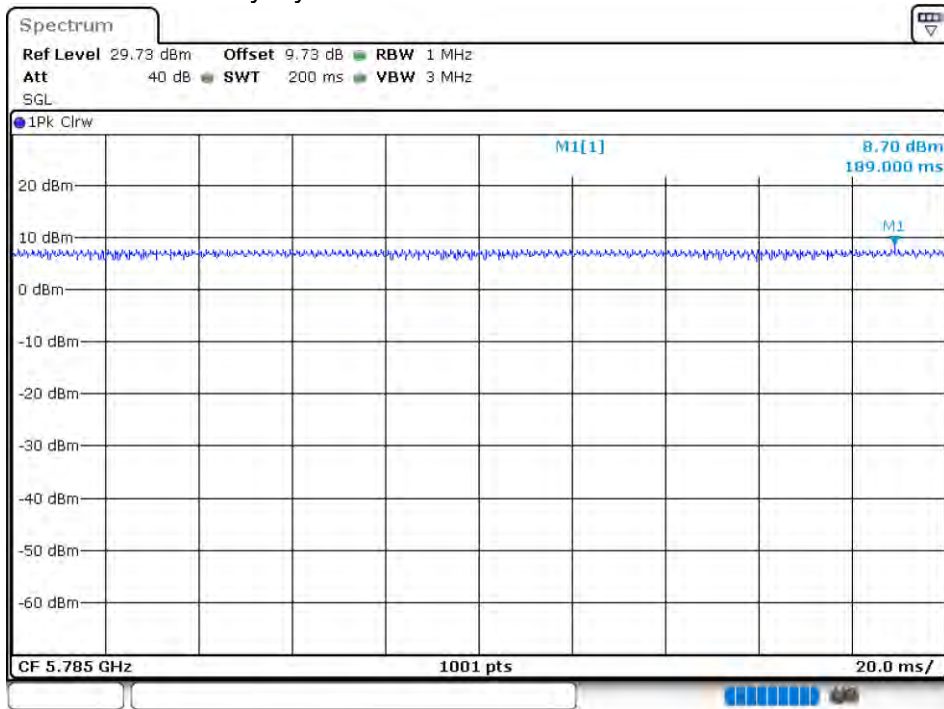


### Duty Cycle NVNT 802.11a 5825MHz Ant 2

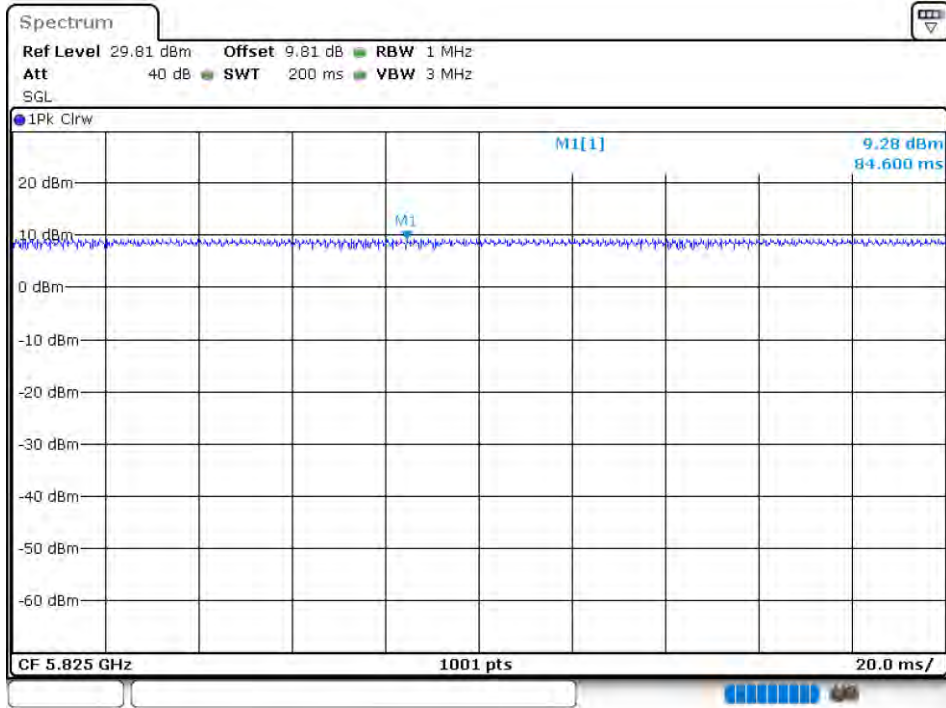


### Duty Cycle NVNT 802.11ac20 5745MHz Ant 1

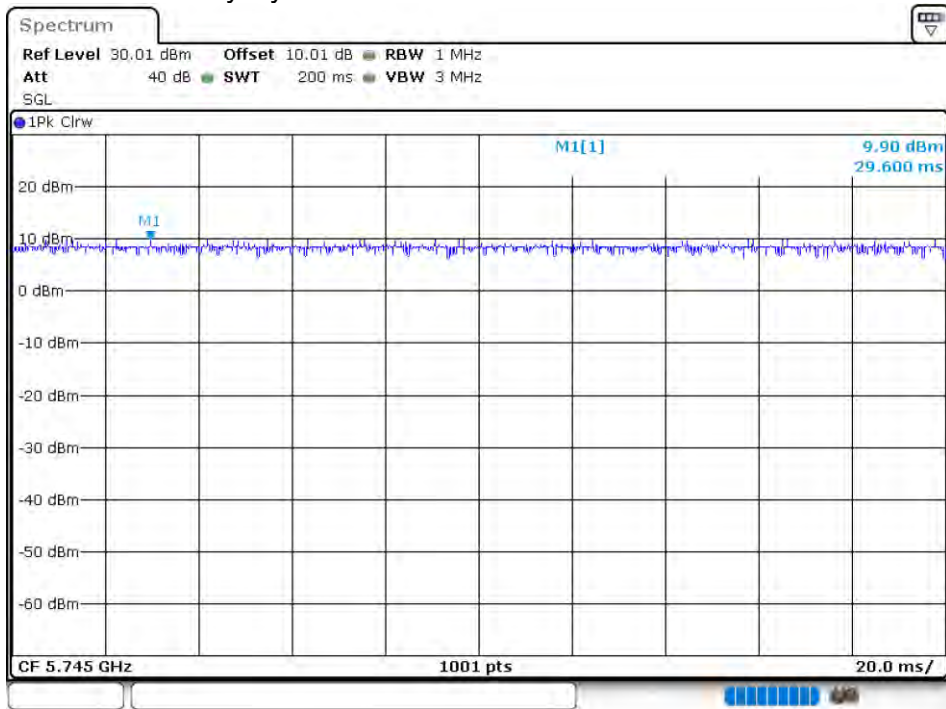

### Duty Cycle NVNT 802.11ac20 5785MHz Ant 1

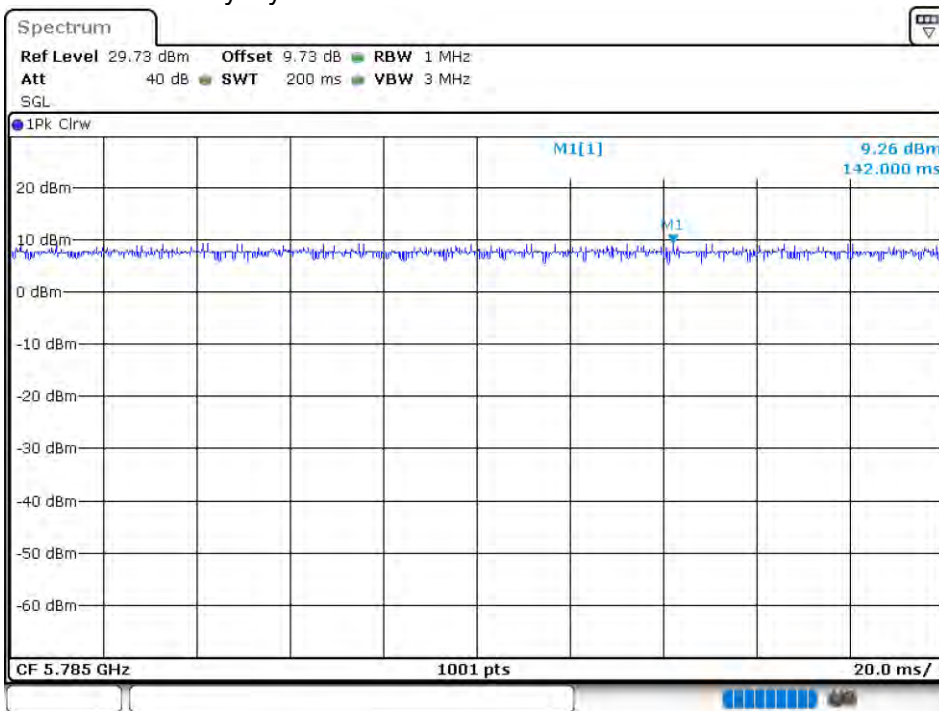


### Duty Cycle NVNT 802.11ac20 5825MHz Ant 1

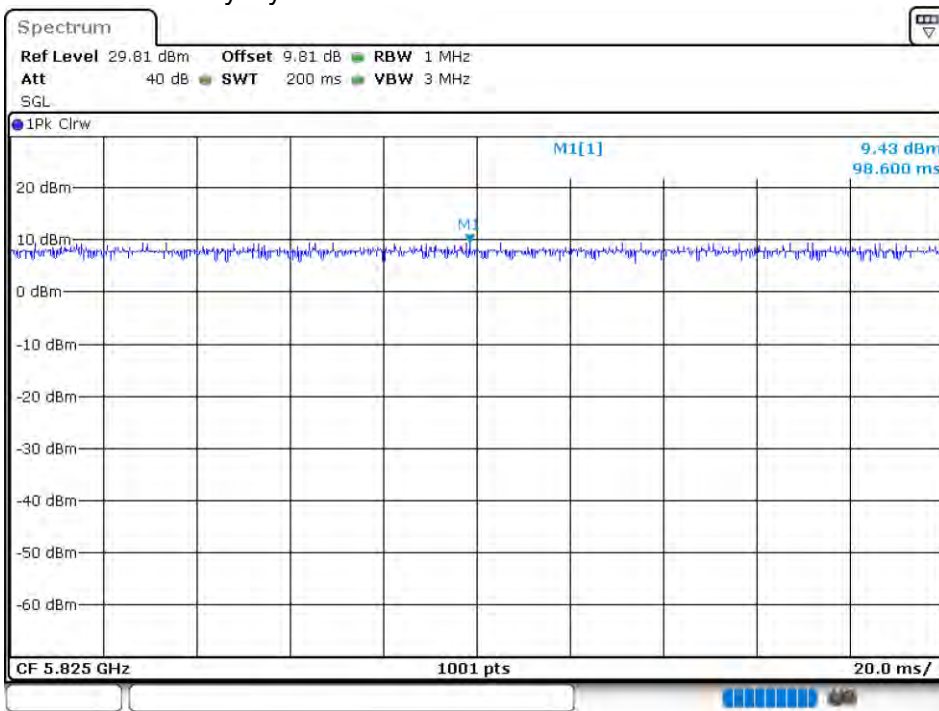





Duty Cycle NVNT 802.11ac20 5745MHz Ant 2

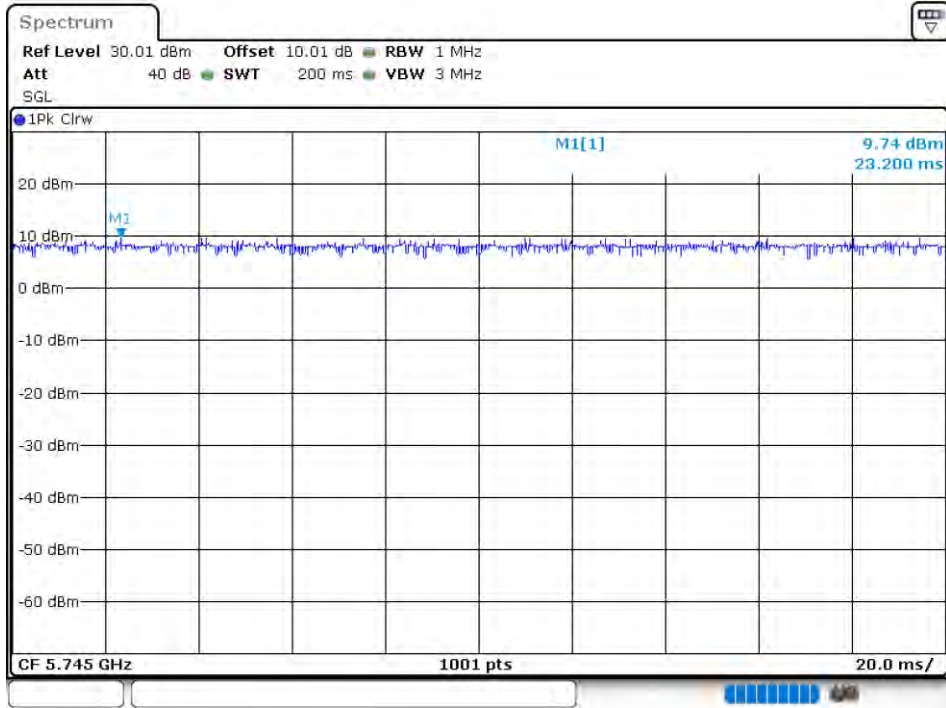


Duty Cycle NVNT 802.11ac20 5785MHz Ant 2

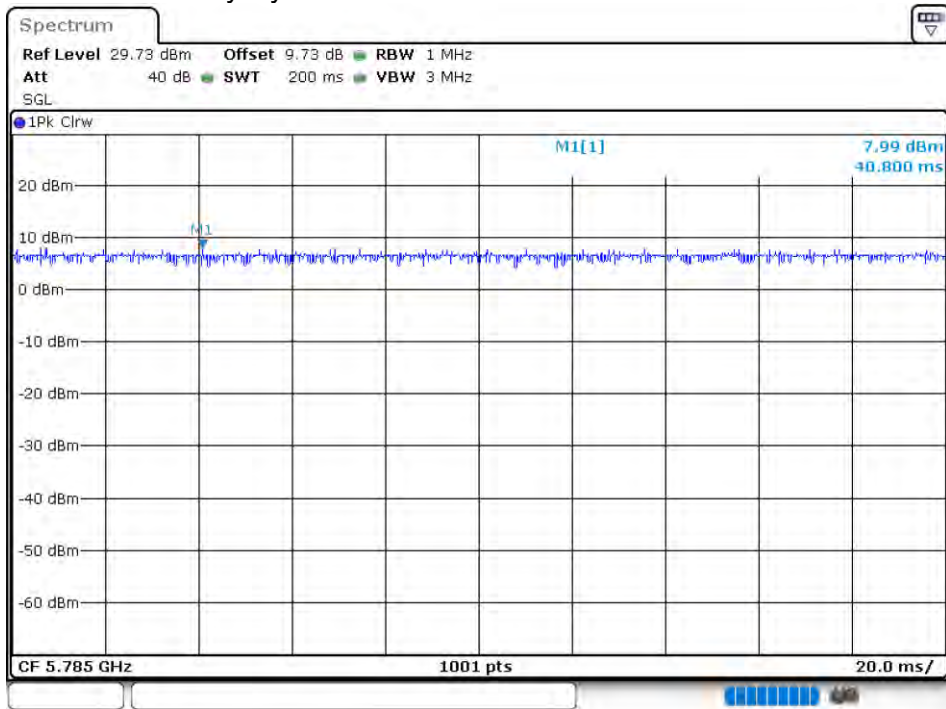


### Duty Cycle NVNT 802.11ac20 5825MHz Ant 2

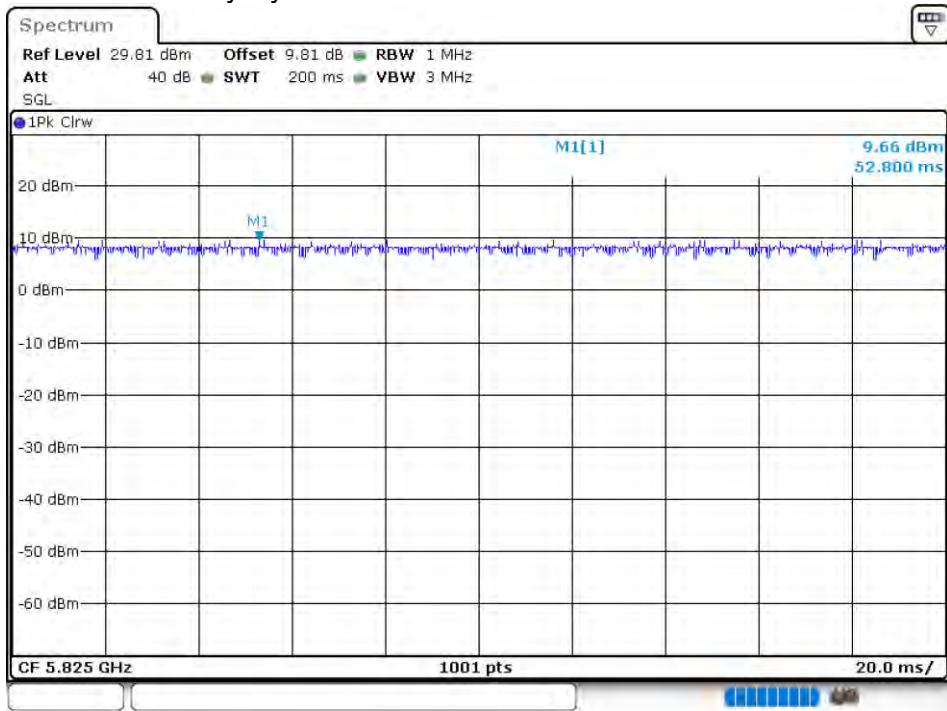

### Duty Cycle NVNT 802.11ac40 5755MHz Ant 1

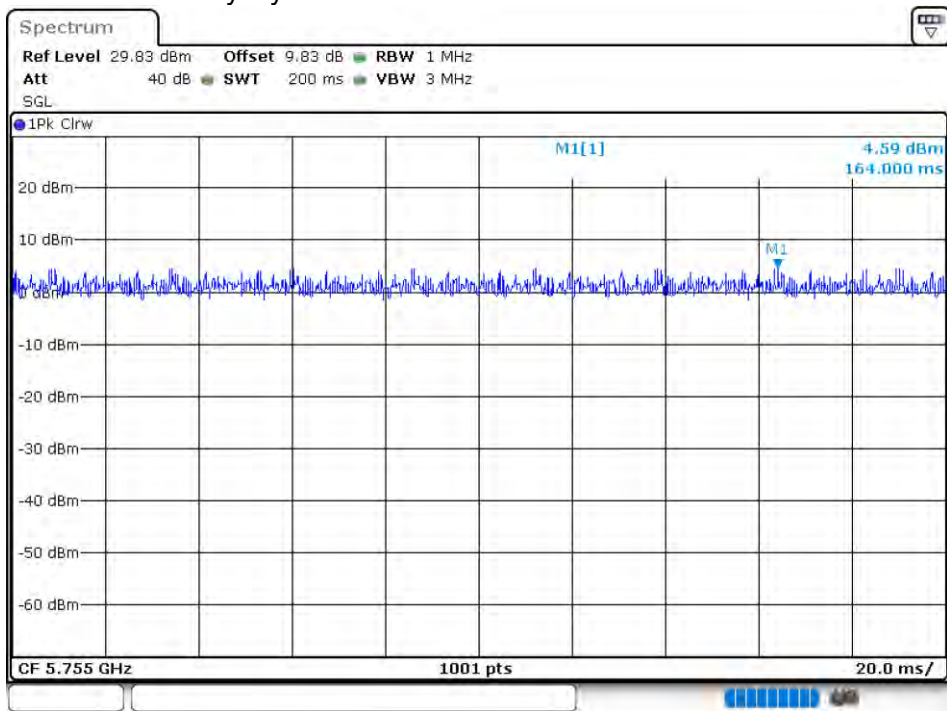

### Duty Cycle NVNT 802.11ac40 5795MHz Ant 1

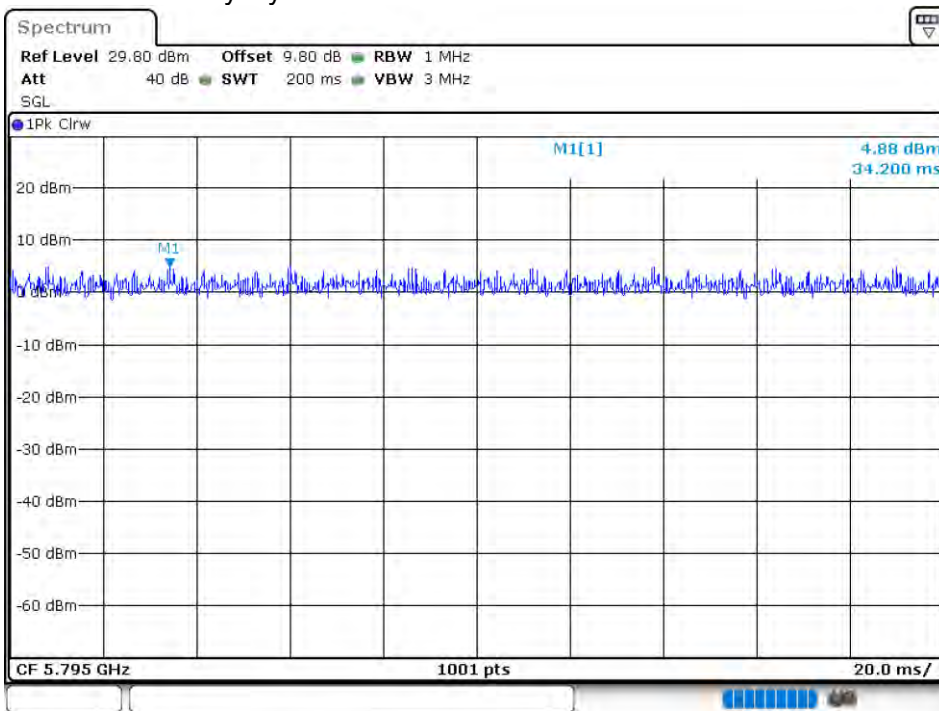

### Duty Cycle NVNT 802.11ac40 5755MHz Ant 2

